

Search2Skill: Skill Distillation Beyond Knowledge Boundaries Via Rubric-Based Reinforcement Learning

Muyang Ye¹, Tian Lan², Feihu Jiang², Yongshi Ye³, Wuyunsiqin¹, Bin Zhu², Qianghuai Jia²,
Longyue Wang², Zhao Xu², Weihua Luo², Ye Wang⁴, Jinyang Zhang^{*1}, Lingfeng Bao^{*1}

¹Zhejiang University ²Alibaba Group

³Institute of Artificial Intelligence, Xiamen University ⁴Zhejiang Gongshang University

Abstract

Reusable skills, which encapsulate the procedural knowledge required to solve real-world professional tasks, offer LLM-based agents a path toward self-evolution in expert domains. Existing self-evolving skill methods construct skills internally from the model’s parametric knowledge or trajectories, and are therefore bounded by what the model already knows. However, the domain conventions and standard procedures underlying professional skills often lie beyond this boundary and are hard to elicit from the agent alone. To address this issue, we therefore propose a novel framework, Search2Skill, that automatically identifies the agent’s capability gaps, searches external sources to address them, and distills the retrieved evidence into structured, reusable skills. Specifically, Search2Skill is optimized by a rubric-based reinforcement learning scheme that jointly improves when to search, how to search, and how to generate skills. Experiments on eight expert-level domains from three benchmarks show that Search2Skill consistently outperforms both search-augmented and trajectory-based skill-learning baselines under both streaming and held-out evaluation protocols. Further analyses show that the gains arise from skill abstraction rather than raw retrieved evidence, and that the acquired skills transfer across model scales.

Introduction

As LLM-based agents are deployed in increasingly open-ended and specialized environments, a central challenge is how they can continually expand what they are able to do (Ni et al. 2026; Zhou et al. 2026). Reusable skills, procedural artifacts that encode domain-specific workflows, solution strategies, or tool-use knowledge (Lu et al. 2026), offer agents a path toward self-evolution: once distilled, a skill can be reused to improve performance across an entire class of related tasks, a paradigm increasingly framed as *self-evolving skills* (Yang et al. 2026; Alzubi et al. 2026).

However, existing skill learning remains largely *inward-looking*: representative methods such as Trace2Skill distill skills purely by consolidating the agent’s execution trajectories through inductive reasoning over its prior experience (Ni et al. 2026; Wang et al. 2023; Ouyang et al. 2025), and thus cannot expand the model’s underlying capability boundary. This is a fundamental limitation in professional domains,

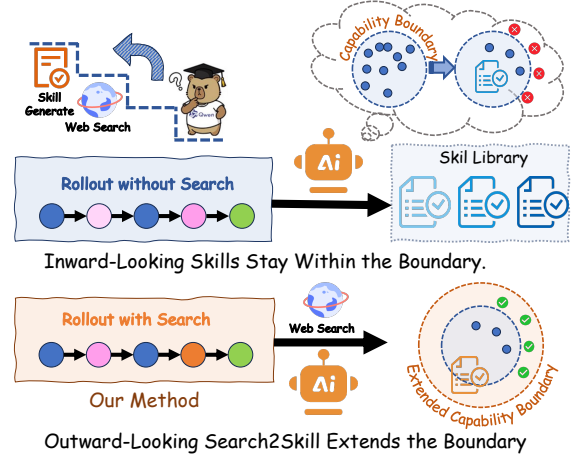


Figure 1: Inward-looking skill stays within the LLMs’ boundary while outward-looking Search2Skill pushes it beyond.

where the requisite skills, encoding domain conventions, standard procedures, and practical experience accumulated by human experts, often lie exactly beyond that boundary. Our preliminary study further reveals that models can often recognize when they lack the capability required for a task, yet this missing capability still causes a substantial drop in performance. We therefore argue that agent’s self-evolving skill should also look *outward*. As illustrated in Figure 1, a rollout without search can only recombine skills already inside the agent’s capability boundary and therefore still fails once a task falls outside it, whereas a rollout with search lets the agent retrieve external evidence and distill what it finds into a new skill that pushes the boundary outward, turning the same previously unsolvable task into a solved one. Retrieving such knowledge from the web is often far more efficient than rediscovering it through trial-and-error experience, e.g., a niche physics identity that is readily available in the literature but rarely recovered through interaction alone.

To realize this idea, we propose **Search2Skill**, a search-driven skill acquisition framework that closes the loop among capability-gap identification, external search, and skill distillation. Given a task, the agent reasons with its parametric knowledge and skill library, and upon identifying a capability

*Corresponding authors. Contact: lingfengbao@zju.edu.cn

gap, enters an exploration state, formulates targeted queries, gathers evidence from external sources, and distills it into a skill that is written back to the library for both the current and future related tasks. Crucially, an effective agent must jointly learn *when to search*, *how to search*, and *how to distill skills*; without optimization, an agent may misjudge when search is needed, retrieve irrelevant or biased evidence, or distill skills that are unfaithful to the evidence and overly instance-specific. We therefore optimize Search2Skill with a rubric-based reinforcement learning objective (Gunjal et al. 2025; Shao et al. 2026), beyond task success, rewards the exploration decision for calibrated necessity, queries for targeting the agent’s capability gap, and skills for evidence grounding and generalizability. Unlike ordinary search-augmented answering (Jin et al. 2025; Zhu et al. 2026), which must re-search from scratch for every new task, the generalizable skill distilled by Search2Skill persists in the library and can be directly reused on future related tasks, continuing to expand the agent’s effective capability boundary.

Extensive experiments on eight expert-level domains from three benchmarks, SuperGPQA (Du et al. 2026), MMLU-Pro (Wang et al. 2024), and EvoAgentBench (Gao et al. 2026), demonstrate that Search2Skill consistently outperforms both search-augmented and trajectory-based skill-learning baselines. Under the *streaming* evaluation protocol, Search2Skill improves average accuracy over direct inference by 8.3% and 9.3% on Qwen3-4B and Qwen3-8B, and performance improves by 5.1% and 6.6% under the stricter *held-out* evaluation protocol. Further analyses show that skill abstraction itself drives these gains: reusing abstracted skills outperforms caching raw retrieved evidence by 4.5%. Besides, the acquired skills could transfer across model scales: a skill library mined by the 8B model improves both smaller 4B and larger 14B executors, surpassing all strong baselines.

Related Work

Skill learning from experience. Self-evolving skill or memory equips LLM agents with reusable experience external to its frozen parameters, letting it keep improving at test time (Zhou et al. 2026). Existing methods realize this purely by distilling an agent’s own trajectories. Most commonly, this is done by prompting an off-the-shelf LLM to consolidate trajectories into skills or memory, e.g., executable skill libraries (Wang et al. 2023; Zheng et al. 2024; Ni et al. 2026; Alzubi et al. 2026), and reusable memory entries (Zhao et al. 2024; Ouyang et al. 2025; Fang et al. 2026).

Reinforcement learning for self-evolving memory or skill. Because such prompting-based distillation tends to yield instance-specific experience, a growing line instead trains a dedicated model with reinforcement learning to curate skills or memory more reliably. For example, UMEM trains a single model to jointly extract and manage generalizable memory using semantic neighborhood modeling (Ye et al. 2026), alongside similar systems that jointly optimize skill selection, usage, and distillation (Xia et al. 2026; Tu et al. 2026; Shi et al. 2026; Ouyang et al. 2026; Lu et al. 2026; Huang et al. 2026). EvolveR (Wu et al. 2025) distills its own trajectories into experience to better perform deep search tasks.

However, both lines of methods above only distill experience from an agent’s own trajectories and therefore cannot break through its capability boundary. In contrast, Search2Skill’s joint objective spans deciding when and how to search external knowledge, capturing expert practical experience that such self-contained curation cannot recover.

External knowledge augmentation. The most common approach for extending an agent’s capability boundary is search-augmented agents that search and verify evidence at inference time (Jin et al. 2025; Zhu et al. 2026; Chen et al. 2026; Tongyi DeepResearch Team 2025). However, such agents only solve current queries, and the retrieved evidence is instance-specific. Compared with these methods, Search2Skill explicitly strengthens the agent’s ability to distill generalizable skills from search results. Experimental results in Analysis Section confirm that directly reusing raw evidence is too instance-specific to generalize, while abstracted skills distilled by Search2Skill bring a 4.5% average gain over raw evidence (Table 3).

Preliminary Study

LLMs are largely aware of their own capability boundary, though not perfectly (Kadavath et al. 2022; Yin et al. 2023). We study this in the context of search-driven skill acquisition, on a subset of SuperGPQA-Science annotated with teacher reference trajectories, and obtain two findings.

Models (mostly) anticipate their own failures. When solving a task, the agent can either answer directly or enter an exploration state to search externally for missing knowledge. We compare how often exploration is triggered on questions the agent eventually answers correctly versus incorrectly. As shown in Figure 2(a), across four Qwen3 models (8B/14B/32B/235B) the trigger rate on incorrect questions exceeds that on correct ones by 27 to 36 points, confirming that models carry a meaningful, if imperfect, signal about their own capability boundary before attempting a question. Directing external search specifically at these recognized weak spots could make self-evolution far more efficient.

Closing this gap would raise the ceiling of self-evolution. We next ask how much headroom this signal leaves on the table. For each exploration-triggered, incorrectly answered question, the agent states which capability it believes is missing, and a teacher model Qwen3.7-Max (Team 2026) independently diagnoses the true missing capability from the agent’s multiple trajectories and the ground-truth solution. We count a question toward the upper bound only when the two diagnoses match, i.e., the agent is not just stuck but correctly knows why; its realized accuracy defines the *execution* boundary. Figure 2(b) shows this gap averages 14.3% across Qwen3 models: closing it would raise 14B and 32B to 81% and 77%, approaching or even exceeding the 235B model’s 79% execution accuracy. While existing self-evolving approaches cannot close this gap, since they only reorganize experience already inside the agent’s boundary, targeting these recognized gaps with external search and distilling the resulting experience into reusable skills can raise both the

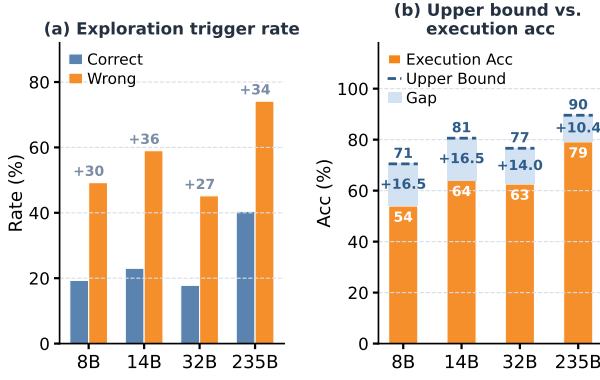


Figure 2: Knowledge-boundary awareness across Qwen3 model scales on SuperGPQA-Science: (a) Exploration trigger rate on eventually correct and incorrect questions; (b) Execution accuracy and upper bound of self-evolving.

efficiency and the ceiling of self-evolution, which is exactly the goal of the Search2Skill framework introduced next.

Methodology of Search2Skill

Task Formulation of Search2Skill Framework

Search2Skill augments a language agent with *external exploration* and a persistent *skill library*, enabling the agent to convert retrieved evidence to reusable procedural knowledge.

Formally, we formalize self-evolving skill acquisition as a task defined by the tuple $(q, \mathcal{M})$, where q is the input question and $\mathcal{M}$ is a persistent skill library accumulated from the agent’s past experience. Within this task, Search2Skill instantiates the agent’s policy. Relevant skills $\mathcal{M}_q \subseteq \mathcal{M}$ are automatically retrieved and injected into the prompt context prior to execution. Conditioned on q and $\mathcal{M}_q$, the agent conducts an interaction trajectory

$$\tau = (o_1, r_1, a_1, o_2, r_2, a_2, \dots, o_T, r_T, a_T), \quad (1)$$

where o_t is the observation returned by the environment, r_t is the agent’s intermediate reasoning, and a_t is the action taken at step t . The action space covers three decisions central to Search2Skill: (1) a *search* action, i.e., a web search or browsing operation (e.g., search or visit) that queries external web resources when the agent identifies a capability gap (Zhu et al. 2026); (2) a *skill-generation* action that distills the retrieved evidence into a structured skill s and updates the library, $\mathcal{M} \leftarrow \mathcal{M} \cup \{s\}$; and (3) a *final-answer* action that terminates the rollout. At each step, the policy π generates the next reasoning-action pair conditioned on the question, the trajectory so far, and the skill library,

$$r_{t+1}, a_{t+1} \sim \pi(\cdot \mid q, \tau_t, \mathcal{M}). \quad (2)$$

If the agent does not explore, the trajectory reduces to a standard reasoning-and-answering rollout. If it explores, the trajectory additionally includes search and skill-generation actions to distill the retrieved evidence into a structured skill s . After the rollout terminates, the generated skill is written back to the skill library and can be reused both for the current question and future related tasks.

Reward Design for Search2Skill Optimization

Search2Skill’s policy must decide *when to search*, *how to search*, and *how to distill a skill*, and each of these three decisions must be carefully optimized. Mainstream GRPO-based agent training, however, relies on a single outcome-based reward tied to final task success (Jin et al. 2025; Ye et al. 2026), lacking fine-grained supervision over these three decisions and thereby inducing a credit-assignment problem. To address this, we design a rubric-based RL objective (Gunjal et al. 2025; Shao et al. 2026) that supervises each of these three decisions with a dedicated reward term: R_{when} decides whether exploration is necessary, R_{search} evaluates the quality of the search queries, and R_{skill} evaluates the generalizability and faithfulness of the generated skill, on top of a task term R_{base} that checks final-answer correctness and action-format correctness (Figure 3). We detail each term below, and then compose them into the final rollout reward.

Exploration-Necessity Reward (R_{when}). To discourage both unnecessary exploration and over-confident direct answering, we judge exploration necessity *relatively* within each rollout group rather than with a fixed bonus. For each question q , we partition the sampled rollouts into an exploring subset G_{exp} (exploring at least once) and a direct-answering subset G_{direct} , with mean accuracies $\bar{y}_{\text{exp}}$ and $\bar{y}_{\text{direct}}$ and gap $\Delta = \bar{y}_{\text{exp}} - \bar{y}_{\text{direct}}$. Given a margin $\tau_0 > 0$, if exploration wins ($\Delta > \tau_0$), every exploring rollout becomes eligible for the quality bonus $q(\tau)$ defined below; if direct answering clearly wins ($\Delta < -\tau_0$), every direct rollout receives a unit bonus; otherwise no decision bonus is granted, including the case where the group collapses to a single strategy.

Search-Quality Reward (R_{search}). We employ a rubric-based LLM-as-a-Judge that evaluates the issued queries along two dimensions: (1) *query abstraction*, whether the query targets reusable principles or workflows rather than instance-specific details or an overly broad topic; and (2) *evidence gain*, whether the retrieved snippets resolve the question’s key uncertainties with concrete, non-redundant support. Poorly-posed queries incur a penalty $p_q(\tau) \in [0, 0.3]$ that discounts the quality bonus below, so that a skill reached through bad queries earns little reward.

Skill-Generation Reward (R_{skill}). We add an execution-based *reuse* score to a rubric-based LLM-as-a-Judge *grounding* score: (1) *reuse* $s_{\text{reuse}} \in [0, 1]$ measures the gain in the skill’s execution accuracy on retrieved questions similar to q relative to direct reasoning (Ye et al. 2026); and (2) *grounding* $s_{\text{ground}} \in [0, 1]$ judges whether the skill is faithfully grounded in the retrieved evidence rather than hallucinated from the model’s own parametric memory.

Final Reward. The three decision rewards are composed through a gated structure: the exploration-necessity term decides *whether* a rollout earns a decision bonus, and the search-quality and skill-generation terms decide *how large* it is. Formally, the unified decision reward of a trajectory τ is

$$s^c(\tau) = \begin{cases} q(\tau), & \Delta > \tau_0 \text{ and } \tau \in G_{\text{exp}}, \\ 1, & \Delta < -\tau_0 \text{ and } \tau \in G_{\text{direct}}, \\ 0, & \text{otherwise,} \end{cases} \quad (3)$$

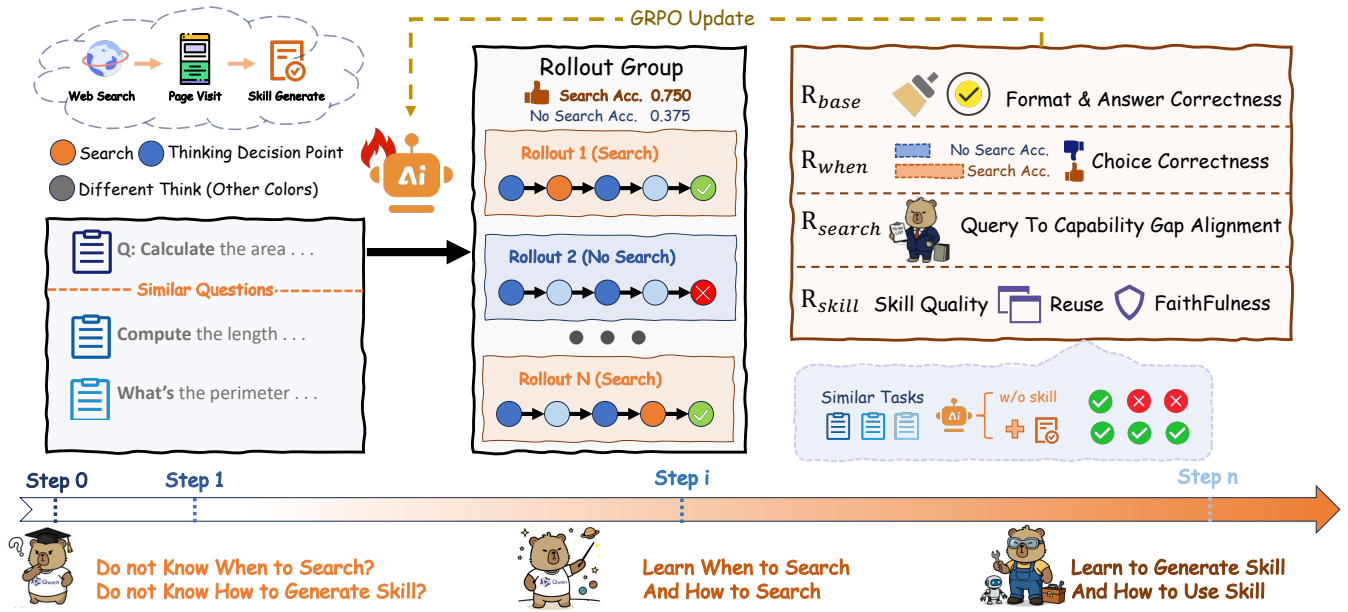


Figure 3: Overview of Search2Skill and its reward design. The agent searches when needed, distills retrieved evidence into reusable skills, and is trained with rewards for *when to search*, *how to search*, and *how to generate skills*.

An exploring rollout earns the quality bonus $q(\tau)$ only when exploration clearly outperforms direct answering ($\Delta > \tau_0$); symmetrically, a direct-answering rollout earns a unit bonus when exploration proves harmful ($\Delta < -\tau_0$); otherwise no decision bonus is given. This bonus $q(\tau)$ in Eq. (3) averages the generated skill’s reusability and grounding scores, discounted by the query penalty,

$$q(\tau) = \max \left(0, \frac{1}{2} (s_{\text{reuse}}(\tau) + s_{\text{ground}}(\tau)) - p_q(\tau) \right), \quad (4)$$

so that the skill bonus is earned only through well-posed queries. The final rollout reward then combines the task term and the decision reward with fixed weights,

$$R(\tau) = \text{clip}_{[0,1]} (\lambda_a R_{\text{base}}(\tau) + \lambda_c s^c(\tau)), \quad (5)$$

with $\lambda_a = 0.7$ and $\lambda_c = 0.3$. By gating the quality reward behind a demonstrated capability gap, this composition naturally calibrates the agent’s decision to search without encouraging indiscriminate exploration.

Experimental Setup

We describe the training procedure, evaluation benchmarks, two complementary protocols, and compared baselines, followed by the implementation details.

Training Details

The policy is first cold-started by supervised fine-tuning on 8K high-quality agent trajectories generated by DeepSeek-V3.2 (Liu et al. 2025a) and GLM-5 (Zeng et al. 2026) models on open-source questions (Ma et al. 2026), and then optimized with GRPO (Shao et al. 2024) on 2K filtered high-quality questions spanning five domains (Physics, Chemistry, Finance, Business, and Economics).

Benchmarks

We evaluate Search2Skill on eight domains from three expert-level benchmarks: SuperGPQA (Du et al. 2026) (Math, Management, Science), MMLU-Pro (Wang et al. 2024) (Law, Philosophy, History), and EvoAgentBench (Gao et al. 2026) (OmniMath and LiveCodeBench).¹ Most of these domains are not covered by the training data and thus test out-of-domain generalization. Each domain provides up to 500 questions: SuperGPQA domains are filtered to medium and hard difficulty, while MMLU-Pro domains with fewer than 500 qualified questions are used in full.

Evaluation Protocol

We design two complementary protocols: (1) **Streaming protocol** processes questions as a sequential stream (Ye et al. 2026): skills generated from earlier questions are immediately written into the skill library and become available to subsequent ones, measuring whether the agent continuously accumulates reusable knowledge. We report streaming accuracy averaged over three random question orders; (2) **Held-out protocol** partitions the questions of each domain into a *collection* set for skill mining and a held-out *test* set (2:1 ratio), and reuses the frozen skill library on the test questions, measuring intrinsic skill reusability (Gao et al. 2026).

Baselines

We compare with two categories of baselines. (1) **Skill-learning baselines**: ReasoningBank (Ouyang et al. 2025) and Memp (Fang et al. 2026) distill experience from past trajectories via memory-based retrieval; Trace2Skill (Ni et al.

¹EvoAgentBench contains five splits in total; the remaining three require sandboxed execution, while our training data does not involve sandbox-based agentic RL.

Method	Qwen3-4B							Qwen3-8B						
	SuperGPQA			MMLU-Pro			Avg	SuperGPQA			MMLU-Pro			Avg
	Math	Mgmt.	Sci.	Law	Phil.	Hist.		Math	Mgmt.	Sci.	Law	Phil.	Hist.	
Search-Augmented Baselines														
Direct Inference	65.4	38.2	45.0	29.8	54.9	47.2	46.8	64.8	41.4	45.6	39.5	58.3	58.8	51.4
Search Agent	64.0	37.8	47.8	28.5	56.7	50.1	47.5 _{+0.7}	67.2	43.0	50.2	35.8	60.9	59.6	52.8 _{+1.4}
Search Agent _{train}	63.0	<u>42.2</u>	58.8	39.5	<u>64.7</u>	<u>55.9</u>	<u>54.0</u> _{+7.3}	67.0	44.0	62.0	<u>43.6</u>	<u>68.3</u>	60.6	<u>57.7</u> _{+6.3}
Skill-Learning Baselines														
ReasoningBank	61.4	33.2	52.6	22.6	55.1	49.3	45.7 _{-1.1}	64.6	38.0	48.8	25.0	55.9	57.7	48.3 _{-3.1}
Memp	62.2	37.4	51.8	21.2	54.7	51.4	46.5 _{-0.3}	67.2	41.0	45.6	27.7	60.9	57.5	49.9 _{-1.5}
EvolveR _{train}	61.2	39.8	<u>59.2</u>	33.3	59.1	55.4	51.3 _{+4.5}	64.0	46.0	63.8	41.2	67.5	<u>61.9</u>	57.4 _{+6.0}
Search2Skill (Ours)														
Search2Skill	<u>65.6</u>	39.0	50.4	28.8	56.9	50.4	48.5 _{+1.7}	<u>68.0</u>	<u>46.0</u>	48.0	38.4	62.3	59.6	53.7 _{+2.3}
Search2Skill_{train}	67.2	43.0	59.4	<u>36.6</u>	67.1	57.0	55.0 _{+8.3}	71.6	50.0	<u>63.2</u>	45.4	68.7	65.1	60.7 _{+9.3}

Table 1: **Streaming setting.** We report average accuracy over three random question orders, for Qwen3-4B and Qwen3-8B backbones. *Mgmt.*, *Sci.*, *Phil.*, and *Hist.* denote Management, Science, Philosophy, and History, respectively.

Method	Qwen3-4B								Qwen3-8B							
	EvoAgentBench		MMLU-Pro			SuperGPQA		Avg	EvoAgentBench		MMLU-Pro			SuperGPQA		Avg
	Math	Code	Law	Phil.	Hist.	Math	Sci.		Math	Code	Law	Phil.	Hist.	Math	Sci.	
Direct Inference	41.0	62.5	27.4	53.6	52.8	58.7	52.5	49.8	45.0	64.1	33.1	51.8	57.5	67.3	50.0	52.7
<i>Skill-Learning Baselines</i>																
ReasoningBank	36.0	61.5	31.5	51.8	51.2	59.3	52.0	49.0 _{-0.8}	43.0	64.1	33.9	52.4	57.5	65.3	54.0	52.9 _{+0.2}
Memp	38.0	64.1	33.9	51.8	54.1	62.7	58.0	51.8 _{+2.0}	44.0	66.7	36.3	56.6	<u>59.1</u>	66.0	56.5	55.0 _{+2.3}
Trace2Skill	35.0	<u>67.9</u>	29.0	<u>56.0</u>	<u>54.3</u>	60.7	53.5	50.9 _{+1.1}	<u>49.0</u>	<u>68.0</u>	37.9	<u>57.2</u>	<u>57.5</u>	63.3	53.0	55.1 _{+2.4}
SkillOpt	37.0	61.5	27.4	50.1	52.8	60.7	49.5	48.4 _{-1.4}	43.0	67.0	32.1	49.8	55.1	69.3	51.7	52.6 _{-0.1}
SkillOpt (32B)	39.0	64.1	28.2	<u>56.0</u>	52.3	<u>64.0</u>	52.5	50.9 _{+1.1}	<u>49.0</u>	67.0	33.1	54.2	<u>59.1</u>	<u>71.3</u>	52.3	55.1 _{+2.4}
<i>Search2Skill (Ours)</i>																
Search2Skill	<u>41.0</u>	64.1	25.8	50.6	51.6	62.3	51.0	49.5 _{-0.3}	45.0	64.1	39.9	56.0	55.1	69.3	54.0	54.8 _{+2.1}
Search2Skill_{train}	43.0	68.4	<u>32.4</u>	57.2	59.8	67.3	<u>56.5</u>	54.9 _{+5.1}	52.0	71.8	41.9	59.0	62.2	72.7	<u>55.5</u>	59.3 _{+6.6}

Table 2: **Held-out setting.** Skills are mined on a collection split and reused on held-out test questions with search disabled; all methods share the same executor model (Qwen3-4B or Qwen3-8B).

2026) refines a global skill document offline; SkillOpt (Yang et al. 2026) iteratively optimizes a skill document from roll-out feedback, using the executor itself or Qwen3-32B as the optimizer; and EvolveR_{train} (Wu et al. 2025) is an RL-trained self-evolving memory method, re-trained under our setup for fair comparison. EvolveR is evaluated only under the streaming protocol, as its experience guides search behavior and is incompatible with the held-out setting without searching, whereas Trace2Skill and SkillOpt optimize at the batch level and are evaluated only under the held-out protocol; and (2) **Search-augmented baselines**, included to isolate raw search capability from persistent skill learning: Direct Inference answers without search; Search Agent equips the base model with the same search tools without training; and Search Agent_{train} is a search agent trained with GRPO on the same training data, following deep search paradigms (Jin et al. 2025; Liu et al. 2025b; Li et al. 2025; Zhu et al. 2026) but without any skill-learning mechanism.

Implementation Details

All search-based methods use the same agent environment: a Google Search API tool returning the Top-5 URLs per query, a page-visit tool that compresses fetched pages with Qwen3-30B-A3B, and a sandboxed Python tool (Zhu et al. 2026). More details on datasets, configurations, and hyperparameters are provided in the Appendix.

Main Experimental Results

We evaluate Search2Skill under the two complementary protocols above: the *streaming* protocol measures continuous skill accumulation over a task stream, and the *held-out* protocol measures the intrinsic reusability of the acquired skills.

Streaming Evaluation: Dynamic Skill Distillation

Table 1 reveals that Search2Skill_{train} achieves the best average accuracy on both backbones, improving over Direct In-

Stored Artifact	Law	History	Math	Avg
Direct Inference	33.1	57.5	67.3	52.6
Raw retrieved evidence	36.3	58.3	68.7	54.4 ^{+1.8}
Abstracted skill	41.9	62.2	72.7	58.9^{+6.3}

Table 3: **Raw evidence vs. skill (Qwen3-8B).** Both forms reuse the same information gathered during past search.

ference by +8.3% on Qwen3-4B and +9.3% on Qwen3-8B. Since this setting mirrors realistic self-evolution, where the agent accumulates skills from a continuous question stream while reasoning over incoming tasks, these gains demonstrate stronger continual learning ability than all baselines. We analyze these gains from three perspectives below.

Comparison with skill-learning baselines. Table 1 reveals that ReasoningBank and Memp even fall below Direct Inference on average on both backbones. By contrast, Search2Skill fills the knowledge gap through external search and improves consistently on both backbones. Furthermore, Search2Skill outperforms EvolveR_{train}, which is also RL-trained under our setup, by +3.7% on Qwen3-4B and +3.3% on Qwen3-8B, highlighting the importance of distilling skills from searched evidence.

Comparison with search-augmented baselines. The gain does not come merely from adding search tools: Search2Skill_{train} outperforms the trained search baseline Search Agent_{train} by +1.0% on 4B and +3.0% on 8B, showing that Search2Skill better calibrates when to search and how to distill skills, instead of searching more evidence.

Per-domain gains. The improvements over Direct Inference hold in every domain on both backbones. Even on the few domains where Search Agent_{train} and EvolveR_{train} are slightly stronger (Law on Qwen3-4B and Science on Qwen3-8B), the gaps are small (2.9% and 0.6% points, respectively), and Search2Skill achieves the best average accuracy overall.

Held-Out Evaluation: Intrinsic Skill Reusability

Table 2 shows that, without web access on held-out test splits, Search2Skill_{train} improves over Direct Inference by +5.1% on Qwen3-4B and +6.6% on Qwen3-8B, while outperforming most trajectory-based baselines.

Skill abstraction versus raw evidence. A natural question is whether the above gains come merely from web search, i.e., whether caching the retrieved content alone yields comparable gains. Table 3 rules this out: reusing raw retrieved evidence improves over Direct Inference by only +1.8% on average, whereas reusing the abstracted skills distilled from the same evidence yields +6.3%, a +4.5% margin of abstraction over raw caching. This confirms that Search2Skill compresses scattered web evidence into reusable procedural knowledge, rather than simply storing retrieved content.

Substantial improvement after training. Without RL training, the naive Search2Skill transfers poorly and even falls below Direct Inference on Qwen3-4B. Our error analysis in Analysis Section attributes this to two failure modes:

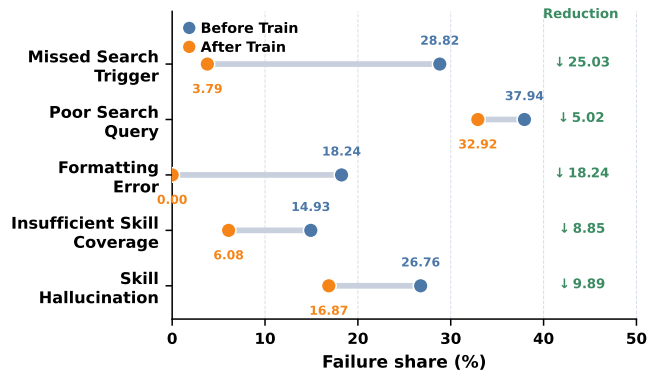


Figure 4: **Failure patterns before and after RL training.** RL reduces the failure share of all five patterns.

missed search triggering on questions with knowledge gaps, and skill hallucination induced by noisy web evidence (Figure 4). Rubric-RL mitigates both, turning the negative delta into net gains of +5.1% on 4B and +6.6% on 8B over Direct Inference.

Cross-scale capacity support. Search2Skill skills could transfer across model scales: Qwen3-4B with Search2Skill reaches 56.5% on Science, surpassing the unassisted Qwen3-8B Direct Inference at 50.0%. Structured skills thus act as an external capability scaffold, allowing a smaller model to compete with a larger one. The net gain over Direct Inference is also larger on 8B than on 4B, suggesting that stronger backbones can exploit skill guidance more effectively.

Analysis

The main experiments show that Search2Skill improves downstream performance; this section investigates *why* it works through four research questions: whether RL resolves the dominant failure patterns of the untrained model (RQ1), whether Search2Skill acquires skills more efficiently than existing methods (RQ2), whether each rubric-based reward contributes (RQ3), and whether the learned skills transfer across executor models (RQ4).

RQ1: Does RL Resolve the Failure Patterns?

Beyond final accuracy, we examine how RL reshapes the agent’s behavior. We define five failure patterns along the Search2Skill pipeline (Figure 4): (1) **Missed search trigger**, where the agent fails to search when needed; (2) **Poor search query**, where issued queries are misdirected or overly generic; (3) **Formatting error**, i.e., invalid actions such as looping over search without producing a skill or an answer; (4) **Insufficient skill coverage**, where no suitable skill exists or is retrieved; and (5) **Skill hallucination**, where generated skills fabricate or distort the retrieved evidence. We prompt a teacher model to identify these patterns from the trajectories of 500 evaluation questions, and measure each pattern’s failure share, i.e., the fraction of questions exhibiting it: missed search trigger is measured over all questions, since skipping search can occur on any question, while the remaining patterns are measured over questions where search is triggered.

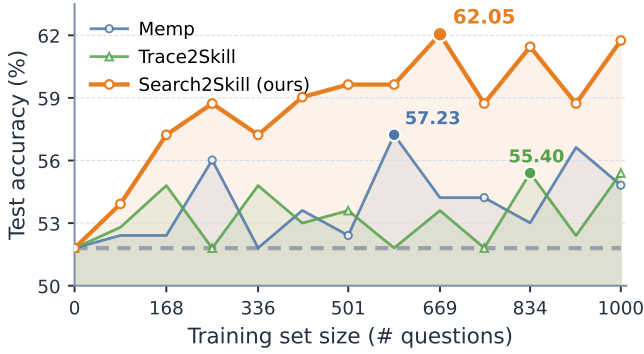


Figure 5: **Skill acquisition efficiency on MMLU-Pro Philosophy.** Search2Skill reaches higher accuracy with fewer training questions than baselines.

Method	Math	History	Law	Avg	Search Rate
Search2Skill	71.6	65.1	45.4	60.7	65.9%
w/o r_{when}	66.2	61.9	42.5	56.9 _{-3.8}	96.6%
w/o r_{sea}	70.0	63.2	43.5	58.9 _{-1.8}	70.2%
w/o r_{gen}	68.0	60.4	44.5	57.6 _{-3.1}	72.1%
w/o all	67.1	62.4	40.7	56.7 _{-4.0}	57.8%

Table 4: **Reward ablation.** r_{when} , r_{sea} , and r_{gen} denote the *exploration-necessity*, *search-quality*, and *skill-generation* rewards; the last row keeps only the task reward R_{base} .

Figure 4 shows that RL reduces the failure share of every pattern, from 25.3% to 11.9% on average, indicating that RL improves the full pipeline rather than fixing a single stage.

RQ2: Is Search2Skill More Efficient?

We evaluate skill acquisition efficiency on MMLU-Pro Philosophy by having each method perform three evolution passes over the collection set, with intermediate checkpoints evaluated on the test set (Figure 5). Overall, the inward-looking baselines fluctuate around their initial accuracy and barely improve over the full run: confined by the model’s own capability boundary, they acquire useful skills at a low rate. Search2Skill instead breaks this stagnation and shows three advantages: **(1) Rapid early acquisition:** accuracy jumps from 51.8% to 57.2% after only 168 questions, while Memp and Trace2Skill remain largely stagnant, confirming that searching outward resolves capability gaps immediately; **(2) Superior sample efficiency:** Search2Skill reaches 59.6% halfway through training, whereas no baseline reaches 57% even after full training; and **(3) Consistent accumulation:** Search2Skill improves steadily, while Trace2Skill oscillates severely due to noisy inward-summarized skills.

RQ3: Do Rubric-Based Rewards Contribute?

We remove each reward in turn and test a variant trained with only the correctness reward (Table 4). All variants degrade, most severely when only the base reward is kept (−4.0%). The exploration-necessity reward r_{when} contributes the most:

without it, the search rate surges to 96.6% and average accuracy drops by 3.8%. Trajectory inspection shows that uncontrolled search wastes tokens on easy questions and produces simple, low-quality skills, which further hurt subsequent questions. These results confirm that the three rubric rewards provide complementary supervision.

RQ4: Do the Skills Transfer Across Executors?

The controlled comparison in the main experiments shows that abstracted skills outperform the raw evidence they were distilled from (Table 3). A further question is whether these skills are tied to the model that collected them.

We reuse the skill library mined by the RL-trained 8B model with Qwen3-4B and Qwen3-14B executors, without any further skill generation (Table 5). The 8B-mined library improves over Direct Inference by +4.1% on the 4B executor and +3.5% on the 14B executor, outperforming all corresponding baselines. Notably, these skills are distilled from questions that the 8B model cannot solve by itself, yet the missing knowledge they encode is not specific to that model. This confirms that Search2Skill captures reusable procedural knowledge rather than model-specific behaviors.

Executor / Method	Law	History	Math	Avg.
<i>Qwen3-4B executor</i>				
Direct	27.4	52.8	58.7	46.3
ReasoningBank	31.5	51.2	59.3	47.3 _{+1.0}
Memp	33.9	54.1	62.7	50.2 _{+3.9}
Trace2Skill	29.0	54.3	60.7	48.0 _{+1.7}
Search2Skill Skills	32.4	54.8	64.1	50.4_{+4.1}
<i>Qwen3-14B executor</i>				
Direct	41.1	59.1	76.0	58.7
ReasoningBank	41.1	60.6	68.7	56.8 _{-1.9}
Memp	45.2	58.3	68.7	57.4 _{-1.3}
Trace2Skill	43.5	58.3	75.5	59.1 _{+0.4}
Search2Skill Skills	45.2	62.2	79.3	62.2_{+3.5}

Table 5: **Cross-model transfer of Search2Skill skills.** A skill library mined once by the RL-trained 8B collector is reused by different executors without further skill generation.

Conclusion

In this work, we presented Search2Skill, a search-driven framework that turns capability gaps identified during reasoning into reusable skills, optimized with a rubric-based reinforcement learning scheme that governs when to search, how to search, and how to distill skills. Experiments on eight expert-level domains show that Search2Skill outperforms both skill-learning and search-augmented baselines under streaming and held-out evaluation protocols. Further analyses show that RL repairs failure patterns across the full pipeline with complementary supervision from each rubric reward, and that the gains stem from skill abstraction rather than raw retrieved evidence. These results suggest that external exploration paves the way for self-evolving agents that grow beyond capability boundaries.

References

- Alzubi, S.; et al. 2026. EvoSkill: Automated Skill Discovery for Multi-Agent Systems. *arXiv:2603.02766*.
- Chen, H.; Cong, X.; Fan, S.; Fu, Y.; Gong, Z.; Lu, Y.; Li, Y.; Niu, B.; Pan, C.; Song, Z.; Wang, H.; Wu, Y.; Wu, Y.; Xie, Z.; Yan, Y.; Zhang, Z.; Lin, Y.; Liu, Z.; and Sun, M. 2026. AgentCPM-Explore: Realizing Long-Horizon Deep Exploration for Edge-Scale Agents. *arXiv preprint arXiv:2602.06485*.
- Du, X.; Yao, Y.; Ma, K.; Wang, B.; Zheng, T.; Liu, M.; Liang, Y.; Jin, X.; Wei, Z.; Zheng, C.; et al. 2026. Supergpqa: Scaling llm evaluation across 285 graduate disciplines. *Advances in Neural Information Processing Systems*, 38.
- Fang, R.; Liang, Y.; Wang, X.; Wu, J.; Qiao, S.; Xie, P.; Huang, F.; Chen, H.; and Zhang, N. 2026. Memp: Exploring agent procedural memory. In *Findings of the Association for Computational Linguistics: ACL 2026*, 17490–17502.
- Gao, X.; Hu, C.; Chen, H.; Yao, P.; Wang, Z.; Bai, Y.; Wu, Z.; Han, Y.; Cong, X.; Gui, J.; et al. 2026. EvoAgentBench: Benchmarking Agent Self-Evolution via Ability Transfer. *arXiv preprint arXiv:2607.05202*.
- Gunjal, A.; Wang, A.; Lau, E.; Nath, V.; He, Y.; Liu, B.; and Hendryx, S. 2025. Rubrics as rewards: Reinforcement learning beyond verifiable domains. *arXiv preprint arXiv:2507.17746*.
- Huang, S.; Cheng, P.; Liu, H.; Chen, T.; Liu, Y.; Ni, J.; Zhou, S.; Yang, Z.; Jiang, G.; Zhou, M.; Cheng, Y.; Jiang, X.; and Jiang, G. 2026. Skill Self-Play: Pushing the Frontier of LLM Capability with Co-Evolving Skills. *arXiv:2607.22529*.
- Jin, B.; Zeng, H.; Yue, Z.; Yoon, J.; Arik, S.; Wang, D.; Zamani, H.; and Han, J. 2025. Search-rl: Training llms to reason and leverage search engines with reinforcement learning. *arXiv preprint arXiv:2503.09516*.
- Kadavath, S.; Conerly, T.; Askell, A.; Henighan, T.; Drain, D.; Perez, E.; Schiefer, N.; Dodds, Z. H.; DasSarma, N.; Tran-Johnson, E.; et al. 2022. Language models (mostly) know what they know. *arXiv preprint arXiv:2207.05221*.
- Li, X.; Jiao, W.; Jin, J.; Dong, G.; Jin, J.; Wang, Y.; et al. 2025. DeepAgent: A General Reasoning Agent with Scalable Toolsets. *arXiv preprint arXiv:2510.21618*.
- Liu, A.; Mei, A.; Lin, B.; Xue, B.; Wang, B.; Xu, B.; Wu, B.; Zhang, B.; Lin, C.; Dong, C.; et al. 2025a. Deepseek-v3. 2: Pushing the frontier of open large language models. *arXiv preprint arXiv:2512.02556*.
- Liu, J.; Li, Y.; Zhang, C.; Li, J.; Chen, A.; Ji, K.; Cheng, W.; Wu, Z.; Du, C.; Xu, Q.; Song, J.; Zhu, Z.; Chen, W.; Zhao, P.; and He, J. 2025b. WebExplorer: Explore and Evolve for Training Long-Horizon Web Agents. *arXiv preprint arXiv:2509.06501*.
- Lu, Z.; et al. 2026. SKILL0: In-Context Agentic Reinforcement Learning for Skill Internalization. *arXiv:2604.02268*.
- Ma, X.; Liu, Q.; Jiang, D.; Zhang, G.; Ma, Z.; and Chen, W. 2026. General-reasoner: Advancing llm reasoning across all domains. *Advances in Neural Information Processing Systems*, 38: 56596–56618.
- Ni, J.; et al. 2026. Trace2Skill: Distill Trajectory-Local Lessons into Transferable Agent Skills. *arXiv preprint arXiv:2603.25158*.
- Ouyang, S.; Yan, J.; Chen, Y.; Han, R.; Wang, Z.; Mishra, B. D.; Meng, R.; Li, C.-L.; Jiao, Y.; Zha, K.; et al. 2026. Skillos: Learning skill curation for self-evolving agents. *arXiv preprint arXiv:2605.06614*.
- Ouyang, S.; et al. 2025. ReasoningBank: Scaling Agent Self-Evolving with Reasoning Memory. *arXiv preprint arXiv:2509.25140*.
- Shao, R.; Asai, A.; Shen, S. Z.; Ivison, H.; Kishore, V.; Zhuo, J.; Zhao, X.; Park, M.; Finlayson, S. G.; Sontag, D.; Murray, T.; Min, S.; Dasigi, P.; Soldaini, L.; Brahman, F.; tau Yih, W.; Wu, T.; Zettlemoyer, L.; Kim, Y.; Hajishirzi, H.; and Koh, P. W. 2026. DR Tulu: Reinforcement Learning with Evolving Rubrics for Deep Research. *arXiv:2511.19399*.
- Shao, Z.; Wang, P.; Zhu, Q.; Xu, R.; Song, J.; Bi, X.; Zhang, H.; Zhang, M.; Li, Y.; Wu, Y.; et al. 2024. Deepseekmath: Pushing the limits of mathematical reasoning in open language models. *arXiv preprint arXiv:2402.03300*.
- Shi, Y.; Chen, Y.; Lu, Z.; Miao, Y.; Liu, S.; Gu, Q.; Cai, X.; Wang, X.; and Zhang, A. 2026. Skill1: Unified evolution of skill-augmented agents via reinforcement learning. *arXiv preprint arXiv:2605.06130*.
- Team, Q. 2026. Qwen3.7: The Agent Frontier.
- Tongyi DeepResearch Team. 2025. Tongyi DeepResearch Technical Report. *arXiv preprint arXiv:2510.24701*.
- Tu, S.; Xu, C.; Zhang, Q.; Zhang, Y.; Lan, X.; Li, L.; and Zhao, D. 2026. Dynamic Dual-Granularity Skill Bank for Agentic RL. *arXiv preprint arXiv:2603.28716*.
- Wang, G.; Xie, Y.; Jiang, Y.; Mandelkar, A.; Xiao, C.; Zhu, Y.; Fan, L.; and Anandkumar, A. 2023. Voyager: An open-ended embodied agent with large language models. *arXiv preprint arXiv:2305.16291*.
- Wang, Y.; Ma, X.; Zhang, G.; Ni, Y.; Chandra, A.; Guo, S.; Ren, W.; Arulraj, A.; He, X.; Jiang, Z.; et al. 2024. Mmlu-pro: A more robust and challenging multi-task language understanding benchmark. *Advances in Neural Information Processing Systems*, 37: 95266–95290.
- Wu, R.; Wang, X.; Mei, J.; Cai, P.; Fu, D.; Yang, C.; Wen, L.; Yang, X.; Shen, Y.; Wang, Y.; and Shi, B. 2025. EvolveR: Self-Evolving LLM Agents through an Experience-Driven Lifecycle. *arXiv preprint arXiv:2510.16079*.
- Xia, P.; Chen, J.; Wang, H.; Liu, J.; Zeng, K.; Wang, Y.; Han, S.; Zhou, Y.; Zhao, X.; Chen, H.; et al. 2026. SkillRL: Evolving Agents via Recursive Skill-Augmented Reinforcement Learning. In *ICLR 2026 Workshop on Memory for LLM-Based Agentic Systems*.
- Yang, Y.; Gong, Z.; Huang, W.; Yang, Q.; Zhou, Z.; Huang, Z.; Li, Y.; Gao, X.; Dai, Q.; Liu, B.; et al. 2026. Skillopt: Executive strategy for self-evolving agent skills. *arXiv preprint arXiv:2605.23904*.
- Ye, Y.; Jiang, H.; Jiang, F.; Lan, T.; Du, Y.; Fu, B.; Shi, X.; Jia, Q.; Wang, L.; and Luo, W. 2026. UMEM: Unified Memory Extraction and Management Framework for Generalizable Memory. In *Forty-third International Conference on Machine Learning*.

Yin, Z.; Sun, Q.; Guo, Q.; Wu, J.; Qiu, X.; and Huang, X. 2023. Do Large Language Models Know What They Don't Know? In *Findings of the Association for Computational Linguistics: ACL 2023*, 8653–8665.

Zeng, A.; Lv, X.; Hou, Z.; Du, Z.; Zheng, Q.; Chen, B.; Yin, D.; Ge, C.; Huang, C.; Xie, C.; et al. 2026. Glm-5: from vibe coding to agentic engineering. *arXiv preprint arXiv:2602.15763*.

Zhao, A.; Huang, D.; Xu, Q.; Lin, M.; Liu, Y.-J.; and Huang, G. 2024. Expel: Llm agents are experiential learners. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, 19632–19642.

Zheng, L.; Wang, R.; Wang, X.; and An, B. 2024. Synapse: Trajectory-as-exemplar prompting with memory for computer control. In *International Conference on Learning Representations*, volume 2024, 19036–19066.

Zhou, Y.; Shu, W.; Su, Y.; Du, W.; Fang, Y.; and Lin, X. 2026. A Comprehensive Survey on Agent Skills: Taxonomy, Techniques, and Applications. *arXiv preprint arXiv:2605.07358*.

Zhu, B.; Jia, Q.; Lan, T.; Ren, J.; Gu, F.; Jiang, F.; Wang, L.; Xu, Z.; and Luo, W. 2026. Marco DeepResearch: Unlocking Efficient Deep Research Agents via Verification-Centric Design. *arXiv preprint arXiv:2603.28376*.

This technical appendix covers the evaluation setup, the training and reward details, the implementation of the preliminary study, the failure-pattern analysis, run-to-run variance, the prompt templates that drive Search2Skill’s agent loop, and example trajectories and acquired skills.

A Evaluation Setup

We describe the evaluation benchmarks, dataset construction, agent environment, and skill retrieval procedure used in the experiments reported in the main paper.

A.1 Benchmarks and Dataset Statistics

Benchmarks. We evaluate on three benchmarks. SuperGPQA (Du et al. 2026) and MMLU-Pro (Wang et al. 2024) are large-scale, expert-level multiple-choice benchmarks covering diverse professional disciplines. From SuperGPQA, we use the *Math*, *Management*, and *Science* domains; from MMLU-Pro, we use *Law*, *Philosophy*, and *History*, some of which contain fewer than 500 qualified questions and are therefore used in full. We also evaluate on EvoAgentBench (Gao et al. 2026), a benchmark designed to test skill reuse, from which we select its two QA-style datasets, *Omnimath* and *LiveCodeBench*, used only in the reuse-focused Held-out setting described below. The remaining three splits require rollout-time interaction with a stateful file-system sandbox, which lies outside our agent’s action space. Because the LiveCodeBench test split contains only 39 tasks, we evaluate it three times and report the mean.

Dataset sizes. Table 6 summarizes the dataset sizes under both evaluation protocols. For SuperGPQA, we randomly sample up to 500 questions from the selected domains after filtering to the medium and hard difficulty levels. For MMLU-Pro, some domains contain fewer than 500 qualified questions, so we use all available instances. In the **Held-out** setting, SuperGPQA and MMLU-Pro are randomly split into collection and test sets at a strict 2:1 ratio, while EvoAgentBench follows its official benchmark splits.

Correctness evaluation. We report accuracy on all benchmarks, but the correctness of an answer is judged differently across benchmarks. For the multiple-choice benchmarks SuperGPQA and MMLU-Pro, we extract the option letter from the agent’s <ANSWER> tag and require an exact match with the gold option. For EvoAgentBench, Omnimath answers are open-ended, so we use Qwen3-30B-A3B as a judge model to decide whether the agent’s final answer is equivalent to the reference answer; LiveCodeBench solutions are executed against the unit tests shipped with the dataset, and a solution counts as correct only if it passes all of them.

A.2 Agent Environment

During both data collection and online evaluation, the agent’s exploration loop relies on three tools: (1) a **web search** tool backed by the Google Search API, which returns the top-5 most relevant URLs for each query; (2) a **page visit** tool that fetches a selected URL and compresses its content via Qwen3-30B-A3B to extract task-relevant information before returning it to the agent; and (3) a **code** tool that runs the

Benchmark	Domain	Streaming	Held-out	
		#Q	Collect.	Test
SuperGPQA	Mathematics	500	333	167
	Management	500	–	–
	Science	500	333	167
MMLU-Pro	Law	372	248	124
	Philosophy	500	333	167
	History	381	254	127
EvoAgentBench	Omnimath	–	478	100
	LiveCodeBench	–	97	39

Table 6: Per-domain dataset sizes for the Streaming and Held-out evaluation protocols.

agent’s code in a sandboxed Python interpreter, exposing the executable functions defined in the code field of activated skills so that the agent can invoke a reusable skill function and obtain its result rather than performing the computation by hand. To prevent the agent from simply retrieving the exact problem and its solution, we further add an *original-question blocking* mechanism: during page visit we detect whether the fetched page contains the original question stem and discard it if so, and we additionally exclude common benchmark-hosting sites such as Hugging Face and GitHub. This forces the agent to learn the underlying knowledge and method rather than copying the original question and answer.

Inference configuration. All methods decode with temperature 0.3 and Qwen3’s thinking mode enabled. Each episode is limited to 15 interaction rounds and at most 5 search calls; an episode that exhausts this budget without emitting an <ANSWER> action is counted as a failure.

A.3 Skill Retrieval

Each skill follows the standardized schema of Prompt 2: skill_name, use_when (an applicability description), workflow, and code. In addition, we store the source question from which it was extracted as retrieval-only metadata (it is not part of the generated skill). We represent each skill by its textual description d_i (the skill_name and use_when fields) together with its source question $\tilde{q}_i$.

Given a task question q , we encode the query, skill descriptions, and source questions using the fixed embedding model text-embedding-v4 (1024 dimensions). The relevance of a skill is computed as

$$\text{score}(q, s_i) = \gamma \cos(\phi(q), \phi(d_i)) + (1 - \gamma) \cos(\phi(q), \phi(\tilde{q}_i)), \quad (6)$$

where $\phi(\cdot)$ denotes the embedding model, d_i is the skill description, and $\tilde{q}_i$ is the corresponding source question. We use $\gamma = 0.7$, retrieve the top- $k = 3$ skills, and discard skills whose similarity is below $\theta = 0.50$.

Retrieved skills are initially presented to the agent only through their names and applicability descriptions. The detailed workflow and executable code are revealed only after the agent explicitly activates the selected skill.

Library maintenance. The library is capped at 300 skills, with no merging or rewriting of entries. The only update path is name collision: when a retrieved skill fails to solve the current question, the agent may distill a new one, and if it carries an existing `skill_name` it overwrites the old entry. Any improvement in library quality therefore comes from better skill generation rather than from post-hoc library curation.

A.4 Baseline Implementation Details

All baselines use the same executor backbone, agent environment (Appendix A.2), and embedding model (text-embedding-v4) as Search2Skill.

Direct Inference. The backbone answers each question with chain-of-thought reasoning, without tools or memory.

Search Agent & Search Agent_{train}. The backbone equipped with the same search, page-visit, and Python tools in a ReAct-style loop (Jin et al. 2025), where each question is solved independently and nothing persists across questions. The *train* variant is further trained with GRPO on our 2K RL questions using only the task reward R_{base} , following deep search paradigms (Liu et al. 2025b; Li et al. 2025; Zhu et al. 2026), isolating RL-trained search capability from skill learning. Since they keep no reusable artifact and the held-out protocol forbids searching again, both variants are evaluated only under the streaming protocol.

ReasoningBank (Ouyang et al. 2025). A memory-augmented method that distills reusable reasoning insights from past trajectories (both successes and failures) into a searchable bank; the top-3 relevant items are retrieved and injected into the executor’s context. It represents experience-distillation approaches without external search.

Memp (Fang et al. 2026). A procedural-memory method that induces reusable procedures from agent experience and maintains the store via rule-based consolidation and updating, retrieved by question-embedding similarity (top-3).

Trace2Skill (Ni et al. 2026). An offline framework for skill evolution that splits trajectories into success and failure cases, proposes trajectory-specific skill patches with parallel analyst agents, and holistically merges them into a single comprehensive skill directory. The resulting skill is used directly at inference by prepending its root document to the prompt. Evaluated only under the held-out protocol due to its batch-level optimization.

SkillOpt (Yang et al. 2026). A text-space skill optimization method for frozen agents that treats the skill document as a trainable external text state: an independent optimizer model proposes controlled add/delete/edit operations from execution trajectories, and a validation-set gate retains only updates that improve performance. Since we find that using the 4B/8B backbones themselves as the optimizer is weak at such editing, we additionally report *SkillOpt (32B)*, which replaces the optimizer with Qwen3-32B while keeping roll-out collection and execution on the original 4B/8B backbone. Evaluated only under the held-out protocol.

EvolveR_{train} (Wu et al. 2025). A closed-loop self-evolving framework that distills past trajectories into reusable strategic principles, stores them in a dynamically maintained experience base, and retrieves them to guide future reasoning and search. Although EvolveR also couples search with evolving memory, its memory is induced from the agent’s own trajectories and mainly improves reuse of internal experience, whereas Search2Skill searches external sources to fill identified capability gaps and distills the retrieved evidence into skills, enabling growth beyond what trajectories alone can provide. We re-train both the 4B and 8B backbones with their method on our own RL data under the same hyperparameters as Appendix B.2. Since its experience steers live search, it is evaluated only under the streaming protocol.

B Training Details

Training Data Source. We derive all training data from WebInstruct-verified (Ma et al. 2026), a large-scale corpus of 229K instructional question-answer pairs crawled from educational and professional websites and subsequently verified for correctness. WebInstruct covers a broad range of domains including science, engineering, business, and medicine, making it well-suited for training agents that must acquire expert-domain skills. We use this corpus as the problem source for both the SFT and RL stages. After our filtering pipeline, the retained questions concentrate mainly in five domains: Physics, Chemistry, Finance, Business, and Economics.

B.1 Supervised Fine-Tuning

Data Collection. We collect SFT demonstrations by running two teacher models—DeepSeek-V3.2 (Liu et al. 2025a) and GLM-5 (Zeng et al. 2026)—on questions sampled from WebInstruct-verified. Each teacher executes the full Search2Skill agent loop autonomously, deciding whether to explore or answer directly. We apply rejection sampling to retain only the trajectories on which the teacher reaches the correct final answer, so that the policy is imitated from verified-correct agent behavior. This yields approximately 8K high-quality trajectories covering both exploration and direct-answer behaviors, used for both Qwen3-4B and Qwen3-8B.

Training Configuration. We perform full-parameter fine-tuning on Qwen3-8B with the following hyperparameters: learning rate 1×10^{-5} with cosine decay, 10 warmup steps, global batch size 64, maximum sequence length 20,480 tokens, weight decay 0.1, AdamW ($\beta_1=0.9, \beta_2=0.95$), bf16 precision, and DeepSpeed ZeRO Stage-3. The Qwen3-4B policy is cold-started with exactly the same data and hyperparameters. Training runs for 3 epochs on 16 NVIDIA A100 GPUs and completes in approximately 1.5 hours for Qwen3-8B and 1 hour for Qwen3-4B.

B.2 Reinforcement Learning

Data Construction. We construct the RL training set through a filtering pipeline designed to select questions that genuinely require exploration. We first compute sentence-embedding similarities among WebInstruct-verified questions and select anchor questions that possess sufficient semantic neighbors, ensuring that each anchor is accompanied

by related questions for skill-reuse evaluation. For each anchor, a teacher model Qwen3.7-Max (Team 2026) produces a verified ground-truth answer. We then test the student model (Qwen3-8B) on each anchor; only questions that the student consistently fails are retained. Finally, the teacher relabels the ground truth of each anchor’s similar neighbors. The resulting dataset contains approximately 2K anchor questions, each paired with 3 similar questions used for online skill-reuse evaluation during RL training. Qwen3-4B uses the same RL training data as Qwen3-8B.

Training Configuration. We optimize the SFT-initialized policy using GRPO (Shao et al. 2024) implemented in the verl framework. Key hyperparameters: learning rate 1×10^{-6} , KL regularization coefficient $\beta=0.001$ (low-variance KL), train batch size 64, rollout group size $N=16$, maximum prompt length 2,048 tokens for the initial question prompt, maximum response length 18,431 tokens covering the whole multi-round rollout including tool observations, gradient checkpointing enabled, FSDP for the actor and reference model offloading. Rollouts are generated asynchronously via sglang with tensor parallelism. Tool observations (search results, visited page content, and format feedback) remain in the context but are masked out of the loss, so the policy-gradient and KL terms are computed only on the tokens generated by the policy itself. The reward is summarized in the main paper and specified in full in Appendix C. The Qwen3-4B and Qwen3-8B policies are trained with identical hyperparameters; training runs for 3 epochs on 8 NVIDIA A100 GPUs and completes in approximately 17 and 22 hours, respectively.

C Reward Design Details

The main paper decomposes the Search2Skill reward into a task term R_{base} and three light-weight, rubric-based rewards for the core decisions of the framework: the exploration-necessity reward R_{when} (*when to search*), the search-quality reward R_{search} (*how to search*), and the skill-generation reward R_{skill} (*how to generate skills*). We keep the design deliberately simple: the group-contrastive gate of R_{when} decides *whether* a rollout earns a decision bonus, and a single quality magnitude q_i , composed from R_{search} and R_{skill} , decides *how large* it is. For a rollout group $\mathcal{G}$ of size $N=16$, rollout i receives

$$R_i = \text{clip}_{[0,1]}(\lambda_a R_i^{\text{base}} + \lambda_c s_i^c), \quad \lambda_a=0.7, \lambda_c=0.3, \quad (7)$$

where $R_i^{\text{base}} \in [0, 1]$ is task accuracy plus a lightweight format check (the task term R_{base}), and $s_i^c \in [0, 1]$ is the unified decision reward defined below. We write G_{exp} and G_{direct} for the exploring and direct-answering subsets of $\mathcal{G}$. Both rubric judges, i.e., the query-quality judge of R_{search} and the grounding judge of R_{skill} , are Qwen3.7-Max. All LLM judgments are zero-shot calls returning JSON, from which we parse integer ratings and clip every score to $[0, 1]$.

C.1 When to Search (R_{when}): Group-Contrastive Gate

We judge exploration necessity *relatively* within each group rather than with a fixed bonus. Let $\bar{y}_{\text{exp}}$ and $\bar{y}_{\text{direct}}$ be the mean

accuracies of G_{exp} and G_{direct} , and $\Delta = \bar{y}_{\text{exp}} - \bar{y}_{\text{direct}}$ their gain. With margin $\tau_0=0.25$,

$$s_i^c = \begin{cases} q_i, & \Delta > \tau_0 \text{ and } i \in G_{\text{exp}}, \\ 1, & \Delta < -\tau_0 \text{ and } i \in G_{\text{direct}}, \\ 0, & \text{otherwise.} \end{cases} \quad (8)$$

The key property we enforce is that the quality magnitude q_i is granted *only* to exploring rollouts, and *only* when exploration clearly beats direct answering ($\Delta > \tau_0$); if exploration does not outperform direct answering, it earns no quality bonus at all. This ties the quality reward to a demonstrated capability gap and calibrates exploration rather than encouraging it indiscriminately. (We use subset means whenever both strategies appear in the group; if either subset is empty, $s_i^c=0$.)

C.2 Quality Magnitude q_i (R_{search} & R_{skill})

The magnitude q_i folds skill quality and search discipline into a single expression:

$$q_i = \max\left(0, \frac{1}{2}(s_i^{\text{reuse}} + s_i^{\text{ground}}) - p_i^q\right), \quad (9)$$

where each skill signal lies in $[0, 1]$ and the query penalty in $[0, 0.3]$. Recall from Eq. 8 that q_i takes effect only for exploring rollouts that beat direct answering, so a bonus is paid only for a skill that is reusable, grounded, and reached through well-posed queries. The three components are:

- **Skill Reuse** (s_i^{reuse}). Skill generalizability: the skill is injected into $K=3$ similar held-out problems, each of which is solved twice by a frozen copy of the policy’s own backbone—Qwen3-8B when training the 8B policy and Qwen3-4B when training the 4B policy—once with the generated skill available in its context and once by direct answering. We take the mean pass-rate difference between the two configurations as the gain $\bar{\delta} \in [-1, 1]$, giving $s_i^{\text{reuse}} = \text{clip}_{[0,1]}(\frac{1}{2} + \frac{1}{2}\bar{\delta})$ (no change $\rightarrow 0.5$, helps $\rightarrow 1$, hurts $\rightarrow 0$).
- **Skill Grounding** (s_i^{ground}). Source faithfulness: the judge performs a claim-level audit against the retrieved evidence and returns a 1–10 score, which we normalize to $[0, 1]$.
- **Query Penalty** (p_i^q). Search discipline: the judge scores each query set on two dimensions—*query abstraction* (searching for principles, not specific numbers) and *evidence gain* (returning concrete, non-redundant evidence); each dimension scoring ≤ 1 adds 0.15, so $p_i^q \in \{0, 0.15, 0.30\}$.

The two judge prompts follow.

Query-Quality Judge Prompt (R_{search})

You are a query-quality judge for an AI agent that answers questions using web search. The agent has generated a set of Google search queries during exploration. Your job is to evaluate whether these queries retrieve useful evidence to solve the question *from the agent’s current uncertainty*. Do NOT judge whether the final answer is correct; do NOT

use the ground-truth answer.

Inputs.

- **Question:** {question}
- **Candidate options (if any):** {options}
- **Agent goal:** {exploration_goal}
- **Agent reasoning before query:** {agent_reasoning_before_query}
- **Queries to judge:** {queries_json}
- **Search snippets returned:** {search_snippets}

Scoring dimensions. Score the query evaluation on the following 2 dimensions. Each dimension must be an integer score: 0, 1, 2, or 3.

1. Query Abstraction. Whether the query searches for reusable principles, formulas, or workflows, rather than over-fitting to specific instance numbers or searching vague broad topics.

- 0 = *Instance-Overfitted*: query contains specific problem numbers or local variables (e.g. “calculate X when a=3, b=5”), directly fishing for the answer.
- 1 = *Broad Topic*: query is too vague, using only top-level domain keywords (e.g. “physics thermodynamics”).
- 2 = *Concrete Target*: targets the right uncertainty, but still carries specific numbers or instance context from the problem.
- 3 = *De-instanced Precision*: strips away problem-specific numbers/entities and uses precise domain terminology to search for reusable formulas or standard methods.

2. Evidence Gain. Whether the returned search snippets eliminate confusion and provide verifiable, non-redundant evidence.

- 0 = *Noisy/Irrelevant*: snippets are empty, noisy, or completely useless.
- 1 = *Redundant Background*: snippets only give common background knowledge the agent already knew.
- 2 = *Partial Support*: snippets provide useful formulas or rules that narrow down the space.
- 3 = *Crucial Gain*: snippets provide direct conceptual proof or clear counter-evidence to resolve the core uncertainty.

Output (return ONLY valid JSON).

```
{
  "dimension_scores": {
    "query_abstraction": <integer 0-3>,
    "evidence_gain": <integer 0-3>
  },
  "rationale": "1-3 sentences explaining the main strengths or weaknesses."
}
```

Skill Grounding Judge Prompt (R_{skill})

You are a strict skill-quality reviewer for a research project that uses LLM agents to “explore” the web and then distill a reusable skill (workflow + python helper functions). You will rate ONE skill on a SINGLE dimension—

Grounding—on an integer scale 1–10.

Dimension — Grounding (source faithfulness). How much of the skill (workflow + code) is genuinely supported by the evidence the rollout retrieved during exploration?

- **9–10** = every important claim (formula, fact, constant, procedure, edge case) is supported by the evidence; no fabrication.
- **7–8** = most important claims are supported; a few minor items rely on prior knowledge.
- **5–6** = roughly half the skill is supported by evidence; the rest is prior knowledge or unverifiable.
- **3–4** = mostly prior knowledge dressed up as if evidence-derived; the evidence is barely used.
- **1–2** = skill fabricates content, misreads the evidence, or copies wrong numbers/units from the evidence.

Audit instructions.

- Pick the most important “core claims” the skill makes (formulas, numeric constants/conversion factors, named procedures, edge-case rules). Aim for 4–8 claims; skip pure boilerplate.
- For each, decide: supported (clearly supported somewhere in the retrieved evidence; quote a SHORT snippet ≤ 25 words); prior (not in the evidence at all; the model is using its own prior knowledge); fabricated (contradicts the evidence, misreads it, or copies a value with the wrong unit/dimension; briefly say how).
- Be specific about numbers/units.

Output (STRICT JSON, NO prose outside).

```
{
  "score": <1-10>,
  "reason": "<= 120 words; explain the score using the audit findings",
  "claims": [
    {
      "claim": "<paraphrased <= 25 words>",
      "verdict": "supported" | "prior" | "fabricated",
      "evidence_snippet": "<short quote <= 25 words; empty if not supported>",
      "note": "<= 25 words; optional clarification>"
    }
  ]
}
```

Reward variants and constants. The reward ablations in the main paper remove one decision reward at a time while keeping the rest of the pipeline fixed: $w/o r_{\text{when}}$ drops the group-contrastive gate, $w/o r_{\text{sea}}$ drops the query penalty p_i^q , $w/o r_{\text{gen}}$ drops the skill-quality terms s_i^{reuse} and s_i^{ground} , and $w/o \text{all}$ keeps only the task term R_{base} . All constants are held fixed across runs: $N=16$, $\lambda_a=0.7$, $\lambda_c=0.3$, $\tau_0=0.25$, $K=3$, and a per-dimension query penalty of 0.15.

D Preliminary Study Implementation Details

Setup. We use 500 questions from SuperGPQA-Science with teacher-generated reference solutions; questions unsolved by the teacher are discarded. The agents are Qwen3-8B/14B/32B/235B-A22B, and Qwen3.7-Max is used as the teacher judge throughout.

Pipeline. Each question is processed in four steps:

1. **Self-assessment.** In one context, the agent decides whether to trigger exploration and, if yes, states the capability or knowledge it believes is missing.
2. **Direct answering.** In a separate fresh context, the agent answers the question with standard chain-of-thought prompting, without seeing its self-assessment output. We sample several attempts per question and count the question as failed only when all of them are wrong.
3. **Teacher diagnosis.** For a failed question, all sampled attempts are passed to the teacher in a single call, and the teacher compares them against the reference solution to identify the recurring primary cause of failure.
4. **Upper-bound crediting.** For incorrectly answered questions that triggered exploration, the teacher judges whether exploring the self-assessed gap would plausibly have covered the diagnosed cause of failure; only such questions are credited toward the upper bound.

We report two quantities from this pipeline. First, the *exploration trigger rate*, computed separately over the questions the agent eventually answers correctly and incorrectly in Step 2, which measures how well the agent anticipates its own failures. Second, the *execution accuracy*, i.e., the direct-answering accuracy of Step 2, together with the *upper bound* of self-evolution, which additionally credits the questions that are answered incorrectly but trigger exploration and receive a MATCH in Step 4.

The prompts used in Steps 1, 3, and 4 are given below.

Step 1: Self-Assessment Prompt (Student)

You are an intelligent assistant solving a problem.

Question: {question}

Rules.

- Think step-by-step, then output exactly one action tag.
- Do not guess when uncertain (<90% confidence $\Rightarrow$ explore).
- Default to explore for problems involving theorems, specialized techniques, or domain-specific formulas.

Uncertainty signals (any $\Rightarrow$ must explore): unsure about specific facts/formulas; torn between options; relying on vague memory; problem requires a method you cannot confidently execute.

Actions (choose one, only <ANSWER> when confident).

<EXPLORE>specific knowledge gap</EXPLORE>
<ANSWER>final answer</ANSWER>

Step 3: Teacher Diagnosis Prompt

A student model attempted the following problem several times but got it wrong every time.

Problem: {question}

Ground Truth: {ground_truth}

Correct Solution: {solution}

Student Attempts (all sampled trajectories):

{multi_student_answers}

Identify the single most critical knowledge gap or reasoning error that recurs across the attempts and caused the failure. Be specific—name the exact theorem, concept, or technique.

Output:

<CORE_DIAGNOSIS>one sentence</CORE_DIAGNOSIS>

Step 4: Upper-Bound Crediting Prompt (Teacher)

Problem: {question}

Model’s Self-Assessed Gap (before attempting):
{self_gap}

Teacher’s Diagnosed Cause of Failure (after failure):
{teacher_gap}

Judge whether exploring the self-assessed gap would have plausibly covered or prevented the diagnosed failure. The self-assessment may be broader or use different words—that’s fine.

Output:

<MATCH>YES</MATCH> or <MATCH>NO</MATCH>

E Failure Pattern Analysis Details

This section complements the error analysis in the main paper (RQ1) by giving the full definition of each of the five failure patterns; for three of them we additionally show a representative case drawn from the evaluation trajectories. The patterns are assigned by Qwen3.7-Max, which inspects each trajectory and labels the failure it exhibits.

(1) Missed Search Trigger. The agent answers directly on a question that exceeds its parametric knowledge, relying on vaguely remembered facts instead of triggering exploration. Since skipping search can occur on any question, this pattern is measured over all questions; the remaining four are conditioned on questions where exploration is triggered.

(2) Poor Search Query. Exploration is triggered, but the queries miss the true information need: they pursue a wrong hypothesis (confirmation bias), are too generic to retrieve new evidence, or omit the key terminology that separates the candidate options. Figure 6 shows a representative case where the queries miss the required definition.

(3) Formatting Error. The agent violates the action protocol, e.g., looping over <QUERY> without visiting pages or generating a skill, emitting malformed action tags, or exhausting the round budget, so the episode ends without a usable outcome.

(4) Insufficient Skill Coverage. The skill library fails to supply the knowledge the question requires: no relevant skill exists or is retrieved, the retrieved skill targets a mismatched scope, or the skill is written too specifically to its source question to generalize to the new one. Note that Search2Skill does not train the retrieval component itself; the reduction of this failure category comes from calibrated skill *generation*: RL drives the model to produce more high-quality skills with

Poor Search Query: Missing the Definition

Question. The plateau slope of a Geiger–Müller counter tube is 5%, with a plateau length of 250 V. When the operating voltage is 175 V above the start point rather than 50 V above it, by how much does the count rate increase?

Model Search Queries. “Geiger–Müller counter plateau slope relationship with count rate”
“how does voltage affect count rate in GM tube plateau region”

Why the Query Is Poor. The question is not asking for a qualitative relationship between voltage and count rate. It requires the precise definition of **plateau slope**, i.e., how a “5% slope” is quantified in a GM counter plateau calculation.

Better Search Query. “GM counter plateau slope definition percent per 100V”
“Geiger Muller plateau slope formula count rate per 100 volts”

Figure 6: **Poor search query.** The model searches for a broad qualitative relationship, while the task requires the operational definition of “plateau slope” used in GM-counter calculations.

accurate applicability descriptions (use_when) on questions it fails, which enriches the coverage of the skill library and makes the fixed retriever more likely to surface a usable skill. Figure 7 illustrates such a generalization failure.

Insufficient Skill Coverage: Scope-Mismatched Skill

Question. A defendant drives over 100 MPH through a residential neighborhood, loses control, and severely injures a pedestrian. If charged with attempted murder, is he guilty?

Retrieved Skill. The system retrieves murder_intent_recklessness_analysis, whose workflow states that murder may require intent to kill *or extreme recklessness*, emphasizing deadly-weapon and recklessness reasoning.

Coverage Gap. The retrieved skill is valid for completed murder, but the library contains no skill encoding the narrower rule that **attempted murder requires specific intent to kill**. The agent therefore transfers a recklessness rule to an attempt offense where it does not apply, and wrongly convicts the defendant.

Figure 7: **Insufficient skill coverage.** A semantically related homicide skill is retrieved, but its scope does not cover the specific-intent requirement of attempted murder.

(5) Skill Hallucination. The generated skill is unfaithful to the retrieved evidence—it fabricates rules, distorts definitions, or encodes a wrong conclusion as a reusable fact. The agent then follows its own corrupted skill to a wrong answer, and the polluted skill can mislead future questions that retrieve it. Figure 8 shows a case where useful retrieved evidence is distilled into an unsupported formula.

Skill Hallucination: Correct Clue, Fabricated Formula

Question. A playback head has gap width 1.0×10^{-5} m; the recorded wavelength is 2.0×10^{-5} m. Determine the gap loss.

Retrieved Evidence. The retrieved pages correctly attributed gap loss to the **finite gap length** of the reproduce head and pointed to the standard $\sin x/x$ -type transfer-function formula.

Generated Skill (Hallucinated). The skill instead invented an unsupported logarithmic rule $\text{Gap Loss} = 20 \log_{10}(\lambda/2g)$, which is found nowhere in the evidence. Plugging in the given values yields 0 dB—matching no option—so the model drifted to a nearby simple-ratio answer (6.1 dB) instead of the correct 3.9 dB.

Figure 8: **Skill hallucination.** Useful retrieved evidence about finite-gap loss is converted into an unsupported simplified logarithmic formula, and the model solves the numerical problem with the wrong rule.

F Run-to-Run Variance

Every streaming number in the main paper is the mean over three independent runs, each using a different random question order together with a different sampling seed (seeds 42, 67, 92; decoding temperature 0.3). Because decoding is stochastic, even order-independent methods such as Direct Inference and Search Agent fluctuate across runs. Table 7 repeats the Qwen3-8B streaming results with the standard deviation over these three runs. EvoAgentBench is evaluated only under the held-out protocol and therefore does not appear here.

G Prompt Templates

We list the three prompt templates that drive Search2Skill’s agent loop: (i) the decision prompt (Prompt 1), under which the agent chooses among activating a skill, running code, exploring externally, or answering directly; (ii) the exploration prompt (Prompt 2), invoked once the agent decides to explore, which structures the web-search, page-visit, and skill-generation actions; and (iii) the skill-only execution prompt (Prompt 3), used at evaluation time to test the reusability of skills accumulated previously without further exploration. Placeholders in braces (e.g. {question}, {formatted_skills}) are filled at runtime.

G.1 Decision Prompt

Prompt 1 is the entry point of every problem-solving episode. It enumerates the uncertainty signals that should trigger external exploration and exposes the four action tags the agent can emit. The exploration-necessity reward in our RL scheme is computed from the action tag chosen under exactly this prompt.

Method	SuperGPQA			MMLU-Pro			Avg
	Mathematics	Management	Science	Law	Philosophy	History	
Direct Inference	64.8 $\pm$ 0.75	41.4 $\pm$ 1.33	45.6 $\pm$ 1.60	39.5 $\pm$ 0.54	58.3 $\pm$ 1.20	58.8 $\pm$ 1.06	51.4 $\pm$ 0.61
Search Agent	67.2 $\pm$ 1.51	43.0 $\pm$ 1.15	50.2 $\pm$ 0.12	35.8 $\pm$ 1.21	60.9 $\pm$ 1.00	59.6 $\pm$ 0.95	52.8 $\pm$ 0.72
Search Agent _{train}	67.0 $\pm$ 0.81	44.0 $\pm$ 2.75	62.0 $\pm$ 0.95	43.6 $\pm$ 0.96	68.3 $\pm$ 1.28	60.6 $\pm$ 0.80	57.7 $\pm$ 0.77
ReasoningBank	64.6 $\pm$ 1.67	38.0 $\pm$ 1.22	48.8 $\pm$ 2.83	25.0 $\pm$ 1.42	55.9 $\pm$ 1.64	57.7 $\pm$ 0.53	48.3 $\pm$ 1.05
Memp	67.2 $\pm$ 0.40	41.0 $\pm$ 0.99	45.6 $\pm$ 3.41	27.7 $\pm$ 3.21	60.9 $\pm$ 0.61	57.5 $\pm$ 1.06	49.9 $\pm$ 0.56
EvolveR _{train}	64.0 $\pm$ 1.07	46.0 $\pm$ 2.16	63.8 $\pm$ 1.30	41.2 $\pm$ 0.86	67.5 $\pm$ 0.82	61.9 $\pm$ 0.73	57.4 $\pm$ 0.64
Search2Skill	68.0 $\pm$ 0.92	46.0 $\pm$ 1.31	48.0 $\pm$ 1.11	38.4 $\pm$ 0.97	62.3 $\pm$ 1.91	59.6 $\pm$ 0.66	53.7 $\pm$ 0.38
Search2Skill _{train}	71.6 $\pm$ 0.53	50.0 $\pm$ 1.56	63.2 $\pm$ 0.23	45.4 $\pm$ 2.76	68.7 $\pm$ 1.14	65.1 $\pm$ 1.22	60.7 $\pm$ 0.83

Table 7: Streaming results on Qwen3-8B reported as mean $\pm$ standard deviation over three independent runs (question order and sampling seed 42, 67, 92).

Prompt 1

You are an intelligent assistant solving problems in multiple rounds.

Available Skills: {formatted_skills}

Question: {question}

Rules

- Think step-by-step in plain text, then output exactly one action tag at the end.
- You will receive feedback after each action.
- Never output raw code directly; always use <CODE> to run Python code.
- **Critical:** do not guess when uncertain. If you are not highly confident (>90%) in your answer, you must use <EXPLORE> to search for evidence first. Getting the answer wrong is worse than spending an extra round exploring.

Uncertainty signals (any of these means you must explore).

- The question asks about specific facts, names, dates, numbers, or formulas you are not 100% sure about.
- You do not know or are not fully sure about a concept, knowledge point, procedure, workflow, API, library usage, command, syntax, or implementation detail needed to solve the task.
- You find yourself torn between two or more options.
- You are relying on vague memory rather than solid knowledge.
- The problem requires a specific algorithm, technique, or mathematical method that you are not fully confident you can implement correctly (e.g., a DP variant, number-theoretic formula, geometric algorithm, or specialized data structure).

Actions (choose exactly one).

1. Activate a skill: <ACTIVATE_SKILL>skill_name</ACTIVATE_SKILL>. Once you have activated a skill, you can view the knowledge contained within it, or directly utilize the functions included in the skill within <CODE>.
2. Run Python code: <CODE>your python code here</CODE>.
3. Explore – use this when uncertain or missing knowledge: <EXPLORE>what specific information,

knowledge, method, example, workflow, or implementation detail you need to verify</EXPLORE>.

4. Answer – only when confident: <ANSWER>final answer (or option letter like B for multiple choice)</ANSWER>.

G.2 Exploration Prompt

Once the agent emits an <EXPLORE> tag in Prompt 1, control transfers to Prompt 2, which scopes the exploration phase. This prompt enforces the search–visit–distill discipline that underlies Search2Skill and produces the JSON skill object against which the skill-quality reward is evaluated.

Prompt 2

You are in the exploration phase. Goal: gather evidence to answer the question. Do not restate the question. Previous context is available.

Current goal: {exploration_goal}

Rules.

- Think step-by-step in plain text, then output exactly one action tag at the end.
- You must generate a skill before answering or calling other skills.

Search rules – what to search for.

- Never search for the problem itself or copy-paste the question into queries.
- Instead, search for the underlying knowledge needed to solve it: formulas, theorems, or domain knowledge (e.g. “VSEPR theory bond angles”); library/API usage (e.g. “python selfies library decode example”, “rdkit MolFromSmiles tutorial”); algorithms, techniques, or mathematical methods (e.g. “digit DP tutorial with modulo constraint”, “monotonic stack range query algorithm”, “Euler totient modular inverse”, “how to convert SELFIES to SMILES python”).
- Your goal is to learn the method or tool, then apply it yourself.

Recommended exploration chain (follow this order).

Step 1. <QUERY> – search for methods, formulas, or library/API usage relevant to the problem type.

Step 2. <PAGE_VISIT> – pick the most relevant URLs from search results and visit them to read full content with [Supplementary knowledge]. Search snippets are too short to be reliable; you must visit pages to get accurate, detailed information before generating a skill.

Step 3. <GENERATE_SKILL> – after multiple rounds of <QUERY> and <PAGE_VISIT>, once you believe you have gathered sufficient information, you can synthesize the detailed page content into a reusable skill.

Critical: do not skip <PAGE_VISIT>. Search snippets are brief summaries that often lack critical details or contain misleading fragments. Always visit at least one high-quality page to read the full content before generating a skill.

Actions (choose exactly one per round).

1. Search web (at most 3 queries per call):
<QUERY>["query 1", "query 2"]</QUERY>.
2. Visit pages to read full content (at most 4 URLs per call): <PAGE_VISIT>{"urls": ["url1", "url2"], "goal": "what to extract"}</PAGE_VISIT>.
3. Generate skill (only after visiting pages):
<GENERATE_SKILL>{
 "skill_name": "name_with_underscores",
 "use_when": "when to activate this skill
 -- describe the problem type or scenario",
 "workflow": "step-by-step workflow,
 distilled facts, formulas, constants from
 page content (or empty string)",
 "code": "reusable Python `def` functions
 (or empty string)"
}</GENERATE_SKILL>

Skill design rules (<GENERATE_SKILL>).

- Must contain skill_name and at least one non-empty workflow or code.
- **Generalization rule.** Do not just solve the immediate question. Synthesize all uncovered domain knowledge into a broadly applicable skill for similar future problems. **Critical:** you must extract non-obvious domain insights from the [Supplementary knowledge] sections in page-visit results and include them.
- workflow (facts & insights): distilled facts, formulas, rules, and step-by-step procedures.
- code (computation & logic): only def functions (no top-level execution/prints). Loaded as a library. Use for complex math or external libs. Encourage parameterized functions: every function must accept inputs as arguments and compute results dynamically. Forbidden returning a hardcoded constant; never write a function whose sole purpose is to return a fixed value (e.g., def get_gravity(): return 9.8). Such facts belong in workflow, not in code.
- code functions must be self-contained and not rely on any external fetching helpers. All reference data should be distilled into workflow instead.
- **Groundedness rule.** All factual claims, formulas, and parameters in workflow and code should be based on content you read via <PAGE_VISIT>. Do not substitute your internal knowledge for domain-specific facts. If a fact was not found in the visited pages, omit it rather

than guess.

Example – a skill combining workflow and computation. (Line breaks within "workflow" and "code" are rendered visually for readability; the underlying JSON string uses \n.)

```
<GENERATE_SKILL>{
  "skill_name": "radionuclide_decay_solver",
  "use_when": "Solving radioactive decay
problems: look up half-lives and compute
remaining quantities",
  "workflow": "Decay formula:  $N = N_0 * (1/2)^{(t / t_{half})}$ .
Common half-lives:
C-14: 5730 years, U-238: 4.468e9 years,
K-40: 1.248e9 years, Ra-226: 1600 years,
Co-60: 5.27 years, I-131: 8.02 days,
Sr-90: 28.8 years.",
  "code": "def decay(n0, half_life, t):
    return n0 * (0.5 ** (t / half_life))

def time_to_fraction(fraction, half_life):
    import math
    return half_life * math.log2(1 /
fraction)"
}</GENERATE_SKILL>
```

G.3 Skill-Only Execution Prompt

Prompt 3 is used in the skill-transferability experiments (Held-out setting) and in any evaluation that disables further exploration. It removes the <EXPLORE> action and grounds the agent's reasoning entirely on the skills accumulated during training.

Prompt 3

You are an intelligent assistant solving problems using skills. Exploration is disabled.

Available Skills: {formatted_skills}

Question: {question}

Rules.

- Think step-by-step in plain text, then output exactly one action tag at the end.
- You will receive feedback after each action.
- Never output raw code directly; always use <CODE> to run Python code.

Actions (choose exactly one).

1. Activate a skill by outputting
<ACTIVATE_SKILL>skill_name</ACTIVATE_SKILL>.
2. Run Python code with
<CODE>your python code here</CODE>.
3. Answer with
<ANSWER>final answer (or option letter like B for multiple choice)</ANSWER>.

H Example Trajectory and Skill Examples

H.1 A Full Trajectory Example

We provide an illustrative example of the Search2Skill loop on a chemistry problem. In this trajectory, the agent identifies a missing piece of domain knowledge, enters the exploration phase to retrieve the relevant formula, distills the retrieved information into a reusable skill, and then invokes that skill to solve the original question.

Agent Trajectory: HCl Bond Length

User

The rotational constant of the $^1\text{H}^{35}\text{Cl}$ molecule, measured experimentally, is $B = 10.397 \text{ cm}^{-1}$. The reduced mass of this molecule is $1.63 \times 10^{-27} \text{ kg}$. What is the equilibrium distance between the two atoms in the HCl molecule?

A. 0.140 nm B. 0.135 nm ...

Assistant

<think>

I first recalled $B = hc/(8 \pi^2 I)$, but that can't be right for B in cm^{-1} since the units don't match. I must verify the correct relation between B and I (and hence the bond length) before computing.

</think>

<EXPLORE>

What is the correct formula relating rotational constant B (in cm^{-1}) to moment of inertia I for a diatomic molecule? Also, what is the correct formula to compute equilibrium bond length R from B and reduced mass μ ?

</EXPLORE>

ENTERING EXPLORATION MODE

Assistant

<QUERY>

```
[
  "rotational constant B cm^-1",
  "moment of inertia diatomic",
  "bond length from rotational",
  "constant reduced mass formula"
]
```

</QUERY>

Tool

Search results (top hits):

```
[1] cccbdb.nist.gov ...
[2] chem.libretexts.org ...
[3] ...
(snippets too brief -- visit pages)
```

Assistant

<PAGE_VISIT>

```
{
  "urls": ["NIST CCCBDB",
           "LibreTexts", ...],
  "goal": "verify the B-I-R
```

relation and units"

```
}
</PAGE_VISIT>
```

Tool

Page visit results:

```
[1] cccbdb.nist.gov/convertmomint
The exact formula relating rotational
constant B (in cm^-1) to moment of
inertia I is
```

$$B = h / (8 \pi^2 c I)$$

where h is Planck's constant, c the speed of light, and I the moment of inertia.

I relates to bond length R and reduced mass μ by

$$I = \mu R^2$$

Substituting $I = \mu R^2$ gives

$$B = h / (8 \pi^2 c \mu R^2)$$

therefore

$$R = \sqrt{h / (8 \pi^2 c \mu B)}$$

Note: convert B from cm^{-1} to m^{-1} ($\times 100$) before using SI units.

Assistant

<GENERATE_SKILL>

```
{
  "skill_name":
    "rot_constant_to_bond_length",
  "use_when":
    "Find bond length R from
     rotational constant B and
     reduced mass mu.",
  "workflow":
    "R = sqrt(h/(8 pi^2 c mu B));
     convert B: cm^-1 -> m^-1.",
  "code":
    "def bond_length_from_B(
      B_cm, mu): ..."
}
```

</GENERATE_SKILL>

Tool

Skill registered:

rot_constant_to_bond_length
Callable functions loaded.

EXITING EXPLORATION MODE

Assistant

<think>

I now have the verified formula and unit convention. I'll call the new skill directly.

</think>

<CODE>

```

B_cm = 10.397      # cm^-1
mu   = 1.63e-27   # kg
R_m  = bond_length_from_B(B_cm, mu)
print(R_m * 1e9)  # nm
</CODE>

```

Execution Result

```
0.12852125947517776
```

Assistant

```

<think>
R ~ 0.1285 nm, matching option E
most closely.
</think>

```

```
<ANSWER>E</ANSWER>
```

```

    if is_independent_set(graph, combo):
        count += 1
    return count

def generate_grid_graph(n):
    adj = {(i, j): set() for i in range(n) for j
in range(n)}
    for i in range(n):
        for j in range(n):
            if i + 1 < n:
                adj[(i, j)].add((i + 1, j))
                adj[(i + 1, j)].add((i, j))
            if j + 1 < n:
                adj[(i, j)].add((i, j + 1))
                adj[(i, j + 1)].add((i, j))
    return adj

```

H.2 Examples of Acquired Skills

Below we show several additional acquired skills from different domains. Despite the diversity of task types, all skills follow the same standardized schema, with reusable knowledge captured in the workflow field and optional executable procedures captured in the code field. Depending on the domain, a skill may consist of executable helper functions, structured reasoning steps, or both.

Domain: Graph Theory

skill_name: independent_set_counter

use_when: Counting independent sets of a given size in a grid graph or any graph, especially small cases.

workflow: An independent set is a set of vertices with no two adjacent. For a grid graph, vertices are adjacent if they share an edge (horizontal or vertical); diagonal adjacency is not considered. To count independent sets of size k , one simple approach is brute-force enumeration: generate all k -vertex combinations and check whether any selected pair is adjacent. For a 3×3 grid (9 vertices), there are $\binom{9}{3} = 84$ possible 3-vertex combinations, so brute force is feasible. A more general alternative is backtracking: recursively add vertices while maintaining the independence constraint. For larger grids or general graphs, more advanced methods such as dynamic programming or transfer-matrix techniques may be useful, but brute-force enumeration is sufficient for small instances.

code:

```

import itertools

def is_independent_set(graph, vertices):
    selected = set(vertices)
    for v in selected:
        for u in graph[v]:
            if u in selected:
                return False
    return True

def count_independent_sets_size_k(graph, k):
    vertices = list(graph.keys())
    count = 0
    for combo in
itertools.combinations(vertices, k):

```

Domain: Dynamic Programming

skill_name: domino_tiling_3xn_recurrence

use_when: Solving problems about counting domino tilings of a $3 \times n$ rectangle with 2×1 or 1×2 dominoes.

workflow: For a $3 \times n$ board tiled with dominoes, the number of tilings satisfies a linear recurrence. If n is odd, the answer is zero because the board has area $3n$, which is odd and therefore cannot be fully covered by dominoes of area 2. For even n , two equivalent approaches are useful: a state-based dynamic program with auxiliary states, or the direct recurrence $f(n) = 4f(n-2) - f(n-4)$, with base cases $f(0) = 1$, $f(2) = 3$, and $f(4) = 11$. For example, this recurrence gives $f(8) = 153$. This skill is useful whenever a problem asks for the number of tilings of a $3 \times n$ rectangle rather than a one-off small-case enumeration.

code:

```

def count_3xn_domino_tilings(n):
    if n % 2 != 0:
        return 0
    if n == 0:
        return 1
    f = [0] * (n + 1)
    f[0] = 1
    if n >= 2:
        f[2] = 3
    if n >= 4:
        f[4] = 11
    for i in range(6, n + 1, 2):
        f[i] = 4 * f[i - 2] - f[i - 4]
    return f[n]

def count_3xn_domino_tilings_state(n):
    if n % 2 != 0:
        return 0
    if n == 0:
        return 1
    A = [0] * (n + 1)
    B = [0] * (n + 1)
    A[0] = 1
    B[0] = 0
    if n >= 1:
        A[1] = 0
        B[1] = 1

```



```

for i in range(2, n + 1):
    A[i] = (A[i - 2] if i - 2 >= 0 else 0) +
2 * B[i - 1]
    B[i] = A[i - 1] + (B[i - 2] if i - 2 >=
0 else 0)
return A[n]

```

Domain: Biochemistry

skill_name: enzyme_optimal_ph_from_pka

use_when: Determining the approximate optimal pH for an enzyme-catalyzed reaction given pKa values of ionizable groups in the active site and substrate, especially when activity depends on a specific protonation pattern.

workflow: The optimal pH of an enzyme-catalyzed reaction depends on the protonation states of key ionizable groups in the active site and substrate. In a simple two-group model where one group should be protonated and another should be deprotonated for maximal activity, the optimal pH is often approximated by the average of the two relevant pKa values. A more explicit approximation models activity as the product of the fraction of one group in the required protonation state and the fraction of the other group in its required state. This approximation is useful for reasoning about pH-activity profiles when a problem provides pKa values and asks for the likely pH optimum.

code:

```

def optimal_ph_from_pka(pka_enzyme_group,
pka_substrate):
    return (pka_enzyme_group + pka_substrate) /
2.0

def protonated_fraction(pH, pKa):
    return 1 / (1 + 10**(pH - pKa))

def deprotonated_fraction(pH, pKa):
    return 1 - protonated_fraction(pH, pKa)

def enzyme_activity(pH, pKa_histidine,
pKa_substrate):
    histidine_protonated =
protonated_fraction(pH, pKa_histidine)
    substrate_deprotonated =
deprotonated_fraction(pH, pKa_substrate)
    return histidine_protonated *
substrate_deprotonated

```

Domain: Criminal Law

skill_name: intoxication_defenses_criminal_law

use_when: Determining which intoxication defense (voluntary, involuntary, insanity) is applicable and likely to succeed in criminal cases, especially murder charges.

workflow:

1. **Voluntary intoxication.** Defendant knowingly and intentionally consumes intoxicating substances. Only a *partial* defense, applicable to specific-intent crimes (e.g. murder requiring premeditation/deliberation); not a defense to general-intent crimes. The defendant assumes the risk of impaired judgment.

2. **Involuntary intoxication.** Defendant unknowingly or without consent ingests intoxicating substances (e.g. drugged without knowledge, tricked, coerced). A *complete* defense to criminal liability, applicable to any charge. The defendant must prove by a preponderance of the evidence that the intoxication was not self-induced and negated the required criminal intent. It does not equate to insanity; it temporarily negates the mental state required for criminal responsibility.
3. **Insanity defense.** Defendant suffers from a mental disease or defect that prevented forming specific intent or knowing/understanding the nature of the act. Requires proof by clear and convincing evidence that, at the time of the crime, the defendant could not appreciate the criminality of the conduct or conform conduct to the law. Drug-induced psychosis may qualify if it is a recognized mental disease and persists beyond acute intoxication (settled insanity).
4. **Key distinctions.** Intoxication (voluntary/involuntary) is a temporary state affecting intent; insanity is a permanent or chronic mental disorder affecting rational thought. Involuntary intoxication can lead to a not-guilty-by-reason-of-insanity finding if the induced state meets insanity criteria, but the defense is typically framed as involuntary intoxication rather than insanity.
5. **For murder.** Second-degree murder requires malice aforethought but not premeditation. Voluntary intoxication may negate specific intent for first-degree murder but not necessarily malice for second-degree. Involuntary intoxication is a complete defense, potentially leading to acquittal. The insanity defense may succeed if drug-induced psychosis is a recognized mental disease and the defendant lacked criminal capacity.
6. **Burden of proof.** Defendant bears the burden for involuntary intoxication (preponderance); insanity carries a higher burden (clear and convincing).

code: (*none — a knowledge-only skill*).