

PIJL

ASSIGNMENT 1

TEJAS THANGE

AIML-B2

22070126121

2022-26

Q1 Implement a menu-driven Java program (like fib or factorial) to implement these input methods in java (command line args, Scanner, BufferedReader, DataInputStream, Console)

Code:

```
// Tejas Thange  
// AIML-B2  
// 22070126121
```

```
import java.util.Scanner;
```

```
// Class to calculate and print Fibonacci numbers  
public class FibonacciScanner {
```

```
    // Main method to initiate program execution  
    public static void main(String args[]) {
```

```
        // Create a Scanner object to take user input  
        Scanner scan = new Scanner(System.in);
```

```
        // Prompt the user to enter the number of Fibonacci terms to generate  
        System.out.print("Enter the number of Fibonacci numbers to generate: ");  
        int n = scan.nextInt();
```

```

// Print the first n Fibonacci numbers
for (int i = 0; i < n; i++) {
    System.out.print(fibonacci(i) + " ");
}


// Close the Scanner resource
scan.close();
}

// Recursive method to calculate the nth Fibonacci number
public static int fibonacci(int n) {

    // Base cases: 0th and 1st Fibonacci numbers are 0 and 1, respectively
    if (n <= 1) {
        return n;
    } else {
        // Iteratively calculate Fibonacci numbers
        int a = 0, b = 1, c = 0;
        for (int i = 2; i <= n; i++) {
            c = a + b; // Calculate the next Fibonacci number
            a = b;     // Update variables for the next iteration
            b = c;
        }
        return b; // Return the calculated Fibonacci number
    }
}
}

```

Output:

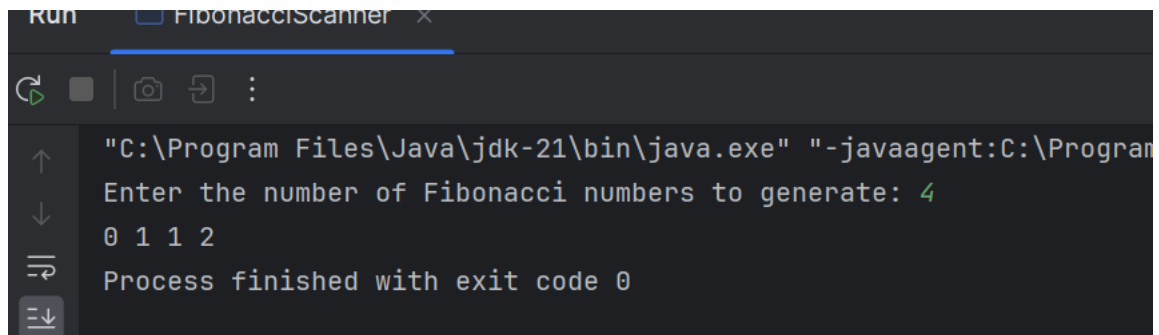

```
Run FibonacciScanner x
"C:\Program Files\Java\jdk-21\bin\java.exe" "-javaagent:C:\Program
Enter the number of Fibonacci numbers to generate: 4
0 1 1 2
Process finished with exit code 0
```

Q2 Implement a simple menu driven calculator in java to implement add, sub, mul, div, sqrt, power, mean, variance. Implement a separate Calculator class to include all related function inside that class.

Code:

```
/*Tejas Thange
```

```
AIML-B2
```

```
22070126121
```

```
*/
```

```
public class Main {
```

```
    public static void main(String[] args) {
```

```
        // Create an instance of UserInput to handle user input
```

```
        UserInput userInput = new UserInput();
```

```
        // Get the user's choice of operation
```

```
        String choice = userInput.getStringInput("Choose Operation: +, -, /, *, ^, var, stddev, avg");
```

```
        // Check if the chosen operation is a basic arithmetic operation (+, -, *, /, ^)
```

```
        if (choice.equals("+") || choice.equals("-") || choice.equals("*") || choice.equals("/") ||
            choice.equals("^")) {
```

```
            // Get user input for two numbers
```

```
            double n1 = userInput.getDoubleInput("Enter First Number:");
```

```
            double n2 = userInput.getDoubleInput("Enter Second Number:");
```

```

userInput.closeScanner(); // Close the scanner since input is complete

// Perform the chosen operation and display the result
if (choice.equals("+")) {
    System.err.println(Calculator.add(n1, n2));
} else if (choice.equals("-")) {
    System.err.println(Calculator.subtract(n1, n2));
} else if (choice.equals("*")) {
    System.err.println(Calculator.multiply(n1, n2));
} else if (choice.equals("/")) {
    System.out.println(Calculator.divide(n1, n2));
} else if (choice.equals("^")) {
    System.out.println(Calculator.power(n1, n2));
} else {
    System.out.println("Invalid Operation");
}
} else {
    // For statistical operations (var, stddev, avg), get an array input
    double[] arr = userInput.getArrayInput();
    userInput.closeScanner(); // Close the scanner since input is complete

    // Perform the chosen statistical operation and display the result
    if (choice.equals("var")) {
        System.out.println(Calculator.variance(arr));
    } else if (choice.equals("stddev")) {
        System.out.println(Calculator.stddev(arr));
    } else if (choice.equals("avg")) {
        System.out.println(Calculator.mean(arr));
    } else {
        System.out.println("Invalid Operation");
    }
}

```

```
    }  
}  
}
```

// UserInput.java

```
import java.util.Scanner;  
  
public class UserInput {  
    // Scanner object for reading input  
    private Scanner scanner;  
  
    // Constructor initializes the Scanner  
    public UserInput() {  
        scanner = new Scanner(System.in);  
    }  
  
    // Method to get a double input from the user with a prompt message  
    public double getDoubleInput(String message) {  
        System.out.println(message);  
        return scanner.nextDouble();  
    }  
  
    // Method to get a string input from the user with a prompt message  
    public String getStringInput(String message) {  
        System.out.println(message);  
        return scanner.nextLine();  
    }  
  
    // Method to get an array input from the user with a prompt message  
    public double[] getArrayInput() {
```

```
Scanner sc = new Scanner(System.in);

// Prompt user for the size of the array
System.out.println("Enter the size of the array:");
int size = sc.nextInt();

// Create an array to store the input elements
double[] array = new double[size];

// Prompt user to enter each element of the array
System.out.println("Enter elements:");
for (int i = 0; i < size; i++) {
    // Check if the next input is a double
    if (sc.hasNextDouble()) {
        array[i] = sc.nextDouble();
    }
}
sc.close(); // Close the inner scanner
return array;
}

// Method to close the Scanner when it is no longer needed
public void closeScanner() {
    scanner.close();
}
}
```

```
// Calculator.java
```

```
import java.util.Arrays;
```

```
public class Calculator {
```

```
    // Method to add two numbers
```

```
    public static double add(double n1, double n2){
```

```
        return n1 + n2;
```

```
    }
```

```
    // Method to subtract two numbers
```

```
    public static double subtract(double n1, double n2){
```

```
        return n1 - n2;
```

```
    }
```

```
    // Method to multiply two numbers
```

```
    public static double multiply(double n1, double n2){
```

```
        return n1 * n2;
```

```
    }
```

```
    // Method to divide two numbers
```

```
    public static double divide(double n1, double n2){
```

```
        return n1 / n2;
```

```
    }
```

```
    // Method to calculate the mean (average) of an array of numbers
```

```
    public static double mean(double[] arr){
```

```
        return Arrays.stream(arr).sum() / arr.length;
```

```
    }
```

```
    // Method to calculate the square root of a number
```

```

public static double sqrt(double n){
    return Math.pow(n, 0.5);
}

// Method to calculate the standard deviation of an array of numbers
public static double stddev(double[] arr){
    double standardDeviation = 0.0;

    // Calculate the sum of squared differences from the mean
    for (double num : arr) {
        standardDeviation += Math.pow(num - mean(arr), 2);
    }

    // Calculate the square root of the average of squared differences
    return Math.sqrt(standardDeviation / arr.length);
}

// Method to calculate the variance of an array of numbers
public static double variance(double[] arr){
    // Variance is the square root of the standard deviation
    return sqrt(stddev(arr));
}

// Method to calculate the power of a number raised to another number
public static double power(double n1, double n2){
    return Math.pow(n1, n2);
}
}

```


Output:

```
Main x
| | |
"C:\Program Files\Java\jdk-21\bin\java
Choose Operation: +, -, /, *, ^, var, s
var
Enter the size of the array:
4
Enter elements:
2
4
5
7
1.342674807141325

Process finished with exit code 0
|
```

```
Main x
| | |
"C:\Program Files\Java\jdk-21\bin\java
Choose Operation: +, -, /, *, ^, var,
+
Enter First Number:
5
Enter Second Number:
8
13.0

Process finished with exit code 0
|
```

Check the Given Below Github Account :

<https://github.com/AIMaster17>