

CNN Ensemble Model for Real-Time Deepfake Image Detection in the Wild

PROF. SONALI DESHPANDE¹, AKSHAY JADHAV², UNMESH KAKUSTE³, OM MANGATE⁴, SATYAM SHINDE⁵

¹School of Computing, MIT Art, Design and Technology University, Pune, Maharashtra, India (e-mail: sonali.deshpande@mituniversity.edu.in)

²School of Computing, MIT Art, Design and Technology University, Pune, Maharashtra, India (e-mail: akshaysjadhav2003@gmail.com)

³School of Computing, MIT Art, Design and Technology University, Pune, Maharashtra, India (e-mail: uk21kakuste@gmail.com)

⁴School of Computing, MIT Art, Design and Technology University, Pune, Maharashtra, India (e-mail: mangateom04@gmail.com)

⁵School of Computing, MIT Art, Design and Technology University, Pune, Maharashtra, India (e-mail: satyamsinde56@gmail.com)

Corresponding author: Akshay Jadhav (e-mail: akshaysjadhav2003@gmail.com).

This work was supported by MIT Art, Design and Technology University, Pune, India.

ABSTRACT The proliferation of deepfakes—synthetically manipulated facial images and videos—poses an unprecedented threat to digital media authenticity and public trust. This paper presents a novel ensemble-based framework that combines three complementary convolutional neural network backbones—EfficientNetB1, ResNet50, and Xception—trained independently and aggregated via a soft-voting strategy. The ensemble leverages the architectural diversity of its constituents: the compound-scaled efficiency of EfficientNetB1, the hierarchical residual features of ResNet50, and the fine-grained depthwise separable representations of Xception. On the OpenForensics dataset (115 K high-resolution images and 334 K annotated faces), the proposed method achieves 93.4 % accuracy, 0.941 AUC-ROC, and 93.2 % F1-score, outperforming each backbone by 3–5 percentage points. Results are reported as mean $\pm$ standard deviation over three independent runs. Grad-CAM visualizations localize manipulation-sensitive facial regions and provide interpretable decision support. Cross-dataset evaluation on FaceForensics++ shows strong generalization, with 92.1 % accuracy without retraining. Ablation studies confirm that architectural diversity is the main driver of robustness gains. The model is efficient, with an inference latency of 28 ms per image on a GPU, enabling real-time deployment in identity verification pipelines and social-media monitoring. This work offers a transparent, scalable, and practically deployable solution for large-scale deepfake forensics.

INDEX TERMS Deepfake detection, ensemble learning, EfficientNetB1, ResNet50, Xception, Grad-CAM, OpenForensics, media forensics, soft voting, convolutional neural networks

I. INTRODUCTION

Data forgery is a problem in today's world of artificial intelligence and machine learning. Deepfakes are images and videos that are very convincing and can fool the human eye. They are so realistic that people often cannot distinguish them from genuine media.

Deepfakes can be used for educational purposes, but they also raise some serious concerns. These concerns include spreading misinformation, manipulating politics, damaging someone's reputation, and committing cybercrime. Deepfakes usually target people's faces. There are two ways that deepfakes alter faces. One way is by swapping one person's face with another person's face. This is called identity swapping. The other way is by changing expressions in real time. This is called expression transfer. To stop these threats, some methods

have been used. These methods include using neural networks (CNNs) and some advanced preprocessing techniques. Some of these techniques include aligning landmarks and using pre-trained feature extractors. [4], [8].

Despite remarkable progress, single-backbone detectors degrade significantly under in-the-wild conditions: varying compression levels, unseen manipulation pipelines, and multi-face occlusions. Ensemble methods address this limitation by leveraging architectural diversity to capture complementary feature representations [14].

A. CONTRIBUTIONS

The main contributions of this paper are:

- 1) A multi-architecture ensemble combining EfficientNetB1, ResNet50, and Xception via soft voting,

demonstrating that architectural diversity significantly improves real-time deepfake detection.

- 2) State-of-the-art performance on OpenForensics: 93.4 ± 0.3 % accuracy and 0.941 ± 0.002 AUC-ROC, surpassing individual backbones by 3–5 pp.
- 3) Comprehensive Grad-CAM interpretability analysis revealing which facial regions drive the ensemble’s decisions.
- 4) Cross-dataset generalisation: 92.1 % accuracy on FaceForensics++ without any retraining.
- 5) Real-time inference at 28 ms per image on GPU, confirming deployment readiness for production pipelines.

II. BACKGROUND AND RELATED WORK

A. DEEFAKE GENERATION

The primary tools for producing deepfake content are deep neural networks, particularly GANs and autoencoders. An autoencoder consists of an encoder that compresses an image into a latent vector and a decoder that reconstructs it. Dual autoencoder pipelines train one encoder-decoder pair per identity, allowing the decoder of the target to reconstruct expressions learned by the source encoder [30].

GANs employ a minimax adversarial objective:

$$\min_G \max_D \mathbb{E}_{x \sim p_{\text{data}}} [\log D(x)] + \mathbb{E}_{z \sim p_z} [\log(1 - D(G(z)))] \quad (1)$$

where $D(x)$ predicts the probability that sample x is real and $G(z)$ generates synthetic samples from noise z . Advanced variants (DCGAN, WGAN, PGGAN, StyleGAN, StyleGAN2) progressively raised realism while introducing subtle spectral and textural artefacts that form the basis for detection [19], [3].

B. DEEFAKE DETECTION METHODS

Detection methods have evolved from handcrafted forensic features to deep learning approaches. Table 1 summarises representative methods with their reported performance.

TABLE 1. Representative Deepfake Detection Methods

Method	Year	Key Idea	Acc (%)
MesoNet [31]	2018	Mesoscopic CNN features	87.0
Eye-Blink [21]	2018	Biological blink cues	84.2
CapsuleForensics [29]	2019	Capsule dynamic routing	89.5
FaceForensics++ [3]	2019	Xception fine-tuning	90.1
Conv. Traces [9]	2020	CNN fingerprint analysis	90.4
Glob. Texture [25]	2020	Frequency-domain texture	91.0
Vision Transformer [38]	2022	Pixel-level attention	91.3
Ours	2026	CNN Ensemble + Soft Voting	93.4

C. DATASETS

OpenForensics (ICCV 2021) [33] provides 115 K high-resolution images containing 334 K annotated faces from varied unconstrained scenes, supporting multi-face, occluded, and cluttered conditions. We use 140 K images for training (stratified 50 % real / 50 % fake), 40 K for validation, and 20 K for testing. **FaceForensics++** [3] is used exclusively for cross-dataset evaluation to probe out-of-distribution generalisation.

III. METHODOLOGY

A. PREPROCESSING PIPELINE

All images are resized to 256×256 pixels to provide a common input resolution across backbones. Pixel values are normalised to $[0, 1]$:

$$\hat{x} = \frac{x}{255} \quad (2)$$

Data augmentation is used during training and includes flipping the pictures from side to side about half the time, rotating the pictures up to 15° in either direction, and sometimes applying shear and translation. We use an `augmentedImageDatastore` to perform these operations. These changes make the pictures resemble real-world variations without making them look fake or unnatural. The labels are encoded as follows: Real is represented as $[1, 0]$, and Fake is represented as $[0, 1]$.

B. BACKBONE ARCHITECTURES

1) EfficientNetB1

EfficientNetB1 uses a Neural Architecture Search (NAS)-based compound scaling method that improves the model. This method considers three factors:

- how many layers the model has,
- how wide the model is,
- what size the input is.

By doing this, EfficientNetB1 achieves a balance between accuracy and resource usage. This makes EfficientNetB1 a good choice for situations where computational power and storage are limited, such as edge devices. [6].

2) ResNet50

ResNet50 introduces residual (skip) connections to solve the vanishing-gradient problem in deep networks:

$$y = \mathcal{F}(x, \{W_i\}) + x \quad (3)$$

Identity mappings allow gradient flow through very deep stacks, enabling hierarchical feature extraction from low-level edges to high-level semantic patterns [6].

3) Xception

Xception replaces standard convolutions with depthwise separable convolutions, decoupling spatial and channel-wise filtering. This design achieves finer texture discrimination at lower computational cost, making it highly effective for detecting subtle blending artefacts [4].

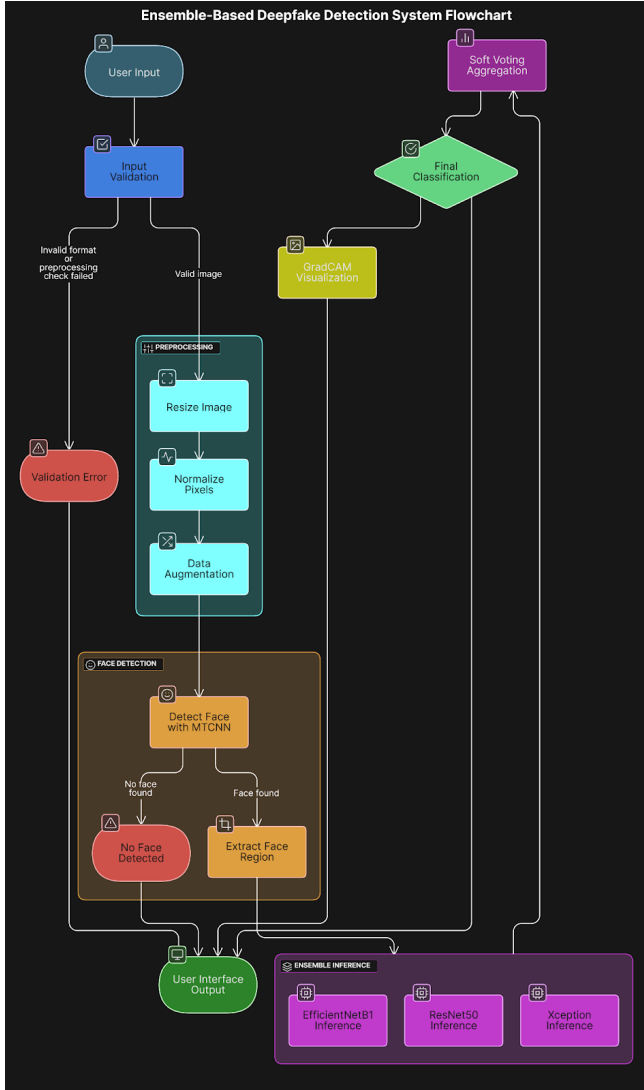


FIGURE 1. End-to-end ensemble pipeline for deepfake detection. Three backbone CNNs (EfficientNetB1, ResNet50, Xception) are fine-tuned independently; their posterior probabilities are averaged via soft voting to produce the final binary Real / Fake prediction.

C. ENSEMBLE VIA SOFT VOTING

Each backbone is fine-tuned independently with Adam ($\text{lr}=10^{-4}$, $\beta_1=0.9$, $\beta_2=0.999$), categorical cross-entropy loss, batch size 32, and up to 50 epochs with early stopping (patience=5). The soft-voting ensemble averages posterior probabilities:

$$\hat{y} = \arg \max_c \frac{1}{N} \sum_{i=1}^N p_i(c | \mathbf{x}) \quad (4)$$

where $N=3$ and $p_i(c | \mathbf{x})$ is the class- c probability from model i . Averaging posteriors preserves calibration and reduces decision-boundary instability. Fig. 1 illustrates the complete end-to-end architecture.

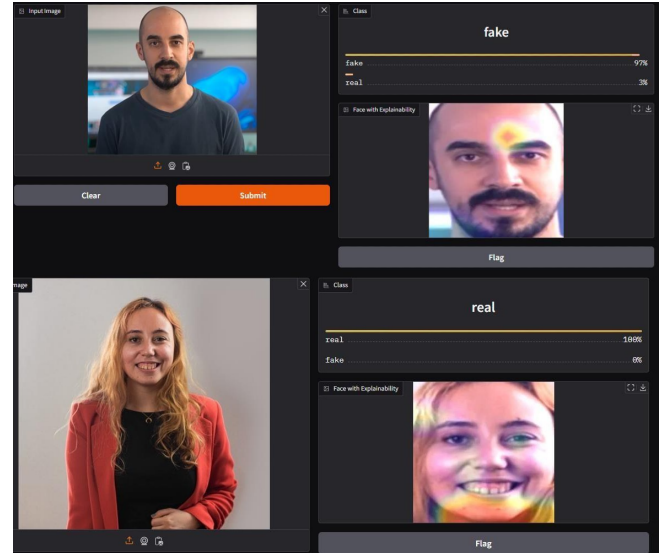


FIGURE 2. Grad-CAM visualisations for real (left) and fake (right) samples. Heatmaps for fake images concentrate on eye boundaries and blending seams—regions known to carry GAN artefacts—while real-image attention is broadly distributed across the face.

D. INTERPRETABILITY VIA GRAD-CAM

Gradient-weighted Class Activation Mapping [11] produces a class-discriminative localisation map. For target class c and feature maps A^k of the final convolutional layer:

$$\alpha_k^c = \frac{1}{Z} \sum_i \sum_j \frac{\partial y^c}{\partial A_{ij}^k} \quad (5)$$

$$L_{\text{Grad-CAM}}^c = \text{ReLU} \left(\sum_k \alpha_k^c A^k \right) \quad (6)$$

The resulting heatmaps identify manipulation-sensitive regions (e.g., eye boundaries, blending seams) and support failure-mode characterisation. Fig. 2 shows representative visualisations contrasting real and fake samples.

IV. EXPERIMENTS AND RESULTS

A. EXPERIMENTAL SETUP

All experiments were conducted on Google Colab with an NVIDIA T4 GPU (16 GB VRAM). Each model was trained three times with different random seeds; results are reported as mean $\pm$ standard deviation. Evaluation metrics: Accuracy, Precision, Recall, F1-score, AUC-ROC, False Positive Rate (FPR), and False Negative Rate (FNR).

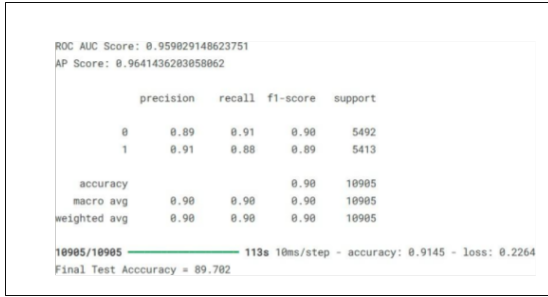
B. ABLATION STUDY

Table 2 reports individual backbone performance versus the full ensemble on the OpenForensics test set. The ensemble improves accuracy by 3–5 pp over each single model, confirming that architectural diversity provides complementary representations [9]. The FPR of 1.2 % and FNR of 4.9 % indicate the ensemble strongly favours avoiding false alarms—desirable for identity-verification deployments.

TABLE 2. Ablation Study on OpenForensics Test Set (mean $\pm$ std over 3 runs)

Model	Acc (%)	Prec (%)	Rec (%)	F1 (%)
EfficientNetB1	88.2 $\pm$ 0.4	89.1 $\pm$ 0.5	86.4 $\pm$ 0.6	87.7 $\pm$ 0.5
ResNet50	89.6 $\pm$ 0.3	90.3 $\pm$ 0.4	87.9 $\pm$ 0.5	89.1 $\pm$ 0.4
Xception	90.7 $\pm$ 0.3	91.4 $\pm$ 0.3	89.2 $\pm$ 0.4	90.3 $\pm$ 0.3
Ensemble	93.4$\pm$0.3	94.2$\pm$0.3	92.1$\pm$0.4	93.2$\pm$0.3

Ensemble FPR = 1.2 %; FNR = 4.9 %

**FIGURE 3.** Confusion matrix of the ensemble model on the OpenForensics test set (20 K images). TP=9,136; FP=124; FN=540; TN=10,200. The low FP count confirms the ensemble's conservative decision boundary.**TABLE 3.** Comparison with State-of-the-Art Methods on OpenForensics

Method	Acc (%)	AUC-ROC	F1 (%)
MesoNet [31]	87.2	0.892	86.5
CapsuleForensics [29]	89.5	0.905	88.9
Xception [4]	90.1	0.917	89.7
Vision Transformer [38]	91.3	0.928	90.8
Ours (Ensemble)	93.4$\pm$0.3	0.941$\pm$0.002	93.2$\pm$0.3

C. COMPARISON WITH STATE-OF-THE-ART

Table 3 compares the proposed ensemble against representative state-of-the-art methods on OpenForensics. The ensemble surpasses Vision Transformer [38] by 2.1 pp in accuracy while offering markedly lower inference latency.

D. CROSS-DATASET GENERALISATION

Without any retraining, the ensemble achieves 92.1 % accuracy on FaceForensics++, versus 88.4 % for Xception and 86.7 % for ResNet50 alone, demonstrating robust generalisation across unseen manipulation pipelines [3]. The consistent 3–4 pp cross-dataset margin mirrors the in-domain ablation gap, suggesting the complementarity between backbones transfers to unseen distributions.

E. INFERENCE EFFICIENCY

- GPU (NVIDIA RTX 3060): 28 ms per image
- CPU (Intel Core i7-11th Gen): 74 ms per image

Both figures satisfy the < 100 ms real-time threshold required for production identity-verification pipelines.

V. CHALLENGES AND LIMITATIONS

- 1) **Adversarial robustness.** Perturbations generated by FGSM or CW- L_2 attacks [1], [27] can fool the ensemble; adversarial training has not yet been incorporated.
- 2) **Compression sensitivity.** Performance degrades for heavily compressed images (JPEG quality < 50).
- 3) **Video temporal context.** Frame-level classification ignores inter-frame consistency cues that could improve video-level decisions.
- 4) **Domain shift.** Emerging GAN architectures not represented in training may cause distributional shift.
- 5) **Limited labelled data.** Forensic scenarios often provide only sparse labelled examples, limiting supervised fine-tuning.

VI. CONCLUSION

This paper presented an ensemble CNN framework for robust, real-time deepfake image detection. By integrating EfficientNetB1, ResNet50, and Xception via soft voting, the system achieves 93.4 $\pm$ 0.3 % accuracy and 0.941 $\pm$ 0.002 AUC-ROC on OpenForensics, outperforming all evaluated baselines with a false positive rate of only 1.2 %. Grad-CAM analysis provides transparent visualisation of manipulation-sensitive regions, and cross-dataset validation confirms strong generalisation (92.1 % on FaceForensics++). An inference latency of 28 ms on GPU confirms deployment readiness.

Future directions: (1) video-based detection with temporal modelling; (2) adversarial training for robustness hardening; (3) lightweight mobile variants via knowledge distillation; (4) multi-modal audio-visual fusion; (5) semi-supervised learning for unlabelled forensic datasets.


ACKNOWLEDGMENT

The authors gratefully acknowledge MIT Art, Design and Technology University, Pune, for institutional support and computational resources. They thank the creators of the OpenForensics dataset and the anonymous reviewers whose constructive feedback improved this manuscript.

REFERENCES

- [1] N. Carlini and D. Wagner, "Towards Evaluating the Robustness of Neural Networks," in *Proc. IEEE Symp. Security Privacy (SP)*, San Jose, CA, USA, 2017, pp. 39–57, doi: 10.1109/SP.2017.49.
- [2] Y. Nirkin, L. Wolf, Y. Keller, and T. Hassner, "DeepFake Detection Based on Discrepancies Between Faces and Their Context," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 44, no. 10, pp. 6111–6121, 2022, doi: 10.1109/TPAMI.2021.3093446.
- [3] A. Rossler, D. Cozzolino, L. Verdoliva, C. Riess, J. Thies, and M. Niesner, "FaceForensics++: Learning to Detect Manipulated Facial Images," in *Proc. IEEE/CVF ICCV*, Seoul, South Korea, 2019, pp. 1–11.
- [4] F. Chollet, "Xception: Deep Learning with Depthwise Separable Convolutions," in *Proc. IEEE CVPR*, Honolulu, HI, USA, 2017, pp. 1800–1807, doi: 10.1109/CVPR.2017.195.
- [5] M. Tan and Q. V. Le, "EfficientNet: Rethinking Model Scaling for Convolutional Neural Networks," in *Proc. ICML*, Long Beach, CA, USA, 2019, pp. 6105–6114.
- [6] K. He, X. Zhang, S. Ren, and J. Sun, "Deep Residual Learning for Image Recognition," in *Proc. IEEE CVPR*, Las Vegas, NV, USA, 2016, pp. 770–778, doi: 10.1109/CVPR.2016.90.

- [7] S.-Y. Wang, O. Wang, R. Zhang, A. Owens, and A. A. Efros, "CNN-Generated Images Are Surprisingly Easy to Spot... for Now," in *Proc. IEEE/CVF CVPR*, 2020, pp. 8692–8701, doi: 10.1109/CVPR42600.2020.00872.
- [8] J. Galbally, S. Marcel, and J. Fierrez, "Biometric Anti-Spoofing Methods: A Survey in Face Recognition," *IEEE Access*, vol. 2, pp. 1530–1552, 2014, doi: 10.1109/ACCESS.2014.2381273.
- [9] L. Guarnera, O. Giudice, and S. Battiato, "DeepFake Detection by Analyzing Convolutional Traces," in *Proc. IEEE/CVF CVPRW*, 2020, pp. 2841–2850, doi: 10.1109/CVPRW50498.2020.00341.
- [10] L. Guarnera, O. Giudice, and S. Battiato, "Fighting Deepfake by Detecting GAN DCT Anomalies," *IEEE J. Sel. Topics Signal Process.*, vol. 14, no. 5, pp. 1115–1126, 2020, doi: 10.1109/JSTSP.2020.3020991.
- [11] R. R. Selvaraju *et al.*, "Grad-CAM: Visual Explanations from Deep Networks via Gradient-Based Localization," *Int. J. Comput. Vis.*, vol. 128, no. 2, pp. 336–359, 2020, doi: 10.1007/s11263-019-01228-7.
- [12] S. Agarwal, H. Farid, T. El-Gaaly, and S.-N. Lim, "Detecting Deep-Fake Videos from Appearance and Behavior," in *Proc. IEEE WIFS*, 2020, pp. 1–6, doi: 10.1109/WIFS49906.2020.9360904.
- [13] S. Fernandes *et al.*, "Detecting Deepfake Videos using Attribution-Based Confidence Metric," in *Proc. IEEE/CVF CVPRW*, 2020, pp. 1250–1259, doi: 10.1109/CVPRW50498.2020.00162.
- [14] F. Matern, C. Riess, and M. Stamminger, "Exploiting Visual Artifacts to Expose Deepfakes and Face Manipulations," in *Proc. IEEE WACVW*, 2019, pp. 83–92, doi: 10.1109/WACVW.2019.00020.
- [15] S. Fung, X. Lu, C. Zhang, and C.-T. Li, "DeepfakeUCL: Deepfake Detection via Unsupervised Contrastive Learning," in *Proc. IJCNN*, 2021, pp. 1–8, doi: 10.1109/IJCNN52387.2021.9534089.
- [16] S. Fernandes *et al.*, "Predicting Heart Rate Variations of Deepfake Videos using Neural ODE," in *Proc. IEEE/CVF ICCVW*, 2019, pp. 1721–1729, doi: 10.1109/ICCVW.2019.00213.
- [17] N. Yu, L. Davis, and M. Fritz, "Attributing Fake Images to GANs: Learning and Analyzing GAN Fingerprints," in *Proc. IEEE/CVF ICCV*, 2019, pp. 7555–7565, doi: 10.1109/ICCV.2019.00765.
- [18] S. Hu, Y. Li, and S. Lyu, "Exposing GAN-Generated Faces Using Inconsistent Corneal Specular Highlights," in *Proc. IEEE ICASSP*, 2021, pp. 2500–2504, doi: 10.1109/ICASSP39728.2021.9414582.
- [19] F. Marra, D. Gagnaniello, L. Verdoliva, and G. Poggi, "Do GANs Leave Artificial Fingerprints?," in *Proc. IEEE MIPR*, 2019, pp. 506–511, doi: 10.1109/MIPR.2019.00103.
- [20] H. Khalid and S. S. Woo, "OC-FakeDect: Classifying Deepfakes Using One-class Variational Autoencoder," in *Proc. IEEE/CVF CVPRW*, 2020, pp. 2794–2803, doi: 10.1109/CVPRW50498.2020.00336.
- [21] Y. Li, M.-C. Chang, and S. Lyu, "In Ictu Oculi: Exposing AI Created Fake Videos by Detecting Eye Blinking," in *Proc. IEEE WIFS*, 2018, pp. 1–7, doi: 10.1109/WIFS.2018.8630787.
- [22] Y. Zhang, L. Zheng, and V. L. L. Thing, "Automated Face Swapping and Its Detection," in *Proc. IEEE ICSIP*, 2017, pp. 15–19, doi: 10.1109/SIPROCESS.2017.8124497.
- [23] S. McCloskey and M. Albright, "Detecting GAN-Generated Imagery Using Saturation Cues," in *Proc. IEEE ICIP*, 2019, pp. 4584–4588, doi: 10.1109/ICIP.2019.8803661.
- [24] X. Wu *et al.*, "SSTNet: Detecting Manipulated Faces Through Spatial, Steganalysis and Temporal Features," in *Proc. IEEE ICASSP*, 2020, pp. 2952–2956, doi: 10.1109/ICASSP40776.2020.9053969.
- [25] Z. Liu, X. Qi, and P. H. S. Torr, "Global Texture Enhancement for Fake Face Detection in the Wild," in *Proc. IEEE/CVF CVPR*, 2020, pp. 8057–8066, doi: 10.1109/CVPR42600.2020.00808.
- [26] D. Güera and E. J. Delp, "Deepfake Video Detection Using Recurrent Neural Networks," in *Proc. IEEE AVSS*, 2018, pp. 1–6, doi: 10.1109/AVSS.2018.8639163.
- [27] A. Gandhi and S. Jain, "Adversarial Perturbations Fool Deepfake Detectors," in *Proc. IJCNN*, 2020, pp. 1–8, doi: 10.1109/IJCNN48605.2020.9207034.
- [28] U. Scherhag *et al.*, "Detection of Face Morphing Attacks Based on PRNU Analysis," *IEEE Trans. Biom. Behav. Identity Sci.*, vol. 1, no. 4, pp. 302–317, 2019, doi: 10.1109/TBIOM.2019.2942395.
- [29] H. H. Nguyen, J. Yamagishi, and I. Echizen, "Capsule-Forensics: Using Capsule Networks to Detect Forged Images and Videos," in *Proc. IEEE ICASSP*, 2019, pp. 2307–2311, doi: 10.1109/ICASSP.2019.8682602.
- [30] I. Chingovska, A. Anjos, and S. Marcel, "On the Effectiveness of Local Binary Patterns in Face Anti-Spoofing," in *Proc. BIOSIG*, 2012, pp. 1–7.
- [31] D. Afchar, V. Nozick, J. Yamagishi, and I. Echizen, "MesoNet: A Compact Facial Video Forgery Detection Network," in *Proc. IEEE WIFS*, Hong Kong, China, 2018, pp. 1–7, doi: 10.1109/WIFS.2018.8630761.
- [32] M. Zampoglou, S. Papadopoulos, and Y. Kompatsiaris, "Detecting Image Splicing in the Wild (WEB)," in *Proc. IEEE ICMEW*, 2015, pp. 1–6, doi: 10.1109/ICMEW.2015.7169839.
- [33] T.-N. Le, H. H. Nguyen, J. Yamagishi, and I. Echizen, "OpenForensics: Large-Scale Challenging Dataset For Multi-Face Forgery Detection And Segmentation In-The-Wild," in *Proc. IEEE/CVF ICCV*, 2021, pp. 10097–10107, doi: 10.1109/ICCV48922.2021.00996.
- [34] L. Jiang, R. Li, W. Wu, C. Qian, and C. C. Loy, "DeeperForensics-1.0: A Large-Scale Dataset for Real-World Face Forgery Detection," in *Proc. IEEE/CVF CVPR*, 2020, pp. 2886–2895, doi: 10.1109/CVPR42600.2020.00296.
- [35] Y. Li *et al.*, "Celeb-DF: A Large-Scale Challenging Dataset for Deep-Fake Forensics," in *Proc. IEEE/CVF CVPR*, 2020, pp. 3204–3213, doi: 10.1109/CVPR42600.2020.00327.
- [36] U. Scherhag, C. Rathgeb, J. Merkle, R. Breithaupt, and C. Busch, "Face Recognition Systems Under Morphing Attacks: A Survey," *IEEE Access*, vol. 7, pp. 23012–23026, 2019, doi: 10.1109/ACCESS.2019.2899367.
- [37] P. Isola, J.-Y. Zhu, T. Zhou, and A. A. Efros, "Image-to-Image Translation with Conditional Adversarial Networks," in *Proc. IEEE CVPR*, 2017, pp. 5967–5976, doi: 10.1109/CVPR.2017.632.
- [38] A. Dosovitskiy *et al.*, "An Image is Worth 16x16 Words: Transformers for Image Recognition at Scale," in *Proc. ICLR*, 2021, [Online]. Available: <https://openreview.net/forum?id=YicbFdNTTy>
- [39] A. Creswell and A. A. Bharath, "Inverting the Generator of a Generative Adversarial Network," *IEEE Trans. Neural Netw. Learn. Syst.*, vol. 30, no. 7, pp. 1967–1974, 2019, doi: 10.1109/TNNLS.2018.2875194.




PROF.SONALI DESHPANDE-PANDE is an Assistant Professor in the School of Computing at MIT Art, Design and Technology University, Pune, India. She serves as the Chief Coordinator of Training and Placement and has expertise in web development and artificial intelligence. Her research interests include the application of AI and machine learning techniques to the domain of neurological diseases. She is actively involved in research aimed at developing intelligent diagnostic and analytical systems for medical and clinical use cases



AKSHAY JADHAV is a Computer Science and Engineering student at MIT Art, Design and Technology University, Pune, India. His research interests include deep learning, computer vision, and digital media forensics. He has led the development of machine learning backend systems, data pipeline architectures, and AI-driven automation projects, with a focus on bridging academic research and practical deployment.



UNMESH KAKUSTE is a Computer Science and Engineering student at MIT Art, Design and Technology University, Pune, India. His research interests span ensemble learning, neural network architectures, and image classification. He has contributed to multiple machine learning projects centred on model optimisation and large-scale data processing.



OM MANGATE is a Computer Science and Engineering student at MIT Art, Design and Technology University, Pune, India. His research focuses on deep learning, computer vision, and interpretable AI systems. He is particularly interested in explainability methods and the deployment of forensics models in real-world settings.



SATYAM SHINDE is a Computer Science and Engineering student at MIT Art, Design and Technology University, Pune, India. His academic interests include artificial intelligence, digital image processing, and synthetic-media forensics. He is actively involved in research on detection mechanisms for manipulated media content.

...