

Marketplace Monitor: illustrated user guide

A practical guide to the Monitor and Settings console: first-time setup, saved searches, AI evaluation, notifications, activity, and safe configuration editing. This describes the console introduced in commit 4fd86b8.

Pictures use sample data. Searches, credentials, and activity shown here are demonstrations, not live Facebook results or proof of successful delivery. The narrow-window example shows how the list stacks above the selected page. Normal startup uses port **8467**; the screenshot preview used another port.

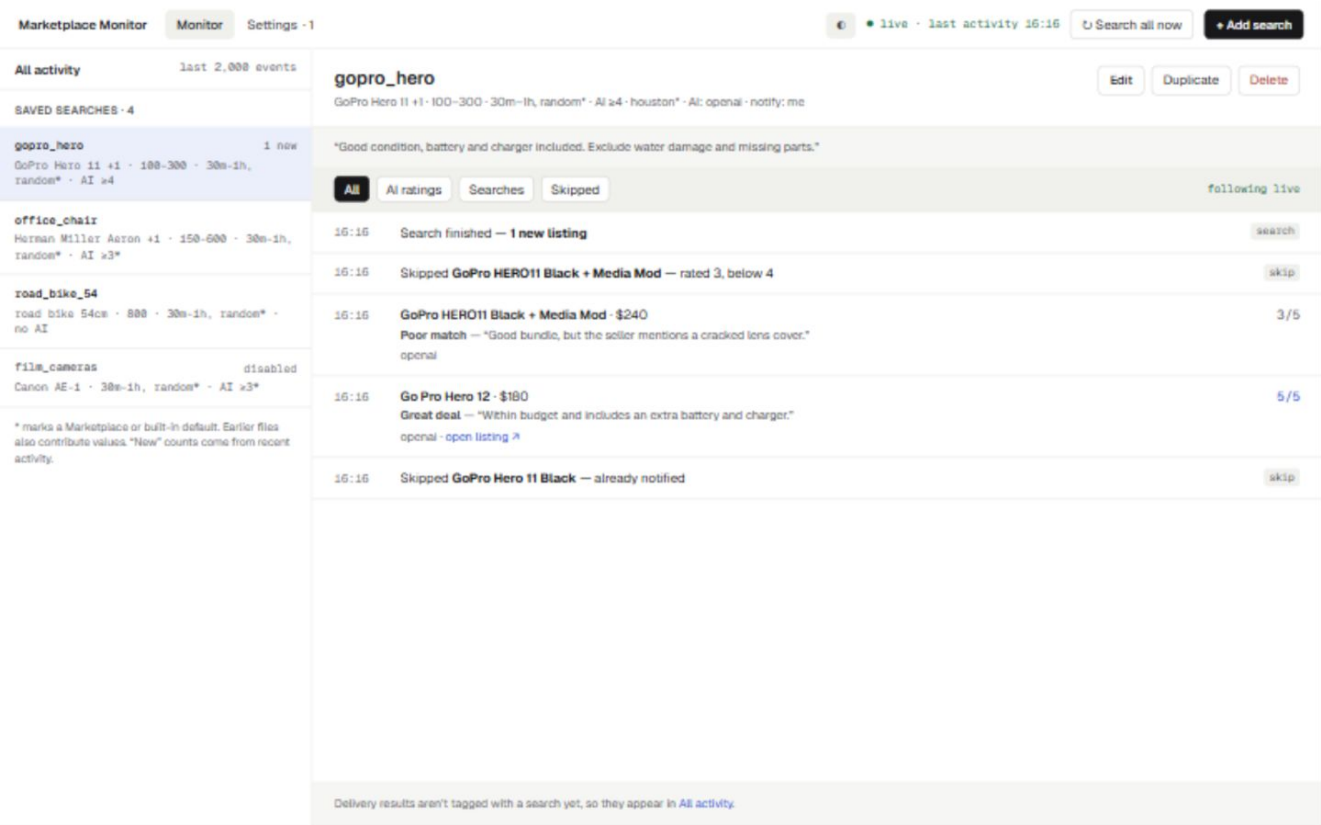


Figure 1. Select a saved search on the left to see its description and activity on the right. Monitor and Settings are the two main workspaces.

Contents

Click a chapter or use the PDF bookmarks to jump directly to it.

1. Start the dashboard	3
2. Complete initial setup	4
3. Find your way around	5
4. Create a saved search	6
5. Set prices and locations	7
6. Understand defaults and overrides	8
7. Tune AI and advanced filters	9
8. Schedule and run searches	11
9. Duplicate, rename, disable, and delete	12
10. Read activity and export CSV	13
11. Manage marketplace accounts	15
12. Configure AI providers	16
13. Set up notification users	17
14. Use shared notification settings	19
15. Configure proxies, regions, and languages	20
16. Edit TOML and keep secrets safe	22
17. Save and recover from conflicts	23
18. Use themes and keyboard controls	25
19. Access the dashboard remotely	26
20. Troubleshoot and establish a routine	27

1. Start the dashboard

The monitor must already be installed. See installation and quick start for installation steps.

1. Open a terminal in the environment where the monitor is installed.
2. Run the command below and leave the process running.
3. Open the URL printed in its startup banner.

```
ai-marketplace-monitor
```

The default address is `http://127.0.0.1:8467`. The web interface runs inside the monitor process. Closing its terminal or stopping the process stops the dashboard; opening the browser does not start the monitor.

From this repository's existing Windows virtual environment, you can also use:

```
.\.venv\Scripts\ai-marketplace-monitor.exe
```

If the default port is occupied, choose another one:

```
ai-marketplace-monitor --webui-port 9090
```

Then open `http://127.0.0.1:9090`. To run without the dashboard, add `--no-webui`. Local loopback access normally opens without a dashboard sign-in. Facebook may still need a separate login, two-factor code, or CAPTCHA in the monitor's browser.

2. Complete initial setup

A new installation creates a starter configuration. The checklist can appear when the only search is the untouched example search. Use this order even if your configuration already contains other searches:

1. Open **Settings** > **Marketplace**. Set the Facebook login and a search city.
2. Open **Monitor**. Edit the example search or choose **+ Add search**.
3. Open **Settings** > **Notifications**. Give user me a usable channel.
4. Optionally open **Settings** > **AI providers** and add a provider.
5. Save each form, return to Monitor, and inspect actual activity.

Keep at least one marketplace, saved search, and user. A user without a channel can exist but cannot deliver an alert. The Settings badge counts setup issues, including users with no usable channel or missing login information. Dismissing the checklist hides it for the current browser session; it does not configure anything.

Check the complete flow when connecting real services. A saved search proves that configuration exists. Activity proves that events reached the dashboard. Verify AI-provider behavior and actual notification receipt separately.

3. Find your way around

Area	What you do there
Monitor	Select searches and read their descriptions, ratings, skips, and summaries.
All activity	Read events across searches, login/browser events, errors, and delivery results.
Marketplace	Manage Facebook accounts and defaults shared by searches.
AI providers	Set provider, model, key, endpoint, timeout, and retries.
Notifications	Manage individual users and shared delivery settings.
Proxy, regions, languages	Set network options and manage reusable locations and language definitions.
config.toml	Edit the last loaded file directly and see contributing source files.

On desktop, the list and selected page scroll independently. In narrow windows, the list sits above the page; scroll down to reach its content. The URL identifies the view and activity filters, allowing a normal reload to return to that view. Save drafts before closing or reloading.

The **live** indicator describes the activity connection. It does not certify that Facebook is signed in, an AI key works, or a message arrived. Read global notices, activity, and the terminal for those details.

4. Create a saved search

This worked example looks for a used GoPro, with a maximum price of 300, and alerts user me about complete working kits.

1. Choose **+ Add search**.
2. Name it gopro_hero. New names use letters, numbers, and underscores.
3. Keep **Status** enabled.
4. Add GoPro Hero 11 and press Enter. Add GoPro Hero 12 as another chip if wanted.
5. Enter a concrete description: Good condition, battery and charger included. Exclude water damage and missing parts.
6. Set price, location, rating, schedule, and recipients in the following sections.
7. Select **Save search** and read the result message.

The screenshot shows the 'Edit' interface for a saved search named 'gopro_hero'. The interface is divided into two main sections: a left sidebar and a main content area.

Left Sidebar:

- Marketplace Monitor** (selected), Monitor, Settings - 1
- All activity** (last 2,000 events)
- SAVED SEARCHES - 4**
 - gopro_hero** (editing): GoPro Hero 11 +1 · 100-300 · 30m-1h, random* · AI ≥4
 - office_chair**: Herman Miller Aeron +1 · 150-600 · 30m-1h, random* · AI ≥3*
 - road_bike_54**: road bike 54cm · 800 · 30m-1h, random* · no AI
 - film_cameras** (disabled): Canon AE-1 · 30m-1h, random* · AI ≥3*
- * marks a Marketplace or built-in default. Earlier files also contribute values. "New" counts come from recent activity.

Main Content Area (Edit · gopro_hero):

- WHAT TO LOOK FOR**
 - Name:** gopro_hero (Saved as [Item.gopro_hero]. Letters, numbers and underscores for new names.)
 - Status:** Enabled (Disabled sections stay in config.toml.)
 - Search phrases:** GoPro Hero 11 × GoPro Hero 12 × Add a value, press Enter (Comma-separated. e.g. 'gopro hero 11, gopro hero 12')
 - Description (helps AI):** Good condition, battery and charger included. Exclude water damage and missing parts. (Free-text description of what you want. The AI uses this to evaluate listings.)
- PRICE AND LOCATION**
 - Min price:** Custom (100) (e.g. '50' or '50 USD')
 - Max price:** Custom

At the bottom, it says 'No unsaved changes' and has 'Cancel' and 'Save search' buttons.

Figure 2. Phrases drive queries; the description tells the AI what makes a good match.

Use a phrase a seller is likely to write. Put detailed requirements in Description or advanced filters rather than making every query a long wish list. Press Enter to create one chip per phrase, and use its x button to remove it. Moving away from an unfinished chip input can also add the text; Enter makes the intended list explicit.

Saving validates the configuration. The monitor reloads it at its next safe point and may restart searches. A successful save is not a promise of immediate results or delivered alerts.

5. Set prices and locations

For the example, choose **Custom** beside Min price and Max price, then enter 100 and 300. Keep a bound at **Use default** to inherit it. A default of none means no configured bound on that side. Supported money strings such as 300 USD are also accepted.

Under **Where**, choose one location strategy:

Choice	Effect
Use default	Inherit the marketplace or contributing configuration location.
Cities	Set city codes or numeric IDs, with optional per-city radius and currency.
Region	Select built-in or custom regions that expand into city searches.

Marketplace Monitor

Monitor

Settings · 1

live · last activity 17:53

Search all now

+ Add search

All activity

last 2,000 events

SAVED SEARCHES · 4

gopro_hero

editing

GoPro Hero 11 +1 · 100-300 · 30m-1h, random* · AI ≥4

office_chair

Herman Miller Aeron +1 · 150-600 · 30m-1h, random* · AI ≥3*

road_bike_54

road bike 54cm · 800 · 30m-1h, random* · no AI

film_cameras

disabled

Canon AE-1 · 30m-1h, random* · AI ≥3*

* marks a Marketplace or built-in default. Earlier files also contribute values. "New" counts come from recent activity.

PRICE AND LOCATION

Min price

Custom

100

e.g. '50' or '50 USD'

Max price

Custom

300

e.g. '300' or '300 USD'

Where

☐ Use default — houston

☒ Cities — each with its own radius and currency

☐ Region — one or more built-in or custom regions

City

houston

+ Add city

Use the city name or numeric ID from its Facebook Marketplace URL. Leave all radiuses or currencies blank to use the default.

Radius (km)

Currency

USD

×

AI RATING

AI backends

Use default — openai

Unsaved changes

Cancel

Save search

Figure 3. Cities supports one row per location and overrides the shared location.

Use the city code or numeric ID from its Facebook Marketplace URL. Choose **+ Add city** for another row. Radius is in kilometres. Fill every row's radius when you set radiuses explicitly, or leave all blank to use defaults. Follow the same rule for per-city currencies.

Regions replace cities. A large region can require many searches, so review its definition before selecting it. For a reusable small city set, create a custom region as described in section 15.

6. Understand defaults and overrides

Use default removes the local override and uses the displayed inherited value. **Custom** enables the field and records an explicit value. For ordinary search fields, the order is item, marketplace, then built-in defaults. Summary asterisks identify values the search does not define itself.

For example, a marketplace city of houston applies to searches using its default. A search explicitly set to austin keeps that override when the marketplace city changes. Common built-in values include rating 3 and a random interval between 30 and 60 minutes, unless your configuration supplies other defaults.

Only the last loaded config file is editable in the dashboard. Earlier files still contribute values. Lists combine across files: removing a local chip does not remove an inherited entry. Edit the earlier source to remove that entry.

Empty lists have different meanings:

Field	An explicit empty list means
ai = []	Use no AI backend for this search.
notify_with = []	Apply no shared notification sections to this user.
notify = []	Falls back to users; it does not mean notify nobody. The guided form rejects this ambiguous choice.

Disable a search to stop it. Select intended users explicitly to change who receives alerts. Do not assume every empty field disables the associated behavior.

7. Tune AI and advanced filters

AI and notification minimums

Choose Custom for AI backends to select specific providers, or inherit the default selection. Set AI rating threshold to the minimum match score you want. The control labels 4 as a good match and 5 as a great deal; Description supplies your criteria.

The screenshot shows the 'Settings' tab of the Marketplace Monitor application. The interface is divided into several sections:

- Top Bar:** Includes 'Marketplace Monitor', 'Monitor', and 'Settings - 1' tabs. A status bar shows 'live' and 'last activity 17:53'. There are buttons for 'Search all now' and '+ Add search'.
- Left Sidebar:** Contains 'All activity' (last 2,000 events) and 'SAVED SEARCHES - 4'. The saved searches list includes:
 - gopro_hero** (editing): GoPro Hero 11 +1 · 100-300 · 30m-1h, random* · AI ≥4
 - office_chair**: Herman Miller Aeron +1 · 150-600 · 30m-1h, random* · AI ≥3*
 - road_bike_54**: road bike 54cm · 800 · 30m-1h, random* · no AI
 - film_cameras** (disabled): Canon AE-1 · 30m-1h, random* · AI ≥3*
- Main Content Area:**
 - AI RATING:**
 - AI backends:** A dropdown menu set to 'Use default — openai'.
 - AI rating threshold:** A dropdown menu set to 'Custom'.
 - Below the dropdowns are two rows of buttons (1, 2, 3, 4, 5). The first row is for '4 = Good match · 5 = Great deal'. The second row has a checkbox 'Use a different minimum for the first search' which is checked, and buttons 1, 2, 3, 4, 5. Below this is the text '1-5 (or initial,subsequent)'.
 - A note: 'Fit with your description. With no working AI, every listing that passes your filters meets the rating threshold.'
 - SCHEDULE AND NOTIFICATIONS:**
 - Search interval:** A dropdown menu set to 'Use default — 30m'.
 - A text input field containing '30m'.
 - A note: 'Duration, e.g. '30m', '1h'.'
 - Max search interval:** A dropdown menu set to 'Use default — 60m'.
- Bottom:** A yellow 'Unsaved changes' warning and two buttons: 'Cancel' and 'Save search'.

Figure 4. A different first-search minimum can treat the initial backlog more strictly.

For example, choose 5 for the first search and 4 for later searches. In TOML this is `rating = [5, 4]`: first value initially, last value thereafter. Reloading a search after configuration changes can begin another initial scan; review its activity.

Without a working AI evaluation, listings passing ordinary filters meet the rating threshold. Raising the threshold is not a substitute for a working provider. An AI-rating event also does not prove that a notification was delivered.

Advanced search options

Expand **Advanced options** for marketplace selection, category, condition, availability, date listed, delivery method, sellers, Boolean keywords, prompts, sort order, and city display names. The disclosure counts customized fields in the editable section.

The screenshot shows the 'Monitor' tab of the Marketplace Monitor interface. At the top, there are tabs for 'Marketplace Monitor', 'Monitor' (selected), and 'Settings - 1'. To the right, there's a status bar with 'live' and 'last activity 17:53', a 'Search all now' button, and an '+ Add search' button.

On the left, under 'All activity' (last 2,000 events), there's a 'SAVED SEARCHES - 4' section. It lists four searches: 'gopro_hero' (editing), 'office_chair', 'road_bike_54', and 'film_cameras' (disabled). Each search has a brief description and a status indicator.

On the right, the 'Advanced options - 2 customized' section is expanded. It contains several filter categories:

- Marketplace:** A dropdown menu set to 'Use default — facebook'.
- Category:** A dropdown menu set to 'Use default — none'.
- Condition:** A dropdown menu set to 'Use default — none'.
- Availability:** A dropdown menu set to 'Use default — all'.
- Date listed:** A dropdown menu set to 'Use default — 0'.

 Below these, there are checkboxes for 'New', 'Used — like new', 'Used — good', and 'Used — fair'. There are also checkboxes for 'Different for first search' under both 'Availability' and 'Date listed'.

At the bottom of the advanced options, there's a 'No unsaved changes' message and 'Cancel' and 'Save search' buttons.

Figure 5. Advanced fields retain default-versus-custom choices.

Availability, Date listed, and Delivery method can differ for first and later searches. For example, search any listing age initially and the last 24 hours later. Condition instead uses the selected condition set.

Examples for Keywords and Anti-keywords:

camera AND (Canon OR Nikon)

"for parts" OR broken

Use separate lines for multiple expressions. Inspect skips and errors if an expression behaves unexpectedly. Start with a clear Description before replacing or extending AI prompts.

8. Schedule and run searches

Search interval is the lower interval; Max search interval supplies the upper bound for random spacing. With 30m and 60m, runs are scheduled randomly between those bounds. Choose Custom before editing inherited values. Duration examples include 30m, 1h, and 1d.

The screenshot shows the 'Monitor' tab in the 'Marketplace Monitor' application. On the left, there's a sidebar with 'All activity' (last 2,000 events) and 'SAVED SEARCHES - 4'. The saved searches listed are: 'gopro_hero' (editing), 'office_chair', 'road_bike_54', and 'film_cameras' (disabled). The main panel shows the configuration for a search. At the top, there's a status bar with 'live' and 'last activity 17:53', and buttons for 'Search all now' and '+ Add search'. The 'AI rating threshold' is set to 'Custom' with a scale from 1 to 5 (4 = Good match, 5 = Great deal). A checkbox 'Use a different minimum for the first search' is checked. Below this, a note says 'Fit with your description. With no working AI, every listing that passes your filters meets the rating threshold.' The 'SCHEDULE AND NOTIFICATIONS' section includes: 'Search interval' set to 'Custom' with a text input '30m' and a note 'Duration, e.g. '30m', '1h'.'; 'Max search interval' set to 'Use default — 60m' with a text input '60m'; 'Start at' set to 'Use default — none' with a text input 'Add a value, press Enter' and a note 'Comma-separated time patterns.'; and 'Notify users' set to 'Custom'. At the bottom, there's a 'Cancel' button, a 'Save search' button, and a 'Unsaved changes' indicator.

Figure 6. Keep shared schedule defaults or customize intervals and recipients.

Use **Start at** for fixed times instead of interval scheduling. Add each time as a separate chip, such as 09:00 and 18:00 for daily runs. Supported repeating patterns include *:30 and *: *:15; daily times are easier to manage unless you specifically need these frequent patterns. The scheduler uses the host computer or container's clock.

The monitor performs an initial search when starting or reloading, then follows the schedule. Fixed times do not suppress that initial scan. Multiple fixed times schedule multiple later runs for the same search.

Search all now requests all enabled searches after the current scan reaches a safe point. It does not interrupt that scan. Repeated clicks are unnecessary while the request is pending. This console has no per-search Run now or next-run countdown; check activity or terminal output for the scheduler's next-job details.

9. Duplicate, rename, disable, and delete

- **Duplicate:** select a search, choose Duplicate, review the `_copy` name and inherited settings, adjust the draft, and save. Cancel returns to the original.
- **Rename:** edit Name and save. Guided renames update supported references in the editable file and preserve hidden secrets. A section also defined in an earlier file must be renamed in that source file.
- **Disable:** set Status to Disabled and save. The section remains in the file for later reuse. This is different from pausing the displayed activity.
- **Delete:** read the confirmation and remove the section only when intended. Recorded activity stays, but there is no trash or saved-deletion undo history. Keep a private configuration backup when you may need to restore a section.

The interface prevents deleting the last marketplace, search, or user. Inherited sections cannot be removed from their source through the editable file: disable them here or edit the contributing file. Use raw TOML for names or structures outside the guided rename's supported format.

10. Read activity and export CSV

Event	Meaning
AI rating	A match score, assessment, and provider; a listing link when available.
Search finished	New listings reported by the search, not messages delivered.
Skipped	A reason such as already notified or below threshold.
Login/browser	Credentials found, waiting for credentials, or a browser launched.
Error	Failure details and, when available, a link to relevant settings.

Choose **All activity** for events across searches and delivery results that lack a search identifier. A selected search shows its tagged events; use All activity when a delivery event is absent from that view.

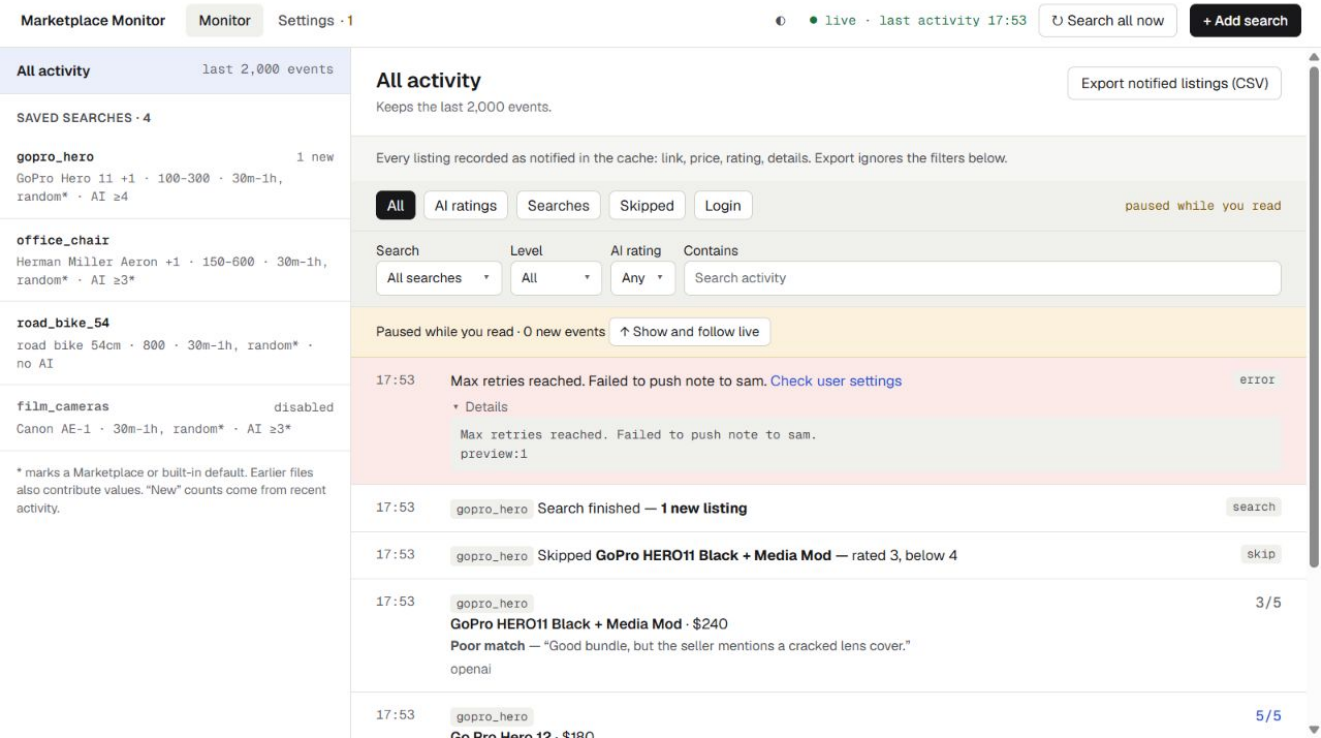


Figure 7. Expanding Details pauses display updates while the monitor keeps working.

Use type buttons and the Search, Level, AI rating, and Contains filters in All activity. Filters combine, so an Error filter plus an AI-rating filter may show no events. Contains searches message text. The filter URL survives normal reloads.

Scrolling away from the top or expanding Details pauses the displayed feed. Incoming events continue; the paused bar counts them. Choose **Show and follow live** to resume and return to the newest events. Filters and display pause do not stop searches.

Recent activity is buffered in memory, normally 2,000 events. New events evict old ones, and restarting the process begins a new stream. Reconnection reloads available buffered records. This is not a persistent results-history browser.

Export notified listings

1. Open **All activity**.
2. Choose **Export notified listings (CSV)** and wait for the download.
3. Find the file in your browser's downloads and open it in a spreadsheet app.
4. Filter `item` for a saved search or `notified_user` for a recipient.
5. Compare the price, rating, and comment; use `url` to open a listing.

The download reads the full cached notification history, independent of filters and the activity buffer. Setting an activity filter before export does not narrow the file. Export reads existing records; it does not start a new search.

CSV fields	How to read them
<code>found_at, item, marketplace</code>	The cached notification timestamp, saved search name when available, and marketplace.
<code>title, price, url</code>	Available listing details and a link back to the listing.
<code>rating, ai_comment</code>	The cached AI score and assessment, when available.
<code>location, seller, condition</code>	Additional cached listing details.
<code>notified_user</code>	The recipient associated with that cached notification record.

Rows are ordered newest first. The same listing can appear for different users. Blank cells mean the related details or rating are unavailable in the cache; a blank rating does not mean zero. These are cached observations, so confirm current price and availability on the marketplace before acting on an old export.

If no notified listings are cached, the UI reports nothing to export. A cached row is not independent proof that a recipient received a message. Verify delivery in activity and with the recipient.

11. Manage marketplace accounts

Open **Settings** > **Marketplace**, choose an account, and edit it. For an additional account use **+ Add marketplace** with a distinct name. A search's advanced Marketplace field selects its account; otherwise the first marketplace is the default.

The screenshot shows the 'Marketplace Monitor' interface. At the top, there are tabs for 'Marketplace Monitor', 'Monitor', and 'Settings - 1'. The 'Settings' tab is active. On the left, a sidebar lists various settings categories: 'Marketplace' (selected), 'AI providers', 'Notifications', 'Proxy, regions, languages', and 'config.toml'. The main content area is titled 'Marketplace' and shows a list of accounts. The first account, 'facebook', is selected and its configuration is displayed. The configuration includes fields for 'Name' (set to 'facebook'), 'Status' (set to 'Enabled'), 'Facebook username (email)' (set to 'Saved (hidden)'), 'Facebook password' (set to 'Saved (hidden)'), 'Login wait time (seconds)' (set to 60), and 'Language'. There are 'Replace' buttons next to the username and password fields. At the bottom, there are 'Cancel' and 'Save' buttons. A status message at the bottom left says 'No unsaved changes'.

Figure 8. Login fields stay hidden; shared search defaults appear below them.

Choose Replace to enter a login value or environment reference. Leave its input empty or choose Keep current to retain the existing value. Login wait time gives you time to finish Facebook login prompts.

The next section holds shared locations, intervals, AI, ratings, and recipients. Expand More defaults for additional shared search fields. Set common values here and use per-search overrides for exceptions.

Remote dashboard authentication uses credentials captured at process startup. After changing them, restart the monitor before expecting the new values to work for dashboard sign-in.

12. Configure AI providers

1. Open **Settings** > **AI providers** > **+ Add provider**.
2. Name the section and choose the provider.
3. Enter a model where needed, or leave it blank for a supported provider default.
4. Use Replace for a key or environment reference.
5. Review Connection options, save, and select the provider in a search.
6. Verify actual evaluation activity when using real services.

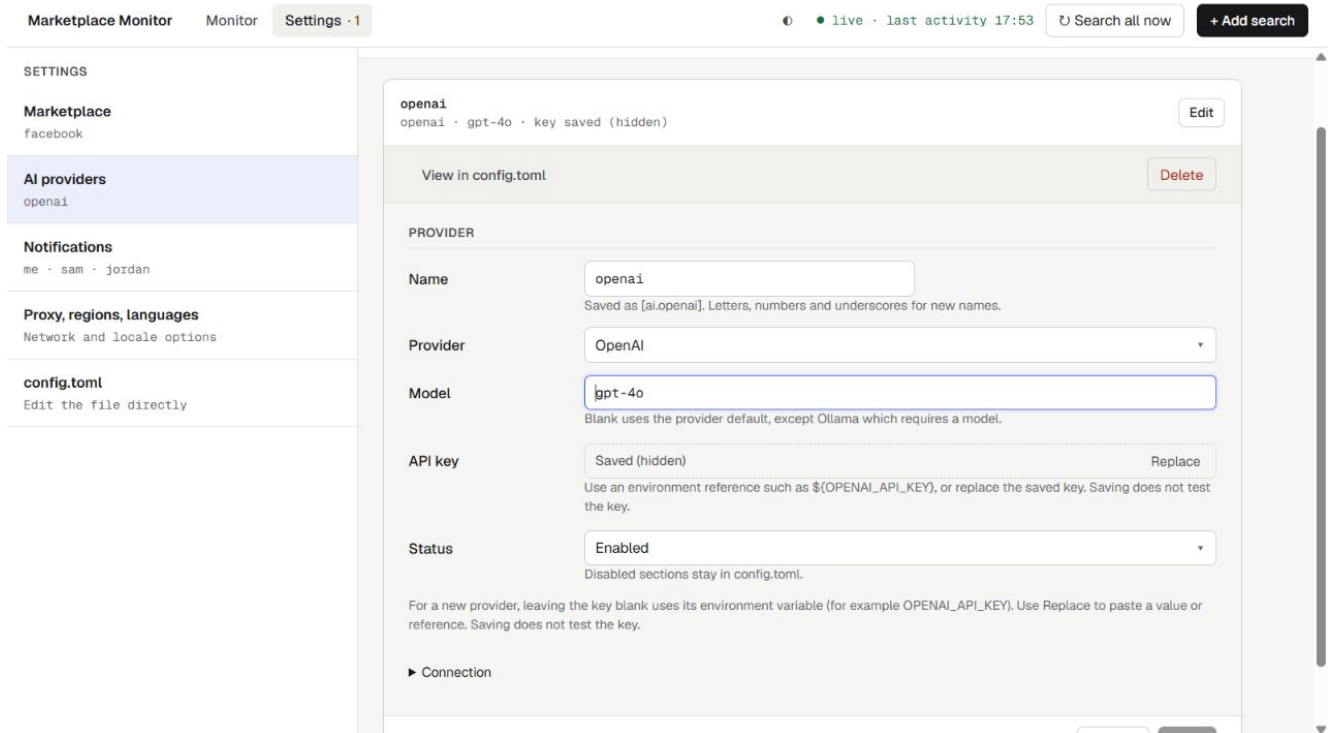


Figure 9. Saving validates configuration, not AI-provider connectivity.

The selector offers OpenAI, Anthropic, DeepSeek, Gemini, and Ollama. A new non-Ollama provider with no pasted key uses an explicit environment reference such as `${OPENAI_API_KEY}`. Set it in the monitor process's environment before startup. A not-set label means the variable is unavailable to that process; the browser cannot set the server's environment.

PowerShell example with a placeholder:

```
$env:OPENAI_API_KEY = 'replace-with-your-key'
ai-marketplace-monitor
```

Ollama needs a model and reachable endpoint, for example `http://localhost:11434/v1`. Inside a container, localhost refers to that container. Connection fields include Base URL, Timeout, and Max retries. The UI does not download models or start an external AI service. Disable a provider to retain its configuration while excluding it from the default enabled-provider selection.

13. Set up notification users

A user is a named recipient, not a separate dashboard login account. Searches refer to these names in Notify users.

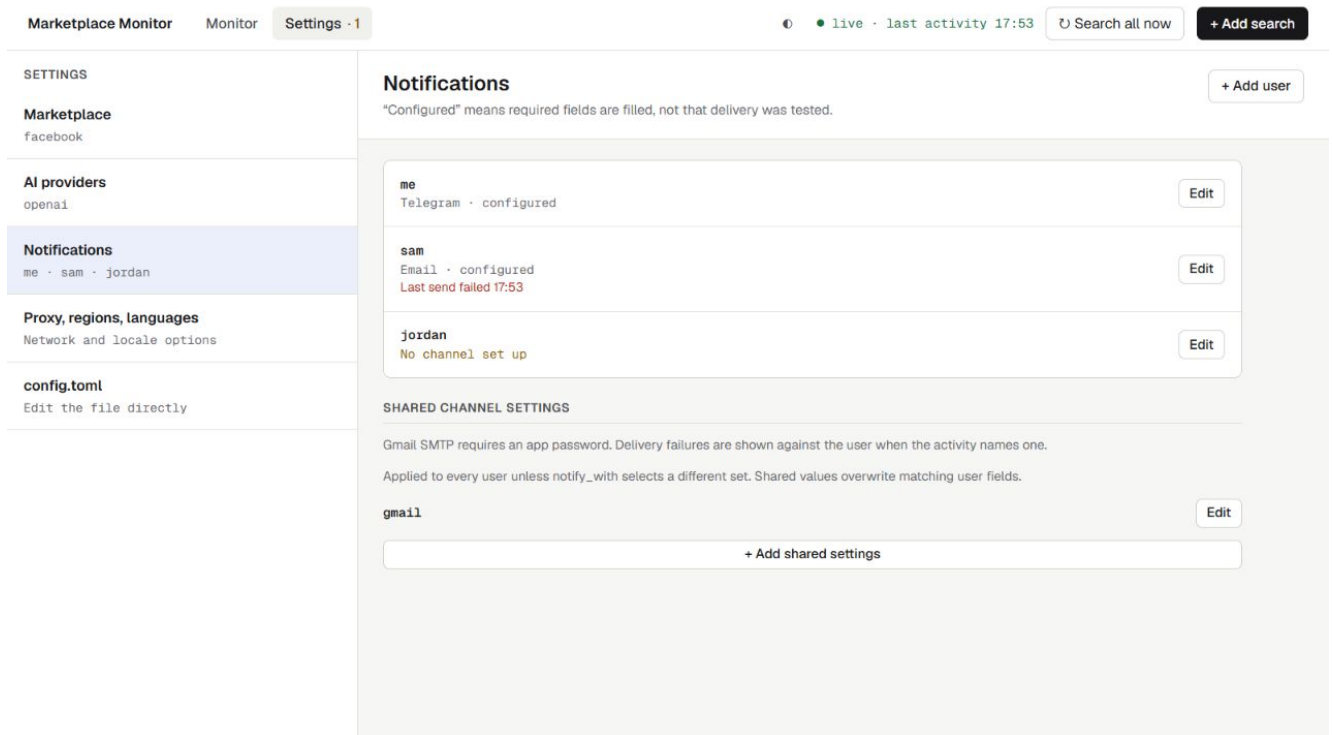


Figure 10. Configured means required fields exist; recent send failures can be shown.

1. Open **Settings > Notifications** and edit a user or choose **+ Add user**.
2. Select channels to reveal their fields.
3. Supply required values directly or through shared settings, then save.
4. Select that user in the searches that should send alerts.

Channel	Main fields
Telegram	Bot token and chat ID.
Email	Recipient address(es) and SMTP credentials/settings.
Pushbullet	Token.
Pushover	User key and API token.
ntfy	Server URL and topic.

Marketplace Monitor Monitor Settings - 1

live · last activity 17:53 Search all now + Add search

SETTINGS

Marketplace
facebook

AI providers
openai

Notifications
me · sam · jordan

Proxy, regions, languages
Network and locale options

config.toml
Edit the file directly

Notifications

*"Configured" means required fields are filled, not that delivery was tested.

+ Add user

me
Telegram · configured Edit

View in config.toml Delete

Name
Saved as [user.me]. Letters, numbers and underscores for new names.

Channels ☒ Telegram ☐ Email ☐ Pushbullet ☐ Pushover ☐ ntfy

TELEGRAM

Telegram bot token Replace
Format: 123456789:ABCdef...

Telegram chat ID
Numeric ID or @username.

SCHEDULE AND SHARED SETTINGS

Remind interval
Resend after this interval, e.g. '1d', '6h'. Default: one-time.

Figure 11. Choose channels without revealing saved credentials.

Obtain credentials through each service's own setup process. Save does not create accounts or bots, nor test delivery. Email options include SMTP server, port, username, password, and From address. The UI notes that Gmail SMTP needs an app password.

Remind interval controls repeat notifications for previously notified listings; it is separate from the search interval. More options include format, description length, retries, delay, and rate limits. Inherited channels may need edits in their source file before removal. Check actual activity and the recipient to verify delivery.

14. Use shared notification settings

Shared sections reuse delivery settings across users, such as one SMTP account with a different recipient email on each user.

- 1. Choose + **Add shared settings** under Shared channel settings.
- 2. Name it, for example `shared_email`, select its channel, and fill the fields.
- 3. Save and review which users inherit it.

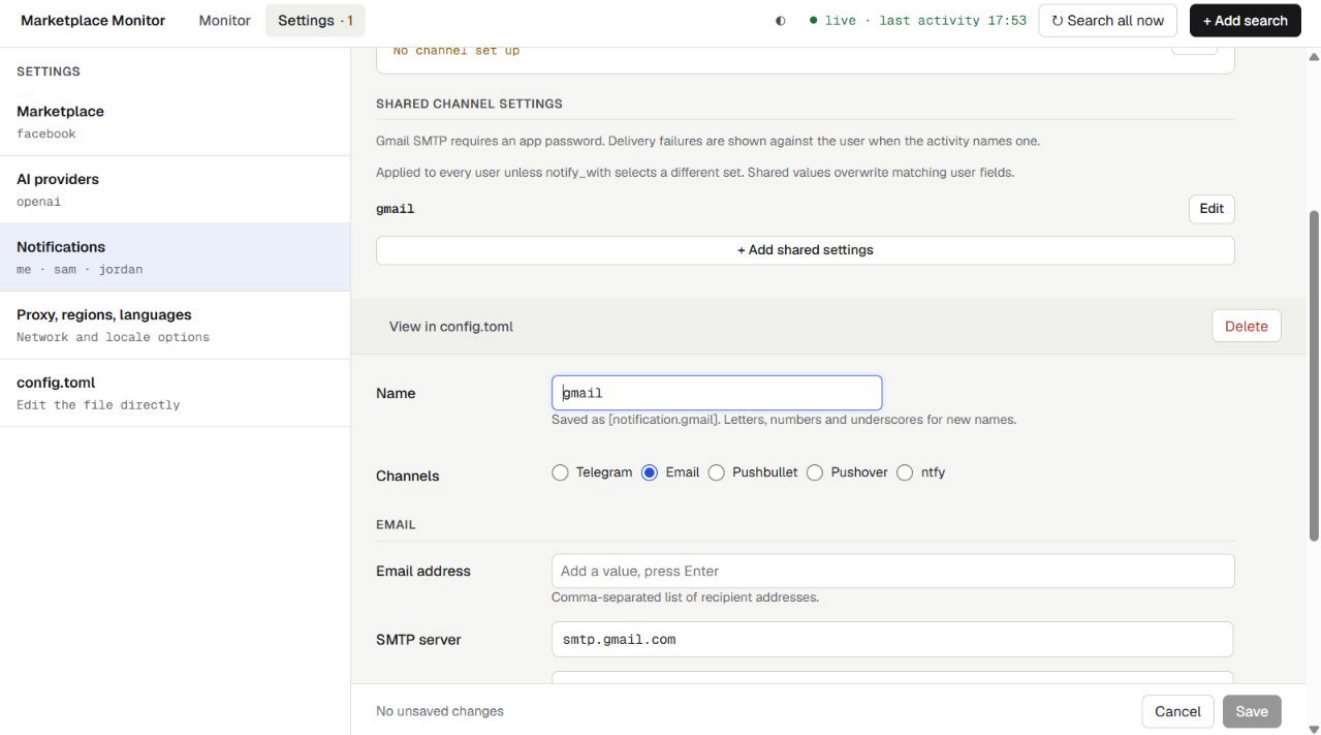


Figure 12. Shared values overwrite matching user fields, including shared defaults.

Shared sections apply in configured order. Their non-null fields and normalized defaults overwrite user fields; they are not just fallbacks for blanks.

User's notify_with	Shared settings applied
Absent	All enabled shared sections in configured order.
Named list	The selected enabled sections in list order.
Explicit empty list	None.

For example, give `sam` a recipient email and put the server/password in `shared_email`. Avoid a recipient address in the shared section unless you intend it to overwrite every affected user's recipient address.

Choose **Use SMTP on this user only** to exclude shared email settings for one user, then fill that user's SMTP fields. Earlier-file `notify_with` entries must still be changed at their source if they prevent exclusion.

15. Configure proxies, regions, and languages

Proxies

Open **Settings > Proxy, regions, languages**. Add proxy URLs one at a time and press Enter. Set Bypass and credentials if your network needs them. Saving does not test proxy connectivity. Leave proxy settings alone if your network needs none.

The screenshot shows the 'Proxy, regions, languages' settings page. The left sidebar has a 'SETTINGS' section with 'Marketplace' (facebook), 'AI providers' (openai), 'Notifications' (me, sam, jordan), 'Proxy, regions, languages' (Network and locale options), and 'config.toml' (Edit the file directly). The main content area is titled 'Proxy, regions, languages' with the subtitle 'Network and locale options'. It contains the following sections:

- Proxy servers:** A text input field with the placeholder 'Add a value, press Enter' and a note 'One or more http:// or https:// URLs.'
- Bypass:** A text input field.
- Proxy username:** A text input field with 'No value set' and a 'Replace' button.
- Proxy password:** A text input field with 'No value set' and a 'Replace' button.
- REGIONS:** A section with the text 'Built in: usa · usa_full · can · mex · bra · arg · aus · aus_miles · nzl · ind · gbr · fra · spa. Each expands to cities with radius and currency.' and a '+ Add custom region' button.
- LANGUAGES:** A section with the text 'A locale and dictionary are needed for non-English Facebook. 3 language definitions loaded.' and an 'Edit languages in config.toml' button.

At the bottom, there is a 'No unsaved changes' message and 'Cancel' and 'Save' buttons.

Figure 13. Network options, reusable locations, and language definitions share this area.

Custom regions

1. Choose **+ Add custom region** and name it `texas_cameras`.
2. Enter a Full name and add `houston` and `austin` as city chips.
3. Optionally add matching display names and radiuses.
4. Add one currency, `USD`, when it applies to every city.
5. Save and select the region in a search's location controls.

Marketplace Monitor Monitor Settings - 1

live · last activity 17:53 Search all now + Add search

SETTINGS

Marketplace
facebook

AI providers
openai

Notifications
me · sam · jordan

Proxy, regions, languages
Network and locale options

config.toml
Edit the file directly

Edit · my_region

Name
my_region
Saved as [region.my_region]. Letters, numbers and underscores for new names.

Full name
Texas camera search

Cities
houston × austin × Add a value, press Enter

City names
Add a value, press Enter

Radius per city (km)
Add a value, press Enter
One radius per city, or one value for every city. Default: 500 km.

Currency per city
USD × Add a value, press Enter
For example USD, CAD. One value applies to every city.

Status
Enabled
Disabled sections stay in config.toml.

Unsaved changes Cancel Save

Figure 14. One currency applies to all cities; multiple values must align with the city list.

Equivalent TOML:

```
[region.texas_cameras]
full_name = "Texas camera search"
search_city = ["houston", "austin"]
radius = 50
currency = "USD"
```

A single region radius applies to every city. The region default is 500 km when none is supplied, so set an explicit narrower radius when appropriate. Multiple per-city values must match the city list.

Languages

Choose **Edit languages in config.toml** for translation definitions and custom language options. Marketplace Language must match the relevant [translation.*] definition. Entering an arbitrary language name does not automatically translate Facebook's interface.

16. Edit TOML and keep secrets safe

Open **Settings** > **config.toml** for options or structures beyond guided forms. Its header lists contributing sources and marks the last loaded file as editable.

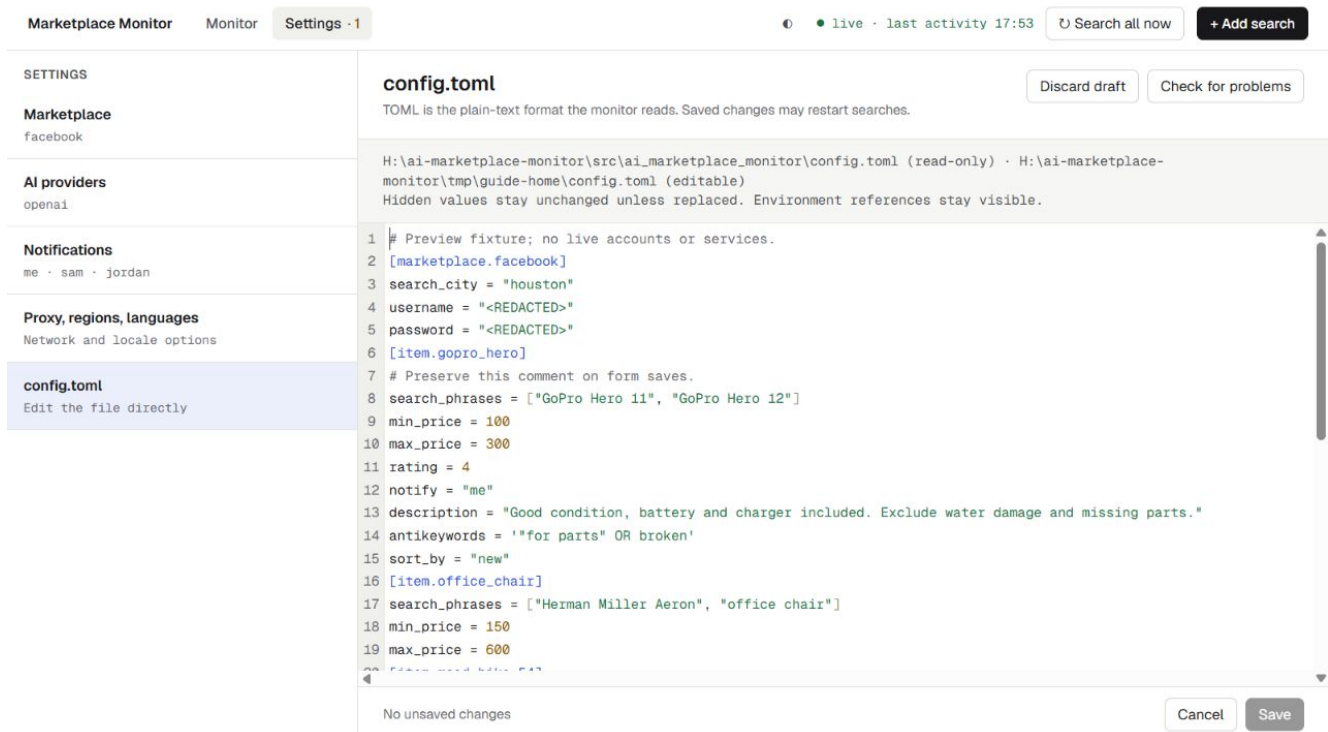


Figure 15. Masks retain corresponding saved values when the file is written.

Text uses quotes; numbers normally do not. Lists use brackets and booleans are true or false. A line beginning with # is a comment. For example:

```
[item.camera]
search_phrases = ["Canon camera", "Nikon camera"]
max_price = 300
enabled = true
ai = []
```

Guided edits preserve comments and unknown fields. Choose **Check for problems** to validate against all loaded files. Raw edits also trigger validation after a short delay. Syntax errors may highlight a line and disable Save. Ctrl+S (Command+S on macOS) saves from the editor. Discard draft confirms before replacing edits.

Saved (hidden) means a value exists without revealing it. Environment references remain visible, but their resolved secret values are not returned to the browser. Replace accepts a new value or reference; an empty replacement or Keep current retains the current value.

Raw <REDACTED> masks correspond to specific saved sections and fields. Do not invent a mask for a new secret or copy a masked section and assume its credentials move with it. Use a guided rename or explicitly replace the secret.

Scalar secret assignments support quoted keys and multiline strings. Secrets inside arrays or inline tables can prevent the editor from opening; move them to supported scalar assignments in the source file. UI masking does not encrypt the underlying TOML. Keep original files and configuration backups private.

17. Save and recover from conflicts

Save validates before writing. On validation failure, your draft remains available: read the message, correct the problem, and retry. A successful save is atomic, but application at the monitor's next safe point may restart searches.

Wait for Saving to finish before another edit, deletion, or navigation. Cancel and navigation ask before discarding dirty drafts. Session expiry keeps the current tab's draft while you sign in again; save before closing or reloading.

Another editor or tab may change the file while your draft is open. The conflict warning offers Compare, Reload and re-apply, and Overwrite.

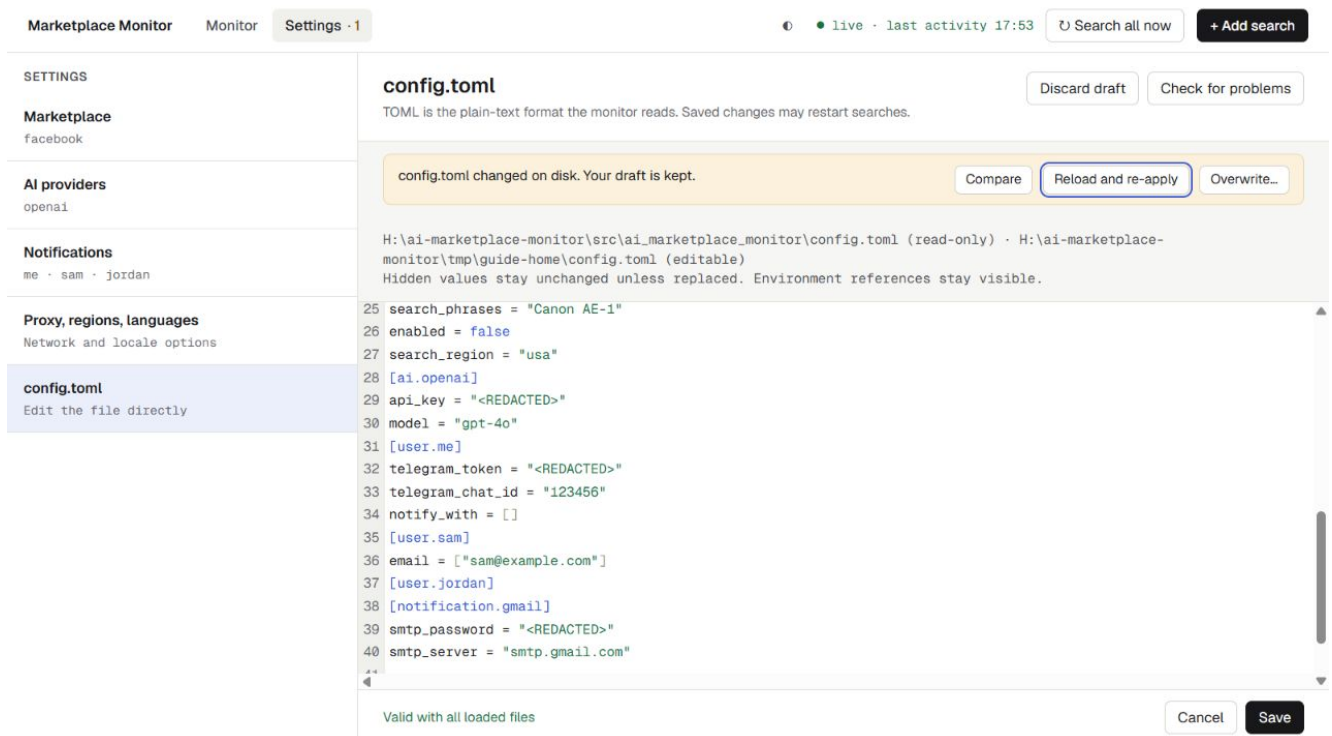


Figure 16. The draft is kept when a newer file is detected.

1. Choose **Compare** and review the masked draft and current file.
2. For a form, choose **Reload and re-apply** to retain your field edits on the current file; review and save again.
3. For raw TOML, reload asks to replace the draft. Copy necessary edits into a safe local note before accepting **Load file**.
4. Choose **Overwrite** only when you deliberately want your draft to replace changes made since you opened it. Read the confirmation.

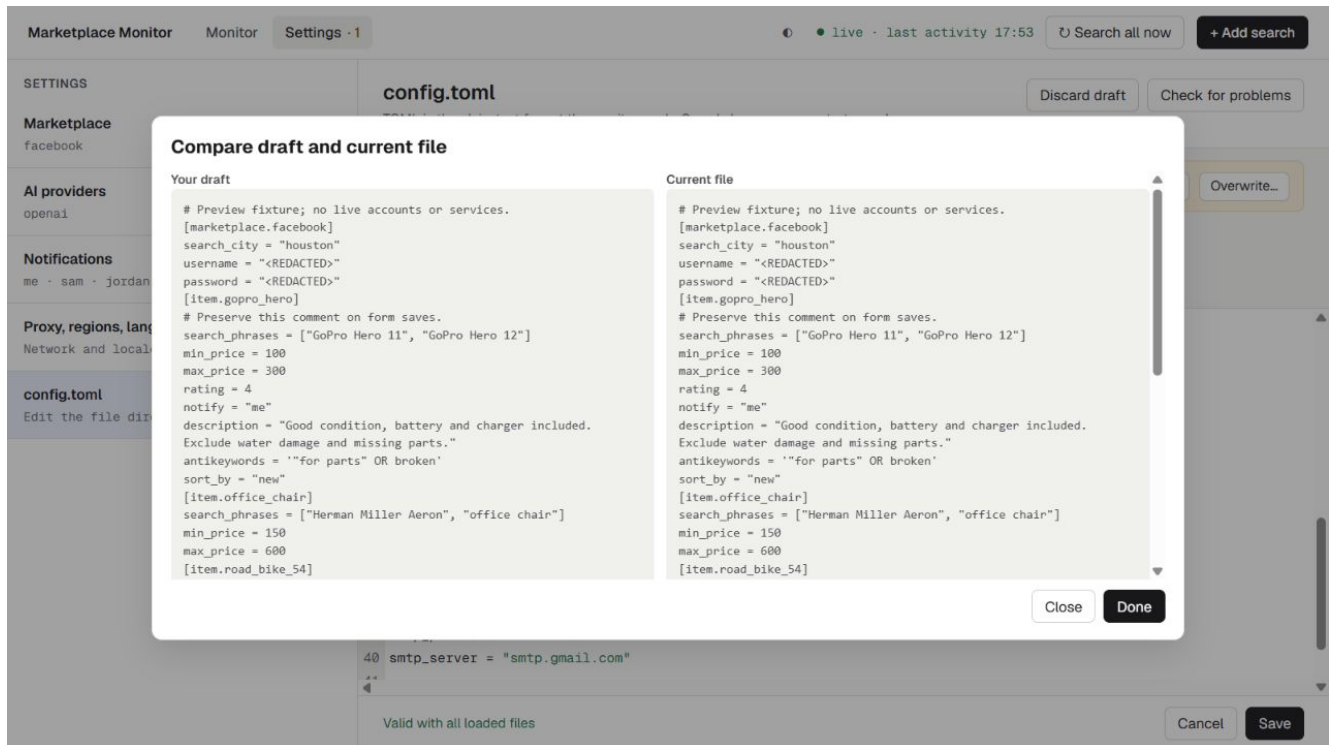


Figure 17. Line differences help review changes; Overwrite is separately confirmed.

Repeated Save clicks do not resolve a conflict. Decide which edits must survive, reconcile them, and save the reviewed result.

18. Use themes and keyboard controls

The header theme button cycles system, light, and dark. System follows your operating system. Your browser remembers the choice.

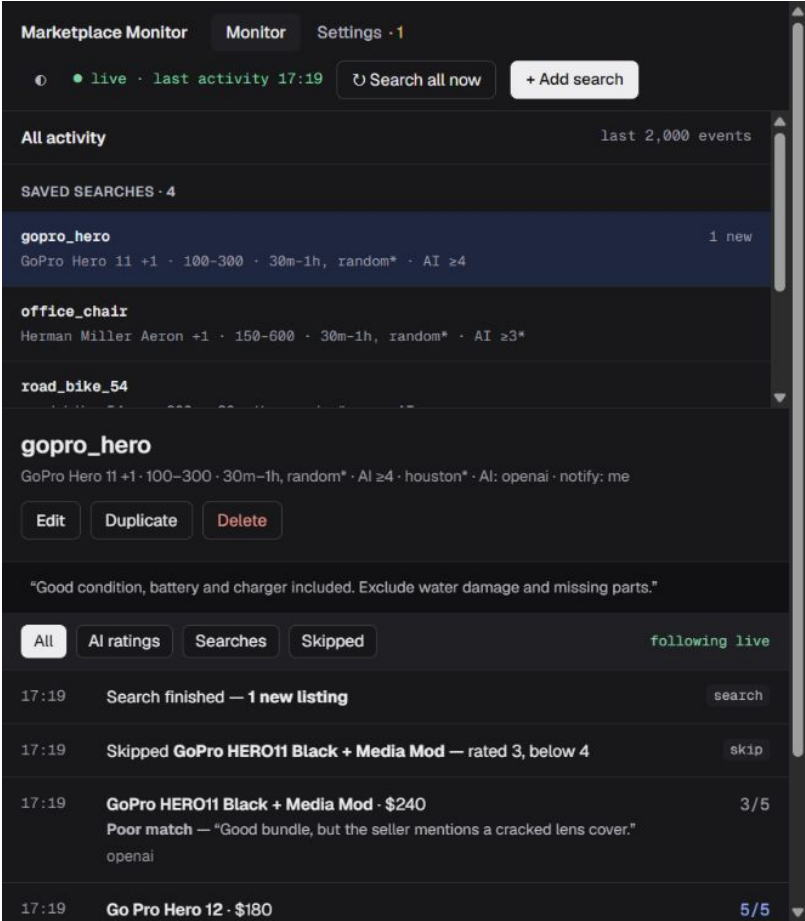


Figure 18. The list stacks above content in narrow windows.

Tab and Shift+Tab move between controls. Enter activates buttons and adds chips. Skip to content focuses the selected page. Confirmation dialogs start on the safe action; Escape cancels a normal confirmation and keeps the draft. The sign-in dialog remains open until authentication succeeds.

Activity announces short update summaries rather than reading every record. Pause while inspecting older messages. The interface supports keyboard and semantic accessibility; this guide does not claim external screen-reader certification.

19. Access the dashboard remotely

To access from another computer, configure marketplace credentials or both Facebook environment variables, then bind the server to a network interface. Use placeholders locally, replacing them before startup:

```
$env:FACEBOOK_USERNAME = 'you@example.com'
$env:FACEBOOK_PASSWORD = 'replace-with-your-password'
ai-marketplace-monitor --webui-host 0.0.0.0 --webui-port 8467
```

Open `http://YOUR-SERVER-IP:8467` from the other computer. The bind address `0.0.0.0` is not the browser's destination. Sign in with credentials captured at startup. Valid sessions survive normal refresh; after expiry sign in again in the current tab to keep its draft. Restart after changing dashboard login credentials.

Non-loopback exposure without credentials is refused unless an explicitly configured local-only deployment mode is used. If necessary, add an inbound port rule in Windows Defender Firewall with Advanced Security. Limit access to intended networks; use a properly configured TLS reverse proxy or VPN for untrusted networks. Plain HTTP does not encrypt sign-in or configuration changes in transit.

In supported Docker deployments, Browser appears only when VNC/noVNC is enabled and available. Use it for Facebook's own login prompts, or use the monitor's browser on its host. Local-only Docker mode assumes port publication is restricted to loopback; it is not a way to expose an unauthenticated dashboard remotely.

CLI option	Default	Purpose
<code>--webui / --no-webui</code>	Enabled	Start or disable the dashboard.
<code>--webui-host</code>	<code>127.0.0.1</code>	Bind address; non-loopback access needs authentication.
<code>--webui-port</code>	<code>8467</code>	HTTP port.
<code>--webui-log-retention</code>	<code>2000</code>	Events retained in memory.
<code>--config / -r</code>	Default user file	Load extra sources; edit only the last loaded file.

The standard user file is `~/.ai-marketplace-monitor/config.toml`, typically

`C:\Users\YOUR-NAME\.ai-marketplace-monitor\config.toml` on Windows. See the exact loaded and editable paths in Settings > config.toml.

20. Troubleshoot and establish a routine

Symptom	What to check
Site cannot be reached	The monitor process is running; use its printed address and port.
Waiting for Facebook credentials	Marketplace login or environment variables, then the actual host browser.
Facebook requests a code or CAPTCHA	Complete it in the host browser or available Browser view.
Reconnecting	Wait or use Retry if offered; check whether the monitor process stopped.
Activity seems stuck	Resume Show and follow live if the display is paused.
No matching events	Clear combined filters and check the selected search is enabled.
No channel set up	Supply required fields on the user or selected shared section.
Configured channel fails	Inspect All activity, Details, real service credentials, and shared overrides.
No AI evaluation or provider errors	Provider enabled, selected, reachable, and key available to the running process.
User field seems ignored	A shared section may overwrite it, including with defaults.
Removing a chip has no effect	An earlier source may still contribute a list entry.
Manual run is delayed	The current scan or Facebook login may still be in progress.
Save disabled	No changes, an in-progress save, or invalid raw TOML.
Save fails	Retain the draft, correct the validation message, and retry.
File changed on disk	Compare and reconcile with section 17.
Mask cannot be restored	Use a proper rename or replace the value; new sections cannot invent saved secrets.
Empty CSV	No notified listings in cache; AI ratings alone do not establish notified records.
New remote password does not work	Restart so authentication uses the new startup credentials.

Daily checklist

1. Confirm the process runs and the activity connection is live.
2. Check global notices for login, browser, or config issues.
3. Review phrases, budget, location, AI, and recipients in search summaries.
4. Inspect All activity for errors and delivery failures.
5. Tune one meaningful criterion at a time, save, and inspect the effect.
6. Resume live following after reading older activity.
7. Export a CSV when you need a cached notification snapshot.
8. Keep a private backup before substantial configuration changes.

Recent activity is buffered, not persistent history. There is no per-search execution button, next-run countdown, or built-in provider/delivery connection test. Save and Configured describe configuration state. Verify live services and actual receipt to establish operational success.

See the configuration guide, configuration reference, and troubleshooting for deeper application details.