

IP Filtering Configuration Guide

M10001800

Rev. A

When connecting products such as printers to a network, it is important to configure appropriate settings in a protected network environment to guard against external threats such as unauthorized access.

The IP filtering function is a fundamental and effective method for enhancing network security. By utilizing this feature, you can allow or deny access from specific IP addresses, making it possible to prevent unauthorized access and external attacks in advance.

This document explains how to configure IP filtering settings for each product. Use this document as a reference for security measures.

Note that the setup method varies depending on the product. Refer to the table below and configure the appropriate settings for your product.

Model Name	Setup Method
TM-H6000V	B
TM-H6000VI	A
TM-L100	B
TM-m10	C
TM-m30	C
TM-m30II	B
TM-m30II-H	B
TM-m30II-NT	B
TM-m30II-S	B
TM-m30II-SL	B
TM-m30III	A
TM-m30IIIC	A
TM-m30III-H	A
TM-m50	B
TM-m50II	A
TM-m50II-H	A
TM-P20II	A
TM-P80II	A
TM-P80II Auto Cutter Model	A
TM-T20III	C
TM-T20IIIL	C

Model Name	Setup Method
TM-T20IV	C
TM-T20IV-L	C
TM-T20IV-SP	C
TM-T20X	C
TM-T20X-II	C
TM-T81III	C
TM-T82III	C
TM-T82IIIL	C
TM-T82IV	C
TM-T82IV-L	C
TM-T82X	C
TM-T82X-II	C
TM-T83III	C
TM-T83IV	C
TM-T88VI	B
TM-T88VII	A
TM-T88VI-iHUB	B
TM-T100	C
UB-E04	C
UB-R04	C
UB-R05	C

NOTE

See the following website for more information about Epson security initiatives.
<https://support.epson.net/security/en/index.html>

Setup Method A

Use Web Config to configure IP filtering.

This section explains how to configure IP filtering, assuming that the IP addresses are set as follows. When configuring the settings, change the IP address settings according to the environment you are using.

IP address for device allowed to communicate: 192.168.192.10
Printer IP address: 192.168.192.143


The configuration procedure is shown below.

1 Start Web Config by entering the printer's IP address in your web browser.

<https://192.168.192.143/>

For more information about how to start Web Config, refer to the detailed instruction manual for each product.

2 After starting Web Config, select [Advanced Settings].

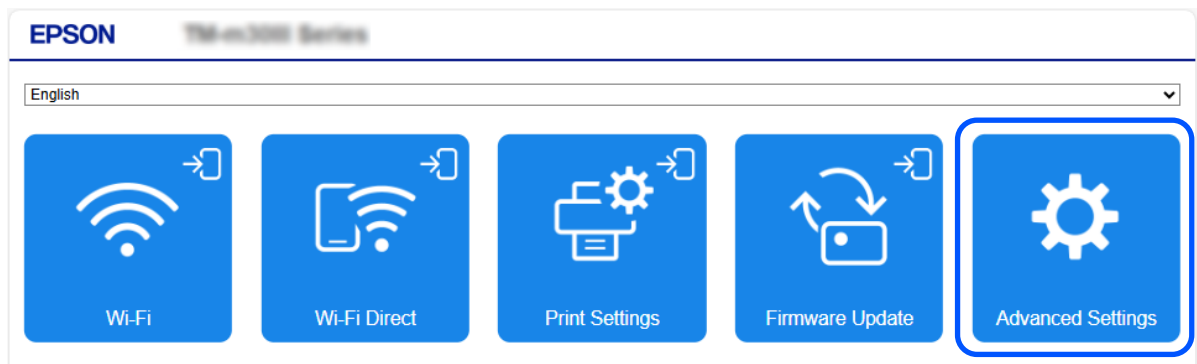

3 Select [Administrator Login]. When the "Administrator Login" screen appears, enter the password and select [OK].

The default password varies depending on the printer. For more information, refer to the Technical Reference Guide for each printer.

The screenshot shows the EPSON TSM-w3000 Series web interface. At the top right, there is a button labeled "Administrator Login" which is highlighted with a blue rectangle. Below the header, there are tabs for "Status" and "Network Security". The "Status" tab is selected, showing a "Product Status" section with a language dropdown set to "English" and a "Printer Status" section showing "Available".

4 Select the [Network Security] tab and then select [Basic] under [IPsec/IP Filtering].

The screenshot shows the EPSON TSM-w3000 Series web interface with the "Network Security" tab selected. In the left sidebar, "IPsec/IP Filtering" is highlighted with a blue rectangle, and "Basic" is selected under it. The main content area displays the "IPsec/IP Filtering > Basic" configuration page. It includes a "Default Policy" section with a row of buttons numbered 1 to 10. Below this, the "IPsec/IP Filtering" section has radio buttons for "Enable" (selected) and "Disable". The "Default Policy" section contains several configuration fields: "Access Control" (set to "Permit Access"), "IKE Version" (radio buttons for "IKEv1" and "IKEv2", with "IKEv1" selected), "Authentication Method" (set to "Pre-Shared Key"), "Pre-Shared Key" (with a toggle for visibility), "Confirm Pre-Shared Key" (with a toggle for visibility), "Encapsulation" (set to "Transport Mode"), "Remote Gateway(Tunnel Mode)", and "Security Protocol" (set to "ESP").

5 Select the [Default Policy] tab and configure the settings as shown below.

Item Name	Setting Value
IPsec/IP Filtering	Check [Enable]
Default Policy Access Control	Select [Permit Access]

EPSON T2800 Series Administrator Logout

Status Print Network **Network Security** Product Security Device Management

Protocol
CA Certificate
Root Certificate Update
SSL/TLS
»Basic
»Certificate
»Automatic Certificate Update
IPsec/IP Filtering
»Basic
»Client Certificate
IEEE802.1X
»Basic
»Client Certificate

IPsec/IP Filtering > Basic

Each policy is applied with following priorities:
Group Policy 1 > Group Policy 2 > ... > Group Policy 10 > Default Policy

Default Policy 1 2 3 4 5 6 7 8 9 10

IPsec/IP Filtering : ☒ Enable ☐ Disable

Default Policy

Access Control : **Permit Access**

IKE Version : ☒ IKEv1 ☐ IKEv2

Authentication Method : Pre-Shared Key

Pre-Shared Key :

Confirm Pre-Shared Key :

Encapsulation : Transport Mode

Remote Gateway(Tunnel Mode) :

Security Protocol : ESP

6 Select the Group Policy [1] tab, check [Enable this Group Policy], and configure the settings as shown below. This setting configures the devices that are allowed to communicate.

Item Name	Setting Value
Access Control	Select [Permit Access]
Local Address (Printer)	Select the printer's IP address [192.168.192.143] or [Use auto-obtained IPv4 address (192.168.192.143)] (192.168.192.143 might vary depending on the network environment) If IPv6 is enabled, IPv6 can be selected
Remote Address (Host)	Specify the IP address or FQDN of devices that are allowed to communicate
Method of Choosing Port	Select [Service Name] or [Port Number]
Service Name	When you select [Service Name] in [Method of Choosing Port], check [Any]
Transport Protocol	When you select [Port Number] in [Method of Choosing Port], select [Any Protocol]

EPSON T2000 Series [Administrator Logout](#)

Status Print Network **Network Security** Product Security Device Management

Protocol

CA Certificate

Root Certificate Update

SSL/TLS

»Basic

»Certificate

»Automatic Certificate Update

IPsec/IP Filtering

»Basic

»Client Certificate

IEEE802.1X

»Basic

»Client Certificate

IPsec/IP Filtering > Basic

Each policy is applied with following priorities:
Group Policy 1 > Group Policy 2 > ... > Group Policy 10 > Default Policy

Default Policy 1 2 3 4 5 6 7 8 9 10

☒ Enable this Group Policy

Access Control : Permit Access

Local Address(Printer) : 192.168.192.143

Remote Address(Host) : 192.168.192.10

Method of Choosing Port : Service Name

Service Name : ☒ Any

☐ ENPC

☐ SNMP

☐ LPR

☐ RAW (Port9100)

☐ IPP/PPS

☐ WSD

☐ WS-Discovery

☐ Network Scan

☐ Network Push Scan

☐ Network Push Scan Discovery

☐ FTP Data (Local)

☐ FTP Control (Local)

☐ FTP Data (Remote)

☐ FTP Control (Remote)

☐ CIFS (Local)

☐ CIFS (Remote)

☐ NetBIOS Name Service (Local)

☐ NetBIOS Datagram Service (Local)

☐ NetBIOS Session Service (Local)

☐ NetBIOS Name Service (Remote)

☐ NetBIOS Datagram Service (Remote)

☐ NetBIOS Session Service (Remote)

☐ HTTP (Local)

☐ HTTPS (Local)

☐ HTTP (Remote)

☐ HTTPS (Remote)

Transport Protocol : Any Protocol

Local Port :

Remote Port :

IKF Version : ☒ IKEv1 ☐ IKEv2

Next

- 7 Select the Group Policy [2] tab, check [Enable this Group Policy], and configure the settings as shown below. This setting blocks communication with devices other than those specified in Group Policy [1].**

Item Name	Setting Value
Access Control	Select [Refuse Access]
Local Address (Printer)	Select the printer's IP address [192.168.192.143] or [Use auto-obtained IPv4 address (192.168.192.143)] (192.168.192.143 might vary depending on the network environment) If IPv6 is enabled, IPv6 can be selected
Remote Address (Host)	Leave blank (all hosts)
Method of Choosing Port	Select [Service Name] or [Port Number]
Service Name	When you select [Service Name] in [Method of Choosing Port], check [Any]
Transport Protocol	When you select [Port Number] in [Method of Choosing Port], select [Any Protocol]

EPSON T500 Series Administrator Logout

Status Print Network **Network Security** Product Security Device Management

Protocol
CA Certificate
Root Certificate Update
SSL/TLS
» Basic
» Certificate
» Automatic Certificate Update
IPsec/IP Filtering
» Basic
» Client Certificate
IEEE802.1X
» Basic
» Client Certificate

IPsec/IP Filtering > Basic

Each policy is applied with following priorities:
Group Policy 1 > Group Policy 2 > ... > Group Policy 10 > Default Policy

Default Policy 1 **2** 3 4 5 6 7 8 9 10

☒ Enable this Group Policy

Access Control : Refuse Access

Local Address(Printer) : 192.168.192.143

Remote Address(Host) :

Method of Choosing Port : Port Number

Service Name : ☐ Any
☐ ENPC
☐ SNMP
☐ LPR
☐ RAW (Port9100)
☐ IPP/IPPS
☐ WSD
☐ WS-Discovery
☐ Network Scan
☐ Network Push Scan
☐ Network Push Scan Discovery
☐ FTP Data (Local)
☐ FTP Control (Local)
☐ FTP Data (Remote)
☐ FTP Control (Remote)
☐ CIFS (Local)
☐ CIFS (Remote)
☐ NetBIOS Name Service (Local)
☐ NetBIOS Datagram Service (Local)
☐ NetBIOS Session Service (Local)
☐ NetBIOS Name Service (Remote)
☐ NetBIOS Datagram Service (Remote)
☐ NetBIOS Session Service (Remote)
☐ HTTP (Local)
☐ HTTPS (Local)
☐ HTTP (Remote)
☐ HTTPS (Remote)

Transport Protocol : Any Protocol

Local Port :
Remote Port :

IKF Version : ☒ IKEv1 ☐ IKEv2

Next

- 8 After you have completed the settings for Group Policy [1] and [2], select [Next]. When the input confirmation screen appears, select [OK].

EPSON T2000 Series Administrator Logout

Status Print Network **Network Security** Product Security Device Management

Protocol
CA Certificate
Root Certificate Update
SSL/TLS
» Basic
» Certificate
» Automatic Certificate Update
IPsec/IP Filtering
» Basic
» Client Certificate
IEEE802.1X
» Basic
» Client Certificate

IPsec/IP Filtering > Basic

Confirm the following settings.

IPsec/IP Filtering : Enable

Default Policy : Permit Access

Access Control : Permit Access

Group Policy 1

Enable this Group Policy : ☒ Enable this Group Policy

Access Control : Permit Access

Local Address(Printer) : 192.168.192.143

Remote Address(Host) :

Method of Choosing Port : Service Name

Service Name :


- ☒ Any
- ☐ ENRC
- ☐ SNMP
- ☐ LPR
- ☐ RAW (Port9100)
- ☐ IPP/PPS
- ☐ WSD
- ☐ WS-Discovery
- ☐ Network-Scan
- ☐ Network-Push-Scan
- ☐ Network-Push-Scan-Discovery
- ☐ FTP-Data (Local)
- ☐ FTP-Control (Local)
- ☐ FTP-Data (Remote)
- ☐ FTP-Control (Remote)
- ☐ CIFS (Local)
- ☐ CIFS (Remote)
- ☐ NetBIOS-Name-Service (Local)
- ☐ NetBIOS-Datagram-Service (Local)
- ☐ NetBIOS-Session-Service (Local)
- ☐ NetBIOS-Name-Service (Remote)
- ☐ NetBIOS-Datagram-Service (Remote)
- ☐ NetBIOS-Session-Service (Remote)
- ☐ HTTP (Local)
- ☐ HTTPS (Local)
- ☐ HTTP (Remote)
- ☐ HTTPS (Remote)

Group Policy 2

Enable this Group Policy : ☒ Enable this Group Policy

OK Back

- 9 When "Shutting down. Restarting communication may take a few minutes." is displayed, the configuration of IP filtering is complete.

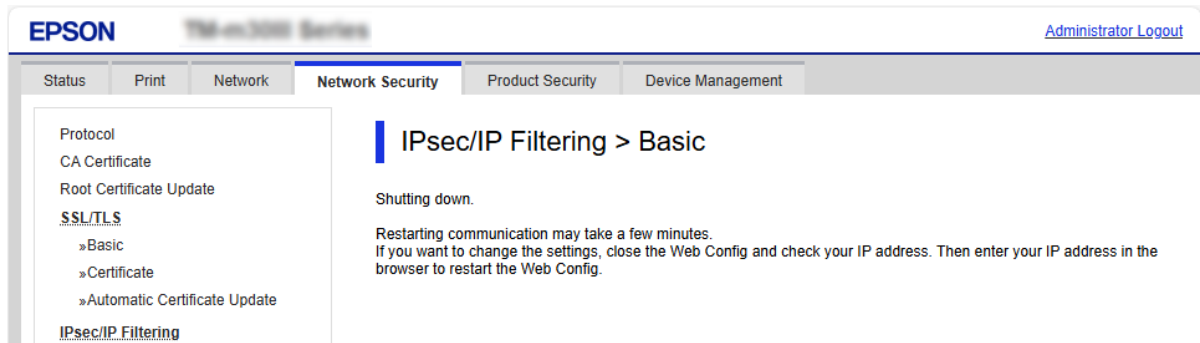

NOTE

- Individual policies have priorities, with "1" being the highest priority. The larger the number, the lower the priority.
- If incorrect settings are applied, devices such as POS terminals will no longer be able to access the printer. If you have configured a setting incorrectly, use the "Initialize Interface" function. For more information about how to use the "Initialize Interface" function, refer to the detailed instruction manual for each printer.

Setup Method B

Use EpsonNet Config (Web version) to configure IP filtering.

This section explains how to configure IP filtering, assuming that the IP addresses are set as follows. When configuring the settings, change the IP address settings according to the environment you are using.

IP address for device allowed to communicate: 192.168.192.10
Printer IP address: 192.168.192.143

The configuration procedure is shown below.


1 Start EpsonNet Config (Web version) by entering the printer's IP address in your web browser.

<https://192.168.192.143/cipfilter.htm>

For more information about how to start EpsonNet Config (Web version), refer to the detailed user manual for each product.

2 On the authentication screen, enter your username and password.

The user name is "epson", and the default password varies depending on the printer. For more information, refer to the Technical Reference Guide for each printer.

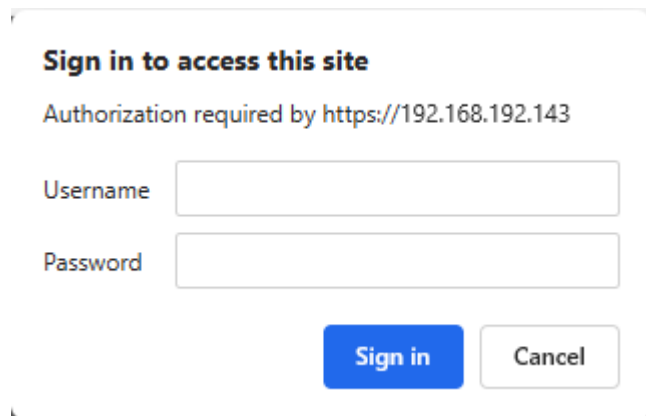

Sign in to access this site

Authorization required by <https://192.168.192.143>

Username

Password

3 Configure the settings as shown below, and then click [Send].

Item Name	Setting Value
IP/Port Filtering	Enable
IP Filtering -> Access Control	Allow
IP Filtering	Rule1 : 192.168.192.10 (This might vary depending on the network environment)

IP/Port Filtering

IP/Port Filtering

Enable ▾

IP Filtering

Access Control

Allow ▾

Rule 1

192.168.192.10

0.0.0.0

Rule 2

0.0.0.0

- 0.0.0.0

Rule 3

0.0.0.0

- 0.0.0.0

Rule 4

0.0.0.0

- 0.0.0.0

Rule 5

0.0.0.0

- 0.0.0.0

Port Filtering

HTTP (TCP Port 80)

Allow ▾

HTTPS (TCP Port 443)

Allow ▾

LPR (TCP Port 515)

Allow ▾

Printing (TCP Port 9100)

Allow ▾

Monitoring Port (TCP Port 19100)

Allow ▾

SNMP (UDP Port 161)

Allow ▾

ENPC (UDP Port 3289)

Allow ▾


Bonjour (UDP Port 5353)

Allow ▾

Send

4 Select [Reset] and wait for the printer to restart.

The configuration of IP filtering is complete.

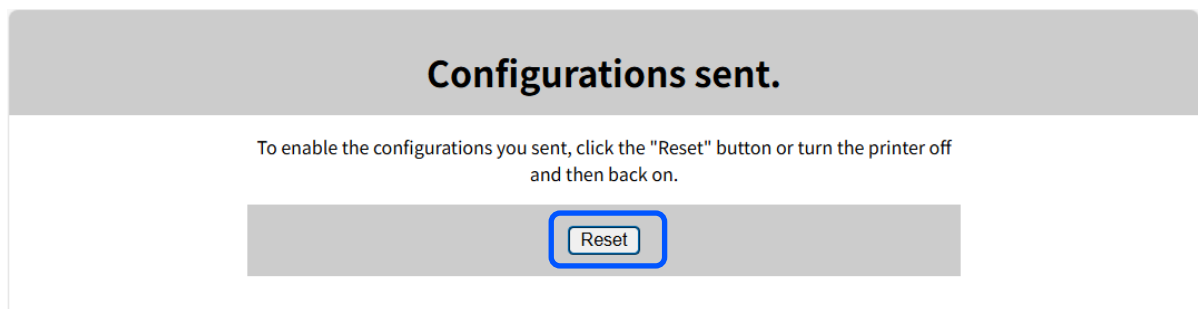

NOTE

If incorrect settings are applied, devices such as POS terminals will no longer be able to access the printer. If you have configured a setting incorrectly, use the "Initialize Interface" function. For more information about how to use the "Initialize Interface" function, refer to the detailed instruction manual for each printer.


Configuration Method C

The printer itself does not have an IP filtering function.

To restrict unauthorized devices from connecting to the printer, the user must ensure a secure environment.

Example of Internet Connection

Do not connect the product directly to the Internet. Instead, connect it to a network that is protected by a firewall or similar security measures. At that time, we recommend using a private IP address.

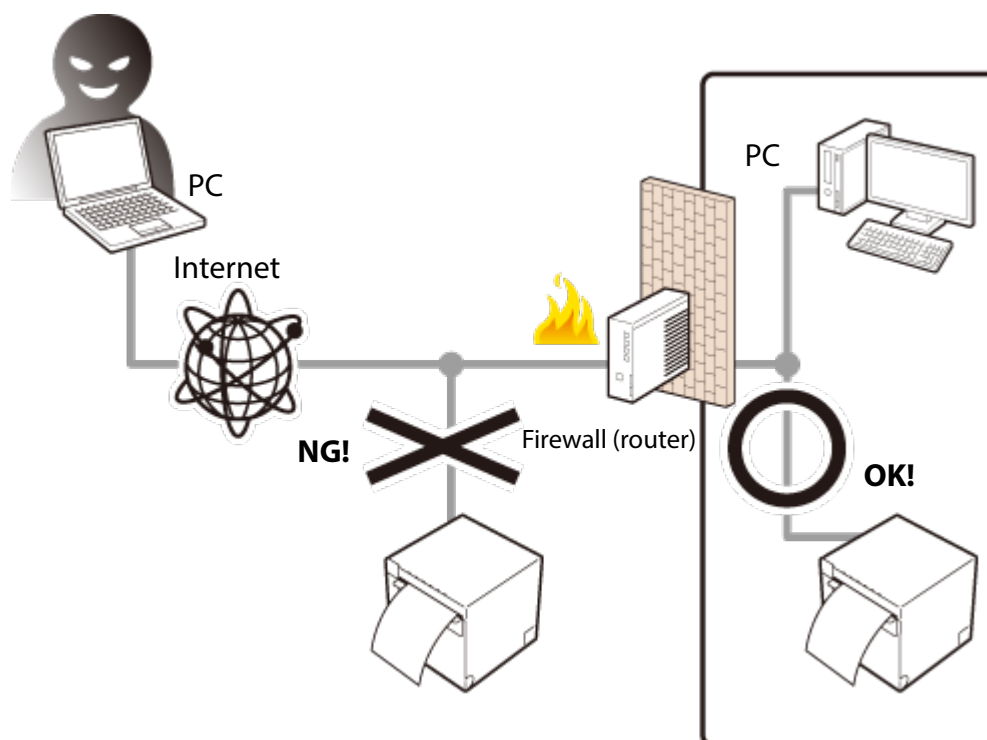

In addition to printing, the product's network features also include management interfaces such as the Web management screen (EpsonNet Config (Web version)). At Epson, we conduct vulnerability testing and strive to ship products free of vulnerabilities. However, if you connect directly to the Internet, you might face unexpected security risks to your network and the devices connected to it, such as unauthorized operations or information leaks.

NOTE

See the following website for more information about Epson security initiatives.
<https://support.epson.net/security/en/index.html>