

tables reference each other. Cognee holds only a redundant search copy of the chunk text, nothing here depends on it.

10 tables in 4 groups

83 columns


10 foreign-key links

1 database (Supabase Postgres)

1 search copy (Cognee)

Relationship map

An arrow runs from the table holding the foreign key to the table it references. Click a box to open its columns below.

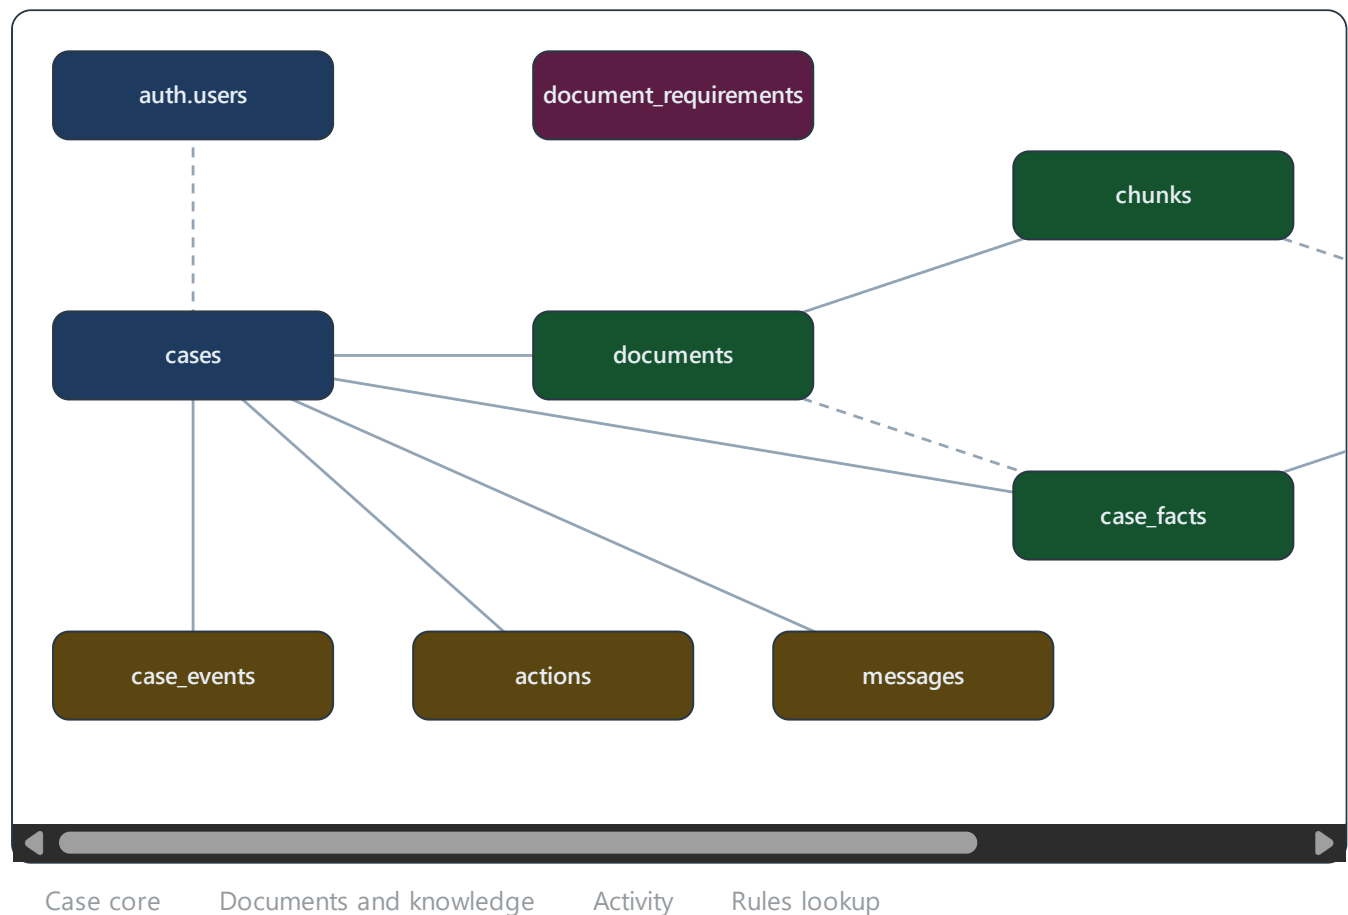

Solid: child rows go with parent (CASCADE). Dashed: link cleared, row stays (SET NULL).

The case-safety chain

One case owns everything. Every child table carries `case_id`, so one query (`where case_id = ?`) pulls the full picture, and one delete wipes a case cleanly.

cases is the root. 1 case has many documents, events, actions and messages.

documents belong to one case. 1 document has many chunks and many facts.

chunks are the plain text pieces (with page number) that get copied into Cognee for search.

case_facts are exact extracted values (sum insured, bill amount). The maths reads only from here, never from Cognee.

evidence_items link a fact to the chunk that proves it. This is what the evidence drawer shows.

How the tables work together

1. Upload a document

1. Insert `documents` row, status `processing` ; file goes to Storage.
2. Extract text per page, insert `chunks` .
3. LLM extracts facts, insert `case_facts` with page and quote.
4. Send chunks to Cognee, set `synced_to_cognee = true` .
5. Rules update `cases` (coverage, gap, readiness).
6. Insert `case_events` ; set document status `done` .

2. Ask a question

1. Save the user line in `messages` .
2. Cognee returns matching text; match it back to a `chunks` row.
3. Code checks the AI quote really sits inside that chunk text.
4. Pass: insert `evidence_items` . Fail: set `abstained = true` .
5. Save the assistant reply with `evidence_json` .

3. Readiness and reminder

1. Read `document_requirements` for the case type.
2. Add `weight` per passing document, `partial_credit` if uploaded but check fails.
3. Policy 25 + bill 25 + admission 20 + unsigned discharge 8 = 78.
4. Score under 100: insert an `actions` row, call `n8n`.
5. `n8n` calls back; insert `case_events` "reminder_sent".

All tables

Search tables and columns for example fact, chunk or readiness score

Search tables and columns, for example fact_key or readiness_score

auth.users Case core Managed by Supabase 2 columns

cases Case core Soft close via status 15 columns

documents Documents and knowledge Cascade with case 9 columns

chunks Documents and knowledge Cascade with document 8 columns

case_facts Documents and knowledge Cascade with case 11 columns

evidence_items Documents and knowledge Cascade with case 10 columns

case_events Activity Append-only 6 columns

actions Activity Status lifecycle 8 columns

messages Activity Append-only 8 columns

document_requirements Rules lookup Seeded, never deleted 6 columns

Rules the database enforces

Unique fact per document: `UNIQUE (case_id, document_id, fact_key)` . Re-processing updates a fact, never duplicates it.

Status checks: `processing_status` , `verification_status` , `actions.status` , `messages.role` and `readiness_score` (0 to 100) all use CHECK constraints.

One readiness rule per document type: `UNIQUE (case_type, document_type)` on `document_requirements` .

updated_at trigger on `cases` so no client forgets to set it.

Row level security: a user may read or write a row only if its case belongs to them (`cases.user_id = auth.uid()`). Skip for the demo, add after.

Source of truth: amounts, readiness and status live only in Supabase. Cognee never writes to them.

Where each kind of data lives

Data	Supabase	Cognee
Original PDFs, images	Storage	No
Chunk text and page	chunks	Yes, embedded (rebuildable)
Embedding numbers	No	Yes, handled inside
Facts, amounts, readiness, status	Yes	Never
Chat and voice transcripts	messages	No, not evidence

Cognee datasets: `financial_knowledge` and `policy_POL_889923` (pre-loaded), plus one per case, named in `cases.cognee_dataset` . If Cognee data is lost, re-send every chunk from `chunks` .

How rows end their lives

- Cascade with the case:** documents, chunks, case_facts, evidence_items, case_events, actions, messages.
- Append-only by habit:** case_events and messages are inserted, never edited.
- Set null:** if a document or chunk is deleted, facts and evidence keep their quote and page text.
- Never deleted:** document_requirements (seeded once).