



How To Setup TranSafe Credit Card Processing

In Management Console you will go to Setup > Payment Setup > Payments

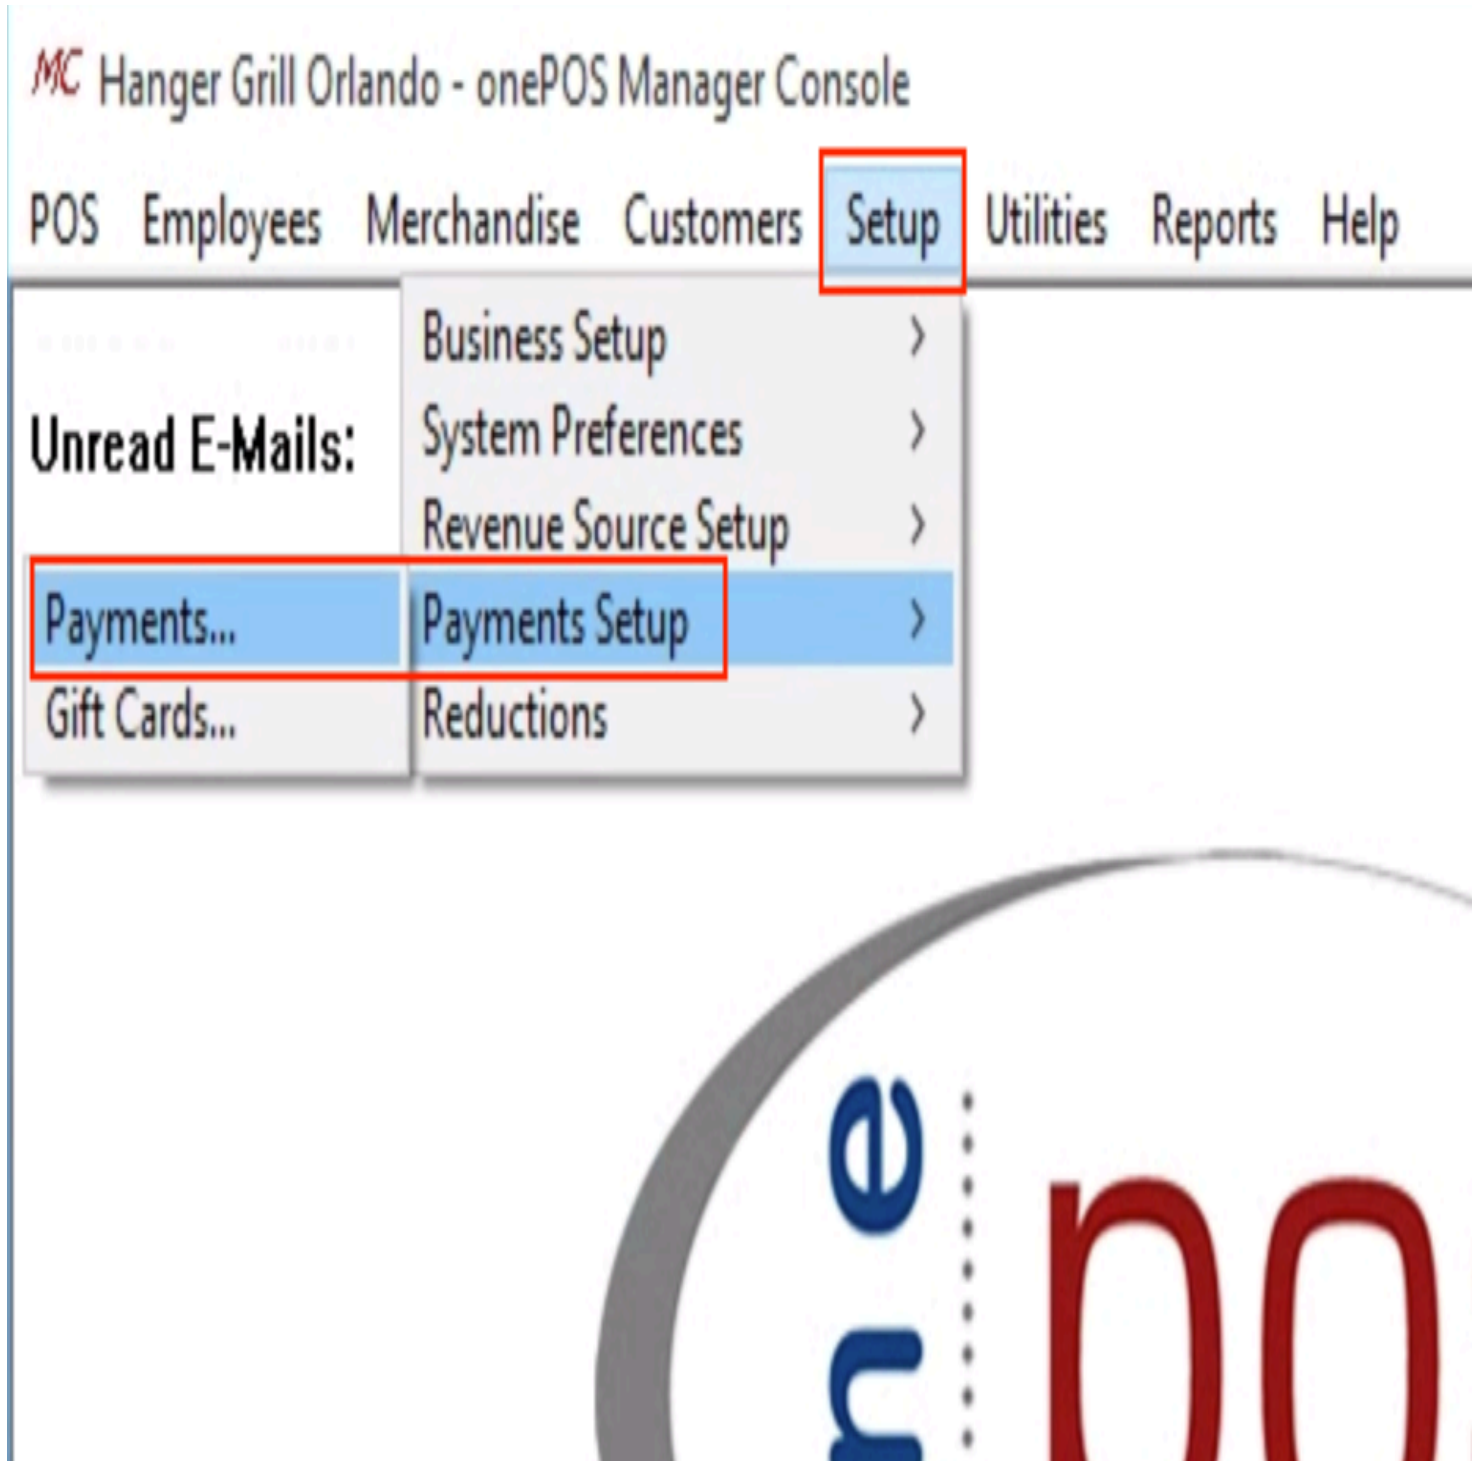

Then click on add.

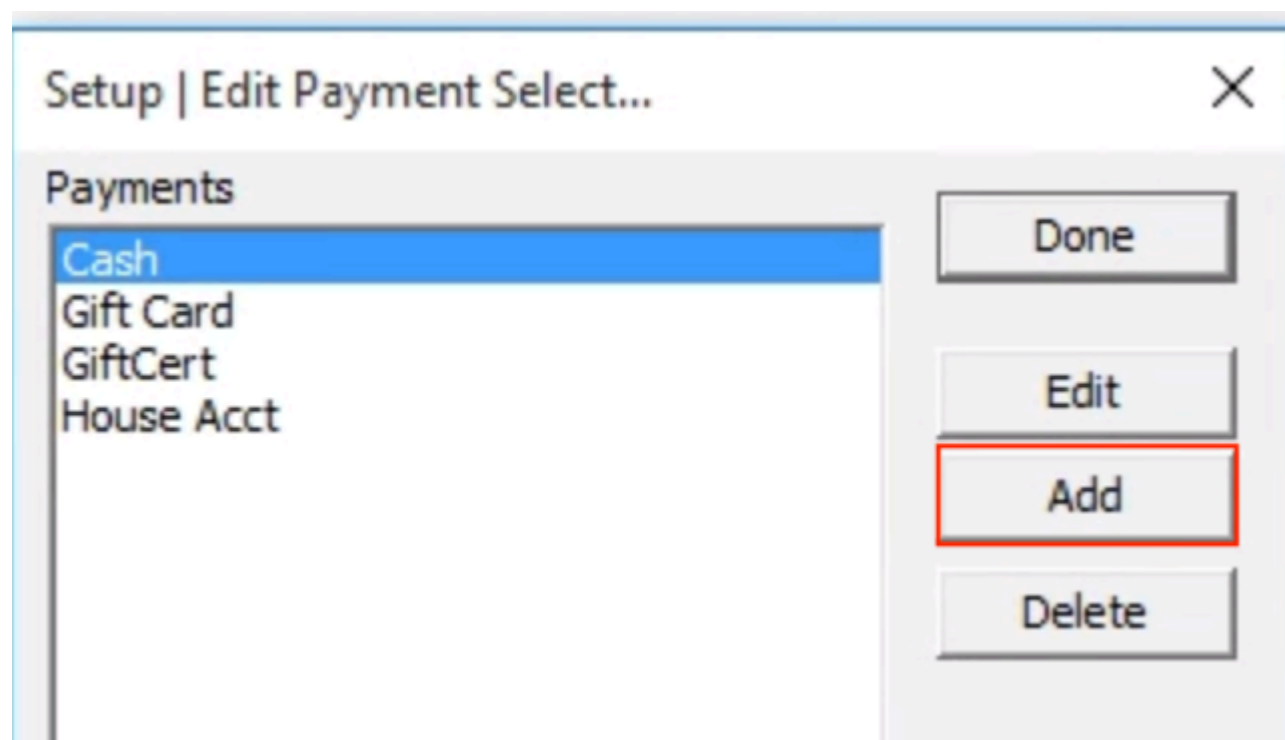

Your preferred settings may be different than the selections below. The settings below are the minimum settings.

You will need to name this Payment Type. I have named it TranSafe. Then select an EPS Type which I have selected Visa. Then click the Lookup button to add this payment type to the POS. The Column and Row will automatically populate based on which button you assign under Lookup. The rest of the settings you will need to decide based on your previous settings. Click on Card Info.

The Max Overpay box needs to have a value for tips to be added to the check after processing the credit card. If the box is empty this will inform the system that no additional tip can be added after processing. The value you enter here will also be the Maximum a server can add as an additional tip. You will also need to make sure the Box Print Tip Line is checked for this feature to work.

Setup | Edit Payment...

ID: 16 18.08841

UID: 16

Name: TranSafe

Sort: 0

Logo File:

Remote Print To: -NONE

EPS Type: Visa

Auto Coupon: -NONE

Auto Discount: -NONE

Auto Fee: --NONE--

Pri EPS IP:

Sec EPS IP:

Column: 3

Row: 4

Max Overpay: 9999.99

Tip Fee:

Exch Rate:

Surcharge %:

Min Amt:

Dol Sym:

PMS ID:

Lookup...

OK

Cancel

Previous

Next

Card Info...

Auth...

Settle...

☐ Manager Access
☐ Manager Access 2
☐ Manager On Manual
☐ Manager On Forced
☐ Open Cash Drawer
☐ Verify Last 4 Digits
☐ Overpay As Cash Back
☐ Auto Tip
☐ Remove Auto Fee
☐ In-Active

☐ Get Open Text
☐ Fully Hide Card Num
☒ Print On Decline
☒ Print On Void
☒ Print Tip Line
☒ Prompt for Tip on Payment
☐ Disable Auto Detect Card Type
☐ Block if Gift Sale on Check

Last Update: 09-22-20 14:12

When you click on the Card Info, Auth and Settle buttons you will need to enter Today's Security Code, which is the that days date reversed multiplied by the month, for example if it is September 9th, it would be $9 \times 09 = 81$, or if it is September 18th, it would be $81 \times 9 = 729$.

System Security Code...

Today's Security Code:

OK

Cancel

You may need to set up some of the information in Card Info, please check your previous Credit Card setting for the Card info, settings you do not need to fill in the Auto Prefix or Card Range boxes for TranSafe Credit Card Processing. After you enter the settings for your store click ok or if you do not have anything set up in the selection in the red box below skip to the next step.

Setup | Edit Payment | Card Info...

Card Name: TranSafe

Business Name:

Industry: Restaurant ▼

Auth Floor:

Tip Rate:

Manager Over:

Manager Tip %:

Max Trans:

Max Tip:

Pre-Auth Amount:

Pre-Auth Tip:

☐ Check Card LRC

☐ Check Expiration Date

☐ Get AVS

☐ Get CVD

☐ Magnetic Data Capable

☐ No BIN Range

Auto Prefix

Add:

From: To:

Range	Low	High	Len	Manual Code	Required
1:				☐	☐
2:				☐	☐
3:				☐	☐
4:				☐	☐
5:				☐	☐
6:				☐	☐
7:				☐	☐
8:				☐	☐
9:				☐	☐
10:				☐	☐

OK

Cancel

Now you will click the Auth button. Then enter Today's Security Code. You will select TranSafe CR from the Financial Processor box. TranSafe should have given you the Primary Host name (Typically it will be live.transafe.com), Primary Internet Port (typically it will be Port 443), Username and Password. If you do not have that you will need to contact TranSafe to obtain this information. You will need to enter the correct

Username and Password then click OK. Please note that the User Name will be a 9 digit number 888 999 777 and will be entered as 888999777:pos

Setup | Edit Payments | Authorization Parameters...

Card Name: TranSafe

Financial Prc: Transafe CR

Acquirer Bin:

Merchant #:

Store Id:

Terminal ID:

Business ID:

AUAR ID:

TPP ID: VZZ019

Currency Code:

Country Code:

City Code:

Time Zone:

Catg Code:

Pri Host Name: live.transafe.com

Pri Internet Port: 443

Sec Host Name:

Sec Internet Port:

User Name:

Password:

Line Delay:

Primary Dial:

Secondary Dial:

OK

Cancel

Copy...

Get DID...

Now you will click the Settle button. You will need to enter Today's Security Code again. You will now select TranSafe from the Settle With Drop down. This will make the Copy button be able to be clicked. You will click the copy button and it will copy the information you entered in Authorization. Now you will click OK and you are now set up with TranSafe. You will also need to set up the EMV Reader for TranSafe.

Setup | Edit Payment | Settlement Parameters... ✕

Card Name: TranSafe

Settle With: TranSafe ▼

Settle Deposit:

Financial Prc: Transafe CR ▼

Acquirer Bin:

Agent #:

Merchant #:

Store Id:

Terminal ID:

Currency Code:

Country Code:

City Code:

Time Zone:

Catg Code:

Pri Host Name: live.transafe.com

Pri Internet Port: 443

Sec Host Name:

Sec Internet Port:

User Name:

Primary Dial:

Secondary Dial:

Batch ID:

Open Date: 00-00-0000

Open Time: 12:00am

OK

Cancel

Copy...

TranSafe EMV Reader Setup

Click on Setup > System Preferences > Hardware Devices


POS Employees Merchandise Customers **Setup** Utilities Reports Help

Unread E-Mails:


Business Setup >
System Preferences >
Revenue Source Setup >
Payments Setup >
Reductions >

Server Setup...
EOD Setup...
Time Clock Setup...
Customer Setup...
Check Out Setup...
Loyalty Setup...
Access Tokens...
Alerts...
Reporting Time Periods...
Check Trailers...
Credit Card Trailers...
Employee Upsell Message...
-Hardware Devices...
oneView...
Terminal Styling...
Create Terminal Config...

The Click Add. If you have another EMV set up you can click add like.

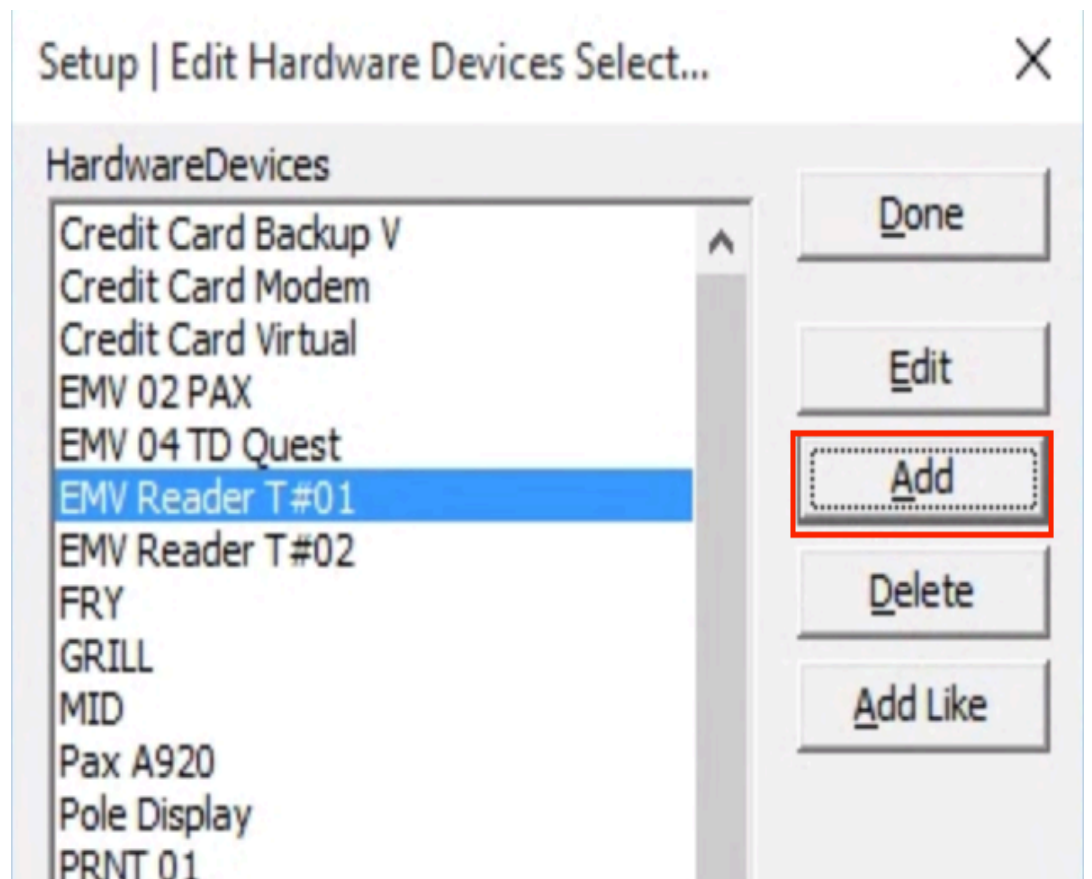

First give the EMV Reader a name, in this example the name is “EMV TS T#01” T#01 - Terminal Number 1.
From the Device Type drop down select EMV Reader TranSafe, and then click OK.

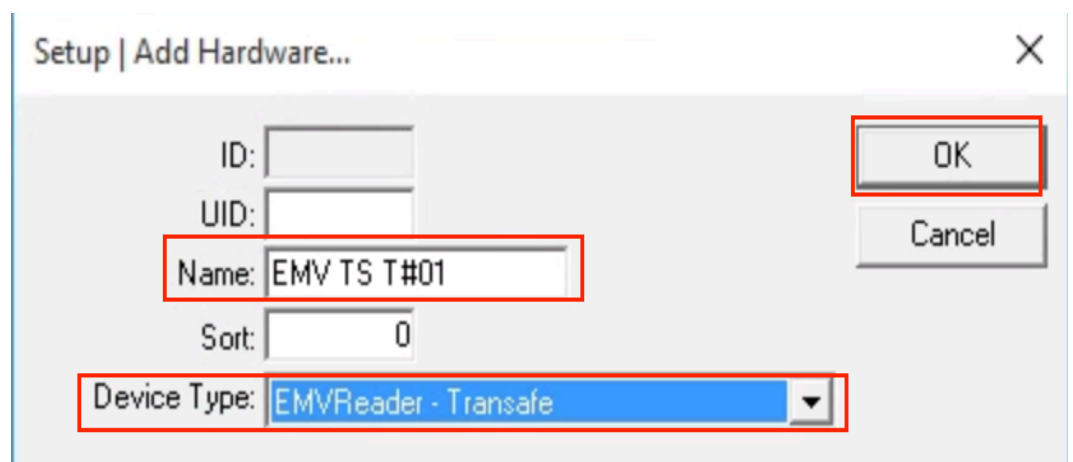

After you click OK more options will appear and you will select the Terminal you are setting up the device on, other than that the settings will be the same as below. In the images below are the set up for USB and Network.

USB Settings:

USB Chip Card Reader:

Setup | Edit Hardware Device | EMV - Transafe-Uniterm... X

ID:	20 954.08842	OK Cancel Previous Next
UID:	20	
Name:	EMV TS T#01	
Sort:	0	
Device Type:	EMVReader - Transafe	
Terminal:	Terminal #01	
Secondary Terminal:	-NONE	
Force Settle To:	-DEFAULT	
Auth Timeout (90):	90	
Uniterm Port (8123):	8123	
Uniterm Device Type:	bbpos_cros	
Uniterm Device:	HID:	

USB Lane 3000: To change the device to USB on the device you will press 0-0-0-1 on the device. Select 1. Communication Type > Then Select 3 USB_CDC then press the Red X and select 1 - Yes to save and reboot the device. In Management Console in Hardware Devices you will put in the box labeled Uniterm Device you will need to get the COM Port Number from device manager that your device is installed on.

Setup | Edit Hardware Device | EMV - Transafe-Uniterm... X

ID:	59 959.08847	OK Cancel Previous Next
UID:	59	
Name:	TranSafe_USB #1	
Sort:	0	
Device Type:	EMVReader - Transafe	
Terminal:	Terminal #01	
Secondary Terminal:	-NONE	
Force Settle To:	-DEFAULT	
Auth Timeout (90):	90	
Uniterm Port (8123):	8123	
Uniterm Device Type:	ingenico_upp	
Uniterm Device:	SER:COM8	

Network: (The IP address and Device Port Number for your device can be found by pressing 0-0-0-0 on the device.)

Lane 3000 Network Setup - NOTE YOUR DEVICE MUST BE ON PORT 12000 - IF YOUR DEVICE IS NOT ON PORT 12000 IT WILL NOT WORK.

Setup | Edit Hardware Device | EMV - Transafe-Uniterm... X

ID: 20 954.08842

UID: 20

Name: EMV TS T#01

Sort: 0

Device Type: EMVReader - Transafe

Terminal: Terminal #01

Secondary Terminal: -NONE

Force Settle To: -DEFAULT

Auth Timeout (90): 90

Uniterm Port (8123): 8123

Uniterm Device Type: ingenico_upp

Uniterm Device: IP:192.168.1.11:12000

OK

Cancel

Previous

Next

If you have any questions on merchant setup use transafesupport@i3verticals.com