

401 TXOne Solutions

Advanced Configuration Lab Guide

Security Inspection Solutions

Rev v3.4-260210

Security Enablement Global Team
TXOne Network Inc

3/16/2026

Filename: 401_TXOne_solutions_advanced_configuration_Lab_Guide-ElementOne-v3.4-260210-Labs.pdf

Copyright Notice

Copyright © 2024, TXOne Networks. All rights reserved.

All training content and publications are the property of TXOne Networks. No part of this material may be reproduced, republished, distributed, modified, displayed, photocopied, or recreated in any form without prior written permission from TXOne Networks.

Additionally, users may not sell, rent, lease, trade, share, or transfer any portion of the training materials without written consent from TXOne Networks. Users are responsible for complying with all applicable copyright laws.



Revision History

Version	Author	Date	Change
V1.0	Louis Liu	2022/12/11	1 st edition, provide EdgeIPS demo and test cases
V2.0	Louis Liu	2022/12/30	2 nd edition, integrated StellarProtect and WIN7 VM3 demo / lab test cases
V2.1	Louis Liu	2023/01/04	Safely remove demo case descriptions
v2.2	Chris Van Den Abbeele	2023/06/28	Lab guide split in separate documents per product
v2.3	Louis Liu	2023/07/21	Merge the use cases which listed in Miro
V3.0	Chris Van Den Abbeele	2024/04/15	Consolidating the VMs + updating labs
V3.1	Chris Van Den Abbeele	2024/7/11	Added labs 3 and 4 Lab3: Scan a Linux File System with the Scanning Tool Lab4: Boot from the Portable Inspector to scan otherwise inaccessible locations
V3.1	Louis Liu	2024/12/25	Remove Lab4.
V3.2	Chris Van Den Abbeele	2025/01/29	Revised for improved phrasing
V3.3	Louis Liu	2026/01/30	Update for Element Connect and OpenAPI
V3.4	Louis Liu	2026/02/10	Update for ElementOne 1.27.x / PI 1.0.1094

Product Version(-s)

Solutions	Edition
ElementOne	1.20.x and above
Portable Inspector	1.0.1054 and above

Table of Contents

1.	Lab scenarios mapped to product features	1
2.	Lab Environment list	2
2.1	Virtual Machines	2
2.2	Hardware/Software list	3
2.3	Lab network architecture	3
2.4	Credentials	4
2.5	VMTools update Settings	4
2.6	VMWare Virtual Network Settings	5
3.	Lab Environment setup	6
3.1	Turn on the Virtual Machines	6
3.2	Copy the Lab kit file	7
4.	Labs	9
	Lab1: Portable Inspector (PI) Factory Reset	9
	Lab2: Install the Scanning Tool agent with automatic components update.	12
	Lab3: Scan a Linux File System with the Scanning Tool	23
	Lab4: Security Inspection for new OT equipment	33
	Lab5: Vulnerability assessment of new OT equipment	37
	Lab6: Secure Storage for end-to-end data integrity	40
	Lab7: API access for management tasks	55
	Lab8: RBAC (Role Based Access Control)	65

1. Lab scenarios mapped to product features

Table 1 Lab scenarios mapped to product features

Solution	Lab scenario	Features
ElementOne Portable Inspector	Portable Inspector (Portable Inspector) Factory Reset	Scanning Tool
	Scanning Tool Agent installation	Scanning Tool
	Linux file system security inspection	Scanning Tool
	Security Inspection task	Scanning Tool
	Security Inspection for new equipment onboarding	ElementOne
	Secure Storage to ensure end-to-end data integrity	Secure Storage
	API access for management tasks	3 rd party integration
	Roles Based Access Control (RBAC) practice	ElementOne

2. Lab Environment list

2.1 Virtual Machines

Table 1 Virtual Machines

Server Name ZIP Filename	VMware Image Name	Hardware Specification	Purpose
LabConsole_xx xxx.zip	LabConsole_xxxx	CPU: 2 Core RAM: 4GB Hard Disk: 100G Network: NAT	Main Console for labs
ElementOne_x xxx.zip	ElementOne_x.x.x .ova	CPU: 2 Core RAM: 8GB Hard Disk: 100G/25G Network: NAT	ElementOne Management
Win7_xxxx.zip	Win7_xxxx	CPU: 2 Core RAM: 2GB Hard Disk: 60G Network: NAT	Portable Inspector Labs
attacker_xxx.zi p	Kali-linux-xxx	CPU: 4 Core RAM: 2GB Hard Disk: 80G Network: NAT	Portable Inspector labs

2.2 Hardware/Software list

Table 2 Hardware / Software Requirements

No.	Items	Specification			
1	Laptop	OS	Windows 10 / 11		
		Hard Drive	75 GB Recommend		
		Memory	16 GB Recommend		
		Network Adapter	WIFI / LAN NIC for Internet Access		
		Hard drive space requirements			
		Solutions	Space Requirement	Memory Requirement	VM
		ElementOne Portable Inspector	75GB	8GB	-ElementOne -LabConsole -Win7 -Kali Linux
2	VMWare Workstation Pro 17	Hypervisor Minimum Hardware level = 15			

2.3 Lab network architecture

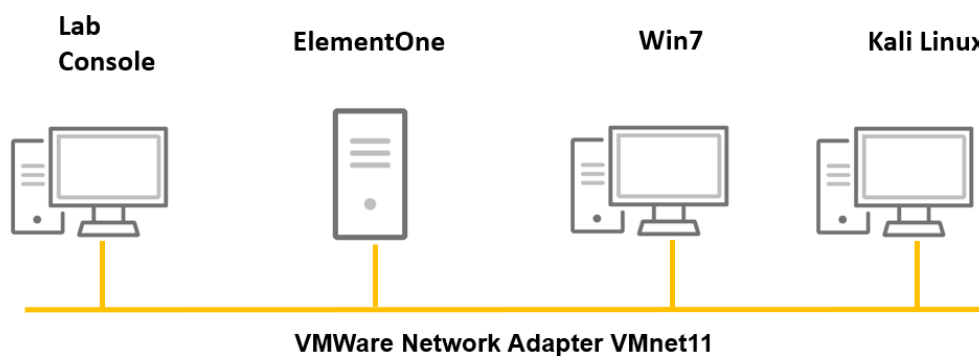


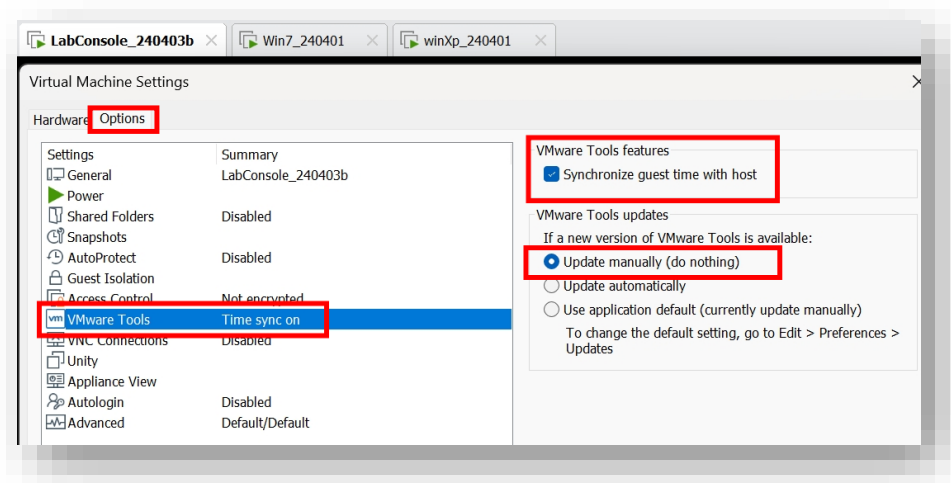
Figure 1 Advanced Configuration Training Lab environment

2.4 Credentials

No	VM Image	IP	Account / Password	Access URL
1	LabConsole	192.168.23.196	txone/12345678	
2	ElementOne	192.168.23.18	Server: root/12345678 web: admin/12345678	https://192.168.23.18
3	Win7	192.168.23.27	txone/12345678	
4	Kali-Linux	192.168.23.197	kali/kali	

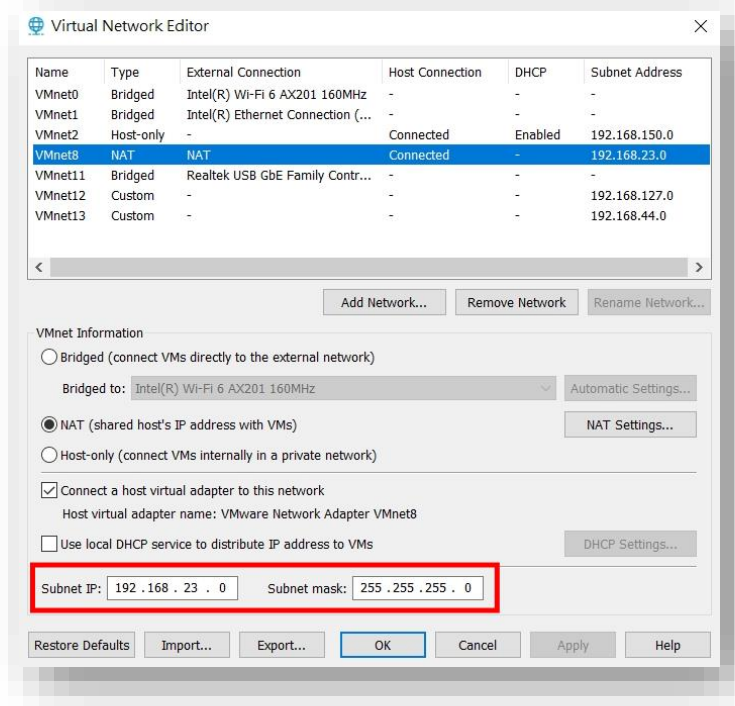
2.5 VMTools update Settings

- Edit the Settings of each VM
- Choose the **Options** tab
- Select the **VMware Tools** option
- Check **“Synchronize guest time with host”**
- Under VM Tools updates, select the option **“Update manually (do nothing)”**

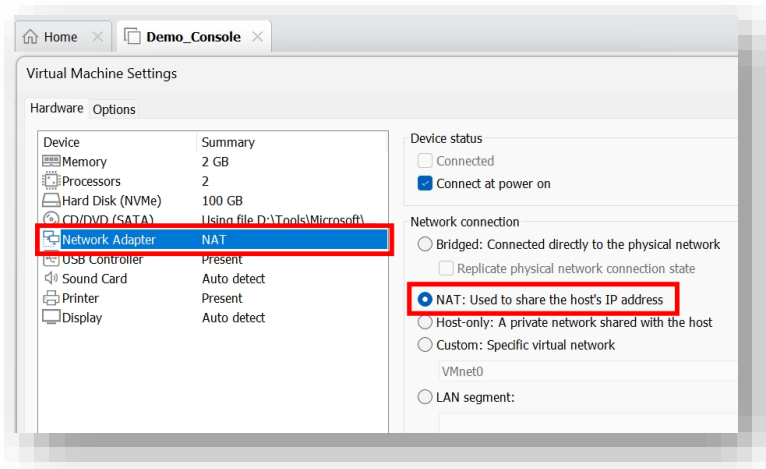


2.6 VMWare Virtual Network Settings

- Ensure your laptop has internet access via Wi-Fi or an Ethernet (UTP) connection.
- In VMware workstation, open the Virtual Network Editor and configure the VMWare NAT network to 192.168.23.0 /24.



- In the Settings of the LabConsole VM, set the Network Adapter to NAT.
 - The default setting for the NAT default gateway is **192.168.23.2**
 - LabConsole, StellarOne and EdgeOne use **8.8.8.8** as their DNS server.

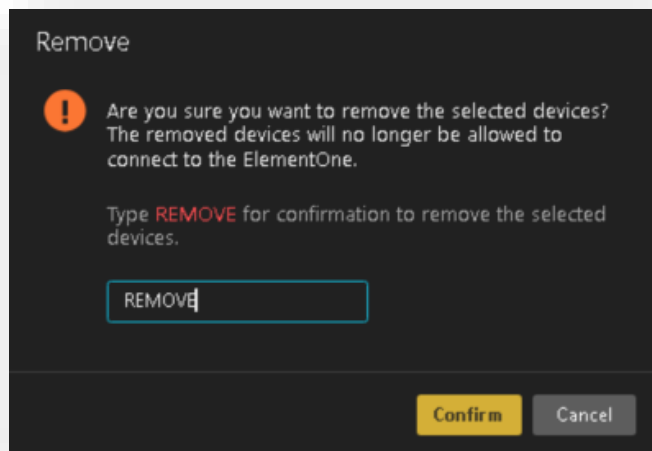


3. Lab Environment setup

3.1 Turn on the Virtual Machines

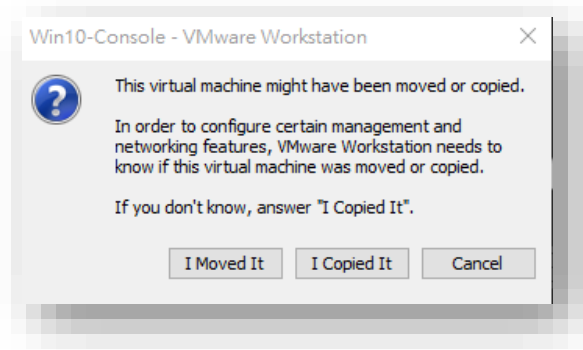
If you want to continue using your existing environment of the 301 labs, then keep the VMs as they are. Do not revert to snapshot.

- Power on the Kali Linux VM, keeping the other VMs running
- Make the following changes to your ElementOne:
 1. Create a group named **FAB12-10-27**.
Do not move any devices into this group
 - Once the group has been created, open the Group Policy and disable the “**Inherit policies from the parent group: Global Group**” and click **Save**
 2. Remove the Portable Inspector Device that you imported earlier.
Go to **Device List > Portable Inspector >** check the selection box at the left of the line of your **Portable Inspector > Action > remove**
Type **REMOVE** to remove the Portable Inspector



If you do this 401 training as standalone training, then:

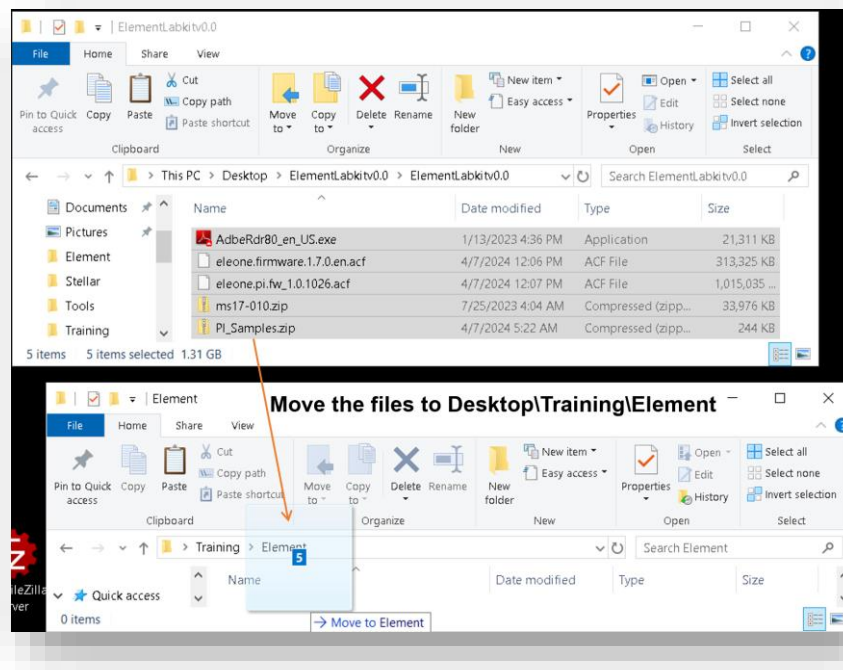
- Power on the LabConsole VM, the Win7 VM, the ElementOne VM and the Kali Linux VM. Revert all of them to the snapshots called **“Ready for Labs”**
- If the VM is powered on for the first time, then click **“I Moved It”**



- Log in to the LabConsole VM and to the Win7 VM with the following credentials:
User: txone (TXOne Expert)
Password: 12345678

3.2 Copy the Lab kit file

- Copy the **“ElementLabKitVx.y.zip”** (1.3 or later) that was shared with you to the desktop of the LabConsole
- Expand it (right-click the file and **“Extract All”**). It will create the **“ElementLabKitVx.y”** folder on the desktop.
- Move all subdirectories from that folder into the 'Element' folder that is under 'Training' folder on the desktop, as indicated in the screenshot below.

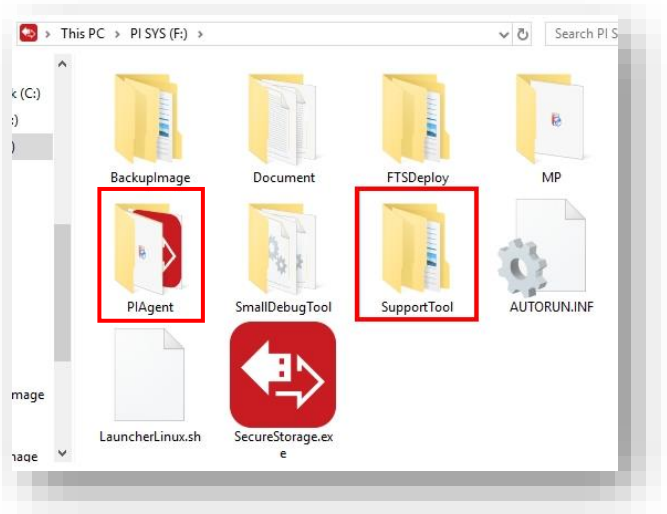


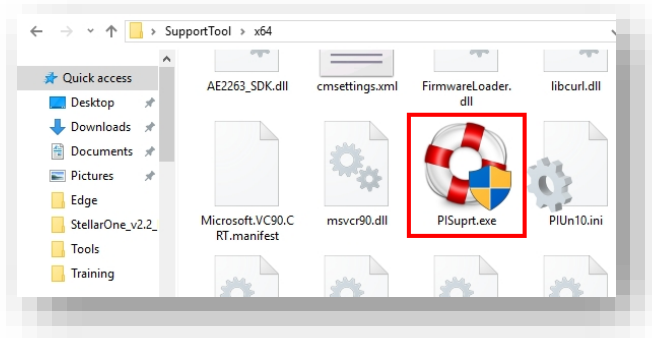
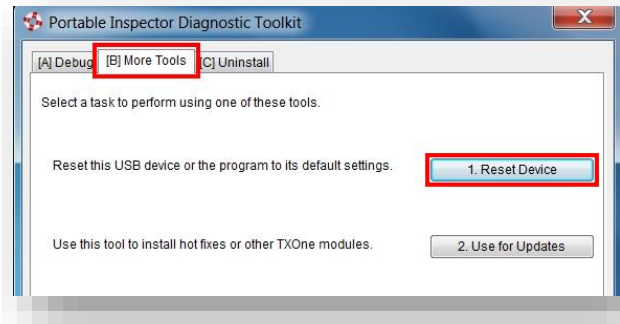
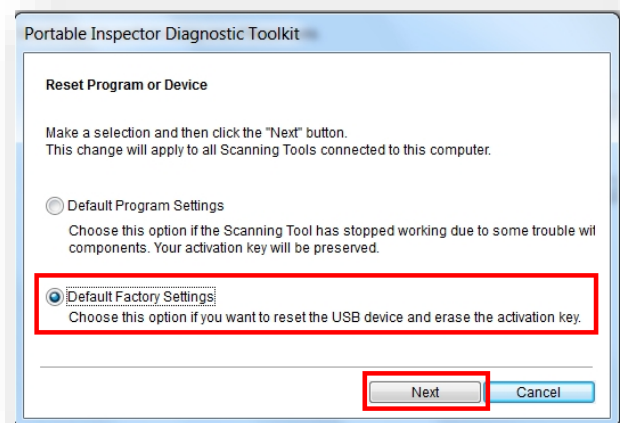
- The **training** folder is hosted on a webserver that is running in this VM. We will access it from other VMs to download the needed files.

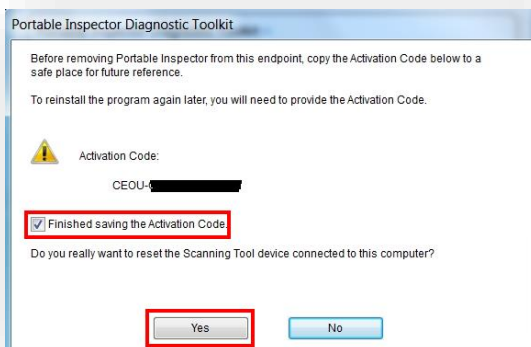
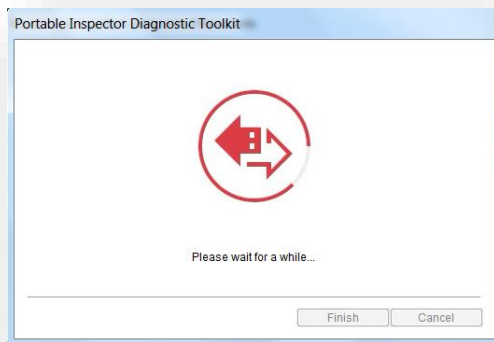
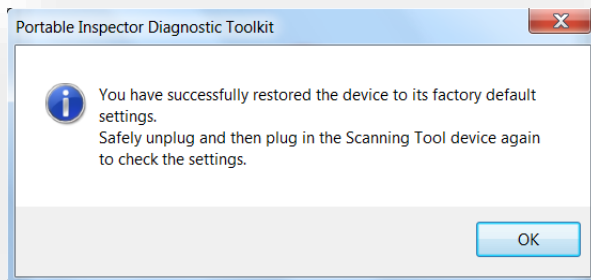
4. Labs

Lab1: Portable Inspector (PI) Factory Reset

Table 3 Portable Inspector (PI) Factory Reset

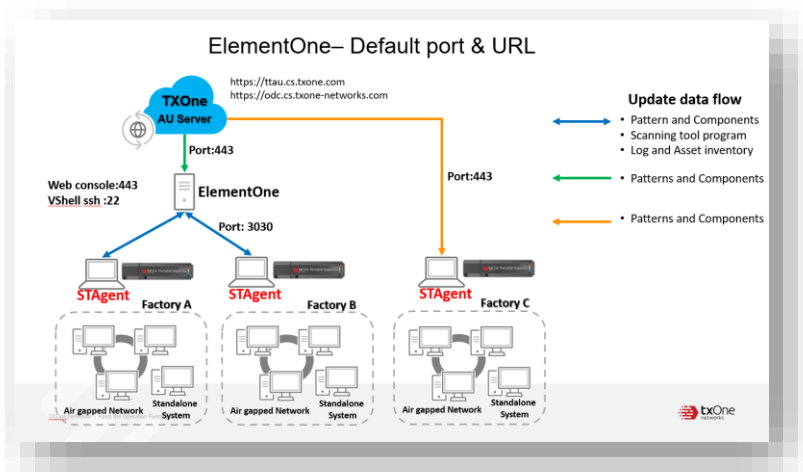
Items	Descriptions
Lab Case	Portable Inspector (PI) Factory Reset
Steps	1. Open the VM LabConsole. 2. Power on the VM LabConsole. Log in using the following credentials. User: txone Password: 12345678 3. Insert the Portable Inspector to the VM LabConsole 4. Copy the directories PI SYS:\SupportTool to the desktop.  If you have just done the 30x labs and you continue to use the same Portable Inspector device, then you can skip the following steps and jump to next Lab. 5. Go to the SupportTool\x64 directory and execute PISuprt.exe

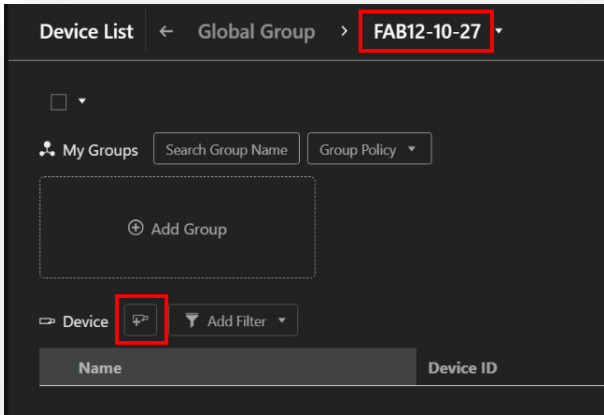
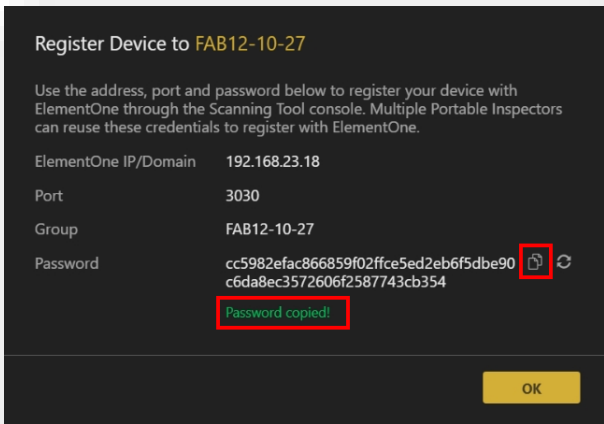
Items	Descriptions
	 6. Choose the tab “[B] More Tools”, then click “Reset Device”.  7. Select the “Default Factory Settings” option. 

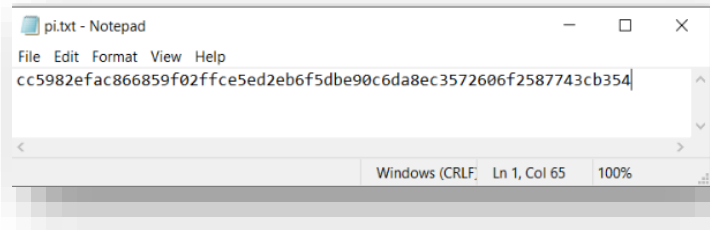
Items	Descriptions
	8. Check the “Finished saving the Activation Code” and click Yes.  9. The Diagnostic Toolkit will reset the Portable Inspector.  10. After a successful restore, the following window will pop-up.  11. Safely remove the Portable Inspector from the VM LabConsole
Expected Result	The Portable Inspector has successfully been restored to factory settings.

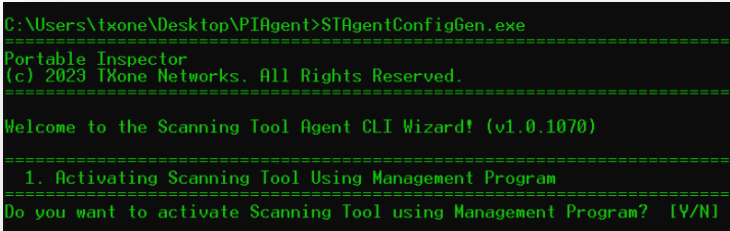


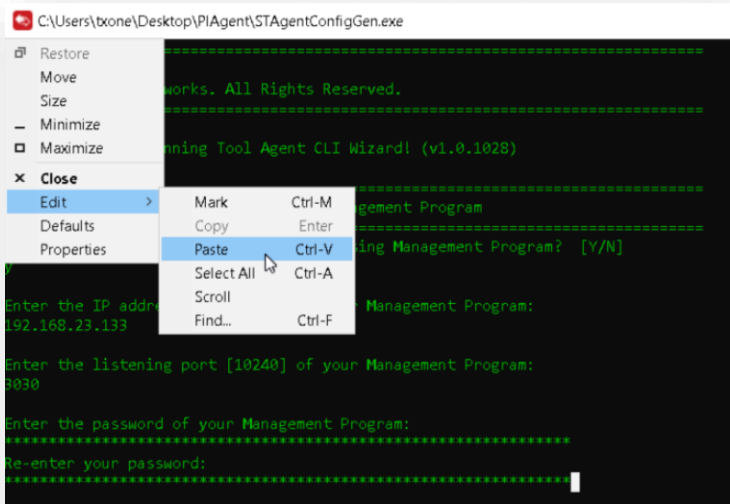
Lab2: Install the Scanning Tool agent with automatic components update.

Table 4 Install the Scanning Tool agent with automatic components update.

Items	Descriptions
Lab Case	The Scanning Tool agent provides “automatic components update” and “automatic log sync to ElementOne”. The OT operator simply inserts the Portable Inspector to the Scan Station and all logs will be uploaded to ElementOne and the latest pattern updates will be downloaded from ElementOne.
Steps	Purpose of the “Scan Station” - Portable Inspector automatic activation - Pattern and components update - Log and policies settings sync with ElementOne Scan Station architecture  The diagram illustrates the Scan Station architecture. At the top, the ElementOne AU Server is shown with default URLs: https://ttau.cs.txone.com and https://odc.cs.txone-networks.com. It connects to the ElementOne central unit via Port:443. The ElementOne unit has a Web console:443 and VShell ssh:22. It then connects to three Factories (A, B, C) via Port:3030. Each factory contains an STAgent and an Air gapped Network Standalone System. A legend on the right titled Update data flow shows: - Blue arrow: Pattern and Components, Scanning tool program, Log and Asset inventory - Green arrow: Patterns and Components - Orange arrow: Patterns and Components Lab Preparation ElementOne Group Policy Configuration 1. Navigate to the ElementOne web UI: https://192.168.23.18 2. Logon to web UI using following credentials. - User: admin - Password: 12345678

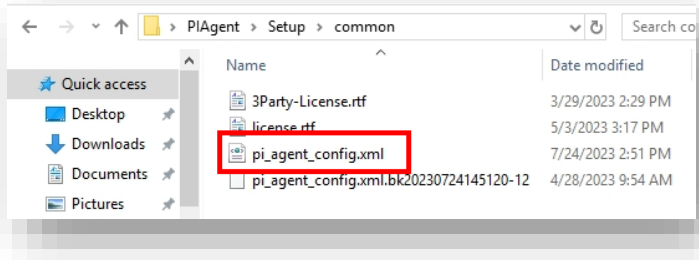
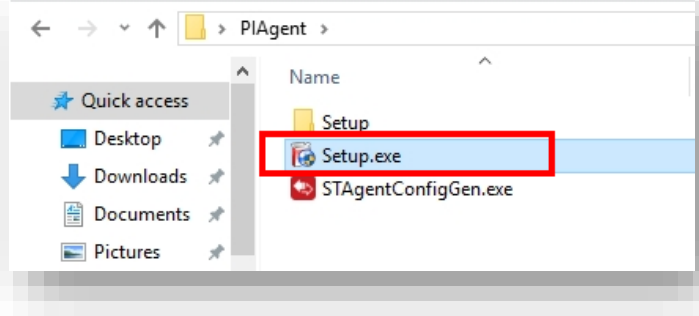
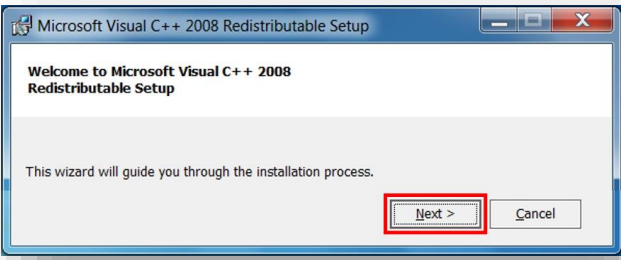
Items	Descriptions
	3. Create a group “FAB12-10-27” and configure the group policy. - Disable “Inherit policies from the parent group: Global Group”. - Scan Type: Specific folders - Path: C:\Users\txone\Desktop\Training 4. Go to Device Group “FAB12-10-27” and click “Add Portable Inspector” icon.  5. Click “Copy” icon to copy Password. ElementOne web UI will show that the password was copied. 

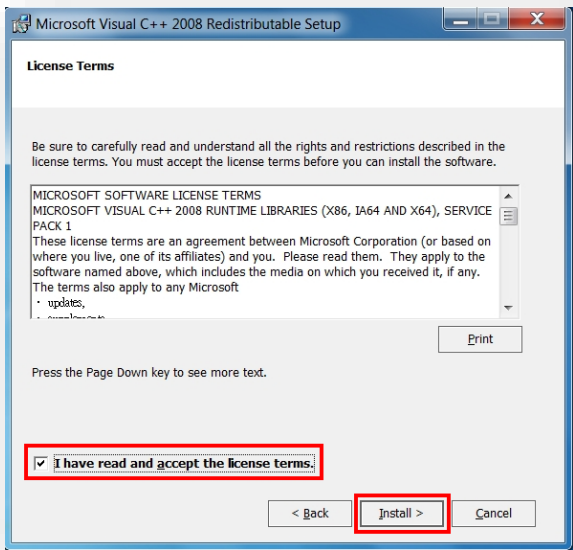
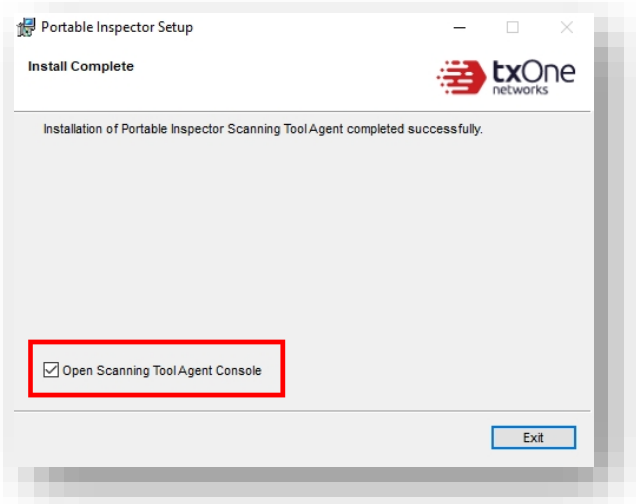
Items	Descriptions
	6. Save the Password in a text file.  Scan Station deployment (Scanning Tool Agent installation and configuration). This lab will turn the VM LabConsole into a Scan Station. For the “Management Program”, the lab will utilize ElementOne. 1. On the desktop of the LabConsole, 2. Copy PI SYS(F:) PIAgent directory to the desktop. 3. Copy the Portable Inspector registration password. 4. Launch the STAgentConfigGen.exe from PI agent folder to pre-configure the Agent settings. 

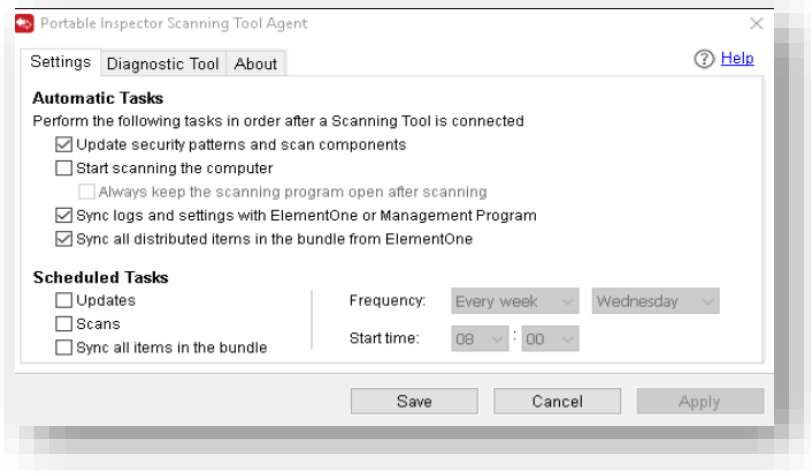
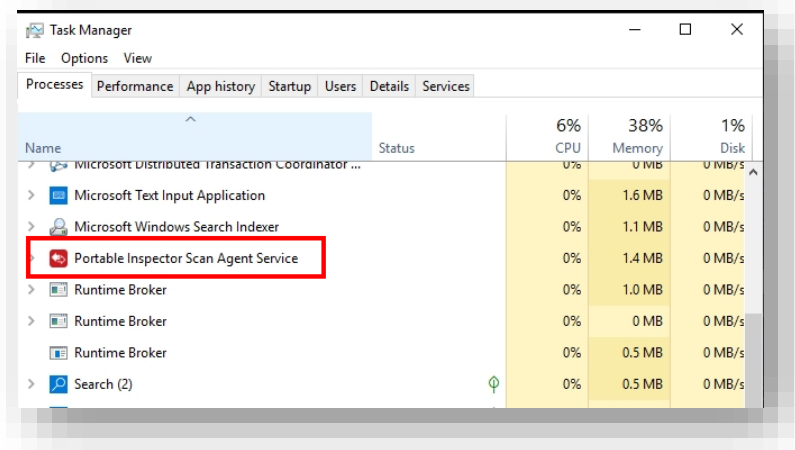
Items	Descriptions
	5. Answer “Y” to activate the Scanning Tool on the Management Program.  6. Specify the Management Program IP address: 192.168.23.18  7. Specify the Management Program listening port: 3030  8. Copy the Portable Inspector registration password from your text file and paste it here. 

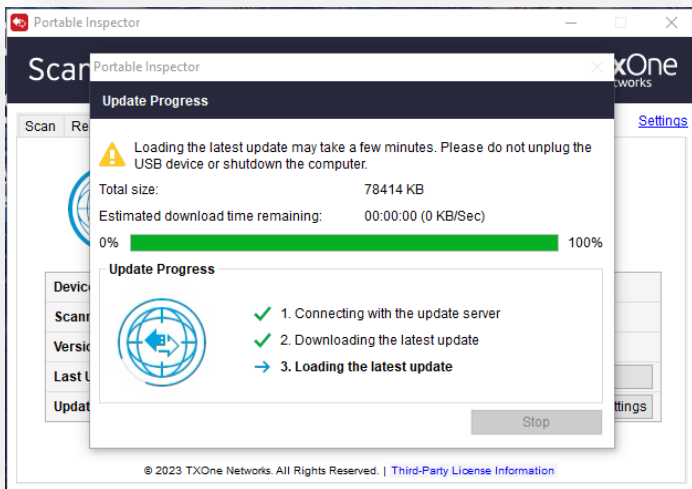
Items	Descriptions
	9. Answer “Y” for force to the activation of the Scanning Tool <pre>Do you want to force the activation of this Scanning Tool even though it has already been activated by another Management Program? [Y/N]</pre> 10. Confirm the settings. <pre>Activation Settings: IP or Hostname = 192.168.23.18 Listening Port = 3030 Password = 8***** Force the activation: [Yes] Confirm? [Y/N]</pre> 11. Configure Automatic Task Settings. Enable <Auto Scan>, <Auto Update>, <Auto Sync> and <Auto Sync SD>. Enter “C” for customize mode. <pre>2. Automatic Task Settings ===== Default Setting: <Auto Scan> [Disabled] Automatic scanning when PI is connected. <Auto Update> [Disabled] Automatic updating when PI is connected. <Auto Sync> [Disabled] Automatic log and setting sync with the Management Program when PI is connected. <Auto Sync SD> [Disabled] Automatic sd file sync with the Management Program when PI is connected. Customize[C]/Default[D]? _</pre> - <Auto Scan>: Disabled For best practice, it is recommended to enable the Auto Scan feature if the client is one of the assets. However, to simplify lab practices, the feature is disabled during the lab, as the computer's role is set to Scan Station. - <Auto Update>: Enabled - <Auto Sync>: Enabled

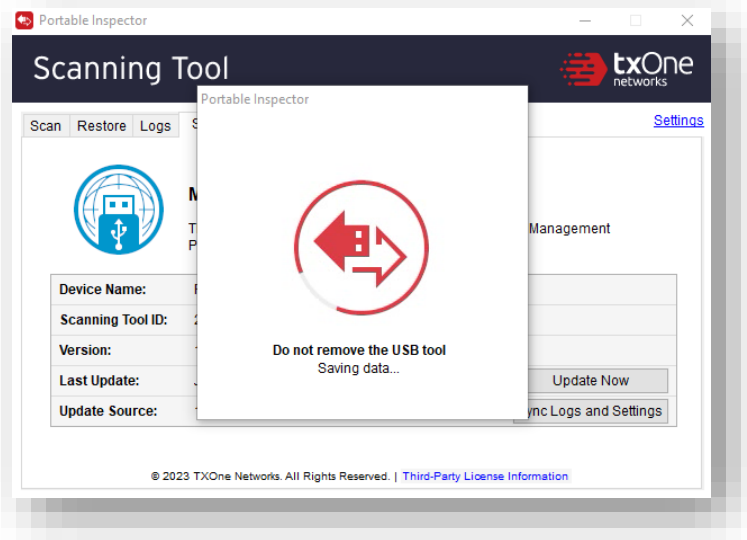
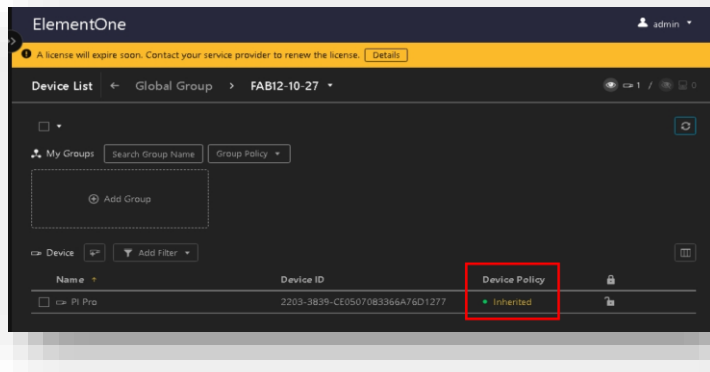
Items	Descriptions
	- <Auto Sync SD>: Enabled 12. Answer “Y” to confirm the settings. <pre> <Auto Scan> [Disabled] Automatic scanning when PI is connected. <Auto Update> [Enabled] Automatic updating when PI is connected. <Auto Sync> [Enabled] Automatic log and setting sync with the Management Program when PI is connected. <Auto Sync SD> [Enabled] Automatic sd file sync with the Management Program when PI is connected. Confirm? [Y/N] </pre> 13. Answer “D” and keep the default settings for the scheduled task. Unless the Portable Inspector (PI) remains continuously connected to the asset. <pre> 3. Scheduled Task Settings ===== = Default Setting: <Scheduled Update> [Disabled] <Scheduled Scan> [Disabled] <Scheduled Sync> [Disabled] <Scheduled SyncSD> [Disabled] <Scheduled> [None] Customize[C]/Default[D]? </pre> 14. Answer “Y” for the Final Confirmation. The CLI dialog box will close. <pre> 4. Final Confirmation ===== = Confirm your new settings before the wizard generates a new configuration file : Activation Settings: IP or Hostname = 192.168.23.18 Listening Port = 3030 Password = 8*****a Force the activation: [Yes] Automation Settings: <Auto Scan> [Disabled] Automatic scanning when PI is connected. <Auto Update> [Enabled] Automatic updating when PI is connected. <Auto Sync> [Enabled] Automatic log and setting sync with the Management Program when PI is connected. <Auto Sync SD> [Enabled] Automatic sd file sync with the Management Program when PI is connected. Schedule Settings: <Scheduled Update> [Disabled] <Scheduled Scan> [Disabled] <Scheduled Sync> [Disabled] <Scheduled SyncSD> [Disabled] <Scheduled> [None] Confirm? [Y/N] </pre>

Items	Descriptions
	15. The pre-configuration settings will be stored in the “pi_agent_config.xml” file, which is located in the folder Desktop\PIAgent\Setup\common  16. Launch Setup.exe to install the ST Agent and turn this VM into a “Scan Station”.  17. On older versions of the Scanning Tool, the installation program will install the Microsoft Visual C++ 2008 Redistributable package. From version 1.0.0.1026 and later, this is no longer required. Click “Next” 

Items	Descriptions
	18. Accept the EULA and click “Install”  19. After the installation has completed, the Scanning Tool will start a scan. Select: Open Sanning Tool Agent Console  20. Review the settings. Those should match the pre-configuration settings. (so, basically, you could have skipped the STAgentConfigGen.exe and made your changes directly here) Click “Save”

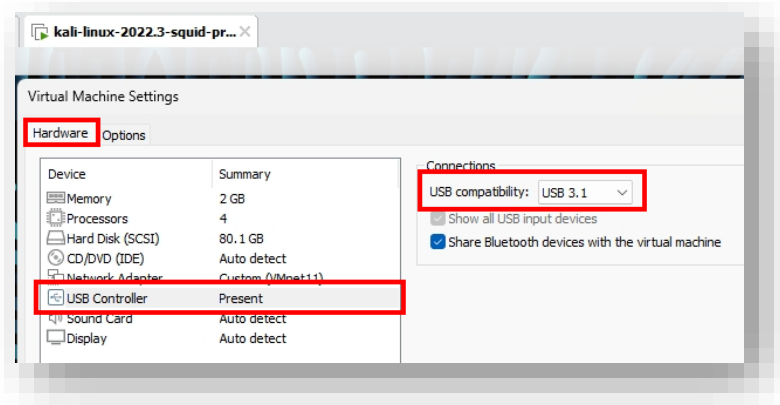
Items	Descriptions																																													
	 21. Check the process list in the windows Task Manager. There should be a process name “PIAgentService.exe”. This confirms that the ST Agent is running.  <table><tr><th>Name</th><th>Status</th><th>CPU</th><th>Memory</th><th>Disk</th></tr><tr><td>Microsoft Distributed Transaction Coordinator ...</td><td></td><td>0%</td><td>0 MB</td><td>0 MB/s</td></tr><tr><td>Microsoft Text Input Application</td><td></td><td>0%</td><td>1.6 MB</td><td>0 MB/s</td></tr><tr><td>Microsoft Windows Search Indexer</td><td></td><td>0%</td><td>1.1 MB</td><td>0 MB/s</td></tr><tr><td>Portable Inspector Scan Agent Service</td><td></td><td>0%</td><td>1.4 MB</td><td>0 MB/s</td></tr><tr><td>Runtime Broker</td><td></td><td>0%</td><td>1.0 MB</td><td>0 MB/s</td></tr><tr><td>Runtime Broker</td><td></td><td>0%</td><td>0 MB</td><td>0 MB/s</td></tr><tr><td>Runtime Broker</td><td></td><td>0%</td><td>0.5 MB</td><td>0 MB/s</td></tr><tr><td>Search (2)</td><td></td><td>0%</td><td>0.5 MB</td><td>0 MB/s</td></tr></table>	Name	Status	CPU	Memory	Disk	Microsoft Distributed Transaction Coordinator ...		0%	0 MB	0 MB/s	Microsoft Text Input Application		0%	1.6 MB	0 MB/s	Microsoft Windows Search Indexer		0%	1.1 MB	0 MB/s	Portable Inspector Scan Agent Service		0%	1.4 MB	0 MB/s	Runtime Broker		0%	1.0 MB	0 MB/s	Runtime Broker		0%	0 MB	0 MB/s	Runtime Broker		0%	0.5 MB	0 MB/s	Search (2)		0%	0.5 MB	0 MB/s
Name	Status	CPU	Memory	Disk																																										
Microsoft Distributed Transaction Coordinator ...		0%	0 MB	0 MB/s																																										
Microsoft Text Input Application		0%	1.6 MB	0 MB/s																																										
Microsoft Windows Search Indexer		0%	1.1 MB	0 MB/s																																										
Portable Inspector Scan Agent Service		0%	1.4 MB	0 MB/s																																										
Runtime Broker		0%	1.0 MB	0 MB/s																																										
Runtime Broker		0%	0 MB	0 MB/s																																										
Runtime Broker		0%	0.5 MB	0 MB/s																																										
Search (2)		0%	0.5 MB	0 MB/s																																										

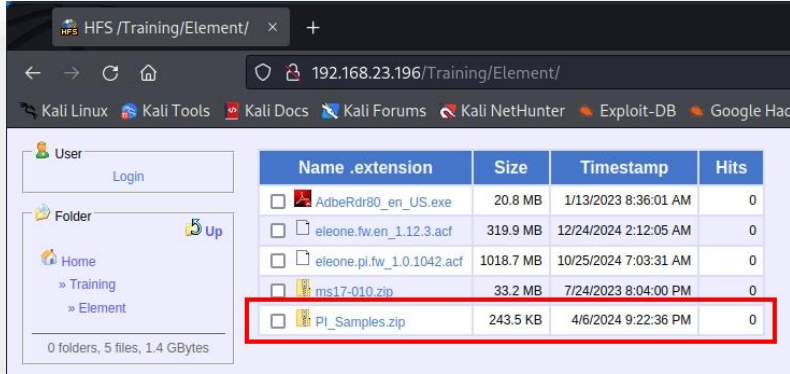
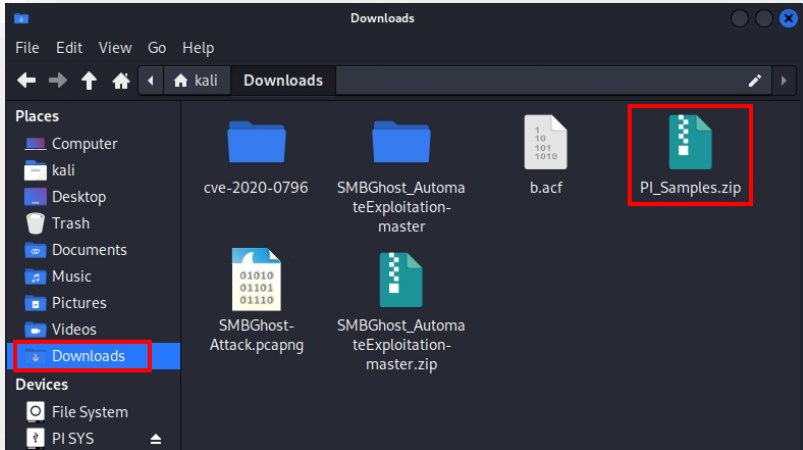
Items	Descriptions
	Portable Inspector Activation, update and sync settings  1. Insert the Portable Inspector to the Scan Station (the VM LabConsole). 1. The Drives (E: and F:) will open. 2. You may close those windows to get a clearer view on the desktop. 3. After about 10 to 20 seconds, the Portable Inspector will be activated automatically; It will then download updates and sync its Policy settings from ElementOne. 4. Then the Scanning Tool will close and open again to process the updates  5. Then the Portable Inspector will show the “Do not remove the USB tool” message. The Scanning Tool Utility will be closed after update task is completed.

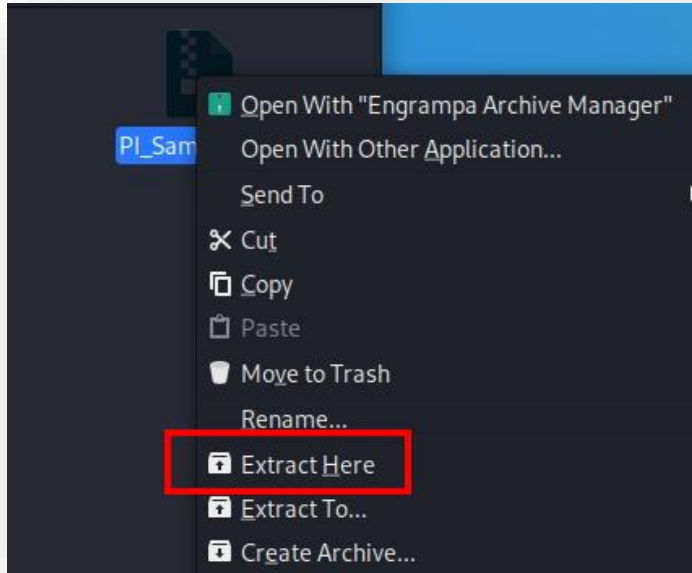
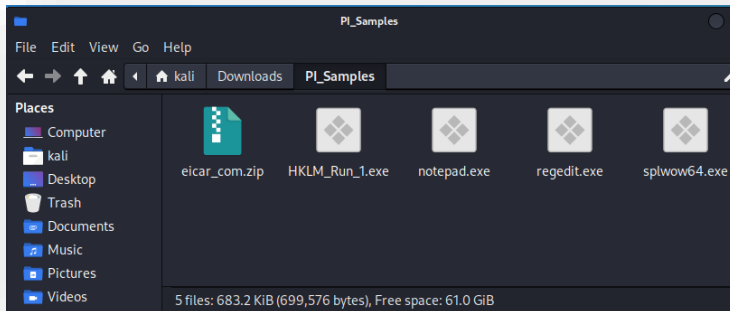
Items	Descriptions
	 6. Remove the Portable Inspector from the VM LabConsole. 7. Navigate to the ElementOne web UI. 8. Go to the Device List > Group "FAB12-10-27". 9. Verify the Portable Inspector / Portable Inspector Pro that you registered to the ElementOne that policy settings is synced with Portable Inspector already. 
Expected Result	Scanning Tool Agent deployed and performed automatic tasks successfully.

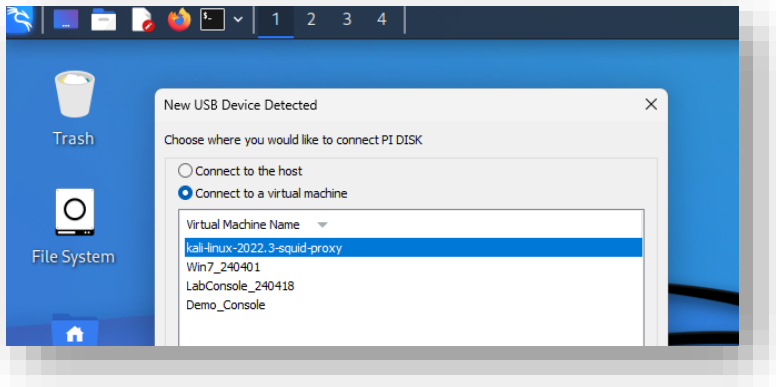
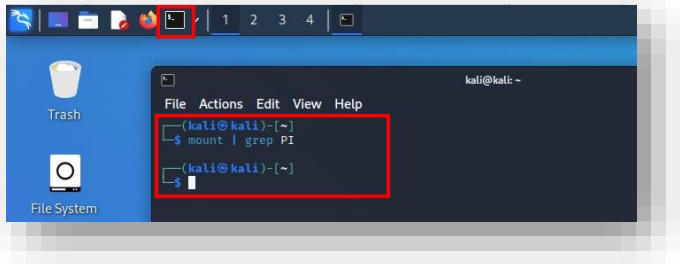
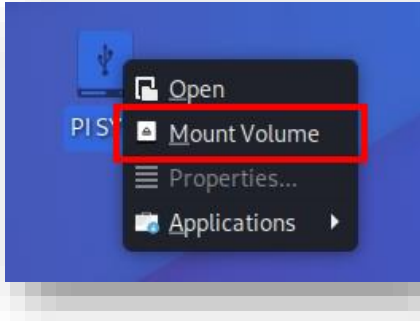
Lab3: Scan a Linux File System with the Scanning Tool

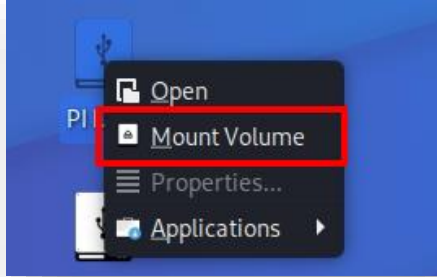
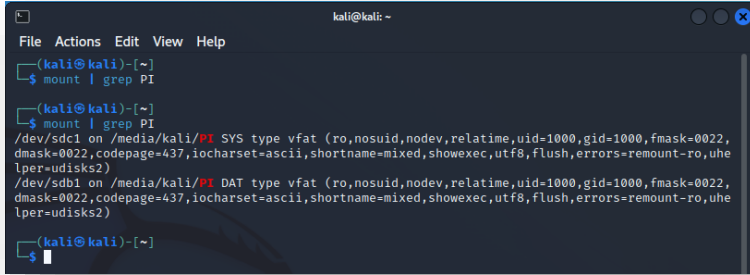
Table 5 Scan a Linux File System with the Scanning Tool

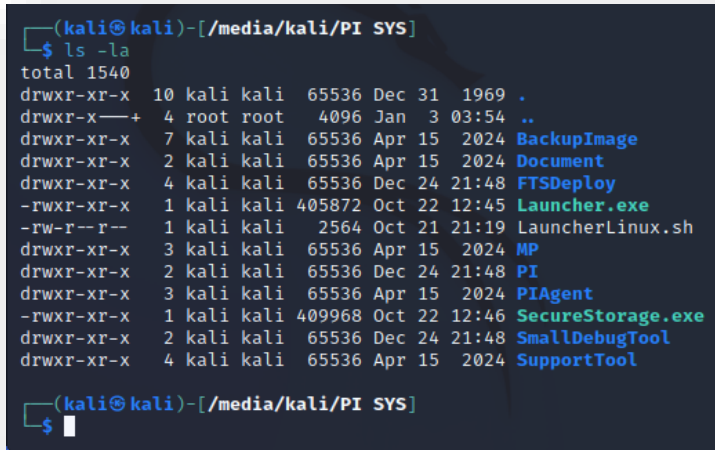
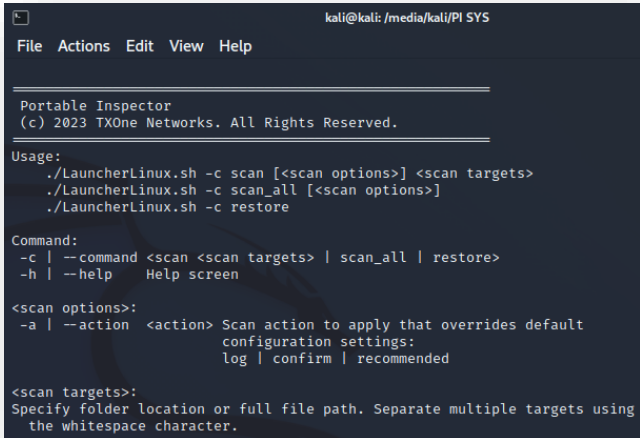
Items	Descriptions
Steps	1. Open the VM Kali-linux-20XX 2. Go to Edit Virtual Machine Settings > USB Controller > set it USB Compatibility to 3.1. This is only required because we are working with Virtual Machines. The Portable Inspector supports USB 1.0 to USB 3.1. Click OK to save
	 3. Power on the Kali Linux VM. You can ignore any potential warnings about “side-channel mitigations enabled”. If you get a warning “Cannot connect the virtual device sata0:1”, you can click “No” to prevent it from attempting to reload next time. 4. Login as user kali with password kali 5. (re-) insert the Portable Inspector to your host computer

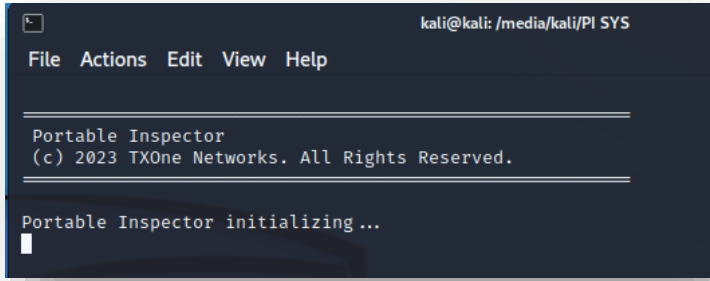
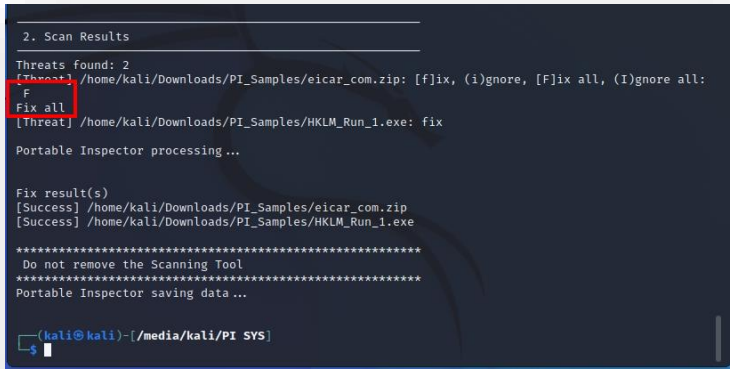
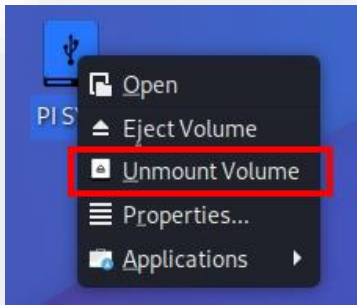
Items	Descriptions
	6. Launch the Firefox browser. Go to the web server http://192.168.23.196. Download the PI_Samples.zip file from the web folder Training\Element to the VM Kali Linux Home\Downloads folder  

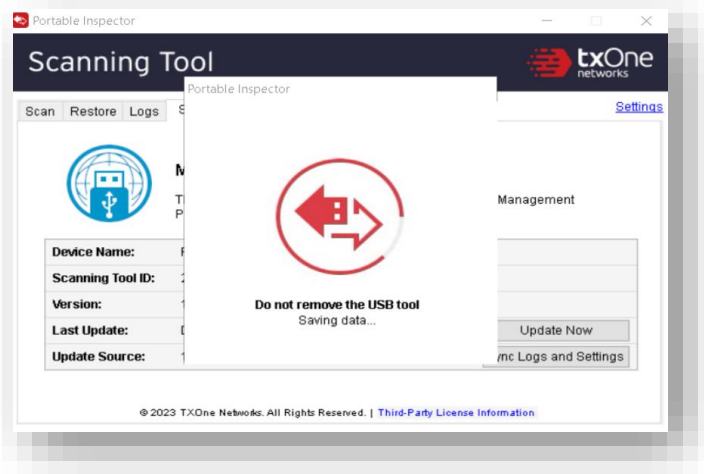
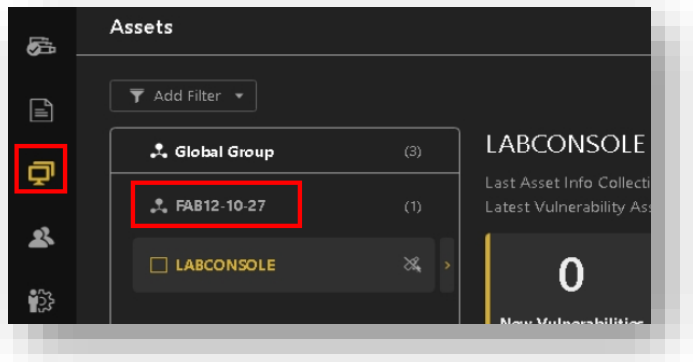
Items	Descriptions
	7. Right-click the file PI_Samples.zip, Extract Here and enter the password: virus.  8. There are 5 files in the folder PI_Samples. 

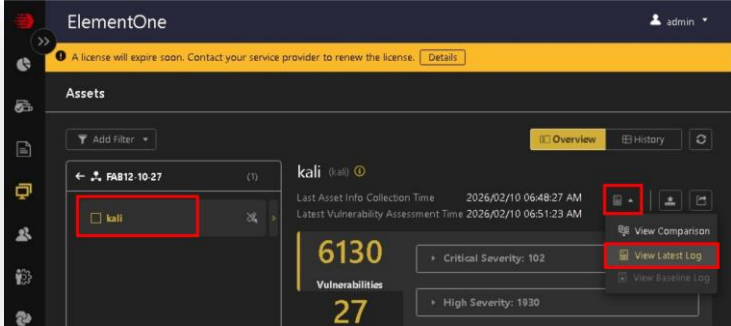
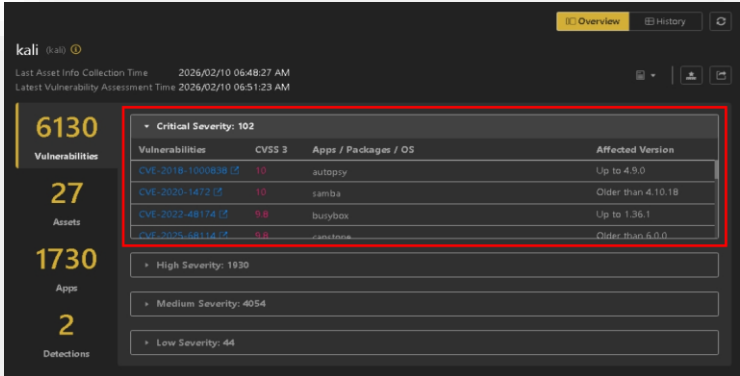
Items	Descriptions
	9. Connect the PI to the VM Kali Linux.  10. Check if the Portable Inspector has mounted. Open a terminal and type the following command: <pre>mount grep PI</pre>  11. If there is no Portable Inspector mounted to Kali. Right-click on the PI SYS shortcut on the desktop, select the Mount Volume option. 

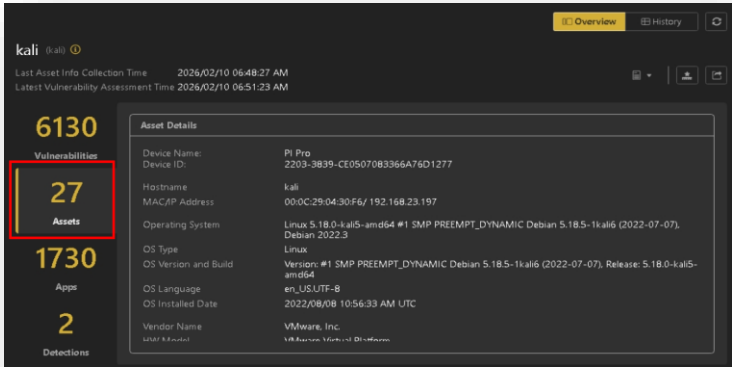
Items	Descriptions
	12. Right-click on the PI DAT shortcut on the desktop, select the Mount Volume option  13. Open a terminal and execute the command <pre>mount grep PI</pre> 14. There should be two mounts under <code>/media/kali</code>  15. <code>cd /media/kali/PI\ SYS/</code> (the backslash is needed to escape the space in the name of the subdirectory) 16. Type <code>ls -la</code> to display the contents of the subdirectory

Items	Descriptions
	 <pre> (kali@kali)-[/media/kali/PI SYS] \$ ls -la total 1540 drwxr-xr-x 10 kali kali 65536 Dec 31 1969 . drwxr-xr-x+ 4 root root 4096 Jan 3 03:54 .. drwxr-xr-x 7 kali kali 65536 Apr 15 2024 BackupImage drwxr-xr-x 2 kali kali 65536 Apr 15 2024 Document drwxr-xr-x 4 kali kali 65536 Dec 24 21:48 FTSDeploy -rwxr-xr-x 1 kali kali 405872 Oct 22 12:45 Launcher.exe -rw-r--r-- 1 kali kali 2564 Oct 21 21:19 LauncherLinux.sh drwxr-xr-x 3 kali kali 65536 Apr 15 2024 MP drwxr-xr-x 2 kali kali 65536 Dec 24 21:48 PI drwxr-xr-x 3 kali kali 65536 Apr 15 2024 PIAGENT -rwxr-xr-x 1 kali kali 409968 Oct 22 12:46 SecureStorage.exe drwxr-xr-x 2 kali kali 65536 Dec 24 21:48 SmallDebugTool drwxr-xr-x 4 kali kali 65536 Apr 15 2024 SupportTool </pre>
17.	Start the linux launcher as root in a separate “sh” shell ● <code>sudo sh ./LauncherLinux.sh</code>
18.	This will give you a screen with the command-line parameters that you can use.  <pre> kali@kali: /media/kali/PI SYS File Actions Edit View Help Portable Inspector (c) 2023 TXOne Networks. All Rights Reserved. Usage: ./LauncherLinux.sh -c scan [<scan options>] <scan targets> ./LauncherLinux.sh -c scan_all [<scan options>] ./LauncherLinux.sh -c restore Command: -c --command <scan <scan targets> scan_all restore> -h --help Help screen <scan options>: -a --action <action> Scan action to apply that overrides default configuration settings: log confirm recommended <scan targets>: Specify folder location or full file path. Separate multiple targets using the whitespace character. </pre>

Items	Descriptions
	19. Start a scan of your home directory by entering: <pre>sudo sh ./LauncherLinux.sh -c scan /home/kali</pre>  20. Once the scan is completed, the results will be displayed. Two threats will be identified, prompting for action. Enter “F” to fix all threats.  21. Disconnect the Portable Inspector for the VM Kali. Unmount Volume of PI SYS and PI DAT 

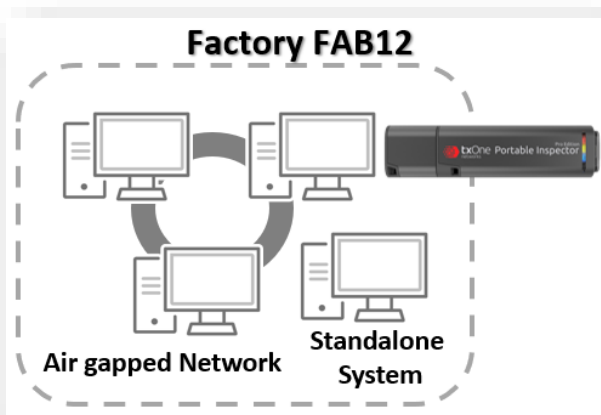
Items	Descriptions
	22. Insert it in the ScanStation that you have setup in the previous lab (LabConsole VM) 23. You will see that a file-browser window for PI SYS and PI DAT will open. Minimize those windows and wait. The Scanning Tool will be launched from the Portable Inspector and after 30 seconds it will begin to synchronize the logs to the “update server” which is ElementOne.  24. Navigate to the ElementOne web console. 25. Go to Assets > Group “FAB12-10-27”. 

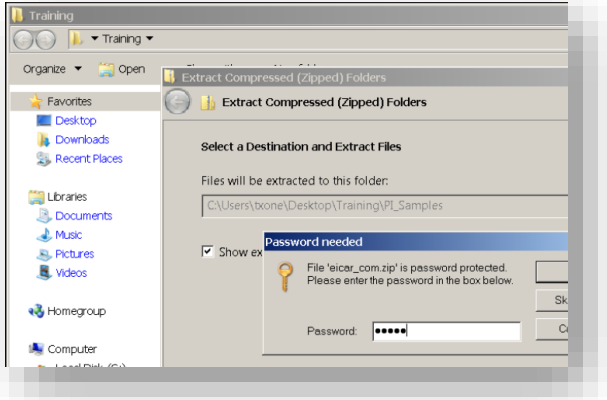
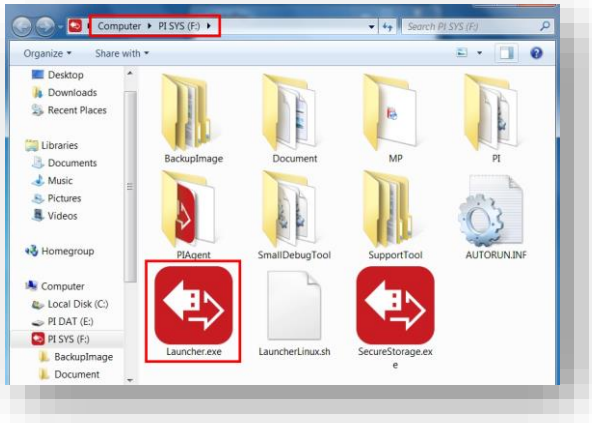
Items	Descriptions
	26. Select the Asset “kali”. 27. Switch the view to “View Latest Log”.  28. Verify the vulnerabilities. This is an unpatched Linux system that has lots of critical vulnerabilities. 

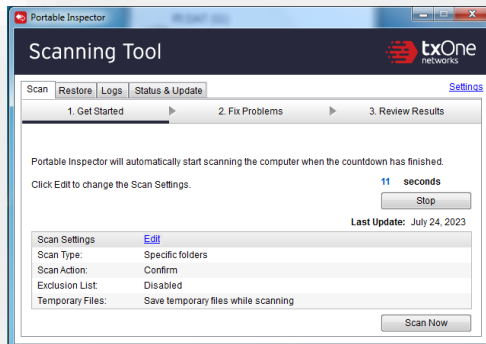
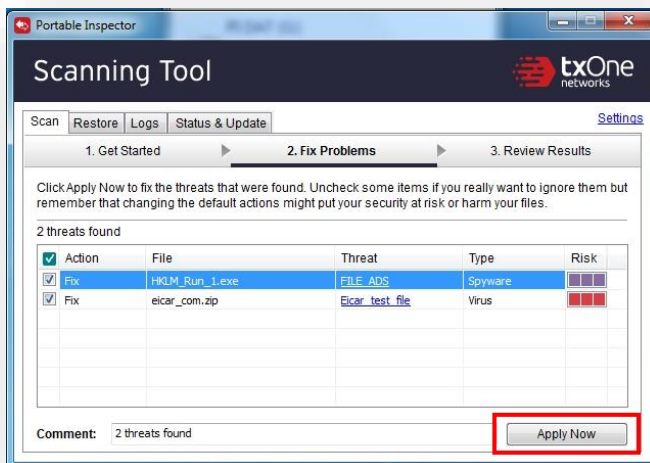
Items	Descriptions
	29. Also take a look at the Asset Details and the Application Info  The screenshot shows the txOne interface for a device named 'kali'. On the left sidebar, there are four categories: Vulnerabilities (6130), Assets (27, highlighted with a red box), Apps (1730), and Detections (2). The main area displays 'Asset Details' for a device named 'Pi Pro'. The details include: Device Name: Pi Pro, Device ID: 2203-3839-CE0507083366A76D1277, Hostname: kali, MAC/IP Address: 00:0C:29:04:30:F6 / 192.168.23.197, Operating System: Linux 5.18.0-kali5-amd64 #1 SMP PREEMPT_DYNAMIC Debian 5.18.5-1kali6 (2022-07-07), Debian 2022.3, OS Type: Linux, OS Version and Build: Version: #1 SMP PREEMPT_DYNAMIC Debian 5.18.5-1kali6 (2022-07-07), Release: 5.18.0-kali5-amd64, OS Language: en_US.UTF-8, OS Installed Date: 2022/08/08 10:56:33 AM UTC, and Vendor Name: VMware, Inc. (VMware Workstation 18.0.0).
Expected Result	■ The Portable Inspector successfully scanned the Kali Linux system, detected threats, and fixed them

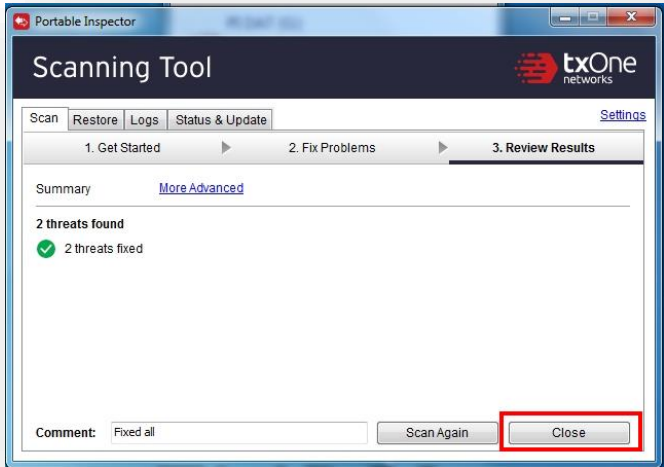
Lab4: Security Inspection for new OT equipment

Table 6 Security Inspection for new OT equipment

Items	Descriptions
Lab Case	Before using new equipment in production, we need to check it for malware 1. It must be free of malware 2. MS17-010 vulnerabilities must be patched
Steps	Security Inspection  Preparation for Security Inspection (First-time initialization only) The Win7 VM acts as the new OT Equipment. 1. Open the Win7 VM and log in using the following credentials: User: txone Password: 12345678 2. Create a folder “Training” on top of Desktop 3. Launch IE browser and go to http://192.168.23.196 4. Download the PI_Samples.zip from Element web folder and save it to Training folder

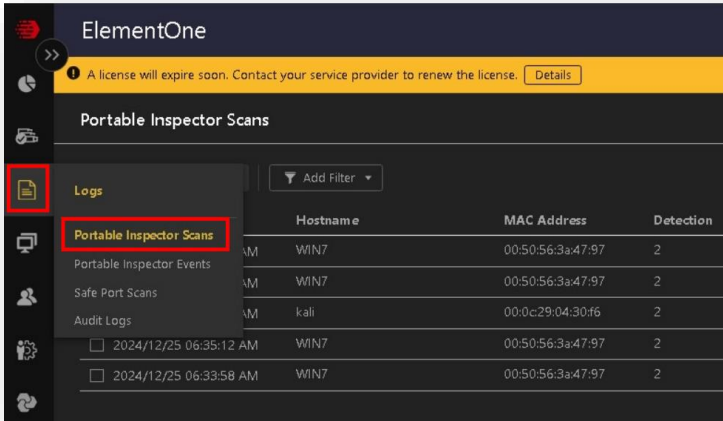
Items	Descriptions
	5. Right-click on PI_Samples.zip and select "Extract All". Extract the files to the Training folder on the desktop. The unzip password is "virus"  6. Insert the Portable Inspector and connect it to the Win7 VM 7. Execute the Launcher.exe from the PI SYS:  8. Click on "Stop" to stop the counter 9. Click on Edit and verify that the "Scan Type" is set to "Specific Folders". The folder should be: c:\Users\txone\Desktop\Training. Those are the settings of the "FAB12-10-27" Group in ElementOne. If they do not match, go to "Status & Update" and click "Sync Logs and Settings"

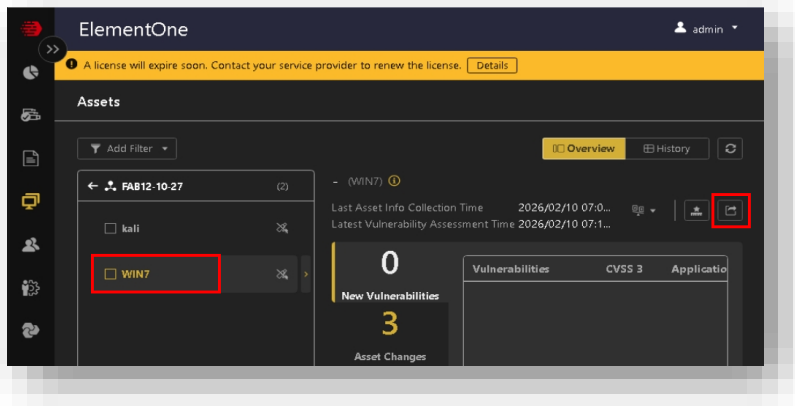
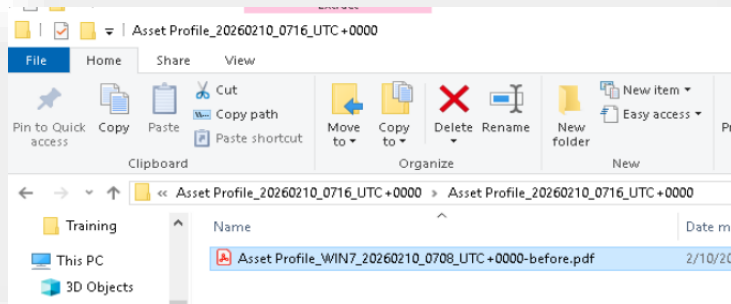
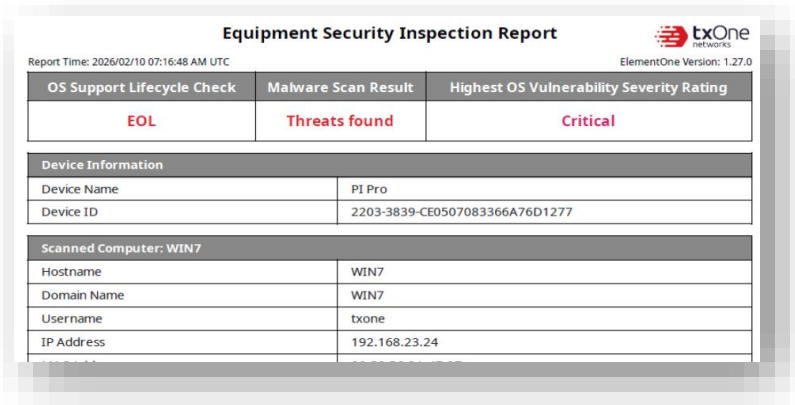
Items	Descriptions
	10. Click “Scan Now” to start the scan  11. The Portable Inspector LED will show RED if malware is found .  12. Click “Apply Now” to fix the malware issues 

Items	Descriptions
	13. Portable Inspector turns to GREEN when the issue has been fixed  14. Click on the “Close” button  15. Remove the Portable Inspector from the Win7 VM 16. Log in to the Scan Station (The VM LabConsole) 17. Insert the Portable Inspector to the Scan Station 18. The Portable Inspector will sync the logs to ElementOne and get the pattern updates from ElementOne automatically
Expected Result	The Portable Inspector perform the security inspection task and detected the Malware

Lab5: Vulnerability assessment of new OT equipment

Table 7 Vulnerability assessment of new OT equipment

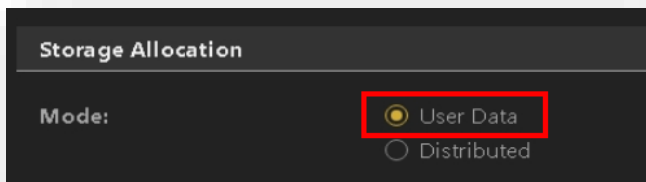
Items	Descriptions
Lab Case	The Portable Inspector does not only scan for malware, but also builds an inventory of installed applications and Windows patches. Together with ElementOne, it will perform a Windows OS vulnerability assessment. You can check the vulnerabilities in the “Equipment Security Inspection Report” which is created by ElementOne. If the MS17-010 vulnerability is found, the system is vulnerable to the following CVEs CVE-2017-0143 CVE-2017-0144 CVE-2017-0145 CVE-2017-0146 CVE-2017-0148
Steps	View the scan log from ElementOne web UI - Navigate to the ElementOne web UI. - Go to Logs > Portable Inspector Scans and verify the scan log which synchronized from the Portable Inspector.  Equipment Security Inspection Report Generation - Go to Assets - Select the Asset Win7 under the group “FAB12-10-27”.

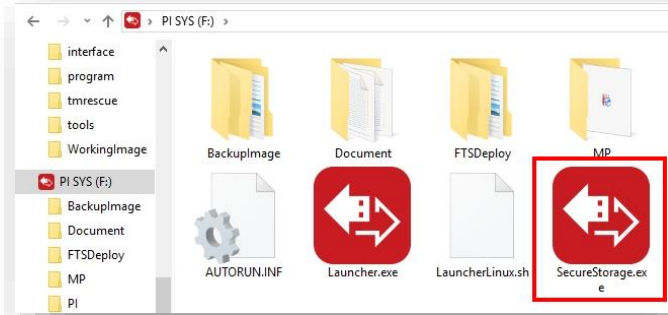
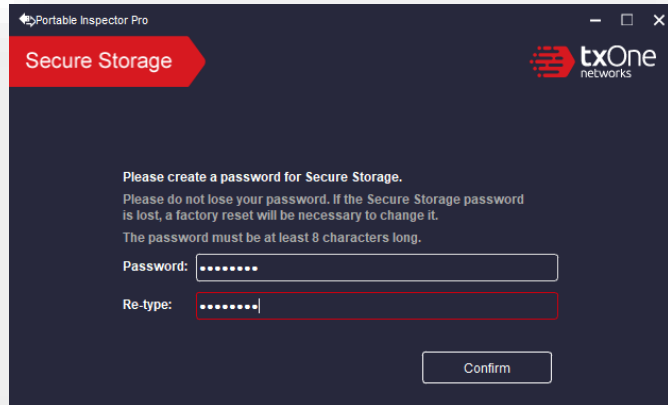
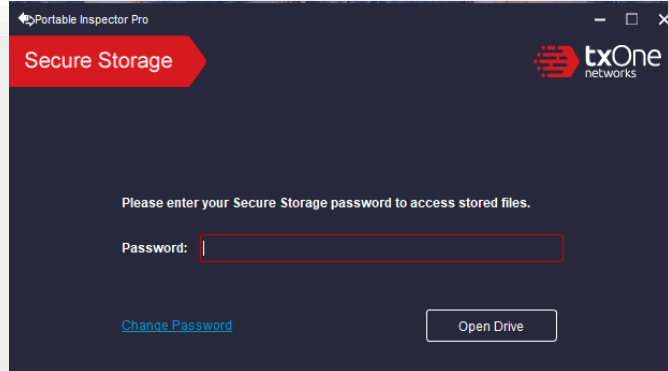
Items	Descriptions
	5. Click on the “Export” icon on the right-upper corner.  6. Unzip the report “Asset Profile....zip” 7. Rename the downloaded file to the “Asset Profile_WIN7_xxxxxxxxx (date)_xxxx (time) _UTC+0000-before.pdf”.  8. Read the Equipment Security Inspection Report from the download folder. 

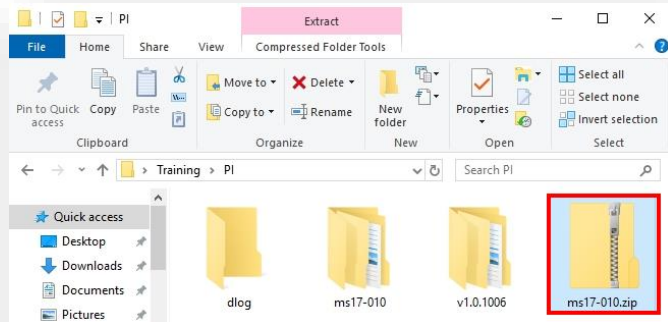
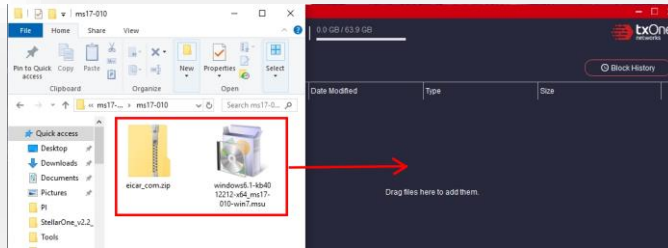
Items	Descriptions																																		
	9. Search for the CVEs related to ms17-010 (CVE-2017-0143, CVE-2017-0144, CVE-2017-0145 and CVE-2017-0146). 10. The new equipment is vulnerable. It requires patching before onboarding. <table><tr><td>149</td><td>CVE-2017-0143</td><td>High</td><td>2017/03/17 12:59:03 AM UTC</td><td>8.8</td><td>Windows 7 for x64-based Systems Service Pack 1</td><td>-</td><td>Update to Version 6.1.7601.26321 or install the required updates from the Microsoft Update Catalog: KB5022338, KB5022339</td></tr><tr><td>150</td><td>CVE-2017-0144</td><td>High</td><td>2017/03/17 12:59:04 AM UTC</td><td>8.8</td><td>Windows 7 for x64-based Systems Service Pack 1</td><td>-</td><td>Update to Version 6.1.7601.26321 or install the required updates from the Microsoft Update Catalog: KB5022338, KB5022339</td></tr></table> <table><tr><td>151</td><td>CVE-2017-0145</td><td>High</td><td>2017/03/17 12:59:04 AM UTC</td><td>8.8</td><td>Windows 7 for x64-based Systems Service Pack 1</td><td>-</td><td>Update to Version 6.1.7601.26321 or install the required updates from the Microsoft Update Catalog: KB5022338, KB5022339</td></tr><tr><td>152</td><td>CVE-2017-0146</td><td>High</td><td>2017/03/17 12:59:04 AM UTC</td><td>8.8</td><td>Windows 7 for x64-based Systems Service Pack 1</td><td>-</td><td>Update to Version 6.1.7601.26321 or install the required updates from the Microsoft Update Catalog: KB5022338, KB5022339</td></tr></table> <tr><td>Expected Result</td><td>Equipment Security Inspection Report generated from ElementOne. New equipment checked for malware and Windows OS vulnerabilities.</td></tr>	149	CVE-2017-0143	High	2017/03/17 12:59:03 AM UTC	8.8	Windows 7 for x64-based Systems Service Pack 1	-	Update to Version 6.1.7601.26321 or install the required updates from the Microsoft Update Catalog: KB5022338, KB5022339	150	CVE-2017-0144	High	2017/03/17 12:59:04 AM UTC	8.8	Windows 7 for x64-based Systems Service Pack 1	-	Update to Version 6.1.7601.26321 or install the required updates from the Microsoft Update Catalog: KB5022338, KB5022339	151	CVE-2017-0145	High	2017/03/17 12:59:04 AM UTC	8.8	Windows 7 for x64-based Systems Service Pack 1	-	Update to Version 6.1.7601.26321 or install the required updates from the Microsoft Update Catalog: KB5022338, KB5022339	152	CVE-2017-0146	High	2017/03/17 12:59:04 AM UTC	8.8	Windows 7 for x64-based Systems Service Pack 1	-	Update to Version 6.1.7601.26321 or install the required updates from the Microsoft Update Catalog: KB5022338, KB5022339	Expected Result	Equipment Security Inspection Report generated from ElementOne. New equipment checked for malware and Windows OS vulnerabilities.
149	CVE-2017-0143	High	2017/03/17 12:59:03 AM UTC	8.8	Windows 7 for x64-based Systems Service Pack 1	-	Update to Version 6.1.7601.26321 or install the required updates from the Microsoft Update Catalog: KB5022338, KB5022339																												
150	CVE-2017-0144	High	2017/03/17 12:59:04 AM UTC	8.8	Windows 7 for x64-based Systems Service Pack 1	-	Update to Version 6.1.7601.26321 or install the required updates from the Microsoft Update Catalog: KB5022338, KB5022339																												
151	CVE-2017-0145	High	2017/03/17 12:59:04 AM UTC	8.8	Windows 7 for x64-based Systems Service Pack 1	-	Update to Version 6.1.7601.26321 or install the required updates from the Microsoft Update Catalog: KB5022338, KB5022339																												
152	CVE-2017-0146	High	2017/03/17 12:59:04 AM UTC	8.8	Windows 7 for x64-based Systems Service Pack 1	-	Update to Version 6.1.7601.26321 or install the required updates from the Microsoft Update Catalog: KB5022338, KB5022339																												
Expected Result	Equipment Security Inspection Report generated from ElementOne. New equipment checked for malware and Windows OS vulnerabilities.																																		

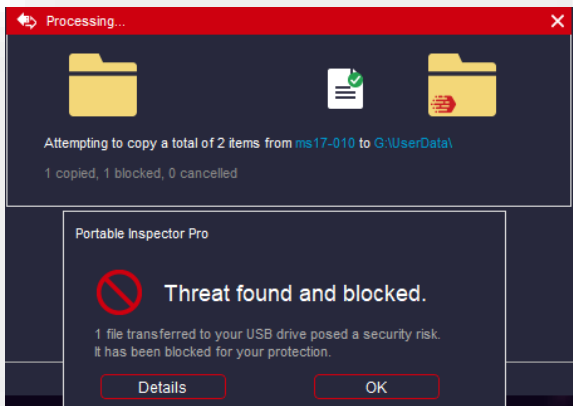
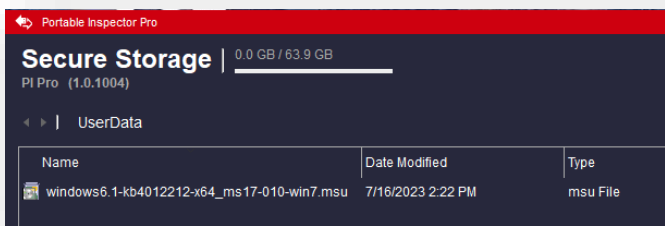

Lab6: Secure Storage for end-to-end data integrity

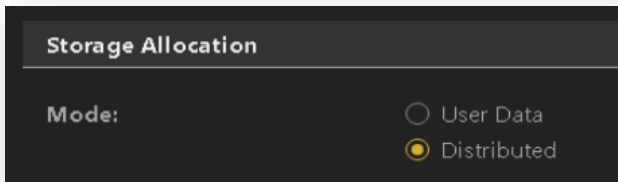
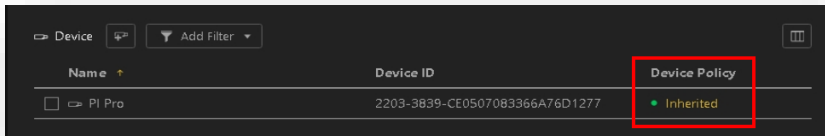
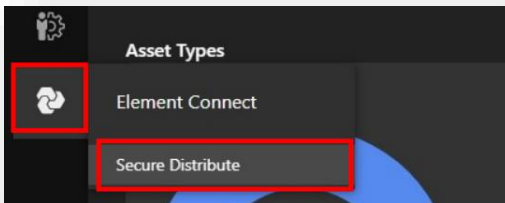
Table 8 Secure Storage for end-to-end data integrity

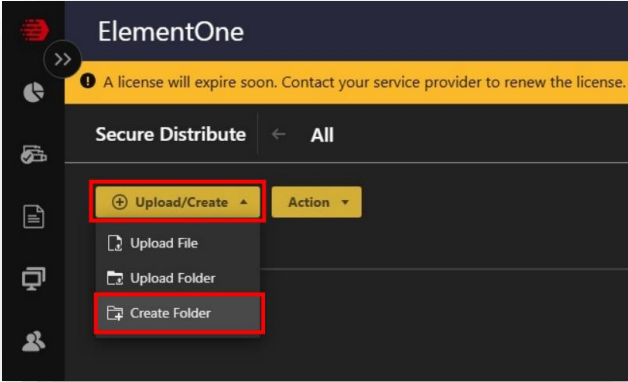
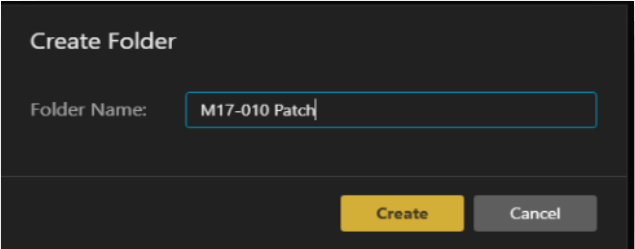
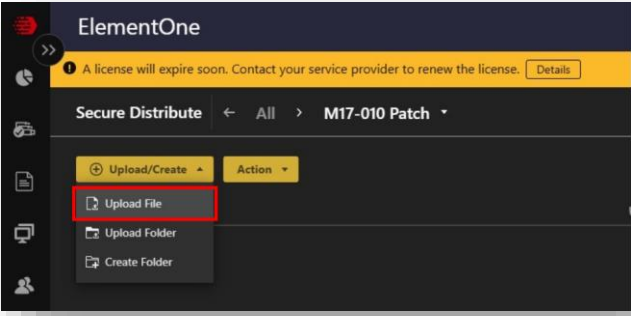
Items	Descriptions
Lab Case	In the previous lab, we detected MS17-010 vulnerabilities on new OT equipment. Now, we will use the Secure Storage feature of the Portable Inspector Pro to transfer the MS17-010 patch files to Win7 VM. Secure Storage will scan the patch files for malware when they are copied, to ensure the patch files are malware free. This will provide end-to-end file integrity. (Optional) After the patch has been applied, scan the VM again and check the “Equipment Security Inspection Report” again. Verify that all the MS17-010 vulnerabilities are fixed.
Steps	Element Connect User Mode Secure Storage Initialization 1. Go to the LabConsole VM. 2. Open the ElementOne web UI. 3. Verify that the device policy for group “FAB12-10-27” has Storage Allocation set to “User Data” mode.  4. Logon to Win7 VM. 5. Connect Portable Inspector Pro to Win7 VM. 6. Execute the SecureStorage.exe utility from Portable Inspector Pro.

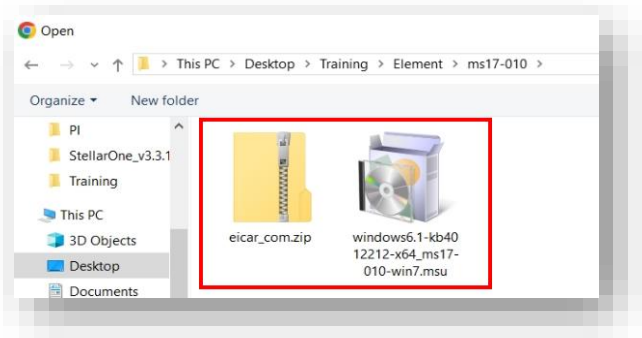
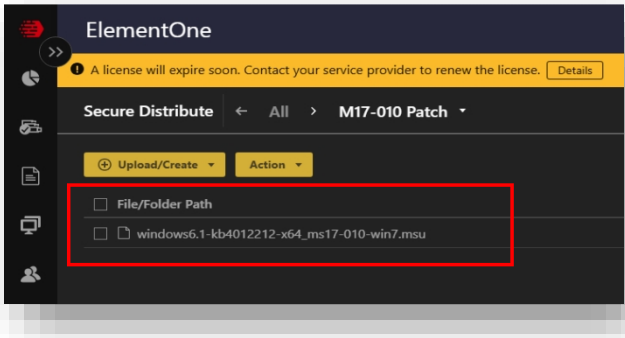
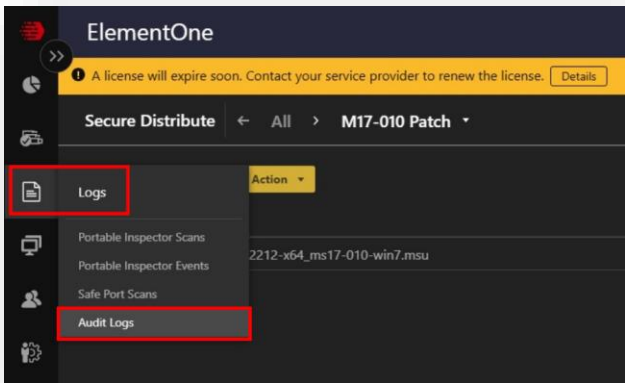
Items	Descriptions
	 7. Create a password 12345678 for Secure Storage. 8. Click “Confirm”.  9. Log in to Secure Storage with the new password. 

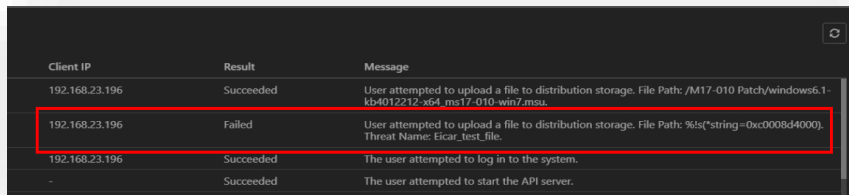
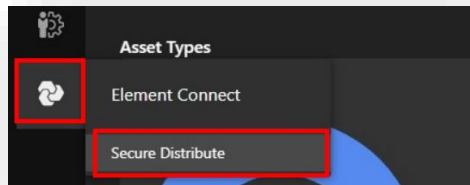
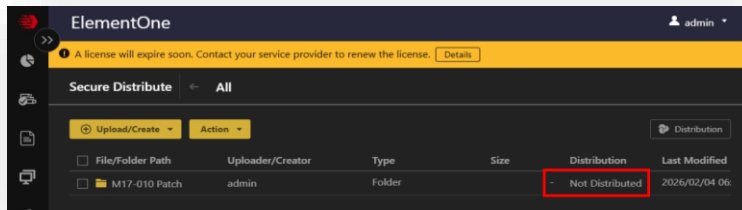
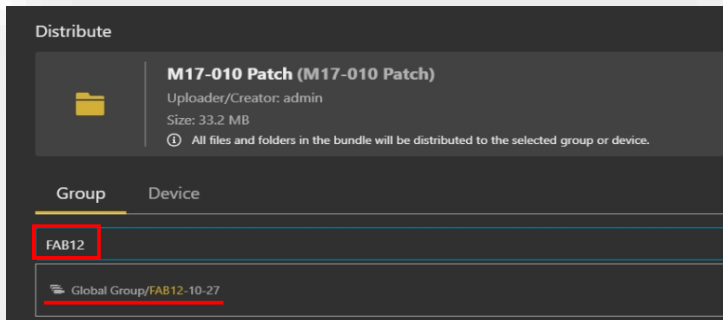
Items	Descriptions
	10. Download file ms17-010.zip from web server (LabConsole). 11. Go to the folder C:\Users\txone\Desktop\Training\Element. 12. Extract the zip file ms17-010.zip with the password virus.  13. Select all files in the ms17-010 folder, drag and drop them to the Secure Storage.  14. Portable Inspector Pro automatically scans all files transferred to the Secure Storage for malware. 

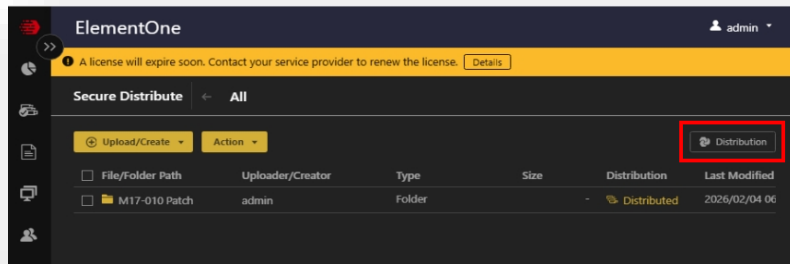
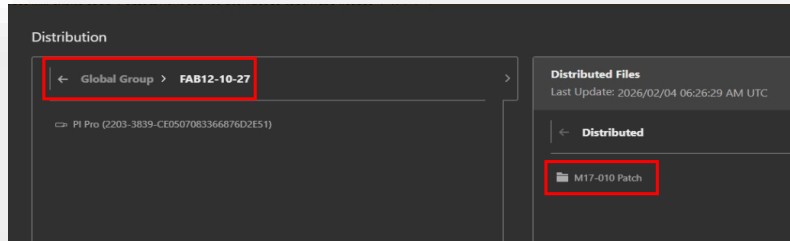
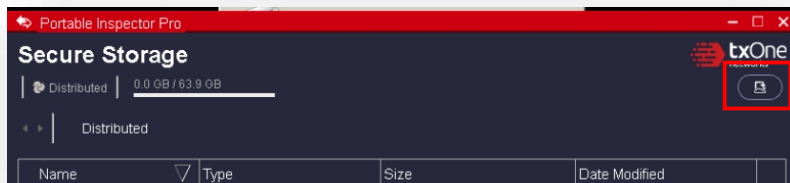
Items	Descriptions
	15. The Eicar malware file was blocked by Portable Inspector Pro.  16. Only the “Malware free” ms17-010 patch file will be copied into the Secure Storage. Secure Storage will keep the files CLEAN. Reduce the risk of malware infection.  17. Close the Secure Storage. Remove the Portable Inspector from Scan Station after Portable Inspector Pro Secure Store process task has completed. 

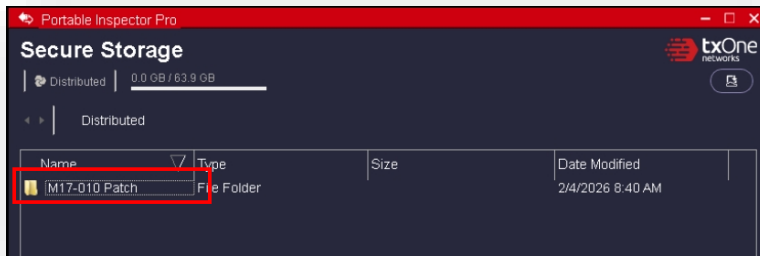
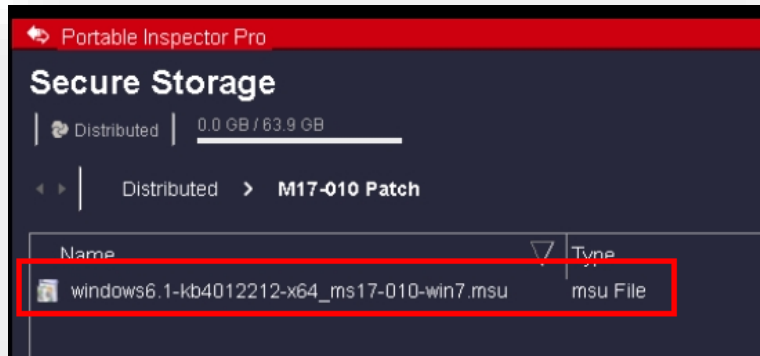
Items	Descriptions
	Element Connect Distributed Mode Secure Storage - Go to the LabConsole VM. - Navigate to ElementOne web UI. - Verify that the device policy for group “FAB12-10-27” is set to “Distributed” mode.  - Synchronize the policy settings with the Portable Inspector Pro and verify the sync up indicator is GREEN.  - Go to Element Connect > Secure Distribute. 

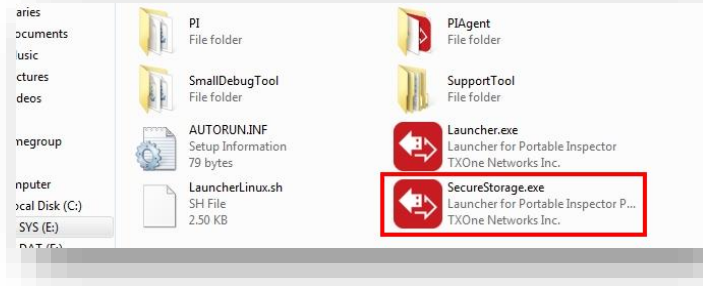
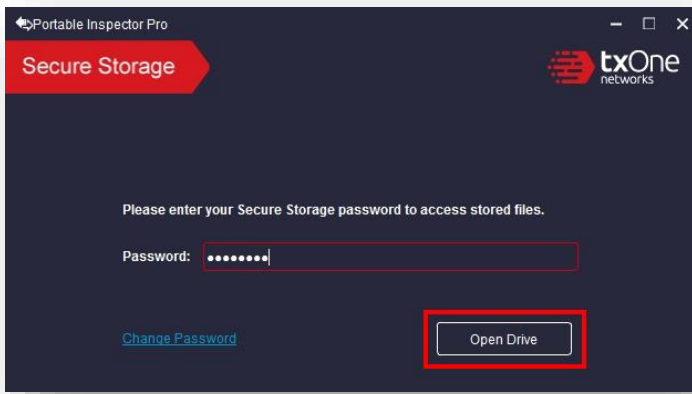
Items	Descriptions
	6. Select “Upload/Create”, then select “Create Folder”.  7. Name the folder “MS17-010 Patch”.  8. Open the folder “MS17-010 Patch” and select “Upload file”. 

Items	Descriptions
	9. Upload files in the folder “Desktop\Training\Element\MS17-010”.  10. Verify the results: only one clean file has been successfully uploaded.  11. Go to Logs > Audit Logs 

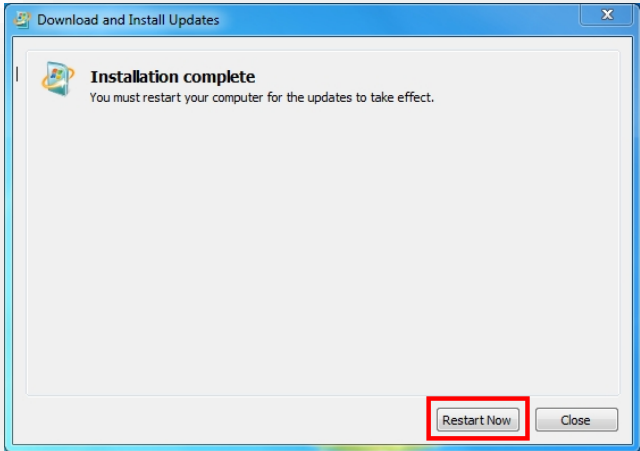
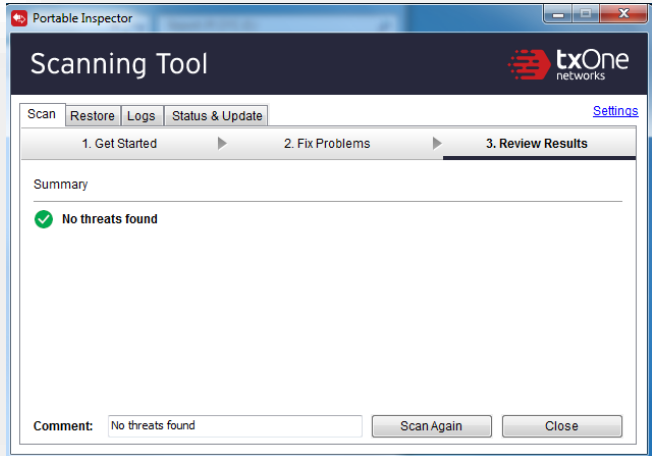
Items	Descriptions
12.	Malware file is blocked by Element Connect. 
13.	Go to Element Connect > Secure Distribute 
14.	Click “Not Distributed” 
15.	Search and select the group “FAB12-10-27”. 

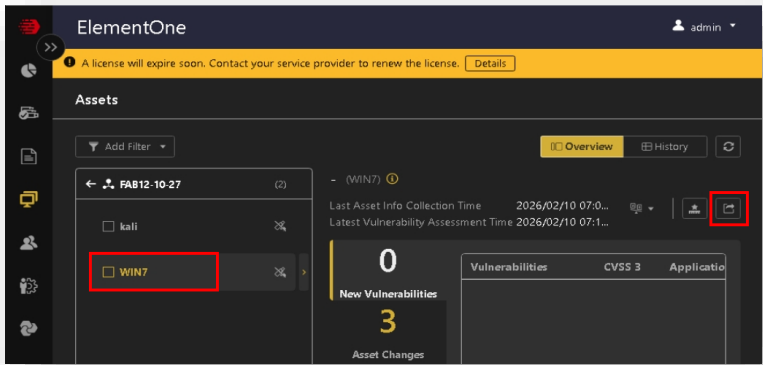
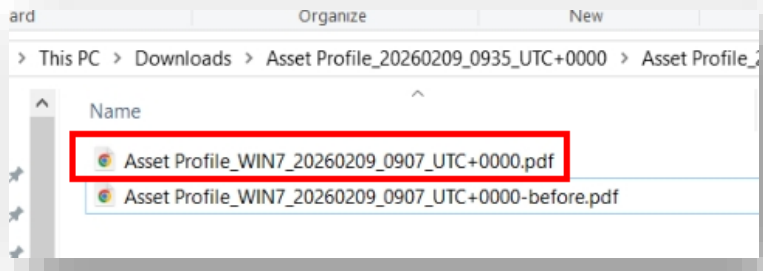
Items	Descriptions
	16. Click “Distribution” to verify the secure file sharing assignments.  17. Select the group “FAB12-10-27” and verify that the files within the “MS17-010 Patch” folder are displayed on web UI.  18. Connect the Portable Inspector to Win7 and launch Secure Storage. 19. Click “Sync All”. 

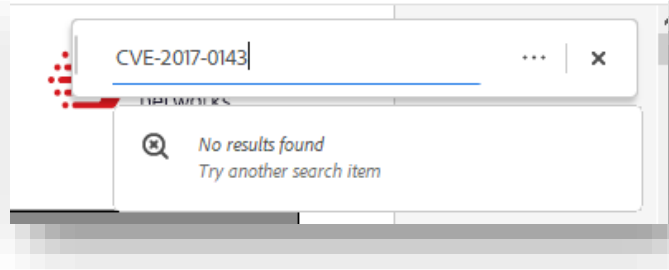
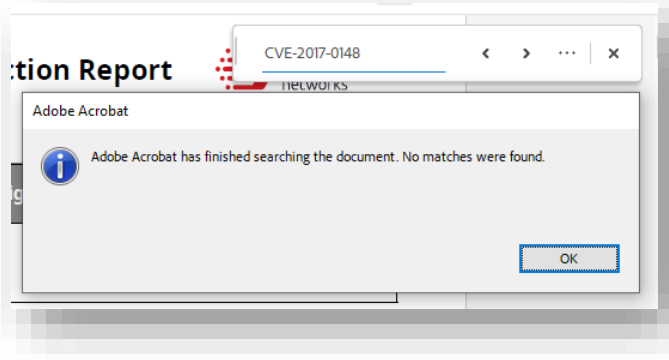
Items	Descriptions
	20. Verify that the “MS17-010 Patch” folder from Element Connect has been synced to the Secure Storage.  The screenshot shows the 'Secure Storage' window in 'Portable Inspector Pro'. It displays a table with columns: Name, Type, Size, and Date Modified. A red box highlights the entry 'M17-010 Patch' with a folder icon and 'File Folder' type. The storage status is 'Distributed' with '0.0 GB / 63.9 GB' used.
	21. Only clean files will be synced from Element Connect.  The screenshot shows the 'Secure Storage' window with the path 'Distributed > M17-010 Patch'. It displays a table with columns: Name, Type. A red box highlights the entry 'windows6.1-kb4012212-x64_ms17-010-win7.msu' with a file icon and 'msu File' type. The storage status is 'Distributed' with '0.0 GB / 63.9 GB' used.

Items	Descriptions
	(Optional): Patch the vulnerable new production equipment 1. Log in to the Win7 VM. 2. Insert the Portable Inspector to the Win7 VM. 3. Execute the StorageStorage.exe from PISYS.  4. Enter the password 12345678, click on the “Open Drive” button.  5. Copy the ms17-010 patch file from the PISYS:\UserData or PISYS:\Distributed to the Desktop.

Items	Descriptions
	6. Close the Secure Storage utility. 7. Safely remove the Portable Inspector Pro from the vm Win7. 8. Execute the ms17-010 patch file, click “Yes” to install the KB4012212. 9. Wait for KB4012212 installation to complete.

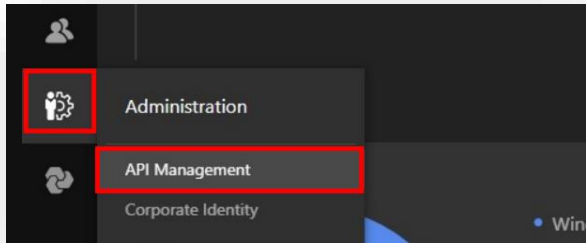
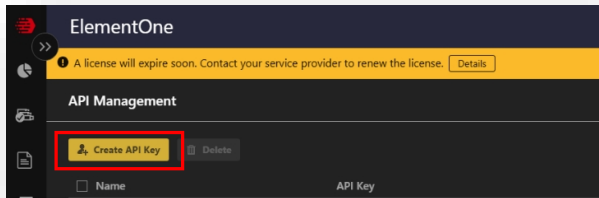
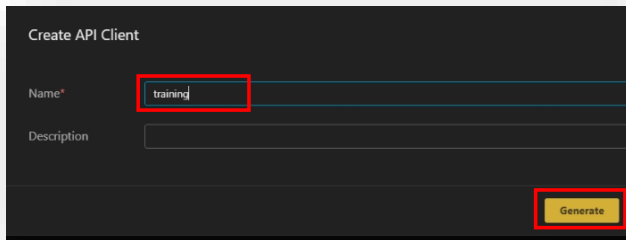
Items	Descriptions
	10. Click “Restart Now” to reboot the Win7 VM  11. Windows will update itself and reboot. 12. After the reboot, log back in to the Win7 VM. 13. Insert the Portable Inspector Pro stick and execute the Launcher.exe from the PI SYS. 14. Wait for 30 seconds or click on Scan Now, and let the PI do a security inspection again. No malware should be found this time. 

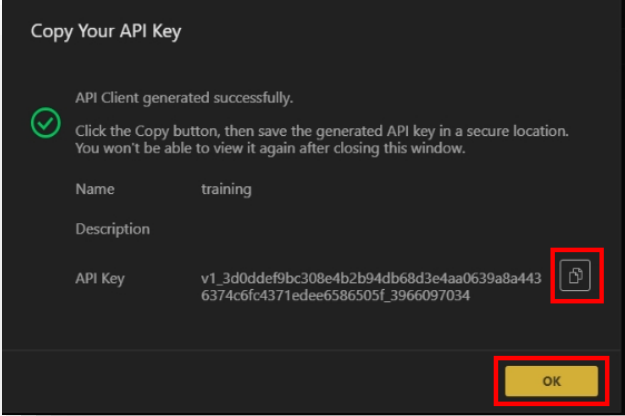
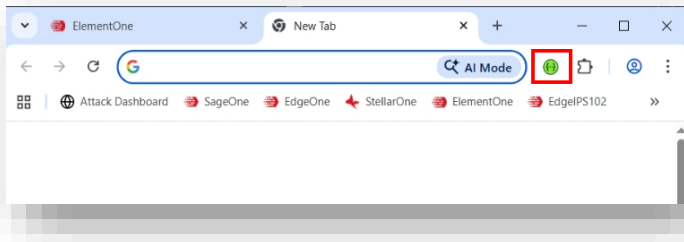
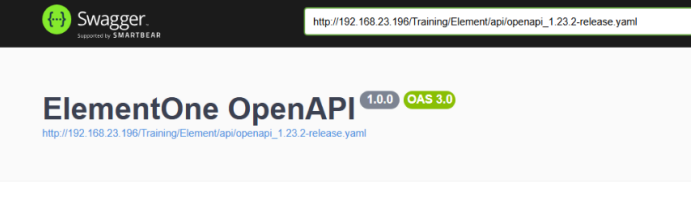
Items	Descriptions
	15. Remove the Portable Inspector from the Win7 VM. 16. Insert the Portable Inspector to the Scan Station (the LabConsole VM). 17. The Portable Inspector will automatically sync the logs to the ElementOne. 18. Go to ElementOne after Portable Inspector has synchronized the logs. 19. In ElementOne, go to Assets > Group "FAB12-10-27" > Win7 and export the report. This will generate the Equipment Security Inspection Report again.  20. Read the latest Equipment Security Inspection Report.  21. Search for the CVEs of the ms17-010 (CVE-2017-0143, CVE-2017-0144, CVE-2017-0145 and CVE-2017-0146). Those CVEs should no longer be found in the report.

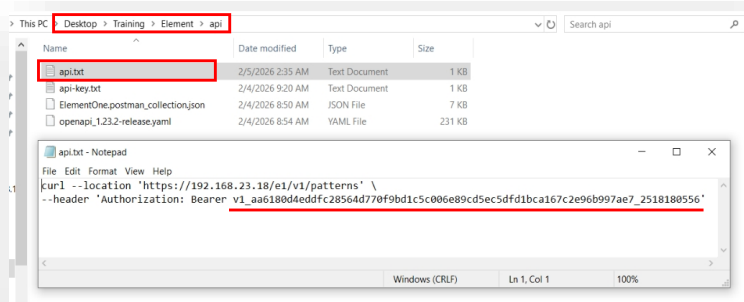
Items	Descriptions
	 
Expected Result	● The Portable Inspector Pro prevented malware from being copied to the Secure Storage. ● Critical vulnerabilities were detected and fixed before onboarding the new equipment.

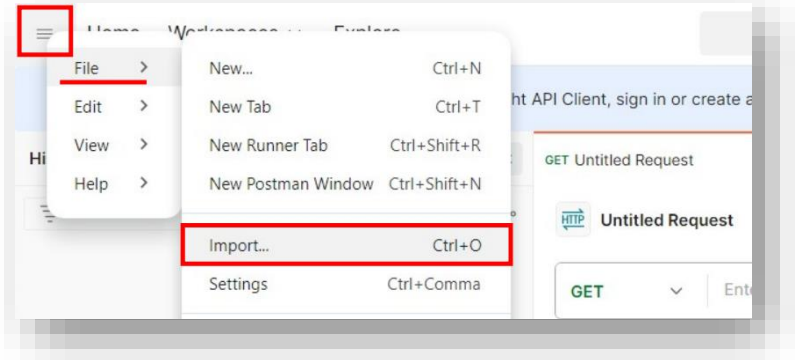
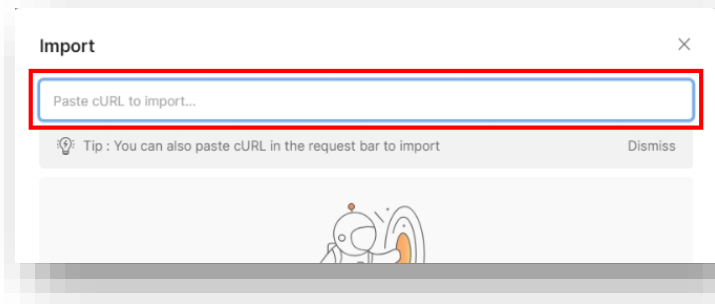
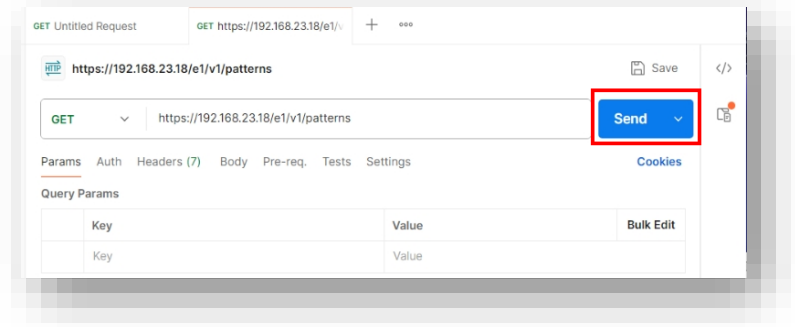
Lab7: API access for management tasks

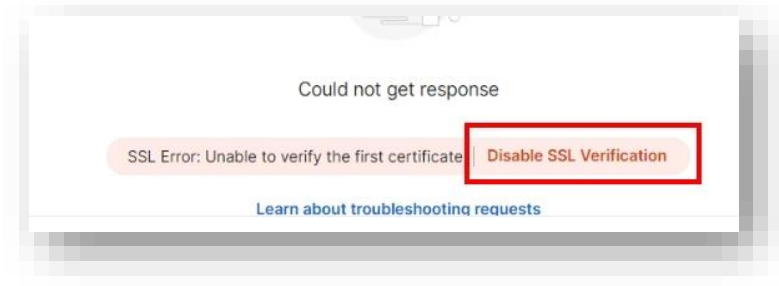
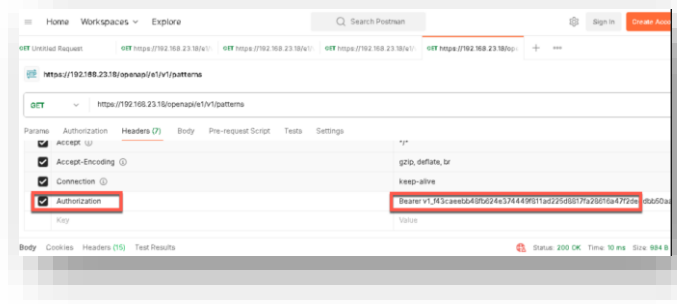
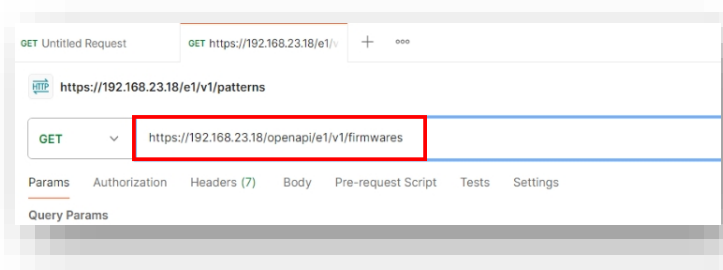
Table 9 API access for management tasks

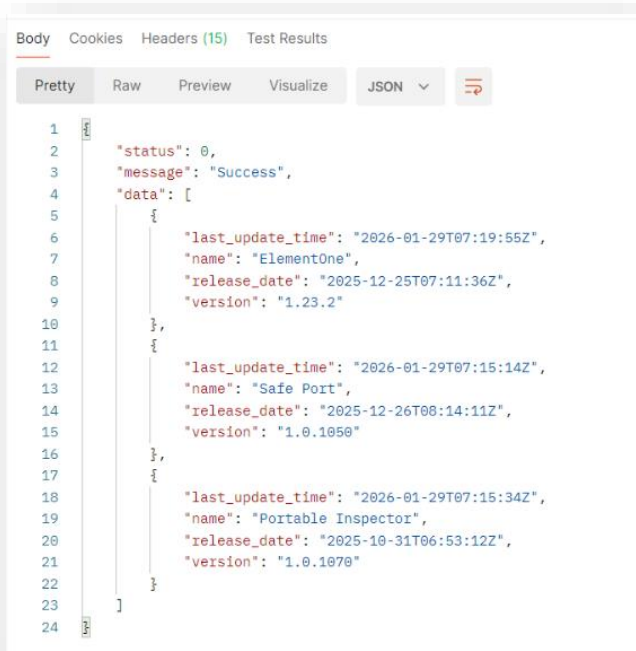
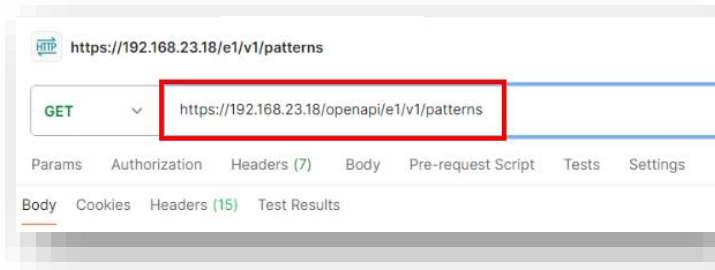
Items	Descriptions
Lab Case	Retrieve ElementOne information using API calls.
Steps	Create an API Key - Go to the ElementOne web UI - Go to Administration > API Management  - Click "Create API Key".  - Enter API name "training", then click "Generate". 

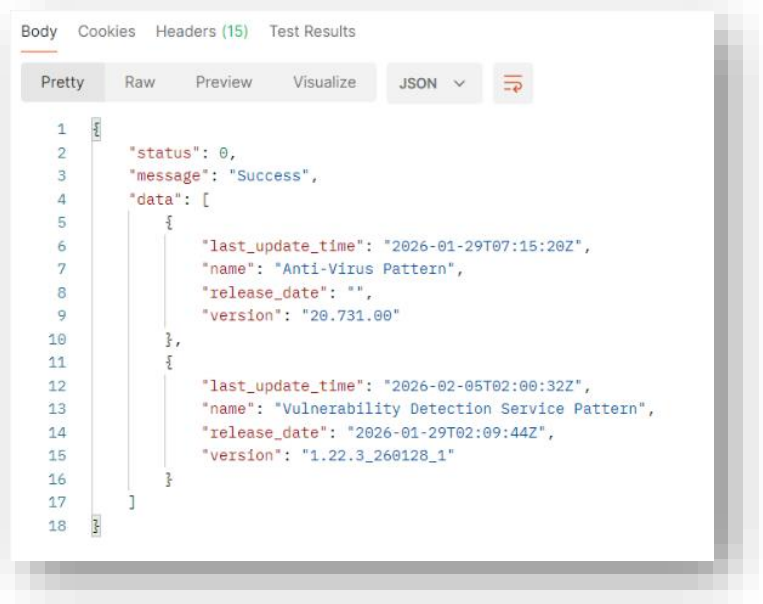
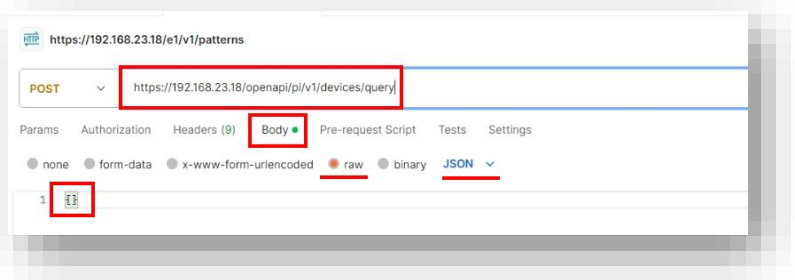
Items	Descriptions
	5. Click “Copy” and save the API key to to your password manager (or, not secure, to a text file). You won’t be able to view this API key again.  ElementOne API reference: 1. Launch Chrome and click “Swagger extension”.  2. On the LabConsole, the Swagger extension for Google Chrome has been pre-configured.. When you open it, it will open the ElementOne OpenAPI documentation. 

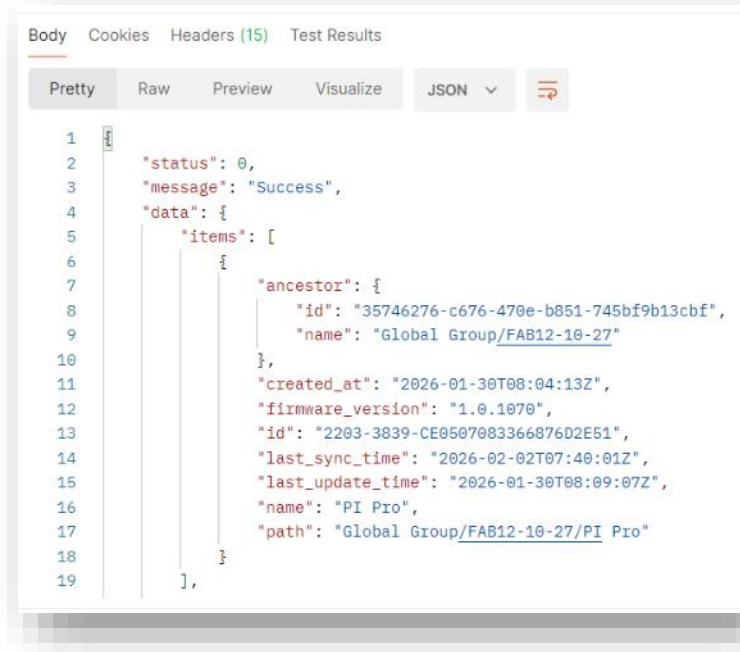
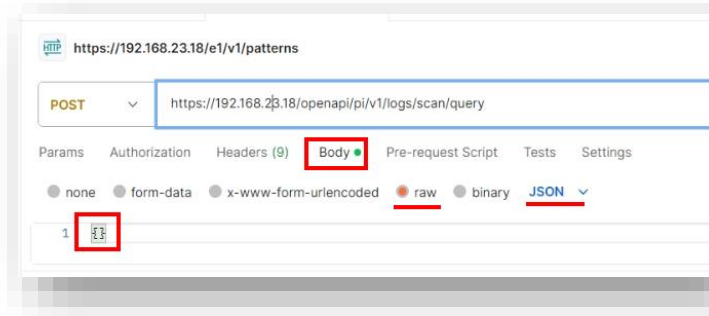
Items	Descriptions
	ElementOne API key preparation - Go to folder “Desktop > Training > Element > api”. - Open the “api.txt” file and replace the placeholder with the API key you just generated. Update: also change the url to: 'https://192.168.23.18/openapi/e1/v1/patterns' (insert “openapi”)  - Launch Postman. 

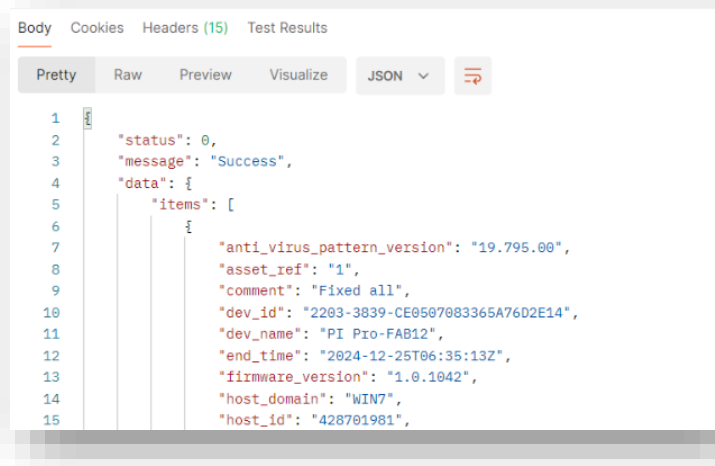
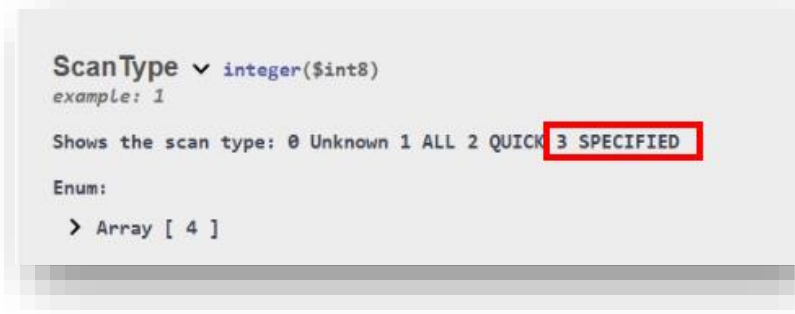
Items	Descriptions
	4. Go to “Menu > File > Import...”.  5. Copy the content of “api.txt” and paste it into the Import dialog.  6. Click “Send”.  7. Disable “SSL verification” in Postman settings if you encounter connection issues or fail to receive a response.

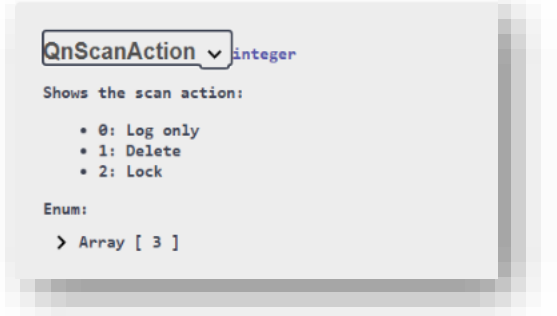
Items	Descriptions
	 Open the Headers tab and notice the Authorization header. It contains the keyword “Bearer” followed by a space and your API key. This Authorization Header must be sent with every API call.  API use case 1: Retrieve Firmware Information used in ElementOne 1. Launch Postman 2. Enter following commands: - Method: GET - Command: /openapi/e1/v1/firmwares 

Items	Descriptions
	3. Verify the response.  <pre> 1 { 2 "status": 0, 3 "message": "Success", 4 "data": [5 { 6 "last_update_time": "2026-01-29T07:19:55Z", 7 "name": "ElementOne", 8 "release_date": "2025-12-25T07:11:36Z", 9 "version": "1.23.2" 10 }, 11 { 12 "last_update_time": "2026-01-29T07:15:14Z", 13 "name": "Safe Port", 14 "release_date": "2025-12-26T08:14:11Z", 15 "version": "1.0.1050" 16 }, 17 { 18 "last_update_time": "2026-01-29T07:15:34Z", 19 "name": "Portable Inspector", 20 "release_date": "2025-10-31T06:53:12Z", 21 "version": "1.0.1070" 22 } 23] 24 }</pre> API use case 2: Retrieve Pattern Information used in ElementOne - Launch Postman - Enter following commands: - Method: GET - Command: /openapi/e1/v1/patterns 

Items	Descriptions
	3. Verify the response.  <pre> 1 { 2 "status": 0, 3 "message": "Success", 4 "data": [5 { 6 "last_update_time": "2026-01-29T07:15:20Z", 7 "name": "Anti-Virus Pattern", 8 "release_date": "", 9 "version": "20.731.00" 10 }, 11 { 12 "last_update_time": "2026-02-05T02:00:32Z", 13 "name": "Vulnerability Detection Service Pattern", 14 "release_date": "2026-01-29T02:09:44Z", 15 "version": "1.22.3_260128_1" 16 } 17] 18 } </pre> API use case 3: Retrieve Portable Inspector device profile in ElementOne 1. Launch Postman 2. Enter following commands: - Method: POST - Command: /openapi/pi/v1/devices/query - Body : raw + select « JSON » format from the drop-down under « text » 3. Verify the response. 

Items	Descriptions
	 <pre> 1 { 2 "status": 0, 3 "message": "Success", 4 "data": { 5 "items": [6 { 7 "ancestor": { 8 "id": "35746276-c676-470e-b851-745bf9b13cbf", 9 "name": "Global Group/FAB12-10-27" 10 }, 11 "created_at": "2026-01-30T08:04:13Z", 12 "firmware_version": "1.0.1070", 13 "id": "2203-3839-CE0507083366876D2E51", 14 "last_sync_time": "2026-02-02T07:40:01Z", 15 "last_update_time": "2026-01-30T08:09:07Z", 16 "name": "PI Pro", 17 "path": "Global Group/FAB12-10-27/PI Pro" 18 } 19] 20 } 21 } </pre> API use case 4: Retrieve Portable Inspector Malware scan logs 1. Launch Postman 2. Enter following commands: - Method: POST - Command: /openapi/pi/v1/logs/scan/query - Body : raw / JSON format {} 

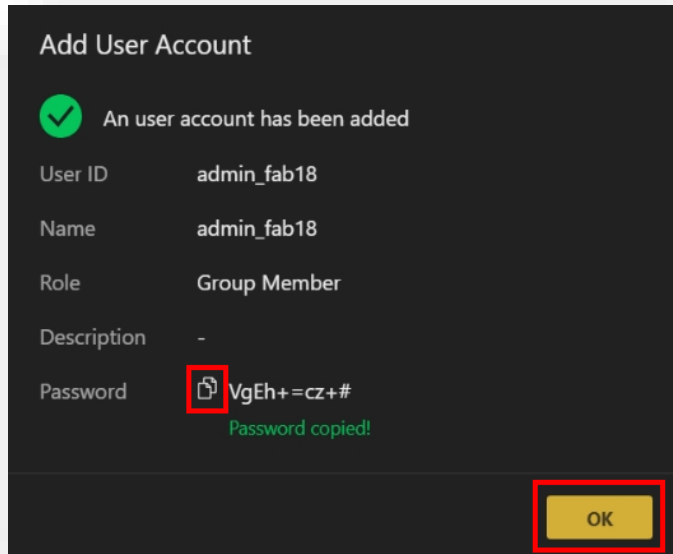
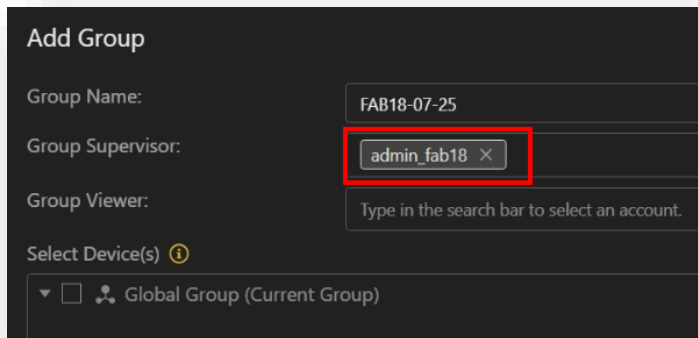
Items	Descriptions
	3. Verify the response.  <pre> 1 { 2 "status": 0, 3 "message": "Success", 4 "data": { 5 "items": [6 { 7 "anti_virus_pattern_version": "19.795.00", 8 "asset_ref": "1", 9 "comment": "Fixed all", 10 "dev_id": "2203-3839-CE0507083365A76D2E14", 11 "dev_name": "PI Pro-FAB12", 12 "end_time": "2024-12-25T06:35:13Z", 13 "firmware_version": "1.0.1042", 14 "host_domain": "WIN7", 15 "host_id": "428701981", </pre> 4. Schema mapping verification.  <pre> 1. { "scan_type": 3, "scanned_count": 10, "start_time": "2024-12-25T06:33:58Z", "threats": [{ "item_id": 0, "name": "SPYCAR_TEST_FILE", "risk": 2, "type": 7, "action_type": 1, "action_result": 4, "file_hash": "e2b31610102dc8eac83ff3a21b3f6679087e6a5ef112b9bab7b983b76962b667", "file_path": "C:\\Users\\txone\\Desktop\\Training\\PI_Samples\\PI_Samples\\HKLM_Run_1.exe", "atse_aggressive_level": 0 }] } </pre> 5. Access the ElementOne API documentation, search “scan_type”.  <pre> ScanType v integer(\$int8) example: 1 Shows the scan type: 0 Unknown 1 ALL 2 QUICK 3 SPECIFIED Enum: > Array [4] </pre>

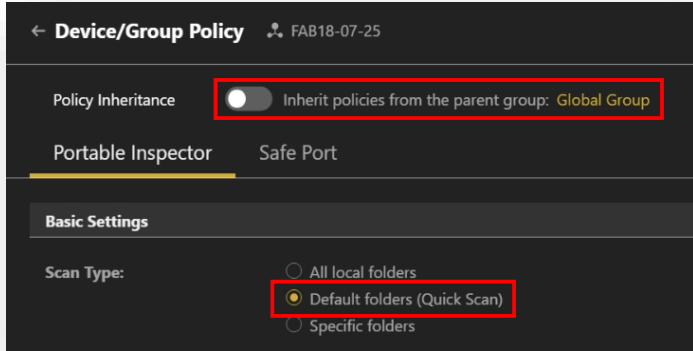
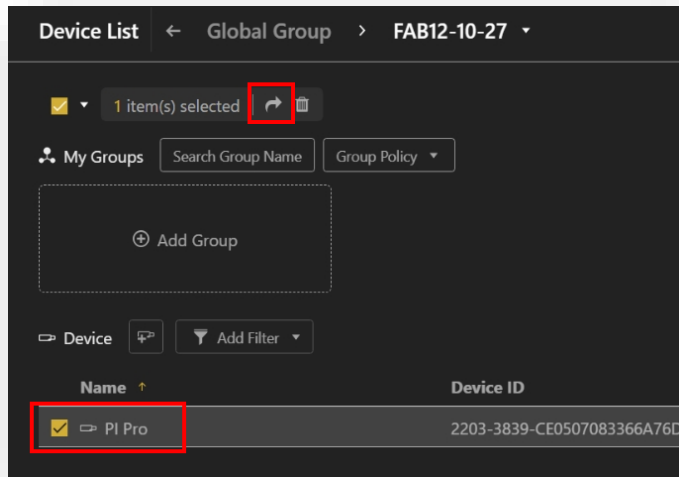
Items	Descriptions
	6. Search “QnScanAction” to verify the “action_type”. 

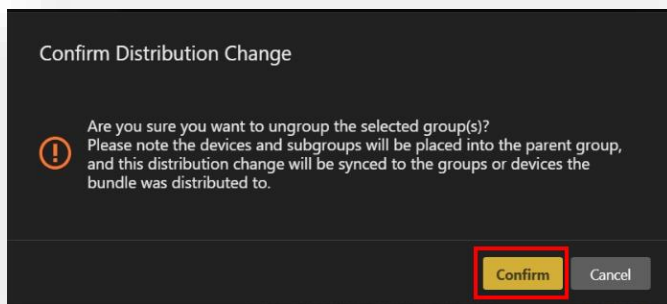
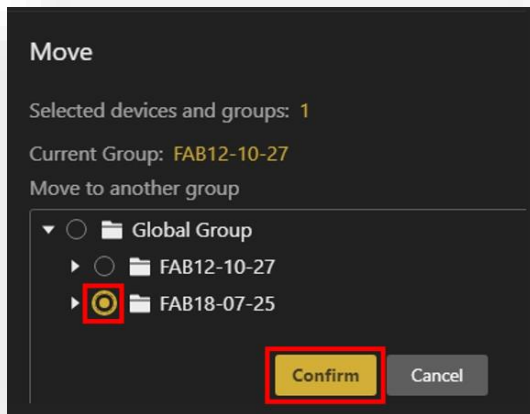
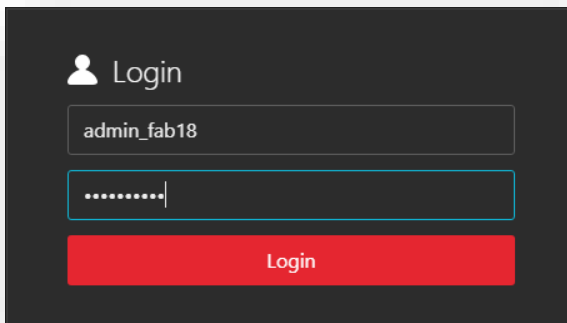
Lab8: RBAC (Role Based Access Control)

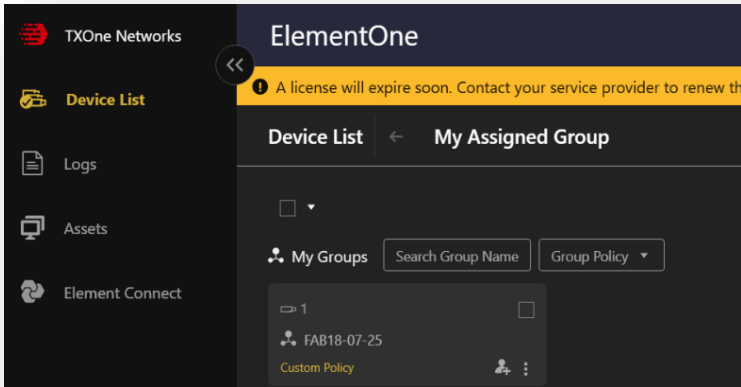
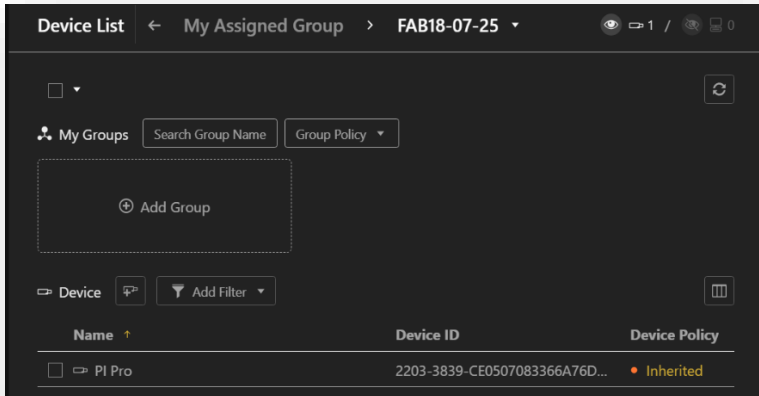
Table 10 RBAC Practice (Role Based Access Control)

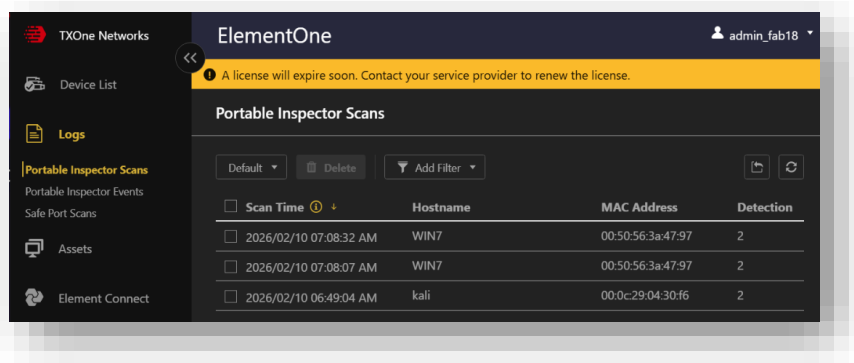
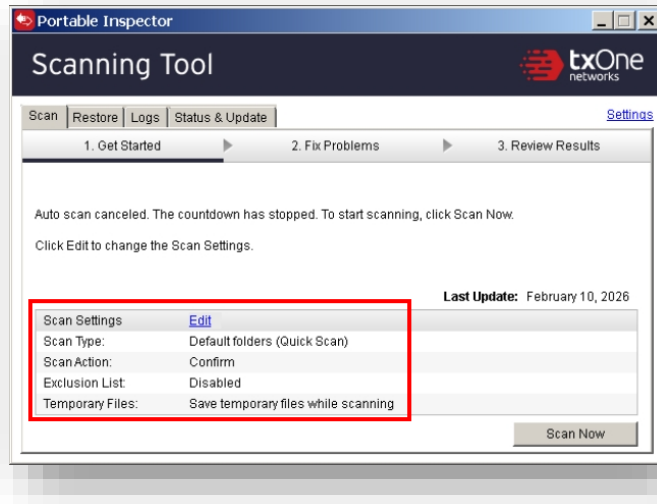
Items	Descriptions
Lab Case	Setup Role Based Access Control in ElementOne
Steps	- Go to the ElementOne web UI - Go to Account Management > Add User Account - Create a new user account and click "Confirm" User ID: admin_fab18 Role: Group Member Add User Account Authentication Source* Local User ID* admin_fab18 Name* admin_fab18 Role* ⓘ Group Member Description Confirm Cancel

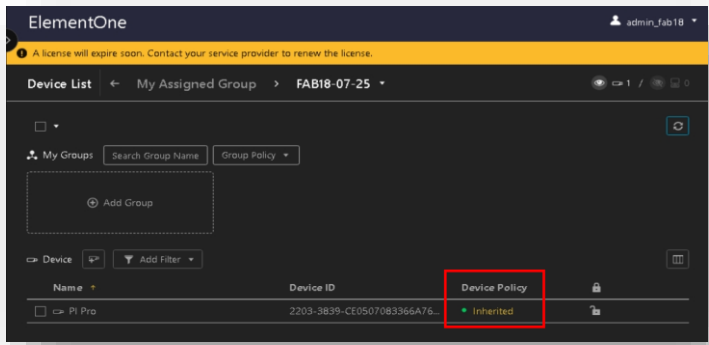
Items	Descriptions
	4. Copy the OTP password for the new account and save it to a text file.  5. Name a new group FAB18-07-25. 6. Assign the user account admin_fab18 to act as the Group Supervisor. 

Items	Descriptions
	7. Configure the Group FAB18-07-25 policy Disable “Inherit policies from parent groups” Set Scan type to the Default folders (Quick Scan)  8. Click “Save” 9. Go to the \Device List\Group “FAB12-20-27”. 10. Move the Portable Inspector Pro to the new group 

Items	Descriptions
	11. Confirm the distribution change.  12. Select the new group FAB18-07-27 and click “Confirm”  13. Logout and log in again to the ElementOne web UI with the new account admin_fab18. Retrieve the OTP password from your text file.  14. Set the new password to 12345678

Items	Descriptions						
	15. Log in to the ElementOne web UI using the new credentials: User: admin_fab18 Password: 12345678 16. The group admin account only allows access to the Device List, Logs, Assets and Element Connect.  17. Check the group FAB18-07-25. There is a RED indicator at the Portable Inspector Pro. This means that Portable Inspector Pro is not in sync with ElementOne after a policy change <table><thead><tr><th>Name</th><th>Device ID</th><th>Device Policy</th></tr></thead><tbody><tr><td>☐ PI Pro</td><td>2203-3839-CE0507083366A76D...</td><td>Inherited</td></tr></tbody></table>	Name	Device ID	Device Policy	☐ PI Pro	2203-3839-CE0507083366A76D...	Inherited
Name	Device ID	Device Policy					
☐ PI Pro	2203-3839-CE0507083366A76D...	Inherited					

Items	Descriptions
	18. Check the Scan log.  19. Insert the Portable Inspector Pro in the Scan Station. 20. Connect the Portable Inspector to the Win7 VM after the Portable Inspector has synchronized with ElementOne. 21. Check the Scan type changed from the Specific folders to the Default folders.  22. Go to the ElementOne web UI 23. Verify that the Portable Inspector Pro sync status has now changed to the GREEN, meaning that the Portable Inspector has synchronized with ElementOne.

Items	Descriptions
	
Expected Result	A new group admin has created with only access to his group