

This document provides additional assistance with wiring your Extron IP Link Pro Control Processor to your device. Different components may require a different wiring scheme than those listed below.

For complete operating instructions, refer to the user's manual for the specific IP Link Pro Control Processor or the documentation supplied by the manufacturer of the controlled device.

For more information on using Global Scriptor Modules, refer to the "[Guide to Using Scriptor Modules](#)" document.

Device Specifications

Device Type: Audio Processor
Manufacturer: Extron
Firmware Version: 1.10
Software Version: 2.21.0
Model(s): DMP 128, DMP 128CP AT, DMP 128C, DMP 128C AT, DMP 128 AT, DMP 128CP

Tested on the Following Software and Firmware Versions

IP Link Pro Control Processor Firmware	Global Scriptor Version
3.03.0000-b006	2.3.0

Version History

Module Version	Date	Notes
1_5_11_0	5/20/2019	Updated module to Rev. B1
1_5_8_0	8/9/2018	Added 'Terminated' value to Hook Status.
1_5_5_0	5/21/2018	<ul style="list-style-type: none">Added GroupBassInputFilter, GroupBassVirtualReturnFilter, GroupTrebleInputFilter, and GroupTrebleVirtualReturnFilter commands.Updated CallerID status for 'Number' qualifier.
1_5_3_0	12/28/2017	<ul style="list-style-type: none">Added full DSP Configurator view imagesAdded OutputPostMixerTrimChanged step size of all level commands from 1 dB to 0.1 dB.

**Global Scripter Module
Communication Sheet**

Revision: 5/20/2019

		<ul style="list-style-type: none">• Updated command names for the following commands:<ul style="list-style-type: none">◦ GroupPreMixerGain → GroupPremixerGain◦ GroupPreMixerTrim → GroupPremixerTrim◦ GroupPostMixerGain → GroupPostmixerGain◦ GroupPostMixerTrim → GroupPostmixerTrim◦ PremixGain → PremixerGain◦ PremixMute → PremixerMute• Updated Qualifier Value for the following commands:<ul style="list-style-type: none">◦ ExpansionBusMixpointGain◦ ExpansionBusMixpointMute◦ MixpointGain◦ MixpointMute• Updated Qualifier Key for the following commands:<ul style="list-style-type: none">◦ VirtualReturnGain◦ VirtualReturnMute• Updated DigitalIOMode and DigitalIOState commands
1_3_0_2	9/21/2017	Updated module to Rev. B
1_3_0_1	10/6/2016	Added ConnectionType attribute.
1_3_0_0	9/28/2016	<p>Removed DMP 44 LC and DMP 64 (they are now in separate modules).</p> <p>Renamed the following to match the DSP Configurator software: Mic Gain to Input Gain, Mic Mute to Input Mute, Group Output Volume to Group Output Attenuation, Output Volume to Output Attenuation, Dante Mixpoint Gain to Expansion Bus Mixpoint Gain, and Dante Mixpoint Mute to Expansion Bus Mixpoint Mute.</p> <p>Removed the following: Group Mic Gain, Preset Save, and the expansion Inputs from the Mixpoint commands.</p> <p>Fixed Call Status logic. Removed Redial and Clear Redial from Hook.</p>
1_2_5_0	6/3/2016	Updated Digital IO status.
1_2_4_2	4/22/2016	Fixed error status.
1_2_4_1	2/12/2016	Fixed update issue.
1_2_4_0	2/12/2016	Initial Version

Module Notes

- Unidirectional variable must be set to 'True' if status is not required. Default value is 'False'.
Example: `InterfaceName.Unidirectional = 'True'`
- connectionCounter variable must be set to the number of queries that will be sent to the device before displaying 'Disconnected' if no response is received. Default value is 15.
Example: `InterfaceName.connectionCounter = 5`
- If login credentials are required, devicePassword must be set accordingly.
Example: `InterfaceName.devicePassword = 'extron'`
- **Device firmware must be 1.05 or higher for the module to work properly.**
- Group commands control the groups that are configured in the DSP Configurator Software.
- Expansion Bus Mixpoint Inputs do not support Expansion Bus Mixpoint Outputs.

Supported Classes and Examples

SerialClass

```
InterfaceName = ModuleName.SerialClass(ProcessorName, 'COM1', Model='DMP 128')
```


SerialOverEthernetClass

```
InterfaceName = ModuleName.SerialOverEthernetClass('192.168.254.254', 2001, Model='DMP 128')
```

EthernetClass


```
InterfaceName = ModuleName.EthernetClass('192.168.254.254', 23, Model='DMP 128')
```

Extron DSP Configurator Labels

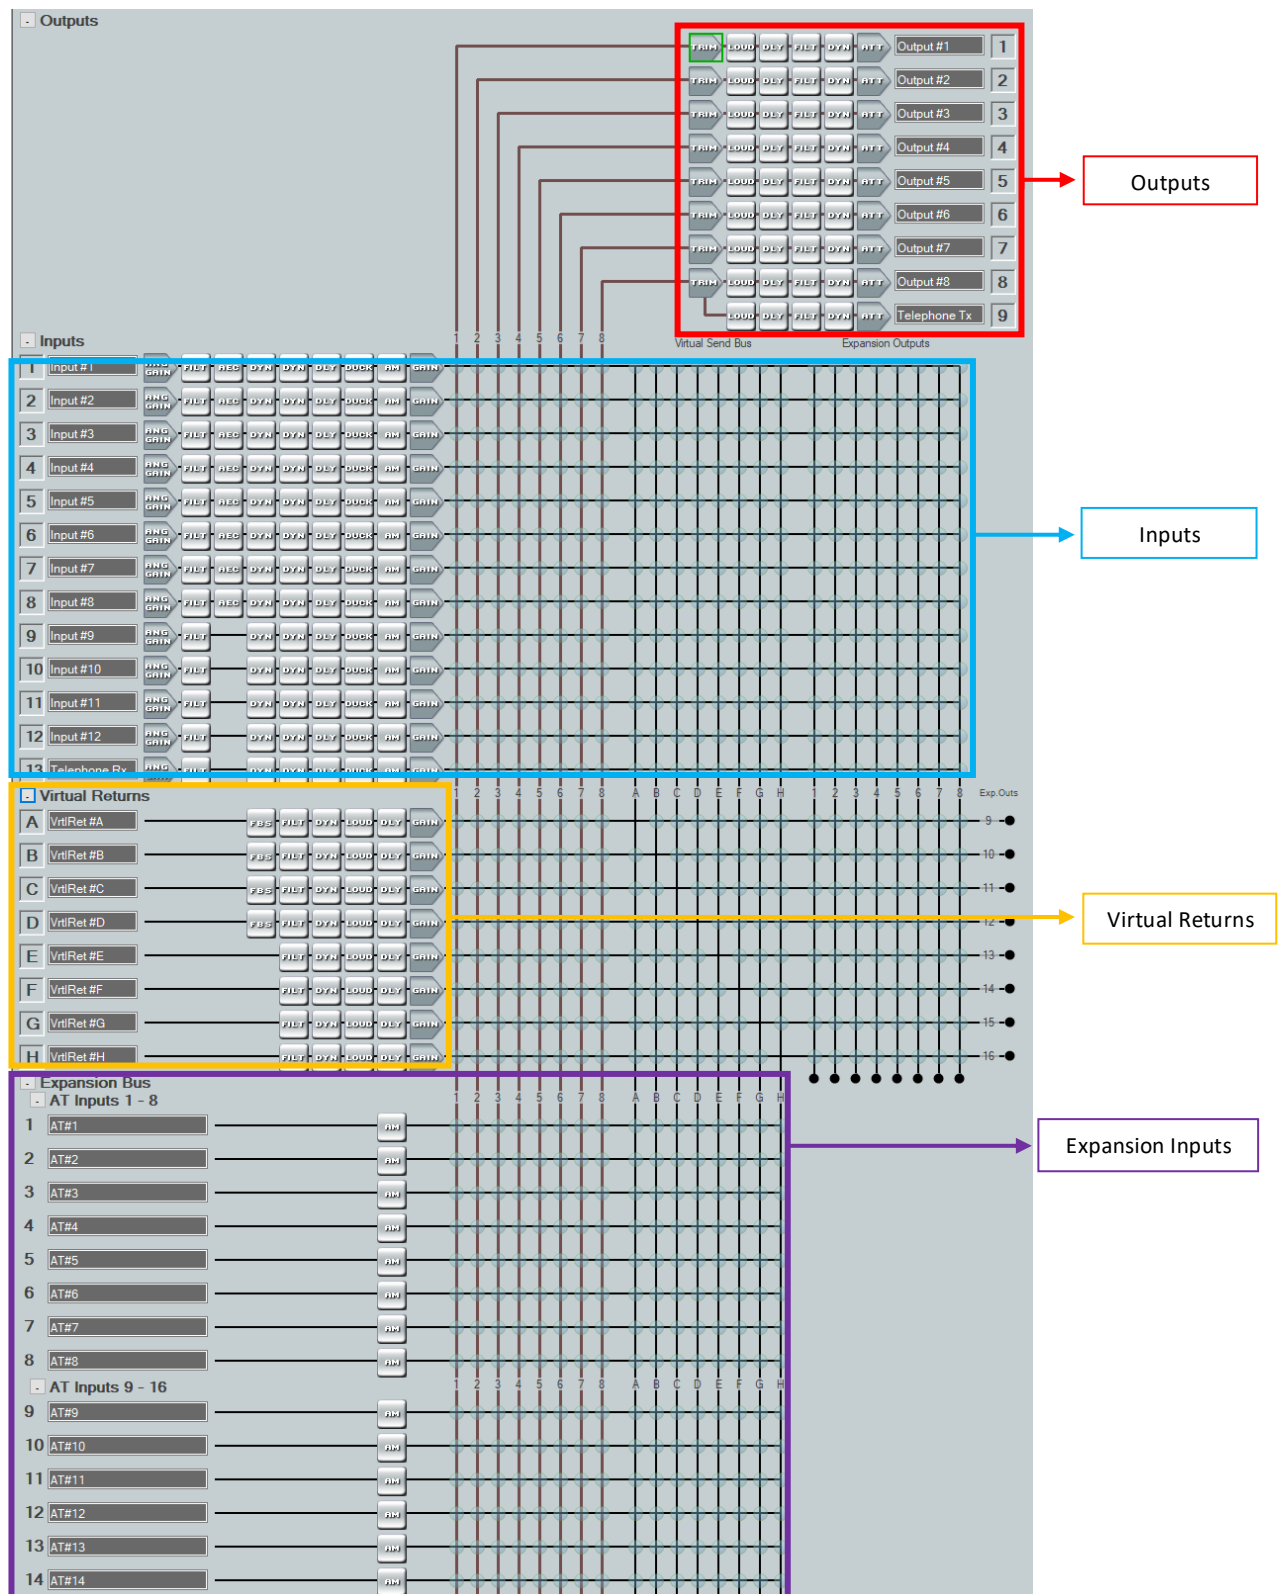


Extron DSP Configurator Labels


- Inputs

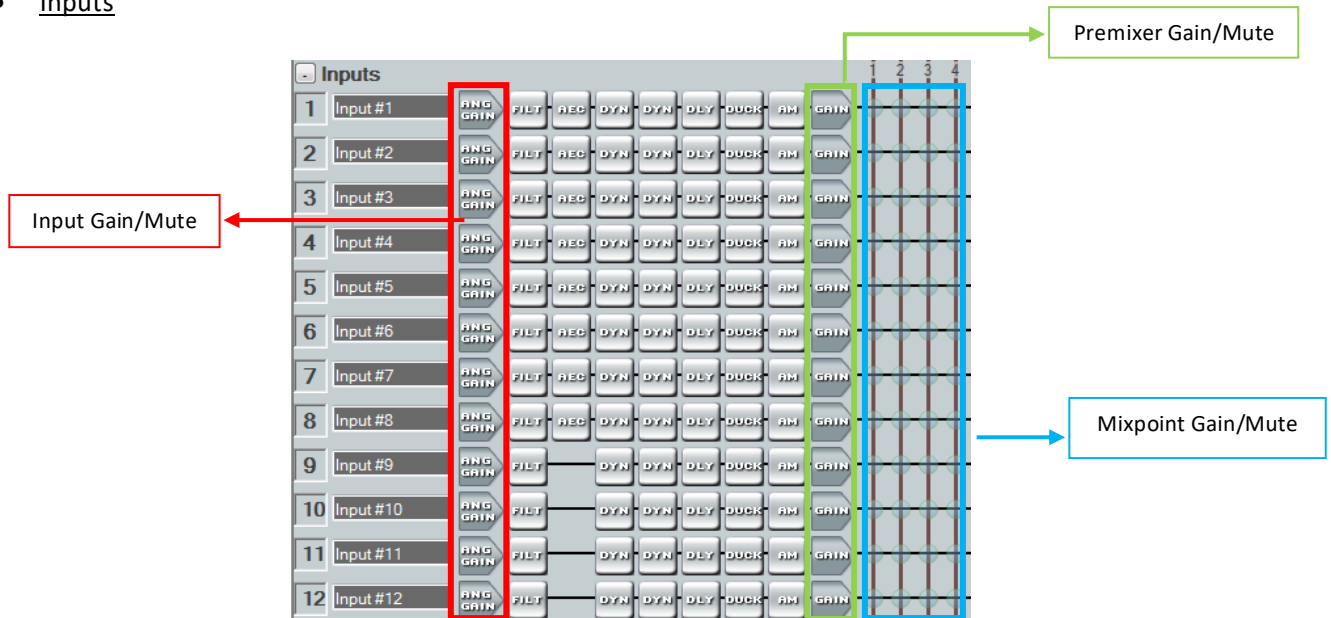


- Virtual Returns

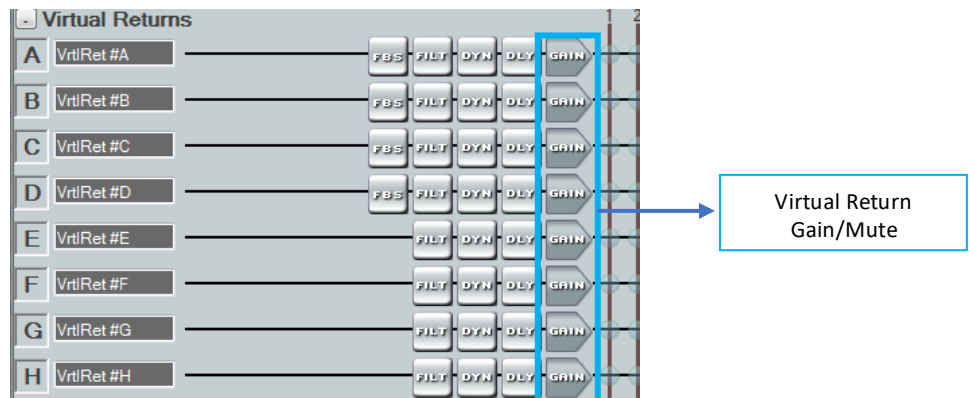

- Expansion Inputs

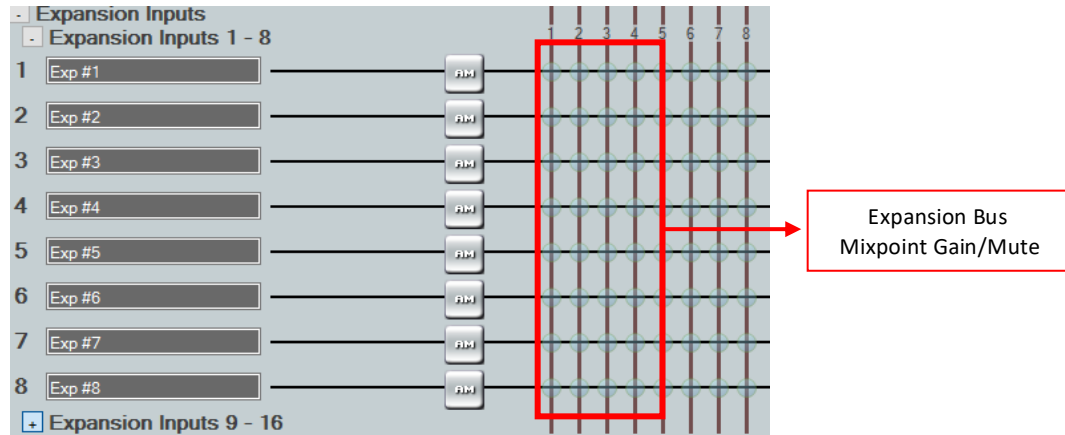

- Outputs

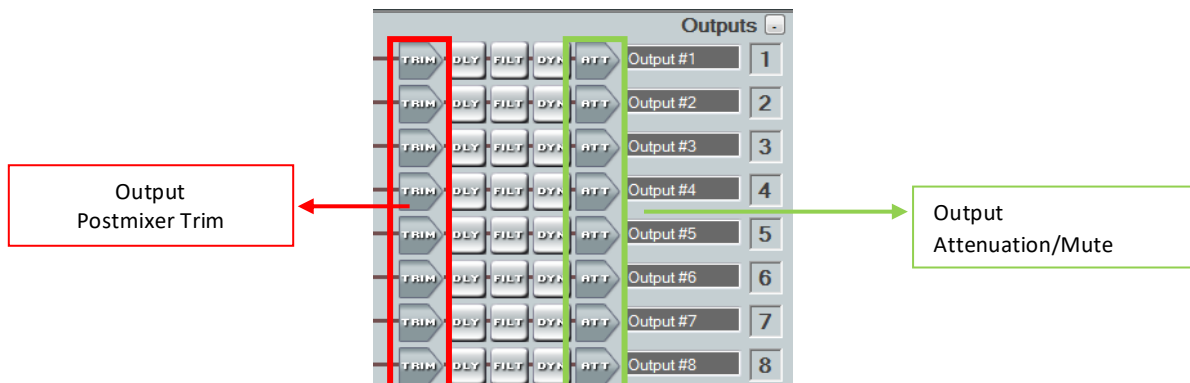

Set Commands

Format with Qualifier:

```
InterfaceName.Set(Command, Value, {'Qualifier Key': 'Qualifier Value'})
```

Format without Qualifier:

```
InterfaceName.Set(Command, Value)
```

Command	Value	Value	
AutoHangup ¹	'Enabled'	'Disabled'	
# AutoHangup example InterfaceName.Set('AutoHangup', 'Enabled')			
Command	Value	Value	Value
DialDTMF ¹	'0'	'1'	'2'
	'3'	'4'	'5'
	'6'	'7'	'8'
	'9'	'*'	'#'
# DialDTMF example InterfaceName.Set('DialDTMF', '0')			
Command	Value		
DTMFToneVolume ¹	0 to 100 in steps of 1 dB		
# DTMFToneVolume example InterfaceName.Set('DTMFToneVolume', 100)			
Command	Value		
ExpansionBusMixpointGain ²	-35 to 25 in steps of 0.1 dB		
Qualifier Key	Qualifier Value	Qualifier Value	
'Input'	'1' – '16'	'17' – '56' ⁴	
Qualifier Key	Qualifier Value	Qualifier Value	Qualifier Value
'Output'	'1' – '8'	'V. Send A'	'V. Send B'
	'V. Send C'	'V. Send D'	'V. Send E'
	'V. Send F'	'V. Send G'	'V. Send H'
# ExpansionBusMixpointGain example InterfaceName.Set('ExpansionBusMixpointGain', 25, {'Input': '1', 'Output': '1'})			
Command	Value	Value	
ExpansionBusMixpointMute ²	'On'	'Off'	
Qualifier Key	Qualifier Value	Qualifier Value	
'Input'	'1' – '16'	'17' – '56' ⁴	
Qualifier Key	Qualifier Value	Qualifier Value	Qualifier Value
'Output'	'1' – '8'	'V. Send A'	'V. Send B'
	'V. Send C'	'V. Send D'	'V. Send E'
	'V. Send F'	'V. Send G'	'V. Send H'

# ExpansionBusMixpointMute example InterfaceName.Set('ExpansionBusMixpointMute', 'On', {'Input': '1', 'Output': '1'})		
Command GroupBassInputFilter ³	Value -24 to 24 in steps of 0.1 dB	
Qualifier Key 'Group'	Qualifier Value '1' – '32'	
# GroupMixpointGain example InterfaceName.Set('GroupBassInputFilter', 24, {'Group': '1'})		
Command GroupBassVirtualReturnFilter ³	Value -24 to 24 in steps of 0.1 dB	
Qualifier Key 'Group'	Qualifier Value '1' – '32'	
# GroupMixpointGain example InterfaceName.Set('GroupBassVirtualReturnFilter', 24, {'Group': '1'})		
Command GroupMixpointGain	Value -35 to 25 in steps of 0.1 dB	
Qualifier Key 'Group'	Qualifier Value '1' – '32'	
# GroupMixpointGain example InterfaceName.Set('GroupMixpointGain', 25, {'Group': '1'})		
Command GroupMute	Value 'On'	Value 'Off'
Qualifier Key 'Group'	Qualifier Value '1' – '32'	
# GroupMute example InterfaceName.Set('GroupMute', 'On', {'Group': '1'})		
Command GroupOutputAttenuation	Value -100 to 0 in steps of 0.1 dB	
Qualifier Key 'Group'	Qualifier Value '1' – '32'	
# GroupOutputAttenuation example InterfaceName.Set('GroupOutputAttenuation', 0, {'Group': '1'})		
Command GroupPostmixerTrim	Value -12 to 12 in steps of 0.1 dB	
Qualifier Key 'Group'	Qualifier Value '1' – '32'	
# GroupPostmixerTrim example InterfaceName.Set('GroupPostmixerTrim', 12, {'Group': '1'})		
Command GroupPremixerGain	Value -100 to 12 in steps of 0.1 dB	

Global Scripter Module
Communication Sheet

Qualifier Key 'Group'	Qualifier Value '1' – '32'		
# GroupPremixerGain example InterfaceName.Set('GroupPremixerGain', 12, {'Group': '1'})			
Command GroupTrebleInputFilter ³	Value -24 to 24 in steps of 0.1 dB		
Qualifier Key 'Group'	Qualifier Value '1' – '32'		
# GroupVirtualReturnGain example InterfaceName.Set('GroupTrebleInputFilter', 24, {'Group': '1'})			
Command GroupTrebleVirtualReturnFilter ³	Value -24 to 24 in steps of 0.1 dB		
Qualifier Key 'Group'	Qualifier Value '1' – '32'		
# GroupVirtualReturnGain example InterfaceName.Set('GroupTrebleVirtualReturnGain', 24, {'Group': '1'})			
Command GroupVirtualReturnGain	Value -100 to 12 in steps of 0.1 dB		
Qualifier Key 'Group'	Qualifier Value '1' – '32'		
# GroupVirtualReturnGain example InterfaceName.Set('GroupVirtualReturnGain', 12, {'Group': '1'})			
Command Hook ¹	Value 'Off' 'Flash'	Value 'On' 'Redial' ^A	Value 'Dial' 'Clear Redial' ^B
Qualifier Key 'Number' ³	Qualifier Value 'String'		
# Hook example InterfaceName.Set('Hook', 'Off') InterfaceName.Set('Hook', 'Dial', {'Number': '1234567890'})			
Command InputGain	Value -18 to 80 in steps of 0.1 dB		
Qualifier Key 'Input'	Qualifier Value '1' – '12'	Qualifier Value 'Telephone Rx' ¹	
# InputGain example InterfaceName.Set('InputGain', 80, {'Input': '1'})			
Command InputMute	Value 'On'	Value 'Off'	
Qualifier Key 'Input'	Qualifier Value '1' – '12'	Qualifier Value 'Telephone Rx' ¹	
# InputMute example			

InterfaceName.Set('InputMute', 'On', {'Input': '1'})			
Command MixpointGain	Value -35 to 25 in steps of 0.1 dB		
Qualifier Key 'Input'	Qualifier Value '1' – '12' 'V. Return C' 'V. Return F' 'Telephone Rx' ¹	Qualifier Value 'V. Return A' 'V. Return D' 'V. Return G'	Qualifier Value 'V. Return B' 'V. Return E' 'V. Return H'
Qualifier Key 'Output'	Qualifier Value '1' – '8' 'V. Send C' 'V. Send F' 'Exp. 1' 'Exp. 4' 'Exp. 7'	Qualifier Value 'V. Send A' 'V. Send D' 'V. Send G' 'Exp. 2' 'Exp. 5' 'Exp. 8'	Qualifier Value 'V. Send B' 'V. Send E' 'V. Send H' 'Exp. 3' 'Exp. 6'
# MixpointGain example InterfaceName.Set('MixpointGain', 25, {'Input': '1', 'Output': '1'})			
Command MixpointMute	Value 'On'	Value 'Off'	
Qualifier Key 'Input'	Qualifier Value '1' – '12' 'V. Return C' 'V. Return F' 'Telephone Rx' ¹	Qualifier Value 'V. Return A' 'V. Return D' 'V. Return G'	Qualifier Value 'V. Return B' 'V. Return E' 'V. Return H'
Qualifier Key 'Output'	Qualifier Value '1' – '8' 'V. Send C' 'V. Send F' 'Exp. 1' 'Exp. 4' 'Exp. 7'	Qualifier Value 'V. Send A' 'V. Send D' 'V. Send G' 'Exp. 2' 'Exp. 5' 'Exp. 8'	Qualifier Value 'V. Send B' 'V. Send E' 'V. Send H' 'Exp. 3' 'Exp. 6'
# MixpointMute example InterfaceName.Set('MixpointMute', 'On', {'Input': '1', 'Output': '1'})			
Command OutputAttenuation	Value -100 to 0 in steps of 0.1 dB		
Qualifier Key 'Output'	Qualifier Value '1' – '8'	Qualifier Value 'Telephone Tx' ¹	
# OutputAttenuation example InterfaceName.Set('OutputAttenuation', 0, {'Output': '1'})			

Global Scripter Module
Communication Sheet

Command	Value	Value	
OutputMute	'On'	'Off'	
Qualifier Key	Qualifier Value	Qualifier Value	
'Output'	'1' – '8'	'Telephone Tx' ¹	
# OutputMute example InterfaceName.Set('OutputMute', 'On', {'Output': '1'})			
Command	Value		
OutputPostmixerTrim	-12 to 12 in steps of 0.1 dB		
Qualifier Key	Qualifier Value		
'Output'	'1' – '8'		
# OutputPostmixerTrim example InterfaceName.Set('OutputPostmixerTrim', 12, {'Output': '1'})			
Command	Value		
PremixerGain	-100 to 12 in steps of 0.1 dB		
Qualifier Key	Qualifier Value	Qualifier Value	
'Input'	'1' – '12'	'Telephone Rx' ¹	
# PremixerGain example InterfaceName.Set('PremixerGain', 12, {'Input': '1'})			
Command	Value	Value	
PremixerMute	'On'	'Off'	
Qualifier Key	Qualifier Value	Qualifier Value	
'Input'	'1' – '12'	'Telephone Rx' ¹	
# PremixerMute example InterfaceName.Set('PremixerMute', 'On', {'Input': '1'})			
Command	Value		
PresetRecall	'1' – '32'		
# PresetRecall example InterfaceName.Set('PresetRecall', '1')			
Command	Value		
VirtualReturnGain	-100 to 12 in steps of 0.1 dB		
Qualifier Key	Qualifier Value	Qualifier Value	Qualifier Value
'Input'	'A'	'B'	'C'
	'D'	'E'	'F'
	'G'	'H'	
# VirtualReturnGain example InterfaceName.Set('VirtualReturnGain', 12, {'Input': 'A'})			
Command	Value	Value	
VirtualReturnMute	'On'	'Off'	
Qualifier Key	Qualifier Value	Qualifier Value	Qualifier Value

Global Scripter Module Communication Sheet

'Input'	'A'	'B'	'C'
	'D'	'E'	'F'
	'G'	'H'	
# VirtualReturnMute example InterfaceName.Set('VirtualReturnMute', 'On', {'Input': 'A'})			

¹ Only applicable for DMP 128CP and DMP 128CP AT models

^A Redial recalls the last number that was dialed with the module

^B Clear Redial clears any number that was stored in Redial string within the module

² For AT models, Inputs 41 – 56 will refer to Expansion Inputs 1 – 16 if the 'Use Extron Expansion Bus for channels 41 – 56' setting is selected in the DSP Configurator software under Tools → Expansion Bus.

³ This command requires a Bass & Treble Filter block to be configured on the Extron DSP Configurator.

⁴ Only supported for DMP 128CP AT and DMP 128 AT models.

Status Available

For all commands except for CallStatus, CallerID, DigitalIOMode, DigitalIOState and PhoneErrorStatus, Update should be called only once since the command's status will be updated automatically as the device's status changes. ConnectionStatus, CallStatus and PhoneErrorStatus do not support the Update function. ConnectionStatus is triggered by the device providing a successful response to other Update function calls. CallStatus is triggered by the device providing a successful response to Hook Status. PhoneErrorStatus is triggered by an unsolicited response from the device.

Format with Qualifier:

```
InterfaceName.Update(Command, {'Qualifier Key': 'Qualifier Value'})
Value = InterfaceName.ReadStatus(Command, {'Qualifier Key': 'Qualifier Value'})
InterfaceName.SubscribeStatus(Command, {'Qualifier Key': 'Qualifier Value'}, FeedbackHandler)
FeedbackHandler will be called only when the specified qualifier gets a new status.
```

Format without Qualifier:

```
InterfaceName.Update(Command)
Value = InterfaceName.ReadStatus(Command)
InterfaceName.SubscribeStatus(Command, None, FeedbackHandler)
FeedbackHandler will be called when any qualifier gets a new status.
```

Command	Value	Value	
AutoHangup	'Enabled'	'Disabled'	
# AutoHangup examples InterfaceName.Update('AutoHangup') Value = InterfaceName.ReadStatus('AutoHangup') InterfaceName.SubscribeStatus('AutoHangup', None, FeedbackHandler)			
Command	Value	Value	Value
CallStatus ¹	'Dial Tone'	'Connected'	'Incoming'
	'Terminated'	'Busy'	'Idle'
	'Dialing'		
# CallStatus examples Value = InterfaceName.ReadStatus('CallStatus') InterfaceName.SubscribeStatus('CallStatus', None, FeedbackHandler)			
Command	Value		
CallerID	'String'		
Qualifier Key	Qualifier Value	Qualifier Value	Qualifier Value
'Field'	'Name'	'Number'	'Date'
	'Time'		
# CallerID examples Value = InterfaceName.ReadStatus('CallerID', {'Field': 'Name'}) InterfaceName.SubscribeStatus('CallerID', None, FeedbackHandler)			
Command	Value	Value	
ConnectionStatus	'Connected'	'Disconnected'	
# ConnectionStatus examples			

Global Scripter Module
Communication Sheet

Value = InterfaceName.ReadStatus('ConnectionStatus') InterfaceName.SubscribeStatus('ConnectionStatus', None, FeedbackHandler)			
Command DigitalIOMode	Value 'Input'	Value 'Output'	
Qualifier Key 'Port'	Qualifier Value '1' – '20'		
# DigitalIOMode examples InterfaceName.Update('DigitalIOMode', {'Port': '1'}) Value = InterfaceName.ReadStatus('DigitalIOMode', {'Port': '1'}) InterfaceName.SubscribeStatus('DigitalIOMode', None, FeedbackHandler)			
Command DigitalIOState	Value 'On'	Value 'Off'	
Qualifier Key 'Port'	Qualifier Value '1' – '20'		
# DigitalIOState examples InterfaceName.Update('DigitalIOState', {'Port': '1'}) Value = InterfaceName.ReadStatus('DigitalIOState', {'Port': '1'}) InterfaceName.SubscribeStatus('DigitalIOState', None, FeedbackHandler)			
Command DTMFToneVolume	Value 0 to 100 in steps of 1 dB		
# DTMFToneVolume examples InterfaceName.Update('DTMFToneVolume') Value = InterfaceName.ReadStatus('DTMFToneVolume') InterfaceName.SubscribeStatus('DTMFToneVolume', None, FeedbackHandler)			
Command ExpansionBusMixpointGain ²	Value -35 to 25 in steps of 0.1 dB		
Qualifier Key 'Input'	Qualifier Value '1' – '16'	Qualifier Value '17' – '56' ⁴	
Qualifier Key 'Output'	Qualifier Value '1' – '8' 'V. Send C' 'V. Send F'	Qualifier Value 'V. Send A' 'V. Send D' 'V. Send G'	Qualifier Value 'V. Send B' 'V. Send E' 'V. Send H'
# ExpansionBusMixpointGain examples InterfaceName.Update('ExpansionBusMixpointGain', {'Input': '1', 'Output': '1'}) Value = InterfaceName.ReadStatus('ExpansionBusMixpointGain', {'Input': '1', 'Output': '1'}) InterfaceName.SubscribeStatus('ExpansionBusMixpointGain', None, FeedbackHandler)			
Command ExpansionBusMixpointMute ²	Value 'On'	Value 'Off'	
Qualifier Key 'Input'	Qualifier Value '1' – '16'	Qualifier Value '17' – '56' ⁴	
Qualifier Key 'Output'	Qualifier Value '1' – '8'	Qualifier Value 'V. Send A'	Qualifier Value 'V. Send B'

Global Scripter Module
Communication Sheet

	'V. Send C'	'V. Send D'	'V. Send E'
	'V. Send F'	'V. Send G'	'V. Send H'
<pre># ExpansionBusMixpointMute examples InterfaceName.Update('ExpansionBusMixpointMute', {'Input': '1', 'Output': '1'}) Value = InterfaceName.ReadStatus('ExpansionBusMixpointMute', {'Input': '1', 'Output': '1'}) InterfaceName.SubscribeStatus('ExpansionBusMixpointMute', None, FeedbackHandler)</pre>			
Command GroupBassInputFilter ³	Value -24 to 24 in steps of 0.1 dB		
Qualifier Key 'Group'	Qualifier Value '1' – '32'		
<pre># GroupBassInputFilter examples InterfaceName.Update('GroupBassInputFilter', {'Group': '1'}) Value = InterfaceName.ReadStatus('GroupBassInputFilter', {'Group': '1'}) InterfaceName.SubscribeStatus('GroupBassInputFilter', None, FeedbackHandler)</pre>			
Command GroupBassVirtualReturnFilter ³	Value -24 to 24 in steps of 0.1 dB		
Qualifier Key 'Group'	Qualifier Value '1' – '32'		
<pre># GroupBassVirtualReturnFilter examples InterfaceName.Update('GroupBassVirtualReturnFilter', {'Group': '1'}) Value = InterfaceName.ReadStatus('GroupBassVirtualReturnFilter', {'Group': '1'}) InterfaceName.SubscribeStatus('GroupBassVirtualReturnFilter', None, FeedbackHandler)</pre>			
Command GroupMixpointGain	Value -35 to 25 in steps of 0.1 dB		
Qualifier Key 'Group'	Qualifier Value '1' – '32'		
<pre># GroupMixpointGain examples InterfaceName.Update('GroupMixpointGain', {'Group': '1'}) Value = InterfaceName.ReadStatus('GroupMixpointGain', {'Group': '1'}) InterfaceName.SubscribeStatus('GroupMixpointGain', None, FeedbackHandler)</pre>			
Command GroupMute	Value 'On'	Value 'Off'	
Qualifier Key 'Group'	Qualifier Value '1' – '32'		
<pre># GroupMute examples InterfaceName.Update('GroupMute', {'Group': '1'}) Value = InterfaceName.ReadStatus('GroupMute', {'Group': '1'}) InterfaceName.SubscribeStatus('GroupMute', None, FeedbackHandler)</pre>			
Command GroupOutputAttenuation	Value -100 to 0 in steps of 0.1 dB		

Global Scripter Module
Communication Sheet

Qualifier Key 'Group'	Qualifier Value '1' – '32'
# GroupOutputAttenuation examples InterfaceName.Update('GroupOutputAttenuation', {'Group': '1'}) Value = InterfaceName.ReadStatus('GroupOutputAttenuation', {'Group': '1'}) InterfaceName.SubscribeStatus('GroupOutputAttenuation', None, FeedbackHandler)	
Command GroupPostmixerTrim	Value -12 to 12 in steps of 0.1 dB
Qualifier Key 'Group'	Qualifier Value '1' – '32'
# GroupPostmixerTrim examples InterfaceName.Update('GroupPostmixerTrim', {'Group': '1'}) Value = InterfaceName.ReadStatus('GroupPostmixerTrim', {'Group': '1'}) InterfaceName.SubscribeStatus('GroupPostmixerTrim', None, FeedbackHandler)	
Command GroupPremixerGain	Value -100 to 12 in steps of 0.1 dB
Qualifier Key 'Group'	Qualifier Value '1' – '32'
# GroupPremixerGain examples InterfaceName.Update('GroupPremixerGain', {'Group': '1'}) Value = InterfaceName.ReadStatus('GroupPremixerGain', {'Group': '1'}) InterfaceName.SubscribeStatus('GroupPremixerGain', None, FeedbackHandler)	
Command GroupTrebleInputFilter ³	Value -24 to 24 in steps of 0.1 dB
Qualifier Key 'Group'	Qualifier Value '1' – '32'
# GroupTrebleInputFilter examples InterfaceName.Update('GroupTrebleInputFilter', {'Group': '1'}) Value = InterfaceName.ReadStatus('GroupTrebleInputFilter', {'Group': '1'}) InterfaceName.SubscribeStatus('GroupTrebleInputFilter', None, FeedbackHandler)	
Command GroupTrebleVirtualReturnFilter ³	Value -24 to 24 in steps of 0.1 dB
Qualifier Key 'Group'	Qualifier Value '1' – '32'
# GroupTrebleVirtualReturnFilter examples InterfaceName.Update('GroupTrebleVirtualReturnFilter', {'Group': '1'}) Value = InterfaceName.ReadStatus('GroupTrebleVirtualReturnFilter', {'Group': '1'}) InterfaceName.SubscribeStatus('GroupTrebleVirtualReturnFilter', None, FeedbackHandler)	
Command GroupVirtualReturnGain	Value

Global Scripter Module
Communication Sheet

	-100 to 12 in steps of 0.1 dB		
Qualifier Key 'Group'	Qualifier Value '1' – '32'		
# GroupVirtualReturnGain examples InterfaceName.Update('GroupVirtualReturnGain', {'Group': '1'}) Value = InterfaceName.ReadStatus('GroupVirtualReturnGain', {'Group': '1'}) InterfaceName.SubscribeStatus('GroupVirtualReturnGain', None, FeedbackHandler)			
Command Hook	Value 'Off'	Value 'On'	Value 'Terminated'
# Hook examples InterfaceName.Update('Hook') Value = InterfaceName.ReadStatus('Hook') InterfaceName.SubscribeStatus('Hook', None, FeedbackHandler)			
Command InputGain	Value -18 to 80 in steps of 0.1 dB		
Qualifier Key 'Input'	Qualifier Value '1' – '12'	Qualifier Value 'Telephone Rx' ¹	
# InputGain examples InterfaceName.Update('InputGain', {'Input': '1'}) Value = InterfaceName.ReadStatus('InputGain', {'Input': '1'}) InterfaceName.SubscribeStatus('InputGain', None, FeedbackHandler)			
Command InputMute	Value 'On'	Value 'Off'	
Qualifier Key 'Input'	Qualifier Value '1' – '12'	Qualifier Value 'Telephone Rx' ¹	
# InputMute examples InterfaceName.Update('InputMute', {'Input': '1'}) Value = InterfaceName.ReadStatus('InputMute', {'Input': '1'}) InterfaceName.SubscribeStatus('InputMute', None, FeedbackHandler)			
Command MixpointGain	Value -35 to 25 in steps of 0.1 dB		
Qualifier Key 'Input'	Qualifier Value '1' – '12'	Qualifier Value 'V. Return A'	Qualifier Value 'V. Return B'
	'V. Return C'	'V. Return D'	'V. Return E'
	'V. Return F'	'V. Return G'	'V. Return H'
	'Telephone Rx'		
Qualifier Key 'Output'	Qualifier Value '1' – '8'	Qualifier Value 'V. Send A'	Qualifier Value 'V. Send B'
	'V. Send C'	'V. Send D'	'V. Send E'

Global Scripter Module
Communication Sheet

	'V. Send F'	'V. Send G'	'V. Send H'
	'Exp. 1'	'Exp. 2'	'Exp. 3'
	'Exp. 4'	'Exp. 5'	'Exp. 6'
	'Exp. 7'	'Exp. 8'	
# MixpointGain examples InterfaceName.Update('MixpointGain', {'Input': '1', 'Output': '1'}) Value = InterfaceName.ReadStatus('MixpointGain', {'Input': '1', 'Output': '1'}) InterfaceName.SubscribeStatus('MixpointGain', None, FeedbackHandler)			
Command MixpointMute	Value 'On'	Value 'Off'	
Qualifier Key 'Input'	Qualifier Value '1' – '12' 'V. Return C' 'V. Return F' 'Telephone Rx'	Qualifier Value 'V. Return A' 'V. Return D' 'V. Return G'	Qualifier Value 'V. Return B' 'V. Return E' 'V. Return H'
Qualifier Key 'Output'	Qualifier Value '1' – '8' 'V. Send C' 'V. Send F' 'Exp. 1' 'Exp. 4' 'Exp. 7'	Qualifier Value 'V. Send A' 'V. Send D' 'V. Send G' 'Exp. 2' 'Exp. 5' 'Exp. 8'	Qualifier Value 'V. Send B' 'V. Send E' 'V. Send H' 'Exp. 3' 'Exp. 6'
# MixpointMute examples InterfaceName.Update('MixpointMute', {'Input': '1', 'Output': '1'}) Value = InterfaceName.ReadStatus('MixpointMute', {'Input': '1', 'Output': '1'}) InterfaceName.SubscribeStatus('MixpointMute', None, FeedbackHandler)			
Command OutputAttenuation	Value -100 to 0 in steps of 0.1 dB		
Qualifier Key 'Output'	Qualifier Value '1' – '8'	Qualifier Value 'Telephone Tx' ¹	
# OutputAttenuation examples InterfaceName.Update('OutputAttenuation', {'Output': '1'}) Value = InterfaceName.ReadStatus('OutputAttenuation', {'Output': '1'}) InterfaceName.SubscribeStatus('OutputAttenuation', None, FeedbackHandler)			
Command OutputMute	Value 'On'	Value 'Off'	
Qualifier Key 'Output'	Qualifier Value '1' – '8'	Qualifier Value 'Telephone Tx' ¹	
# OutputMute examples InterfaceName.Update('OutputMute', {'Output': '1'})			

Global Scripter Module
Communication Sheet

Value = InterfaceName.ReadStatus('OutputMute', {'Output': '1'}) InterfaceName.SubscribeStatus('OutputMute', None, FeedbackHandler)			
Command OutputPostmixerTrim	Value -12 to 12 in steps of 0.1 dB		
Qualifier Key 'Output'	Qualifier Value '1' – '8'		
# OutputPostmixerTrim examples InterfaceName.Update('OutputPostmixerTrim', {'Output': '1'}) Value = InterfaceName.ReadStatus('OutputPostmixerTrim', {'Output': '1'}) InterfaceName.SubscribeStatus('OutputPostmixerTrim', None, FeedbackHandler)			
Command PartNumber	Value 'String'		
# PartNumber examples InterfaceName.Update('PartNumber') Value = InterfaceName.ReadStatus('PartNumber') InterfaceName.SubscribeStatus('PartNumber', None, FeedbackHandler)			
Command PhoneErrorStatus	Value 'Normal'	Value 'Unrecognized phone command'	Value 'Phone was not initialized properly'
# PhoneErrorStatus examples Value = InterfaceName.ReadStatus('PhoneErrorStatus') InterfaceName.SubscribeStatus('PhoneErrorStatus', None, FeedbackHandler)			
Command PremixerGain	Value -100 to 12 in steps of 0.1 dB		
Qualifier Key 'Input'	Qualifier Value '1' – '12'	Qualifier Value 'Telephone Rx' ¹	
# PremixerGain examples InterfaceName.Update('PremixerGain', {'Input': '1'}) Value = InterfaceName.ReadStatus('PremixerGain', {'Input': '1'}) InterfaceName.SubscribeStatus('PremixerGain', None, FeedbackHandler)			
Command PremixerMute	Value 'On'	Value 'Off'	
Qualifier Key 'Input'	Qualifier Value '1' – '12'	Qualifier Value 'Telephone Rx' ¹	
# PremixerMute examples InterfaceName.Update('PremixerMute', {'Input': '1'}) Value = InterfaceName.ReadStatus('PremixerMute', {'Input': '1'}) InterfaceName.SubscribeStatus('PremixerMute', None, FeedbackHandler)			
Command VirtualReturnGain	Value -100 to 12 in steps of 0.1 dB		
Qualifier Key	Qualifier Value	Qualifier Value	Qualifier Value

Global Scripter Module Communication Sheet

'Input'	'A'	'B'	'C'
	'D'	'E'	'F'
	'G'	'H'	
# VirtualReturnGain examples InterfaceName.Update('VirtualReturnGain', {'Input': 'A'}) Value = InterfaceName.ReadStatus('VirtualReturnGain', {'Input': 'A'}) InterfaceName.SubscribeStatus('VirtualReturnGain', None, FeedbackHandler)			
Command VirtualReturnMute	Value 'On'	Value 'Off'	
Qualifier Key 'Input'	Qualifier Value 'A'	Qualifier Value 'B'	Qualifier Value 'C'
	'D'	'E'	'F'
	'G'	'H'	
# VirtualReturnMute examples InterfaceName.Update('VirtualReturnMute', {'Input': 'A'}) Value = InterfaceName.ReadStatus('VirtualReturnMute', {'Input': 'A'}) InterfaceName.SubscribeStatus('VirtualReturnMute', None, FeedbackHandler)			

¹ Only applicable for DMP 128CP and DMP 128CP AT models

² For AT models, Inputs 41 – 56 will refer to Expansion Inputs 1 – 16 if the 'Use Extron Expansion Bus for channels 41 – 56' setting is selected in the DSP Configurator software under Tools → Expansion Bus.

³ This command requires a Bass & Treble Filter block to be configured on the Extron DSP Configurator.

⁴ Only supported for DMP 128CP AT and DMP 128 AT models.

Cable and Adapter Requirements

Captive Screw to Captive Screw RS-232 Serial Cable

Notes for the Device

Serial communication

Port Type: RS-232

Baud Rate: 38400


Data Bits: 8

Parity: None


Stop Bits: One

Flow Control: None

Pin Assignments Diagram



Signal	Main Cable	Signal
TxD		TxD
RxD		RxD
GND		GND



Network communication

When configuring the Ethernet module, be sure device settings match those of the Global Scripter ethernet interface

Port Type:	Ethernet
Default Port:	23
Logon Credentials Supported:	Yes
Multi-Connection	Yes
Capabilities:	
Port Changeability:	Yes

Ethernet Module Configuration Description

Please refer to user manual for settings and changes to the network communication

Notes for the Device

Appendix A. Set Commands

Auto Hangup Disabled	WAH0, PHON\x0D\x0A
Auto Hangup Enabled	WAH1, PHON\x0D\x0A
DTMF Tone Volume 0	WDG0000, PHON\x0D\x0A
DTMF Tone Volume 100	WDG1000, PHON\x0D\x0A
Dial DTMF 0	WS0, PHON\x0D\x0A
Dial DTMF 9	WS9, PHON\x0D\x0A
Dial DTMF #	WS#, PHON\x0D\x0A
Dial DTMF *	WS*, PHON\x0D\x0A
Expansion Bus Mix-point Gain -35 Output 1 Input 1	wG22100*01698AU\x0D\x0A
Expansion Bus Mix-point Gain 25 Output 1 Input 1	wG22100*02298AU\x0D\x0A
Expansion Bus Mix-point Gain -35 Output 8 Input 1	wG22107*01698AU\x0D\x0A
Expansion Bus Mix-point Gain 25 Output 8 Input 1	wG22107*02298AU\x0D\x0A
Expansion Bus Mix-point Gain -35 Output V. Send A Input 1	wG22109*01698AU\x0D\x0A
Expansion Bus Mix-point Gain 25 Output V. Send A Input 1	wG22109*02298AU\x0D\x0A
Expansion Bus Mix-point Gain -35 Output V. Send B Input 1	wG22110*01698AU\x0D\x0A
Expansion Bus Mix-point Gain 25 Output V. Send B Input 1	wG22110*02298AU\x0D\x0A
Expansion Bus Mix-point Gain -35 Output V. Send C Input 1	wG22111*01698AU\x0D\x0A
Expansion Bus Mix-point Gain 25 Output V. Send C Input 1	wG22111*02298AU\x0D\x0A
Expansion Bus Mix-point Gain -35 Output V. Send D Input 1	wG22112*01698AU\x0D\x0A
Expansion Bus Mix-point Gain 25 Output V. Send D Input 1	wG22112*02298AU\x0D\x0A
Expansion Bus Mix-point Gain -35 Output V. Send E Input 1	wG22113*01698AU\x0D\x0A
Expansion Bus Mix-point Gain 25 Output V. Send E Input 1	wG22113*02298AU\x0D\x0A
Expansion Bus Mix-point Gain -35 Output V. Send F Input 1	wG22114*01698AU\x0D\x0A
Expansion Bus Mix-point Gain 25 Output V. Send F Input 1	wG22114*02298AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Expansion Bus Mix-point Gain -35 Output V. Send G Input 1	wG22115*01698AU\x0D\x0A
Expansion Bus Mix-point Gain 25 Output V. Send G Input 1	wG22115*02298AU\x0D\x0A
Expansion Bus Mix-point Gain -35 Output V. Send H Input 1	wG22116*01698AU\x0D\x0A
Expansion Bus Mix-point Gain 25 Output V. Send H Input 1	wG22116*02298AU\x0D\x0A
Expansion Bus Mix-point Gain -35 Output 1 Input 16	wG23600*01698AU\x0D\x0A
Expansion Bus Mix-point Gain 25 Output 1 Input 16	wG23600*02298AU\x0D\x0A
Expansion Bus Mix-point Gain -35 Output 8 Input 16	wG23607*01698AU\x0D\x0A
Expansion Bus Mix-point Gain 25 Output 8 Input 16	wG23607*02298AU\x0D\x0A
Expansion Bus Mix-point Gain -35 Output V. Send A Input 16	wG23609*01698AU\x0D\x0A
Expansion Bus Mix-point Gain 25 Output V. Send A Input 16	wG23609*02298AU\x0D\x0A
Expansion Bus Mix-point Gain -35 Output V. Send B Input 16	wG23610*01698AU\x0D\x0A
Expansion Bus Mix-point Gain 25 Output V. Send B Input 16	wG23610*02298AU\x0D\x0A
Expansion Bus Mix-point Gain -35 Output V. Send C Input 16	wG23611*01698AU\x0D\x0A
Expansion Bus Mix-point Gain 25 Output V. Send C Input 16	wG23611*02298AU\x0D\x0A
Expansion Bus Mix-point Gain -35 Output V. Send D Input 16	wG23612*01698AU\x0D\x0A
Expansion Bus Mix-point Gain 25 Output V. Send D Input 16	wG23612*02298AU\x0D\x0A
Expansion Bus Mix-point Gain -35 Output V. Send E Input 16	wG23613*01698AU\x0D\x0A
Expansion Bus Mix-point Gain 25 Output V. Send E Input 16	wG23613*02298AU\x0D\x0A
Expansion Bus Mix-point Gain -35 Output V. Send F Input 16	wG23614*01698AU\x0D\x0A
Expansion Bus Mix-point Gain 25 Output V. Send F Input 16	wG23614*02298AU\x0D\x0A
Expansion Bus Mix-point Gain -35 Output V. Send G Input 16	wG23615*01698AU\x0D\x0A
Expansion Bus Mix-point Gain 25 Output V. Send G Input 16	wG23615*02298AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Expansion Bus Mix-point Gain -35 Output V. Send H Input 16	wG23616*01698AU\x0D\x0A
Expansion Bus Mix-point Gain 25 Output V. Send H Input 16	wG23616*02298AU\x0D\x0A
Expansion Bus Mix-point Mute Off Output 1 Input 1	wM22100*0AU\x0D\x0A
Expansion Bus Mix-point Mute On Output 1 Input 1	wM22100*1AU\x0D\x0A
Expansion Bus Mix-point Mute Off Output 8 Input 1	wM22107*0AU\x0D\x0A
Expansion Bus Mix-point Mute On Output 8 Input 1	wM22107*1AU\x0D\x0A
Expansion Bus Mix-point Mute Off Output V. Send A Input 1	wM22109*0AU\x0D\x0A
Expansion Bus Mix-point Mute On Output V. Send A Input 1	wM22109*1AU\x0D\x0A
Expansion Bus Mix-point Mute Off Output V. Send B Input 1	wM22110*0AU\x0D\x0A
Expansion Bus Mix-point Mute On Output V. Send B Input 1	wM22110*1AU\x0D\x0A
Expansion Bus Mix-point Mute Off Output V. Send C Input 1	wM22111*0AU\x0D\x0A
Expansion Bus Mix-point Mute On Output V. Send C Input 1	wM22111*1AU\x0D\x0A
Expansion Bus Mix-point Mute Off Output V. Send D Input 1	wM22112*0AU\x0D\x0A
Expansion Bus Mix-point Mute On Output V. Send D Input 1	wM22112*1AU\x0D\x0A
Expansion Bus Mix-point Mute Off Output V. Send E Input 1	wM22113*0AU\x0D\x0A
Expansion Bus Mix-point Mute On Output V. Send E Input 1	wM22113*1AU\x0D\x0A
Expansion Bus Mix-point Mute Off Output V. Send F Input 1	wM22114*0AU\x0D\x0A
Expansion Bus Mix-point Mute On Output V. Send F Input 1	wM22114*1AU\x0D\x0A
Expansion Bus Mix-point Mute Off Output V. Send G Input 1	wM22115*0AU\x0D\x0A
Expansion Bus Mix-point Mute On Output V. Send G Input 1	wM22115*1AU\x0D\x0A
Expansion Bus Mix-point Mute Off Output V. Send H Input 1	wM22116*0AU\x0D\x0A
Expansion Bus Mix-point Mute On Output V. Send H Input 1	wM22116*1AU\x0D\x0A

Global Scripter Module Communication Sheet

Revision: 5/20/2019

Expansion Bus Mix-point Mute Off Output 1 Input 16	wM23600*0AU\x0D\x0A
Expansion Bus Mix-point Mute On Output 1 Input 16	wM23600*1AU\x0D\x0A
Expansion Bus Mix-point Mute Off Output 8 Input 16	wM23607*0AU\x0D\x0A
Expansion Bus Mix-point Mute On Output 8 Input 16	wM23607*1AU\x0D\x0A
Expansion Bus Mix-point Mute Off Output V. Send A Input 16	wM23609*0AU\x0D\x0A
Expansion Bus Mix-point Mute On Output V. Send A Input 16	wM23609*1AU\x0D\x0A
Expansion Bus Mix-point Mute Off Output V. Send B Input 16	wM23610*0AU\x0D\x0A
Expansion Bus Mix-point Mute On Output V. Send B Input 16	wM23610*1AU\x0D\x0A
Expansion Bus Mix-point Mute Off Output V. Send C Input 16	wM23611*0AU\x0D\x0A
Expansion Bus Mix-point Mute On Output V. Send C Input 16	wM23611*1AU\x0D\x0A
Expansion Bus Mix-point Mute Off Output V. Send D Input 16	wM23612*0AU\x0D\x0A
Expansion Bus Mix-point Mute On Output V. Send D Input 16	wM23612*1AU\x0D\x0A
Expansion Bus Mix-point Mute Off Output V. Send E Input 16	wM23613*0AU\x0D\x0A
Expansion Bus Mix-point Mute On Output V. Send E Input 16	wM23613*1AU\x0D\x0A
Expansion Bus Mix-point Mute Off Output V. Send F Input 16	wM23614*0AU\x0D\x0A
Expansion Bus Mix-point Mute On Output V. Send F Input 16	wM23614*1AU\x0D\x0A
Expansion Bus Mix-point Mute Off Output V. Send G Input 16	wM23615*0AU\x0D\x0A
Expansion Bus Mix-point Mute On Output V. Send G Input 16	wM23615*1AU\x0D\x0A
Expansion Bus Mix-point Mute Off Output V. Send H Input 16	wM23616*0AU\x0D\x0A
Expansion Bus Mix-point Mute On Output V. Send H Input 16	wM23616*1AU\x0D\x0A
Group Bass Input Filter -24 Group 1	wd1*-00240grpm\x0D\x0A
Group Bass Input Filter 24 Group 1	wd1*+00240grpm\x0D\x0A
Group Bass Input Filter -24 Group 32	wd32*-00240grpm\x0D\x0A
Group Bass Input Filter 24 Group 32	wd32*+00240grpm\x0D\x0A

Global Scriptor Module
Communication Sheet

Group Bass Virtual Return Filter -24 Group 1	wd1*-00240grpm\x0D\x0A
Group Bass Virtual Return Filter 24 Group 1	wd1*+00240grpm\x0D\x0A
Group Bass Virtual Return Filter -24 Group 32	wd32*-00240grpm\x0D\x0A
Group Bass Virtual Return Filter 24 Group 32	wd32*+00240grpm\x0D\x0A
Group Mix-point Gain -35 Group 1	wd1*-00350grpm\x0D\x0A
Group Mix-point Gain 25 Group 1	wd1*+00250grpm\x0D\x0A
Group Mix-point Gain -35 Group 32	wd32*-00350grpm\x0D\x0A
Group Mix-point Gain 25 Group 32	wd32*+00250grpm\x0D\x0A
Group Mute Off Group 1	wd1*0grpm\x0D\x0A
Group Mute On Group 1	wd1*1grpm\x0D\x0A
Group Mute Off Group 32	wd32*0grpm\x0D\x0A
Group Mute On Group 32	wd32*1grpm\x0D\x0A
Group Output Attenuation -100 Group 1	wd1*-01000grpm\x0D\x0A
Group Output Attenuation 0 Group 1	wd1*+00000grpm\x0D\x0A
Group Output Attenuation -100 Group 32	wd32*-01000grpm\x0D\x0A
Group Output Attenuation 0 Group 32	wd32*+00000grpm\x0D\x0A
Group Post-mixer Trim -12 Group 1	wd1*-00120grpm\x0D\x0A
Group Post-mixer Trim 12 Group 1	wd1*+00120grpm\x0D\x0A
Group Post-mixer Trim -12 Group 32	wd32*-00120grpm\x0D\x0A
Group Post-mixer Trim 12 Group 32	wd32*+00120grpm\x0D\x0A
Group Pre-mixer Gain -100 Group 1	wd1*-01000grpm\x0D\x0A
Group Pre-mixer Gain 12 Group 1	wd1*+00120grpm\x0D\x0A
Group Pre-mixer Gain -100 Group 32	wd32*-01000grpm\x0D\x0A
Group Pre-mixer Gain 12 Group 32	wd32*+00120grpm\x0D\x0A
Group Treble Input Filter -24 Group 1	wd1*-00240grpm\x0D\x0A
Group Treble Input Filter 24 Group 1	wd1*+00240grpm\x0D\x0A
Group Treble Input Filter -24 Group 32	wd32*-00240grpm\x0D\x0A
Group Treble Input Filter 24 Group 32	wd32*+00240grpm\x0D\x0A
Group Treble Virtual Return Filter -24 Group 1	wd1*-00240grpm\x0D\x0A
Group Treble Virtual Return Filter 24 Group 1	wd1*+00240grpm\x0D\x0A
Group Treble Virtual Return Filter -24 Group 32	wd32*-00240grpm\x0D\x0A
Group Treble Virtual Return Filter 24 Group 32	wd32*+00240grpm\x0D\x0A
Group Virtual Return Gain -100 Group 1	wd1*-01000grpm\x0D\x0A
Group Virtual Return Gain 12 Group 1	wd1*+00120grpm\x0D\x0A
Group Virtual Return Gain -100 Group 32	wd32*-01000grpm\x0D\x0A
Group Virtual Return Gain 12 Group 32	wd32*+00120grpm\x0D\x0A
Hook Off	WOFFHOOK, PHON\x0D\x0A
Hook On	WONHOOK, PHON\x0D\x0A
Hook Flash	WF, PHON\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Hook Dial Number '123456789'	WD123456789, PHON\x0D\x0A
Input Gain -18 Input 1	wG40000*01868AU\x0D\x0A
Input Gain 80 Input 1	wG40000*02848AU\x0D\x0A
Input Gain -18 Input 12	wG40011*01868AU\x0D\x0A
Input Gain 80 Input 12	wG40011*02848AU\x0D\x0A
Input Gain -18 Input Telephone Rx	wG40012*01868AU\x0D\x0A
Input Gain 80 Input Telephone Rx	wG40012*02848AU\x0D\x0A
Input Mute Off Input 1	wM40000*0AU\x0D\x0A
Input Mute On Input 1	wM40000*1AU\x0D\x0A
Input Mute Off Input 12	wM40011*0AU\x0D\x0A
Input Mute On Input 12	wM40011*1AU\x0D\x0A
Input Mute Off Input Telephone Rx	wM40012*0AU\x0D\x0A
Input Mute On Input Telephone Rx	wM40012*1AU\x0D\x0A
Mix-point Gain -35 Output 1 Input 1	wG20000*01698AU\x0D\x0A
Mix-point Gain 25 Output 1 Input 1	wG20000*02298AU\x0D\x0A
Mix-point Gain -35 Output 8 Input 1	wG20007*01698AU\x0D\x0A
Mix-point Gain 25 Output 8 Input 1	wG20007*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 1 Input 1	wG20017*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 1 Input 1	wG20017*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 2 Input 1	wG20018*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 2 Input 1	wG20018*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 3 Input 1	wG20019*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 3 Input 1	wG20019*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 4 Input 1	wG20020*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 4 Input 1	wG20020*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 5 Input 1	wG20021*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 5 Input 1	wG20021*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 6 Input 1	wG20022*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 6 Input 1	wG20022*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 7 Input 1	wG20023*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 7 Input 1	wG20023*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 8 Input 1	wG20024*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 8 Input 1	wG20024*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send A Input 1	wG20009*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send A Input 1	wG20009*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send B Input 1	wG20010*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send B Input 1	wG20010*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send C Input 1	wG20011*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send C Input 1	wG20011*02298AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Mix-point Gain -35 Output V. Send D Input 1	wG20012*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send D Input 1	wG20012*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send E Input 1	wG20013*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send E Input 1	wG20013*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send F Input 1	wG20014*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send F Input 1	wG20014*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send G Input 1	wG20015*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send G Input 1	wG20015*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send H Input 1	wG20016*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send H Input 1	wG20016*02298AU\x0D\x0A
Mix-point Gain -35 Output 1 Input 12	wG21100*01698AU\x0D\x0A
Mix-point Gain 25 Output 1 Input 12	wG21100*02298AU\x0D\x0A
Mix-point Gain -35 Output 8 Input 12	wG21107*01698AU\x0D\x0A
Mix-point Gain 25 Output 8 Input 12	wG21107*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 1 Input 12	wG21117*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 1 Input 12	wG21117*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 2 Input 12	wG21118*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 2 Input 12	wG21118*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 3 Input 12	wG21119*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 3 Input 12	wG21119*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 4 Input 12	wG21120*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 4 Input 12	wG21120*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 5 Input 12	wG21121*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 5 Input 12	wG21121*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 6 Input 12	wG21122*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 6 Input 12	wG21122*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 7 Input 12	wG21123*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 7 Input 12	wG21123*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 8 Input 12	wG21124*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 8 Input 12	wG21124*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send A Input 12	wG21109*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send A Input 12	wG21109*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send B Input 12	wG21110*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send B Input 12	wG21110*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send C Input 12	wG21111*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send C Input 12	wG21111*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send D Input 12	wG21112*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send D Input 12	wG21112*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send E Input 12	wG21113*01698AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 5/20/2019

Mix-point Gain 25 Output V. Send E Input 12	wG21113*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send F Input 12	wG21114*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send F Input 12	wG21114*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send G Input 12	wG21115*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send G Input 12	wG21115*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send H Input 12	wG21116*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send H Input 12	wG21116*02298AU\x0D\x0A
Mix-point Gain -35 Output 1 Input V. Return A	wG21300*01698AU\x0D\x0A
Mix-point Gain 25 Output 1 Input V. Return A	wG21300*02298AU\x0D\x0A
Mix-point Gain -35 Output 8 Input V. Return A	wG21307*01698AU\x0D\x0A
Mix-point Gain 25 Output 8 Input V. Return A	wG21307*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 1 Input V. Return A	wG21317*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 1 Input V. Return A	wG21317*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 2 Input V. Return A	wG21318*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 2 Input V. Return A	wG21318*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 3 Input V. Return A	wG21319*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 3 Input V. Return A	wG21319*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 4 Input V. Return A	wG21320*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 4 Input V. Return A	wG21320*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 5 Input V. Return A	wG21321*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 5 Input V. Return A	wG21321*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 6 Input V. Return A	wG21322*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 6 Input V. Return A	wG21322*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 7 Input V. Return A	wG21323*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 7 Input V. Return A	wG21323*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 8 Input V. Return A	wG21324*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 8 Input V. Return A	wG21324*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send A Input V. Return A	wG21309*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send A Input V. Return A	wG21309*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send B Input V. Return A	wG21310*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send B Input V. Return A	wG21310*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send C Input V. Return A	wG21311*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send C Input V. Return A	wG21311*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send D Input V. Return A	wG21312*01698AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Mix-point Gain 25 Output V. Send D Input V. Return A	wG21312*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send E Input V. Return A	wG21313*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send E Input V. Return A	wG21313*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send F Input V. Return A	wG21314*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send F Input V. Return A	wG21314*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send G Input V. Return A	wG21315*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send G Input V. Return A	wG21315*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send H Input V. Return A	wG21316*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send H Input V. Return A	wG21316*02298AU\x0D\x0A
Mix-point Gain -35 Output 1 Input V. Return B	wG21400*01698AU\x0D\x0A
Mix-point Gain 25 Output 1 Input V. Return B	wG21400*02298AU\x0D\x0A
Mix-point Gain -35 Output 8 Input V. Return B	wG21407*01698AU\x0D\x0A
Mix-point Gain 25 Output 8 Input V. Return B	wG21407*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 1 Input V. Return B	wG21417*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 1 Input V. Return B	wG21417*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 2 Input V. Return B	wG21418*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 2 Input V. Return B	wG21418*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 3 Input V. Return B	wG21419*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 3 Input V. Return B	wG21419*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 4 Input V. Return B	wG21420*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 4 Input V. Return B	wG21420*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 5 Input V. Return B	wG21421*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 5 Input V. Return B	wG21421*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 6 Input V. Return B	wG21422*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 6 Input V. Return B	wG21422*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 7 Input V. Return B	wG21423*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 7 Input V. Return B	wG21423*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 8 Input V. Return B	wG21424*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 8 Input V. Return B	wG21424*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send A Input V. Return B	wG21409*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send A Input V. Return B	wG21409*02298AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Mix-point Gain -35 Output V. Send B Input V. Return B	wG21410*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send B Input V. Return B	wG21410*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send C Input V. Return B	wG21411*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send C Input V. Return B	wG21411*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send D Input V. Return B	wG21412*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send D Input V. Return B	wG21412*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send E Input V. Return B	wG21413*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send E Input V. Return B	wG21413*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send F Input V. Return B	wG21414*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send F Input V. Return B	wG21414*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send G Input V. Return B	wG21415*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send G Input V. Return B	wG21415*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send H Input V. Return B	wG21416*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send H Input V. Return B	wG21416*02298AU\x0D\x0A
Mix-point Gain -35 Output 1 Input V. Return C	wG21500*01698AU\x0D\x0A
Mix-point Gain 25 Output 1 Input V. Return C	wG21500*02298AU\x0D\x0A
Mix-point Gain -35 Output 8 Input V. Return C	wG21507*01698AU\x0D\x0A
Mix-point Gain 25 Output 8 Input V. Return C	wG21507*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 1 Input V. Return C	wG21517*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 1 Input V. Return C	wG21517*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 2 Input V. Return C	wG21518*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 2 Input V. Return C	wG21518*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 3 Input V. Return C	wG21519*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 3 Input V. Return C	wG21519*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 4 Input V. Return C	wG21520*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 4 Input V. Return C	wG21520*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 5 Input V. Return C	wG21521*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 5 Input V. Return C	wG21521*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 6 Input V. Return C	wG21522*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 6 Input V. Return C	wG21522*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 7 Input V. Return C	wG21523*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 7 Input V. Return C	wG21523*02298AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 5/20/2019

Mix-point Gain -35 Output Exp. 8 Input V. Return C	wG21524*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 8 Input V. Return C	wG21524*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send A Input V. Return C	wG21509*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send A Input V. Return C	wG21509*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send B Input V. Return C	wG21510*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send B Input V. Return C	wG21510*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send C Input V. Return C	wG21511*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send C Input V. Return C	wG21511*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send D Input V. Return C	wG21512*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send D Input V. Return C	wG21512*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send E Input V. Return C	wG21513*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send E Input V. Return C	wG21513*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send F Input V. Return C	wG21514*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send F Input V. Return C	wG21514*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send G Input V. Return C	wG21515*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send G Input V. Return C	wG21515*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send H Input V. Return C	wG21516*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send H Input V. Return C	wG21516*02298AU\x0D\x0A
Mix-point Gain -35 Output 1 Input V. Return D	wG21600*01698AU\x0D\x0A
Mix-point Gain 25 Output 1 Input V. Return D	wG21600*02298AU\x0D\x0A
Mix-point Gain -35 Output 8 Input V. Return D	wG21607*01698AU\x0D\x0A
Mix-point Gain 25 Output 8 Input V. Return D	wG21607*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 1 Input V. Return D	wG21617*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 1 Input V. Return D	wG21617*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 2 Input V. Return D	wG21618*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 2 Input V. Return D	wG21618*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 3 Input V. Return D	wG21619*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 3 Input V. Return D	wG21619*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 4 Input V. Return D	wG21620*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 4 Input V. Return D	wG21620*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 5 Input V. Return D	wG21621*01698AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Mix-point Gain 25 Output Exp. 5 Input V. Return D	wG21621*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 6 Input V. Return D	wG21622*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 6 Input V. Return D	wG21622*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 7 Input V. Return D	wG21623*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 7 Input V. Return D	wG21623*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 8 Input V. Return D	wG21624*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 8 Input V. Return D	wG21624*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send A Input V. Return D	wG21609*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send A Input V. Return D	wG21609*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send B Input V. Return D	wG21610*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send B Input V. Return D	wG21610*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send C Input V. Return D	wG21611*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send C Input V. Return D	wG21611*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send D Input V. Return D	wG21612*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send D Input V. Return D	wG21612*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send E Input V. Return D	wG21613*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send E Input V. Return D	wG21613*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send F Input V. Return D	wG21614*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send F Input V. Return D	wG21614*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send G Input V. Return D	wG21615*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send G Input V. Return D	wG21615*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send H Input V. Return D	wG21616*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send H Input V. Return D	wG21616*02298AU\x0D\x0A
Mix-point Gain -35 Output 1 Input V. Return E	wG21700*01698AU\x0D\x0A
Mix-point Gain 25 Output 1 Input V. Return E	wG21700*02298AU\x0D\x0A
Mix-point Gain -35 Output 8 Input V. Return E	wG21707*01698AU\x0D\x0A
Mix-point Gain 25 Output 8 Input V. Return E	wG21707*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 1 Input V. Return E	wG21717*01698AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Mix-point Gain 25 Output Exp. 1 Input V. Return E	wG21717*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 2 Input V. Return E	wG21718*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 2 Input V. Return E	wG21718*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 3 Input V. Return E	wG21719*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 3 Input V. Return E	wG21719*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 4 Input V. Return E	wG21720*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 4 Input V. Return E	wG21720*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 5 Input V. Return E	wG21721*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 5 Input V. Return E	wG21721*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 6 Input V. Return E	wG21722*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 6 Input V. Return E	wG21722*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 7 Input V. Return E	wG21723*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 7 Input V. Return E	wG21723*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 8 Input V. Return E	wG21724*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 8 Input V. Return E	wG21724*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send A Input V. Return E	wG21709*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send A Input V. Return E	wG21709*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send B Input V. Return E	wG21710*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send B Input V. Return E	wG21710*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send C Input V. Return E	wG21711*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send C Input V. Return E	wG21711*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send D Input V. Return E	wG21712*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send D Input V. Return E	wG21712*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send E Input V. Return E	wG21713*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send E Input V. Return E	wG21713*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send F Input V. Return E	wG21714*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send F Input V. Return E	wG21714*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send G Input V. Return E	wG21715*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send G Input V. Return E	wG21715*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send H Input V. Return E	wG21716*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send H Input V. Return E	wG21716*02298AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Mix-point Gain -35 Output 1 Input V. Return F	wG21800*01698AU\x0D\x0A
Mix-point Gain 25 Output 1 Input V. Return F	wG21800*02298AU\x0D\x0A
Mix-point Gain -35 Output 8 Input V. Return F	wG21807*01698AU\x0D\x0A
Mix-point Gain 25 Output 8 Input V. Return F	wG21807*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 1 Input V. Return F	wG21817*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 1 Input V. Return F	wG21817*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 2 Input V. Return F	wG21818*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 2 Input V. Return F	wG21818*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 3 Input V. Return F	wG21819*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 3 Input V. Return F	wG21819*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 4 Input V. Return F	wG21820*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 4 Input V. Return F	wG21820*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 5 Input V. Return F	wG21821*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 5 Input V. Return F	wG21821*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 6 Input V. Return F	wG21822*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 6 Input V. Return F	wG21822*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 7 Input V. Return F	wG21823*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 7 Input V. Return F	wG21823*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 8 Input V. Return F	wG21824*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 8 Input V. Return F	wG21824*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send A Input V. Return F	wG21809*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send A Input V. Return F	wG21809*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send B Input V. Return F	wG21810*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send B Input V. Return F	wG21810*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send C Input V. Return F	wG21811*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send C Input V. Return F	wG21811*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send D Input V. Return F	wG21812*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send D Input V. Return F	wG21812*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send E Input V. Return F	wG21813*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send E Input V. Return F	wG21813*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send F Input V. Return F	wG21814*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send F Input V. Return F	wG21814*02298AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 5/20/2019

Mix-point Gain -35 Output V. Send G Input V. Return F	WG21815*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send G Input V. Return F	WG21815*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send H Input V. Return F	WG21816*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send H Input V. Return F	WG21816*02298AU\x0D\x0A
Mix-point Gain -35 Output 1 Input V. Return G	WG21900*01698AU\x0D\x0A
Mix-point Gain 25 Output 1 Input V. Return G	WG21900*02298AU\x0D\x0A
Mix-point Gain -35 Output 8 Input V. Return G	WG21907*01698AU\x0D\x0A
Mix-point Gain 25 Output 8 Input V. Return G	WG21907*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 1 Input V. Return G	WG21917*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 1 Input V. Return G	WG21917*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 2 Input V. Return G	WG21918*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 2 Input V. Return G	WG21918*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 3 Input V. Return G	WG21919*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 3 Input V. Return G	WG21919*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 4 Input V. Return G	WG21920*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 4 Input V. Return G	WG21920*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 5 Input V. Return G	WG21921*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 5 Input V. Return G	WG21921*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 6 Input V. Return G	WG21922*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 6 Input V. Return G	WG21922*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 7 Input V. Return G	WG21923*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 7 Input V. Return G	WG21923*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 8 Input V. Return G	WG21924*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 8 Input V. Return G	WG21924*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send A Input V. Return G	WG21909*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send A Input V. Return G	WG21909*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send B Input V. Return G	WG21910*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send B Input V. Return G	WG21910*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send C Input V. Return G	WG21911*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send C Input V. Return G	WG21911*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send D Input V. Return G	WG21912*01698AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Mix-point Gain 25 Output V. Send D Input V. Return G	wG21912*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send E Input V. Return G	wG21913*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send E Input V. Return G	wG21913*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send F Input V. Return G	wG21914*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send F Input V. Return G	wG21914*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send G Input V. Return G	wG21915*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send G Input V. Return G	wG21915*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send H Input V. Return G	wG21916*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send H Input V. Return G	wG21916*02298AU\x0D\x0A
Mix-point Gain -35 Output 1 Input V. Return H	wG22000*01698AU\x0D\x0A
Mix-point Gain 25 Output 1 Input V. Return H	wG22000*02298AU\x0D\x0A
Mix-point Gain -35 Output 8 Input V. Return H	wG22007*01698AU\x0D\x0A
Mix-point Gain 25 Output 8 Input V. Return H	wG22007*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 1 Input V. Return H	wG22017*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 1 Input V. Return H	wG22017*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 2 Input V. Return H	wG22018*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 2 Input V. Return H	wG22018*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 3 Input V. Return H	wG22019*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 3 Input V. Return H	wG22019*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 4 Input V. Return H	wG22020*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 4 Input V. Return H	wG22020*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 5 Input V. Return H	wG22021*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 5 Input V. Return H	wG22021*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 6 Input V. Return H	wG22022*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 6 Input V. Return H	wG22022*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 7 Input V. Return H	wG22023*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 7 Input V. Return H	wG22023*02298AU\x0D\x0A
Mix-point Gain -35 Output Exp. 8 Input V. Return H	wG22024*01698AU\x0D\x0A
Mix-point Gain 25 Output Exp. 8 Input V. Return H	wG22024*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send A Input V. Return H	wG22009*01698AU\x0D\x0A

Global Scripter Module Communication Sheet

Revision: 5/20/2019

Mix-point Gain 25 Output V. Send A Input V. Return H	wG22009*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send B Input V. Return H	wG22010*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send B Input V. Return H	wG22010*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send C Input V. Return H	wG22011*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send C Input V. Return H	wG22011*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send D Input V. Return H	wG22012*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send D Input V. Return H	wG22012*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send E Input V. Return H	wG22013*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send E Input V. Return H	wG22013*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send F Input V. Return H	wG22014*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send F Input V. Return H	wG22014*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send G Input V. Return H	wG22015*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send G Input V. Return H	wG22015*02298AU\x0D\x0A
Mix-point Gain -35 Output V. Send H Input V. Return H	wG22016*01698AU\x0D\x0A
Mix-point Gain 25 Output V. Send H Input V. Return H	wG22016*02298AU\x0D\x0A
Mix-point Mute Off Output 1 Input 1	wM20000*0AU\x0D\x0A
Mix-point Mute On Output 1 Input 1	wM20000*1AU\x0D\x0A
Mix-point Mute Off Output 8 Input 1	wM20007*0AU\x0D\x0A
Mix-point Mute On Output 8 Input 1	wM20007*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 1 Input 1	wM20017*0AU\x0D\x0A
Mix-point Mute On Output Exp. 1 Input 1	wM20017*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 2 Input 1	wM20018*0AU\x0D\x0A
Mix-point Mute On Output Exp. 2 Input 1	wM20018*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 3 Input 1	wM20019*0AU\x0D\x0A
Mix-point Mute On Output Exp. 3 Input 1	wM20019*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 4 Input 1	wM20020*0AU\x0D\x0A
Mix-point Mute On Output Exp. 4 Input 1	wM20020*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 5 Input 1	wM20021*0AU\x0D\x0A
Mix-point Mute On Output Exp. 5 Input 1	wM20021*1AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Mix-point Mute Off Output Exp. 6 Input 1	wM20022*0AU\x0D\x0A
Mix-point Mute On Output Exp. 6 Input 1	wM20022*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 7 Input 1	wM20023*0AU\x0D\x0A
Mix-point Mute On Output Exp. 7 Input 1	wM20023*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 8 Input 1	wM20024*0AU\x0D\x0A
Mix-point Mute On Output Exp. 8 Input 1	wM20024*1AU\x0D\x0A
Mix-point Mute Off Output V. Send A Input 1	wM20009*0AU\x0D\x0A
Mix-point Mute On Output V. Send A Input 1	wM20009*1AU\x0D\x0A
Mix-point Mute Off Output V. Send B Input 1	wM20010*0AU\x0D\x0A
Mix-point Mute On Output V. Send B Input 1	wM20010*1AU\x0D\x0A
Mix-point Mute Off Output V. Send C Input 1	wM20011*0AU\x0D\x0A
Mix-point Mute On Output V. Send C Input 1	wM20011*1AU\x0D\x0A
Mix-point Mute Off Output V. Send D Input 1	wM20012*0AU\x0D\x0A
Mix-point Mute On Output V. Send D Input 1	wM20012*1AU\x0D\x0A
Mix-point Mute Off Output V. Send E Input 1	wM20013*0AU\x0D\x0A
Mix-point Mute On Output V. Send E Input 1	wM20013*1AU\x0D\x0A
Mix-point Mute Off Output V. Send F Input 1	wM20014*0AU\x0D\x0A
Mix-point Mute On Output V. Send F Input 1	wM20014*1AU\x0D\x0A
Mix-point Mute Off Output V. Send G Input 1	wM20015*0AU\x0D\x0A
Mix-point Mute On Output V. Send G Input 1	wM20015*1AU\x0D\x0A
Mix-point Mute Off Output V. Send H Input 1	wM20016*0AU\x0D\x0A
Mix-point Mute On Output V. Send H Input 1	wM20016*1AU\x0D\x0A
Mix-point Mute Off Output 1 Input 11	wM21000*0AU\x0D\x0A
Mix-point Mute On Output 1 Input 11	wM21000*1AU\x0D\x0A
Mix-point Mute Off Output 8 Input 11	wM21007*0AU\x0D\x0A
Mix-point Mute On Output 8 Input 11	wM21007*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 1 Input 11	wM21017*0AU\x0D\x0A
Mix-point Mute On Output Exp. 1 Input 11	wM21017*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 2 Input 11	wM21018*0AU\x0D\x0A
Mix-point Mute On Output Exp. 2 Input 11	wM21018*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 3 Input 11	wM21019*0AU\x0D\x0A
Mix-point Mute On Output Exp. 3 Input 11	wM21019*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 4 Input 11	wM21020*0AU\x0D\x0A
Mix-point Mute On Output Exp. 4 Input 11	wM21020*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 5 Input 11	wM21021*0AU\x0D\x0A
Mix-point Mute On Output Exp. 5 Input 11	wM21021*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 6 Input 11	wM21022*0AU\x0D\x0A
Mix-point Mute On Output Exp. 6 Input 11	wM21022*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 7 Input 11	wM21023*0AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Mix-point Mute On Output Exp. 7 Input 11	wM21023*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 8 Input 11	wM21024*0AU\x0D\x0A
Mix-point Mute On Output Exp. 8 Input 11	wM21024*1AU\x0D\x0A
Mix-point Mute Off Output V. Send A Input 11	wM21009*0AU\x0D\x0A
Mix-point Mute On Output V. Send A Input 11	wM21009*1AU\x0D\x0A
Mix-point Mute Off Output V. Send B Input 11	wM21010*0AU\x0D\x0A
Mix-point Mute On Output V. Send B Input 11	wM21010*1AU\x0D\x0A
Mix-point Mute Off Output V. Send C Input 11	wM21011*0AU\x0D\x0A
Mix-point Mute On Output V. Send C Input 11	wM21011*1AU\x0D\x0A
Mix-point Mute Off Output V. Send D Input 11	wM21012*0AU\x0D\x0A
Mix-point Mute On Output V. Send D Input 11	wM21012*1AU\x0D\x0A
Mix-point Mute Off Output V. Send E Input 11	wM21013*0AU\x0D\x0A
Mix-point Mute On Output V. Send E Input 11	wM21013*1AU\x0D\x0A
Mix-point Mute Off Output V. Send F Input 11	wM21014*0AU\x0D\x0A
Mix-point Mute On Output V. Send F Input 11	wM21014*1AU\x0D\x0A
Mix-point Mute Off Output V. Send G Input 11	wM21015*0AU\x0D\x0A
Mix-point Mute On Output V. Send G Input 11	wM21015*1AU\x0D\x0A
Mix-point Mute Off Output V. Send H Input 11	wM21016*0AU\x0D\x0A
Mix-point Mute On Output V. Send H Input 11	wM21016*1AU\x0D\x0A
Mix-point Mute Off Output 1 Input V. Return A	wM21300*0AU\x0D\x0A
Mix-point Mute On Output 1 Input V. Return A	wM21300*1AU\x0D\x0A
Mix-point Mute Off Output 8 Input V. Return A	wM21307*0AU\x0D\x0A
Mix-point Mute On Output 8 Input V. Return A	wM21307*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 1 Input V. Return A	wM21317*0AU\x0D\x0A
Mix-point Mute On Output Exp. 1 Input V. Return A	wM21317*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 2 Input V. Return A	wM21318*0AU\x0D\x0A
Mix-point Mute On Output Exp. 2 Input V. Return A	wM21318*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 3 Input V. Return A	wM21319*0AU\x0D\x0A
Mix-point Mute On Output Exp. 3 Input V. Return A	wM21319*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 4 Input V. Return A	wM21320*0AU\x0D\x0A
Mix-point Mute On Output Exp. 4 Input V. Return A	wM21320*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 5 Input V. Return A	wM21321*0AU\x0D\x0A
Mix-point Mute On Output Exp. 5 Input V. Return A	wM21321*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 6 Input V. Return A	wM21322*0AU\x0D\x0A
Mix-point Mute On Output Exp. 6 Input V. Return A	wM21322*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 7 Input V. Return A	wM21323*0AU\x0D\x0A
Mix-point Mute On Output Exp. 7 Input V. Return A	wM21323*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 8 Input V. Return A	wM21324*0AU\x0D\x0A
Mix-point Mute On Output Exp. 8 Input V. Return A	wM21324*1AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 5/20/2019

Mix-point Mute Off Output V. Send A Input V. Return A	wM21309*0AU\x0D\x0A
Mix-point Mute On Output V. Send A Input V. Return A	wM21309*1AU\x0D\x0A
Mix-point Mute Off Output V. Send B Input V. Return A	wM21310*0AU\x0D\x0A
Mix-point Mute On Output V. Send B Input V. Return A	wM21310*1AU\x0D\x0A
Mix-point Mute Off Output V. Send C Input V. Return A	wM21311*0AU\x0D\x0A
Mix-point Mute On Output V. Send C Input V. Return A	wM21311*1AU\x0D\x0A
Mix-point Mute Off Output V. Send D Input V. Return A	wM21312*0AU\x0D\x0A
Mix-point Mute On Output V. Send D Input V. Return A	wM21312*1AU\x0D\x0A
Mix-point Mute Off Output V. Send E Input V. Return A	wM21313*0AU\x0D\x0A
Mix-point Mute On Output V. Send E Input V. Return A	wM21313*1AU\x0D\x0A
Mix-point Mute Off Output V. Send F Input V. Return A	wM21314*0AU\x0D\x0A
Mix-point Mute On Output V. Send F Input V. Return A	wM21314*1AU\x0D\x0A
Mix-point Mute Off Output V. Send G Input V. Return A	wM21315*0AU\x0D\x0A
Mix-point Mute On Output V. Send G Input V. Return A	wM21315*1AU\x0D\x0A
Mix-point Mute Off Output V. Send H Input V. Return A	wM21316*0AU\x0D\x0A
Mix-point Mute On Output V. Send H Input V. Return A	wM21316*1AU\x0D\x0A
Mix-point Mute Off Output 1 Input V. Return B	wM21400*0AU\x0D\x0A
Mix-point Mute On Output 1 Input V. Return B	wM21400*1AU\x0D\x0A
Mix-point Mute Off Output 8 Input V. Return B	wM21407*0AU\x0D\x0A
Mix-point Mute On Output 8 Input V. Return B	wM21407*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 1 Input V. Return B	wM21417*0AU\x0D\x0A
Mix-point Mute On Output Exp. 1 Input V. Return B	wM21417*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 2 Input V. Return B	wM21418*0AU\x0D\x0A
Mix-point Mute On Output Exp. 2 Input V. Return B	wM21418*1AU\x0D\x0A

Global Scripter Module Communication Sheet

Mix-point Mute Off Output Exp. 3 Input V. Return B	wM21419*0AU\x0D\x0A
Mix-point Mute On Output Exp. 3 Input V. Return B	wM21419*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 4 Input V. Return B	wM21420*0AU\x0D\x0A
Mix-point Mute On Output Exp. 4 Input V. Return B	wM21420*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 5 Input V. Return B	wM21421*0AU\x0D\x0A
Mix-point Mute On Output Exp. 5 Input V. Return B	wM21421*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 6 Input V. Return B	wM21422*0AU\x0D\x0A
Mix-point Mute On Output Exp. 6 Input V. Return B	wM21422*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 7 Input V. Return B	wM21423*0AU\x0D\x0A
Mix-point Mute On Output Exp. 7 Input V. Return B	wM21423*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 8 Input V. Return B	wM21424*0AU\x0D\x0A
Mix-point Mute On Output Exp. 8 Input V. Return B	wM21424*1AU\x0D\x0A
Mix-point Mute Off Output V. Send A Input V. Return B	wM21409*0AU\x0D\x0A
Mix-point Mute On Output V. Send A Input V. Return B	wM21409*1AU\x0D\x0A
Mix-point Mute Off Output V. Send B Input V. Return B	wM21410*0AU\x0D\x0A
Mix-point Mute On Output V. Send B Input V. Return B	wM21410*1AU\x0D\x0A
Mix-point Mute Off Output V. Send C Input V. Return B	wM21411*0AU\x0D\x0A
Mix-point Mute On Output V. Send C Input V. Return B	wM21411*1AU\x0D\x0A
Mix-point Mute Off Output V. Send D Input V. Return B	wM21412*0AU\x0D\x0A
Mix-point Mute On Output V. Send D Input V. Return B	wM21412*1AU\x0D\x0A
Mix-point Mute Off Output V. Send E Input V. Return B	wM21413*0AU\x0D\x0A
Mix-point Mute On Output V. Send E Input V. Return B	wM21413*1AU\x0D\x0A
Mix-point Mute Off Output V. Send F Input V. Return B	wM21414*0AU\x0D\x0A
Mix-point Mute On Output V. Send F Input V. Return B	wM21414*1AU\x0D\x0A
Mix-point Mute Off Output V. Send G Input V. Return B	wM21415*0AU\x0D\x0A
Mix-point Mute On Output V. Send G Input V. Return B	wM21415*1AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 5/20/2019

Mix-point Mute Off Output V. Send H Input V. Return B	wM21416*0AU\x0D\x0A
Mix-point Mute On Output V. Send H Input V. Return B	wM21416*1AU\x0D\x0A
Mix-point Mute Off Output 1 Input V. Return C	wM21500*0AU\x0D\x0A
Mix-point Mute On Output 1 Input V. Return C	wM21500*1AU\x0D\x0A
Mix-point Mute Off Output 8 Input V. Return C	wM21507*0AU\x0D\x0A
Mix-point Mute On Output 8 Input V. Return C	wM21507*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 1 Input V. Return C	wM21517*0AU\x0D\x0A
Mix-point Mute On Output Exp. 1 Input V. Return C	wM21517*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 2 Input V. Return C	wM21518*0AU\x0D\x0A
Mix-point Mute On Output Exp. 2 Input V. Return C	wM21518*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 3 Input V. Return C	wM21519*0AU\x0D\x0A
Mix-point Mute On Output Exp. 3 Input V. Return C	wM21519*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 4 Input V. Return C	wM21520*0AU\x0D\x0A
Mix-point Mute On Output Exp. 4 Input V. Return C	wM21520*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 5 Input V. Return C	wM21521*0AU\x0D\x0A
Mix-point Mute On Output Exp. 5 Input V. Return C	wM21521*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 6 Input V. Return C	wM21522*0AU\x0D\x0A
Mix-point Mute On Output Exp. 6 Input V. Return C	wM21522*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 7 Input V. Return C	wM21523*0AU\x0D\x0A
Mix-point Mute On Output Exp. 7 Input V. Return C	wM21523*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 8 Input V. Return C	wM21524*0AU\x0D\x0A
Mix-point Mute On Output Exp. 8 Input V. Return C	wM21524*1AU\x0D\x0A
Mix-point Mute Off Output V. Send A Input V. Return C	wM21509*0AU\x0D\x0A
Mix-point Mute On Output V. Send A Input V. Return C	wM21509*1AU\x0D\x0A
Mix-point Mute Off Output V. Send B Input V. Return C	wM21510*0AU\x0D\x0A
Mix-point Mute On Output V. Send B Input V. Return C	wM21510*1AU\x0D\x0A
Mix-point Mute Off Output V. Send C Input V. Return C	wM21511*0AU\x0D\x0A
Mix-point Mute On Output V. Send C Input V. Return C	wM21511*1AU\x0D\x0A
Mix-point Mute Off Output V. Send D Input V. Return C	wM21512*0AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 5/20/2019

Mix-point Mute On Output V. Send D Input V. Return C	wM21512*1AU\x0D\x0A
Mix-point Mute Off Output V. Send E Input V. Return C	wM21513*0AU\x0D\x0A
Mix-point Mute On Output V. Send E Input V. Return C	wM21513*1AU\x0D\x0A
Mix-point Mute Off Output V. Send F Input V. Return C	wM21514*0AU\x0D\x0A
Mix-point Mute On Output V. Send F Input V. Return C	wM21514*1AU\x0D\x0A
Mix-point Mute Off Output V. Send G Input V. Return C	wM21515*0AU\x0D\x0A
Mix-point Mute On Output V. Send G Input V. Return C	wM21515*1AU\x0D\x0A
Mix-point Mute Off Output V. Send H Input V. Return C	wM21516*0AU\x0D\x0A
Mix-point Mute On Output V. Send H Input V. Return C	wM21516*1AU\x0D\x0A
Mix-point Mute Off Output 1 Input V. Return D	wM21600*0AU\x0D\x0A
Mix-point Mute On Output 1 Input V. Return D	wM21600*1AU\x0D\x0A
Mix-point Mute Off Output 8 Input V. Return D	wM21607*0AU\x0D\x0A
Mix-point Mute On Output 8 Input V. Return D	wM21607*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 1 Input V. Return D	wM21617*0AU\x0D\x0A
Mix-point Mute On Output Exp. 1 Input V. Return D	wM21617*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 2 Input V. Return D	wM21618*0AU\x0D\x0A
Mix-point Mute On Output Exp. 2 Input V. Return D	wM21618*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 3 Input V. Return D	wM21619*0AU\x0D\x0A
Mix-point Mute On Output Exp. 3 Input V. Return D	wM21619*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 4 Input V. Return D	wM21620*0AU\x0D\x0A
Mix-point Mute On Output Exp. 4 Input V. Return D	wM21620*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 5 Input V. Return D	wM21621*0AU\x0D\x0A
Mix-point Mute On Output Exp. 5 Input V. Return D	wM21621*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 6 Input V. Return D	wM21622*0AU\x0D\x0A
Mix-point Mute On Output Exp. 6 Input V. Return D	wM21622*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 7 Input V. Return D	wM21623*0AU\x0D\x0A
Mix-point Mute On Output Exp. 7 Input V. Return D	wM21623*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 8 Input V. Return D	wM21624*0AU\x0D\x0A
Mix-point Mute On Output Exp. 8 Input V. Return D	wM21624*1AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Mix-point Mute Off Output V. Send A Input V. Return D	wM21609*0AU\x0D\x0A
Mix-point Mute On Output V. Send A Input V. Return D	wM21609*1AU\x0D\x0A
Mix-point Mute Off Output V. Send B Input V. Return D	wM21610*0AU\x0D\x0A
Mix-point Mute On Output V. Send B Input V. Return D	wM21610*1AU\x0D\x0A
Mix-point Mute Off Output V. Send C Input V. Return D	wM21611*0AU\x0D\x0A
Mix-point Mute On Output V. Send C Input V. Return D	wM21611*1AU\x0D\x0A
Mix-point Mute Off Output V. Send D Input V. Return D	wM21612*0AU\x0D\x0A
Mix-point Mute On Output V. Send D Input V. Return D	wM21612*1AU\x0D\x0A
Mix-point Mute Off Output V. Send E Input V. Return D	wM21613*0AU\x0D\x0A
Mix-point Mute On Output V. Send E Input V. Return D	wM21613*1AU\x0D\x0A
Mix-point Mute Off Output V. Send F Input V. Return D	wM21614*0AU\x0D\x0A
Mix-point Mute On Output V. Send F Input V. Return D	wM21614*1AU\x0D\x0A
Mix-point Mute Off Output V. Send G Input V. Return D	wM21615*0AU\x0D\x0A
Mix-point Mute On Output V. Send G Input V. Return D	wM21615*1AU\x0D\x0A
Mix-point Mute Off Output V. Send H Input V. Return D	wM21616*0AU\x0D\x0A
Mix-point Mute On Output V. Send H Input V. Return D	wM21616*1AU\x0D\x0A
Mix-point Mute Off Output 1 Input V. Return E	wM21700*0AU\x0D\x0A
Mix-point Mute On Output 1 Input V. Return E	wM21700*1AU\x0D\x0A
Mix-point Mute Off Output 8 Input V. Return E	wM21707*0AU\x0D\x0A
Mix-point Mute On Output 8 Input V. Return E	wM21707*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 1 Input V. Return E	wM21717*0AU\x0D\x0A
Mix-point Mute On Output Exp. 1 Input V. Return E	wM21717*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 2 Input V. Return E	wM21718*0AU\x0D\x0A
Mix-point Mute On Output Exp. 2 Input V. Return E	wM21718*1AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 5/20/2019

Mix-point Mute Off Output Exp. 3 Input V. Return E	wM21719*0AU\x0D\x0A
Mix-point Mute On Output Exp. 3 Input V. Return E	wM21719*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 4 Input V. Return E	wM21720*0AU\x0D\x0A
Mix-point Mute On Output Exp. 4 Input V. Return E	wM21720*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 5 Input V. Return E	wM21721*0AU\x0D\x0A
Mix-point Mute On Output Exp. 5 Input V. Return E	wM21721*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 6 Input V. Return E	wM21722*0AU\x0D\x0A
Mix-point Mute On Output Exp. 6 Input V. Return E	wM21722*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 7 Input V. Return E	wM21723*0AU\x0D\x0A
Mix-point Mute On Output Exp. 7 Input V. Return E	wM21723*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 8 Input V. Return E	wM21724*0AU\x0D\x0A
Mix-point Mute On Output Exp. 8 Input V. Return E	wM21724*1AU\x0D\x0A
Mix-point Mute Off Output V. Send A Input V. Return E	wM21709*0AU\x0D\x0A
Mix-point Mute On Output V. Send A Input V. Return E	wM21709*1AU\x0D\x0A
Mix-point Mute Off Output V. Send B Input V. Return E	wM21710*0AU\x0D\x0A
Mix-point Mute On Output V. Send B Input V. Return E	wM21710*1AU\x0D\x0A
Mix-point Mute Off Output V. Send C Input V. Return E	wM21711*0AU\x0D\x0A
Mix-point Mute On Output V. Send C Input V. Return E	wM21711*1AU\x0D\x0A
Mix-point Mute Off Output V. Send D Input V. Return E	wM21712*0AU\x0D\x0A
Mix-point Mute On Output V. Send D Input V. Return E	wM21712*1AU\x0D\x0A
Mix-point Mute Off Output V. Send E Input V. Return E	wM21713*0AU\x0D\x0A
Mix-point Mute On Output V. Send E Input V. Return E	wM21713*1AU\x0D\x0A
Mix-point Mute Off Output V. Send F Input V. Return E	wM21714*0AU\x0D\x0A
Mix-point Mute On Output V. Send F Input V. Return E	wM21714*1AU\x0D\x0A
Mix-point Mute Off Output V. Send G Input V. Return E	wM21715*0AU\x0D\x0A
Mix-point Mute On Output V. Send G Input V. Return E	wM21715*1AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Mix-point Mute Off Output V. Send H Input V. Return E	wM21716*0AU\x0D\x0A
Mix-point Mute On Output V. Send H Input V. Return E	wM21716*1AU\x0D\x0A
Mix-point Mute Off Output 1 Input V. Return F	wM21800*0AU\x0D\x0A
Mix-point Mute On Output 1 Input V. Return F	wM21800*1AU\x0D\x0A
Mix-point Mute Off Output 8 Input V. Return F	wM21807*0AU\x0D\x0A
Mix-point Mute On Output 8 Input V. Return F	wM21807*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 1 Input V. Return F	wM21817*0AU\x0D\x0A
Mix-point Mute On Output Exp. 1 Input V. Return F	wM21817*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 2 Input V. Return F	wM21818*0AU\x0D\x0A
Mix-point Mute On Output Exp. 2 Input V. Return F	wM21818*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 3 Input V. Return F	wM21819*0AU\x0D\x0A
Mix-point Mute On Output Exp. 3 Input V. Return F	wM21819*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 4 Input V. Return F	wM21820*0AU\x0D\x0A
Mix-point Mute On Output Exp. 4 Input V. Return F	wM21820*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 5 Input V. Return F	wM21821*0AU\x0D\x0A
Mix-point Mute On Output Exp. 5 Input V. Return F	wM21821*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 6 Input V. Return F	wM21822*0AU\x0D\x0A
Mix-point Mute On Output Exp. 6 Input V. Return F	wM21822*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 7 Input V. Return F	wM21823*0AU\x0D\x0A
Mix-point Mute On Output Exp. 7 Input V. Return F	wM21823*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 8 Input V. Return F	wM21824*0AU\x0D\x0A
Mix-point Mute On Output Exp. 8 Input V. Return F	wM21824*1AU\x0D\x0A
Mix-point Mute Off Output V. Send A Input V. Return F	wM21809*0AU\x0D\x0A
Mix-point Mute On Output V. Send A Input V. Return F	wM21809*1AU\x0D\x0A
Mix-point Mute Off Output V. Send B Input V. Return F	wM21810*0AU\x0D\x0A
Mix-point Mute On Output V. Send B Input V. Return F	wM21810*1AU\x0D\x0A
Mix-point Mute Off Output V. Send C Input V. Return F	wM21811*0AU\x0D\x0A
Mix-point Mute On Output V. Send C Input V. Return F	wM21811*1AU\x0D\x0A
Mix-point Mute Off Output V. Send D Input V. Return F	wM21812*0AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Revision: 5/20/2019

Mix-point Mute On Output V. Send D Input V. Return F	wM21812*1AU\x0D\x0A
Mix-point Mute Off Output V. Send E Input V. Return F	wM21813*0AU\x0D\x0A
Mix-point Mute On Output V. Send E Input V. Return F	wM21813*1AU\x0D\x0A
Mix-point Mute Off Output V. Send F Input V. Return F	wM21814*0AU\x0D\x0A
Mix-point Mute On Output V. Send F Input V. Return F	wM21814*1AU\x0D\x0A
Mix-point Mute Off Output V. Send G Input V. Return F	wM21815*0AU\x0D\x0A
Mix-point Mute On Output V. Send G Input V. Return F	wM21815*1AU\x0D\x0A
Mix-point Mute Off Output V. Send H Input V. Return F	wM21816*0AU\x0D\x0A
Mix-point Mute On Output V. Send H Input V. Return F	wM21816*1AU\x0D\x0A
Mix-point Mute Off Output 1 Input V. Return G	wM21900*0AU\x0D\x0A
Mix-point Mute On Output 1 Input V. Return G	wM21900*1AU\x0D\x0A
Mix-point Mute Off Output 8 Input V. Return G	wM21907*0AU\x0D\x0A
Mix-point Mute On Output 8 Input V. Return G	wM21907*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 1 Input V. Return G	wM21917*0AU\x0D\x0A
Mix-point Mute On Output Exp. 1 Input V. Return G	wM21917*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 2 Input V. Return G	wM21918*0AU\x0D\x0A
Mix-point Mute On Output Exp. 2 Input V. Return G	wM21918*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 3 Input V. Return G	wM21919*0AU\x0D\x0A
Mix-point Mute On Output Exp. 3 Input V. Return G	wM21919*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 4 Input V. Return G	wM21920*0AU\x0D\x0A
Mix-point Mute On Output Exp. 4 Input V. Return G	wM21920*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 5 Input V. Return G	wM21921*0AU\x0D\x0A
Mix-point Mute On Output Exp. 5 Input V. Return G	wM21921*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 6 Input V. Return G	wM21922*0AU\x0D\x0A
Mix-point Mute On Output Exp. 6 Input V. Return G	wM21922*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 7 Input V. Return G	wM21923*0AU\x0D\x0A
Mix-point Mute On Output Exp. 7 Input V. Return G	wM21923*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 8 Input V. Return G	wM21924*0AU\x0D\x0A
Mix-point Mute On Output Exp. 8 Input V. Return G	wM21924*1AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Mix-point Mute Off Output V. Send A Input V. Return G	wM21909*0AU\x0D\x0A
Mix-point Mute On Output V. Send A Input V. Return G	wM21909*1AU\x0D\x0A
Mix-point Mute Off Output V. Send B Input V. Return G	wM21910*0AU\x0D\x0A
Mix-point Mute On Output V. Send B Input V. Return G	wM21910*1AU\x0D\x0A
Mix-point Mute Off Output V. Send C Input V. Return G	wM21911*0AU\x0D\x0A
Mix-point Mute On Output V. Send C Input V. Return G	wM21911*1AU\x0D\x0A
Mix-point Mute Off Output V. Send D Input V. Return G	wM21912*0AU\x0D\x0A
Mix-point Mute On Output V. Send D Input V. Return G	wM21912*1AU\x0D\x0A
Mix-point Mute Off Output V. Send E Input V. Return G	wM21913*0AU\x0D\x0A
Mix-point Mute On Output V. Send E Input V. Return G	wM21913*1AU\x0D\x0A
Mix-point Mute Off Output V. Send F Input V. Return G	wM21914*0AU\x0D\x0A
Mix-point Mute On Output V. Send F Input V. Return G	wM21914*1AU\x0D\x0A
Mix-point Mute Off Output V. Send G Input V. Return G	wM21915*0AU\x0D\x0A
Mix-point Mute On Output V. Send G Input V. Return G	wM21915*1AU\x0D\x0A
Mix-point Mute Off Output V. Send H Input V. Return G	wM21916*0AU\x0D\x0A
Mix-point Mute On Output V. Send H Input V. Return G	wM21916*1AU\x0D\x0A
Mix-point Mute Off Output 1 Input V. Return H	wM22000*0AU\x0D\x0A
Mix-point Mute On Output 1 Input V. Return H	wM22000*1AU\x0D\x0A
Mix-point Mute Off Output 8 Input V. Return H	wM22007*0AU\x0D\x0A
Mix-point Mute On Output 8 Input V. Return H	wM22007*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 1 Input V. Return H	wM22017*0AU\x0D\x0A
Mix-point Mute On Output Exp. 1 Input V. Return H	wM22017*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 2 Input V. Return H	wM22018*0AU\x0D\x0A
Mix-point Mute On Output Exp. 2 Input V. Return H	wM22018*1AU\x0D\x0A

Global Scripter Module Communication Sheet

Mix-point Mute Off Output Exp. 3 Input V. Return H	wM22019*0AU\x0D\x0A
Mix-point Mute On Output Exp. 3 Input V. Return H	wM22019*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 4 Input V. Return H	wM22020*0AU\x0D\x0A
Mix-point Mute On Output Exp. 4 Input V. Return H	wM22020*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 5 Input V. Return H	wM22021*0AU\x0D\x0A
Mix-point Mute On Output Exp. 5 Input V. Return H	wM22021*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 6 Input V. Return H	wM22022*0AU\x0D\x0A
Mix-point Mute On Output Exp. 6 Input V. Return H	wM22022*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 7 Input V. Return H	wM22023*0AU\x0D\x0A
Mix-point Mute On Output Exp. 7 Input V. Return H	wM22023*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 8 Input V. Return H	wM22024*0AU\x0D\x0A
Mix-point Mute On Output Exp. 8 Input V. Return H	wM22024*1AU\x0D\x0A
Mix-point Mute Off Output V. Send A Input V. Return H	wM22009*0AU\x0D\x0A
Mix-point Mute On Output V. Send A Input V. Return H	wM22009*1AU\x0D\x0A
Mix-point Mute Off Output V. Send B Input V. Return H	wM22010*0AU\x0D\x0A
Mix-point Mute On Output V. Send B Input V. Return H	wM22010*1AU\x0D\x0A
Mix-point Mute Off Output V. Send C Input V. Return H	wM22011*0AU\x0D\x0A
Mix-point Mute On Output V. Send C Input V. Return H	wM22011*1AU\x0D\x0A
Mix-point Mute Off Output V. Send D Input V. Return H	wM22012*0AU\x0D\x0A
Mix-point Mute On Output V. Send D Input V. Return H	wM22012*1AU\x0D\x0A
Mix-point Mute Off Output V. Send E Input V. Return H	wM22013*0AU\x0D\x0A
Mix-point Mute On Output V. Send E Input V. Return H	wM22013*1AU\x0D\x0A
Mix-point Mute Off Output V. Send F Input V. Return H	wM22014*0AU\x0D\x0A
Mix-point Mute On Output V. Send F Input V. Return H	wM22014*1AU\x0D\x0A
Mix-point Mute Off Output V. Send G Input V. Return H	wM22015*0AU\x0D\x0A
Mix-point Mute On Output V. Send G Input V. Return H	wM22015*1AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Mix-point Mute Off Output V. Send H Input V. Return H	wM22016*0AU\x0D\x0A
Mix-point Mute On Output V. Send H Input V. Return H	wM22016*1AU\x0D\x0A
Mix-point Mute Off Output 1 Input 12	wM21100*0AU\x0D\x0A
Mix-point Mute On Output 1 Input 12	wM21100*1AU\x0D\x0A
Mix-point Mute Off Output 8 Input 12	wM21107*0AU\x0D\x0A
Mix-point Mute On Output 8 Input 12	wM21107*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 1 Input 12	wM21117*0AU\x0D\x0A
Mix-point Mute On Output Exp. 1 Input 12	wM21117*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 2 Input 12	wM21118*0AU\x0D\x0A
Mix-point Mute On Output Exp. 2 Input 12	wM21118*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 3 Input 12	wM21119*0AU\x0D\x0A
Mix-point Mute On Output Exp. 3 Input 12	wM21119*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 4 Input 12	wM21120*0AU\x0D\x0A
Mix-point Mute On Output Exp. 4 Input 12	wM21120*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 5 Input 12	wM21121*0AU\x0D\x0A
Mix-point Mute On Output Exp. 5 Input 12	wM21121*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 6 Input 12	wM21122*0AU\x0D\x0A
Mix-point Mute On Output Exp. 6 Input 12	wM21122*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 7 Input 12	wM21123*0AU\x0D\x0A
Mix-point Mute On Output Exp. 7 Input 12	wM21123*1AU\x0D\x0A
Mix-point Mute Off Output Exp. 8 Input 12	wM21124*0AU\x0D\x0A
Mix-point Mute On Output Exp. 8 Input 12	wM21124*1AU\x0D\x0A
Mix-point Mute Off Output V. Send A Input 12	wM21109*0AU\x0D\x0A
Mix-point Mute On Output V. Send A Input 12	wM21109*1AU\x0D\x0A
Mix-point Mute Off Output V. Send B Input 12	wM21110*0AU\x0D\x0A
Mix-point Mute On Output V. Send B Input 12	wM21110*1AU\x0D\x0A
Mix-point Mute Off Output V. Send C Input 12	wM21111*0AU\x0D\x0A
Mix-point Mute On Output V. Send C Input 12	wM21111*1AU\x0D\x0A
Mix-point Mute Off Output V. Send D Input 12	wM21112*0AU\x0D\x0A
Mix-point Mute On Output V. Send D Input 12	wM21112*1AU\x0D\x0A
Mix-point Mute Off Output V. Send E Input 12	wM21113*0AU\x0D\x0A
Mix-point Mute On Output V. Send E Input 12	wM21113*1AU\x0D\x0A
Mix-point Mute Off Output V. Send F Input 12	wM21114*0AU\x0D\x0A
Mix-point Mute On Output V. Send F Input 12	wM21114*1AU\x0D\x0A
Mix-point Mute Off Output V. Send G Input 12	wM21115*0AU\x0D\x0A
Mix-point Mute On Output V. Send G Input 12	wM21115*1AU\x0D\x0A
Mix-point Mute Off Output V. Send H Input 12	wM21116*0AU\x0D\x0A

Global Scripter Module
Communication Sheet

Mix-point Mute On Output V. Send H Input 12	wM21116*1AU\x0D\x0A
Output Attenuation -100 Output 1	wG60000*01048AU\x0D\x0A
Output Attenuation 0 Output 1	wG60000*02048AU\x0D\x0A
Output Attenuation -100 Output 8	wG60007*01048AU\x0D\x0A
Output Attenuation 0 Output 8	wG60007*02048AU\x0D\x0A
Output Attenuation -100 Output Telephone Tx	wG60008*01048AU\x0D\x0A
Output Attenuation 0 Output Telephone Tx	wG60008*02048AU\x0D\x0A
Output Mute Off Output 1	wM60000*0AU\x0D\x0A
Output Mute On Output 1	wM60000*1AU\x0D\x0A
Output Mute Off Output 8	wM60007*0AU\x0D\x0A
Output Mute On Output 8	wM60007*1AU\x0D\x0A
Output Mute Off Output Telephone Tx	wM60008*0AU\x0D\x0A
Output Mute On Output Telephone Tx	wM60008*1AU\x0D\x0A
Output Post-mixer Trim -12 Output 1	wG60100*01928AU\x0D\x0A
Output Post-mixer Trim 12 Output 1	wG60100*02168AU\x0D\x0A
Output Post-mixer Trim -12 Output 8	wG60107*01928AU\x0D\x0A
Output Post-mixer Trim 12 Output 8	wG60107*02168AU\x0D\x0A
Pre-mixer Gain -100 Input 1	wG40100*01048AU\x0D\x0A
Pre-mixer Gain 12 Input 1	wG40100*02168AU\x0D\x0A
Pre-mixer Gain -100 Input 12	wG40111*01048AU\x0D\x0A
Pre-mixer Gain 12 Input 12	wG40111*02168AU\x0D\x0A
Pre-mixer Gain -100 Input Telephone Rx	wG40112*01048AU\x0D\x0A
Pre-mixer Gain 12 Input Telephone Rx	wG40112*02168AU\x0D\x0A
Pre-mixer Mute Off Input 1	wM40100*0AU\x0D\x0A
Pre-mixer Mute On Input 1	wM40100*1AU\x0D\x0A
Pre-mixer Mute Off Input 12	wM40111*0AU\x0D\x0A
Pre-mixer Mute On Input 12	wM40111*1AU\x0D\x0A
Pre-mixer Mute Off Input Telephone Rx	wM40112*0AU\x0D\x0A
Pre-mixer Mute On Input Telephone Rx	wM40112*1AU\x0D\x0A
Preset Recall 1	1.
Preset Recall 32	32.
Virtual Return Gain -100 Input A	wG50000*01048AU\x0D\x0A
Virtual Return Gain 12 Input A	wG50000*02168AU\x0D\x0A
Virtual Return Gain -100 Input B	wG50001*01048AU\x0D\x0A
Virtual Return Gain 12 Input B	wG50001*02168AU\x0D\x0A
Virtual Return Gain -100 Input C	wG50002*01048AU\x0D\x0A
Virtual Return Gain 12 Input C	wG50002*02168AU\x0D\x0A
Virtual Return Gain -100 Input D	wG50003*01048AU\x0D\x0A
Virtual Return Gain 12 Input D	wG50003*02168AU\x0D\x0A

Global Scripter Module Communication Sheet

Virtual Return Gain -100 Input E	wG50004*01048AU\x0D\x0A
Virtual Return Gain 12 Input E	wG50004*02168AU\x0D\x0A
Virtual Return Gain -100 Input F	wG50005*01048AU\x0D\x0A
Virtual Return Gain 12 Input F	wG50005*02168AU\x0D\x0A
Virtual Return Gain -100 Input G	wG50006*01048AU\x0D\x0A
Virtual Return Gain 12 Input G	wG50006*02168AU\x0D\x0A
Virtual Return Gain -100 Input H	wG50007*01048AU\x0D\x0A
Virtual Return Gain 12 Input H	wG50007*02168AU\x0D\x0A
Virtual Return Mute Off Input A	wM50000*0AU\x0D\x0A
Virtual Return Mute On Input A	wM50000*1AU\x0D\x0A
Virtual Return Mute Off Input B	wM50001*0AU\x0D\x0A
Virtual Return Mute On Input B	wM50001*1AU\x0D\x0A
Virtual Return Mute Off Input C	wM50002*0AU\x0D\x0A
Virtual Return Mute On Input C	wM50002*1AU\x0D\x0A
Virtual Return Mute Off Input D	wM50003*0AU\x0D\x0A
Virtual Return Mute On Input D	wM50003*1AU\x0D\x0A
Virtual Return Mute Off Input E	wM50004*0AU\x0D\x0A
Virtual Return Mute On Input E	wM50004*1AU\x0D\x0A
Virtual Return Mute Off Input F	wM50005*0AU\x0D\x0A
Virtual Return Mute On Input F	wM50005*1AU\x0D\x0A
Virtual Return Mute Off Input G	wM50006*0AU\x0D\x0A
Virtual Return Mute On Input G	wM50006*1AU\x0D\x0A
Virtual Return Mute Off Input H	wM50007*0AU\x0D\x0A
Virtual Return Mute On Input H	wM50007*1AU\x0D\x0A

Appendix B. Update Commands

Auto Hangup	wAH, PHON\x0D\x0A
DTMF Tone Volume	wDG, PHON\x0D\x0A
Digital I/O Mode Port 1	1[2I
Digital I/O Mode Port 20	1[20[2I
Digital I/O State Port 1	1]1I
Digital I/O State Port 20	1]20]1I
Expansion Bus Mix-point Gain Output 1 Input 1	wG22100AU\x0D\x0A
Expansion Bus Mix-point Gain Output 8 Input 1	wG22107AU\x0D\x0A
Expansion Bus Mix-point Gain Output V. Send A Input 1	wG22109AU\x0D\x0A
Expansion Bus Mix-point Gain Output V. Send B Input 1	wG22110AU\x0D\x0A
Expansion Bus Mix-point Gain Output V. Send C Input 1	wG22111AU\x0D\x0A
Expansion Bus Mix-point Gain Output V. Send D Input 1	wG22112AU\x0D\x0A
Expansion Bus Mix-point Gain Output V. Send E Input 1	wG22113AU\x0D\x0A
Expansion Bus Mix-point Gain Output V. Send F Input 1	wG22114AU\x0D\x0A
Expansion Bus Mix-point Gain Output V. Send G Input 1	wG22115AU\x0D\x0A
Expansion Bus Mix-point Gain Output V. Send H Input 1	wG22116AU\x0D\x0A
Expansion Bus Mix-point Gain Output 1 Input 16	wG23600AU\x0D\x0A
Expansion Bus Mix-point Gain Output 8 Input 16	wG23607AU\x0D\x0A
Expansion Bus Mix-point Gain Output V. Send A Input 16	wG23609AU\x0D\x0A
Expansion Bus Mix-point Gain Output V. Send B Input 16	wG23610AU\x0D\x0A
Expansion Bus Mix-point Gain Output V. Send C Input 16	wG23611AU\x0D\x0A
Expansion Bus Mix-point Gain Output V. Send D Input 16	wG23612AU\x0D\x0A
Expansion Bus Mix-point Gain Output V. Send E Input 16	wG23613AU\x0D\x0A
Expansion Bus Mix-point Gain Output V. Send F Input 16	wG23614AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Expansion Bus Mix-point Gain Output V. Send G Input 16	wG23615AU\x0D\x0A
Expansion Bus Mix-point Gain Output V. Send H Input 16	wG23616AU\x0D\x0A
Expansion Bus Mix-point Mute Output 1 Input 1	wM22100AU\x0D\x0A
Expansion Bus Mix-point Mute Output 8 Input 1	wM22107AU\x0D\x0A
Expansion Bus Mix-point Mute Output V. Send A Input 1	wM22109AU\x0D\x0A
Expansion Bus Mix-point Mute Output V. Send B Input 1	wM22110AU\x0D\x0A
Expansion Bus Mix-point Mute Output V. Send C Input 1	wM22111AU\x0D\x0A
Expansion Bus Mix-point Mute Output V. Send D Input 1	wM22112AU\x0D\x0A
Expansion Bus Mix-point Mute Output V. Send E Input 1	wM22113AU\x0D\x0A
Expansion Bus Mix-point Mute Output V. Send F Input 1	wM22114AU\x0D\x0A
Expansion Bus Mix-point Mute Output V. Send G Input 1	wM22115AU\x0D\x0A
Expansion Bus Mix-point Mute Output V. Send H Input 1	wM22116AU\x0D\x0A
Expansion Bus Mix-point Mute Output 1 Input 16	wM23600AU\x0D\x0A
Expansion Bus Mix-point Mute Output 8 Input 16	wM23607AU\x0D\x0A
Expansion Bus Mix-point Mute Output V. Send A Input 16	wM23609AU\x0D\x0A
Expansion Bus Mix-point Mute Output V. Send B Input 16	wM23610AU\x0D\x0A
Expansion Bus Mix-point Mute Output V. Send C Input 16	wM23611AU\x0D\x0A
Expansion Bus Mix-point Mute Output V. Send D Input 16	wM23612AU\x0D\x0A
Expansion Bus Mix-point Mute Output V. Send E Input 16	wM23613AU\x0D\x0A
Expansion Bus Mix-point Mute Output V. Send F Input 16	wM23614AU\x0D\x0A
Expansion Bus Mix-point Mute Output V. Send G Input 16	wM23615AU\x0D\x0A
Expansion Bus Mix-point Mute Output V. Send H Input 16	wM23616AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Group Bass Input Filter Group 1	wd1grpm\x0D\x0A
Group Bass Input Filter Group 32	wd32grpm\x0D\x0A
Group Bass Virtual Return Filter Group 1	wd1grpm\x0D\x0A
Group Bass Virtual Return Filter Group 32	wd1grpm\x0D\x0A
Group Mix-point Gain Group 1	wd1grpm\x0D\x0A
Group Mix-point Gain Group 32	wd32grpm\x0D\x0A
Group Mute Group 1	wd1grpm\x0D\x0A
Group Mute Group 32	wd32grpm\x0D\x0A
Group Output Attenuation Group 1	wd1grpm\x0D\x0A
Group Output Attenuation Group 32	wd32grpm\x0D\x0A
Group Post-mixer Trim Group 1	wd1grpm\x0D\x0A
Group Post-mixer Trim Group 32	wd32grpm\x0D\x0A
Group Pre-mixer Gain Group 1	wd1grpm\x0D\x0A
Group Pre-mixer Gain Group 32	wd32grpm\x0D\x0A
Group Treble Input Filter Group 1	wd1grpm\x0D\x0A
Group Treble Input Filter Group 32	wd32grpm\x0D\x0A
Group Treble Virtual Return Filter Group 1	wd1grpm\x0D\x0A
Group Treble Virtual Return Filter Group 32	wd32grpm\x0D\x0A
Group Virtual Return Gain Group 1	wd1grpm\x0D\x0A
Group Virtual Return Gain Group 32	wd32grpm\x0D\x0A
Hook	WO, PHON\x0D
Input Gain Input 1	wG40000AU\x0D\x0A
Input Gain Input 12	wG40011AU\x0D\x0A
Input Mute Input 1	wM40000*AU\x0D\x0A
Input Mute Input 12	wM40011*AU\x0D\x0A
Mix-point Gain Output 1 Input 1	wG20000AU\x0D\x0A
Mix-point Gain Output 8 Input 1	wG20007AU\x0D\x0A
Mix-point Gain Output Exp. 1 Input 1	wG20017AU\x0D\x0A
Mix-point Gain Output Exp. 2 Input 1	wG20018AU\x0D\x0A
Mix-point Gain Output Exp. 3 Input 1	wG20019AU\x0D\x0A
Mix-point Gain Output Exp. 4 Input 1	wG20020AU\x0D\x0A
Mix-point Gain Output Exp. 5 Input 1	wG20021AU\x0D\x0A
Mix-point Gain Output Exp. 6 Input 1	wG20022AU\x0D\x0A
Mix-point Gain Output Exp. 7 Input 1	wG20023AU\x0D\x0A
Mix-point Gain Output Exp. 8 Input 1	wG20024AU\x0D\x0A
Mix-point Gain Output V. Send A Input 1	wG20009AU\x0D\x0A
Mix-point Gain Output V. Send B Input 1	wG20010AU\x0D\x0A
Mix-point Gain Output V. Send C Input 1	wG20011AU\x0D\x0A
Mix-point Gain Output V. Send D Input 1	wG20012AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Mix-point Gain Output V. Send E Input 1	wG20013AU\x0D\x0A
Mix-point Gain Output V. Send F Input 1	wG20014AU\x0D\x0A
Mix-point Gain Output V. Send G Input 1	wG20015AU\x0D\x0A
Mix-point Gain Output V. Send H Input 1	wG20016AU\x0D\x0A
Mix-point Gain Output 1 Input 12	wG21100AU\x0D\x0A
Mix-point Gain Output 8 Input 12	wG21107AU\x0D\x0A
Mix-point Gain Output Exp. 1 Input 12	wG21117AU\x0D\x0A
Mix-point Gain Output Exp. 2 Input 12	wG21118AU\x0D\x0A
Mix-point Gain Output Exp. 3 Input 12	wG21119AU\x0D\x0A
Mix-point Gain Output Exp. 4 Input 12	wG21120AU\x0D\x0A
Mix-point Gain Output Exp. 5 Input 12	wG21121AU\x0D\x0A
Mix-point Gain Output Exp. 6 Input 12	wG21122AU\x0D\x0A
Mix-point Gain Output Exp. 7 Input 12	wG21123AU\x0D\x0A
Mix-point Gain Output Exp. 8 Input 12	wG21124AU\x0D\x0A
Mix-point Gain Output V. Send A Input 12	wG21109AU\x0D\x0A
Mix-point Gain Output V. Send B Input 12	wG21110AU\x0D\x0A
Mix-point Gain Output V. Send C Input 12	wG21111AU\x0D\x0A
Mix-point Gain Output V. Send D Input 12	wG21112AU\x0D\x0A
Mix-point Gain Output V. Send E Input 12	wG21113AU\x0D\x0A
Mix-point Gain Output V. Send F Input 12	wG21114AU\x0D\x0A
Mix-point Gain Output V. Send G Input 12	wG21115AU\x0D\x0A
Mix-point Gain Output V. Send H Input 12	wG21116AU\x0D\x0A
Mix-point Gain Output 1 Input V. Return A	wG21300AU\x0D\x0A
Mix-point Gain Output 8 Input V. Return A	wG21307AU\x0D\x0A
Mix-point Gain Output Exp. 1 Input V. Return A	wG21317AU\x0D\x0A
Mix-point Gain Output Exp. 2 Input V. Return A	wG21318AU\x0D\x0A
Mix-point Gain Output Exp. 3 Input V. Return A	wG21319AU\x0D\x0A
Mix-point Gain Output Exp. 4 Input V. Return A	wG21320AU\x0D\x0A
Mix-point Gain Output Exp. 5 Input V. Return A	wG21321AU\x0D\x0A
Mix-point Gain Output Exp. 6 Input V. Return A	wG21322AU\x0D\x0A
Mix-point Gain Output Exp. 7 Input V. Return A	wG21323AU\x0D\x0A
Mix-point Gain Output Exp. 8 Input V. Return A	wG21324AU\x0D\x0A
Mix-point Gain Output V. Send A Input V. Return A	wG21309AU\x0D\x0A
Mix-point Gain Output V. Send B Input V. Return A	wG21310AU\x0D\x0A
Mix-point Gain Output V. Send C Input V. Return A	wG21311AU\x0D\x0A
Mix-point Gain Output V. Send D Input V. Return A	wG21312AU\x0D\x0A
Mix-point Gain Output V. Send E Input V. Return A	wG21313AU\x0D\x0A
Mix-point Gain Output V. Send F Input V. Return A	wG21314AU\x0D\x0A
Mix-point Gain Output V. Send G Input V. Return A	wG21315AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Revision: 5/20/2019

Mix-point Gain Output V. Send H Input V. Return A	wG21316AU\x0D\x0A
Mix-point Gain Output 1 Input V. Return B	wG21400AU\x0D\x0A
Mix-point Gain Output 8 Input V. Return B	wG21407AU\x0D\x0A
Mix-point Gain Output Exp. 1 Input V. Return B	wG21417AU\x0D\x0A
Mix-point Gain Output Exp. 2 Input V. Return B	wG21418AU\x0D\x0A
Mix-point Gain Output Exp. 3 Input V. Return B	wG21419AU\x0D\x0A
Mix-point Gain Output Exp. 4 Input V. Return B	wG21420AU\x0D\x0A
Mix-point Gain Output Exp. 5 Input V. Return B	wG21421AU\x0D\x0A
Mix-point Gain Output Exp. 6 Input V. Return B	wG21422AU\x0D\x0A
Mix-point Gain Output Exp. 7 Input V. Return B	wG21423AU\x0D\x0A
Mix-point Gain Output Exp. 8 Input V. Return B	wG21424AU\x0D\x0A
Mix-point Gain Output V. Send A Input V. Return B	wG21409AU\x0D\x0A
Mix-point Gain Output V. Send B Input V. Return B	wG21410AU\x0D\x0A
Mix-point Gain Output V. Send C Input V. Return B	wG21411AU\x0D\x0A
Mix-point Gain Output V. Send D Input V. Return B	wG21412AU\x0D\x0A
Mix-point Gain Output V. Send E Input V. Return B	wG21413AU\x0D\x0A
Mix-point Gain Output V. Send F Input V. Return B	wG21414AU\x0D\x0A
Mix-point Gain Output V. Send G Input V. Return B	wG21415AU\x0D\x0A
Mix-point Gain Output V. Send H Input V. Return B	wG21416AU\x0D\x0A
Mix-point Gain Output 1 Input V. Return C	wG21500AU\x0D\x0A
Mix-point Gain Output 8 Input V. Return C	wG21507AU\x0D\x0A
Mix-point Gain Output Exp. 1 Input V. Return C	wG21517AU\x0D\x0A
Mix-point Gain Output Exp. 2 Input V. Return C	wG21518AU\x0D\x0A
Mix-point Gain Output Exp. 3 Input V. Return C	wG21519AU\x0D\x0A
Mix-point Gain Output Exp. 4 Input V. Return C	wG21520AU\x0D\x0A
Mix-point Gain Output Exp. 5 Input V. Return C	wG21521AU\x0D\x0A
Mix-point Gain Output Exp. 6 Input V. Return C	wG21522AU\x0D\x0A
Mix-point Gain Output Exp. 7 Input V. Return C	wG21523AU\x0D\x0A
Mix-point Gain Output Exp. 8 Input V. Return C	wG21524AU\x0D\x0A
Mix-point Gain Output V. Send A Input V. Return C	wG21509AU\x0D\x0A
Mix-point Gain Output V. Send B Input V. Return C	wG21510AU\x0D\x0A
Mix-point Gain Output V. Send C Input V. Return C	wG21511AU\x0D\x0A
Mix-point Gain Output V. Send D Input V. Return C	wG21512AU\x0D\x0A
Mix-point Gain Output V. Send E Input V. Return C	wG21513AU\x0D\x0A
Mix-point Gain Output V. Send F Input V. Return C	wG21514AU\x0D\x0A
Mix-point Gain Output V. Send G Input V. Return C	wG21515AU\x0D\x0A
Mix-point Gain Output V. Send H Input V. Return C	wG21516AU\x0D\x0A
Mix-point Gain Output 1 Input V. Return D	wG21600AU\x0D\x0A
Mix-point Gain Output 8 Input V. Return D	wG21607AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Mix-point Gain Output Exp. 1 Input V. Return D	wG21617AU\x0D\x0A
Mix-point Gain Output Exp. 2 Input V. Return D	wG21618AU\x0D\x0A
Mix-point Gain Output Exp. 3 Input V. Return D	wG21619AU\x0D\x0A
Mix-point Gain Output Exp. 4 Input V. Return D	wG21620AU\x0D\x0A
Mix-point Gain Output Exp. 5 Input V. Return D	wG21621AU\x0D\x0A
Mix-point Gain Output Exp. 6 Input V. Return D	wG21622AU\x0D\x0A
Mix-point Gain Output Exp. 7 Input V. Return D	wG21623AU\x0D\x0A
Mix-point Gain Output Exp. 8 Input V. Return D	wG21624AU\x0D\x0A
Mix-point Gain Output V. Send A Input V. Return D	wG21609AU\x0D\x0A
Mix-point Gain Output V. Send B Input V. Return D	wG21610AU\x0D\x0A
Mix-point Gain Output V. Send C Input V. Return D	wG21611AU\x0D\x0A
Mix-point Gain Output V. Send D Input V. Return D	wG21612AU\x0D\x0A
Mix-point Gain Output V. Send E Input V. Return D	wG21613AU\x0D\x0A
Mix-point Gain Output V. Send F Input V. Return D	wG21614AU\x0D\x0A
Mix-point Gain Output V. Send G Input V. Return D	wG21615AU\x0D\x0A
Mix-point Gain Output V. Send H Input V. Return D	wG21616AU\x0D\x0A
Mix-point Gain Output 1 Input V. Return E	wG21700AU\x0D\x0A
Mix-point Gain Output 8 Input V. Return E	wG21707AU\x0D\x0A
Mix-point Gain Output Exp. 1 Input V. Return E	wG21717AU\x0D\x0A
Mix-point Gain Output Exp. 2 Input V. Return E	wG21718AU\x0D\x0A
Mix-point Gain Output Exp. 3 Input V. Return E	wG21719AU\x0D\x0A
Mix-point Gain Output Exp. 4 Input V. Return E	wG21720AU\x0D\x0A
Mix-point Gain Output Exp. 5 Input V. Return E	wG21721AU\x0D\x0A
Mix-point Gain Output Exp. 6 Input V. Return E	wG21722AU\x0D\x0A
Mix-point Gain Output Exp. 7 Input V. Return E	wG21723AU\x0D\x0A
Mix-point Gain Output Exp. 8 Input V. Return E	wG21724AU\x0D\x0A
Mix-point Gain Output V. Send A Input V. Return E	wG21709AU\x0D\x0A
Mix-point Gain Output V. Send B Input V. Return E	wG21710AU\x0D\x0A
Mix-point Gain Output V. Send C Input V. Return E	wG21711AU\x0D\x0A
Mix-point Gain Output V. Send D Input V. Return E	wG21712AU\x0D\x0A
Mix-point Gain Output V. Send E Input V. Return E	wG21713AU\x0D\x0A
Mix-point Gain Output V. Send F Input V. Return E	wG21714AU\x0D\x0A
Mix-point Gain Output V. Send G Input V. Return E	wG21715AU\x0D\x0A
Mix-point Gain Output V. Send H Input V. Return E	wG21716AU\x0D\x0A
Mix-point Gain Output 1 Input V. Return F	wG21800AU\x0D\x0A
Mix-point Gain Output 8 Input V. Return F	wG21807AU\x0D\x0A
Mix-point Gain Output Exp. 1 Input V. Return F	wG21817AU\x0D\x0A
Mix-point Gain Output Exp. 2 Input V. Return F	wG21818AU\x0D\x0A
Mix-point Gain Output Exp. 3 Input V. Return F	wG21819AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Mix-point Gain Output Exp. 4 Input V. Return F	wG21820AU\x0D\x0A
Mix-point Gain Output Exp. 5 Input V. Return F	wG21821AU\x0D\x0A
Mix-point Gain Output Exp. 6 Input V. Return F	wG21822AU\x0D\x0A
Mix-point Gain Output Exp. 7 Input V. Return F	wG21823AU\x0D\x0A
Mix-point Gain Output Exp. 8 Input V. Return F	wG21824AU\x0D\x0A
Mix-point Gain Output V. Send A Input V. Return F	wG21809AU\x0D\x0A
Mix-point Gain Output V. Send B Input V. Return F	wG21810AU\x0D\x0A
Mix-point Gain Output V. Send C Input V. Return F	wG21811AU\x0D\x0A
Mix-point Gain Output V. Send D Input V. Return F	wG21812AU\x0D\x0A
Mix-point Gain Output V. Send E Input V. Return F	wG21813AU\x0D\x0A
Mix-point Gain Output V. Send F Input V. Return F	wG21814AU\x0D\x0A
Mix-point Gain Output V. Send G Input V. Return F	wG21815AU\x0D\x0A
Mix-point Gain Output V. Send H Input V. Return F	wG21816AU\x0D\x0A
Mix-point Gain Output 1 Input V. Return G	wG21900AU\x0D\x0A
Mix-point Gain Output 8 Input V. Return G	wG21907AU\x0D\x0A
Mix-point Gain Output Exp. 1 Input V. Return G	wG21917AU\x0D\x0A
Mix-point Gain Output Exp. 2 Input V. Return G	wG21918AU\x0D\x0A
Mix-point Gain Output Exp. 3 Input V. Return G	wG21919AU\x0D\x0A
Mix-point Gain Output Exp. 4 Input V. Return G	wG21920AU\x0D\x0A
Mix-point Gain Output Exp. 5 Input V. Return G	wG21921AU\x0D\x0A
Mix-point Gain Output Exp. 6 Input V. Return G	wG21922AU\x0D\x0A
Mix-point Gain Output Exp. 7 Input V. Return G	wG21923AU\x0D\x0A
Mix-point Gain Output Exp. 8 Input V. Return G	wG21924AU\x0D\x0A
Mix-point Gain Output V. Send A Input V. Return G	wG21909AU\x0D\x0A
Mix-point Gain Output V. Send B Input V. Return G	wG21910AU\x0D\x0A
Mix-point Gain Output V. Send C Input V. Return G	wG21911AU\x0D\x0A
Mix-point Gain Output V. Send D Input V. Return G	wG21912AU\x0D\x0A
Mix-point Gain Output V. Send E Input V. Return G	wG21913AU\x0D\x0A
Mix-point Gain Output V. Send F Input V. Return G	wG21914AU\x0D\x0A
Mix-point Gain Output V. Send G Input V. Return G	wG21915AU\x0D\x0A
Mix-point Gain Output V. Send H Input V. Return G	wG21916AU\x0D\x0A
Mix-point Gain Output 1 Input V. Return H	wG22000AU\x0D\x0A
Mix-point Gain Output 8 Input V. Return H	wG22007AU\x0D\x0A
Mix-point Gain Output Exp. 1 Input V. Return H	wG22017AU\x0D\x0A
Mix-point Gain Output Exp. 2 Input V. Return H	wG22018AU\x0D\x0A
Mix-point Gain Output Exp. 3 Input V. Return H	wG22019AU\x0D\x0A
Mix-point Gain Output Exp. 4 Input V. Return H	wG22020AU\x0D\x0A
Mix-point Gain Output Exp. 5 Input V. Return H	wG22021AU\x0D\x0A
Mix-point Gain Output Exp. 6 Input V. Return H	wG22022AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Mix-point Gain Output Exp. 7 Input V. Return H	wG22023AU\x0D\x0A
Mix-point Gain Output Exp. 8 Input V. Return H	wG22024AU\x0D\x0A
Mix-point Gain Output V. Send A Input V. Return H	wG22009AU\x0D\x0A
Mix-point Gain Output V. Send B Input V. Return H	wG22010AU\x0D\x0A
Mix-point Gain Output V. Send C Input V. Return H	wG22011AU\x0D\x0A
Mix-point Gain Output V. Send D Input V. Return H	wG22012AU\x0D\x0A
Mix-point Gain Output V. Send E Input V. Return H	wG22013AU\x0D\x0A
Mix-point Gain Output V. Send F Input V. Return H	wG22014AU\x0D\x0A
Mix-point Gain Output V. Send G Input V. Return H	wG22015AU\x0D\x0A
Mix-point Gain Output V. Send H Input V. Return H	wG22016AU\x0D\x0A
Mix-point Mute Output 1 Input 1	wM20000AU\x0D\x0A
Mix-point Mute Output 8 Input 1	wM20007AU\x0D\x0A
Mix-point Mute Output Exp. 1 Input 1	wM20017AU\x0D\x0A
Mix-point Mute Output Exp. 2 Input 1	wM20018AU\x0D\x0A
Mix-point Mute Output Exp. 3 Input 1	wM20019AU\x0D\x0A
Mix-point Mute Output Exp. 4 Input 1	wM20020AU\x0D\x0A
Mix-point Mute Output Exp. 5 Input 1	wM20021AU\x0D\x0A
Mix-point Mute Output Exp. 6 Input 1	wM20022AU\x0D\x0A
Mix-point Mute Output Exp. 7 Input 1	wM20023AU\x0D\x0A
Mix-point Mute Output Exp. 8 Input 1	wM20024AU\x0D\x0A
Mix-point Mute Output V. Send A Input 1	wM20009AU\x0D\x0A
Mix-point Mute Output V. Send B Input 1	wM20010AU\x0D\x0A
Mix-point Mute Output V. Send C Input 1	wM20011AU\x0D\x0A
Mix-point Mute Output V. Send D Input 1	wM20012AU\x0D\x0A
Mix-point Mute Output V. Send E Input 1	wM20013AU\x0D\x0A
Mix-point Mute Output V. Send F Input 1	wM20014AU\x0D\x0A
Mix-point Mute Output V. Send G Input 1	wM20015AU\x0D\x0A
Mix-point Mute Output V. Send H Input 1	wM20016AU\x0D\x0A
Mix-point Mute Output 1 Input 11	wM21000AU\x0D\x0A
Mix-point Mute Output 8 Input 11	wM21007AU\x0D\x0A
Mix-point Mute Output Exp. 1 Input 11	wM21017AU\x0D\x0A
Mix-point Mute Output Exp. 2 Input 11	wM21018AU\x0D\x0A
Mix-point Mute Output Exp. 3 Input 11	wM21019AU\x0D\x0A
Mix-point Mute Output Exp. 4 Input 11	wM21020AU\x0D\x0A
Mix-point Mute Output Exp. 5 Input 11	wM21021AU\x0D\x0A
Mix-point Mute Output Exp. 6 Input 11	wM21022AU\x0D\x0A
Mix-point Mute Output Exp. 7 Input 11	wM21023AU\x0D\x0A
Mix-point Mute Output Exp. 8 Input 11	wM21024AU\x0D\x0A
Mix-point Mute Output V. Send A Input 11	wM21009AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Mix-point Mute Output V. Send B Input 11	wM21010AU\x0D\x0A
Mix-point Mute Output V. Send C Input 11	wM21011AU\x0D\x0A
Mix-point Mute Output V. Send D Input 11	wM21012AU\x0D\x0A
Mix-point Mute Output V. Send E Input 11	wM21013AU\x0D\x0A
Mix-point Mute Output V. Send F Input 11	wM21014AU\x0D\x0A
Mix-point Mute Output V. Send G Input 11	wM21015AU\x0D\x0A
Mix-point Mute Output V. Send H Input 11	wM21016AU\x0D\x0A
Mix-point Mute Output 1 Input V. Return A	wM21300AU\x0D\x0A
Mix-point Mute Output 8 Input V. Return A	wM21307AU\x0D\x0A
Mix-point Mute Output Exp. 1 Input V. Return A	wM21317AU\x0D\x0A
Mix-point Mute Output Exp. 2 Input V. Return A	wM21318AU\x0D\x0A
Mix-point Mute Output Exp. 3 Input V. Return A	wM21319AU\x0D\x0A
Mix-point Mute Output Exp. 4 Input V. Return A	wM21320AU\x0D\x0A
Mix-point Mute Output Exp. 5 Input V. Return A	wM21321AU\x0D\x0A
Mix-point Mute Output Exp. 6 Input V. Return A	wM21322AU\x0D\x0A
Mix-point Mute Output Exp. 7 Input V. Return A	wM21323AU\x0D\x0A
Mix-point Mute Output Exp. 8 Input V. Return A	wM21324AU\x0D\x0A
Mix-point Mute Output V. Send A Input V. Return A	wM21309AU\x0D\x0A
Mix-point Mute Output V. Send B Input V. Return A	wM21310AU\x0D\x0A
Mix-point Mute Output V. Send C Input V. Return A	wM21311AU\x0D\x0A
Mix-point Mute Output V. Send D Input V. Return A	wM21312AU\x0D\x0A
Mix-point Mute Output V. Send E Input V. Return A	wM21313AU\x0D\x0A
Mix-point Mute Output V. Send F Input V. Return A	wM21314AU\x0D\x0A
Mix-point Mute Output V. Send G Input V. Return A	wM21315AU\x0D\x0A
Mix-point Mute Output V. Send H Input V. Return A	wM21316AU\x0D\x0A
Mix-point Mute Output 1 Input V. Return B	wM21400AU\x0D\x0A
Mix-point Mute Output 8 Input V. Return B	wM21407AU\x0D\x0A
Mix-point Mute Output Exp. 1 Input V. Return B	wM21417AU\x0D\x0A
Mix-point Mute Output Exp. 2 Input V. Return B	wM21418AU\x0D\x0A
Mix-point Mute Output Exp. 3 Input V. Return B	wM21419AU\x0D\x0A
Mix-point Mute Output Exp. 4 Input V. Return B	wM21420AU\x0D\x0A
Mix-point Mute Output Exp. 5 Input V. Return B	wM21421AU\x0D\x0A
Mix-point Mute Output Exp. 6 Input V. Return B	wM21422AU\x0D\x0A
Mix-point Mute Output Exp. 7 Input V. Return B	wM21423AU\x0D\x0A
Mix-point Mute Output Exp. 8 Input V. Return B	wM21424AU\x0D\x0A
Mix-point Mute Output V. Send A Input V. Return B	wM21409AU\x0D\x0A
Mix-point Mute Output V. Send B Input V. Return B	wM21410AU\x0D\x0A
Mix-point Mute Output V. Send C Input V. Return B	wM21411AU\x0D\x0A
Mix-point Mute Output V. Send D Input V. Return B	wM21412AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Mix-point Mute Output V. Send E Input V. Return B	wM21413AU\x0D\x0A
Mix-point Mute Output V. Send F Input V. Return B	wM21414AU\x0D\x0A
Mix-point Mute Output V. Send G Input V. Return B	wM21415AU\x0D\x0A
Mix-point Mute Output V. Send H Input V. Return B	wM21416AU\x0D\x0A
Mix-point Mute Output 1 Input V. Return C	wM21500AU\x0D\x0A
Mix-point Mute Output 8 Input V. Return C	wM21507AU\x0D\x0A
Mix-point Mute Output Exp. 1 Input V. Return C	wM21517AU\x0D\x0A
Mix-point Mute Output Exp. 2 Input V. Return C	wM21518AU\x0D\x0A
Mix-point Mute Output Exp. 3 Input V. Return C	wM21519AU\x0D\x0A
Mix-point Mute Output Exp. 4 Input V. Return C	wM21520AU\x0D\x0A
Mix-point Mute Output Exp. 5 Input V. Return C	wM21521AU\x0D\x0A
Mix-point Mute Output Exp. 6 Input V. Return C	wM21522AU\x0D\x0A
Mix-point Mute Output Exp. 7 Input V. Return C	wM21523AU\x0D\x0A
Mix-point Mute Output Exp. 8 Input V. Return C	wM21524AU\x0D\x0A
Mix-point Mute Output V. Send A Input V. Return C	wM21509AU\x0D\x0A
Mix-point Mute Output V. Send B Input V. Return C	wM21510AU\x0D\x0A
Mix-point Mute Output V. Send C Input V. Return C	wM21511AU\x0D\x0A
Mix-point Mute Output V. Send D Input V. Return C	wM21512AU\x0D\x0A
Mix-point Mute Output V. Send E Input V. Return C	wM21513AU\x0D\x0A
Mix-point Mute Output V. Send F Input V. Return C	wM21514AU\x0D\x0A
Mix-point Mute Output V. Send G Input V. Return C	wM21515AU\x0D\x0A
Mix-point Mute Output V. Send H Input V. Return C	wM21516AU\x0D\x0A
Mix-point Mute Output 1 Input V. Return D	wM21600AU\x0D\x0A
Mix-point Mute Output 8 Input V. Return D	wM21607AU\x0D\x0A
Mix-point Mute Output Exp. 1 Input V. Return D	wM21617AU\x0D\x0A
Mix-point Mute Output Exp. 2 Input V. Return D	wM21618AU\x0D\x0A
Mix-point Mute Output Exp. 3 Input V. Return D	wM21619AU\x0D\x0A
Mix-point Mute Output Exp. 4 Input V. Return D	wM21620AU\x0D\x0A
Mix-point Mute Output Exp. 5 Input V. Return D	wM21621AU\x0D\x0A
Mix-point Mute Output Exp. 6 Input V. Return D	wM21622AU\x0D\x0A
Mix-point Mute Output Exp. 7 Input V. Return D	wM21623AU\x0D\x0A
Mix-point Mute Output Exp. 8 Input V. Return D	wM21624AU\x0D\x0A
Mix-point Mute Output V. Send A Input V. Return D	wM21609AU\x0D\x0A
Mix-point Mute Output V. Send B Input V. Return D	wM21610AU\x0D\x0A
Mix-point Mute Output V. Send C Input V. Return D	wM21611AU\x0D\x0A
Mix-point Mute Output V. Send D Input V. Return D	wM21612AU\x0D\x0A
Mix-point Mute Output V. Send E Input V. Return D	wM21613AU\x0D\x0A
Mix-point Mute Output V. Send F Input V. Return D	wM21614AU\x0D\x0A
Mix-point Mute Output V. Send G Input V. Return D	wM21615AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Mix-point Mute Output V. Send H Input V. Return D	wM21616AU\x0D\x0A
Mix-point Mute Output 1 Input V. Return E	wM21700AU\x0D\x0A
Mix-point Mute Output 8 Input V. Return E	wM21707AU\x0D\x0A
Mix-point Mute Output Exp. 1 Input V. Return E	wM21717AU\x0D\x0A
Mix-point Mute Output Exp. 2 Input V. Return E	wM21718AU\x0D\x0A
Mix-point Mute Output Exp. 3 Input V. Return E	wM21719AU\x0D\x0A
Mix-point Mute Output Exp. 4 Input V. Return E	wM21720AU\x0D\x0A
Mix-point Mute Output Exp. 5 Input V. Return E	wM21721AU\x0D\x0A
Mix-point Mute Output Exp. 6 Input V. Return E	wM21722AU\x0D\x0A
Mix-point Mute Output Exp. 7 Input V. Return E	wM21723AU\x0D\x0A
Mix-point Mute Output Exp. 8 Input V. Return E	wM21724AU\x0D\x0A
Mix-point Mute Output V. Send A Input V. Return E	wM21709AU\x0D\x0A
Mix-point Mute Output V. Send B Input V. Return E	wM21710AU\x0D\x0A
Mix-point Mute Output V. Send C Input V. Return E	wM21711AU\x0D\x0A
Mix-point Mute Output V. Send D Input V. Return E	wM21712AU\x0D\x0A
Mix-point Mute Output V. Send E Input V. Return E	wM21713AU\x0D\x0A
Mix-point Mute Output V. Send F Input V. Return E	wM21714AU\x0D\x0A
Mix-point Mute Output V. Send G Input V. Return E	wM21715AU\x0D\x0A
Mix-point Mute Output V. Send H Input V. Return E	wM21716AU\x0D\x0A
Mix-point Mute Output 1 Input V. Return F	wM21800AU\x0D\x0A
Mix-point Mute Output 8 Input V. Return F	wM21807AU\x0D\x0A
Mix-point Mute Output Exp. 1 Input V. Return F	wM21817AU\x0D\x0A
Mix-point Mute Output Exp. 2 Input V. Return F	wM21818AU\x0D\x0A
Mix-point Mute Output Exp. 3 Input V. Return F	wM21819AU\x0D\x0A
Mix-point Mute Output Exp. 4 Input V. Return F	wM21820AU\x0D\x0A
Mix-point Mute Output Exp. 5 Input V. Return F	wM21821AU\x0D\x0A
Mix-point Mute Output Exp. 6 Input V. Return F	wM21822AU\x0D\x0A
Mix-point Mute Output Exp. 7 Input V. Return F	wM21823AU\x0D\x0A
Mix-point Mute Output Exp. 8 Input V. Return F	wM21824AU\x0D\x0A
Mix-point Mute Output V. Send A Input V. Return F	wM21809AU\x0D\x0A
Mix-point Mute Output V. Send B Input V. Return F	wM21810AU\x0D\x0A
Mix-point Mute Output V. Send C Input V. Return F	wM21811AU\x0D\x0A
Mix-point Mute Output V. Send D Input V. Return F	wM21812AU\x0D\x0A
Mix-point Mute Output V. Send E Input V. Return F	wM21813AU\x0D\x0A
Mix-point Mute Output V. Send F Input V. Return F	wM21814AU\x0D\x0A
Mix-point Mute Output V. Send G Input V. Return F	wM21815AU\x0D\x0A
Mix-point Mute Output V. Send H Input V. Return F	wM21816AU\x0D\x0A
Mix-point Mute Output 1 Input V. Return G	wM21900AU\x0D\x0A
Mix-point Mute Output 8 Input V. Return G	wM21907AU\x0D\x0A

**Global Scriptor Module
Communication Sheet**

Mix-point Mute Output Exp. 1 Input V. Return G	wM21917AU\x0D\x0A
Mix-point Mute Output Exp. 2 Input V. Return G	wM21918AU\x0D\x0A
Mix-point Mute Output Exp. 3 Input V. Return G	wM21919AU\x0D\x0A
Mix-point Mute Output Exp. 4 Input V. Return G	wM21920AU\x0D\x0A
Mix-point Mute Output Exp. 5 Input V. Return G	wM21921AU\x0D\x0A
Mix-point Mute Output Exp. 6 Input V. Return G	wM21922AU\x0D\x0A
Mix-point Mute Output Exp. 7 Input V. Return G	wM21923AU\x0D\x0A
Mix-point Mute Output Exp. 8 Input V. Return G	wM21924AU\x0D\x0A
Mix-point Mute Output V. Send A Input V. Return G	wM21909AU\x0D\x0A
Mix-point Mute Output V. Send B Input V. Return G	wM21910AU\x0D\x0A
Mix-point Mute Output V. Send C Input V. Return G	wM21911AU\x0D\x0A
Mix-point Mute Output V. Send D Input V. Return G	wM21912AU\x0D\x0A
Mix-point Mute Output V. Send E Input V. Return G	wM21913AU\x0D\x0A
Mix-point Mute Output V. Send F Input V. Return G	wM21914AU\x0D\x0A
Mix-point Mute Output V. Send G Input V. Return G	wM21915AU\x0D\x0A
Mix-point Mute Output V. Send H Input V. Return G	wM21916AU\x0D\x0A
Mix-point Mute Output 1 Input V. Return H	wM22000AU\x0D\x0A
Mix-point Mute Output 8 Input V. Return H	wM22007AU\x0D\x0A
Mix-point Mute Output Exp. 1 Input V. Return H	wM22017AU\x0D\x0A
Mix-point Mute Output Exp. 2 Input V. Return H	wM22018AU\x0D\x0A
Mix-point Mute Output Exp. 3 Input V. Return H	wM22019AU\x0D\x0A
Mix-point Mute Output Exp. 4 Input V. Return H	wM22020AU\x0D\x0A
Mix-point Mute Output Exp. 5 Input V. Return H	wM22021AU\x0D\x0A
Mix-point Mute Output Exp. 6 Input V. Return H	wM22022AU\x0D\x0A
Mix-point Mute Output Exp. 7 Input V. Return H	wM22023AU\x0D\x0A
Mix-point Mute Output Exp. 8 Input V. Return H	wM22024AU\x0D\x0A
Mix-point Mute Output V. Send A Input V. Return H	wM22009AU\x0D\x0A
Mix-point Mute Output V. Send B Input V. Return H	wM22010AU\x0D\x0A
Mix-point Mute Output V. Send C Input V. Return H	wM22011AU\x0D\x0A
Mix-point Mute Output V. Send D Input V. Return H	wM22012AU\x0D\x0A
Mix-point Mute Output V. Send E Input V. Return H	wM22013AU\x0D\x0A
Mix-point Mute Output V. Send F Input V. Return H	wM22014AU\x0D\x0A
Mix-point Mute Output V. Send G Input V. Return H	wM22015AU\x0D\x0A
Mix-point Mute Output V. Send H Input V. Return H	wM22016AU\x0D\x0A
Mix-point Mute Output 1 Input 12	wM21100AU\x0D\x0A
Mix-point Mute Output 8 Input 12	wM21107AU\x0D\x0A
Mix-point Mute Output Exp. 1 Input 12	wM21117AU\x0D\x0A
Mix-point Mute Output Exp. 2 Input 12	wM21118AU\x0D\x0A
Mix-point Mute Output Exp. 3 Input 12	wM21119AU\x0D\x0A

**Global Scripter Module
Communication Sheet**

Mix-point Mute Output Exp. 4 Input 12	wM21120AU\x0D\x0A
Mix-point Mute Output Exp. 5 Input 12	wM21121AU\x0D\x0A
Mix-point Mute Output Exp. 6 Input 12	wM21122AU\x0D\x0A
Mix-point Mute Output Exp. 7 Input 12	wM21123AU\x0D\x0A
Mix-point Mute Output Exp. 8 Input 12	wM21124AU\x0D\x0A
Mix-point Mute Output V. Send A Input 12	wM21109AU\x0D\x0A
Mix-point Mute Output V. Send B Input 12	wM21110AU\x0D\x0A
Mix-point Mute Output V. Send C Input 12	wM21111AU\x0D\x0A
Mix-point Mute Output V. Send D Input 12	wM21112AU\x0D\x0A
Mix-point Mute Output V. Send E Input 12	wM21113AU\x0D\x0A
Mix-point Mute Output V. Send F Input 12	wM21114AU\x0D\x0A
Mix-point Mute Output V. Send G Input 12	wM21115AU\x0D\x0A
Mix-point Mute Output V. Send H Input 12	wM21116AU\x0D\x0A
Output Attenuation Output 1	wG60000AU\x0D\x0A
Output Attenuation Output 8	wG60007AU\x0D\x0A
Output Mute Output 1	wM60000*AU\x0D\x0A
Output Mute Output 8	wM60007*AU\x0D\x0A
Output Post-mixer Trim Output 1	wG60100AU\x0D\x0A
Output Post-mixer Trim Output 8	wG60107AU\x0D\x0A
Part Number	n
Pre-mixer Gain Input 1	wG40100AU\x0D\x0A
Pre-mixer Gain Input 12	wG40111AU\x0D\x0A
Pre-mixer Mute Input 1	wM40100*AU\x0D\x0A
Pre-mixer Mute Input 12	wM40111*AU\x0D\x0A
Virtual Return Gain Input A	wG50000AU\x0D\x0A
Virtual Return Gain Input B	wG50001AU\x0D\x0A
Virtual Return Gain Input C	wG50002AU\x0D\x0A
Virtual Return Gain Input D	wG50003AU\x0D\x0A
Virtual Return Gain Input E	wG50004AU\x0D\x0A
Virtual Return Gain Input F	wG50005AU\x0D\x0A
Virtual Return Gain Input G	wG50006AU\x0D\x0A
Virtual Return Gain Input H	wG50007AU\x0D\x0A
Virtual Return Mute Input A	wM50000AU\x0D\x0A
Virtual Return Mute Input B	wM50001AU\x0D\x0A
Virtual Return Mute Input C	wM50002AU\x0D\x0A
Virtual Return Mute Input D	wM50003AU\x0D\x0A
Virtual Return Mute Input E	wM50004AU\x0D\x0A
Virtual Return Mute Input F	wM50005AU\x0D\x0A
Virtual Return Mute Input G	wM50006AU\x0D\x0A

Global Scriptor Module Communication Sheet

Revision: 5/20/2019

Virtual Return Mute Input H	wM50007AU\x0D\x0A
------------------------------------	-------------------