

CSC 4227 Digital Image Processing


Lecture 18 – Image Restoration : Noise Removal

Dr. Kazi A Kalpoma

Professor , Dept. of CSE

Ahsanullah University of Science & Technology (AUST)

Contact: kalpoma@aust.edu



Contents

In this lecture we will look at image restoration techniques used for noise removal

- What is image restoration?
- Noise and images
- Noise models
- Noise removal using spatial domain filtering

What is Image Restoration?

9

- Image restoration attempts to restore images that have been degraded
 - ✓ Identify the degradation process and attempt to reverse it.
 - ✓ Almost Similar to image enhancement, but more objective.

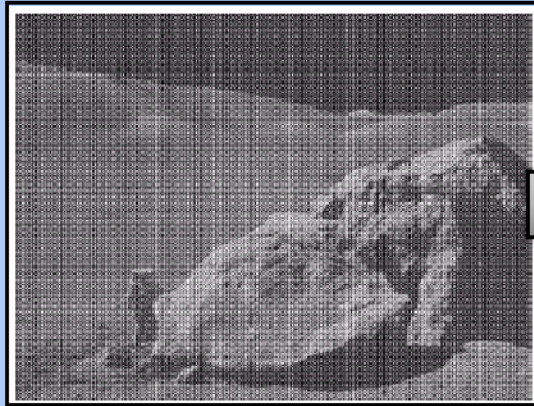


Fig: Degraded image



Fig: Restored image

Image enhancement vs. Image Restoration


11

- Image restoration assumes a degradation model that is known or can be estimated.
- Original content and quality does not mean **Good looking or appearance**.
- Image Enhancement is **subjective**, where as image restoration is **objective process**.
- Image restoration try to recover original image from degraded with **prior knowledge of degradation process**.
- Restoration involves **modeling of degradation** and applying the **inverse process in order to recover the original image**.
- Although the restore image is not the original image, its approximation of actual image.

Degradation Model?

13

- **Objective:** To restore a degraded/distorted image to its original content and quality.

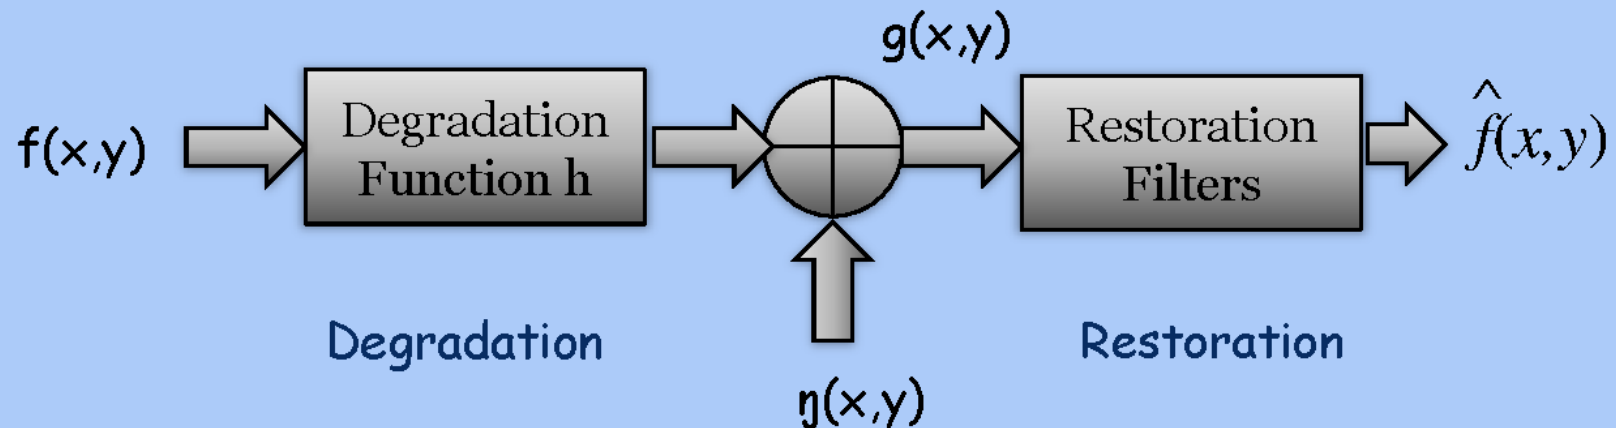


- **Spatial Domain:** $g(x,y)=h(x,y)*f(x,y)+ \eta(x,y)$
- **Frequency Domain:** $G(u,v)=H(u,v)F(u,v)+ \eta(u,v)$
- **Matrix:** $G=HF+\eta$

What is Image Restoration

 **Digital Image Processing, 3rd ed.**
Gonzalez & Woods
www.ImageProcessingPlace.com
Chapter 5
Image Restoration and Reconstruction

FIGURE 5.1
A model of the image degradation/restoration process.

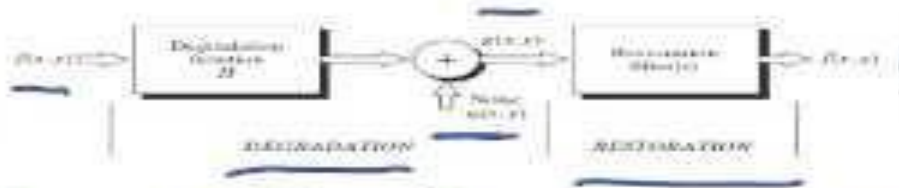

$g(x,y) = f(x,y) * H(x,y)$

$\hat{f}(x,y) \approx f(x,y)$


© 1997 J. C. Gonzalez & R. E. Woods

<https://www.youtube.com/watch?v=AHOV4507GBQ>

Noise and Images

The sources of noise in digital images arise during image acquisition (digitization) and transmission

- Imaging **sensors** can be affected by **ambient conditions**
- **Interference** can be added to an image **during transmission**

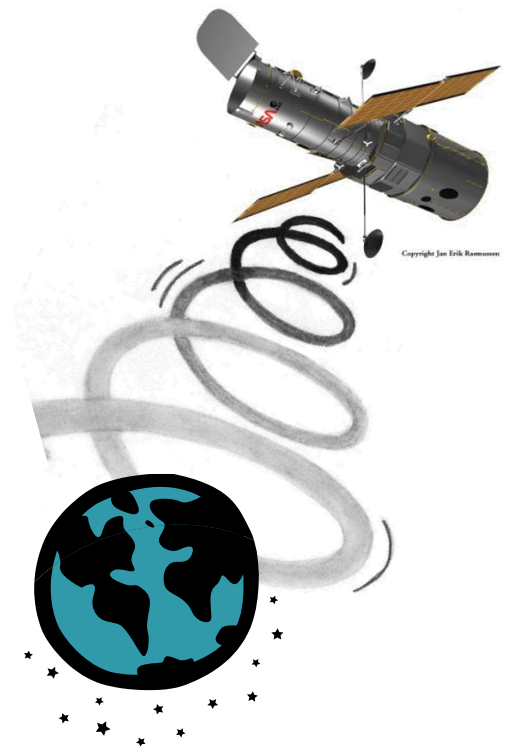

Noise Model

We can consider a noisy image to be modelled as follows:

$$g(x, y) = f(x, y) + \eta(x, y)$$

where $f(x, y)$ is the original image pixel, $\eta(x, y)$ is the noise term and $g(x, y)$ is the resulting noisy pixel

If we can estimate the model of the noise in an image, this will help us to figure out how to restore the image.

Noise Models and Their PDF

15

- Different models for the image noise term $\eta(x, y)$

- ✓ Gaussian

- ✧ **Most common model**

- ✓ Rayleigh


- ✓ Erlang or Gamma

- ✓ Exponential

- ✓ Uniform

- ✓ Impulse

- ✧ **Salt and pepper noise**

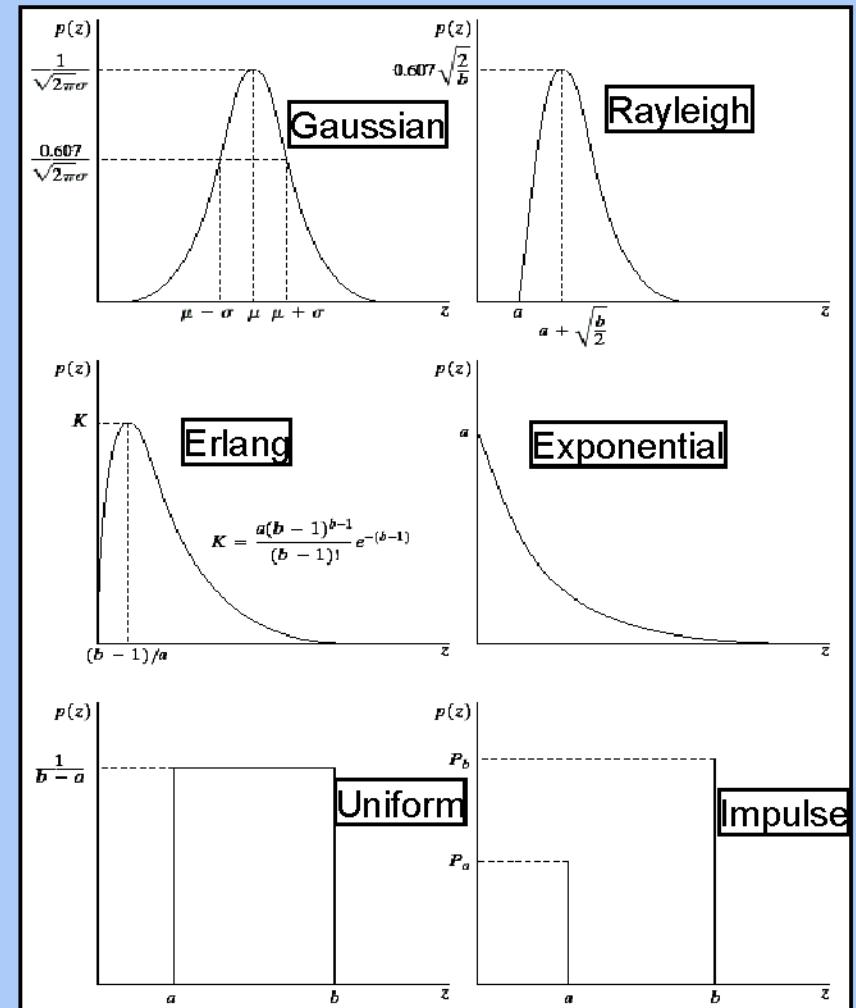

Noise Models

Noise cannot be predicted but can be approximately described in statistical way using the probability density function (PDF)

Gaussian noise:

$$p(z) = \frac{1}{\sqrt{2\pi}\sigma} e^{-(z-\mu)^2 / 2\sigma^2}$$

Rayleigh noise

$$p(z) = \begin{cases} \frac{2}{b}(z-a)e^{-(z-a)^2/b} & \text{for } z \geq a \\ 0 & \text{for } z < a \end{cases}$$

Erlang (Gamma) noise

$$p(z) = \begin{cases} \frac{a^b z^{b-1}}{(b-1)!} e^{-az} & \text{for } z \geq 0 \\ 0 & \text{for } z < 0 \end{cases}$$

Noise Models (cont.)

Exponential noise

$$p(z) = ae^{-az}$$


Uniform noise

$$p(z) = \begin{cases} \frac{1}{b-a} & \text{for } a \leq z \leq b \\ 0 & \text{otherwise} \end{cases}$$

Impulse (salt & pepper) noise

$$p(z) = \begin{cases} P_a & \text{for } z = a \\ P_b & \text{for } z = b \\ 0 & \text{otherwise} \end{cases}$$

Noise Types (optional to watch)

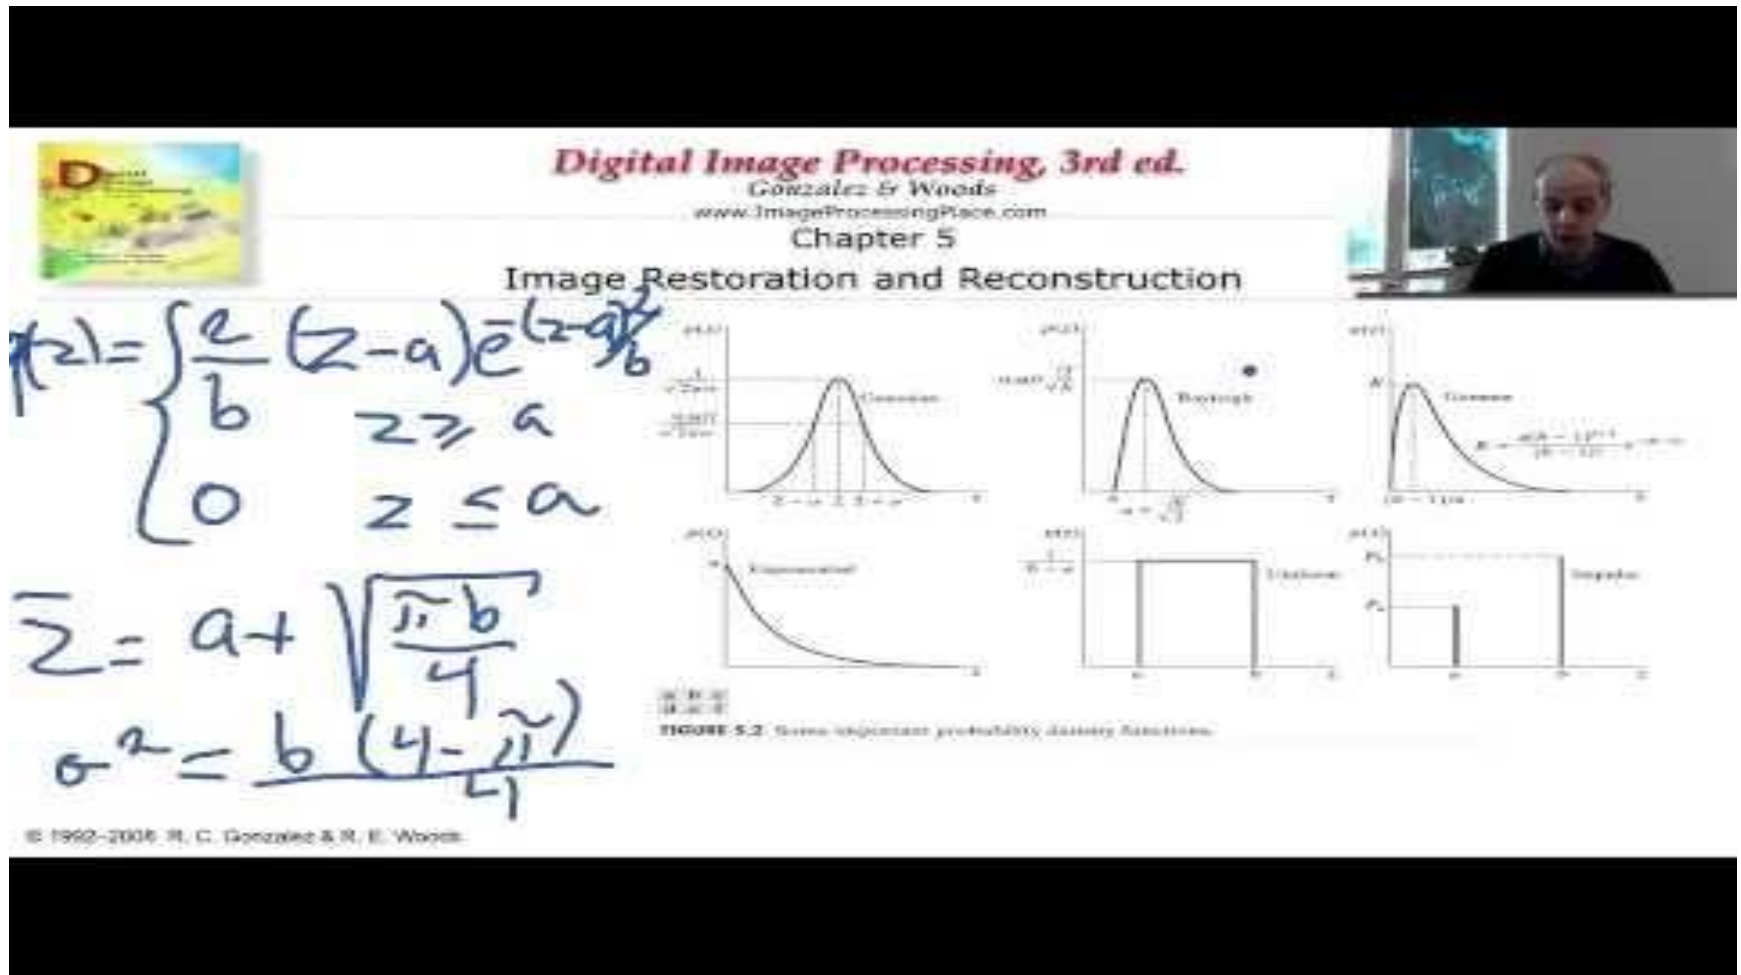

Digital Image Processing, 3rd ed.
Gonzalez & Woods
www.ImageProcessingPlace.com
Chapter 5
Image Restoration and Reconstruction

Handwritten Notes:

$$p(z) = \begin{cases} \frac{1}{b} (z-a) e^{-\frac{(z-a)^2}{b}} & z \geq a \\ 0 & z \leq a \end{cases}$$
$$\bar{z} = a + \sqrt{\frac{\pi b}{4}}$$
$$\sigma^2 = \frac{b(4 - \pi)}{4}$$

Figure 5.2: Some important probability density functions.

The figure displays six plots of probability density functions (PDFs) and their corresponding cumulative distribution functions (CDFs):

- Gaussian:** A bell-shaped curve centered at μ with standard deviation σ . The CDF is an S-shaped curve.
- Rayleigh:** A curve starting at the origin and increasing towards a peak. The CDF is an S-shaped curve.
- Gamma:** A curve starting at the origin and increasing towards a peak. The CDF is an S-shaped curve.
- Exponential:** A curve starting at the origin and decreasing towards zero. The CDF is an S-shaped curve.
- Uniform:** A constant value over a range $[a, b]$. The CDF is a linear ramp.
- Impulse:** A single vertical line at a specific value. The CDF is a step function.

© 1992-2005 R. C. Gonzalez & R. E. Woods.

<https://www.youtube.com/watch?v=vZNyZgdEhgQ>

Noise Models Effects

16

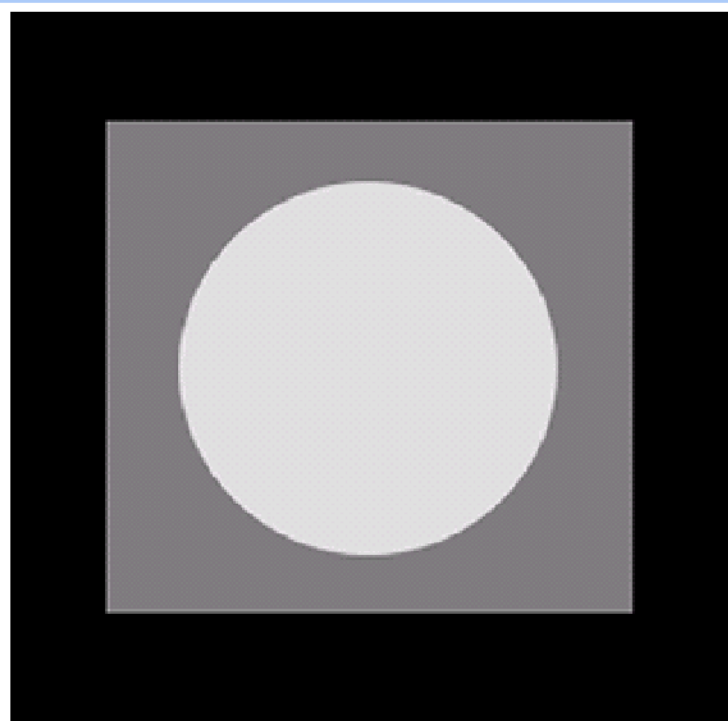


Fig: Original Image







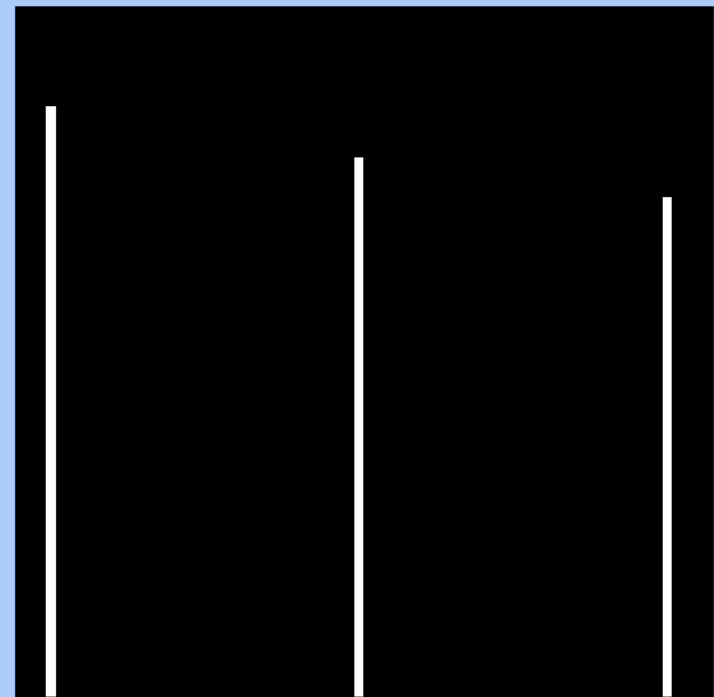


Fig: Original Image histogram

Noise Models Effects contd1...

17

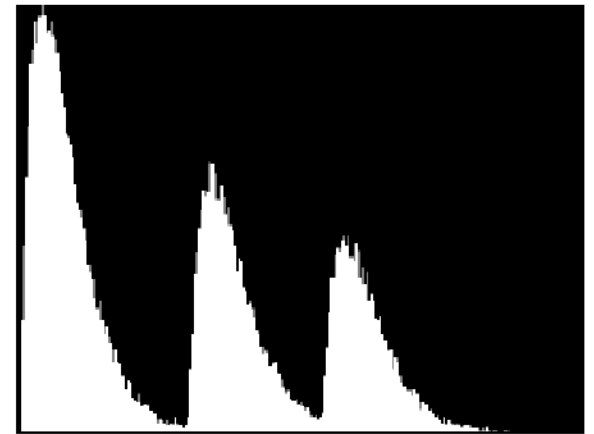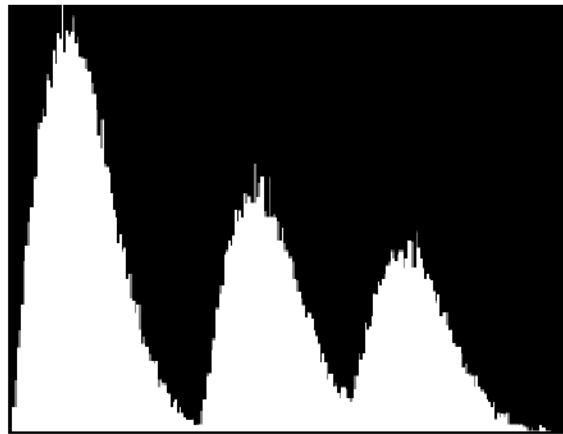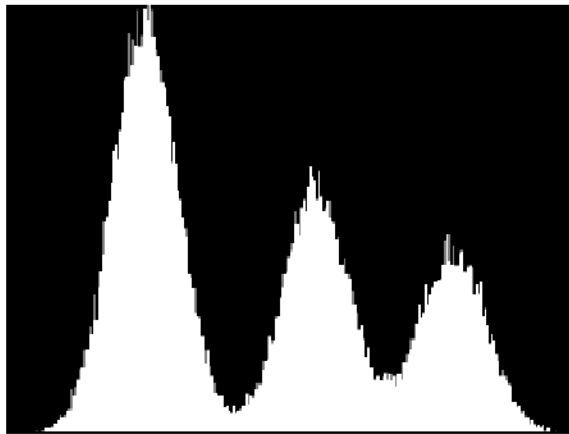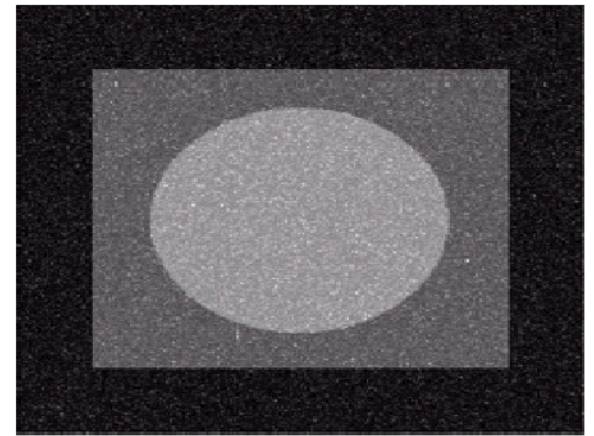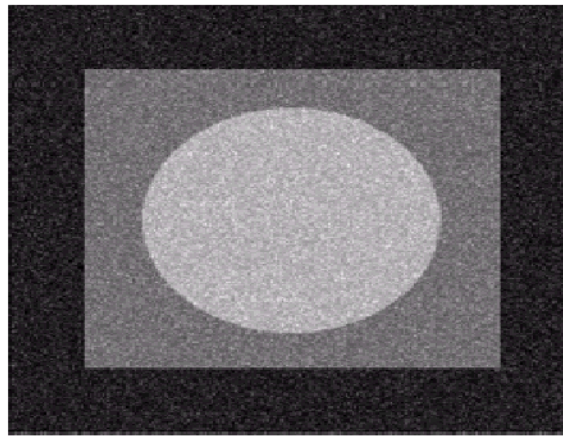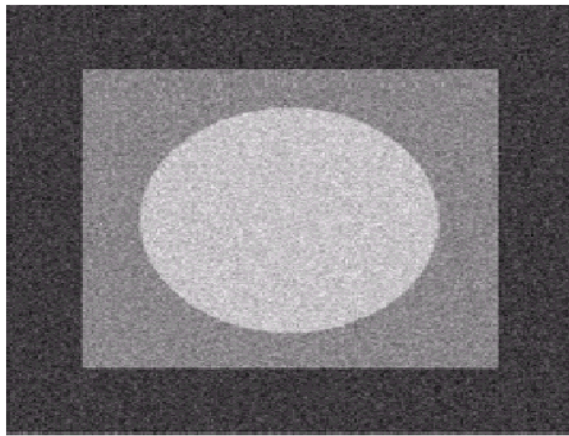







Gaussian

Rayleigh

Gamma

Noise Models Effects contd2...

18

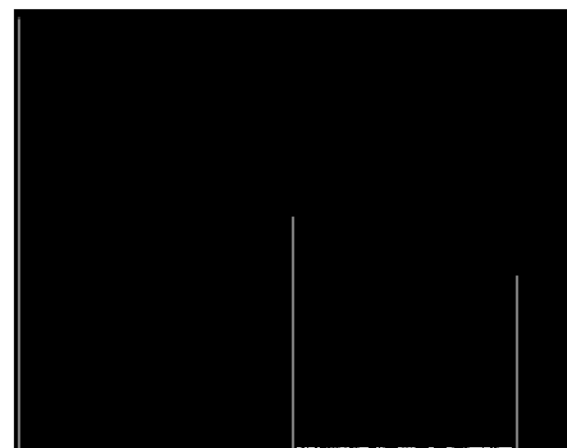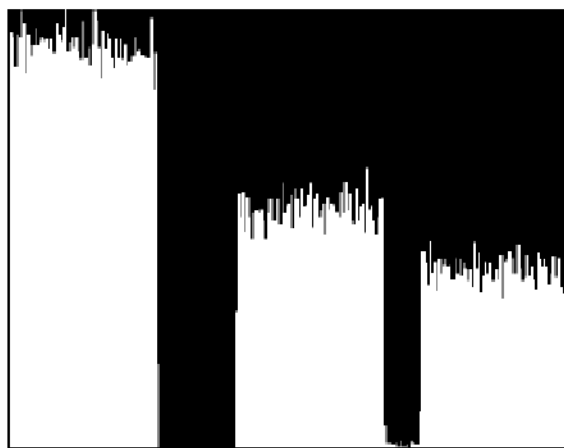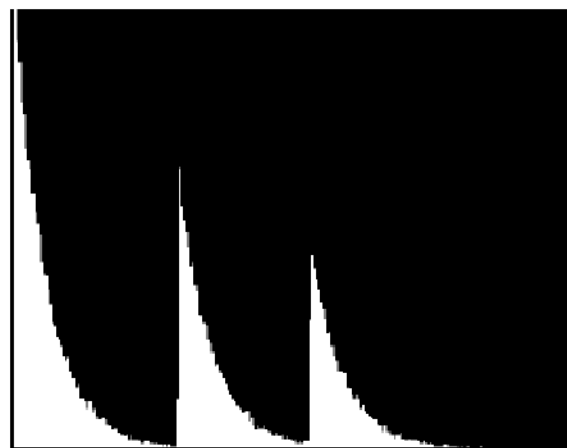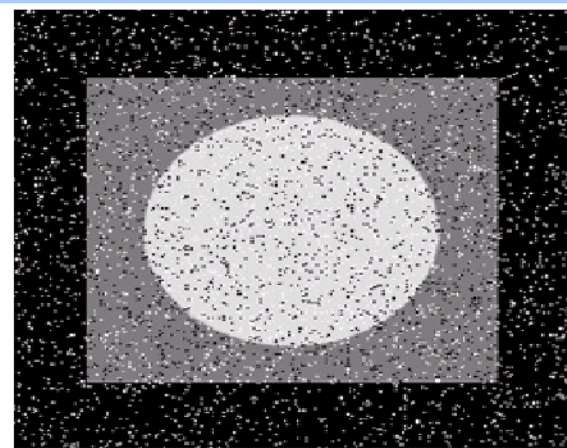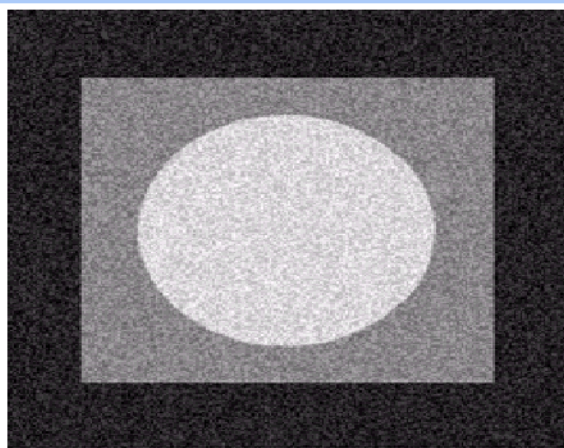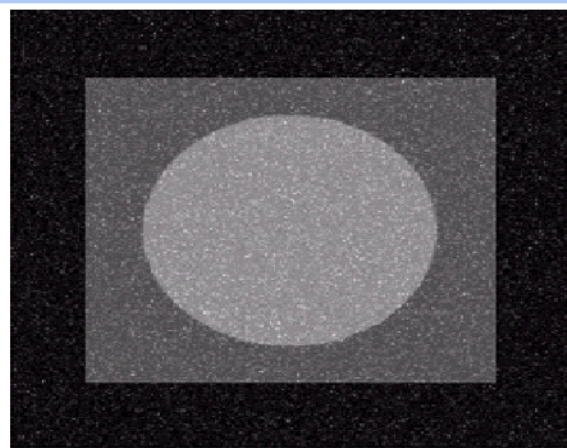


Exponential


Uniform

Salt & Pepper

Estimating noise

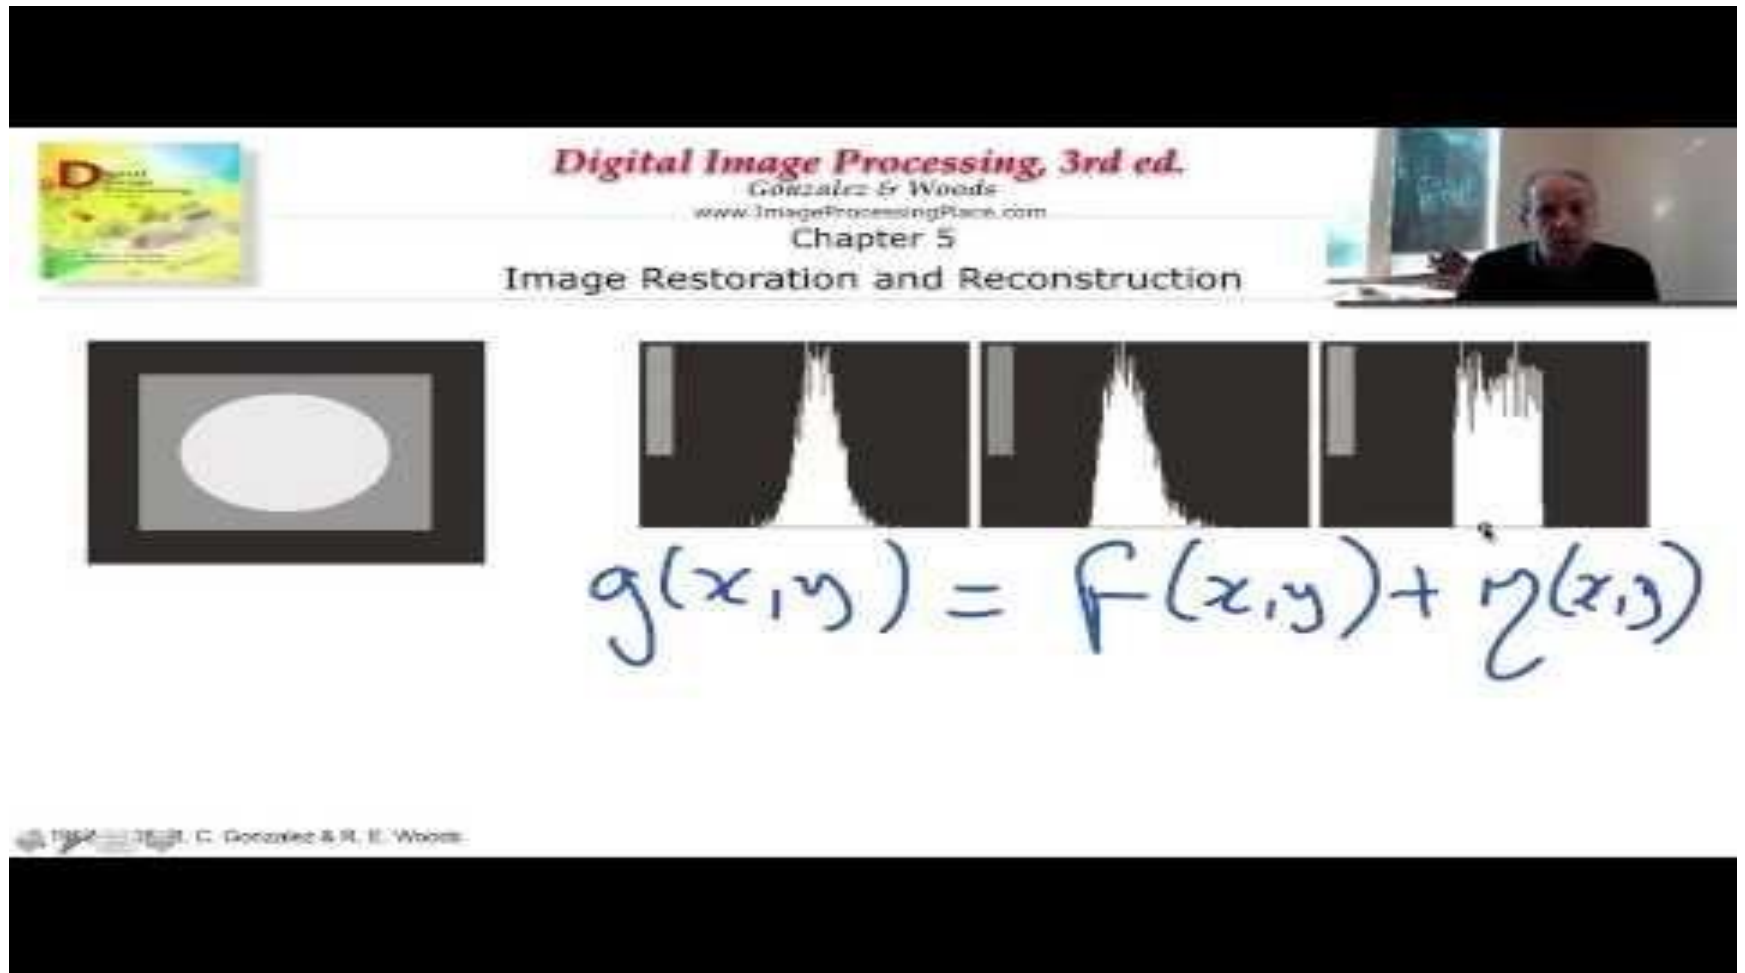

Digital Image Processing, 3rd ed.
Gonzalez & Woods
www.ImageProcessingPlace.com
Chapter 5
Image Restoration and Reconstruction

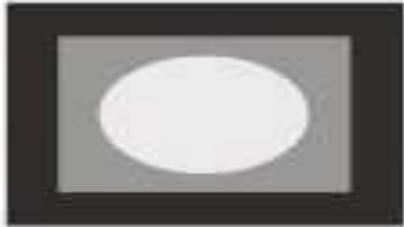
$$g(x,y) = f(x,y) + n(x,y)$$

© 1994-2007 R. C. Gonzalez & R. E. Woods

<https://www.youtube.com/watch?v=Cla60r2E2VI>

Restoration Techniques.

28

- Inverse Filtering.
- Minimum Mean Squares Errors.
 - ✓ **Weiner Filtering.**
- Constrained Least Square Filter.
- Non linear filtering
- Advanced Restoration Technique.

Filter used for Restoration Process

29

- Mean filters
 - Arithmetic mean filter
 - Geometric mean filter
 - Harmonic mean filter
 - Contra-harmonic mean filter
- Order statistics filters
 - Median filter
 - Max and min filters
 - Mid-point filter
 - alpha-trimmed filters
- Adaptive filters
 - Adaptive local noise reduction filter.
 - Adaptive median filter

Filtering to Remove Noise-AMF

30

- Use spatial filters of different kinds to remove different kinds of noise
- **Arithmetic Mean :**

$$\hat{f}(x, y) = \frac{1}{mn} \sum_{(s,t) \in S_{xy}} g(s, t)$$

- This is implemented as the simple smoothing filter Blurs the image to remove noise.

$1/9$	$1/9$	$1/9$
$1/9$	$1/9$	$1/9$
$1/9$	$1/9$	$1/9$

Filtering to Remove Noise-GMF

31

- **Geometric Mean:**

$$\hat{f}(x, y) = \left[\prod_{(s,t) \in S_{xy}} g(s, t) \right]^{\frac{1}{mn}}$$

- Achieves similar smoothing to the arithmetic mean, but tends to lose less image detail.

Filtering to Remove Noise-HMF

32

- Harmonic Mean:

$$\hat{f}(x, y) = \frac{mn}{\sum_{(s,t) \in S_{xy}} \frac{1}{g(s,t)}}$$

- Works well for salt noise, but fails for pepper noise
- Satisfactory result in other kinds of noise such as Gaussian noise

Filtering to Remove Noise-CHMF

33

- **Contra-harmonic Mean:**

$$\hat{f}(x, y) = \frac{\sum_{(s,t) \in S_{xy}} g(s, t)^{Q+1}}{\sum_{(s,t) \in S_{xy}} g(s, t)^Q}$$

- Q is the *order* of the filter and adjusting its value changes the filter's behaviour.
- Positive values of Q eliminate pepper noise.
- Negative values of Q eliminate salt noise.

Order Statistics Filters

37

- Spatial filters that are based on ordering the pixel values that make up the neighbourhood operated on by the filter
- Useful spatial filters include
 - Median filter.
 - Maximum and Minimum filter.
 - Midpoint filter.
 - Alpha trimmed mean filter.

Median Filter

38

- **Median Filter:**

$$\hat{f}(x, y) = \underset{(s,t) \in S_{xy}}{\text{median}}\{g(s, t)\}$$

- Excellent at noise removal, without the smoothing effects that can occur with other smoothing filters
- Best result for removing salt and pepper noise.

Maximum and Minimum Filter

39

- **Max Filter:**

$$\hat{f}(x, y) = \max_{(s,t) \in S_{xy}} \{g(s, t)\}$$

- **Min Filter:**

$$\hat{f}(x, y) = \min_{(s,t) \in S_{xy}} \{g(s, t)\}$$

- Max filter is good for **pepper noise** and min is good for **salt noise**

Midpoint Filter

40

- **Midpoint Filter:**

$$\hat{f}(x, y) = \frac{1}{2} \left[\max_{(s,t) \in S_{xy}} \{g(s, t)\} + \min_{(s,t) \in S_{xy}} \{g(s, t)\} \right]$$

- Good for random Gaussian and uniform noise

Alpha-Trimmed Mean Filter

41

- **Alpha-Trimmed Mean Filter:**

$$\hat{f}(x, y) = \frac{1}{mn - d} \sum_{(s,t) \in S_{xy}} g_r(s, t)$$

- Here deleted the $d/2$ lowest and $d/2$ highest grey levels, so $g_r(s, t)$ represents the remaining $mn - d$ pixels