

# class 10

Jenny Zhou

## Comparative structure analysis of Adenylate Kinase

adenylate kinase (ADK) is an important drug target and we would love to know how it works.

We will perform PCA on the complete collection of ADK structures in the protein data-bank (PDB) to reveal detailed features and mechanistic principles of these essential shape changing transitions.

First install the packages needed > Q10. Which of the packages above is found only on BioConductor and not CRAN?

msa

Q11. Which of the above packages is not found on BioConductor or CRAN?:

Grantlab/bio3d-view

Q12. True or False? Functions from the devtools package can be used to install packages from GitHub and BitBucket?

TRUE.

## Search and retrieve ADK structures

Fetch the query sequence for chain A of the PDB ID 1AKE (example ADK sequence). We will use this to find all ADK structures in the PDB.

```
library(bio3d)
aa <- get.seq("1ake_A")
```

Warning in get.seq("1ake\_A"): Removing existing file: seqs.fasta

Fetching... Please wait. Done.

```
aa
```

```

      1      .      .      .      .      .      .      60
pdb|1AKE|A  MRIILLGAPGAGKGTQAQFIMEKYGIPQISTGDMLRAAVKSGSELGKQAKDIMDAGKLV
      1      .      .      .      .      .      .      60

      61      .      .      .      .      .      .      120
pdb|1AKE|A  DELVIALVKERIAQEDCRNGFLLDGFPRTIPQADAMKEAGINVDYVLEFDVPDELIVDRI
      61      .      .      .      .      .      .      120

     121      .      .      .      .      .      .      180
pdb|1AKE|A  VGRRVHAPSGRVYHVKFNPVKVEGKDDVTGEELTTRKDDQEETVRKRLVEYHQMTAPLIG
     121      .      .      .      .      .      .      180

     181      .      .      .      214
pdb|1AKE|A  YYSKEAEAGNTKYAKVDGTPVAEVRADLEKILG
     181      .      .      .      214
```

Call:

```
read.fasta(file = outfile)
```

Class:

```
fasta
```

Alignment dimensions:

```
1 sequence rows; 214 position columns (214 non-gap, 0 gap)
```

```
+ attr: id, ali, call
```

Q13. How many amino acids are in this sequence, i.e. how long is this sequence?

214 amino acids.

Now we can use this sequence as a query to BLAST search the PDB to find similar sequences and structures.

```
# Blast or hmmer search
#b <- blast.pdb(aa)
```

```
# Plot a summary of search results
#hits <- plot(b)
```

Let's see what's in `hits` object.

```
#hits$ pdb.id
```

Because we do not want to rerun the code above everytime, we just manually spell the `hits` vector

```
hits <- NULL
hits$ pdb.id <- c('1AKE_A', '6S36_A', '6RZE_A', '3HPR_A', '1E4V_A', '5EJE_A', '1E4Y_A', '3X2S_A',
# Download related PDB files
files <- get.pdb(hits$ pdb.id, path="pdb", split=TRUE, gzip=TRUE)
```

```
Warning in get.pdb(hits$ pdb.id, path = "pdb", split = TRUE, gzip = TRUE):
pdb/1AKE.pdb exists. Skipping download
```

```
Warning in get.pdb(hits$ pdb.id, path = "pdb", split = TRUE, gzip = TRUE):
pdb/6S36.pdb exists. Skipping download
```

```
Warning in get.pdb(hits$ pdb.id, path = "pdb", split = TRUE, gzip = TRUE):
pdb/6RZE.pdb exists. Skipping download
```

```
Warning in get.pdb(hits$ pdb.id, path = "pdb", split = TRUE, gzip = TRUE):
pdb/3HPR.pdb exists. Skipping download
```

```
Warning in get.pdb(hits$ pdb.id, path = "pdb", split = TRUE, gzip = TRUE):
pdb/1E4V.pdb exists. Skipping download
```

```
Warning in get.pdb(hits$ pdb.id, path = "pdb", split = TRUE, gzip = TRUE):
pdb/5EJE.pdb exists. Skipping download
```

```
Warning in get.pdb(hits$ pdb.id, path = "pdb", split = TRUE, gzip = TRUE):
pdb/1E4Y.pdb exists. Skipping download
```

```
Warning in get.pdb(hits$ pdb.id, path = "pdb", split = TRUE, gzip = TRUE):
pdb/3X2S.pdb exists. Skipping download
```


Warning in get.pdb(hits\$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):  
pdbs/6HAP.pdb exists. Skipping download

Warning in get.pdb(hits\$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):  
pdbs/6HAM.pdb exists. Skipping download

Warning in get.pdb(hits\$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):  
pdbs/4K46.pdb exists. Skipping download

Warning in get.pdb(hits\$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):  
pdbs/3GMT.pdb exists. Skipping download

Warning in get.pdb(hits\$pdb.id, path = "pdbs", split = TRUE, gzip = TRUE):  
pdbs/4PZL.pdb exists. Skipping download

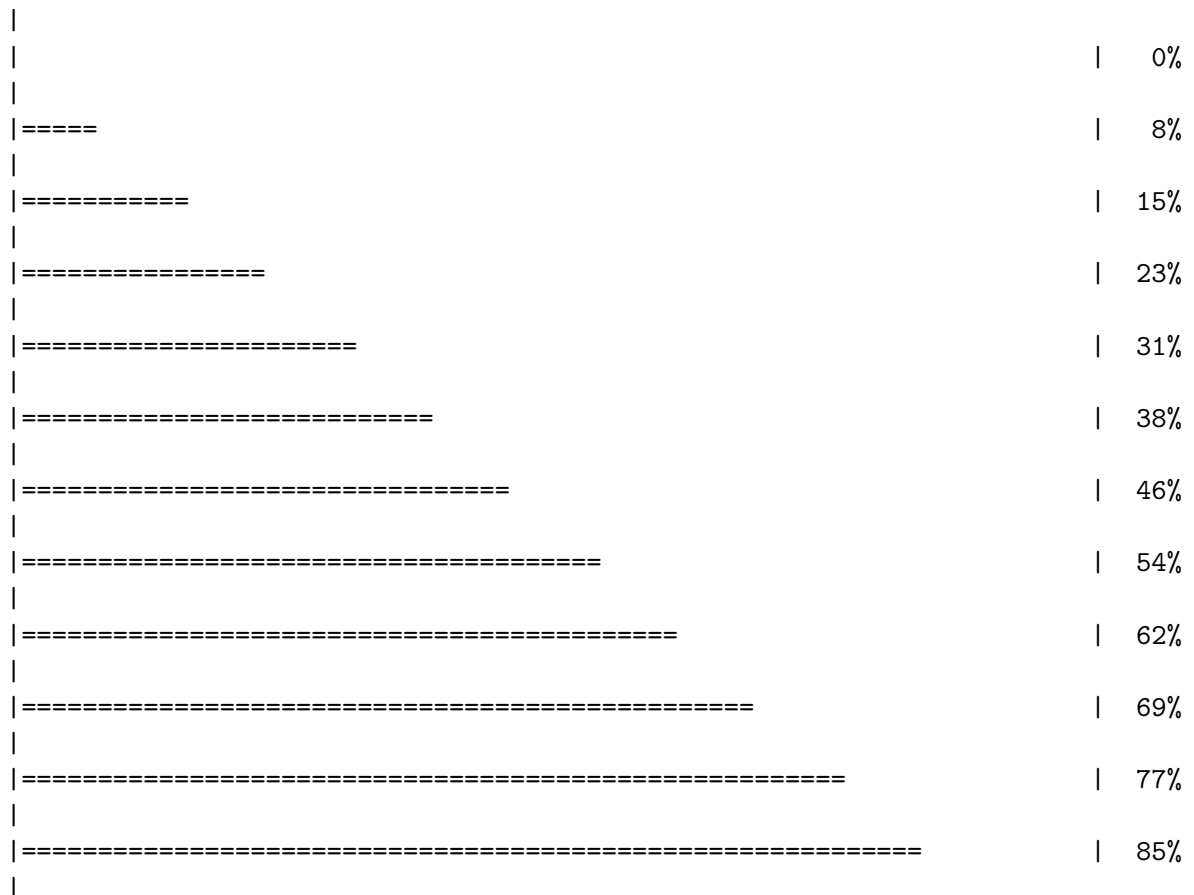

```
|=====| 92%
|
|=====| 100%
```

## Align and superpose structures

Align and superpose these structures which are all over place.

```
# Align related PDBs
pdb <- pdbaln(files, fit = TRUE, exefile="msa")
```

Reading PDB files:

```
pdb/split_chain/1AKE_A.pdb
pdb/split_chain/6S36_A.pdb
pdb/split_chain/6RZE_A.pdb
pdb/split_chain/3HPR_A.pdb
pdb/split_chain/1E4V_A.pdb
pdb/split_chain/5EJE_A.pdb
pdb/split_chain/1E4Y_A.pdb
pdb/split_chain/3X2S_A.pdb
pdb/split_chain/6HAP_A.pdb
pdb/split_chain/6HAM_A.pdb
pdb/split_chain/4K46_A.pdb
pdb/split_chain/3GMT_A.pdb
pdb/split_chain/4PZL_A.pdb
  PDB has ALT records, taking A only, rm.alt=TRUE
.   PDB has ALT records, taking A only, rm.alt=TRUE
.   PDB has ALT records, taking A only, rm.alt=TRUE
.   PDB has ALT records, taking A only, rm.alt=TRUE
..  PDB has ALT records, taking A only, rm.alt=TRUE
.... PDB has ALT records, taking A only, rm.alt=TRUE
.   PDB has ALT records, taking A only, rm.alt=TRUE
...
```

Extracting sequences

```
pdb/seq: 1   name: pdb/split_chain/1AKE_A.pdb
  PDB has ALT records, taking A only, rm.alt=TRUE
pdb/seq: 2   name: pdb/split_chain/6S36_A.pdb
  PDB has ALT records, taking A only, rm.alt=TRUE
pdb/seq: 3   name: pdb/split_chain/6RZE_A.pdb
```

```

PDB has ALT records, taking A only, rm.alt=TRUE
pdb/seq: 4   name: pdbc/split_chain/3HPR_A.pdb
PDB has ALT records, taking A only, rm.alt=TRUE
pdb/seq: 5   name: pdbc/split_chain/1E4V_A.pdb
pdb/seq: 6   name: pdbc/split_chain/5EJE_A.pdb
PDB has ALT records, taking A only, rm.alt=TRUE
pdb/seq: 7   name: pdbc/split_chain/1E4Y_A.pdb
pdb/seq: 8   name: pdbc/split_chain/3X2S_A.pdb
pdb/seq: 9   name: pdbc/split_chain/6HAP_A.pdb
pdb/seq: 10  name: pdbc/split_chain/6HAM_A.pdb
PDB has ALT records, taking A only, rm.alt=TRUE
pdb/seq: 11  name: pdbc/split_chain/4K46_A.pdb
PDB has ALT records, taking A only, rm.alt=TRUE
pdb/seq: 12  name: pdbc/split_chain/3GMT_A.pdb
pdb/seq: 13  name: pdbc/split_chain/4PZL_A.pdb

```

Let's have a look at our pdbc object.

pdbc

```

[Truncated_Name:1] 1AKE_A.pdb      1          .          .          .          40
-----MRIILLGAPGAGKGTQAQFIMEKYGIPQIS
[Truncated_Name:2] 6S36_A.pdb      -----MRIILLGAPGAGKGTQAQFIMEKYGIPQIS
[Truncated_Name:3] 6RZE_A.pdb      -----MRIILLGAPGAGKGTQAQFIMEKYGIPQIS
[Truncated_Name:4] 3HPR_A.pdb      -----MRIILLGAPGAGKGTQAQFIMEKYGIPQIS
[Truncated_Name:5] 1E4V_A.pdb      -----MRIILLGAPVAGKGTQAQFIMEKYGIPQIS
[Truncated_Name:6] 5EJE_A.pdb      -----MRIILLGAPGAGKGTQAQFIMEKYGIPQIS
[Truncated_Name:7] 1E4Y_A.pdb      -----MRIILLGALVAGKGTQAQFIMEKYGIPQIS
[Truncated_Name:8] 3X2S_A.pdb      -----MRIILLGAPGAGKGTQAQFIMEKYGIPQIS
[Truncated_Name:9] 6HAP_A.pdb      -----MRIILLGAPGAGKGTQAQFIMEKYGIPQIS
[Truncated_Name:10] 6HAM_A.pdb     -----MRIILLGAPGAGKGTQAQFIMEKYGIPQIS
[Truncated_Name:11] 4K46_A.pdb     -----MRIILLGAPGAGKGTQAQFIMAKFGIPQIS
[Truncated_Name:12] 3GMT_A.pdb     -----MRLILLGAPGAGKGTQANFIKEKFGIPQIS
[Truncated_Name:13] 4PZL_A.pdb     TENLYFQSNAMRIILLGAPGAGKGTQAKIIEQKYNIAHIS
                                **~*****  *****  *  *~ *  **
1          .          .          .          40

41          .          .          .          80
[Truncated_Name:1] 1AKE_A.pdb     TGDMLRAAVKSGSELGKQAKDIMDAGKLVTDLVIALVKE
[Truncated_Name:2] 6S36_A.pdb     TGDMLRAAVKSGSELGKQAKDIMDAGKLVTDLVIALVKE
[Truncated_Name:3] 6RZE_A.pdb     TGDMLRAAVKSGSELGKQAKDIMDAGKLVTDLVIALVKE
[Truncated_Name:4] 3HPR_A.pdb     TGDMLRAAVKSGSELGKQAKDIMDAGKLVTDLVIALVKE

```

[Truncated_Name:5] 1E4V_A.pdb	TGDMRLRAAVKSGSELGKQAKDIMDAGKLVTDDELVIALVKE	
[Truncated_Name:6] 5EJE_A.pdb	TGDMRLRAAVKSGSELGKQAKDIMDACKLVTDDELVIALVKE	
[Truncated_Name:7] 1E4Y_A.pdb	TGDMRLRAAVKSGSELGKQAKDIMDAGKLVTDDELVIALVKE	
[Truncated_Name:8] 3X2S_A.pdb	TGDMRLRAAVKSGSELGKQAKDIMDCGKLVTDDELVIALVKE	
[Truncated_Name:9] 6HAP_A.pdb	TGDMRLRAAVKSGSELGKQAKDIMDAGKLVTDDELVIALVRE	
[Truncated_Name:10] 6HAM_A.pdb	TGDMRLRAAIKSGSELGKQAKDIMDAGKLVTDDEIIIALVKE	
[Truncated_Name:11] 4K46_A.pdb	TGDMRLRAAIKAGTELGKQAKSVIDAGQLVSDDIILGLVKE	
[Truncated_Name:12] 3GMT_A.pdb	TGDMRLRAAVKAGTPLGVEAKTYMDEGKLVPSLIIGLVKE	
[Truncated_Name:13] 4PZL_A.pdb	TGDMIRETIKSGSALGQELKKVLDAGELVSDEFIIVKIVKD	
	****~* ~* *~ ** * ~* ** * ^^ ~*^^	
	41 . . . 80	
	81 . . . 120	
[Truncated_Name:1] 1AKE_A.pdb	RIAQEDCRNGFLLDGFPR TIPQADAMKEAGINVDYVLEFD	
[Truncated_Name:2] 6S36_A.pdb	RIAQEDCRNGFLLDGFPR TIPQADAMKEAGINVDYVLEFD	
[Truncated_Name:3] 6RZE_A.pdb	RIAQEDCRNGFLLDGFPR TIPQADAMKEAGINVDYVLEFD	
[Truncated_Name:4] 3HPR_A.pdb	RIAQEDCRNGFLLDGFPR TIPQADAMKEAGINVDYVLEFD	
[Truncated_Name:5] 1E4V_A.pdb	RIAQEDCRNGFLLDGFPR TIPQADAMKEAGINVDYVLEFD	
[Truncated_Name:6] 5EJE_A.pdb	RIAQEDCRNGFLLDGFPR TIPQADAMKEAGINVDYVLEFD	
[Truncated_Name:7] 1E4Y_A.pdb	RIAQEDCRNGFLLDGFPR TIPQADAMKEAGINVDYVLEFD	
[Truncated_Name:8] 3X2S_A.pdb	RIAQEDSRNGFLLDGFPR TIPQADAMKEAGINVDYVLEFD	
[Truncated_Name:9] 6HAP_A.pdb	RICQEDSRNGFLLDGFPR TIPQADAMKEAGINVDYVLEFD	
[Truncated_Name:10] 6HAM_A.pdb	RICQEDSRNGFLLDGFPR TIPQADAMKEAGINVDYVLEFD	
[Truncated_Name:11] 4K46_A.pdb	RIAQDDCAKGFLDGFPR TIPQADGLKEVGVVVDYVIEFD	
[Truncated_Name:12] 3GMT_A.pdb	RLKEADCANGYLF DGFPR TIPQADAMKEAGVAIDYVLEID	
[Truncated_Name:13] 4PZL_A.pdb	RISKNCNNGFLLDGVPR TIPQAQELDKLGVNIDYIVEVD	
	*~ * *~* ** ***** ** ^ *~ ~*~*~* *	
	81 . . . 120	
	121 . . . 160	
[Truncated_Name:1] 1AKE_A.pdb	VPDELIVDRIVGRRVHAPSGRVYHV KFNPPKVEGKDDVTG	
[Truncated_Name:2] 6S36_A.pdb	VPDELIVDKIVGRRVHAPSGRVYHV KFNPPKVEGKDDVTG	
[Truncated_Name:3] 6RZE_A.pdb	VPDELIVDAIVGRRVHAPSGRVYHV KFNPPKVEGKDDVTG	
[Truncated_Name:4] 3HPR_A.pdb	VPDELIVDRIVGRRVHAPSGRVYHV KFNPPKVEGKDDGTG	
[Truncated_Name:5] 1E4V_A.pdb	VPDELIVDRIVGRRVHAPSGRVYHV KFNPPKVEGKDDVTG	
[Truncated_Name:6] 5EJE_A.pdb	VPDELIVDRIVGRRVHAPSGRVYHV KFNPPKVEGKDDVTG	
[Truncated_Name:7] 1E4Y_A.pdb	VPDELIVDRIVGRRVHAPSGRVYHV KFNPPKVEGKDDVTG	
[Truncated_Name:8] 3X2S_A.pdb	VPDELIVDRIVGRRVHAPSGRVYHV KFNPPKVEGKDDVTG	
[Truncated_Name:9] 6HAP_A.pdb	VPDELIVDRIVGRRVHAPSGRVYHV KFNPPKVEGKDDVTG	
[Truncated_Name:10] 6HAM_A.pdb	VPDELIVDRIVGRRVHAPSGRVYHV KFNPPKVEGKDDVTG	
[Truncated_Name:11] 4K46_A.pdb	VADSVIVERMAGRRAHLASGR TYHNVNPPKVEGKDDVTG	
[Truncated_Name:12] 3GMT_A.pdb	VPFSEIIERMSGRRTHPASGR TYHV KFNPPKVEGKDDVTG	
[Truncated_Name:13] 4PZL_A.pdb	VADNLLIERITGRRIH PASGR TYHTKFNPPKVADKDDVTG	

```

      *      ^^^ ^  *** *   *** **   ^*****   *** **
121      .      .      .      .      .      .      .      .      160

161      .      .      .      .      .      .      .      .      200
[Truncated_Name:1] 1AKE_A.pdb      EELTTRKDDQEETVRKRLVEYHQM TAPLIGYYSKEAEAGN
[Truncated_Name:2] 6S36_A.pdb      EELTTRKDDQEETVRKRLVEYHQM TAPLIGYYSKEAEAGN
[Truncated_Name:3] 6RZE_A.pdb      EELTTRKDDQEETVRKRLVEYHQM TAPLIGYYSKEAEAGN
[Truncated_Name:4] 3HPR_A.pdb      EELTTRKDDQEETVRKRLVEYHQM TAPLIGYYSKEAEAGN
[Truncated_Name:5] 1E4V_A.pdb      EELTTRKDDQEETVRKRLVEYHQM TAPLIGYYSKEAEAGN
[Truncated_Name:6] 5EJE_A.pdb      EELTTRKDDQEETVRKRLVEYHQM TAPLIGYYSKEAEAGN
[Truncated_Name:7] 1E4Y_A.pdb      EELTTRKDDQEETVRKRLVEYHQM TAPLIGYYSKEAEAGN
[Truncated_Name:8] 3X2S_A.pdb      EELTTRKDDQEETVRKRLCEYHQM TAPLIGYYSKEAEAGN
[Truncated_Name:9] 6HAP_A.pdb      EELTTRKDDQEETVRKRLVEYHQM TAPLIGYYSKEAEAGN
[Truncated_Name:10] 6HAM_A.pdb      EELTTRKDDQEETVRKRLVEYHQM TAPLIGYYSKEAEAGN
[Truncated_Name:11] 4K46_A.pdb      EDLVIREDDKEETVLARLGVYHNQTAPLIAYYGKEAEAGN
[Truncated_Name:12] 3GMT_A.pdb      EPLVQRDDDKKEETVKKRLDVYEAQTKPLITYYGDWARRGA
[Truncated_Name:13] 4PZL_A.pdb      EPLITRTDDNEDTVKQRLSVYHAQTAKLIDFYRNFSSNTNT
      * *   * ** ^*   **   *   *   ** ^*
161      .      .      .      .      .      .      .      .      200

201      .      .      .      .      .      .      .      .      227
[Truncated_Name:1] 1AKE_A.pdb      T--KYAKVDGTKPVAEVRADLEKILG-
[Truncated_Name:2] 6S36_A.pdb      T--KYAKVDGTKPVAEVRADLEKILG-
[Truncated_Name:3] 6RZE_A.pdb      T--KYAKVDGTKPVAEVRADLEKILG-
[Truncated_Name:4] 3HPR_A.pdb      T--KYAKVDGTKPVAEVRADLEKILG-
[Truncated_Name:5] 1E4V_A.pdb      T--KYAKVDGTKPVAEVRADLEKILG-
[Truncated_Name:6] 5EJE_A.pdb      T--KYAKVDGTKPVAEVRADLEKILG-
[Truncated_Name:7] 1E4Y_A.pdb      T--KYAKVDGTKPVAEVRADLEKILG-
[Truncated_Name:8] 3X2S_A.pdb      T--KYAKVDGTKPVAEVRADLEKILG-
[Truncated_Name:9] 6HAP_A.pdb      T--KYAKVDGTKPVCEVRADLEKILG-
[Truncated_Name:10] 6HAM_A.pdb      T--KYAKVDGTKPVCEVRADLEKILG-
[Truncated_Name:11] 4K46_A.pdb      T--QYLKFDGTKAVAEVSAELEKALA-
[Truncated_Name:12] 3GMT_A.pdb      E-----NGLKAPA-----YRKISG-
[Truncated_Name:13] 4PZL_A.pdb      KIPKYIKINGDQAVEKVSQDIFDQLNK
      *
201      .      .      .      .      .      .      .      .      227

```

Call:

```
pdbaln(files = files, fit = TRUE, exefile = "msa")
```

Class:

```
pdbs, fasta
```



Alignment dimensions:

13 sequence rows; 227 position columns (204 non-gap, 23 gap)

+ attr: xyz, resno, b, chain, id, ali, resid, sse, call

**Use PCA to analyze the aligned and superposed structure**

```
# Perform PCA
pc.xray <- pca(pdbbs)
pc.xray
```

Call:

```
pca.pdbbs(pdbbs = pdbbs)
```

Class:

```
pca
```

Number of eigenvalues:


612

	Eigenvalue	Variance	Cumulative
PC 1	2824.299	84.993	84.993
PC 2	384.613	11.574	96.568
PC 3	62.077	1.868	98.436
PC 4	19.614	0.590	99.026
PC 5	14.644	0.441	99.467
PC 6	5.228	0.157	99.624

(Obtained from 13 conformers with 612 xyz input values).

+ attr: L, U, z, au, sdev, mean, call

```
plot(pc.xray)
```

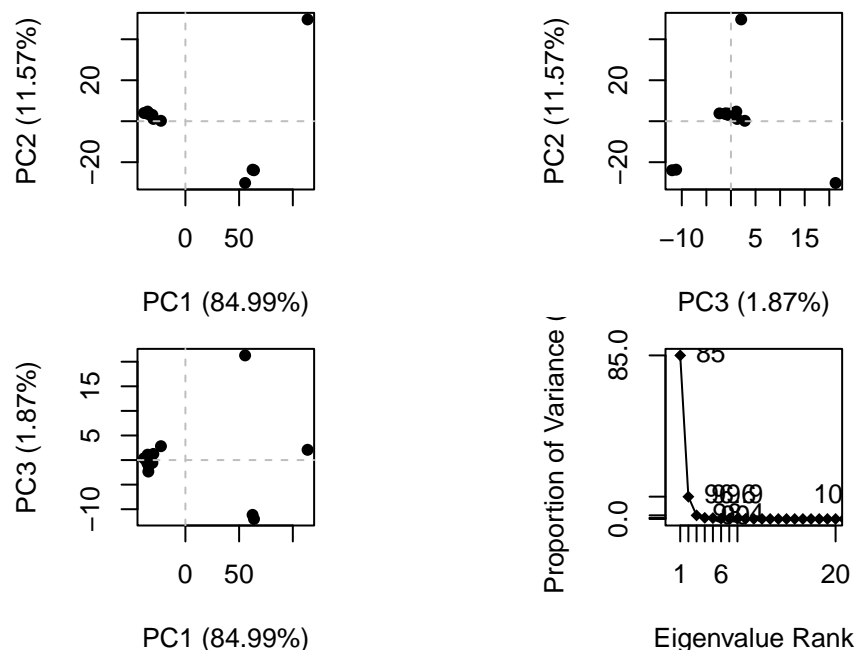

## Color the clusters

`rmsd()` will calculate all pairwise root-mean-square deviation values of the structural ensemble distance between different structures. This facilitates clustering analysis based on the pairwise structural deviation:

```
rmsd(pdbbs)
```

Warning in `rmsd(pdbbs)`: No indices provided, using the 204 non NA positions

	1AKE_A	6S36_A	6RZE_A	3HPR_A	1E4V_A	5EJE_A	1E4Y_A	3X2S_A	6HAP_A	6HAM_A
1AKE_A	0.000	7.097	7.200	0.311	0.251	0.427	0.941	0.621	1.355	0.851
6S36_A	7.097	0.000	0.434	7.184	7.077	7.111	6.785	7.195	6.346	6.859
6RZE_A	7.200	0.434	0.000	7.289	7.178	7.212	6.882	7.290	6.441	6.959
3HPR_A	0.311	7.184	7.289	0.000	0.382	0.507	1.002	0.643	1.426	0.909
1E4V_A	0.251	7.077	7.178	0.382	0.000	0.475	0.971	0.636	1.377	0.851
5EJE_A	0.427	7.111	7.212	0.507	0.475	0.000	1.093	0.702	1.526	0.989
1E4Y_A	0.941	6.785	6.882	1.002	0.971	1.093	0.000	0.961	1.067	0.748
3X2S_A	0.621	7.195	7.290	0.643	0.636	0.702	0.961	0.000	1.448	0.899
6HAP_A	1.355	6.346	6.441	1.426	1.377	1.526	1.067	1.448	0.000	1.162
6HAM_A	0.851	6.859	6.959	0.909	0.851	0.989	0.748	0.899	1.162	0.000

4K46_A	1.013	7.420	7.518	0.951	1.039	1.059	1.182	0.870	1.787	1.019
3GMT_A	10.863	6.336	6.308	10.950	10.852	10.882	10.632	10.902	10.207	10.646
4PZL_A	6.917	2.381	2.457	6.987	6.896	6.953	6.562	6.967	6.110	6.684
	4K46_A	3GMT_A	4PZL_A							
1AKE_A	1.013	10.863	6.917							
6S36_A	7.420	6.336	2.381							
6RZE_A	7.518	6.308	2.457							
3HPR_A	0.951	10.950	6.987							
1E4V_A	1.039	10.852	6.896							
5EJE_A	1.059	10.882	6.953							
1E4Y_A	1.182	10.632	6.562							
3X2S_A	0.870	10.902	6.967							
6HAP_A	1.787	10.207	6.110							
6HAM_A	1.019	10.646	6.684							
4K46_A	0.000	11.156	7.199							
3GMT_A	11.156	0.000	7.047							
4PZL_A	7.199	7.047	0.000							


```
# Calculate RMSD
rd <- rmsd(pdb)
```

Warning in rmsd(pdb): No indices provided, using the 204 non NA positions

```
# Structure-based clustering
hc.rd <- hclust(dist(rd))
grps.rd <- cutree(hc.rd, k=3)
grps.rd
```

1AKE_A	6S36_A	6RZE_A	3HPR_A	1E4V_A	5EJE_A	1E4Y_A	3X2S_A	6HAP_A	6HAM_A	4K46_A
1	2	2	1	1	1	1	1	1	1	1
3GMT_A	4PZL_A									
3	2									

```
#colored by groups from `cutree`
plot(pc.xray, 1:2, col="grey50", bg=grps.rd, pch=21, cex=1.1)
```

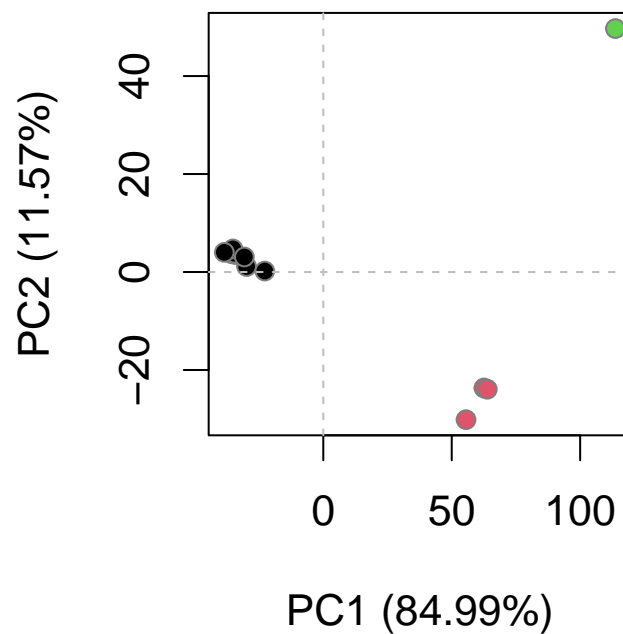


plot using ggplot

```
#Plotting results with ggplot2
library(ggplot2)
library(ggrepel)

# Vector containing PDB codes for figure axis
ids <- basename.pdb(pdb$ids)

df <- data.frame(PC1=pc.xray$z[,1],
                 PC2=pc.xray$z[,2],
                 col=as.factor(grps.rd),
                 ids=ids)

p <- ggplot(df) +
  aes(PC1, PC2, col=col, label=ids) +
  geom_point(size=2) +
  geom_text_repel(max.overlaps = 20) +
  theme(legend.position = "none")
p
```

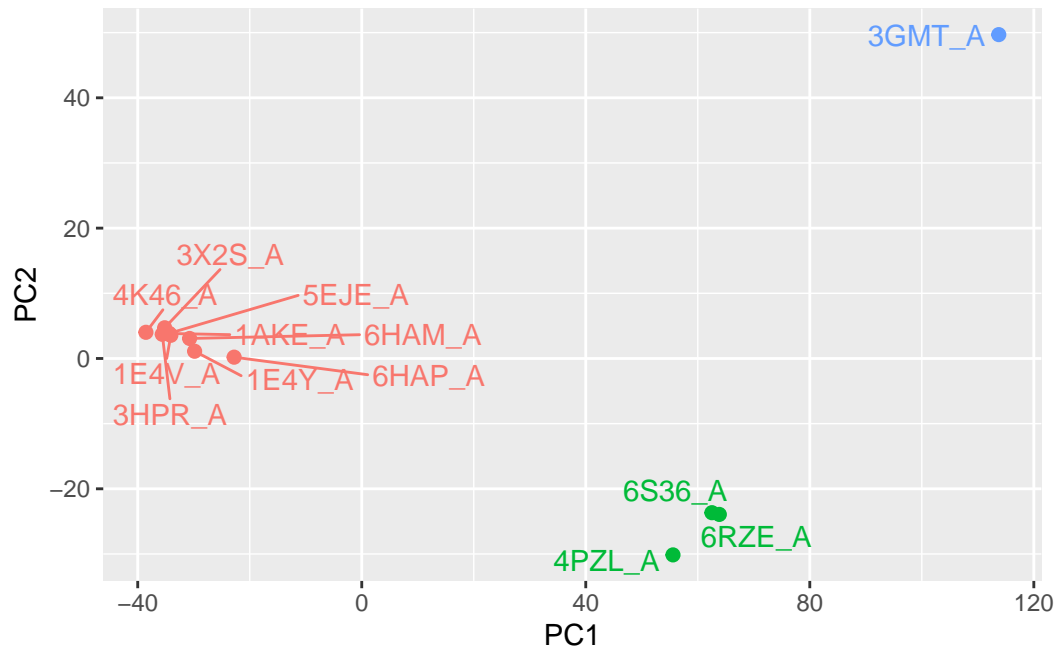

### Optional further visualization

we can make a wee movie (“trajectory”) of the major difference of ADK.

```
# Visualize first principal component
pc1 <- mktrj(pc.xray, pc=1, file="pc_1.pdb")
```