# The cortical column as a tuned receiver: a network mechanism for temporal-interference stimulation

Giulio Ruffini[1,2], Borja Mercadal[1], Ricardo Salvador[1], Alex Just[1], Raul de Palma Aristides[2], Francesca Castaldo[1,2], Nir Grossman[5], Santiago Canals[2,4], and Claudio Mirasso[2,3]

[1]Neuroelectrics, Barcelona, Spain
[2]BCOM, Barcelona, Spain
[3]IFISC (UIB-CSIC), Palma de Mallorca, Spain
[4]Instituto de Neurociencias (UMH-CSIC), Sant Joan d'Alacant, Spain
[5]Department of Brain Sciences and UK Dementia Research Institute, Imperial College London, London, United Kingdom

E-mail: giulio.ruffini@neuroelectrics.com

Working draft v0.15.0-draft21 2026-10-20

**ORCID iDs:** G. Ruffini 0000-0003-3084-0177; B. Mercadal 0000-0002-0941-6796; R. Salvador 0000-0003-1235-6533; A. Just 0009-0006-8794-7425; R. de Palma Aristides 0000-0002-0255-2293; F. Castaldo 0000-0002-4947-4552; N. Grossman 0000-0003-2002-9049; S. Canals 0000-0003-2175-8139; C. Mirasso 0000-0003-2980-7038.

## Supplementary Material

Appendices and supplementary figures accompanying the article. Supplement equations and figures are numbered S1, S2, ...; references to article equations are marked as main-text references.

## A Notation and units

Table 1 groups the symbols by their role in the calculation. JR and LaNMM voltages are in mV and rates in $s^{-1}$. QIF voltages and current-like drives are dimensionless model variables; QIF rates are physical rates, integrated in $ms^{-1}$ and converted to Hz where indicated. The uncoupled MPR derivation explicitly uses membrane-time units; the main population equations retain physical time and rate. All frequencies and time constants in a formula must use the same time unit. In the FEM comparison $\mathbf{n}^*$ is the direction maximizing the envelope at balanced currents, held fixed during the ratio sweep. A star otherwise marks a fixed point or, on a bifurcation parameter, its critical value. Subscripts E and I identify excitatory and inhibitory populations; they are not field or current variables.

**Table 1:** Notation and units. "Normalized" means dimensionless in the stated model scaling; output units depend on the named observable. Equation numbers prefixed by S identify supplement definitions; unprefixed numbers identify main-text equations. Lettered locations identify appendices.

| Symbol | Meaning | Units | Defined in |
|---|---|---|---|
| **Field and access** | | | |
| $E(t), E_0, \mathbf{E}_j$ | Applied field, its amplitude, and vector field of tone $j = 1, 2$ | V/m | Eq. (3) |
| $s(t), \varepsilon_j, \varepsilon$ | Local polarization; tone amplitudes; common amplitude ($\varepsilon_{\mathrm{TI}}$ and $\varepsilon_{\mathrm{tACS}}$ label the waveform) | mV | Eqs. (1), (4) |
| $I_j^{\mathrm{pair}}, \mathcal{P}_j$ | Peak electrode-pair current; signed local polarization per unit current | mA; mV/mA | §2.3 |
| $\mathbf{F}_j, \sigma_{\mathrm{cond}}$ | FEM field per pair current; tissue conductivity | (V/m)/mA; S/m | §3.3 |
| $\mathcal{A}(t), \overline{\mathcal{A}}$ | Nonnegative polarization envelope and its beat-period mean | mV | Eq. (8); Table 1 |
| $f_1, f_2, f_c$ | Tone frequencies and their center | Hz | Eq. (1) |
| $\omega_j, \omega_c$ | Angular frequencies $2\pi f_j, 2\pi f_c$ | rad/s | Eqs. (1), (4) |
| $\Delta f, \Omega$ | Beat frequency $f_2 - f_1$; $\Omega = 2\pi\Delta f$ | Hz; rad/s | Eq. (1) |
| $m$ | AM-surrogate modulation depth | dimensionless | Eq. (20) |
| $\Lambda[E], \lambda_0, \lambda_f$ | Field-induced polarization; static and frequency-dependent coupling | mV; mV/(V/m) | Eqs. (S1), (4) |
| $\boldsymbol{\lambda}_0^k, \boldsymbol{\lambda}_f^k$ | Coupling vectors for compartment $k$ | mV/(V/m) | Eq. (4) |
| $H, H_k, H_m$ | Dominant-compartment access transfer, indexed transfer, and point-membrane transfer | dimensionless | Fig. 2; §2.2, §2.7 |
| $\tau_m, \tau$ | Membrane time; access-filter time in kHz controls | ms | Eqs. (17), (15) |
| $f_{\mathrm{char}}$ | Characteristic frequency $1/(2\pi\tau)$ | Hz | Table 2 |
| $\ell(\omega), \ell_0$ | Frequency-dependent and static cable space constants | $\mu$m | App. B.1, Eq. (S5) |
| $\mathbf{V}, \mathsf{C}_m, \mathsf{G}_m$ | Compartment voltages, capacitance and conductance matrices | V; F; S | App. B.1 |
| $\mathbf{I}^0, \mathbf{p}_E$ | Endogenous currents; field-to-current vector | A; A/(V/m) | App. B.1 |
| $\mathbf{x}, \phi_j, \mathbf{n}$ | Position, field potential, unit cell orientation | m; V; unit vector | §2.3, §2.5 |
| $\mathcal{I}$ | Nonnegative mean-square local polarization before detector gain | $mV^2$ | §2.5 |
| **Detection** | | | |
| $\sigma, \sigma', \sigma''$ | JR/LaNMM rate curve, slope and curvature | $s^{-1}$; $s^{-1}mV^{-1}$; $s^{-1}mV^{-2}$ | Eq. (2) |
| $e_0, v_0, \rho$ | Half the rate ceiling, inflection voltage, inverse voltage scale | $s^{-1}$; mV; $mV^{-1}$ | Eq. (2) |
| PEIX | Signed sigmoid saturation index | dimensionless | Eq. (16) |
| $Y_\Omega, Y_{\mathrm{DC}}$ | Complex beat amplitude and signed steady source before recurrence | detector-output units | Eqs. (6), (5) |

*Continued on next page*

*Table 1 continued*

| Symbol | Meaning | Units | Defined in |
|---|---|---|---|
| $\chi^{(2)}$ | Dynamic coefficient mapping a polarization product to a rate beat | $s^{-1}mV^{-2}$ | §2.2 |
| $g, T, Y_{\mathrm{LF}}$ | Memoryless response, envelope transduction, carrier-averaged output | specified output units | Eq. (11) |
| $c_1, c_2, c_4$ | Linear, quadratic and quartic envelope coefficients | output/$(mV)^{1,2,4}$ | §2.4 |
| $\mathcal{H}_{\mathrm{det}}, \mathcal{H}_{\mathrm{meas}}$ | Second/fundamental harmonic magnitude ratios before and after the network | dimensionless | Eq. (12) |
| $\mathcal{M}[y]$ | Peak-to-peak excursion of the quantity $y$ | units of $y$ | Eq. (9) |
| $F(Q), F', F''$ | MPR steady-rate curve and drive derivatives | normalized | Eq. (18) |
| $Q, q$ | Mean total drive $\bar{\eta} + I$; single-cell drive $\eta + I$ | normalized | Eq. (18); App. B.3 |
| $I_{\mathrm{ac}}$ | Single-tone current amplitude | normalized | §2.9 |
| $\kappa_{\mathrm{DC}}, \kappa_V$ | Mean-rate mixing per squared current or squared voltage excursion | normalized | Eqs. (S6), (S8) |
| $d, \nu, \omega_z$ | MPR relaxation, ringing and zero-crossing angular frequencies | membrane-time units | App. B.2 |
| $\mathsf{J}, \mathbf{h}, H_v$ | Reduced MPR Jacobian, unit-current response and voltage transfer | normalized | §2.9; App. B.3 |
| $\mathbf{b}_2, \mathsf{I}_2$ | Quadratic DC source per $I_{\mathrm{ac}}^2$; identity matrix | normalized | App. B.3 |
| $\mathcal{R}_{\mathrm{det}}, \mathcal{R}_{\mathrm{lin}}$ | TI/direct-drive source ratio; linear TI/tACS output ratio | dimensionless | App. D; §4.7 |
| $\delta, \zeta$ | Threshold offset; sigmoid rate divided by $2e_0$ | mV; dimensionless | §2.4; App. D |
| $u, \xi, \beta, k_{\mathrm{ell}}^2$ | Reduced amplitude $\rho\varepsilon$, offset $\rho(v^* - v_0)$, threshold ratio, elliptic parameter | dimensionless | App. D |
| $L, \psi, \mathsf{K}, \mathsf{E}$ | Unit logistic, normalized waveform, complete elliptic integrals | dimensionless | App. D |
| **Network** | | | |
| $r_X, v_X$ | Population firing rate and mean potential, indexed by $X$ | $s^{-1}$; mV in JR/LaNMM, normalized in QIF | §2.1 |
| $t, r, f$ (MPR derivation) | Time, population rate and single-cell rate in the stated membrane-time convention | normalized locally | App. B.2 |
| $r_{\mathrm{syn}}, r_E^{\mathrm{syn}}, r_I^{\mathrm{syn}}$ | Synaptically filtered firing rates | same rate units as input | Eqs. (19), (22) |
| $u_{\mathrm{PSP}}, u_{X\leftarrow Y}, \hat{L}$ | Postsynaptic potential and inverse synaptic operator | mV; maps mV to $s^{-1}$ | Eq. (S1) |
| $A, B, a, b$ | JR excitatory/inhibitory PSP gains and inverse synaptic times | mV; $s^{-1}$ | §2.1; App. B |
| $h_e, h_i$ | JR excitatory and inhibitory synaptic impulse responses | mV | Fig. 2 |
| $C, C_{1\ldots4}, C_{X\leftarrow Y}$ | JR connectivity scale and pathway weights | dimensionless | §2.1; App. B |
| $y_0, y_1, y_2, v$ | JR PSPs; voltage readout $v = y_1 - y_2$ | mV | App. B |
| $p, p_H, C^*$ | JR external rate and its upper Hopf value; critical connectivity | $s^{-1}$; dimensionless for $C^*$ | §3.4, §4.5 |
| $\eta_j, \bar{\eta}, \Delta$ | QIF excitabilities, Lorentzian center and half-width | normalized | Eq. (17) |
| $I, I_E, I_j, A_f, \lambda_I$ | QIF input, E-population input, tone amplitudes, forcing amplitude and field coupling | normalized; $\lambda_I$ in $(V/m)^{-1}$ | Eqs. (17), (22) |
| $\mathcal{U}_j$ | Total synaptic and field drive to QIF neuron $j$ | normalized | Fig. 2 |
| $J, J^*, w_{XY}$ | QIF coupling, critical coupling and relative pathway weights | dimensionless | Eq. (22) |

*Continued on next page*

*Table 1 continued*

| Symbol | Meaning | Units | Defined in |
|---|---|---|---|
| $\tau_E, \tau_I, \tau_a, \tau_g, \tau_s$ | E/I membrane and excitatory/inhibitory/generic synaptic times | ms | Eqs. (19), (22) |
| $\hat{K}_a, \hat{K}_g, H_s$ | QIF synaptic rate filters; JR rate-to-voltage transfer | dimensionless; mV s for $H_s$ | §3.5, §2.6 |
| $\mu_\pm, \gamma, \omega_0, f_0$ | Modal eigenvalues, damping, angular and ordinary modal frequency | $s^{-1}$ ($ms^{-1}$ where stated); Hz for $f_0$ | Eq. (13) |
| $\tau_{\mathrm{rel}}, \tau_{\mathrm{rev}}, \mathcal{Q}$ | Population relaxation time, $1/\gamma$, and mode quality factor | time; dimensionless for $\mathcal{Q}$ | §2.1, §2.6, §5 |
| $D, G, R_\Omega$ | Beat-source coefficient, recurrent transfer, complex observed beat response | input/output-dependent | Eq. (14) |
| $V_j, V_{\mathrm{peak}}, N$ | Single-QIF voltage, spike cutoff and neurons per population | normalized; count | §3.6 |
| $\delta\eta_E, \delta\eta_E^*$ | Rectified E-drive shift and its Hopf threshold | normalized | §3.6, §4.9 |
| $P_1, P_2, r_P, \varphi_X$ | Deep/superficial pyramidal populations; JR and LaNMM pyramidal rates | labels; $s^{-1}$ for rates | §4.6; §E.1 |
| $z, \alpha, \mathcal{F}, \varepsilon_{\mathrm{SL}}$ | Stuart–Landau mode, growth rate, forcing and forcing amplitude | normalized mode; $s^{-1}$ for the others | App. C |
| **Measurement** | | | |
| $L_{\cos}, L_{\sin}, A_\Omega$ | Signed lock-in quadratures and nonnegative amplitude | measured voltage or rate units | Eq. (21) |
| $A_{\mathrm{open}}$ | Magnitude of the open-loop rate beat | $s^{-1}$ | §4.5 |
| $w_k, t_k, v_k, \bar{v}$ | Hann weights, sample times, voltage samples and weighted mean | 1; s; mV; mV | Eq. (21) |
| $A_{\mathrm{test}}, \theta_0$ | Amplitude and phase of the lock-in test tone | readout units; rad | §3.2 |
| $\Delta t, N_{\mathrm{grid}}$ | Integration step and number of parameter combinations | s or ms; count | §3.4 |
| $A_\Omega/\langle r_E \rangle$ | Beat-locked population modulation depth | dimensionless | §3.6 |
| PPC | Pairwise phase consistency of single-neuron spike phases | dimensionless | §3.6 |
| $f_{\mathrm{out}}, S(f_c)$ | Dominant output frequency; LaNMM mean off-alpha lock-in | Hz; mV | App. F; §E.1 |

## B Simulated models: equations and parameters

For a synapse from population $Y$ to $X$, the resulting first-generation neural mass model (NMM1) equations are [1]

$$\hat{L}_{X\leftarrow Y}[u_{X\leftarrow Y}] = C_{X\leftarrow Y}\, r_Y, \qquad v_X = \Lambda[E] + \sum_{Y:\, C_{X\leftarrow Y}\neq 0} u_{X\leftarrow Y}, \qquad r_X = \sigma(v_X). \tag{S1}$$

The operator $\hat{L}$ is the inverse synaptic filter, $u_{X\leftarrow Y}$ its postsynaptic potential, $C_{X\leftarrow Y}$ the connectivity, and $\Lambda[E]$ the direct polarization caused by the applied field $E$ (V/m). The rates $r_X, r_Y$ are in $\mathrm{s}^{-1}$, the potentials $v_X, u_{X\leftarrow Y}$ in mV, and the pathway weights $C_{X\leftarrow Y}$ dimensionless. This field contribution enters alongside the synaptic potentials, without first passing through a synapse.

Synaptic operators convert rates into postsynaptic potentials, which sum with the direct field polarization before the rate curve is applied.

### Jansen–Rit column

Writing $y_0$ for the excitatory PSP driving the interneurons, $y_1$ and $y_2$ for the excitatory and inhibitory PSPs onto the pyramidal population, external input $p$, and the applied-field perturbation $s(t)$ (§2.2) entering the pyramidal sigmoid,

$$\ddot{y}_0 = Aa\,\sigma\big(y_1 - y_2 + s(t)\big) - 2a\dot{y}_0 - a^2 y_0, \tag{S2}$$

$$\ddot{y}_1 = Aa\,[\,p + C_2\,\sigma(C_1 y_0)\,] - 2a\dot{y}_1 - a^2 y_1, \tag{S3}$$

$$\ddot{y}_2 = Bb\,C_4\,\sigma(C_3 y_0) - 2b\dot{y}_2 - b^2 y_2, \tag{S4}$$

The pyramidal output passes through $h_e$ to give $y_0$; the excitatory and inhibitory interneurons receive $C_1 y_0$ and $C_3 y_0$, and return through weights $C_2$ and $C_4$. The excitatory and inhibitory impulse responses are $h_e(t) = Aa\,te^{-at}$ and $h_i(t) = Bb\,te^{-bt}$ for $t \geq 0$. The equations are integrated as six first-order ODEs; the LFP proxy is $v = y_1 - y_2$ [2]. Table 2 gives the reference column parameters. The synaptic rates correspond to excitatory and inhibitory decay times of 10 and 20 ms, while $A$ and $B$ set the postsynaptic-potential gains. The sigmoid parameters fix its voltage scale and rate ceiling; the sweeps vary the external rate $p$ or connectivity $C$ to change the operating state, as specified in Methods.

**Table 2:** Jansen–Rit parameters [2].

| Symbol | Meaning | Value |
|---|---|---|
| $A$, $B$ | excit./inhib. PSP gain | 3.25, 22 mV |
| $a$, $b$ | synaptic rates | 100, 50 $\mathrm{s}^{-1}$ |
| $v_0$, $e_0$, $\rho$ | sigmoid inflection, max rate/2, slope | 6 mV, 2.5 $\mathrm{s}^{-1}$, 0.56 $\mathrm{mV}^{-1}$ |
| $C$ | global connectivity | 135 |
| $C_1, C_2, C_3, C_4$ | couplings | $C$, $0.8C$, $0.25C$, $0.25C$ |
| $p$ | external input (bifurcation knob) | 0–400 Hz |

The alpha limit cycle lies between Hopf points near $p = 90$ and 316 $\mathrm{s}^{-1}$. It coexists with a lower stable fixed point up to the saddle-node on an invariant circle (SNIC, $p \approx 114$), then with a large-amplitude cycle up to its saddle-node near $p = 137$. The SNIC terminates the large-amplitude branch, not the alpha cycle.

### B.1 Compartment access and the passive-cable estimate

The passive compartment equation $\mathsf{C}_m\dot{\mathbf{V}} + \mathsf{G}_m\mathbf{V} = \mathbf{I}^0 - \mathbf{p}_E E$ [3] gives the voltage perturbation $\delta\mathbf{V}(\omega) = -(\mathsf{G}_m + i\omega\mathsf{C}_m)^{-1}\mathbf{p}_E E(\omega)$. In SI units, $\mathbf{V}$ contains the compartment membrane potentials

(V), $\mathsf{C}_m$ and $\mathsf{G}_m$ are the capacitance (F) and conductance (S) matrices, $\mathbf{I}^0$ is the endogenous current (A), and $\mathbf{p}_E$ is the field-to-current coupling (A per V/m).

Geometry can also alter the relevant response mode. For a passive cable, the magnitude of the frequency-dependent space constant is

$$\ell(\omega) = \ell_0(1 + \omega^2\tau_m^2)^{-1/4}, \tag{S5}$$

where $\ell_0$ is its static value. At 1 kHz and $\tau_m = 16$ ms, this length is about one tenth of its static value, so compartments that are strongly coupled at low frequency can respond differently to the carrier. A somatic charging time alone therefore does not determine every extracellular-field response mode. For a sufficiently long passive cable with a sealed end in a uniform axial field, the end polarization is proportional to this space constant. Each carrier then acquires the factor $(1 + \omega^2\tau_m^2)^{-1/4}$, so the quadratic beat is attenuated by $(1 + \omega_c^2\tau_m^2)^{-1/2}$, about $10^{-2}$ at 1 kHz and $10^{-3}$ at 10 kHz for 16 ms. These differ from the point-membrane estimates; soma loading and finite cable length further change the transfer. Thus cable geometry can improve carrier access without changing the somatic membrane time.

### B.2 Static and dynamic MPR mixing coefficients

In this subsection and the derivation that follows, time is measured in units of $\tau_m$, rate in units of $1/\tau_m$, and $\omega$ denotes angular frequency in membrane-time units. Thus $r^* = F(Q)$ and physical angular frequency is $\omega/\tau_m$. Consider an uncoupled MPR population at drive $Q$, with a weak current $I_{\mathrm{ac}} \cos \omega t$. To second order in $I_{\mathrm{ac}}$, the carrier-averaged shift of $r$ is $I_{\mathrm{ac}}^2 \kappa_{\mathrm{DC}}(Q, \omega)$, where

$$\kappa_{\mathrm{DC}}(Q, \omega) = \frac{r^* \left[\omega^2 + 3d^2 - \nu^2\right]}{(d^2 + \nu^2)\{[d^2 + \nu^2 - \omega^2]^2 + 4d^2\omega^2\}}, \qquad r^* = F(Q), \quad d = \frac{\Delta}{\pi r^*}, \quad \nu = 2\pi r^*. \tag{S6}$$

The physical rate shift is $I_{\mathrm{ac}}^2 \kappa_{\mathrm{DC}}/\tau_m$. The fixed-point eigenvalues in normalized time are $-d \pm i\nu$: $d$ is the relaxation rate and $\nu$ the ringing angular frequency, both in membrane-time units; their physical values are $d/\tau_m$ and $\nu/\tau_m$. Expansion about this fixed point gives the limits

$$\kappa_{\mathrm{DC}}(Q, \omega) \xrightarrow[\omega \to 0]{} \tfrac{1}{4} F''(Q), \qquad \kappa_{\mathrm{DC}}(Q, \omega) \xrightarrow[\omega \gg d, \nu]{} \frac{F'(Q)}{2\omega^2}. \tag{S7}$$

In the first limit the population tracks its static curve, whose curvature rectifies the input. In the second, the voltage excursion is approximately $I_{\mathrm{ac}}/\omega$; its square supplies a slow drive that the population reads through $F'$. Above the inflection of $F$, these limits have opposite signs and the coefficient vanishes at $\omega_z = \sqrt{\nu^2 - 3d^2}$. The 300 Hz and kHz carriers are on the fast side for the parameters of the pyramidal–interneuron network gamma (PING) circuit studied here. That classification is parameter-dependent: a shorter effective membrane time can bring the same physical carrier into the adiabatic regime.

Membrane access is already included in this calculation. The linear voltage response is $H_v(\omega) = (i\omega + d)/[(i\omega + d)^2 + \nu^2]$. Dividing by its squared magnitude gives the mixing coefficient at fixed voltage excursion,

$$\kappa_V(Q, \omega) = \frac{\kappa_{\mathrm{DC}}(Q, \omega)}{|H_v(\omega)|^2} = \frac{F'(Q)}{2} \, \frac{\omega^2 + 3d^2 - \nu^2}{\omega^2 + d^2}. \tag{S8}$$

This coefficient tends to $F'/2$ at high frequency. The $1/\omega^2$ suppression at fixed current comes from $|H_v|^2$, the membrane filtering already represented by main-text Eq. (4); it is not an additional detector filter. A static curve placed after the same membrane has the same leading carrier roll-off, although its mixing coefficient and sign can differ. The steady-state curvature is $F'' = 4r^*(3d^2 - \nu^2)/(d^2 + \nu^2)^3$, so the inflection occurs at $\nu^2 = 3d^2$.

For nearby fast tones, the quadratic terms in main-text Eq. (17) contribute at different orders: $v^2$ at $\omega^{-2}$, $rv$ at $\omega^{-3}$, and $r^2$ at $\omega^{-4}$. Table 3 compares the carrier and beat routes to the firing rate for a static curve and a dynamic population with the same membrane access.

| stage | static curve, same membrane | dynamic population |
|---|---|---|
| point-membrane current → voltage | $\omega^{-1}$ | $\omega^{-1}$ |
| voltage → rate, carrier | 1 | $\omega^{-1}$ |
| current → rate, carrier | $\omega^{-1}$ | $\omega^{-2}$ |
| two tones → beat in the rate | $(\omega_1\omega_2)^{-1}$ | $(\omega_1\omega_2)^{-1}\times$ const. |

**Table 3:** Fast-carrier scaling with matched point-membrane access, at fixed beat frequency and a nonzero leading mixing coefficient. The dynamic population integrates the carrier once more between voltage and rate; the beat is formed before that step. Prefactors depend on the operating point and beat-frequency susceptibility.

The first row gives the shared membrane factor $1/\omega$. The second converts voltage to rate: a static curve adds its slope, whereas the dynamic rate equation integrates the carrier once more. Combining these stages gives the third-row carrier responses, $\omega^{-1}$ and $\omega^{-2}$, respectively.

The beat in the last row is formed before that additional rate integration: static curvature and dynamic $v^2$ each mix the attenuated voltage, retaining $(\omega_1\omega_2)^{-1}$. Equal exponents do not imply equal amplitudes; mixing and the susceptibility at fixed $\Omega$ determine the prefactors. For the uncoupled carrier-averaged response, $\kappa_V$ in Eq. (S8) tends to $F'/2$, but is not the full finite-$\Omega$ network prefactor. Thus the dynamic rate attenuates the carrier twice while forming the beat between those stages.

### B.3 Single-cell rate and dynamic MPR mixing

The MPR steady-rate curve $F$ of §2.9, main-text Eq. (18), averages the single-neuron rate $f(q) = \sqrt{q}/\pi$ for $q > 0$, and $f(q) = 0$ otherwise, over the excitability distribution. Here $\eta$ is the neuron's excitability and $q = \eta + I$ its constant total drive.

The coefficient in Eq. (S6) follows by expanding about the fixed point $(r^*, v^*)$, with $v^* = -d/2$, in membrane-time units. The Jacobian and unit-current phasor are

$$\mathsf{J} = \begin{pmatrix} 2v^* & 2r^* \\ -2\pi^2 r^* & 2v^* \end{pmatrix}, \qquad \mathbf{h} = (i\omega \mathsf{I}_2 - \mathsf{J})^{-1} \begin{pmatrix} 0 \\ 1 \end{pmatrix},$$

where $\mathsf{I}_2$ is the identity matrix and the first-order response is $I_{\mathrm{ac}}\,\mathrm{Re}(\mathbf{h}e^{i\omega t})$. Writing $h_r, h_v$ for its rate and voltage components, with an overbar denoting complex conjugation and Re the real part, the carrier-averaged quadratic source per $I_{\mathrm{ac}}^2$ is

$$\mathbf{b}_2 = \begin{pmatrix} \mathrm{Re}(h_r \overline{h_v}) \\ (|h_v|^2 - \pi^2 |h_r|^2)/2 \end{pmatrix}.$$

The mean second-order correction is $-I_{\mathrm{ac}}^2 \mathsf{J}^{-1}\mathbf{b}_2$; its rate component gives Eq. (S6).

### B.4 Stability of the driven PING endpoint

We check the stability of the driven $J$-curve endpoint by integrating the full variational matrix along its trajectory. At carrier 300 Hz and beat 50.5 Hz, the AM input repeats every 2 s. After 8 s of settling, we compute the perturbation multipliers over that period and repeat over the next period. Moduli below one indicate decay of perturbations to the periodic response. Two-tone controls at $J = 16.5663$ and 16.5901, both with a 50.5 Hz beat, use 5 s settling, direct perturbation decay, and an 8 s finite-time Lyapunov estimate.

Although a DC-only averaged calculation predicts an unstable endpoint, the full periodically forced solution remains attracting: its largest perturbation multiplier is 0.034 over the 2 s forcing period. Increasing settling from 0.6 to 3 s changes the endpoint lock-in by 0.8%. With genuine

two tones, the 50.5 Hz endpoint control also attracts nearby trajectories: perturbations decay at $-0.0014$ ms$^{-1}$, and the 8 s Lyapunov estimate is $-0.00079$ ms$^{-1}$. These controls test a nonlinear driven response, not linear gain about the DC-shifted equilibrium.

### B.5 Finite-network numerical checks

At $A_f = 10$ and $\bar{\eta} = 0.85$, the finite-network beat depth is 0.093 for the published cutoff, versus the mean-field value 0.128. Raising the spike cutoff from $V_{\text{peak}} = 100$ to 200 and 400 gives depths 0.127 and 0.139, while the mean-rate increase stays at 2.8–2.9%. At the original cutoff, doubling the population gives 0.083 and halving the time step gives 0.093. The response is therefore sensitive to the finite spike cutoff. Halving the step at cutoffs 200 and 400 gives depths 0.121 and 0.141, respectively: cutoff dependence persists, and quantitative convergence remains unestablished at this population size. At the plotted cutoff, the pooled spike-phase vector strength is 0.046; median per-neuron phase consistency remains negative in field-off and field-on windows at all three cutoffs. In the $A_f = 35$ convergence checks, halving the time step changes the lock-in and the pooled vector strength by under 1%; doubling the spike-detection threshold changes the lock-in by about 1% and the mean rate by 2%, but the pooled vector strength at $\bar{\eta} = 0.85$ by about 45%, so phase concentration, unlike rate modulation, is sensitive to how spike times are defined.

### B.6 JR coupling-sweep settings

The coupling sweeps of Figs. 9 and S11, and the transcranial alternating-current stimulation (tACS) control of Fig. S3, use the single JR column with the field-free operating point $v^*$ pinned: for each global connectivity $C$ we solve the field-free fixed-point relation analytically for the external drive $p(C)$ that holds $v^*$ (hence $\sigma''(v^*)$) fixed, vary $C$ toward the alpha Hopf, and read $\gamma, \omega_0$ from the $6 \times 6$ Jacobian. The field is the AM surrogate of main-text Eq. (20) for Fig. 9, genuine two tones for the timing comparison (Fig. S11), or a direct in-band sinusoid $s(t) = \varepsilon \cos \Omega t$ ($\varepsilon = 0.1$ mV) for the tACS control (Fig. S3), each read out by the lock-in of $v$ at $\Delta f$, except in the timing comparison, which reads the modulation and mean of the same pyramidal rate $r_P = \sigma(v + s)$. That comparison uses 18 s settling and a 20 s window for each waveform. The Figure 9–Figure S3 response-ratio comparison uses $v^* = 8.30$ mV, TI surrogate amplitude 0.3 mV with $m = 1$ and $f_c = 100$ Hz, and tACS amplitude 0.1 mV, driven at each field-free modal frequency. The original TI amplitudes are interpolated logarithmically in $C$ onto the tACS grid. For the waveform comparison, both the surrogate and two-tone TI are rerun on that grid with 12 s settling and a 6 s window. Pinning fixes the background curvature; it does not cancel the stimulation-induced mean shift. Additional controls at $C = 110$, 133.9091, and 136.3 use a tACS amplitude of 0.0143039 mV, matched to the leading TI beat source. They record mean voltage, mean rate, and lock-in with 12 s settling and a 6 s window, repeated with 60 s settling and a 20 s window; the latter settings also test genuine two tones.

## C The cubic Hopf normal form lacks a quadratic mixer

The Stuart–Landau equation [4]

$$\dot{z} = (\alpha + i\omega_0)z - |z|^2 z + \mathcal{F}(t), \qquad \gamma = -\alpha > 0, \tag{S9}$$

uses seconds for time and a normalized complex mode $z$, with the cubic coefficient set to 1 $\mathrm{s}^{-1}$. Its linear growth rate is $\alpha = -\gamma$; $\gamma$ has units $\mathrm{s}^{-1}$. The mode has damping $\gamma$ and natural angular frequency $\omega_0$, driven by the applied input $\mathcal{F}$ (normalized mode units per second). For a weak input $\mathcal{F} = \varepsilon_{\mathrm{SL}}\psi_{\mathrm{SL}}(t)$ with dimensionless waveform $\psi_{\mathrm{SL}}$ on the stable side, the perturbative response has the form $z = \varepsilon_{\mathrm{SL}} z_1 + \varepsilon_{\mathrm{SL}}^3 z_3 + \cdots$. There is no second-order source: the first-order response contains only the applied frequencies, and the cubic first contributes at order $\varepsilon_{\mathrm{SL}}^3$. Thus the normal form has a resonant linear susceptibility but lacks the quadratic difference-frequency generation of main-text Eq. (6). This statement concerns the weak-input expansion; it is not an exclusion of every higher-order intermodulation or strong-drive response.

In the numerical control ($\alpha = -0.5$ $\mathrm{s}^{-1}$, $f_0 = 10$ Hz, $f_c = 100$ Hz, $\varepsilon_{\mathrm{SL}} = 0.5$ $\mathrm{s}^{-1}$), a square-law detector gives a beat-frequency lock-in amplitude of $2.5 \times 10^{-1}$, while $\mathrm{Re}\, z$ gives approximately $2 \times 10^{-8}$, at the numerical floor. Driving the same mode directly in band recovers the forced $1/\gamma$ growth. The control separates resonant amplification from the nonlinear source required to drive it at the beat.

## D Efficiency of a memoryless transfer against a direct in-band drive

For the logistic family of memoryless transfers, compare balanced TI tones of polarization amplitude $\varepsilon$ each with a direct in-band drive of amplitude $2\varepsilon$, matching peak polarization. Their leading drive amplitudes are $|\sigma''|\varepsilon^2/2$ and $2\sigma'\varepsilon$, so $\mathcal{R}_{\mathrm{det}} \simeq |\sigma''|\varepsilon/(4\sigma')$. The weak-input formula concerns the logistic family. The step-mixture argument below extends the exact carrier-averaged bound to bounded nondecreasing memoryless transfers, with the same operating point, matched peak polarization, and open-loop readout. It does not cover the dynamic detector of §2.9.

Writing $\zeta = \sigma/(2e_0) \in (0,1)$ gives $\sigma' = 2e_0\rho\zeta(1-\zeta)$ and $\sigma'' = 2e_0\rho^2\zeta(1-\zeta)(1-2\zeta)$. Since $|\mathrm{PEIX}| = 1 - 4\zeta(1-\zeta) = (1-2\zeta)^2$, the leading ratio satisfies

$$\mathcal{R}_{\mathrm{det}} \simeq \frac{\rho\,\varepsilon}{4}\sqrt{|\mathrm{PEIX}|} \;\le\; \frac{\rho\,\varepsilon}{4}. \tag{S10}$$

It vanishes at the inflection, where the quadratic coefficient is zero, and approaches its bound in the saturated tails. This maximizes a ratio rather than an absolute response: both drives vanish in those tails. For the JR slope $\rho = 0.56\ \mathrm{mV}^{-1}$, the perturbative bound is 1.4% at $\varepsilon = 0.1$ mV and 0.28% at $\varepsilon = 0.02$ mV.

Optimizing over the sigmoid slope gives a different limit from the weak-input bound. The logistic transfer depends on voltage only through $\rho(v - v_0)$, so writing

$$u = \rho\,\varepsilon, \qquad \xi = \rho\,(v^* - v_0), \tag{S11}$$

we have $\sigma(v^* + \varepsilon\psi(t)) = 2e_0\,L(\xi + u\,\psi(t))$ for any normalized waveform $\psi$, with $L(\xi) = (1+e^{-\xi})^{-1}$. Every Fourier amplitude, and hence their ratio, is a function of $(u,\xi)$ alone; the factor $2e_0$ cancels. Maximizing over $v^*$ and $\rho$ at fixed $\varepsilon$ is therefore the same as maximizing over $(u,\xi)$, and the family supremum is independent of field strength. Evaluating the exact cycle response rather than its quadratic truncation and optimizing $\xi$ at each $u$, the ratio rises monotonically over the range explored and converges to the hard-threshold limit

$$\sup_{\rho,\,v^*} \mathcal{R}_{\mathrm{det}} \approx 0.3479, \tag{S12}$$

approached as $\rho \to \infty$ at a threshold offset $\delta$ (the distance from the operating point to the inflection) with $\delta/2\varepsilon = 0.523$. There is no finite optimal transfer width: narrower is always better, and reaching 95% of the ceiling requires $u \gtrsim 6$, that is $1/\rho \lesssim \varepsilon/6$.

The limiting detector switches across its full range. At the optimum, and at the illustrative fast-access polarization $\varepsilon \simeq 0.1$ mV of §5, its open-loop beat drive exceeds the physiological-slope sigmoid's by some three orders of magnitude for the same $e_0$ and waveform, because the field excursion is about twice the threshold offset and the transfer switches across its full range instead of responding linearly. The disparity grows as the field weakens, the smooth sigmoid's response falling as $\varepsilon^2$ while a threshold repositioned with the field keeps its excursion.

The required transfer width is small: at $\varepsilon = 0.1$ mV the ceiling is approached only for $1/\rho \lesssim 17\ \mu$V; at $\varepsilon = 0.02$ mV the corresponding width is about 3 $\mu$V. Both follow from $1/\rho \lesssim \varepsilon/6$, with the threshold offset held to the same order as the applied polarization. A population sigmoid averages the spread of thresholds and noise; the JR voltage scale is $1/\rho \approx 1.8$ mV [2]. A microvolt width lies far below that and reads as an idealized microscopic threshold or rectifier rather than as a neural-mass sigmoid; real thresholds are themselves noisy and state-dependent, so it is not a measured single-cell property either. The regime in which the family approaches its ceiling is thus one in which the "population sigmoid" has ceased to describe a population.

The limit is a step detector, not an envelope follower. For a unit step at offset $\delta$ the carrier-averaged transduction is $\pi^{-1}\arccos(\delta/\mathcal{A})$ for $\mathcal{A} > \delta$ and zero below; with $\beta = \delta/2\varepsilon$ its tACS fundamental is $(2/\pi)\sqrt{1-\beta^2}$ and its TI coefficient reduces by parts to $\mathcal{R}_{\mathrm{det}} = 2\beta\,[\mathsf{K}(k_{\mathrm{ell}}^2) - \mathsf{E}(k_{\mathrm{ell}}^2)]/(\pi\sqrt{1-\beta^2})$

with elliptic parameter $k_{\mathrm{ell}}^2 = 1 - \beta^2$ and $\mathsf{K}, \mathsf{E}$ the complete elliptic integrals, giving 0.3479 at $\beta = 0.523$ by direct quadrature and by the elliptic form alike (`threshold_bound_check.py`). At that optimum the step's second-to-first harmonic magnitude ratio is 0.151, not the 1/5 of a linear envelope follower. A bounded nondecreasing transfer is, up to a constant, a positive mixture of shifted steps. Both signed Fourier coefficients are linear in the transfer, and each step's direct-drive coefficient is nonnegative. The triangle inequality therefore bounds the mixture's amplitude ratio by the largest step ratio, whenever the denominator is nonzero. This extends the result beyond the logistic family; the maximum itself is a numerical evaluation, not a certified bound.

## E Extension: the laminar column at low carriers

The two-band laminar column (LaNMM) adds a resonant intermediary between the field and the slow generator. These sweeps use 25–80 Hz carriers and polarizations up to 3 mV on $P_2$, exceeding the sigmoid scale $1/\rho \approx 1.8$ mV. They describe nonlinear frequency selection below TI's kHz range. The weak-field square law is tested separately in JR at 0.05–0.2 mV, one to two orders of magnitude below that scale (Fig. 7b).

### E.1 Model and measurements

The laminar extension (LaNMM) [5, 6] adds coupled alpha and gamma circuits: deep pyramidal $P_1$, spiny-stellate (SS), and somatostatin (SST) populations, and a superficial pyramidal $P_2$/PV circuit. We simulate this laminar neural mass model (LaNMM). We integrate the full 28-variable column [5, 6], with the field entering as in the single JR column, as a membrane polarization added inside the sigmoid argument of the target population. Its output rate $\varphi_X$ ($s^{-1}$) is

$$\varphi_X(t) = \sigma\big(v_X(t) + s(t)\big), \qquad X \in \{P_1, P_2\}, \tag{S13}$$

with $s(t)$ the AM or two-tone field of §2.2 (amplitude $\varepsilon$ in mV, beat $\Omega = 2\pi\Delta f$, carrier $\omega_c = 2\pi f_c$) and all three external drives held flat at their baselines (Fig. S2). A perturbation of an external input *rate* would require clipping at zero once its excursion exceeds the baseline, and a hard clip is a half-wave rectifier—a diode detector placed upstream of the sigmoid, which would inject a line at $\Delta f$ into the drive before the population nonlinearity received it. A signed membrane polarization carries no such constraint and none is applied. Because the LaNMM and JR sigmoids share the voltage scale $1/\rho \approx 1.8$ mV, $\varepsilon$ is directly comparable between the two models.

Integration is a vectorized fixed-step RK4 ($\Delta t = 10^{-4}$ s) advancing the whole parameter grid simultaneously, as in the JR sweeps. The maps report the alpha-band (8–12 Hz) power of the $P_1$ and $P_2$ membrane potentials as the mean squared magnitude of the Hann-windowed fast Fourier transform (FFT) over the band, in arbitrary units, over a post-transient window. This measure includes autonomous and driven activity and does not isolate a phase-coherent response to stimulation.

Two sweeps probe the column: an amplitude–beat sweep over $(\varepsilon, \Delta f)$ at fixed carrier, and a carrier–beat sweep over $(f_c, \Delta f)$ at fixed $\varepsilon$, built on the LaNMM module of [5]. The maps (Figs. S1, S7) show the *signed* stimulation-induced change, alpha power minus the unstimulated ($\varepsilon = 0$) baseline, on a zero-centered scale; over most of the $P_1$-driven grids the change is negative. For the alpha resonance we instead drive the deep $P_1$ loop directly and sweep its input against $\Delta f$, reading the lock-in (main-text Eq. (21)) of $v_{P_1}$ at $\Delta f$.

The additional carrier comparison below uses the lock-in of $v_{P_1}$, averaged at each carrier over 17 beats: 7–9 and 12.25–14 Hz in 0.25 Hz steps. These lie more than 1.5 Hz from the field-free alpha peak near 10.6 Hz. We denote this arithmetic mean by $S(f_c)$. The carrier grid is 25–80 Hz in 1 Hz steps, with equal tone amplitudes $\varepsilon = 1.5$ mV for $P_2$ drive and 0.5 mV for $P_1$ drive. After 2 s of settling, we compare 3 and 10 s measurement windows. Field-free controls give mean background amplitudes of 0.0048 and 0.0012 mV over the same beats. This background includes a persistent component near 8 Hz, so it is not solely finite-window leakage. The statistic compares carrier profiles within each drive condition; the unequal amplitudes do not support a direct sensitivity comparison between targets.

### E.2 Frequency selection and carrier dependence

Driving either population with the two-tone field of Eq. (S13) and reading alpha-band power in the deep ($P_1$, alpha) and superficial ($P_2$, gamma) pyramidal potentials recovers the beat resonance (§E.1, Fig. S2). Direct $P_1$ drive reproduces the JR alpha-band resonance on both stable-focus and limit-cycle sides; that sweep and its code are in the repository. The additional result is carrier selectivity through the coupled gamma circuit.

**Table 4: LaNMM carrier profiles measured away from alpha.** $S(f_c)$ is the mean lock-in amplitude of $v_{P_1}$ over the 17 beats specified in §E.1. Percentages are normalized to each row's own carrier maximum; the range and median use carriers from 30 to 80 Hz.

| Drive | Window | Peak $S$ (mV) | Peak $f_c$ (Hz) | Range (%) | Median (%) |
|---|---|---|---|---|---|
| $P_2$, 1.5 mV | 3 s | 0.450 | 39 | 23–100 | 42 |
| $P_2$, 1.5 mV | 10 s | 0.450 | 39 | 23–100 | 42 |
| $P_1$, 0.5 mV | 3 s | 0.092 | 25 | 42–68 | 53 |
| $P_1$, 0.5 mV | 10 s | 0.091 | 25 | 42–67 | 52 |

Sweeping the field amplitude $\varepsilon$ and beat frequency $\Delta f$ at a fixed carrier produces a region of enhanced alpha-band power: the response in $P_1$ is largest when $\Delta f$ matches the deep alpha ($\sim$10 Hz) and grows with $\varepsilon$ (Figs. S1a,b and S7a,b). The dominant-frequency contours identify where the output is close to the beat, without establishing phase locking of the autonomous rhythm. Away from the enhancement region the drive *reduces* alpha-band power: with the field on $P_1$, 95% of the amplitude–beat grid and 97% of the carrier–beat grid lie below the field-free baseline (Fig. S7), the drive pulling the autonomous alpha out of the 8–12 Hz band or suppressing it; with the field on $P_2$ the fractions are 44% and 31% (Fig. S1).

The carrier dependence illustrates the two coupling limits of §2.2–§2.7 within this model's 25–80 Hz carrier range. When the field is delivered to the superficial loop ($P_2$), alpha-band power enhancement in $P_1$ is largest in the gamma carrier band with $\Delta f$ near the $P_1$ alpha (Fig. S1c,d). At $\Delta f = 10$ Hz, the carrier maximum is 44 Hz. This selectivity is consistent with a double resonance: the fast loop acts as a tuned radio-frequency (RF) front end whose dynamics affect the carrier dependence of the deep response. With direct $P_1$ drive, a ridge near the column's own alpha persists across the carrier range (Fig. S7c). That ridge contains autonomous activity and is not a measurement of the demodulated component alone.

The lock-in also contains the autonomous rhythm when the beat is close to alpha; its maximum over beats cannot isolate the driven response. We therefore compare the off-alpha statistic $S(f_c)$ defined in §E.1 (Table 4). With $P_2$ drive it peaks near 39 Hz and falls to about 16–17% of that peak at a 25 Hz carrier. With $P_1$ drive it peaks at 25 Hz and spans about 42–68% of that peak over 30–80 Hz. These are properties of the specified amplitudes and beat average, not universal carrier-rejection factors. Single-beat profiles have deeper minima, including a dip near a 45 Hz carrier under direct $P_1$ drive: the gamma circuit can affect the response in either stimulation condition.

The carrier peaks and aggregate ranges persist with the longer window, although individual normalized values change by up to 3.1 percentage points for $P_2$ drive and 9.6 for $P_1$ drive. The smallest $S$ exceeds its mean field-free background by factors of about 16 and 8, respectively, with the 3 s window, and 62 and 32 with 10 s. Some individual beat–carrier points remain near or below background; the comparison concerns the mean over beats, not each grid point. TI's kHz carriers lie outside this model's range. Within it, the carrier can excite a network mode and affect the detected response, qualifying the inert-carrier limit of §2.6 and linking it to frequency-tagging and intermodulation paradigms [7].

Within the 25–80 Hz carrier range and at the finite polarizations used here, the LaNMM shows alpha-band power changes concentrated near the intrinsic alpha, amplitude-dependent widening of the frequency-dominance region, and enhanced responses when superficial drive passes through the gamma circuit. The power maps include autonomous and driven activity; they do not isolate TI efficacy. The gamma-carrier preference, around 40 Hz rather than kHz, remains a separate prediction to test. Esmaeilpour et al. [8] swept 0.1–2 kHz carriers at a fixed 5 Hz beat against carbachol-induced gamma, finding decreasing sensitivity with carrier frequency. Those carriers did not sample the gamma band. Violante et al. [9] also used a fixed 5 Hz beat. Neither study tests

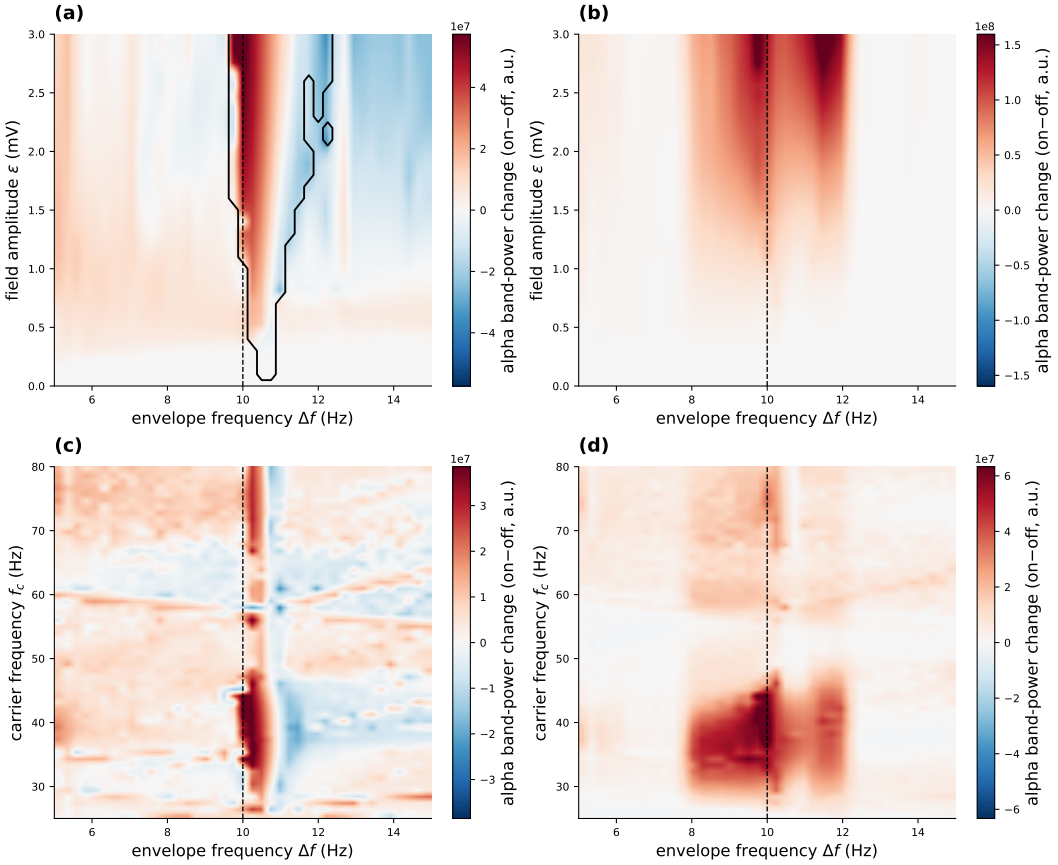



**Figure S1: LaNMM frequency selection: two-tone TI field on the superficial $P_2$ (gamma) loop.** The field enters the $P_2$ sigmoid argument as a membrane polarization $\varepsilon$ (mV) with all external drives flat. Color shows the signed change of alpha-band (8–12 Hz) power from the unstimulated $\varepsilon = 0$ baseline, on a zero-centered scale (arbitrary units). *(a,b)* $P_1$ and $P_2$ enhancement vs. $\varepsilon$ and $\Delta f$ (carrier 40 Hz), peaking at the $P_1$ alpha (10.0 Hz, dashed). The black contour in *(a)* is the frequency-dominance set $|f_{\text{out}} - \Delta f| < 0.3$ Hz, drawn because band power alone cannot separate a driven from an autonomous rhythm; it is a dominance screen, not a phase-capture test. The $\varepsilon = 0$ row is excluded, since with no drive the autonomous 10.67 Hz alpha already lies within the tolerance of two grid points (a resolution floor of 0.5 Hz); the set widens to 2.75 Hz at 3 mV. *(c,d)* Enhancement vs. carrier and $\Delta f$ at $\varepsilon = 1.5$ mV: $P_1$ alpha-band enhancement is largest in the gamma carrier band with $\Delta f$ near the $P_1$ alpha. At $\Delta f = 10$ Hz, the carrier maximum is 44 Hz. The field-free $P_2$ gamma peak is near 39.7 Hz; the finite-drive maximum need not coincide with it.

this low-carrier resonance prediction.

## F Vocabulary and metrics

*Forced response.* Below the Hopf the column does not oscillate on its own; we quantify its response by the lock-in amplitude at the beat $\Delta f$ (main-text Eq. (21)). There is no autonomous rhythm to entrain in the stable-focus J-curve, timing, and tACS sweeps.

*Frequency dominance and entrainment.* Above the Hopf the column free-runs at $f_0$. A 1:1 phase-capture test would follow the unwrapped phase difference from the drive and require absence of secular drift. Our maps instead report $|f_{\text{out}} - \Delta f| < 0.3$ Hz, where $f_{\text{out}}$ is the largest non-DC FFT peak. This is a frequency-dominance screen: a forced component can outgrow a persisting autonomous one without capturing it. When the components coexist, instantaneous-phase estimates also require their separation [10]. The maps therefore identify a dominance region, not a measured Arnold tongue.

*Beat-locked rate and gating.* Gating means that the amplitude of a persisting rhythm is modulated by the beat without frequency capture [11, 12]. The QIF statistic used here is the lock-in of the population rate $r_E$ at $\Delta f$, complemented by the rate folded on beat phase over whole cycles. It measures beat-locked firing. A raw rate fold does not extract the gamma amplitude, and sidebands can arise from amplitude or phase modulation. The above-Hopf QIF panels therefore establish coexistence and mixing of the beat and gamma rhythms; a gamma-amplitude estimate would be needed to identify gating specifically.

The protocol for Fig. S4 places the column on the limit-cycle side (input $p$ on the stable alpha-cycle branch below its upper Hopf), drives it with $s(t) = \varepsilon \cos \Omega t$, and records the dominant frequency. Grid widths and the clipping check are specified in the code. As the Hopf is approached, the autonomous cycle shrinks and the frequency-dominance region broadens in these simulations. Its width and the stable-focus susceptibility describe different responses; their increase near onset does not make them the same quantity.

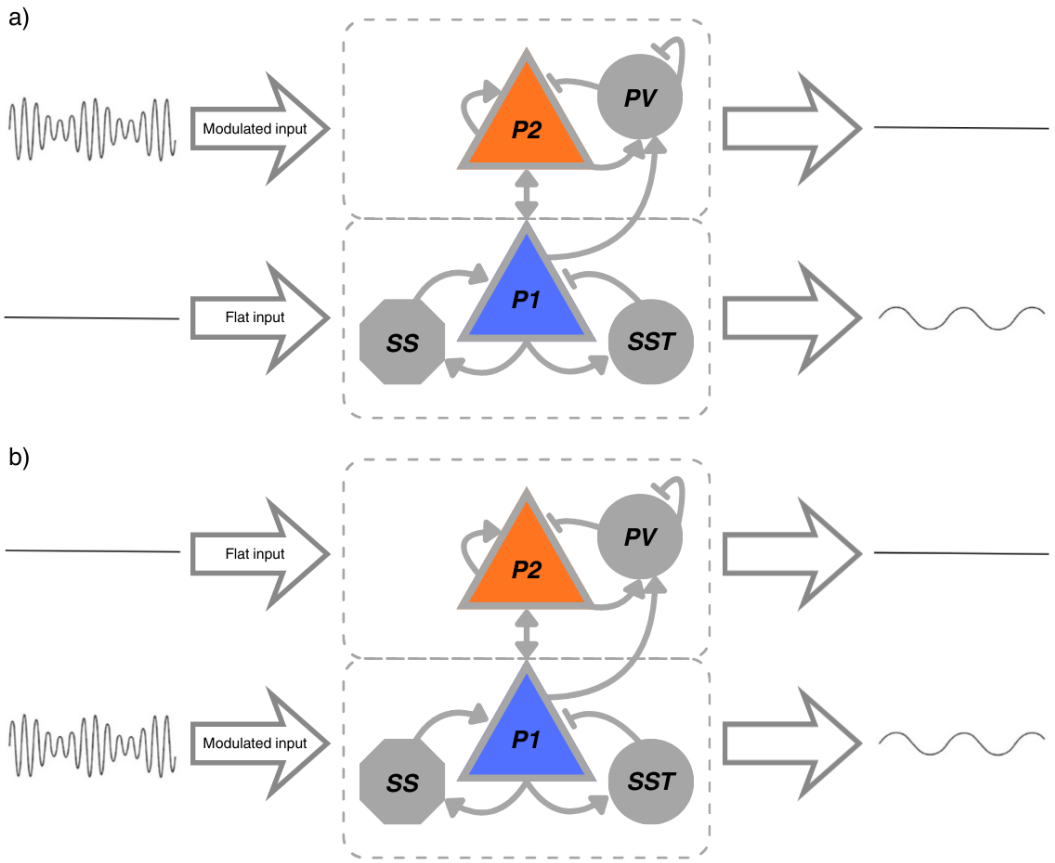



**Figure S2: Stimulation setup in a LaNMM column.** The column couples a superficial PING subcircuit (pyramidal $P_2$ + PV; gamma) and a deep JR subcircuit (pyramidal $P_1$ + SS + SST; alpha). *(a)* the TI field drives $P_2$ while $P_1$ receives a flat drive; *(b)* the TI field drives $P_1$ while $P_2$ is flat. Through the sigmoid nonlinearities and $P_1$–$P_2$ coupling, the generated beat-frequency component is transferred to the deep loop: $P_2$ carries the modulated fast carrier, while $P_1$ exposes the recovered low-frequency component (right traces).

## G Supplementary figures

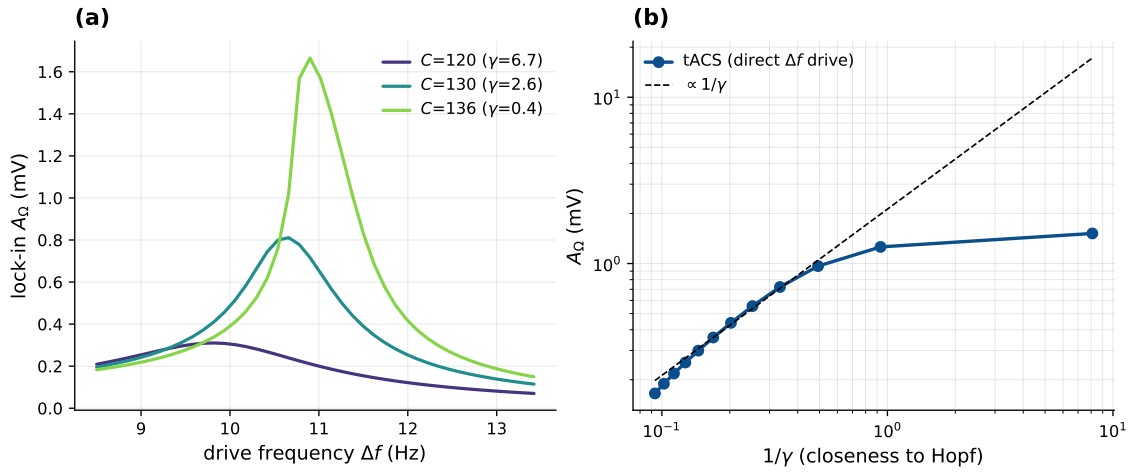



**Figure S3: tACS shares the network amplifier (Jansen–Rit).** A direct low-frequency (tACS) drive at $\Delta f$ enters the column without a carrier, so it needs no demodulation, but feeds the same near-Hopf resonator. With the field-free operating point pinned, sweeping the coupling $C$ toward the alpha Hopf: *(a)* the lock-in resonance at $\Delta f$ sharpens and grows as $C \to C^*$; *(b)* the response grows as $1/\gamma$ (dashed) and saturates near criticality—the same network amplification as the demodulated TI drive (Fig. 9). The leading tACS response is linear in the field; the TI beat is quadratic. Their response ratio is independent of damping in linear response and changes at the finite amplitudes nearest the Hopf (§4.5). Here $\gamma > 0$ describes the field-free state.

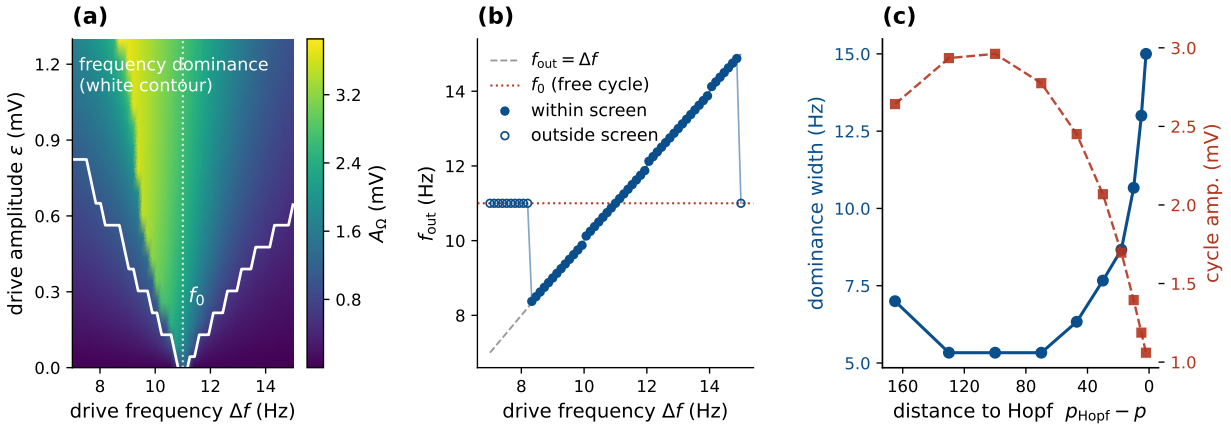



**Figure S4: Frequency dominance in the driven autonomous Jansen–Rit column.** The column is set in its autonomous alpha limit cycle ($p = 250$, $f_0 \approx 11$ Hz) and driven by a direct in-band sinusoid. *(a)* The set $|f_{out} - \Delta f| < 0.3$ Hz forms a wedge near $f_0$ that widens with drive. It screens for phase capture but does not establish it. *(b)* Inside this region the dominant frequency follows $\Delta f$; outside, it remains near $f_0$. *(c)* Toward the Hopf at fixed drive the dominance width grows as the autonomous cycle amplitude vanishes (blue, left axis; red dashed, right axis). Above the Hopf this width describes frequency selection in a driven autonomous oscillator; it is distinct from the linear susceptibility of the stable-focus side (Fig. 9). Both diagnostics increase toward criticality in these sweeps.

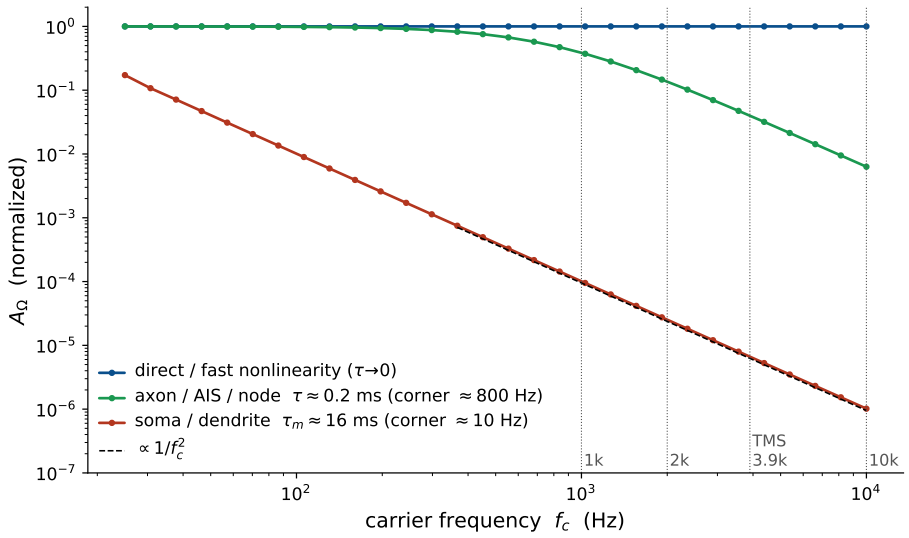



**Figure S5: Carrier attenuation depends on the assumed access time (Jansen–Rit, open loop).** Open-loop demodulated response (normalized to the $\tau \to 0$ value) vs. carrier frequency up to 10 kHz. With direct coupling ($\tau \to 0$) the response is flat—carrier-independent. A slow somatic membrane ($\tau_m \approx 16$ ms) rolls off as $1/f_c^2$ (dashed guide); the assumed fast response ($\tau = 0.2$ ms) retains about 0.14 of the direct response at 2 kHz and 0.04 at 3.9 kHz. These are sensitivity cases, not measurements of anatomical compartments.

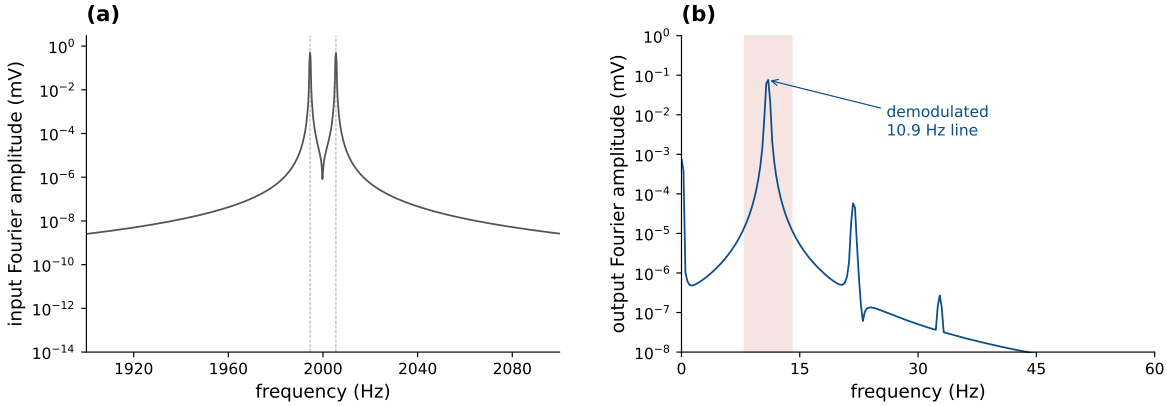



**Figure S6: Two-tone TI at a kHz carrier (Jansen–Rit, assumed fast access).** Two equal tones at $f_1 = 1994.543$ and $f_2 = 2005.457$ Hz, beating at 10.914 Hz, pass through the assumed low-pass ($\tau = 0.2$ ms) into the recurrent column. *(a)* The input amplitude spectrum has lines only at $f_1$ and $f_2$; in the 8–14 Hz band its maximum is $2.2 \times 10^{-13}$ mV. *(b)* The output carries a demodulated line at the beat, 10.9 Hz.

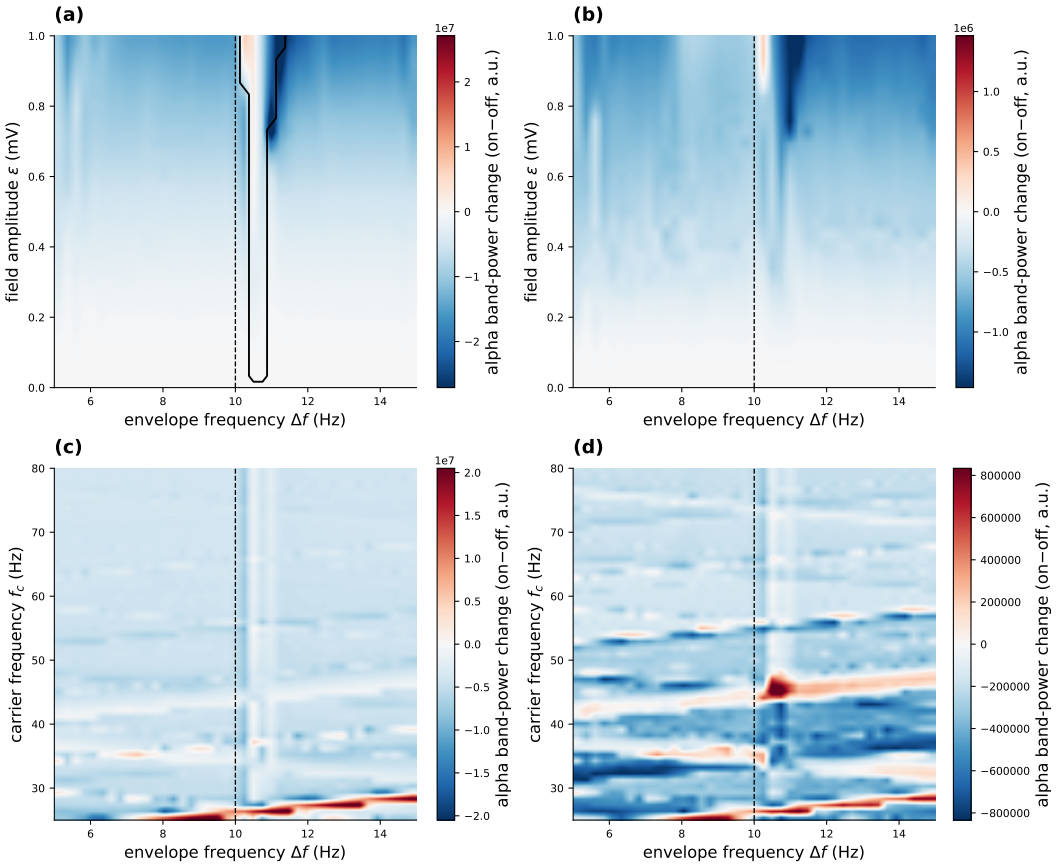



**Figure S7: LaNMM frequency selection: two-tone TI field delivered directly to the deep $P_1$ (alpha) loop.** As Fig. S1 but with the field on $P_1$. The deep loop shows frequency dominance at smaller fields, so the amplitude range is $\varepsilon \leq 1$ mV here against 3 mV there. These finite-amplitude maps extend beyond the perturbative regime of the theory. Color: signed change of alpha-band power from the $\varepsilon = 0$ baseline, zero-centered; most of the grid is suppression. *(a,b)* $P_1$ and $P_2$ enhancement vs. $\varepsilon$ and $\Delta f$; the black contour in *(a)* outlines the frequency-dominance set $|f_{\text{out}} - \Delta f| < 0.3$ Hz (Appendix F), computed from the dominant output frequency because band power alone cannot separate a driven from an autonomous rhythm; the $\varepsilon = 0$ row is excluded (resolution floor 0.5 Hz). The set widens to 1.25 Hz at $\varepsilon = 1$ mV. *(c,d)* Enhancement vs. carrier frequency and $\Delta f$ at $\varepsilon = 0.5$ mV. The ridge near alpha persists across the carrier band and includes the autonomous rhythm. A separate lock-in comparison away from alpha, including its window and background controls, is given in Table 4; these panels show band-power changes.

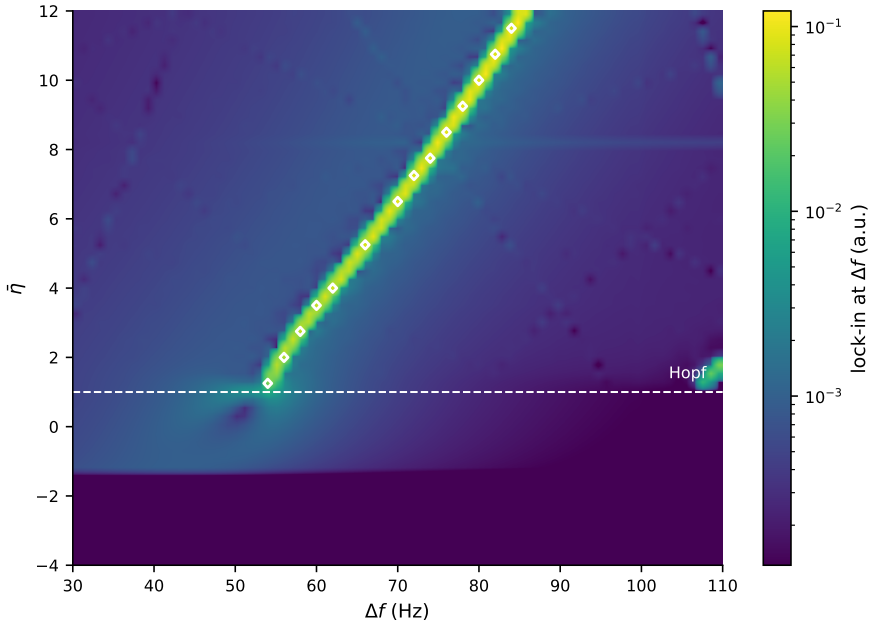



**Figure S8: NMM2 PING resonance map (exact mean field).** Demodulated response over the ($\Delta f$, background drive $\bar{\eta}$) plane, log color scale. The ridge follows the gamma natural frequency, with $f_0$ rising with $\bar{\eta}$ for these parameters. White markers outline the frequency-dominance set (Appendix F), drawn only above the Hopf (dashed line) where there is an autonomous rhythm to capture; below it the same color field is a forced response. The markers do not establish phase capture. Lock-in amplitude cannot separate driven and autonomous contributions, since both can place power at $\Delta f$.

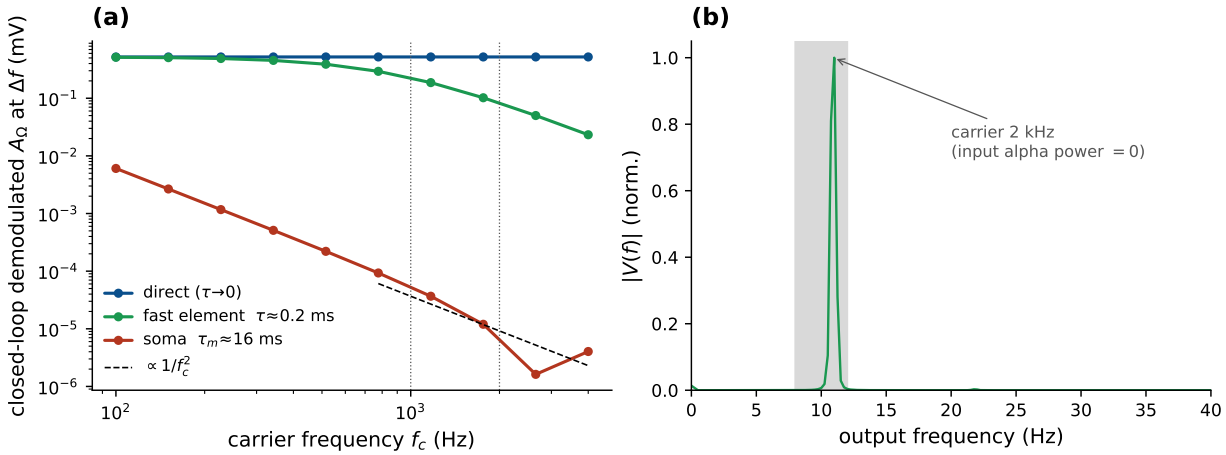



**Figure S9: Demodulation at a kHz carrier (Jansen–Rit, closed loop).** The applied field passes through an explicit membrane filter before the sigmoid. *(a)* Closed-loop demodulated $A_\Omega$ at $\Delta f = f_0$ vs. carrier $f_c$ for three access models: direct ($\tau \to 0$, carrier-independent), fast ($\tau = 0.2$ ms), and somatic ($\tau_m = 16$ ms; $1/f_c^2$ roll-off). The fast time is assumed rather than assigned to a measured compartment. *(b)* Output spectrum for a 2 kHz carrier delivered through the fast element: an alpha line at $f_0$, synthesized by the column although the input carries no alpha power.

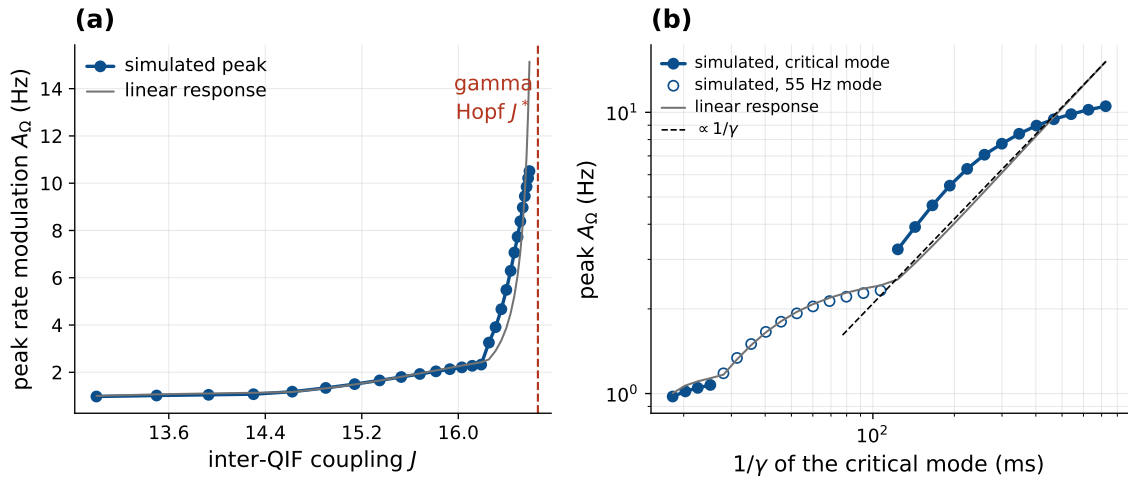



**Figure S10: Coupling changes the dominant mode and its gain in NMM2.** Unpinned sweep at $\bar{\eta} = 0$, AM surrogate $A_f = 8$. *(a)* Simulated rate peak (blue) and linear reference including the second-order source (gray), normalized over $14.5 < J < 16$. Red dashed: field-free Hopf. *(b)* Gain against inverse damping of the critical mode. Filled symbols: that mode carries the linear peak; open symbols: the competing 55 Hz mode carries it ($14.6 \lesssim J \lesssim 16.2$). The dashed $1/\gamma$ guide is anchored at the last linear point. The simulation exceeds then falls below the guide. The driven endpoint remains attracting under both AM and genuine two-tone forcing.

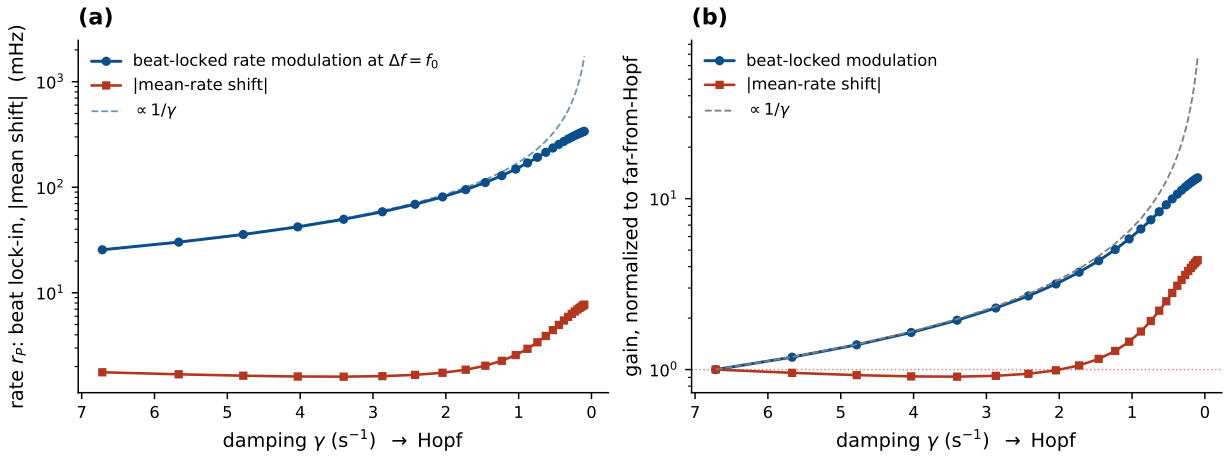



**Figure S11: Beat modulation grows more than the mean-rate shift.** JR coupling sweep with fixed field-free curvature and genuine two-tone input, $\Delta f = f_0$. Both observables use the pyramidal rate $r_P = \sigma(v + s)$, in mHz. *(a)* Beat amplitude (blue) follows $1/\gamma$ (dashed) before saturating; mean-shift magnitude (red) remains smaller. *(b)* Normalization to the far-from-Hopf values gives growth factors 13.2 and 4.4. Their ratio rises from 14.5 to 58 near $\gamma = 1$ s$^{-1}$, then falls to 44 as the amplified response rectifies. The AM surrogate gives ratios 19, 66, and 45.

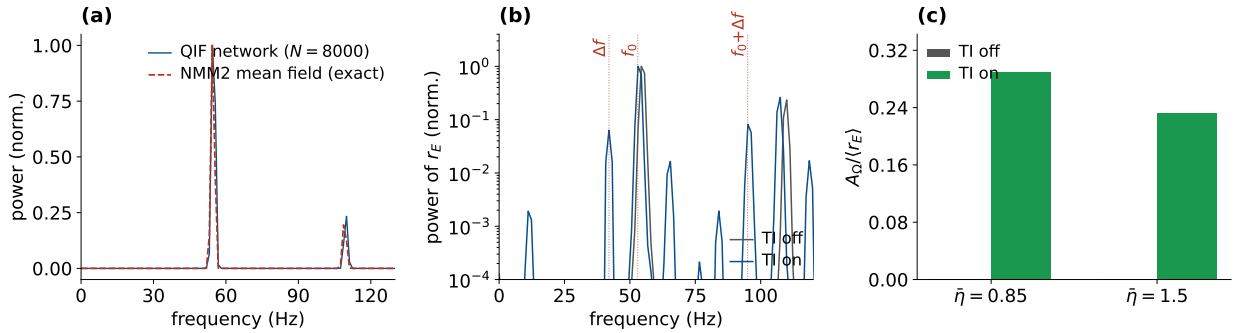



**Figure S12: Beat-locked modulation and mean-rate change in the QIF network.** *(a)* Field-free power spectrum of $r_E(t)$, normalized: the spiking network ($N = 8000$) matches the exact NMM2 mean field in gamma frequency (∼55 Hz); a normalized spectrum does not test the mean rate. *(b)* Intermodulation above the Hopf (TI off vs. on, log power): the nonlinearity mixes the imposed $\Delta f = 42$ Hz beat with the persisting gamma near 53–54 Hz, raising the direct $\Delta f$ line and the sum sideband near 95 Hz, both absent with TI off. These sidebands establish nonlinear mixing; they do not uniquely identify gamma-amplitude gating. *(c)* The $\Delta f$ modulation depth $A_\Omega/\langle r_E \rangle$, off vs. on: below 0.003 rising to 0.29 ($\bar{\eta} = 0.85$) and 0.23 ($\bar{\eta} = 1.5$), while the mean rate rises by about 8–11%. The labels identify field-free states; both field-on responses contain gamma activity beyond the beat component. Spectra use the same post-settling windows as the rate measurements and are normalized to each spectrum's maximum. Modulation depth is reported rather than the off→on lock-in ratio, whose denominator is the field-free floor.

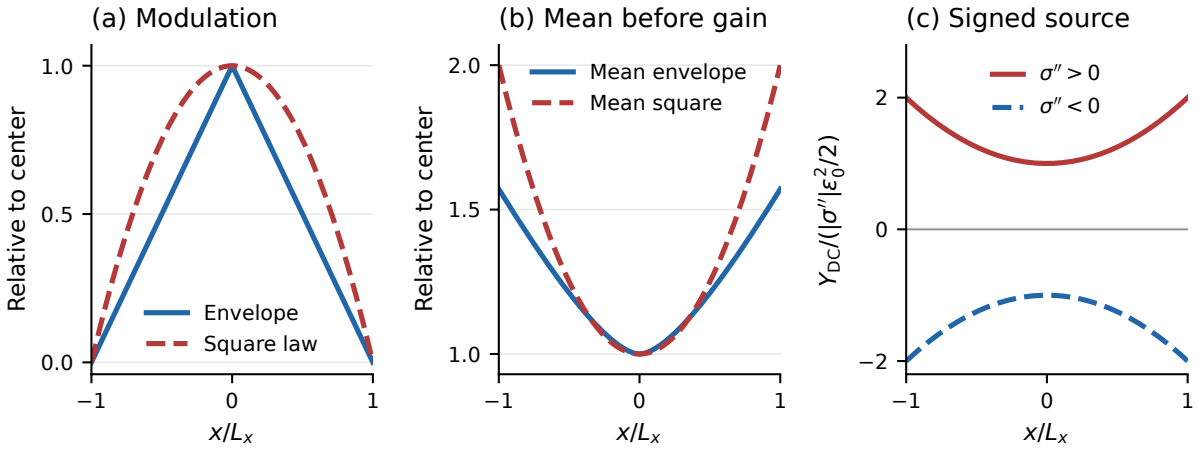



**Figure S13: Envelope and quadratic spatial maps.** Illustrative line profile: $\varepsilon_1(x) = \varepsilon_0(1 + x/L_x)$ and $\varepsilon_2(x) = \varepsilon_0(1 - x/L_x)$ on $-L_x \le x \le L_x$, with polarization scale $\varepsilon_0 > 0$ (mV) and length $L_x > 0$ (m). In (a,b), each geometric curve is divided by its own positive value at $x = 0$. *(a)* Modulation is $1 - |x/L_x|$ for envelope following and $1 - (x/L_x)^2$ for quadratic detection: both peak centrally, but the quadratic profile is broader here. *(b)* The mean envelope and mean-square polarization $\mathcal{I}$ both increase toward the edges; neither includes a signed detector gain. *(c)* The static JR rate source $Y_{\mathrm{DC}} = \sigma''\mathcal{I}/2$ for uniform positive curvature (solid red) or negative curvature of the same magnitude (dashed blue). Both use the same positive scale $|\sigma''|\varepsilon_0^2/2$, giving $\pm[1 + (x/L_x)^2]$; the gray line marks zero. These are assumed detector states before recurrent feedback, not inferred physiological responses. This is a line profile, not a head model or a demonstration of three-dimensional focusing.

## References


[1] Francesca Castaldo, Raul de Palma Aristides, Pau Clusella, Jordi Garcia-Ojalvo, and Giulio Ruffini. Rosetta Stone of neural mass models. *Physics Reports*, 1189:1–49, 2026. arXiv:2512.10982.

[2] Ben H. Jansen and Vincent G. Rit. Electroencephalogram and visual evoked potential generation in a mathematical model of coupled cortical columns. *Biological Cybernetics*, 73(4):357–366, 1995.

[3] Giulio Ruffini. Analysis and extension of exact mean-field theory with dynamic synaptic currents. *bioRxiv*, 2021. Preprint 2021.09.01.458563 (NMM2).

[4] Arkady Pikovsky, Michael Rosenblum, and Jürgen Kurths. *Synchronization: A Universal Concept in Nonlinear Sciences*. Cambridge University Press, 2001.

[5] Giulio Ruffini, Edmundo Lopez-Sola, Raul Palma, Roser Sanchez-Todo, Jakub Vohryzek, Francesca Castaldo, and Karl Friston. Cross-frequency coupling as a neural substrate for prediction error evaluation: a laminar neural mass modeling approach. *Neural Computation*, 38(8):1299–1343, 2026.

[6] Roser Sanchez-Todo, André M. Bastos, Edmundo Lopez-Sola, Borja Mercadal, Emiliano Santarnecchi, Earl K. Miller, Gustavo Deco, and Giulio Ruffini. A physical neural mass model framework for the analysis of oscillatory generators from laminar electrophysiological recordings. *NeuroImage*, 270:119938, 2023.

[7] Nathan Gordon, Jakob Hohwy, Matthew J. Davidson, Jeroen J. A. van Boxtel, and Naotsugu Tsuchiya. From intermodulation components to visual perception and cognition—a review. *NeuroImage*, 199:480–494, 2019.

[8] Zeinab Esmaeilpour, Greg Kronberg, Davide Reato, Lucas C. Parra, and Marom Bikson. Temporal interference stimulation targets deep brain regions by modulating neural oscillations. *Brain Stimulation*, 14(1):55–65, 2021.

[9] Ines R. Violante, Ketevan Alania, Antonino M. Cassarà, Esra Neufeld, Emma Acerbo, Romain Carron, Adam Williamson, Danielle L. Kurtin, Edward Rhodes, Adam Hampshire, Niels Kuster, Edward S. Boyden, Alvaro Pascual-Leone, and Nir Grossman. Non-invasive temporal interference electrical stimulation of the human hippocampus. *Nature Neuroscience*, 26(11):1994–2004, 2023.

[10] Jean-Philippe Lachaux, Eugenio Rodriguez, Jacques Martinerie, and Francisco J. Varela. Measuring phase synchrony in brain signals. *Human Brain Mapping*, 8(4):194–208, 1999.

[11] Ryan T. Canolty and Robert T. Knight. The functional role of cross-frequency coupling. *Trends in Cognitive Sciences*, 14(11):506–515, 2010.

[12] Adriano B. L. Tort, Robert Komorowski, Howard Eichenbaum, and Nancy Kopell. Measuring phase-amplitude coupling between neuronal oscillations of different frequencies. *Journal of Neurophysiology*, 104(2):1195–1210, 2010.