The cortical column as a tuned receiver: a network mechanism for temporal-interference stimulation

Document: TN0484 (Neuroelectrics TN) / WP0185 (BCOM WP)
Authors: Giulio Ruffini, Borja Mercadal, Alex Just, Raul de Palma Aristides, Francesca Castaldo, Nir Grossman, Santiago Canals, and Claudio Mirasso
Affiliations: Neuroelectrics / BCOM / IFISC (UIB-CSIC) / IN (UMH-CSIC) Imperial College London (Brain Sciences and UK Dementia Research Institute)
Date: 2026-10-04 **Version:** 0.14.6 0.15.0-draft1
DOI: 10.5281/zenodo.21009618

Abstract

Temporal-interference (TI) stimulation applies two high-frequency currents whose superposition contains no field component at their low difference frequency. Population models generate that component through effective quadratic mixing and amplify it by recurrent resonance. For a smooth weak-input response with a nonzero second-order term, cellular nonlinearities contribute to a beat proportional to the product of the carrier amplitudes. A Jansen–Rit firing-rate sigmoid realizes this mixing through its curvature. An exact quadratic integrate-and-fire mean field provides a derived realization: its static rate curve emerges when membrane relaxation is fast relative to the input, while synapses remain dynamic. Outside that limit the mixing coefficient is frequency dependent. Fast cellular access and slow circuit resonance can therefore coexist, with membrane attenuation entering once, through access. Near a Hopf bifurcation, the network amplifies the generated beat as $1/\gamma$ within linear response, where γ is the modal damping. Coupling sweeps separate this gain from leading-order beat generation. Beat-locked rate modulation grows faster than the mean-rate change in the mean field and in a spiking network of 8000 neurons per population. In this weak-input regime, the carrier-product law makes an envelope-only dose map conditional on the transduction mechanism. TI and direct low-frequency stimulation share the amplifier when effective input coupling, readout, and operating state are matched, so resonance alone gives TI no efficiency advantage. The analysis concerns weak modulation of ongoing activity; biological access and the absolute response at human field strengths remain unresolved.

Keywords: temporal interference; non-invasive neuromodulation; transcranial stimulation; neural mass model; amplitude demodulation; Hopf bifurcation; cross-frequency coupling; criticality.

Contents

1 Introduction **3**

2 Theory **3**
2.1 Population transfer and the slow-synapse limit . . . 3
2.2 From applied field to a squared-envelope beat component . . . 5
2.3 The exact mean field connects static and dynamic mixing . . . 7
2.4 Transduction class and its spatial and spectral signatures . . . 8
2.5 Amplification: the synaptic low-pass and the network resonance . . . 10
2.6 Carrier access depends on the effective membrane response . . . 10
2.7 Operating-point dependence . . . 11

3 Methods **12**
3.1 Single-column Jansen–Rit: integration, lock-in, and controls . . . 12
3.2 Laminar two-band model (LaNMM) . . . 14
3.3 Exact next-generation mean field (NMM2 PING) . . . 14
3.4 QIF spiking network (microscale of NMM2) . . . 15
3.5 Coupling sweeps, timing, and the tACS control (Jansen–Rit) . . . 16
3.6 Vocabulary: forced response, entrainment, and gating . . . 16

4 Results **16**
4.1 The Jansen–Rit sigmoid demodulates: an alpha line from a carrier-only input . . . 16
4.2 Near the Hopf, the demodulated beat drives a sharp resonance . . . 17
4.3 Carrier independence and the kHz roll-off . . . 17
4.4 The nonlinearity is the detector: the σ'' curvature law and its controls . . . 19
4.5 Exact mean-field confirmation: the NMM2 PING gamma generator . . . 20
4.6 What the mesoscale adds: coupling sets the gain at fixed detection . . . 20
4.7 The resonance amplifies the envelope-locked modulation more than the mean rate 22
4.8 Microscale confirmation: TI realigns spike timing in the QIF network . . . 22
4.9 Falsifiable predictions and tests . . . 24

5 Discussion **24**

6 Conclusion **27**

A Notation and units **33**

B Simulated models: equations and parameters **35**

C The cubic Hopf normal form lacks a quadratic mixer **36**

D Efficiency of a memoryless transfer against a direct in-band drive **37**

E Extension: the laminar column at low carriers **39**

F Vocabulary and metrics **42**

G Supplementary figures **43**

1 Introduction

Temporal-interference (TI) stimulation was proposed to reach deep brain targets while reducing stimulation of surrounding tissue [1]. It applies two sinusoids at f_1 and $f_2 = f_1 + \Delta f$ through separate electrode pairs, typically with $f_1 \sim 1$–2 kHz and $\Delta f \sim 1$–100 Hz. Where the fields overlap, their superposition is an amplitude-modulated (AM) signal with an envelope at Δf. Electrode currents can steer the region of largest envelope modulation. Whether this also localizes the neural response depends on how neurons transduce the waveform.

The difference frequency is absent from the input itself:

$$s(t) = \varepsilon_1 \cos(\omega_1 t) + \varepsilon_2 \cos(\omega_2 t), \qquad \omega_{1,2} = 2\pi f_{1,2}, \quad \Omega = \omega_2 - \omega_1 = 2\pi\,\Delta f. \tag{1}$$

Here $\varepsilon_{1,2}$ are the effective input amplitudes (related to the applied field in §2.2), Ω is the beat angular frequency, and $f_c = (f_1 + f_2)/2$ is the carrier frequency. The spectrum contains only the two applied lines (Fig. 3). A linear, time-invariant system can attenuate or phase-shift them but cannot create a new one. Passive membrane filtering therefore cannot demodulate TI [2]; a nonlinear element must mix the carriers into the low-frequency band, as in AM reception [3].

We consider weak modulation of ongoing neural activity. For a smooth response about an operating state, a nonzero second-order term mixes the carriers into their difference frequency. Cellular contributions can therefore be combined in an effective population response without identifying each microscopic mechanism. Direct stimulation thresholds and conduction block under strong TI lie outside this scope.

Voltage-gated ion channels provide a cellular mixing mechanism in Hodgkin–Huxley and McIntyre–Richardson–Grill (MRG) myelinated-axon models [2]. Luff et al. [4] directly observed subthreshold difference-frequency oscillations in individual neurons, including carriers near 5 kHz. Mixing persisted during synaptic blockade but was suppressed by blocking tetrodotoxin-sensitive sodium channels. Other preparations show carrier-driven excitation or block rather than envelope extraction [5, 6, 7]. Primate recordings at human-comparable fields report changes in spike timing without a corresponding mean-rate change, with weaker effects than conventional low-frequency stimulation [8]. In slices, pyramidal and parvalbumin (PV) neurons respond differently, and most pyramidal TI responses disappear under synaptic blockade [9]. Computational studies also find network-mediated responses [10, 11, 12]. These findings distinguish cellular mixing from the network response it can recruit.

We separate carrier access, nonlinear beat generation, and recurrent amplification (Fig. 1). The first calculation uses a Jansen–Rit firing-rate sigmoid: its curvature mixes the carriers, and a network with second-order synapses amplifies the beat near a Hopf bifurcation. An exact quadratic integrate-and-fire (QIF) mean field connects this static description to cellular dynamics. When membrane relaxation is fast relative to the input, a static population transfer curve emerges while the synapses remain dynamic; otherwise the mixing coefficient is frequency dependent. Simulations in the corresponding spiking network test the population description, and a laminar model extends the calculation to two resonant bands at low carriers.

Related neural-mass accounts use the same nonlinear mixing for endogenous cross-frequency coupling and nested amplitude modulation [13, 14]. Here the input is external, making the field-to-cell coupling an additional requirement. The population reduction identifies what follows once the carrier reaches the nonlinearity; it does not identify the anatomical access pathway.

2 Theory

2.1 Population transfer and the slow-synapse limit

A neural mass model describes a population through averaged variables [15, 16]. In the Jansen–Rit (JR) family, a linear synaptic filter converts presynaptic firing rate $r(t)$ into postsynaptic potential

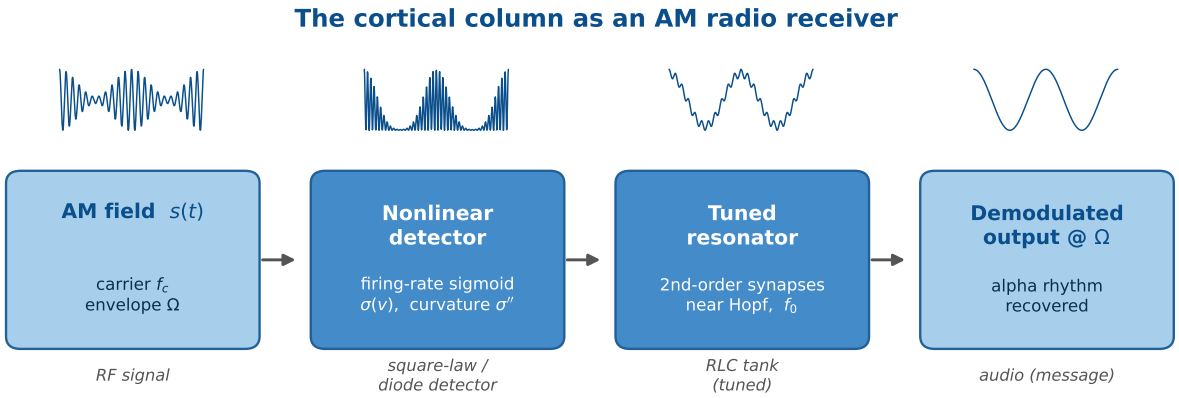


Figure 1: The cortical column as a tuned receiver. A nonlinear detector generates the beat at angular frequency Ω from a carrier near f_c; a recurrent network amplifies it near its natural frequency f_0. The diagram shows the static-sigmoid realization. In a conventional AM receiver, the tuned circuit selects the carrier before detection [3]; here the resonator selects the low-frequency output. The laminar extension also has a carrier-selective stage (§E).

$x(t)$:

$$\ddot{x} + 2a\dot{x} + a^2 x = Aa\, r(t),$$

with inverse synaptic time a and gain parameter A; inhibitory synapses use parameters b and B. Summed postsynaptic potentials give the mean input v, which a static transfer curve converts to firing rate [17],

$$\sigma(v) = \frac{2e_0}{1 + e^{\,\rho(v_0 - v)}}. \tag{2}$$

Here $2e_0$ is the maximum rate, v_0 the inflection voltage, and ρ the inverse voltage scale. Nonzero curvature makes this curve a mixer, while its slope sets the local gain of the recurrent circuit.

For a synapse from population Y to X, the resulting NMM1 equations are [15]

$$\hat{L}_{X\leftarrow Y}[u_{X\leftarrow Y}] = C_{X\leftarrow Y}\, r_Y, \qquad v_X = \Lambda[\hat{E}] + \sum_{Y:\, C_{X\leftarrow Y}\neq 0} u_{X\leftarrow Y}, \qquad r_X = \sigma(v_X). \tag{3}$$

The operator $\hat{L}$ is the inverse synaptic filter, $u_{X\leftarrow Y}$ its postsynaptic potential, $C_{X\leftarrow Y}$ the connectivity, and $\Lambda[\hat{E}]$ the direct polarization caused by the applied field. This field contribution enters alongside the synaptic potentials, without first passing through a synapse.

The corresponding population nonlinearity can be derived for all-to-all coupled QIF neurons with Lorentzian-distributed excitabilities. Their exact Montbrió–Pazó–Roxin (MPR) mean field evolves the firing rate r and mean voltage v [18]; adding dynamic synapses gives NMM2 [19, 20]. In membrane-time units,

$$\dot{r} = \frac{\Delta}{\pi} + 2rv, \qquad \dot{v} = v^2 + \bar{\eta} - \pi^2 r^2 + I(t), \tag{4}$$

where $\bar{\eta}$ is the mean excitability, $\Delta > 0$ its half-width, and $I(t)$ the normalized input, including recurrent drive when present. Rate and voltage are expressed in the corresponding rescaled units. For a constant total drive $Q = \bar{\eta} + I$, setting both derivatives to zero gives $v = -\Delta/(2\pi r)$ and

$$r = F(Q) = \frac{1}{\pi}\sqrt{\frac{Q + \sqrt{Q^2 + \Delta^2}}{2}}. \tag{5}$$

Equivalently, F averages the single-neuron steady rate $f(q) = \sqrt{q}/\pi$ for $q > 0$, and $f(q) = 0$ otherwise, over the excitability distribution. Here η is the neuron's excitability and $q = \eta + I$

its constant total drive. Threshold recruitment and the concave rate increase of active cells both enter its curvature. This nonlinear curve exists without recurrent coupling. It has an inflection at $Q = \Delta/\sqrt{3}$ and an unbounded concave rise, unlike the saturating JR sigmoid.

If the population relaxes to this equilibrium faster than synaptic inputs change, NMM2 reduces to a static rate map with dynamic synapses [19, 20]. Restoring the membrane time τ_m and physical firing rate, a second-order synapse with time constant τ_s obeys

$$r(t) \simeq \frac{F(Q(t))}{\tau_m}, \qquad \tau_s^2 \ddot{s}_{\mathrm{syn}} + 2\tau_s \dot{s}_{\mathrm{syn}} + s_{\mathrm{syn}} = r(t), \tag{6}$$

where s_{syn} is the filtered rate entering the recurrent drive in Q, with the original coupling normalization retained. This is the slow-synapse limit: shortening the effective membrane time makes the transfer appear static while the network retains its synaptic dynamics. The relevant separation is between the population relaxation time τ_{rel} and τ_s. Applying the same static map directly to a carrier of angular frequency ω_c requires the stronger condition $\omega_c \tau_{\mathrm{rel}} \ll 1$. A population can therefore be quasistatic for its synaptic inputs yet dynamic for a kHz carrier.

The transfer curve summarizes cellular nonlinearities within this regime. Its curvature combines their leading contributions to mixing; its slope converts a slow input into a rate change and enters recurrent gain. QIF supplies a derived realization through its spike-generating quadratic and excitability distribution. The generic weak-input mixing law does not require identifying each channel's contribution, although the coefficient and its frequency dependence are model-specific. Outside the static limit these contributions belong to a dynamic input–output functional. Section 2.3 calculates this response for QIF and recovers Eq. (5) in the adiabatic limit.

Cellular and circuit resonance are also distinct. Conductances such as I_h and I_M can tune single neurons [21]; the companion manuscript of de Palma Aristides et al. [22] reports cell-type- and state-dependent TI frequency selectivity in hippocampal neurons, sensitive to these conductances. Recurrent excitatory–inhibitory circuits can generate resonance without intrinsic cellular resonance [23, 24]. In the fast-membrane limit, any retained resonance belongs to the remaining synaptic circuit; modes requiring finite membrane dynamics need not persist.

The JR column couples pyramidal, excitatory-interneuron, and inhibitory-interneuron populations, with field input to the pyramidal sigmoid and local field potential (LFP) proxy $v = y_1 - y_2$ (App. B). The laminar extension (LaNMM) [13, 25] adds coupled alpha and gamma circuits: deep pyramidal P_1, spiny-stellate (SS), and somatostatin (SST) populations, and a superficial pyramidal P_2/PV circuit. These models retain dynamic synapses and static rate curves; NMM2 and its spiking realization retain membrane dynamics as well.

2.2 From applied field to a squared-envelope beat component

We use the quasistatic electromagnetic approximation for the applied field $E(t)$ (V/m), neglecting propagation and induction. This does not make membrane charging instantaneous. Let $s(t)$ be the polarization after the cellular access response; the static population model reads

$$r(t) = \sigma\big(v(t) + s(t)\big), \qquad E(t) = E_1 \cos \omega_1 t + E_2 \cos \omega_2 t. \tag{7}$$

The field acts directly on soma, dendrites, axon initial segment (AIS), and terminals, each with its own coupling and frequency response. In a reduced description, their contributions to the effective input are represented by parallel entry points,

$$s(t) = \sum_c \boldsymbol{\lambda}_f^c \cdot \mathbf{E}(t), \qquad \boldsymbol{\lambda}_f^c = \boldsymbol{\lambda}_0^c \, |H_c(\omega_c)|, \tag{8}$$

where $\boldsymbol{\lambda}_0^c$ is the static polarization vector of compartment c (a length), H_c its access filter, and $\omega_c = 2\pi f_c$ [15, 26]. Equation (8) uses amplitude gains ; relative phasescan be retained in the complex

transferand assumes aligned compartment phases; a general sum requires the complex transfers, including their relative phases. The passive compartment equation $C\dot{\mathbf{V}} + A\mathbf{V} = \mathbf{I}^0 - \mathbf{p}E$ [19] gives $\delta\mathbf{V}(\omega) = -(A + i\omega C)^{-1}\mathbf{p}E(\omega)$, with capacitance matrix C, conductance matrix A, endogenous current $\mathbf{I}^0$, and field-to-current coupling $\mathbf{p}$. The static gain and its frequency dependence belong to this one response. A model driven by post-coupling polarization and a model driven by current through its own membrane equation must therefore count that filtering once.

For a dominant entry point, $\varepsilon_j = \lambda_f(\omega_j)E_j$ denotes the polarization reaching the nonlinearity. The direct-coupling calculation takes $\lambda_f \approx \lambda_0$ to isolate mixing and recurrent amplification; §2.6 restores frequency-dependent access. A fast compartment could justify this approximation, but its identity and coupling are not inferred from the population model.

Expanding σ about an operating point v^* (a Volterra/Taylor expansion, as in [14]) gives $\sigma(v^*+s) \approx \sigma(v^*) + \sigma'(v^*)\,s + \frac{1}{2}\sigma''(v^*)\,s^2 + \dots$ The truncation requires $|s| \ll 1/\rho \approx 1.8$ mV and a nonzero second derivative for quadratic mixing to be leading. Larger excursions require the full transfer curve. The linear term preserves the two input frequencies. The quadratic cross term generates their difference through the identity $2\cos\omega_1 t\cos\omega_2 t = \cos\Omega t + \cos(\omega_1+\omega_2)t$. Averaging over the carrier (the fast $\cos^2\omega_j t$ terms average to $\frac{1}{2}$, the sum-frequency term to zero),

$$\big\langle \sigma(v^*+s)\big\rangle_c = \sigma(v^*) + \tfrac{1}{4}\sigma''(v^*)\,(\varepsilon_1^2+\varepsilon_2^2) + \tfrac{1}{2}\sigma''(v^*)\,\varepsilon_1\varepsilon_2\cos\Omega t + O(\varepsilon^4), \tag{9}$$

so a line appears at exactly the envelope frequency Ω, with amplitude

$$A_\Omega \simeq \tfrac{1}{2}\,\sigma''(v^*)\,\varepsilon_1\varepsilon_2, \tag{10}$$

where $\simeq$ means to leading order in the polarizations, here and in what follows. The same expansion leaves a constant (DC) term, $\frac{1}{4}\sigma''(\varepsilon_1^2+\varepsilon_2^2)$, which any read-out of the mean rate must include.

For a dynamic cellular response with synaptic input held fixed, define the effective second-order coefficient $\chi^{(2)}$ by the complex beat amplitude $\widehat{r}_\Omega$,

$$\widehat{r}_\Omega \simeq \chi^{(2)}(\omega_2,-\omega_1)\,\varepsilon_2\varepsilon_1, \qquad r_\Omega(t) = \mathrm{Re}\big[\widehat{r}_\Omega e^{i\Omega t}\big].$$

Here $r_\Omega(t)$ is the generated rate component before recurrent feedback. With this cosine-amplitude convention, the memoryless limit is $\chi^{(2)} = \sigma''(v^*)/2$. Multiple cellular processes can contribute to the same coefficient. Small amplitude justifies the second-order expansion; it does not remove memory, so the coefficient may depend on both frequencies and the operating state. Symmetry or cancellation can make it vanish. QIF and the sigmoid realize this shared quadratic structure with different coefficients.

What the quadratic term recovers is not the envelope but its square. Writing $A(t)$ for the instantaneous envelope of the two-tone field, $A^2(t) = \varepsilon_1^2 + \varepsilon_2^2 + 2\varepsilon_1\varepsilon_2\cos\Omega t$, the low-pass part of the squared signal is exactly

$$\mathrm{LPF}\big[s^2(t)\big] = \tfrac{1}{2}A^2(t) = \frac{\varepsilon_1^2+\varepsilon_2^2}{2} + \varepsilon_1\varepsilon_2\cos\Omega t. \tag{11}$$

This is square-law detection in the strict sense: the population transduces A^2, not A. The distinction matters because A^2 is exactly sinusoidal at Ω whereas A is not—at a matched target ($\varepsilon_1 = \varepsilon_2 = \varepsilon$), $A(t) = 2\varepsilon|\cos(\Omega t/2)|$, a rectified cosine.

The amplitude-modulated surrogate. The dense perturbative sweeps below use the three-line waveform

$$s(t) = \varepsilon\,[\,1 + m\cos\Omega t\,]\cos\omega_c t, \qquad \omega_c = 2\pi f_c, \tag{12}$$

with modulation depth m, because it parameterizes a sweep by one amplitude. It is not the physical signal: it carries a line at ω_c that the two-tone sum lacks. The two agree at Ω to leading

order (the surrogate gives $A_\Omega = \frac{1}{2}\sigma''\varepsilon^2 m$) and are *not* equivalent beyond it. For matched genuine tones $\mathrm{LPF}[s^2] = \varepsilon^2(1+\cos\Omega t)$, whereas for the $m=1$ AM surrogate $\mathrm{LPF}[s^2] = \varepsilon^2(\frac{3}{4}+\cos\Omega t + \frac{1}{4}\cos 2\Omega t)$: the same Ω amplitude, but a different DC term and a spurious second harmonic at 25% of the fundamental. Since that second harmonic is the observable that distinguishes transduction classes (§2.4), every claim that turns on the waveform is run with genuine two tones: the demodulation demonstration (Fig. 3), the curvature and square-law controls (Fig. 6), the laminar maps (Figs. S1, S7) and the kHz demonstration. The AM surrogate is retained for the dense perturbative sweeps in (Ω, p) and (Ω, C), which read only the leading Ω component, and Fig. 6d verifies that the two agree theretheir open-loop agreement at one operating point. It does not establish quantitative equivalence of the recurrent sweeps near the Hopf, where the different DC terms can shift the operating state.

In the language of [14], the quadratic cross-term $s_1 s_2$ between a slow and a fast input (the second-order Volterra kernel) implements amplitude modulation/demodulation and the associated intermodulation lines. Demodulation is thus itself an intermodulation product: the line at Ω is the *difference frequency* of the two applied tones (ω_1 and ω_2), generated by the same quadratic term that, acting again on an intrinsic rhythm ω_0, produces the $\omega_0 \pm \Omega$ sidebands seen at the spiking level (Fig. S12b). Equation (10) carries three predictions, all verified below: the recovered amplitude is quadratic in the drive ($A_\Omega \propto \varepsilon^2$, square-law detection); it follows the sigmoid curvature ($A_\Omega \propto \sigma''(v^*)$, hence zero at the inflection $v^* = v_0$); and, *at fixed post-coupling polarization* ε, it is independent of the carrier ω_c. This last prediction needs care: as a function of the *applied* field the response inherits the coupling $\varepsilon = \lambda_f E_0$, so the field required for a given effect rises with f_c (§2.6)—consistent with the experimental consensus. Carrier independence is thus a statement about the recovered beat component at fixed polarization, not about the applied field.

2.3 The exact mean field connects static and dynamic mixing

The adiabatic condition in §2.1 determines whether the static curve describes carrier mixing. Consider an uncoupled MPR population (Eq. (4), membrane time set to one), with constant drive Q and a weak added current $a\cos\omega t$. To second order in a, the carrier-averaged rate shift is $a^2 C(Q,\omega)$, where

$$C(Q,\omega) = \frac{r^*\left[\omega^2 + 3d^2 - \nu^2\right]}{(d^2+\nu^2)\{[d^2+\nu^2-\omega^2]^2 + 4d^2\omega^2\}}, \qquad r^* = F(Q), \quad d = \frac{\Delta}{\pi r^*}, \quad \nu = 2\pi r^*. \tag{13}$$

The fixed-point eigenvalues are $-d \pm i\nu$: d is the relaxation rate and ν the ringing angular frequency, both in membrane-time units. The limiting responses are

$$C(Q,\omega) \xrightarrow[\omega\to 0]{} \tfrac{1}{4}F''(Q), \qquad C(Q,\omega) \xrightarrow[\omega \gg d,\nu]{} \frac{F'(Q)}{2\omega^2}. \tag{14}$$

In the first limit the population tracks its static curve, whose curvature rectifies the input. In the second, the voltage excursion is approximately a/ω; its square supplies a slow drive that the population reads through F'. Above the inflection of F, these limits have opposite signs and the coefficient vanishes at $\omega_z = \sqrt{\nu^2 - 3d^2}$ (Fig. 7a). The 300 Hz and kHz carriers are on the fast side for the parameters of the pyramidal–interneuron network gamma (PING) circuit used below. That classification is parameter-dependent: a shorter effective membrane time can bring the same physical carrier into the adiabatic regime.

Membrane access is already included in this calculation. The linear voltage response is $H_v(\omega) = (i\omega + d)/[(i\omega + d)^2 + \nu^2]$. Dividing by its squared magnitude gives the mixing coefficient at fixed voltage excursion,

$$K(\omega) = \frac{C(Q,\omega)}{|H_v(\omega)|^2} = \frac{F'(Q)}{2}\,\frac{\omega^2 + 3d^2 - \nu^2}{\omega^2 + d^2}. \tag{15}$$

This coefficient tends to $F'/2$ at high frequency. The $1/\omega^2$ suppression at fixed current comes from $|H_v|^2$, the membrane filtering already represented by Eq. (8); it is not an additional detector filter.

A static curve placed after the same membrane has the same leading carrier roll-off, although its mixing coefficient and sign can differ. The steady-state curvature is $F'' = 4r^*(3d^2 - \nu^2)/(d^2 + \nu^2)^3$, so the inflection occurs at $\nu^2 = 3d^2$.

For the full eight-state PING (Eq. (27)), each high-frequency current tone of amplitude a_j produces a voltage phasor $a_j/(i\omega_j\tau_E)$. The v_E^2 term therefore supplies a difference-frequency source of magnitude $a_1a_2/(\tau_E^2\omega_1\omega_2)$ inside the equation for $\tau_E\dot{v}_E$. After division by τ_E, this source is propagated through the network susceptibility at Ω. At four stable operating points, the resulting response agrees with the full second-order calculation to within 1.1% at 300 Hz, 0.1% at 1 kHz, and 0.03% at 2 kHz (Fig. 7b).

The carrier and beat have different routes to the firing rate. At high frequency, the voltage equation integrates the input once, and the rate equation integrates the voltage again, giving a linear rate response proportional to $1/\omega^2$. The beat is generated in the voltage equation before this second integration and is read through the susceptibility at Ω. Thus its carrier dependence is $1/(\omega_1\omega_2)$, not the product of two linear rate responses. Among the quadratic terms in Eq. (4), v^2 contributes at order ω^{-2}, rv at ω^{-3}, and r^2 at ω^{-4} for nearby fast tones. Table 1 summarizes the comparison.

stage	static curve, same membrane	dynamic population
current → voltage	ω^{-1}	ω^{-1}
voltage → rate, carrier	1	ω^{-1}
current → rate, carrier	ω^{-1}	ω^{-2}
two tones → beat in the rate	$(\omega_1\omega_2)^{-1}$	$(\omega_1\omega_2)^{-1}\times$ const.

Table 1: Fast-carrier scaling with matched membrane access, at fixed beat frequency and a nonzero leading mixing coefficient. The dynamic population integrates the carrier once more between voltage and rate; the beat is formed before that step. Prefactors depend on the operating point and beat-frequency susceptibility.

2.4 Transduction class and its spatial and spectral signatures

A neural response proportional to the squared envelope is not equivalent to one proportional to the envelope. A detector implements some transduction $F(A)$ of the local envelope $A(t)$, and the two laws predict different amplitude scaling, harmonic content and spatial weighting.

For a narrowband field $s(t) = A(t)\cos\omega_c t$ passing through a memoryless nonlinearity g, the low-frequency (baseband) output Y_{LF} is the average of g over one carrier cycle:

$$Y_{\mathrm{LF}}(A) = (2\pi)^{-1}\int_0^{2\pi} g(v^* + A\cos\theta)\,\mathrm{d}\theta.$$

Odd powers of A average away, leaving only even ones:

$$Y_{\mathrm{LF}}(A) = g(v^*) + \tfrac{1}{4}g''(v^*)A^2 + \tfrac{1}{64}g^{(4)}(v^*)A^4 + \cdots \tag{16}$$

A smooth memoryless response with $g''(v^*) \neq 0$ therefore transduces A^2 at leading weak-input order, whatever its detailed shape. This includes the sigmoid mechanism of §2.2. Recovering A itself requires a qualitatively different detector: strong rectification. A full-wave rectifier gives $\mathrm{LPF}[\,|A\cos\omega_c t|\,] = (2/\pi)A$ and a half-wave rectifier $(1/\pi)A$, both linear in the envelope, as does a diode-and-capacitor peak detector. A hard threshold is not one of them: a step detector with offset δ transduces $\pi^{-1}\arccos(\delta/A)$ for $A > \delta$ and nothing below it, which is neither linear nor quadratic in A (App. D). Asymmetric channel rectification, threshold crossing and release events are candidate biological realizations of rectifiers of one kind or another. Under a linear downstream response and fixed coupling, the amplitude sweep below distinguishes a quadratic effective drive from one proportional to the envelope; the derivation of §2.2 assumes a smooth transfer, and this section asks what would show that assumption to fail.

The two classes are distinguishable at a single site. At a matched target, $A(t) = 2\varepsilon|\cos(\Omega t/2)|$, whose Fourier series $|\cos u| = \frac{2}{\pi} + \frac{4}{\pi}\sum_{n\geq 1}\frac{(-1)^{n+1}}{4n^2-1}\cos 2nu$ gives a harmonic ladder in ratios $A_{2\Omega}/A_\Omega = 1/5$, $A_{3\Omega}/A_\Omega = 3/35$ and $A_{4\Omega}/A_\Omega = 1/21$. The square-law output $\frac{1}{2}A^2 = \varepsilon^2(1+\cos\Omega t)$ contains only DC and Ω. For a mixed detector $F(A) = c_1A + c_2A^2$ the pre-network ratio is

$$r_{\text{det}} \equiv \left|\frac{Y_{2\Omega}}{Y_\Omega}\right| = \frac{1/5}{1 + \frac{3\pi}{4}\, c_2\varepsilon/c_1}, \tag{17}$$

so measuring r_{det} estimates $c_2\varepsilon/c_1$ directly.

Two effects make the harmonic ratio usable only with care, and the second decides how to run the test. First, a smooth detector does generate a second harmonic beyond quadratic order, $Y_{2\Omega}/Y_\Omega \sim (c_4/c_2)\varepsilon^2$, so the square-law signature is a *vanishing* ratio in the weak-field limit, not an exact zero. Second, and more seriously, the recurrent network multiplies each harmonic by its own transfer gain, $r_{\text{meas}} = r_{\text{det}}\,|G(2\Omega)/G(\Omega)|$. A resonant column suppresses the second harmonic hard: driven at $\Omega = \omega_0$ with $\mathcal{Q} = 10$, a true 20% ratio reads as 0.7%, enough to make an envelope follower look square-law. The resonance is thus what would hide the discriminator, so the test must be run *off* resonance: at $\Delta f \simeq f_0/4$ both lines sit on the flat part of G, where $|G(2\Omega)/G(\Omega)| \approx 1.22$–$1.25$ across $\mathcal{Q} = 3$–30, or with G measured independently by a weak sweep of direct low-frequency stimulation (transcranial alternating-current stimulation, tACS) and deconvolved.

An amplitude sweep tests the scaling rather than one ratio. An envelope-following detector gives $Y_\Omega \propto \varepsilon$ with the harmonic ratio pinned at 1/5; a weak square-law detector gives $Y_\Omega \propto \varepsilon^2$ with a ratio growing as ε^2. The log–log slope of the envelope-locked response against field amplitude therefore separates the classes without requiring absolute calibration; the ε^2 control of §4.4 is that measurement, performed in the model.

Beyond harmonics and amplitude scaling, the transduction class fixes the spatial map. Define the excursion as $\mathcal{M}[y] \equiv \max_t y - \min_t y$ of a periodic quantity $y(t)$. The conventional TI envelope map is $\mathcal{M}[A] = 2\min(\varepsilon_1, \varepsilon_2)$, whereas the square-law detector responds to $\mathcal{M}[\frac{1}{2}A^2] = 2\varepsilon_1\varepsilon_2$, so the two are related pointwise by

$$\mathcal{M}\big[\tfrac{1}{2}A^2\big] = \max(\varepsilon_1, \varepsilon_2)\;\mathcal{M}[A]. \tag{18}$$

The square-law map is the conventional envelope-excursion map multiplied, at each point, by the dominant local polarization. It therefore does not preserve conventional TI focality. In typical montages, where the dominant carrier is substantially larger superficially than at depth, this reweighting degrades deep-to-superficial contrast: at $(\varepsilon_1, \varepsilon_2) = (10, 1)$ superficially against $(0.5, 0.5)$ at a matched deep target, $\mathcal{M}[A]$ favors the superficial point by 2× and $\mathcal{M}[\frac{1}{2}A^2]$ by 40×. The magnitude of the degradation is not fixed by this algebra and must be evaluated from the actual vector field distribution; a sufficiently weak second carrier can suppress the superficial product instead. The product law is not an account of TI focality.

The selectivity this mechanism does supply is dynamical rather than spatial. Writing $R_\Omega(\mathbf{x})$ for the demodulated response at the envelope frequency Ω produced at location $\mathbf{x}$, and $G_{\mathbf{x}}(\Omega)$ for the local network susceptibility there,

$$R_\Omega(\mathbf{x}) \;\propto\; \sigma''(v^*_{\mathbf{x}})\; G_{\mathbf{x}}(\Omega)\; \varepsilon_1(\mathbf{x})\, \varepsilon_2(\mathbf{x}), \tag{19}$$

a product of three factors. Field overlap sets where a difference-frequency drive is generated at all; the operating point and the network susceptibility set which of the driven populations amplifies it. Resonance does not override an unfavorable field product, but it can compensate for one. This is the radio analogy taken literally: received signal strength times receiver tuning.

Equation (19) is written for scalar projected fields. In general the coupling is vectorial and compartment-specific, $\varepsilon_i(\mathbf{x}) = \boldsymbol{\lambda}\cdot\mathbf{E}_i(\mathbf{x})$, so the mixing product $(\boldsymbol{\lambda}\cdot\mathbf{E}_1)(\boldsymbol{\lambda}\cdot\mathbf{E}_2)$ is signed: its magnitude follows the product of the projected amplitudes, while its phase inverts with either the sign of σ'' or the relative sign of the two projections. The derivations below take the collinear, scalar case.

2.5 Amplification: the synaptic low-pass and the network resonance

Synaptic filtering suppresses the carrier after the nonlinearity has generated the beat. Each JR excitatory synapse has transfer function $H_s(\omega) = Aa/(i\omega + a)^2$, a second-order low-pass with characteristic frequency $a/(2\pi) \approx 16$ Hz. It passes a 10 Hz component with relative amplitude about 0.7, while reducing a 100 Hz component to about 2.5% (Fig. 5). Provided the carrier does not itself excite a responsive mode, the loop therefore reads predominantly the generated low-frequency drive.

What turns this recovered beat component into a large, frequency-selective response is the network. Linearizing the mass about its fixed point gives a leading eigenvalue pair $\mu_\pm = -\gamma \pm i\omega_0$; near the Hopf the response is dominated by this critical mode, so the whole network behaves as a single weakly damped harmonic oscillator with damping γ and natural modal frequency ω_0(the gain below is its one-mode, center-manifold reduction). Below a supercritical Hopf, $\gamma \to 0^+$ and the mass is a sharply tuned (high quality-factor $\mathcal{Q} = \omega_0/2\gamma$) resonator; driving it with the demodulated beat component (10) at Ω gives the resonance gain of a damped linear oscillator,

$$G(\Omega) \propto \left[(\omega_0^2 - \Omega^2)^2 + (2\gamma\Omega)^2\right]^{-1/2}, \qquad G(\omega_0) \propto \frac{1}{2\gamma\omega_0},$$

a resonant response. A constant-numerator two-pole approximation gives

$$\mathsf{G}(\Omega) \propto \left[(\omega_0^2 + \gamma^2 - \Omega^2)^2 + (2\gamma\Omega)^2\right]^{-1/2}, \qquad \mathsf{G}(\omega_0) \propto \frac{1}{2\gamma\omega_0} \quad (\gamma \ll \omega_0), \tag{20}$$

so the steady response $\sim A_\Omega\, G(\Omega)$ peaks at $\Omega = \omega_0$ (a Lorentzian in power) with a height that diverges as the Hopf is approached, within the weak-drive regime where the linear response holdsnear ω_0, with an approximately Lorentzian power profile. Here ω_0 is the imaginary part of the eigenvalue; the undamped frequency of the canonical oscillatordiffers from it by a term of order γ^2, immaterial near the Hopf canonical oscillator's undamped frequency is $\sqrt{\omega_0^2 + \gamma^2}$. Its peak is at $\sqrt{\omega_0^2 - \gamma^2}$ when $\omega_0 > \gamma$. The full network transfer also contains frequency-dependent input and output projections, so this expression does not fix its exact peak. The leading $1/\gamma$ growth holds near a simple Hopf with nonzero projections, within the weak-drive regime. Above the Hopf the mass is an autonomous limit cycle at $\omega_0$appears, and the demodulated drive *entrains* it (can entrain it within an Arnold tongue), giving a response peak near ω_0 that grows with cycle amplitude ; a large lock-in amplitude alone does not establish that phase capture.

Collecting the stages, the response at the beat is

$$R_\Omega \simeq G(\Omega;\gamma)\; D\; \lambda_f(\omega_1) E_1\; \lambda_f(\omega_2) E_2, \tag{21}$$

where λ_f maps field to local carrier polarization, D converts the product of those polarizations into a beat drive, and G maps that drive to the observed response. Their normalization depends on where the generated drive enters. For JR, $D = \frac{1}{2}\sigma''(v^*)$ and G is the response to a generated rate drive. For fast-carrier QIF in the normalized units of Eq. (4), $D = 1$ for the v^2 source and G includes its conversion through the voltage and rate dynamics. Thus the population readout is included once. In these limits D is independent of carrier frequency at fixed polarization; across the dynamic crossover it acquires frequency dependence. A carrier sweep and a beat sweep therefore constrain different stages rather than a single effective gain.

The resonance does not supply the quadratic mixer. The cubic Hopf normal form responds to an in-band drive but has no second-order difference-frequency source (App. C). A large resonant susceptibility alone therefore does not establish beat generation.

2.6 Carrier access depends on the effective membrane response

Carrier independence at fixed polarization does not imply independence at fixed applied field. To quantify access, consider a first-order membrane response $H_m(\omega) = 1/(1 + i\omega\tau_m)$, with effective

time constant τ_m. For nearby carriers, the two polarizations acquire nearly the same attenuation. The quadratic beat then satisfies

$$\frac{A_\Omega(f_c)}{A_\Omega^{\text{direct}}} \simeq |H_m(\omega_c)|^2 = \frac{1}{1+(\omega_c\tau_m)^2} \sim \frac{1}{(\omega_c\tau_m)^2} \quad (\omega_c\tau_m \gg 1), \tag{22}$$

where A_Ω^{direct} is the beat generated with the same static coupling and no access attenuation. This filter belongs either in the field-to-polarization map or in the membrane equation that computes that polarization.

Somatic passive time constants are commonly 10–30 ms; reported human pyramidal values include approximately 12 ms [27] and 16.5 ± 3.7 ms [28]. For the illustrative $\tau_m = 16$ ms used here, the power factor $|H_m|^2$ is about 10^{-4} at 1 kHz, 2.5×10^{-5} at 2 kHz, and 10^{-6} at 10 kHz. A static nonlinearity placed after this somatic response therefore receives strongly attenuated carriers.

A shorter effective time changes this conclusion quantitatively. The sensitivity case $\tau_m = 0.2$ ms gives $|H_m|^2 \approx 0.39$ at 1 kHz and 0.14 at 2 kHz (Fig. S5). These are assumed access parameters, not measured TI parameters of the AIS or a node. They can represent a faster compartment in Eq. (8), or motivate a shorter membrane time in a QIF reduction. In the latter description, the approach to a static transfer is governed by Eq. (6); the membrane filter must not be applied again outside the QIF equations. A short access time improves carrier transmission without, by itself, specifying the mixing coefficient or the remaining circuit resonance.

Element	Input	Illustrative corner	Interpretation
JR excitatory synapse	rate r	∼16 Hz	downstream synaptic filter
somatic access	field E	∼10 Hz	$\tau_m = 16$ ms example
fast effective access	field E	∼800 Hz	assumed $\tau_m = 0.2$ ms
channel kinetics	local voltage	model-dependent	part of the dynamic detector

Table 2: Distinct response stages. The access corners illustrate specified time constants; the fast row does not identify an anatomical compartment. Synaptic filtering follows beat generation, whereas access controls the carrier reaching the nonlinearity.

Geometry can also alter the relevant response mode. For a passive cable, the magnitude of the frequency-dependent space constant is

$$\ell(\omega) = \ell_0(1+\omega^2\tau_m^2)^{-1/4}, \tag{23}$$

where ℓ_0 is its static value. At 1 kHz and $\tau_m = 16$ ms, this length is about one tenth of its static value, so compartments that are strongly coupled at low frequency can respond differently to the carrier. A somatic charging time alone therefore does not determine every extracellular-field response mode. The periaxonal and field-charging evidence is considered in §5.

Channel kinetics contribute to the effective dynamic mixing response. A gate filter added outside the detector must not duplicate dynamics the detector already contains, and where the detector lacks them, as QIF lacks sodium-channel kinetics, the filter needs its own model or measurement; neither a static sigmoid nor QIF specifies a universal 1 kHz gate cutoff. Equation (13) gives the QIF realization of this response. Carrier sweeps can constrain the combined access and mixing response, while beat-frequency sweeps probe the downstream amplifier.

2.7 Operating-point dependence

Because $A_\Omega \propto \sigma''(v^*)$, demodulation is governed by the curvature at the operating point, and in particular by how far v^* sits from the sigmoid inflection (Fig. 6). The Population Excitation–

Inhibition Index (PEIX) of [13] is a related but distinct quantity: the sigmoid gain $\sigma'(v^*)$ normalized to its maximum $\sigma'(v_0) = e_0\rho/2$ at the inflection,

$$\mathrm{PEIX}(v^*) \equiv \frac{\sigma'(v^*)}{\sigma'(v_0)} = \mathrm{sech}^2\left[\tfrac{\rho}{2}\,(v^* - v_0)\right] \in (0, 1], \tag{24}$$

a dimensionless read-out of where v^* sits, the side given by $\mathrm{sign}(v^* - v_0)$. PEIX thus tracks σ' (maximal at the inflection v_0), whereas the demodulation gain tracks σ'' (zero at v_0, peaked on the flanks, and sign-reversing across it): the two are complementary, and PEIX peaks where the demodulation gain vanishes.

This complementarity is a property of the memoryless detector. In the exact mean field at a fast carrier the rectified DC term follows the slope F' and is largest at the inflection (§2.3), so the relation between PEIX and TI efficacy is model-dependent; PEIX remains a measurable read-out of the operating point. In the Jansen–Rit detector, anything shifting v^* (neuromodulation, attention, arousal, or pathology such as psychedelics or PV-interneuron dysfunction in Alzheimer's disease) scales, and can flip the sign of, the TI response; in the dynamic detector the same shifts act through F' and the susceptibility, without a sign rule. The state dependence is the falsifiable handle; the sign reversal is specific to the memoryless model.

3 Methods

3.1 Single-column Jansen–Rit: integration, lock-in, and controls

All symbols and units are collected in Table 4 (App. A). We integrate the single-column JR model of §2.1 (Eqs. (28), parameters in Table 5) as six first-order ODEs. The TI field enters only the pyramidal output sigmoid, Eq. (28), as $s(t)$; the read-out $v = y_1 - y_2$ is *not* fed the field directly, so any power at Ω in v is produced by the nonlinearity and the recurrent loop, not by trivial pass-through. Unless stated otherwise $f_c = 100$ Hz and $m = 1$.

We integrate with a fixed-step fourth-order Runge–Kutta (RK4) scheme, $\Delta t = 2 \times 10^{-4}$ s (50 samples per carrier cycle at 100 Hz; reduced to 10^{-4} s for carrier sweeps up to 300 Hz). The kHz-carrier runs of Fig. S9 use $\Delta t = 2 \times 10^{-5}$ s for the carrier sweep to 4 kHz (25 samples per carrier cycle at 2 kHz, 12.5 at 4 kHz) and 1.5×10^{-5} s for the 2 kHz output spectrum. Halving each step changes the reported lock-in amplitudes by less than 1%. The 10 kHz figures quoted in §2.6 are analytic evaluations of Eq. (22), not simulations.

For each measurement the system is settled for 10–16 s (longer near the Hopf, where damping is weak) before a 3–20 s measurement window; the resonance sweeps use a 20 s window so the lock-in averages the limit-cycle beating on the entrainment sidebeating in the autonomous regime. Parameter sweeps are vectorized: the state is an $(N, 6)$ array advanced simultaneously for all N parameter combinations, so a full resonance map runs in seconds.

The full bifurcation diagram (Fig. 2) is computed by numerical continuation of the fixed-point and limit-cycle branches. We independently locate the operating supercritical Hopf by solving, for each p, the self-consistent scalar equation for the resting fixed point $v = y_1 - y_2$, forming the 6×6 Jacobian numerically and diagonalizing it: the Hopf is the p at which the leading eigenvalue pair crosses the imaginary axis with $\mathrm{Im}\,\mu_+$ in the alpha band. This gives $p \approx 315$ Hz and $f_0 = \mathrm{Im}\,\mu_+/2\pi \approx 11.1$ Hz—consistent with the continuation and with the JR bifurcation analysis of [29]. For $p > 315$ the fixed point is a stable focus (resonator); between the saddle-node on an invariant circle (SNIC, $p \approx 114$) and the Hopf the column free-runs on the alpha limit cycle.

The response at the envelope frequency is read out with a software lock-in amplifier referenced to Ω—a standard way to isolate the component of a signal at one chosen frequency: multiply by sine and cosine at Ω and average, so everything *not* at Ω cancels and only the envelope-locked amplitude survives. averaging suppresses other frequencies and estimates the component at Ω. A finite window

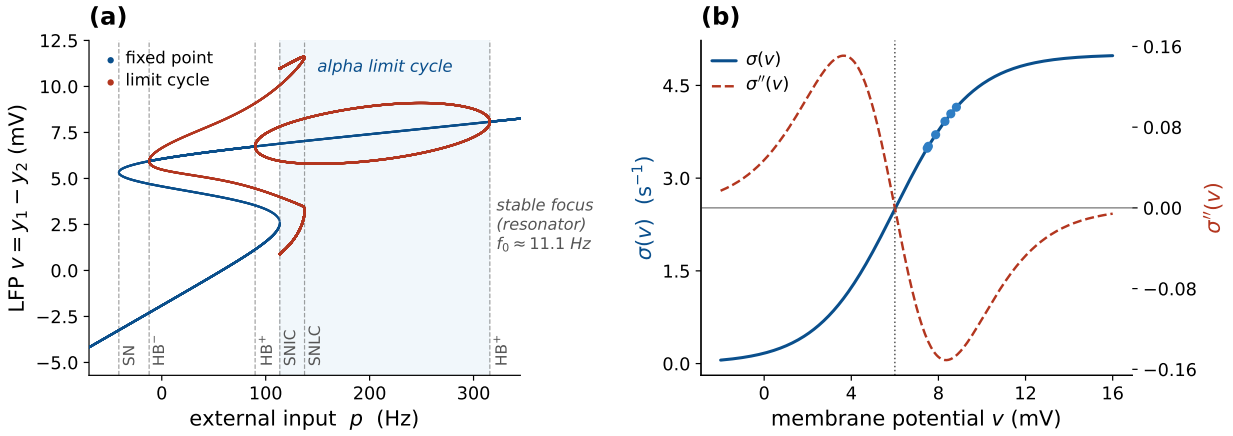


Figure 2: The Jansen–Rit operating regime: bifurcation and sigmoid curvature. *(a)* JR bifurcation diagram from numerical continuation—the LFP $v = y_1 - y_2$ along the fixed-point branch (blue) and the min/max of the limit-cycle branches (red) vs. external input p, with *solid* stable and *faded* unstable. The alpha limit cycle (shaded) is bounded by a saddle-node-on-invariant-circle (SNIC, $p \approx 114$) and the supercritical Hopf ($p \approx 315$, $f_0 \approx 11.1$ Hz); beyond the Hopf the fixed point is a stable focus, the near-Hopf resonator used here. Further codim-1 points are marked (saddle-node SN, Hopf HB$^{\pm}$, saddle-node of limit cycles SNLC). *(b)* The sigmoid $\sigma(v)$ and its curvature $\sigma''(v)$, which sets the demodulation gain and vanishes at the inflection v_0. Dots mark the operating points reached by the closed-loop model for the p values used here.

does not eliminate neighboring frequencies exactly. We multiply $v(t)$ by quadrature references and integrate over a Hann-windowed measurement window to obtain the in-phase (I) and quadrature (Q) components,

$$I = \frac{2}{\sum_k w_k} \sum_k w_k \, (v_k - \bar{v}) \cos \Omega t_k, \quad Q = \frac{2}{\sum_k w_k} \sum_k w_k \, (v_k - \bar{v}) \sin \Omega t_k, \quad A_\Omega = \sqrt{I^2 + Q^2}, \quad (25)$$

with w a Hann window and $\bar{v} = \sum_k w_k v_k / \sum_k w_k$ the windowed mean. For a pure tone $v = A \cos(\Omega t + \phi)$ the product-to-sum identity gives $I \to A \cos \phi$ and $Q \to -A \sin \phi$, so $A_\Omega \to A$; the factor $2/\sum_k w_k$ is the normalization that returns the physical amplitude, and A_Ω equals twice the magnitude of the windowed Fourier coefficient at Ω. Out-of-band components can leak into the estimate, particularly the DC level of v ($\bar{v} \sim 8$ mV, far larger than the demodulated signal). Over an exact integer number of Ω-periods $\sum_k w_k \cos \Omega t_k = 0$ and there is no leakage, but in general it is nonzero, The finite-window projection of a constant onto the quadrature references need not vanish, so we subtract $\bar{v}$ explicitly; this makes the metric accurate down to the 10^{-8} level needed for the kHz analysis (§2.6). The For the open-loop rate readout, the signed in-phase component I alone recovers $\frac{1}{2}\sigma''(v^*)\varepsilon^2 m$ including its sign, which we use to verify the curvature law (Fig. 6).

We compare the *open-loop detector*, the firing-rate sigmoid at a fixed operating point v^* without recurrence, with the *closed-loop* column, the full recurrent Jansen–Rit with its feedback. The open-loop detector passes the two-tone field through σ at v^* and applies Eq. (25), isolating the pure demodulation law (Figs. 5, 6, S5). The *bifurcation diagram* records the field-free min/max of v vs. p, each run initialized at its fixed point plus a small kick. The *two-dimensional map* evaluates A_Ω over an (Ω, p) grid. We verify the mechanism three ways: the square law (A_Ω vs. ε on a well-damped focus, expecting a log–log slope of 2); a linearization control (replacing σ in Eq. (28) by its tangent at v^*, which must abolish the Ω response); and a check of σ', σ'' against finite differences. All code is openly available (see Code and reproduction limits are listed under *Code and data availability*).

3.2 Laminar two-band model (LaNMM)

We complement the single-column analysis with simulations of the laminar neural mass model (LaNMM) of §2.1. We integrate the full 28-variable column [13, 25], with the field entering as in the single JR column, as a membrane polarization added inside the sigmoid argument of the target population,

$$\varphi_X(t) = \sigma\big(v_X(t) + s(t)\big), \qquad X \in \{P_1, P_2\}, \tag{26}$$

with $s(t)$ the AM or two-tone field of §2.2 (amplitude ε in mV, beat $\Omega = 2\pi\Delta f$, carrier $\omega_c = 2\pi f_c$) and all three external drives held flat at their baselines (Fig. S2). A perturbation of an external input *rate* would require clipping at zero once its excursion exceeds the baseline, and a hard clip is a half-wave rectifier—a diode detector placed upstream of the sigmoid, which would inject a line at Δf into the drive before the population nonlinearity received it. A signed membrane polarization carries no such constraint and none is applied. Because the LaNMM and JR sigmoids share the voltage scale $1/\rho \approx 1.8$ mV, ε is directly comparable between the two models.

Integration is a vectorized fixed-step RK4 ($\Delta t = 10^{-4}$ s) advancing the whole parameter grid simultaneously, as in the JR sweeps. In place of the lock-in (Eq. (25)) we read the The maps report the alpha-band (8–12 Hz) power of the P_1 and P_2 membrane potentials as the mean squared magnitude of the Hann-windowed fast Fourier transform (FFT) over the band, in arbitrary units, over a post-transient window, a phase-agnostic measure suited to the entrainment regime, where lock-in phase slips would otherwise complicate the read-out. This measure includes autonomous and driven activity and does not isolate a phase-coherent response to stimulation.

Two sweeps probe the column: an amplitude–beat sweep over $(\varepsilon, \Delta f)$ at fixed carrier(the Arnold tongue), and a carrier–beat sweep over $(f_c, \Delta f)$ at fixed ε, built on the LaNMM module of [13]. The maps (Figs. S1, S7) show the *signed* stimulation-induced change, alpha power minus the unstimulated ($\varepsilon = 0$) baseline, on a zero-centered scale; over most of the P_1-driven grids the change is negative. For the alpha resonance we instead drive the deep P_1 loop directly and sweep its input against Δf, reading the lock-in (Eq. (25)) of v_{P_1} at Δf.

The additional carrier comparison in Appendix E uses the lock-in of v_{P_1}, averaged at each carrier over 17 beats: 7–9 and 12.25–14 Hz in 0.25 Hz steps. These lie more than 1.5 Hz from the field-free alpha peak near 10.6 Hz. We denote this arithmetic mean by $S(f_c)$. The carrier grid is 25–80 Hz in 1 Hz steps, with equal tone amplitudes $\varepsilon = 1.5$ mV for P_2 drive and 0.5 mV for P_1 drive. After 2 s of settling, we compare 3 and 10 s measurement windows. Field-free controls give mean background amplitudes of 0.0048 and 0.0012 mV over the same beats. This background includes a persistent component near 8 Hz, so it is not solely finite-window leakage. The statistic compares carrier profiles within each drive condition; the unequal amplitudes do not support a direct sensitivity comparison between targets.

3.3 Exact next-generation mean field (NMM2 PING)

We test the mechanism in the exact next-generation mean field (NMM2, §2.1), following the Rosetta Stone formulation of [15] (which places the Montbrió–Pazó–Roxin reduction [18] on a common footing with the JR and LaNMM models used here), where the firing-rate nonlinearity is the derived MPR dynamics of Eq. (4) rather than a postulated sigmoid. We use a two-population excitatory–inhibitory (PING) motif [19, 20, 15]: each population $\alpha \in \{E, I\}$ is an MPR mean field (firing rate r_α, mean potential v_α) with membrane time τ_α, coupled through second-order synapses,

$$\begin{aligned} \tau_E \dot r_E &= \Delta/(\pi\tau_E) + 2 r_E v_E, & \tau_E \dot v_E &= v_E^2 + \bar\eta - (\pi\tau_E r_E)^2 + \tau_E C\,(s_E - s_I) + I_E(t), \\ \tau_I \dot r_I &= \Delta/(\pi\tau_I) + 2 r_I v_I, & \tau_I \dot v_I &= v_I^2 + \bar\eta - (\pi\tau_I r_I)^2 + \tau_I C\,(s_E - 2 s_I), \end{aligned} \tag{27}$$

with second-order synaptic activations $s_E = \hat K_a[r_E]$ (excitatory, time constant τ_a) and $s_I = \hat K_g[r_I]$ (inhibitory, τ_g), each obeying the same critically-damped operator as the JR synapse, $\tau^2 \ddot s + 2\tau \dot s + s =$

r; here C is the global synaptic gain and the weights $(A_{ee}, A_{ei}, A_{ie}, A_{ii}) = (1, 1, 1, 2)$ set the E and I rows: the E membrane sees $C\,(s_E - s_I)$ and the I membrane $C\,(s_E - 2s_I)$, the only asymmetry being the doubled $I \to I$ weight $A_{ii} = 2$.

The common background drive $\bar{\eta}$ is the bifurcation parameter: raising it past a supercritical Hopf at $\bar{\eta}_H = 1.110$ opens a gamma limit cycle (the gamma counterpart of the JR alpha Hopf). The applied field enters the excitatory voltage equation as a current-like forcing, $I_E(t) = P\,E(t)$ in the convention of the exact mean field [19], with the dipole coupling P instantaneous, as two genuine tones at $f_c \mp \Delta f/2$ (carrier $f_c = 300$ Hz, envelope Δf swept through the gamma band) of amplitude A_f in the dimensionless MPR units of v_E. The E membrane $\tau_E \dot{v}_E$ integrates this forcing into the carrier-frequency excursion $A_f/(\omega\tau_E)$ that the exact quadratic v_E^2 term rectifies, with no postulated sigmoid; the PING as run therefore computes membrane access with $\tau_m = \tau_E$.

We integrate with fixed-step RK4 ($\Delta t = 0.05$ ms) and read out the lock-in (Eq. (25)) of r_E at Δf over the $(\Delta f, \bar{\eta})$ plane. Parameters (Rosetta Stone PING [15]): $\Delta = 1$, global coupling $C = 15$, $\tau_E = 15$, $\tau_I = 7.5$, $\tau_a = 10$, $\tau_g = 2.5$ ms, with $\bar{\eta}$ swept through the supercritical Hopf at $\bar{\eta}_H = 1.110$ ($f_0 = 54.0$ Hz), located by bisection on the leading eigenvalue of the mean-field Jacobian. The simulations retain these finite membrane times; Eq. (6) characterizes the fast-membrane limit.

Two parameters reach this gamma Hopf, and we use both as criticality knobs—just as the external drive p and the coupling C both reach the JR alpha Hopf. The background drive $\bar{\eta}$ (above) is swept for the resonance map (Fig. S8); the global coupling $C\,(\equiv J)$ is swept for the J-curve (Fig. S10): we vary J at fixed $\bar{\eta}$ toward the gamma Hopf J^* (located by bisection on the leading Jacobian eigenvalue) and read the lock-in peak of r_E over Δf. Unlike the JR J-curve, *no operating-point pinning is needed*: at this carrier the generated difference-frequency source is operating-point independent to about 1% this sweep does not pin the operating point. In the fast-carrier approximation the leading voltage source is fixed by the carrier excursion (§2.3), so sweeping . The four-state check bounds the error of that approximation at the tested points; it does not establish source invariance over the full J changes the damping γ and the modal projections but not the source, and the gain is read as the response per unit sourcesweep. The plotted normalization therefore uses the leading fast-carrier source, while the finite-carrier response can retain operating-state dependence.

3.4 QIF spiking network (microscale of NMM2)

NMM2 is the exact mean field of an all-to-all network of QIF neurons [18, 15, 20], so we integrate that network directly to test the prediction at the spike level (§4.8): $N = 8000$ QIF neurons per population, parameters identical to the PING mean field (Eq. (27)), excitabilities $\eta_j \sim \text{Lorentzian}(\bar{\eta}, \Delta)$ sampled by deterministic quantiles, second-order synapses driven by the empirical population rates, and a genuine two-tone field entering the excitatory membranes. Spiking and threshold dynamics are where the AM surrogate and the physical waveform cannot be assumed equivalent beyond perturbation theory, so this run uses two tones throughout.

The bifurcation parameter is the common background drive $\bar{\eta}$, with the gamma Hopf at $\bar{\eta}_H = 1.110$ ($f_0 = 54.0$ Hz) from the mean-field Jacobian; the spiking network shows the same threshold and an autonomous $f_0 \approx 53$ Hz, with no finite-size offset to explain. The carrier is $f_c = 300$ Hz and the field amplitude $A_f = 35$. Because this is a *gamma* circuit, the TI beat Δf is set in the gamma band: $\Delta f = 55$ Hz *near* the forced gamma resonance ($\bar{\eta} = 0.85$, below the Hopf) and $\Delta f = 42$ Hz in the oscillatory regime ($\bar{\eta} = 1.5$, above the Hopf)—a detuning of ≈11 Hz below the autonomous $f_0 \approx 53$ Hzthat places the beat outside the . The spectra distinguish the beat-locked rate component from the persisting gamma rhythm; detuning alone does not establish a boundary of the 1:1 Arnold tongue , so the above-Hopf response is gating, not entrainment (§F).

The network is integrated with Euler steps of 0.0025 ms, settled for 800 ms (over four relaxation times at $\bar{\eta} = 0.85$, where the mean-field relaxation time is 176 ms) and measured over an integer number of beat cycles, 44 at 55 Hz and 34 at 42 Hz (800 and 810 ms), so that the finite-window bias of

phase statistics vanishesremoving the phase-coverage bias from incomplete beat cycles. Envelope-locked timing is quantified by the quadrature lock-in A_Ω of $r_E(t)$ at Δf, reported as the modulation depth $A_\Omega/\langle r_E\rangle$ (a stable measure; the off→on lock-in ratio would divide by the field-free floor), and per neuron by the pairwise phase consistency of each neuron's spike phases at Δf [30], which is unbiased in the spike count, over neurons with at least ten spikes in the window.

Halving the time step changes the lock-in and the pooled vector strength by under 1%; doubling the spike-detection threshold changes the lock-in by about 1% and the mean rate by 2%, but the pooled vector strength in the forced regime by about 45%, so phase concentration, unlike rate modulation, is sensitive to how spike times are defined.

3.5 Coupling sweeps, timing, and the tACS control (Jansen–Rit)

The coupling sweeps of Figs. 9 and S11, and the transcranial alternating-current stimulation (tACS) control of Fig. S3, use the single JR column with the operating point v^* pinned: for each global connectivity C we solve the field-free fixed-point relation analytically for the external drive $p(C)$ that holds v^* (hence $\sigma''(v^*)$) fixed, vary $C\,(=J)$ toward the alpha Hopf, and read γ, ω_0 from the 6×6 Jacobian. The field is the AM surrogate of Eq. (12) for TI (Fig. 9; AC lock-in vs DC mean rate for Fig. S11) or a direct in-band sinusoid $s(t)=\varepsilon\cos\Omega t$ ($\varepsilon = 0.1$ mV) for the tACS control (Fig. S3), each read out by the lock-in of v at Δf.

3.6 Vocabulary: forced response, entrainment, and gating

"Entrainment" is used in several senses, so we fix three terms. *Forced response* is the driven, non-autonomous case below the Hopf, quantified by the lock-in amplitude at the beat Δf (Eq. (25)). *Entrainment* is reserved for its dynamical-systems meaning, frequency capture of a *self-sustained* oscillator [31]; in the maps we screen for it with the dominance criterion $|f_{\text{out}} - \Delta f| < 0.3$ Hz on the dominant output frequency, a necessary but not sufficient condition for . This identifies frequency dominance, not phase capture. *Gating* is amplitude modulation of a persisting rhythm without frequency capture [32, 33]. Capture and gating are dynamically different, and the same word would otherwise cover both; . The QIF rate fold measures beat-locked firing, which does not by itself establish gating of gamma amplitude. Appendix F gives the metrics and the Arnold-tongue frequency-dominance protocol.

4 Results

Two rungs of the modeling ladder carry the evidence: the single Jansen–Rit column (closed form, memoryless detector) and the exact next-generation mean field (NMM2, the nonlinearity derived rather than postulated) with its spiking network. Each shows the same pair, quadratic difference-frequency generation followed by near-Hopf amplification, with different detector coefficients. Two mesoscale signatures follow: the network's own coupling sets the gain at fixed generated drive (the J-curve, §4.6), and the resonance amplifies the envelope-locked modulation far more than the mean rate (§4.7), which the QIF network tests at the spike level. The laminar two-band column, at carriers of 25–80 Hz and drives up to 3 mV, is an extension (App. E).

4.1 The Jansen–Rit sigmoid demodulates: an alpha line from a carrier-only input

Figure 2 orients the system: a supercritical Hopf at $p\approx 315$ with $f_0\approx 11.1$ Hz, and a sigmoid whose curvature peaks well off the inflection, so the closed-loop operating points sit where σ'' is large. An input with no spectral power in the alpha band, with lines only at the two tones $f_c \mp \Delta f/2$, produces an output oscillation at the 11.1 Hz envelope frequency and an alpha peak in the output spectrum that is absent from the input (Fig. 3).

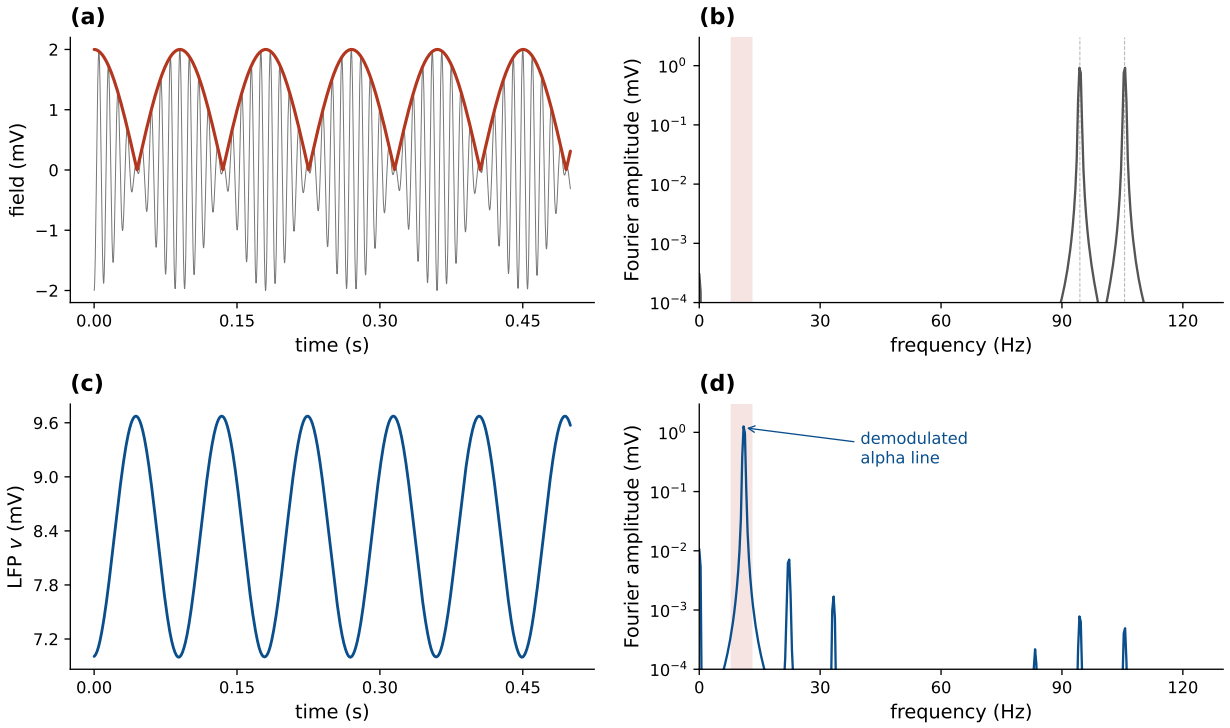


Figure 3: An alpha rhythm is synthesized from a two-tone TI input (Jansen–Rit below Hopf). The field is the physical TI waveform, two equal tones at $f_{1,2} = f_c \mp \Delta f/2$, not the amplitude-modulated surrogate. *(a)* The field $s(t)$ and its envelope $A(t) = 2\varepsilon|\cos(\Omega t/2)|$—a rectified cosine, not a sinusoid; it is A^2 that is sinusoidal at Ω (§2.2). *(b)* The input amplitude spectrum has lines only at f_1 and f_2 (94.45 and 105.55 Hz, $\Delta f = 11.1$ Hz) and no third line at the carrier; in the alpha band (shaded) it is 1.6×10^{-8} of the tone amplitude, finite-window leakage rather than physical power. *(c)* The output $v = y_1 - y_2$ oscillates at the envelope frequency. *(d)* The output spectrum has a strong peak at the beat, 11.1 Hz, synthesized by the sigmoid and absent from the input.

4.2 Near the Hopf, the demodulated beat drives a sharp resonance

The resonance is quantified in Fig. 4. In the fixed-point regime ($p > 315$, a stable focus) the response is a Lorentziancentered at approximately Lorentzian, peaking near $f_0$whose , and its height grows monotonically as the Hopf is approached ($0.23 \to 0.43 \to 0.70$ mV; Fig. 4), i.e. gain $\propto 1/\gamma$. This is forced gain: with no drive the focus is silent at Ω, so all power at Ω is synthesized by the demodulating nonlinearity and amplified by the recurrent loop. Above the Hopf ($p < 315$) the column free-runs at $f_0$and the demodulated drive instead phase-locks that autonomous alpha within a 1:1 Arnold tongue; because . A lock-in amplitude at Ω then conflates the driven response with the free-running cycle, we characterize that can then contain both the forced component and a contribution from the autonomous cycle. We characterize this regime with the dominant output frequency f_{out} rather than the lock-in amplitude (Fig. S4), which identifies a frequency-dominance region but does not establish phase capture.

4.3 Carrier independence and the kHz roll-off

At fixed post-coupling polarization the demodulated response is flat across the carrier band, for both the open-loop detector and the closed-loop column near the Hopf (Fig. 5). As a function of the *applied* field, by contrast, the membrane low-pass makes the response roll off as $1/f_c^2$ above the corner (Fig. S5): passive somatic demodulation is suppressed four to six orders of magnitude at kHz in the 16 ms access model, whereas the assumed 0.2 ms response retains appreciable carrier access.

We also drive the full recurrent column with a kHz field, passing it through an explicit membrane low-pass (an extra first-order state, time constant τ) for each coupling route before it reaches the

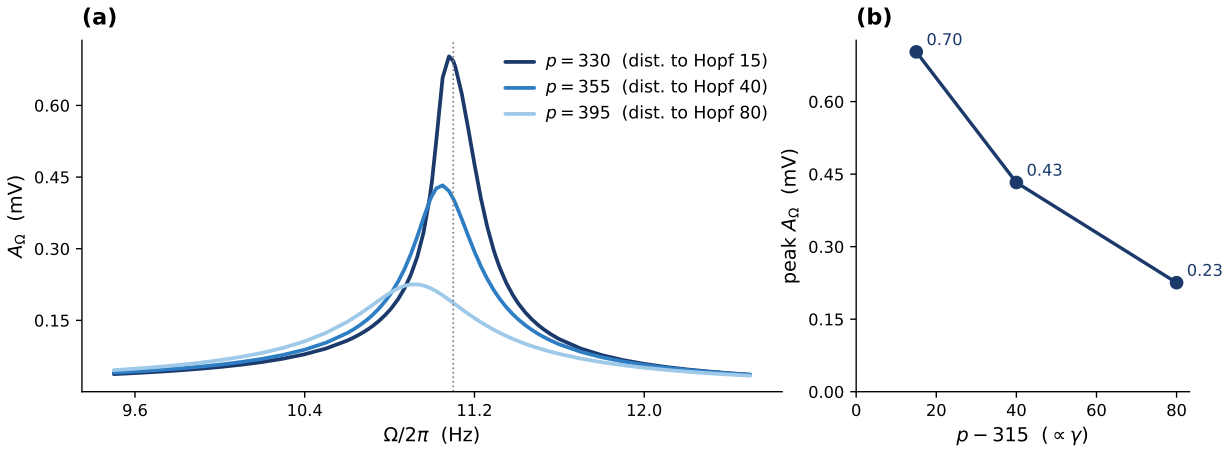


Figure 4: The demodulated beat drives a resonance that sharpens toward the Hopf (Jansen–Rit). Fixed-point regime ($p > 315$, stable focus): lock-in response at Ω vs. envelope frequency ($\varepsilon = 0.3$ mV). *(a)* The demodulated drive forces a an approximately Lorentzian resonance at near $f_0 \approx 11.1$ Hzwhose . The measured finite-amplitude peak redshifts slightly as the damping grows ($\omega_{\text{peak}} = \sqrt{\omega_0^2 - 2\gamma^2}$; $11.08 \to 10.93$shifts from 11.08 to 10.93 Hz across the three curves); as the operating state changes; Eq. (20) describes its near-Hopf scaling, not its exact location. The response carries no power at Ω in the absence of drive, so this is forced gain. *(b)* The peak height grows as the Hopf is approached ($p \to 315$, distance to Hopf $\to 0$). Three points cannot establish a power law; the $1/\gamma$ scaling is quantified over a decade, together with its saturation, in Fig. 9(c). The above-Hopf regime, where the demodulated drive entrains the with autonomous alpha activity, is characterized by output frequency in Fig. S4.

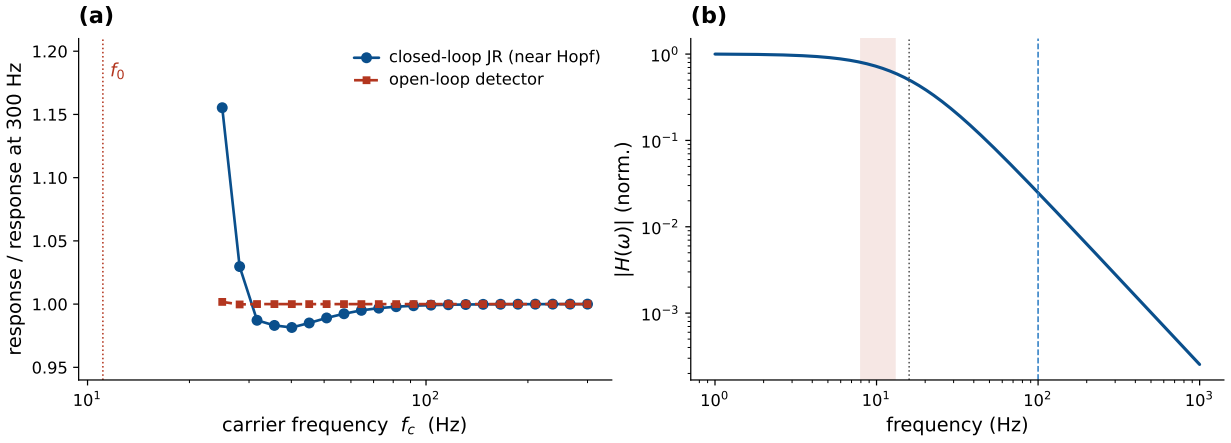


Figure 5: The demodulated response is carrier-independent at fixed polarization (Jansen–Rit). *(a)* The demodulated response is nearly flat across carrier frequency $f_c = 25$–300 Hz , both for the open-loop detector (exactly, by Eq. (10)) and for the closed-loop JR near the Hopf(which adds ∼60× resonant gain); , with deviations appear only as f_c approaches the natural band. Each curve is normalized by its own response at 300 Hz: 0.00670 s^{-1} open loop and 0.512 mV closed loop. Their ratio is a rate-to-voltage transfer of 76.4 mV s. The open-loop carrier independence follows to leading order from Eq. (10). *(b)* The second-order-synapse low-pass $|H_s(\omega)|/|H_s(0)|$ passes the envelope (∼0.7) and suppresses the 100 Hz carrier (∼2.5%). Dotted line: synaptic corner $a/2\pi \approx 16$ Hz; shaded band: envelope (8–13 Hz); dashed line: 100 Hz carrier.

sigmoid. The column demodulates and resonates at the recovered alpha in the fast-access case ($\tau = 0.2$ ms), as Eq. (22) predicts (Fig. S9a). Driving the fast-element route with two *genuine* tones at $f_{1,2} = 1994.54$ and 2005.46 Hz, centered near 2 kHz and beating at 10.91 Hz, the input carries 2.2×10^{-13} of its spectral amplitude in the 8–14 Hz band, i.e. none, while the output carries a line at the beat (Fig. S6), with the attenuation set by the analytic $|H_m|^2 = 0.137$ at 2 kHz for $\tau = 0.2$ ms. The kHz claim therefore rests on the two-tone waveform under the specified access assumption. The anatomical route is not determined by this calculation. Limited sensitivity to

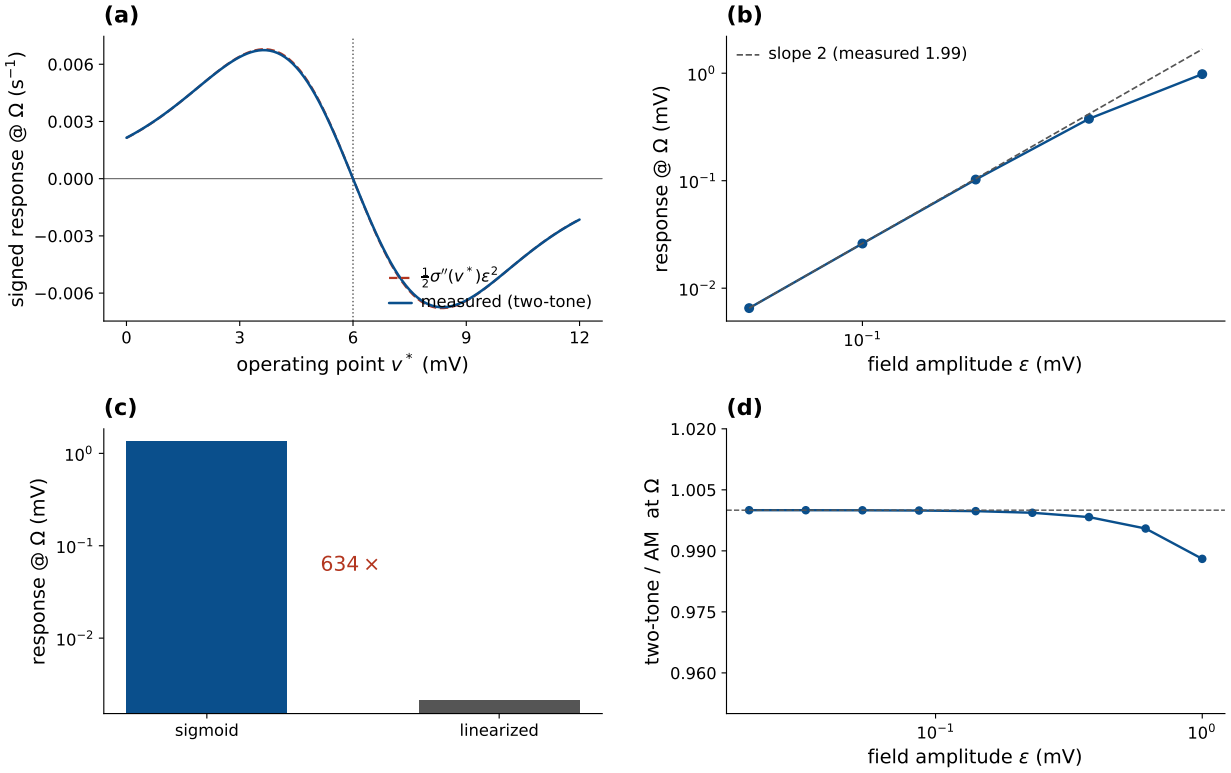


Figure 6: The curvature law, the square law, and the surrogate control (Jansen–Rit, genuine two tones). *(a)* The signed open-loop response tracks $\frac{1}{2}\sigma''(v^*)\varepsilon^2$ across the operating range (maximum deviation 0.9%), vanishing at the inflection v_0 and reversing sign across it. The mechanism is sign-agnostic: σ'' sets sign and phase while $|\sigma''|$ sets gain, so the resonance picture is unchanged up to an overall sign in the $\sigma'' > 0$ lobe, which this sweep spans. The sign flip is itself a prediction (§4.9). *(b)* The closed-loop response scales as ε^2, measured slope 1.99. *(c)* Replacing the field-receiving sigmoid by its tangent collapses the response 634×. *(d)* Surrogate control: the two-tone/AM ratio at Ω approaches 1 as $\varepsilon \to 0$ (1.0000 at 0.02 mV, 0.988 at 1 mV) , licensing the AM surrogate for the dense open-loop detector at $v^* = 8$ mV. This checks the leading local source; it does not validate the recurrent AM-surrogate sweeps of Fig. 9 , which read only that component, and for nothing elsenear the Hopf.

unmodulated kHz fields has been reported in hippocampal network oscillations [34].

4.4 The nonlinearity is the detector: the σ'' curvature law and its controls

The signed open-loop response tracks $\frac{1}{2}\sigma''(v^*)\varepsilon^2 m$ across the operating range, vanishing and reversing sign at the inflection v_0 (Fig. 6)—demodulation is the sigmoid-curvature term of Eq. (10), and the closed-loop operating points sit where σ'' is large and negative.

Two controls test the proposed source of the beat component (Fig. 6b,c): the response scales as ε^2 at small drive (measured log–log slope 1.99 against the predicted 2), and replacing the field-receiving sigmoid by its linearization collapses the response by 634× (1.34 → 0.0021 mV)—the nonlinearity is the detector, and its curvature is the gain. A third panel checks the surrogate at one operating point: for the open-loop detector at $v^* = 8$ mV the two-tone and AM responses at Ω agree to within 10^{-4} at $\varepsilon = 0.02$ mV and to 1.2% at 1 mV (Fig. 6d). On that basis the dense perturbative sweeps below, which read only the Ω component, use the surrogate; the comparison does not test the recurrent response near the Hopf, where the two waveforms' different DC terms could shift the operating state.

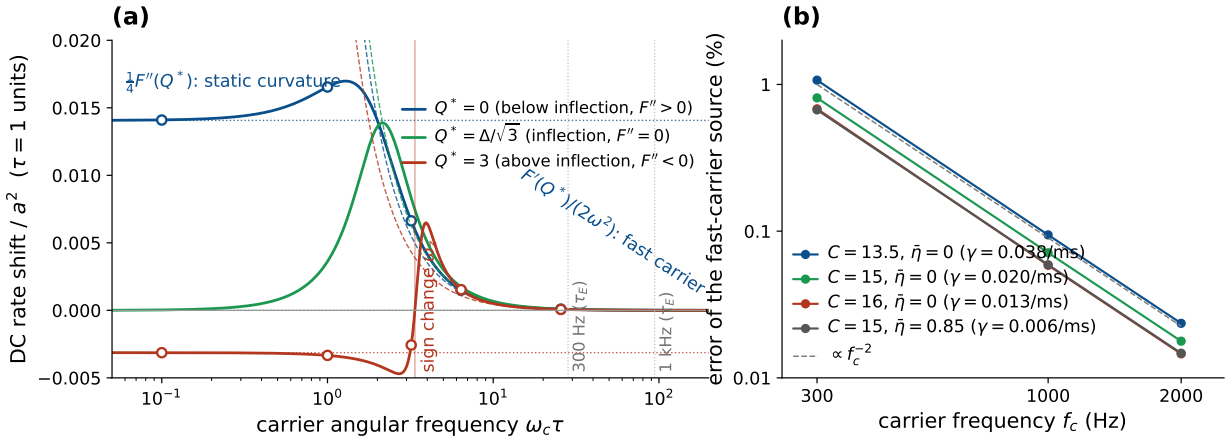


Figure 7: Static curvature at slow carriers, slope at fast ones. *(a)* Second-order DC rate shift of an uncoupled MPR population ($\Delta = 1$, $\tau = 1$) under a current carrier, Eq. (13), for operating points below, at and above the inflection of $F(Q)$. Dotted: the static limit $\frac{1}{4}F''$; dashed: the fast-carrier limit $F'/(2\omega^2)$; circles: RK4 integrations at $a = 0.05$ averaged over whole carrier periods (relative error below 10^{-3}). Above the inflection the sign changes at ω_z. The top axis converts $\omega\tau$ to a carrier frequency for $\tau = \tau_E = 15$ ms. *(b)* PING of Eq. (27): relative error of the fast-carrier difference-frequency source against the exact second-order response at four stable operating points (γ the damping of the gamma mode), two tones centered at 300, 1000 and 2000 Hz.

4.5 Exact mean-field confirmation: the NMM2 PING gamma generator

The JR column and the LaNMM both use the heuristic firing-rate sigmoid (NMM1). As an independent test we move to the exact next-generation mean field (NMM2, Eq. (4)), where the demodulating nonlinearity is the *derived* quadratic v^2 term rather than a postulated curve. We drive the two-population E–I PING motif of Eq. (27) (Methods), which loses stability through a supercritical Hopf at $\bar{\eta}_H = 1.110$, $f_0 = 54.0$ Hz, with the two-tone field entering the excitatory current, so the carrier is rectified by the exact v_E^2 term.

Driving with a two-tone TI field (carrier $f_c = 300$ Hz, envelope Δf swept through the gamma band) and locking in the excitatory rate r_E at Δf reproduces the generation and amplification of the beat (Figs. 8, S8). Below the Hopf the response is a forced resonance at the gamma frequency whose height grows as the bifurcation is approached, following the $1/\gamma$ gain of Eq. (20); above it the demodulated drive entrains the autonomous gamma acts on an autonomous gamma rhythm. The two-dimensional map traces a ridge at $\Delta f \approx f_0$ that intensifies through the Hopf. Compared with the JR sweep shown here, the NMM2 resonant frequency shifts appreciably with the operating point, producing a diagonal ridge [20]. That the beat is generated and resonantly amplified with the nonlinearity *derived* from QIF spiking dynamics, rather than assumed, shows the receiver behavior is not an artifact of the heuristic sigmoid. The detector coefficient, however, is not the sigmoid's: at this 300 Hz carrier the population is on the fast side of its crossover, and the generated source is the v_E^2 mixing of the carrier-frequency voltage excursion, operating-point independent to about 1% whose fast-carrier approximation predicts the second-order response to within 1.1% at the four tested stable points (§2.3, Fig. 7).

4.6 What the mesoscale adds: coupling sets the gain at fixed detection

The resonance sweeps above drove the column toward the Hopf with the external input p, but p also shifts the operating point, entangling detection (σ'') with amplification. To isolate amplification, we vary the JR global connectivity C (coupling strength J) and solve analytically for the drive $p(C)$ that *pins* the operating point v^*, so the detection gain $\sigma''(v^*)$ and the open-loop detector amplitude $A_{\text{open}} = \frac{1}{2}\sigma''(v^*)\varepsilon^2 m$ $A_{\text{open}} \simeq \frac{1}{2}|\sigma''(v^*)|\varepsilon^2 m$ are held constant. As $C \to C^*$ (the Hopf, $C^* \approx 137$) the damping $\gamma \to 0$, the demodulated response grows $\sim 30\times$ and the envelope resonance

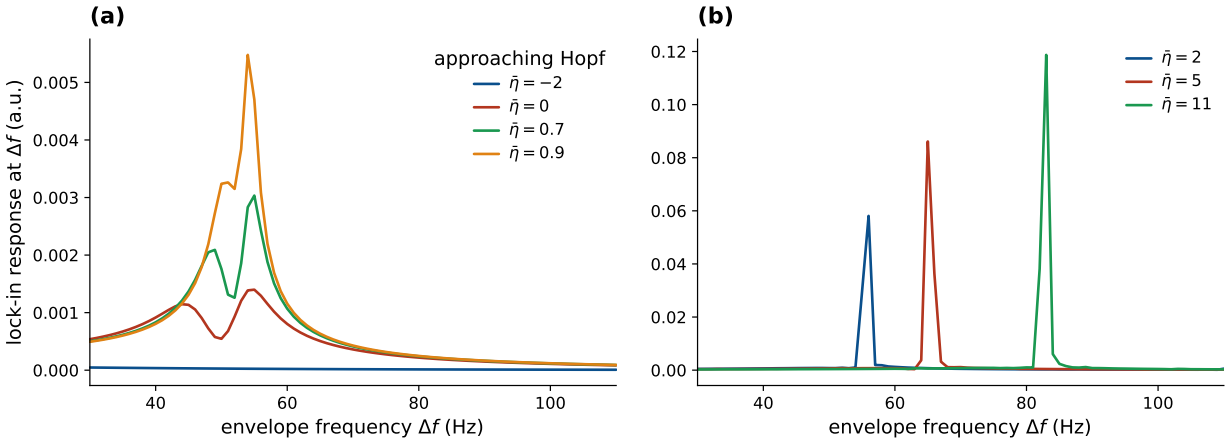


Figure 8: NMM2 PING gamma resonance (exact mean field, genuine two tones). Lock-in response of the excitatory rate r_E at the envelope frequency Δf under a two-tone TI field (carrier 300 Hz). *(a)* (stable focus, $\bar{\eta} < \bar{\eta}_H = 1.110$) forced resonance at the gamma frequency ($f_0 \approx 54$ Hz), the peak growing $0.0014 \to 0.0030 \to 0.0055$ as the Hopf is approached ($1/\gamma$ gain). *(b)* (limit cycle, $\bar{\eta} > \bar{\eta}_H$) entrainment of response in the autonomous gammaautonomous-gamma regime, the peak shifting upward with $\bar{\eta}$ ($56 \to 65 \to 83$ Hz). The input carries no power at Δf; the response is synthesized by the exact quadratic v^2 nonlinearity, with no sigmoid anywhere in the model. Matched AM and two-tone drives agree at Ω to 0.07% well below the Hopf and to 4% at $\bar{\eta} = 0.9$, consistent with the JR surrogate control (Fig. 6d).

sharpens (Fig. 9a,b), a network effect since detection is frozen and only γ changes. The recovered the local detector curvature is fixed while the recurrent transfer changes. Its modal frequency and input–output projections vary with C as well as its damping. The rate-to-voltage gain A_Ω/A_{open} (mV s) tracks $1/\gamma$ before saturating near criticality (Fig. 9c); driving the same column to the Hopf through the input p rather than the coupling C yields the same gives a similar leading gain–γ relation, so the amplification depends only on the distance to criticality, not on which parameter delivers ittrend. Both paths approach a weakly damped mode; their finite-distance gains need not coincide because the modal projections can differ.

All these sweeps stay on the stable-focus side ($\gamma > 0$), approaching the supercritical Hopf from below: the $1/\gamma$ growth is the forced-resonance susceptibility of a damped network, not entrainment of an autonomous cycle. On the other side of the bifurcation the column oscillates on its own, and the demodulated drive instead phase-locks can phase-lock that limit cycle within an Arnold tongue. The maps here measure frequency dominance (Fig. S4 ; also the entrainment side of Fig. 4 and the LaNMM and NMM2 maps): 1:1 frequency capture over a band that widens with drive, quantified by the locking range rather than a diverging , whose band grows with drive. Phase tracking would be needed to establish capture. The amplitude of an autonomous rhythm and the susceptibility of a stable focus are different observables; the $1/\gamma$ gain, the two coinciding only at onset. Because the drive is weak, on the autonomous side it biases phase (timing) more than amplitude, consistent with the timing-not-rate signature law pertains to the latter. The following rate measurements compare beat-locked modulation with the nonzero change in mean firing rate (§4.7).

The next-generation theory gives the same result without pinning. In the NMM2 PING the coupling C is the *literal* mean inter-neuron (QIF) synaptic weight J, and at this carrier the generated source is operating-point independent to about 1% . The leading fast-carrier source provides the normalization for this unpinned sweep (§2.3), so detection needs no pinning; finite-carrier source corrections over the full coupling range have not been bounded. Sweeping J at fixed background drive $\bar{\eta}$ toward the gamma Hopf J^*, the demodulated peak of r_E grows as $1/\gamma$ and saturates at criticality (Fig. S10): the heuristic JR result, reproduced with the coupling *and* the rectifier both derived rather than assumed, and a direct counterpart of the coupling-controlled weak-field sensitivity of QIF networks [20]. The two columns exhibit the same gain scaling in their two native bands, alpha (JR) and gamma (NMM2): the single-cell nonlinearity detects the envelope (coarse-grained into σ'', or the exact v^2), while the gain is a recurrent amplification set by proximity to the Hopf and adjustable

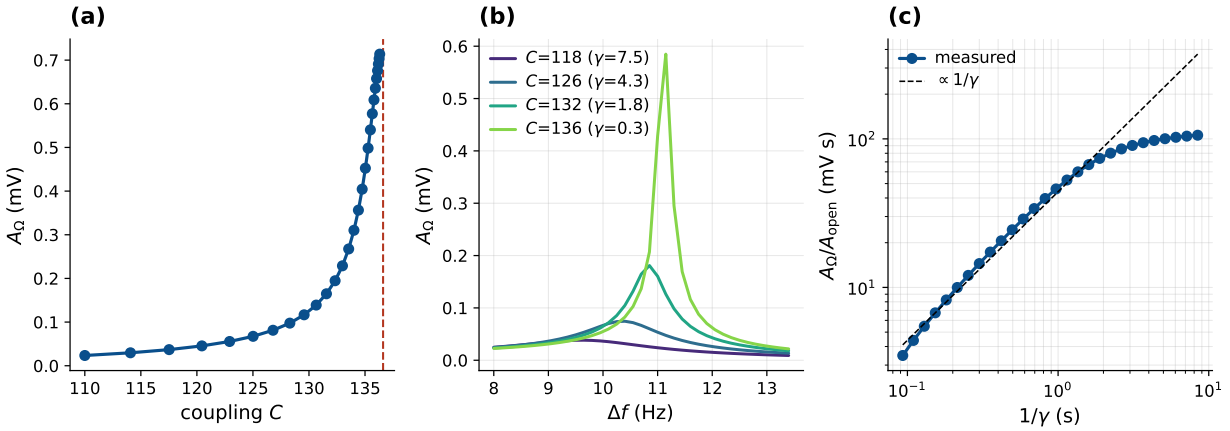


Figure 9: Coupling controls the amplification at fixed detection (Jansen–Rit). The operating point v^* is pinned by co-solving $p(C)$, so $\sigma''(v^*) = -0.151$ and A_{open} are held constant throughout. *(a)* The demodulated A_Ω grows as the coupling $C\,(= J)$ approaches the Hopf C^* from the stable-focus side ($\gamma > 0$). *(b)* The envelope resonance sharpens and grows as $C \to C^*$. *(c)* The network gain $A_\Omega/A_{\mathrm{open}}$, in mV s, follows $1/\gamma$ (dashed) and saturates near the bifurcation.

through the coupling.

4.7 The resonance amplifies the envelope-locked modulation more than the mean rate

The demodulator feeds the network a constant term and a line at the beat Ω (Eq. (9)), and the transfer $G(\Omega)$ of Eq. (20) treats them differently: $G(\omega_0) \propto 1/(2\gamma\omega_0)$ diverges as the Hopf is approached, while $G(0) \propto 1/\omega_0^2$ $G(0) \propto 1/(\omega_0^2 + \gamma^2)$ stays finite. Pinning v^* to hold the local detector curvature fixed, as in Fig. 9, and driving the column toward the Hopf through the coupling, we read both quantities from the same observable, the pyramidal rate $r_P = \sigma(v + s)$ with the field in its argument. The beat-locked modulation of r_P at $\Delta f = f_0$ grows 13.5× (26 to 346 mHz), tracking $1/\gamma$ before saturating near criticality; the shift of its mean grows too, 5.8× (−1.3 to −7.7 mHz), through rectification of the growing oscillation, but stays below 0.2% of the 3.9 Hz baseline (Fig. S11). Modulation exceeds mean shift by 19× far from the Hopf and by 45–66× near it. The network amplifies the envelope-locked modulation far more than the mean rate, so a small mean-rate change is the expected signature even where TI is acting, the mesoscopic counterpart of the observation that TI alters spike timing more than firing rate in the primate brain [8]. The mean shift is small but nonzero, so the comparison must use commensurate measures, as here.

4.8 Microscale confirmation: TI realigns spike timing in the QIF network

The mesoscale prediction has a direct microscale test, since NMM2 is the *exact* mean field of an all-to-all network of quadratic integrate-and-fire (QIF) neurons with Lorentzian-distributed excitabilities [18, 15, 20]. Integrating that spiking network ($N = 8000$ neurons per population, parameters identical to the PING mean field; Methods) shows TI bunching spike *times* into the beat cycle with a smaller change in the mean rate, on both sides of the gamma Hopf (Fig. 10). Below the Hopf (forced) the field-free network fires asynchronously at a flat rate; with TI on, spikes condense into envelope-locked bands (Fig. 10a,b). Above the Hopf (oscillatory) the free-running gamma is *gated* by the TI beat, a forced cross-frequency modulation (phase–amplitude coupling, PAC), not frequency entrainment, since the ≈11 Hz detuning lies outside the 1:1 tongue: its bursts coexists with a beat-locked rate component: spikes group into the $\Delta f = 42$ Hz envelope cycle while the intrinsic ∼53 Hz gamma rhythm persists (Fig. 10c,d). This establishes cross-frequency structure in the rate, without identifying whether the gamma amplitude or phase is modulated.

Because the two rhythms coexist in a nonlinear medium, the QIF nonlinearity mixes them into intermodulation sidebands in the population rate—most prominently the direct Δf line and the

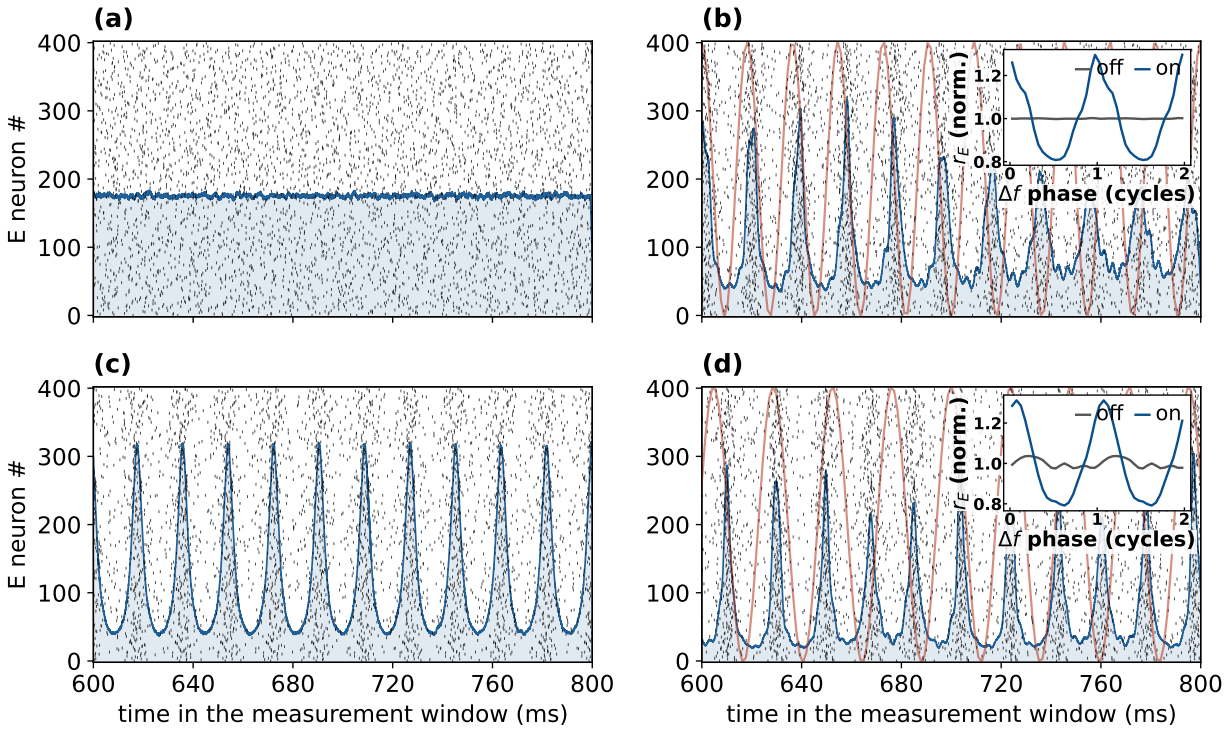


Figure 10: QIF spiking network: TI bunches spikes into the beat cycle with a smaller change in mean rate. $N = 8000$ excitatory and inhibitory quadratic integrate-and-fire neurons whose exact mean field is the NMM2 PING circuit (Eq. (27)). The circuit's intrinsic rhythm is gamma (∼53 Hz), so the beat is set in the gamma range (carrier $f_c = 300$ Hz, genuine two tones). Black ticks are E spikes (400 of 8000), blue the population rate, red the TI envelope; the bifurcation parameter is the common drive $\bar{\eta}$ (gamma Hopf at ≈ 1.1). *(a,b)* Forced ($\bar{\eta} = 0.85$), TI off then on at $\Delta f = 55$ Hz: asynchronous firing becomes envelope-locked bunching. *(c,d)* Oscillatory ($\bar{\eta} = 1.5$), TI off then on with the beat detuned to 42 Hz: the free-running gamma persists but and the rate gains a Δf-locked component. Because The TI-off control identifies the ≈11 Hz detuning places the beat outside the 1:1 tongue, this is forced cross-frequency *gating*, not frequency capture (contrast Fig. S4)stimulation-induced component; neither the detuning is what certifies nor the locked component as a driven effectrate fold establishes gamma-amplitude gating. The last 200 ms of the 800 ms measurement window are shown. *Insets* in *(b,d)*: the population rate folded on the beat phase over the whole window (44 and 34 cycles), each normalized to its own mean (off gray, on blue); with that many cycles the near-commensurate 53 Hz gamma averages out of the 42 Hz fold in *(d)*. Both are flat with TI off.

sum component near 95 Hz (53+42), with the difference tone near 11 Hz (the detuning itself); this is the spiking-network fingerprint of the same nonlinear frequency mixing that operates at the macroscale, and it is the sideband signature of *gating* rather than the frequency pulling of entrainment. . Sidebands alone do not distinguish gamma-amplitude gating from phase modulation or other nonlinear interactions. The spiking network reproduces the exact NMM2 mean field's gamma spectrum (Fig. S12a).

Across both regimes the mean rate rises by about 8–10%11%, while the Δf modulation depth of the population rate, $A_\Omega/\langle r_E \rangle$, rises from below 0.003 to 0.29 (forced) and 0.23 (gatedoscillatory) (Fig. S12c), measured over 44 and 34 whole beat cycles after 800 ms of settling (Methods). Timing modulation therefore exceeds the relative mean-rate change by a factor of about three at the population level. Per neuron the locking is weak: the pairwise phase consistency of single-neuron spike phases at Δf rises from its field-free control (median −0.02) to a median of 0.003–0.005, and the pooled vector strength from below 0.02 to 0.12–0.13. The population's beat-locked component is built from many weakly biased cells, not from strongly locked ones. This is the spiking-level counterpart of §4.7 and a qualitative analog of the in-vivo finding that TI alters spike timing more than firing rate [8].

4.9 Falsifiable predictions and tests

The mechanism makes four predictions, each with an experimental handle.

1. **Carrier dependence separates access from mixing.** In the static limit and in the fast-carrier QIF asymptote, the leading beat is independent of f_c at fixed local polarization, provided the carrier does not excite another network mode. At fixed applied field, access restores frequency dependence (Eq. (22)); detector dynamics can add it near the crossover. *Test:* measure or estimate local polarization during a carrier sweep and compare the response before and after correcting for access. The remaining frequency dependence constrains the mixing mechanism. Its cutoff is to be measured, not assigned to a particular compartment in advance.

2. **State- and carrier-dependent response.** The generated beat depends on the operating point through the detector coefficient, and the two modeled detectors disagree on how: the memoryless sigmoid follows $\sigma''(v^*)$ and reverses sign across the inflection, where PEIX (Eq. (24)) peaks; the dynamic mean field at a fast carrier mixes in the voltage dynamics and is read through the rate and network susceptibility; its DC rectification follows F', without the same curvature sign rule (§2.3). *Test:* vary tonic drive and carrier frequency while measuring both amplitude and phase of the beat response. Compare these with the predicted mixing coefficient after accounting for changes in network susceptibility; a response-amplitude change alone does not isolate the detector.

3. **Transduction class.** A smooth memoryless response with nonzero curvature transduces A^2 at weak input, whereas an ideal envelope follower transduces A (§2.4), and the two are separable at a single matched target. The former gives $Y_\Omega \propto \varepsilon^2$ with a second-harmonic ratio vanishing as $\varepsilon \to 0$; the latter gives $Y_\Omega \propto \varepsilon$ with the ratio pinned at $1/5$. *Test:* sweep field amplitude off resonance (so that both lines sit on the flat part of G) and read the log–log slope together with $Y_{2\Omega}/Y_\Omega$; on resonance the network suppresses the second harmonic by $\sim 3\mathcal{Q}$ and the test must be corrected by an independently measured $G(2\Omega)/G(\Omega)$.

4. **Frequency selectivity and state-dependence.** The response is largest when Δf matches a region's resonant rhythm and is amplified as $1/\gamma$ near a bifurcation. Changes in operating state can therefore alter both the generated drive and the recurrent gain [13]. *Test:* sweep Δf through a region's intrinsic band across brain states and track the resonant peak and its width.

Table 3 compares the predictions and related model consequences with existing evidence. Two are qualitatively consistent with published observations: TI alters spike timing more than firing rate in vivo [8] (our $G(\omega_0) \gg G(0)$ asymmetry, §4.7–4.8), and most pyramidal TI responses vanish when synaptic transmission is blocked [9] (a network read-out, which tests network involvement rather than excluding a surviving cellular detector). A quantitative reanalysis of these datasets against the model is a natural next step, and §5 specifies the amplitude-exponent fit it would require.

5 Discussion

Weak-field TI admits an effective description in which cellular nonlinearities generate a quadratic mixing response and recurrent dynamics amplify it. For a smooth response with a nonzero second-order term, microscopic contributions can be combined in the mixing coefficient; identifying each channel is unnecessary for this leading-order account. QIF provides a derived realization of that structure. This connects cellular mixing [2, 4] with the network dependence seen in slices and simulations [9, 10, 11]. Cellular mixing and circuit amplification are therefore not competing explanations.

Small amplitude and fast relaxation justify different reductions. Weak input permits a second-order expansion of the dynamic response. Fast membrane relaxation gives the NMM2 slow-synapse limit, a static rate curve with dynamic synapses; if relaxation is also fast relative to the carrier, its curvature gives the leading beat. Otherwise the mixing coefficient retains frequency dependence.

Prediction (model basis)	**Existing evidence**	**Proposed test**
Transduction class: $Y_\Omega \propto \varepsilon^2$ and vanishing $Y_{2\Omega}/Y_\Omega$ (square law) vs. $\propto \varepsilon$ and 1/5 (envelope following)	— (untested; existing comparisons match extracellular field, not ε)	Amplitude sweep off resonance; transfer-corrected harmonic ratio
Timing-dominated response: the envelope-locked modulation of the rate grows toward the Hopf faster than its mean ($G(\omega_0) \gg G(0)$)	*Qualitatively consistent*: TI alters spike timing more than firing rate, primate [8]	Lock-in of spike timing at Δf vs. the mean-rate change, in the same effect measure
Network read-out (population nonlinearity + synaptic recurrence)	*Qualitatively consistent*: most pyramidal TI responses vanish under synaptic block [9]	Synaptic block should reduce recurrent amplification; cellular mixing may persist
Carrier independence at fixed polarization (no ω_c in A_Ω)	TI thresholds inherit the carrier's f_c-dependence [5, 6]; bare kHz weakly effective [34]	Fix in-zone polarization, sweep $f_c \to$ flat envelope response in the stated limits; fit access and residual detector dependence
State- and carrier-dependent response (the detector coefficient is model-dependent)	Cell-type-specific TI responses (PV vs. pyramidal) [9]	Shift v^* by state at fixed beat; sweep f_c at fixed beat
Frequency selectivity, sharpened $\sim 1/\gamma$ near criticality	Quantitative gain–bandwidth relation not tested here in biological data	Sweep Δf through a region's band across brain states

Table 3: The mechanism's predictions confronted with existing in-vivo / in-vitro evidence. Entries cite documented qualitative findings; quantitative reanalysis is left to future work.

The curve's slope converts a slow input into a rate change and sets local recurrent gain. The generic quadratic structure survives this distinction, while its magnitude, phase, and frequency dependence remain model-specific.

Fast access has several possible anatomical and electrical origins. Nodes and the AIS contain voltage-gated channels capable of nonlinear rectification [2, 35]. At stimulation applied extracellular fields of order 1 V/m these channels respond through membrane polarization, not through direct action of the field on the protein: the structural effects reviewed by Cifra et al. [36] require are reported at fields from 10 kV/m to GV/m, and that with thresholds that depend on the protocol and molecular system. That review places fields below 0.1 kV/m outside its scope, where it expects direct effects to be negligible against thermal noise. Presynaptic terminals can polarize more strongly than somata [37, 38, 39], but small size alone does not imply fast charging: for an isopotential membrane, the product of specific resistance and capacitance is independent of area. Conductance, geometry, and the mode of stimulation determine the response.

Cohen et al. [40] established a conducting periaxonal space approximately 12 nm wide, partly sealed at the paranodes, and modeled the distinct potentials across myelin and the axonal membrane. Their methods report a minimum fitted axonal decay time near 1 ms; this is not a measured TI access time. Luff et al.'s pulse-width-modulated TI (PWM-TI) model likewise includes a 1 ms passive response within a 1–100 ms parameter sweep [41]. Separately, Semenov et al. [7] measured field-induced membrane charging near 0.7 μs in isolated neurons under strong, microsecond field pulses. This is a different response mode from intracellular current charging or periaxonal conduction. Together these studies motivate examining a shorter effective access time, while leaving its value and field coupling preparation-dependent. A 10–100-fold reduction in a QIF membrane time is therefore a sensitivity hypothesis. Its population-level consequence can be studied through the existing slow-synapse limit, with each physical filter included once; a new periaxonal circuit is

not needed for that limiting argument.

A spatial TI dose map depends on this physiology. The usual envelope-modulation measure $\mathcal{M}[A] = 2\min(\varepsilon_1, \varepsilon_2)$ assumes that neural response is determined by the envelope excursion. In the local square-law regime, the beat instead depends on $\varepsilon_1\varepsilon_2$, and the carrier average also contains a DC term proportional to $\varepsilon_1^2 + \varepsilon_2^2$. Orientation, access, operating point, and network susceptibility further shape the response. For a smooth memoryless transfer, carrier averaging is even in the envelope amplitude, giving quadratic transduction when the second-order coefficient is nonzero. Dynamic nonlinearities can also mix at second order, with frequency-dependent coefficients. A sharp rectifier can instead approximate envelope following over a finite amplitude range; smoothing or heterogeneity can restore quadratic behavior at smaller inputs. The amplitude and harmonic tests in §2.4 distinguish these regimes.

Stimulation intensity can also change the mechanism. At high intensities, TI and unmodulated kHz fields can have similar excitation thresholds, with modulation patterning firing rather than lowering the threshold [5, 7]; some peripheral responses do not require envelope extraction [6]. The weak-input calculation here concerns modulation of ongoing activity through mixing and amplification [8, 42]. Direct carrier-evoked spiking and conduction block are outside its scope. Finite-amplitude model examples illustrate modulation and saturation beyond the expansion; they do not establish weak-field physiological thresholds.

The recurrent amplifier is shared with direct low-frequency stimulation. In our coupling sweep, holding the JR operating point fixed holds the local curvature fixed while the network gain changes. A direct in-band drive shows the same $1/\gamma$ growth and resonance sharpening (Fig. S3), consistent with the known resonant susceptibility of recurrent excitatory–inhibitory networks [43, 20]. Near the Hopf, this is temporal critical slowing in a mean-field model, not evidence of a diverging spatial correlation length. Related models already reproduce tACS entrainment and AM-driven phase locking [44, 45, 46]. The separation here is between the drive generated by mixing and the response to that drive. When TI and tACS are matched for effective in-band input, observable, and operating state, they share the amplifier. Resonance alone therefore gives TI no efficiency advantage.

Absolute response estimates remain sensitive to access and transduction. Measured static field-to-voltage couplings are 0.12–0.21 mV per V/m in hippocampus [47, 48] and reach about 0.5 mV per V/m in cortical L5/6 pyramidal cells [49]; human cortical fields near 0.8 V/m have been reported at 2 mA [50, 51]. These static couplings do not fix the coupling at kHz. For equal TI carrier polarizations ε, the JR beat drive is $\sigma''\varepsilon^2/2$, whereas a direct drive of the same peak polarization gives $2\sigma'\varepsilon$. Their leading amplitude ratio is $\eta_{\mathrm{det}} \simeq |\sigma''|\varepsilon/(4\sigma')$: the relative efficiency decreases as the input is weakened in this perturbative regime. A larger recurrent gain amplifies both drives.

For scale, a reverberation time $\tau_{\mathrm{rev}} = 1/\gamma$ gives a near-Hopf quality factor $\mathcal{Q} \simeq \pi f_0 \tau_{\mathrm{rev}}$ and power bandwidth approximately $1/(\pi\tau_{\mathrm{rev}})$. Population relaxation over a few hundred milliseconds [52] would give a quality factor of order ten at 10 Hz and a bandwidth of order 1 Hz. This is an order-of-magnitude comparison: the measured relaxation is not specific to the alpha mode. Narrow amplification also makes detuning consequential.

Primate measurements illustrate both the relevance and the limits of an efficiency comparison. Vieira et al. [8] used modulation depths of 0.5–0.62 V/m and reported TI effects at 0.34 times those of conventional tACS (95% confidence interval 0.04–0.65). Their within-electrode AM comparison compensated for frequency-dependent current shunting and matched extracellular modulation depth near the recorded cells. A favorable fast-access estimate with $\varepsilon \approx 0.1$ mV gives only about 0.8% for the JR detector, below the reported ratio. This discrepancy is not a calibrated rejection of that detector: the comparison involved twenty neurons, with ten responding to at least one modality and seven to both; phase-locking value (PLV) depends on baseline locking and network state; and the matched extracellular fields do not ensure matched polarization at the cellular mixer.

An unspecified nonlinear relation between generated drive and PLV also prevents identification of the input-amplitude exponent. The data establish a weaker AM effect than the matched-depth low-frequency drive, but do not isolate the transduction law.

For comparison, the matched-peak efficiency over the logistic family has a supremum of approximately 0.348 (App. D). Approaching it at weak fields requires a transfer curve narrowed to microvolt scales; the limiting detector is step-like and has a second-harmonic ratio near 0.15, distinct from both weak square-law detection and linear envelope following. This bound applies to that memoryless family and matching convention, not to the dynamic QIF detector or to all cellular mechanisms. Its proximity to an experimental ratio is not a fit.

Quantitative physiological predictions require calibration of access and mixing. Their values are not fixed by the quadratic scaling law. In comparisons of stimulus-evoked firing, Hodgkin–Huxley and Frankenhaeuser–Huxley models reproduce responses missed by the tested leaky, exponential, and adaptive-exponential integrate-and-fire models [53]. Such model dependence concerns the specific response, without invalidating the weak-input expansion. Noise, heterogeneity beyond the assumed excitability distribution, and interactions between columns can broaden or shift the deterministic resonances. Cascading ordinary synaptic filters cannot solve carrier access, because they attenuate the carrier before a subsequent nonlinearity receives it. Human results are also mixed, including reported peripheral effects without central effects [54] and null occipito-parietal alpha-power modulation [55]. Testing the proposed mechanism requires measuring access, generated beat, and network tuning in the same preparation.

6 Conclusion

In the weak-field regime, smooth cellular nonlinearities with a nonzero second-order response can be represented by effective quadratic mixing. The population models provide realizations of this description: mixing generates the difference-frequency component, and recurrent dynamics amplify it near a network resonance. A large network response does not, by itself, imply efficient detection or identify the microscopic mixer.

The static and dynamic population descriptions are connected by their time scales. Fast membrane relaxation gives the NMM2 slow-synapse limit: a nonlinear static rate map coupled through dynamic synapses. Its curvature describes carrier mixing when relaxation is also fast relative to the carrier. Outside that limit, the dynamic response must be used. Fast cellular access and slow recurrent resonance can therefore coexist, with each physical filtering process represented once.

In the weak square-law regime, beat generation depends on the product of the effective carrier inputs, not only on the envelope excursion. TI and a direct low-frequency drive share the downstream amplifier when input, observable, and state are matched, so resonance alone gives TI no efficiency advantage. The anatomical access pathway and absolute response at human field strengths remain open. Measuring access, mixing, and circuit tuning separately tests the proposed mechanism without attributing all three to a single transfer curve.

Code and data availability

All simulation and figure-generation code, the committed datasets, and a one-command reproduce script (`run_all.py`) are openly available Simulation code, cached results, and figure-generation scripts are provided at the paper's GitHub repository, archived at ; the public archive is linked through Zenodo (doi:10.5281/zenodo.21009618). The repository `README` documents the per-figure script mapping (a figure→script table) and the dependency order, so every figure in this note can be regenerated from the committed inputs. The maps figures to their scripts and distinguishes recomputation from replotting cached data. The two-tone kHz illustration (Fig. S6) can be replotted from its archived spectra, but its original producer and complete run parameters are unavailable. The LaNMM setup is a drawn schematic. The LaNMM

carrier comparison has both measurement-window caches and a reproducible summary script. The code is released under CC-BY-4.0.

Acknowledgments

GR, BM, AJ and FC have received funding from the European Research Council (ERC) under the European Union's Horizon 2020 research and innovation programme (grant agreement No 855109, GALVANI).

Declaration of generative AI and AI-assisted technologies in the manuscript preparation process

During the preparation of this work the authors used Anthropic Claude and OpenAI ChatGPT to streamline the narrative and to assist with code and figure generation from data the authors produced. The authors reviewed and edited all resulting content and take full responsibility for the content of the published article.

References

[1] Nir Grossman, David Bono, Nina Dedic, Suhasa B. Kodandaramaiah, Andrii Rudenko, Ho-Jun Suk, Antonino M. Cassara, Esra Neufeld, Niels Kuster, Li-Huei Tsai, Alvaro Pascual-Leone, and Edward S. Boyden. Noninvasive deep brain stimulation via temporally interfering electric fields. *Cell*, 169(6):1029–1041.e16, 2017.

[2] Ehsan Mirzakhalili, Beatrice Barra, Marco Capogrosso, and Scott F. Lempka. Biophysics of temporal interference stimulation. *Cell Systems*, 11(6):557–572.e5, 2020.

[3] Paul J. Nahin. *The Science of Radio: with MATLAB and Electronics Workbench Demonstrations*. Springer, 2nd edition, 2001.

[4] Charlotte E. Luff, Robert Peach, Emma-Jane Mallas, Edward Rhodes, Felix Laumann, Edward S. Boyden, David J. Sharp, Mauricio Barahona, and Nir Grossman. The neuron mixer and its impact on human brain dynamics. *Cell Reports*, 43(6):114274, 2024.

[5] Aleksandar Opančar, Petra Ondráčková, David Samuel Rose, Jan Trajlinek, Vedran Đerek, and Eric Daniel Głowacki. The same biophysical mechanism is involved in both temporal interference and direct kHz stimulation of peripheral nerves. *Nature Communications*, 16:9006, 2025.

[6] Ryan B. Budde, Michael T. Williams, and Pedro P. Irazoqui. Temporal interference current stimulation in peripheral nerves is not driven by envelope extraction. *Journal of Neural Engineering*, 20(2):026041, 2023.

[7] Iurii Semenov, Vitalii Kim, Giedre Silkuniene, and Andrei G. Pakhomov. Excitation and polarization of isolated neurons by high-frequency sine waves for temporal interference stimulation. *Cell Reports Physical Science*, 2025.

[8] Pedro G. Vieira, Matthew R. Krause, and Christopher C. Pack. Temporal interference stimulation disrupts spike timing in the primate brain. *Nature Communications*, 15:4558, 2024.

[9] Sara Caldas-Martinez, Chaitanya Goswami, Mats Forssell, Jiaming Cao, Alison L. Barth, and Pulkit Grover. Cell-specific effects of temporal interference stimulation on cortical function. *Communications Biology*, 7:1076, 2024.

[10] Nafiseh Karimi, Rassoul Amirfattahi, and Abolghasem Zeidaabadi Nezhad. Neuromodulation effect of temporal interference stimulation based on network computational model. *Frontiers in Human Neuroscience*, 18, September 2024.

[11] Hossein Soroushi, Sara Abbasi, Yun Du, Ning Ning, and Yuming Lei. Temporal interference stimulation: mechanisms, optimization, validation, and clinical prospects—a comprehensive review. *WIREs Computational Statistics*, 17(3):e70031, 2025.

[12] Wei Wang, M. Florian, C. Ling, K. Wei, J. Jian, H. Sun, L. Yan, S. Hu, and B. Bi. Temporal interference stimulation: a new paradigm for non-invasive deep brain stimulation—mechanistic insights, clinical advances, and future directions. *Translational Psychiatry*, 2026.

[13] Giulio Ruffini, Edmundo Lopez-Sola, Raul Palma, Roser Sanchez-Todo, Jakub Vohryzek, Francesca Castaldo, and Karl Friston. Cross-frequency coupling as a neural substrate for prediction error evaluation: a laminar neural mass modeling approach. *bioRxiv*, 2025. Preprint 2025.03.19.644090.

[14] Giulio Ruffini. Neural encoding through hierarchical amplitude modulation. *bioRxiv*, 2025. Preprint 2025.11.03.686310.

[15] Francesca Castaldo, Raul de Palma Aristides, Pau Clusella, Jordi Garcia-Ojalvo, and Giulio Ruffini. Rosetta Stone of neural mass models. *Physics Reports*, 1189:1–49, 2026. arXiv:2512.10982.

[16] Ben H. Jansen and Vincent G. Rit. Electroencephalogram and visual evoked potential generation in a mathematical model of coupled cortical columns. *Biological Cybernetics*, 73(4):357–366, 1995.

[17] Hugh R. Wilson and Jack D. Cowan. Excitatory and inhibitory interactions in localized populations of model neurons. *Biophysical Journal*, 12(1):1–24, 1972.

[18] Ernest Montbrió, Diego Pazó, and Alex Roxin. Macroscopic description for networks of spiking neurons. *Physical Review X*, 5(2):021028, 2015.

[19] Giulio Ruffini. Analysis and extension of exact mean-field theory with dynamic synaptic currents. *bioRxiv*, 2021. Preprint 2021.09.01.458563 (NMM2).

[20] Pau Clusella, Elif Köksal-Ersöz, Jordi Garcia-Ojalvo, and Giulio Ruffini. Comparison between an exact and a heuristic neural mass model with second-order synapses. *Biological Cybernetics*, 117(1-2):5–19, 2023.

[21] Bruce Hutcheon and Yosef Yarom. Resonance, oscillation and the intrinsic frequency preferences of neurons. *Trends in Neurosciences*, 23(5):216–222, 2000.

[22] Raul de Palma Aristides, Leonardo L. Gollo, Francesca Castaldo, Giulio Ruffini, Santiago Canals, and Claudio R. Mirasso. Frequency-selective responses to temporal interference stimulation in hippocampal neurons. Unpublished manuscript, September 29, 2026. BCOM Working Paper WP0242, 2026.

[23] Nicolas Brunel and Vincent Hakim. Fast global oscillations in networks of integrate-and-fire neurons with low firing rates. *Neural Computation*, 11(7):1621–1671, 1999.

[24] Nicolas Brunel and Xiao-Jing Wang. What determines the frequency of fast network oscillations with irregular neural discharges? I. synaptic dynamics and excitation–inhibition balance. *Journal of Neurophysiology*, 90(1):415–430, 2003.

[25] Roser Sanchez-Todo, André M. Bastos, Edmundo Lopez-Sola, Borja Mercadal, Emiliano Santarnecchi, Earl K. Miller, Gustavo Deco, and Giulio Ruffini. A physical neural mass model framework for the analysis of oscillatory generators from laminar electrophysiological recordings. *NeuroImage*, 270:119938, 2023.

[26] Adrià Galan-Gadea, Ricardo Salvador, Fabrice Bartolomei, Fabrice Wendling, and Giulio Ruffini. Spherical harmonics representation of the steady-state membrane potential shift

induced by tDCS in realistic neuron models. *Journal of Neural Engineering*, 20(2):026004, 2023.

[27] Yair Deitcher, Guy Eyal, Lida Kanari, Matthijs B. Verhoog, Guy Antoine Atenekeng Kahou, Huibert D. Mansvelder, Christiaan P. J. de Kock, and Idan Segev. Comprehensive morpho-electrotonic analysis shows 2 distinct classes of L2 and L3 pyramidal neurons in human temporal cortex. *Cerebral Cortex*, 27(11):5398–5414, 2017.

[28] Guy Eyal, Matthijs B. Verhoog, Guilherme Testa-Silva, Yair Deitcher, Johannes C. Lodder, Ruth Benavides-Piccione, Juan Morales, Javier DeFelipe, Christiaan P. J. de Kock, Huibert D. Mansvelder, and Idan Segev. Unique membrane properties and enhanced signal processing in human neocortical neurons. *eLife*, 5:e16553, 2016.

[29] François Grimbert and Olivier Faugeras. Bifurcation analysis of Jansen's neural mass model. *Neural Computation*, 18(12):3052–3068, 2006.

[30] Martin Vinck, Marijn van Wingerden, Thilo Womelsdorf, Pascal Fries, and Cyriel M. A. Pennartz. The pairwise phase consistency: a bias-free measure of rhythmic neuronal synchronization. *NeuroImage*, 51(1):112–122, 2010.

[31] Arkady Pikovsky, Michael Rosenblum, and Jürgen Kurths. *Synchronization: A Universal Concept in Nonlinear Sciences*. Cambridge University Press, 2001.

[32] Ryan T. Canolty and Robert T. Knight. The functional role of cross-frequency coupling. *Trends in Cognitive Sciences*, 14(11):506–515, 2010.

[33] Adriano B. L. Tort, Robert Komorowski, Howard Eichenbaum, and Nancy Kopell. Measuring phase-amplitude coupling between neuronal oscillations of different frequencies. *Journal of Neurophysiology*, 104(2):1195–1210, 2010.

[34] Zeinab Esmaeilpour, Mark Jackson, Greg Kronberg, Tianhe Zhang, Rosana Esteller, Brad Hershey, and Marom Bikson. Limited sensitivity of hippocampal synaptic function or network oscillations to unmodulated kilohertz electric fields. *eNeuro*, 7(6):ENEURO.0368–20.2020, 2020.

[35] Boshuo Wang, Aman S. Aberra, Warren M. Grill, and Angel V. Peterchev. Responses of model cortical neurons to temporal interference stimulation and related transcranial alternating current stimulation modalities. *Journal of Neural Engineering*, 19(6):066047, 2022.

[36] Michal Cifra, Saurabh Kumar Pandey, Tomáš Zakar, Michaela Poplová, Daniela G. Blanco Campoy, Jiří Průša, Daniel Havelka, Paolo Marracino, Micaela Liberti, Francesca Apollonio, Niall J. English, Carl Caleman, and Erik G. Marklund. The effects of external electric fields on proteins. *Chemical Society Reviews*, 55(14):7568–7616, 2026.

[37] Asif Rahman, Davide Reato, Mattia Arlotti, Fernando Gasca, Abhishek Datta, Lucas C. Parra, and Marom Bikson. Cellular effects of acute direct current stimulation: somatic and synaptic terminal effects. *The Journal of Physiology*, 591(10):2563–2578, 2013.

[38] Aman S. Aberra, Ruochen Wang, Warren M. Grill, and Angel V. Peterchev. Multi-scale model of axonal and dendritic polarization by transcranial direct current stimulation in realistic head geometry. *Brain Stimulation*, 16(6):1776–1791, 2023.

[39] Darpan Chakraborty, Dennis Q. Truong, Marom Bikson, and Hanoch Kaphzan. Neuromodulation of axon terminals. *Cerebral Cortex*, 28(8):2786–2794, 2018.

[40] Charles C. H. Cohen, Marko A. Popovic, Jan Klooster, Marie-Theres Weil, Wiebke Möbius, Klaus-Armin Nave, and Maarten H. P. Kole. Saltatory conduction along myelinated axons involves a periaxonal nanocircuit. *Cell*, 180(2):311–322.e15, 2020.

[41] Charlotte E. Luff, Patrycja Dzialecka, Emma Acerbo, Adam Williamson, and Nir Grossman. Pulse-width modulated temporal interference (pwm-ti) brain stimulation. *Brain Stimulation*, 17(1):92–103, January 2024.

[42] Florian Missey, Emma Acerbo, Adam S. Dickey, et al. Non-invasive temporal interference stimulation of the hippocampus suppresses epileptic biomarkers in patients with epilepsy. *Brain Stimulation*, 19(1):102981, 2026.

[43] Erwan Ledoux and Nicolas Brunel. Dynamics of networks of excitatory and inhibitory neurons in response to time-dependent inputs. *Frontiers in Computational Neuroscience*, 5, 2011.

[44] M. M. Ali, K. K. Sellers, and F. Frohlich. Transcranial alternating current stimulation modulates large-scale cortical network activity by network resonance. *Journal of Neuroscience*, 33(27):11262–11275, July 2013.

[45] Ehsan Negahbani, Florian H. Kasten, Christoph S. Herrmann, and Flavio Fröhlich. Targeting alpha-band oscillations in a cortical model with amplitude-modulated high-frequency transcranial electric stimulation. *NeuroImage*, 173:3–12, June 2018.

[46] Matthew R. Krause, Pedro G. Vieira, and Christopher C. Pack. Transcranial electrical stimulation: How can a simple conductor orchestrate complex brain activity? *PLOS Biology*, 21(1):e3001973, January 2023.

[47] Marom Bikson, Masashi Inoue, Hiroki Akiyama, Jackie K. Deans, John E. Fox, Hiroyoshi Miyakawa, and John G. R. Jefferys. Effects of uniform extracellular dc electric fields on excitability in rat hippocampal slices in vitro. *The Journal of Physiology*, 557(1):175–190, May 2004.

[48] Jacqueline K. Deans, Andrew D. Powell, and John G. R. Jefferys. Sensitivity of coherent oscillations in rat hippocampus to ac electric fields. *The Journal of Physiology*, 583(2):555–565, August 2007.

[49] Thomas Radman, Raddy L. Ramos, Joshua C. Brumberg, and Marom Bikson. Role of cortical cell type and morphology in subthreshold and suprathreshold uniform electric field stimulation in vitro. *Brain Stimulation*, 2(4):215–228.e3, October 2009.

[50] Yu Huang, Anli A Liu, Belen Lafon, Daniel Friedman, Michael Dayan, Xiuyuan Wang, Marom Bikson, Werner K Doyle, Orrin Devinsky, and Lucas C Parra. Measurements and models of electric fields in the in vivo human brain during transcranial electric stimulation. *eLife*, 6, February 2017.

[51] Yu Huang, Anli A Liu, Belen Lafon, Daniel Friedman, Michael Dayan, Xiuyuan Wang, Marom Bikson, Werner K Doyle, Orrin Devinsky, and Lucas C Parra. Correction: measurements and models of electric fields in the in vivo human brain during transcranial electric stimulation. *eLife*, 7, February 2018.

[52] Jens Wilting and Viola Priesemann. Inferring collective dynamical states from widely unobserved systems. *Nature Communications*, 9(1), June 2018.

[53] Tom Plovie, Ruben Schoeters, Thomas Tarnaud, Wout Joseph, and Emmeric Tanghe. Nonlinearities and timescales in neural models of temporal interference stimulation. *Bioelectromagnetics*, 46(1):e22522, 2025.

[54] Krisztián Iszak, Simon Mathies Gronemann, Stefanie Meyer, Alexander Hunold, Jana Zschüntzsch, Mathias Bähr, Walter Paulus, and Andrea Antal. Why temporal inference stimulation may fail in the human brain: A pilot research study. *Biomedicines*, 11(7):1813, June 2023.

[55] Paria Mansourinezhad, Rob M C Mestrom, Debby C W Klooster, Mathieu Sprengers, Paul A J M Boon, and Margarethus M Paulides. Systematic review of experimental studies in humans on transcranial temporal interference stimulation. *Journal of Neural Engineering*, 22(5):051001, September 2025.

[56] Nathan Gordon, Jakob Hohwy, Matthew J. Davidson, Jeroen J. A. van Boxtel, and Naotsugu Tsuchiya. From intermodulation components to visual perception and cognition—a review. *NeuroImage*, 199:480–494, 2019.

[57] Zeinab Esmaeilpour, Greg Kronberg, Davide Reato, Lucas C. Parra, and Marom Bikson. Temporal interference stimulation targets deep brain regions by modulating neural oscillations. *Brain Stimulation*, 14(1):55–65, 2021.

[58] Ines R. Violante, Ketevan Alania, Antonino M. Cassarà, Esra Neufeld, Emma Acerbo, Romain Carron, Adam Williamson, Danielle L. Kurtin, Edward Rhodes, Adam Hampshire, Niels Kuster, Edward S. Boyden, Alvaro Pascual-Leone, and Nir Grossman. Non-invasive temporal interference electrical stimulation of the human hippocampus. *Nature Neuroscience*, 26(11):1994–2004, 2023.

[59] Jean-Philippe Lachaux, Eugenio Rodriguez, Jacques Martinerie, and Francisco J. Varela. Measuring phase synchrony in brain signals. *Human Brain Mapping*, 8(4):194–208, 1999.

A Notation and units

These neural-mass models are phenomenological: potentials are in mV, firing rates in s^{-1} (≡Hz), time constants in ms, and frequencies in Hz, unless noted; a "–" marks a dimensionless quantity. A few glyphs are reused across the four models (JR, LaNMM, NMM2/MPR, QIF) by long-standing convention; these are disambiguated by context and flagged below. In particular, A without an argument is the excitatory postsynaptic-potential (PSP) *gain* in the JR/LaNMM synapses; $A(t)$ is the instantaneous envelope of the two-tone field and A_Ω a lock-in amplitude. The applied-field modulation amplitude is ε in JR and LaNMM alike, and A_f in NMM2/QIF. These are not interchangeable units. In JR and LaNMM the field is a membrane polarization in mV entering the sigmoid argument, so ε is measured against the sigmoid voltage scale $1/\rho \approx 1.8$ mV, which is the same in both models. In NMM2/QIF the field enters the excitatory membrane current in the dimensionless MPR units of v_E, and A_f carries no volt scale at all. Likewise C is the JR connectivity constant and the NMM2 global synaptic gain $C\,(\equiv J)$.

Symbol	Meaning	Units
Firing-rate nonlinearity (sigmoid)		
$\sigma(v)$	population firing-rate transfer function	s^{-1}
$\sigma'(v)$	sigmoid slope (read-out gain)	$s^{-1}\,mV^{-1}$
$\sigma''(v)$	sigmoid curvature; the memoryless detector coefficient	$s^{-1}\,mV^{-2}$
$F(Q)$, F', F''	MPR steady-state rate curve, Eq. (5), and its derivatives	–
$C(Q,\omega)$, $K(\omega)$	MPR second-order DC coefficient at fixed current, Eq. (13), and at fixed voltage excursion, Eq. (15); d, ν the population's relaxation rate and ringing frequency	–
e_0	half the maximal firing rate ($\sigma \to 2e_0$ as $v \to \infty$)	s^{-1}
v_0	sigmoid inflection (half-maximal) potential	mV
ρ	sigmoid slope parameter	mV^{-1}
v^*	operating point (field-free fixed point of v)	mV
$v = y_1 - y_2$	net pyramidal membrane potential (LFP proxy)	mV
PEIX	Population Excitation–Inhibition Index (a σ'-based brain-state index)	–
Single-column Jansen–Rit		
A, B	excitatory, inhibitory PSP gains	mV
a, b	excitatory, inhibitory synaptic rates (inverse time constants)	s^{-1}
y_1, y_2	excitatory, inhibitory post-synaptic potentials	mV
C, $C_1 - C_4$	intracolumn connectivity constants	–
p	external input rate; JR bifurcation parameter	s^{-1}
Applied TI field and coupling		
ε	field modulation amplitude, JR and LaNMM (a membrane polarization entering the sigmoid argument)	mV
A_f, $I_E(t)$	amplitude of the field's current-like forcing $I_E(t) = P\,E(t)$ in the E voltage equation, NMM2/QIF (dimensionless MPR units of v_E)	–
m	modulation depth	–
f_c, $\omega_c = 2\pi f_c$	carrier frequency	Hz, $rad\,s^{-1}$
f_1, f_2	the two applied carrier tones ($f_c = (f_1 + f_2)/2$)	Hz
Δf, $\Omega = 2\pi\Delta f$	envelope (beat) frequency, $\Delta f = f_2 - f_1$	Hz, $rad\,s^{-1}$
$E(t)$, $s(t)$	applied field; membrane perturbation reaching the nonlinearity ($s = \sum_c \boldsymbol{\lambda}_f^c \cdot \mathbf{E}$, Eq. (8))	$V\,m^{-1}$; mV
λ, λ_0^c, λ_f^c	field-to-membrane coupling: generic, DC (door c), and carrier-effective ($\lambda_f^c = \lambda_0^c \lvert H_c \rvert$)	mV / ($V\,m^{-1}$)
$\Lambda[\hat{E}]$	direct (non-synaptic) field term in the sigmoid argument, Eq. (3); equals $s(t)$ in the JR column	mV
$H_c(\omega)$, H_{gate}	access filter of compartment c; optional channel-kinetic filter	–
$H_s(\omega)$	JR synaptic transfer function, §2.5	mV s

Symbol	Meaning	Units
$H_m(\omega)$, τ_m	effective membrane low-pass and its time constant	–; ms
τ_s, τ_{rel}	synaptic and population relaxation times in the adiabatic reduction	ms
s_{syn}	filtered firing rate in Eq. (6), distinct from field polarization $s(t)$	s^{-1}
τ	effective access time used in the filter comparisons	ms
Network dynamics, response, and bifurcation		
$\mu_\pm = -\gamma \pm i\omega_0$	leading Jacobian eigenvalue pair	s^{-1}
γ	damping of the critical mode ($\propto$ distance to the Hopf)	s^{-1}
ω_0, $f_0 = \omega_0/2\pi$	natural (Hopf) frequency	$\text{rad}\,\text{s}^{-1}$, Hz
$\tau_{\text{rev}} = 1/\gamma$	network reverberation time	s
$\mathcal{Q} = \omega_0/2\gamma$	near-Hopf resonance quality factor	–
$G(\Omega)$	response to a generated beat drive; $\propto 1/\gamma$ near resonance	output/input /outputdependent
D	beat-source coefficient for the injection convention in Eq. (21)	model-dependent
$\chi^{(2)}(\omega_2, -\omega_1)$	effective second-order coefficient of the generated rate at fixed synaptic input, §2.2; $\sigma''(v^*)/2$ in the memoryless limit	model-dependent
A_Ω	demodulated response: lock-in amplitude at Ω of v (mV) or, in §4.7 and the QIF network, of a rate	mV or s^{-1}
Y_Ω, Y_{LF}	detector (pre-network) output at Ω and at baseband, §2.4	–
$\mathcal{M}[\cdot]$	peak-to-peak excursion of a periodic quantity, Eq. (18)	–
η_{det}	TI/tACS drive ratio of a memoryless transfer at matched peak polarization, App. D	–
δ	threshold offset of a step detector, App. D	mV
$\ell(\omega)$, ℓ_0	AC space constant and its DC value, Eq. (23)	μm
PPC	pairwise phase consistency of single-neuron spike phases at Δf [30]	–
A_{open}	same open-loop rate lock-in , open loop (detector only, no recurrence);); the JR ratio A_Ω/A_{open} dimensionless mVhas units mV s	s^{-1}
I, Q	in-phase, quadrature lock-in components	mV readout units
C^*, J^*	coupling at the Hopf (criticality)	–
Laminar model (LaNMM)		
P_1, P_2	deep (alpha) and superficial (gamma) pyramidal populations	–
PV, SS, SST	parvalbumin, stellate, somatostatin interneurons	–
Exact mean field (NMM2 / MPR) and QIF network		
r_E, r_I	population firing rates (E, I)	s^{-1}
v_E, v_I	mean membrane potentials (E, I), in dimensionless MPR units	–
η_j, $\bar{\eta}$	per-neuron excitability; mean excitability (= common drive, bifurcation param.)	–
Δ	Lorentzian half-width of η_j (excitability heterogeneity)	–
$\tau_E, \tau_I, \tau_a, \tau_g$	E, I membrane and AMPA, GABA synaptic time constants	ms
$C\ (\equiv J)$	global synaptic coupling (inter-population gain)	–
$A_{ee}, A_{ei}, A_{ie}, A_{ii}$	synaptic weight matrix $(1, 1, 1, 2)$	–
s_E, s_I	second-order synaptic activations; $\hat{K}_a, \hat{K}_g$ their operators	s^{-1}
V_j, V_{peak}	QIF neuron potential; spike/reset threshold	mV
N	neurons per population (QIF; $N = 8000$)	–
$A_\Omega/\langle r_E \rangle$	Δf modulation depth (envelope-locked timing metric)	–

Table 4: Symbols, meanings, and (nominal) units. Reused glyphs are disambiguated by context; see the head note on A and C.

B Simulated models: equations and parameters

The models are written in the NMM1 transfer-function formalism of Eq. (3) [15]: synaptic operators $\hat{L}$ transduce firing rates into PSPs, the PSPs sum with any direct field term $\Lambda[\hat{E}]$ in the sigmoid argument, and the sigmoid returns the rate. The Jansen–Rit column is given here; the laminar model is specified in [13, 25] with its field drive in Eq. (26), and the NMM2 PING motif and its QIF network in Eq. (27) and §3.4.

Jansen–Rit column

Writing y_0 for the excitatory PSP driving the interneurons, y_1 and y_2 for the excitatory and inhibitory PSPs onto the pyramidal population, external input p, and the applied-field perturbation $s(t)$ (§2.2) entering the pyramidal sigmoid,

$$\ddot{y}_0 = Aa\,\sigma(y_1 - y_2 + s(t)) - 2a\dot{y}_0 - a^2 y_0, \tag{28}$$

$$\ddot{y}_1 = Aa\,[\,p + C_2\,\sigma(C_1 y_0)\,] - 2a\dot{y}_1 - a^2 y_1, \tag{29}$$

$$\ddot{y}_2 = Bb\,C_4\,\sigma(C_3 y_0) - 2b\dot{y}_2 - b^2 y_2, \tag{30}$$

integrated as six first-order ODEs; the LFP proxy is $v = y_1 - y_2$ [16].

Table 5: Jansen–Rit parameters [16].

Symbol	Meaning	Value
A, B	excit./inhib. PSP gain	3.25, 22 mV
a, b	synaptic rates	100, 50 s^{-1}
v_0, e_0, ρ	sigmoid inflection, max rate/2, slope	6 mV, 2.5 s^{-1}, 0.56 mV^{-1}
C	global connectivity	135
C_1, C_2, C_3, C_4	couplings	C, $0.8C$, $0.25C$, $0.25C$
p	external input (bifurcation knob)	0–400 Hz

C The cubic Hopf normal form lacks a quadratic mixer

The Stuart–Landau equation [31]

$$\dot{z} = (\alpha + i\omega_0)z - |z|^2 z + \mathcal{F}(t), \qquad \gamma = -\alpha > 0, \tag{31}$$

describes a complex mode z with damping γ and natural angular frequency ω_0, driven by the applied input $\mathcal{F}$. For a weak input $\mathcal{F} = \varepsilon f(t)$ on the stable side, the perturbative response has the form $z = \varepsilon z_1 + \varepsilon^3 z_3 + \cdots$. There is no second-order source: the first-order response contains only the applied frequencies, and the cubic first contributes at order ε^3. Thus the normal form has a resonant linear susceptibility but lacks the quadratic difference-frequency generation of Eq. (10). This statement concerns the weak-input expansion; it is not an exclusion of every higher-order intermodulation or strong-drive response.

In the numerical control ($\alpha = -0.5$, $f_0 = 10$ Hz, $f_c = 100$ Hz, $\varepsilon = 0.5$), a square-law detector gives a beat-frequency lock-in amplitude of 2.5×10^{-1}, while $\mathrm{Re}\, z$ gives approximately 2×10^{-8}, at the numerical floor. Driving the same mode directly in band recovers the forced $1/\gamma$ growth. The control separates resonant amplification from the nonlinear source required to drive it at the beat.

D Efficiency of a memoryless transfer against a direct in-band drive

For the logistic family of memoryless transfers, compare balanced TI tones of polarization amplitude ε each with a direct in-band drive of amplitude 2ε, matching peak polarization. Their leading drive amplitudes are $|\sigma''|\varepsilon^2/2$ and $2\sigma'\varepsilon$, so $\eta_{\mathrm{det}} \simeq |\sigma''|\varepsilon/(4\sigma')$. This ratio concerns the specified transfer family and input matching, not TI in general or the dynamic detector of §2.3.

Writing $s = \sigma/(2e_0) \in (0,1)$ gives $\sigma' = 2e_0\rho s(1-s)$ and $\sigma'' = 2e_0\rho^2 s(1-s)(1-2s)$. Since $\mathrm{PEIX} = 4s(1-s)$, the leading ratio satisfies

$$\eta_{\mathrm{det}} \simeq \frac{\rho\,\varepsilon}{4}\sqrt{1-\mathrm{PEIX}} \;\le\; \frac{\rho\,\varepsilon}{4}. \tag{32}$$

It vanishes at the inflection, where the quadratic coefficient is zero, and approaches its bound in the saturated tails. This maximizes a ratio rather than an absolute response: both drives vanish in those tails. For the JR slope $\rho = 0.56\ \mathrm{mV}^{-1}$, the perturbative bound is 1.4% at $\varepsilon = 0.1$ mV and 0.28% at $\varepsilon = 0.02$ mV.

The slope is itself a parameter, so the question is what the whole sigmoid family can do. The logistic transfer depends on voltage only through $\rho(v - v_0)$, so writing

$$u = \rho\,\varepsilon, \qquad x = \rho\,(v^* - v_0), \tag{33}$$

we have $\sigma(v^* + \varepsilon q(t)) = 2e_0\,L(x + u\,q(t))$ for any normalized waveform q, with $L(z) = (1+e^{-z})^{-1}$. Every Fourier amplitude, and hence their ratio, is a function of (u, x) alone; the factor $2e_0$ cancels. Maximizing over v^* and ρ at fixed ε is therefore the same as maximizing over (u, x), and the family supremum is independent of field strength. Evaluating the exact cycle response rather than its quadratic truncation and optimizing x at each u, the ratio rises monotonically over the range explored and converges to the hard-threshold limit

$$\sup_{\rho,\,v^*} \eta_{\mathrm{det}} = 0.3479, \tag{34}$$

approached as $\rho \to \infty$ at a threshold offset δ (the distance from the operating point to the inflection) with $\delta/2\varepsilon = 0.523$. There is no finite optimal transfer width: narrower is always better, and reaching 95% of the ceiling requires $u \gtrsim 6$, that is $1/\rho \lesssim \varepsilon/6$.

Such a detector is not weak. At the optimum, and at the Vieira-scale polarization $\varepsilon \simeq 0.1$ mV, its open-loop beat drive exceeds the physiological-slope sigmoid's by some three orders of magnitude for the same e_0 and waveform, because the field excursion is about twice the threshold offset and the transfer switches across its full range instead of responding linearly. The disparity grows as the field weakens, the smooth sigmoid's response falling as ε^2 while a threshold repositioned with the field keeps its excursion.

The obstacle is the width. At Vieira et al.'s fields the ceiling is approached only for $1/\rho \lesssim 17\ \mu$V, and at human polarizations for $1/\rho \lesssim 3\ \mu$V, with the threshold offset held to the same order as the applied polarization. The width of a neural-mass sigmoid is set by the spread of thresholds and noise across $\sim 10^4$ neurons and is of order millivolts. A microvolt width lies far below that and reads as an idealized microscopic threshold or rectifier rather than as a neural-mass sigmoid; real thresholds are themselves noisy and state-dependent, so it is not a measured single-cell property either. The regime in which the family approaches its ceiling is thus one in which the "population sigmoid" has ceased to describe a population.

The limit is a step detector, not an envelope follower. For a unit step at offset δ the carrier-averaged transduction is $\pi^{-1}\arccos(\delta/A)$ for $A > \delta$ and zero below; with $\beta = \delta/2\varepsilon$ its tACS fundamental is $(2/\pi)\sqrt{1-\beta^2}$ and its TI coefficient reduces by parts to $\eta_{\mathrm{det}} = 2\beta\,[K(m) - E(m)]/(\pi\sqrt{1-\beta^2})$ with $m = 1-\beta^2$ and K, E the complete elliptic integrals, giving 0.3479 at $\beta = 0.523$ by direct quadrature and by the elliptic form alike (`threshold_bound_check.py`). At that optimum the

step's second-to-first harmonic magnitude ratio is 0.151, not the 1/5 of a linear envelope follower. A bounded nondecreasing transfer is a positive mixture of shifted steps and both Fourier coefficients are linear in the transfer, so the step optimum bounds the family; the maximum itself is a numerical evaluation, not a certified bound.

E Extension: the laminar column at low carriers

This extension drives the two-band laminar column (LaNMM, §2.1) with carriers of 25–80 Hz and polarizations up to 3 mV, outside the perturbative regime of the main text and below the carriers TI uses. It is included for what it shows about a band-limited intermediary between field and slow generator; it does not carry the kHz argument.

The single JR column isolates the mechanism; the laminar model (LaNMM, §2.1) confirms it in a cortical column with two resonances of its own. Driving one population with the two-tone field of Eq. (26) and reading the alpha-band power of the deep (P_1, alpha) and superficial (P_2, gamma) pyramidal potentials (Methods, Fig. S2), we recover the same envelope resonance, now carrying the column's intrinsic rhythms.

As a consistency check, driving the deep P_1 (alpha) loop directly reproduces the alpha-band beat resonance of the JR column on both the stable-focus and limit-cycle sides, with the sweep and its code in the repository; what the laminar model adds is the carrier-dependent structure below.

One qualification governs the laminar sweeps. They run to $\varepsilon = 3$ mV on P_2, above the sigmoid voltage scale $1/\rho \approx 1.8$ mV, so they sit deliberately in a nonlinear, non-perturbative regime. They are a demonstration of tongues and frequency captureillustrate nonlinear frequency selection, not a verification of the weak-field square law; that verification is the low-amplitude JR work (Fig. 6b), which fits the square law at 0.05–0.2 mV, one to two orders of magnitude below $1/\rho$.

Sweeping the field amplitude ε and beat frequency Δf at a fixed carrier produces *nonlinear Arnold tongues*: alpha powera region of enhanced alpha-band power: the response in P_1 is maximal largest when Δf matches the deep alpha ($\sim$10 Hz) and grows with ε (Figs. S1a,b and S7a,b), envelope resonance and phase locking of the slow generator to the recovered beatcomponent, as in the JR resonance curves but now in a two-band column. Outside the tongue . The dominant-frequency contours identify where the output is close to the beat, without establishing phase locking of the autonomous rhythm. Away from the enhancement region the drive *reduces* alpha-band power: with the field on P_1, 95% of the amplitude–beat grid and 97% of the carrier–beat grid lie below the field-free baseline (Fig. S7), the drive pulling the autonomous alpha out of the 8–12 Hz band or suppressing it; with the field on P_2 the fractions are 44% and 31% (Fig. S1).

The carrier dependence illustrates the two coupling limits of §2.2–§2.6 within this model's 25–80 Hz carrier range. Sweeping carrier f_c against beat Δf: when When the field is delivered to the *superficial* superficial loop (P_2), strong alpha-band power enhancement in P_1 demodulation requires a *double* resonance—f_c near the P_2 gamma ($\approx$44 Hz) *and* is largest in the gamma carrier band with Δf near the P_1 alpha ($\approx$10 Hz) (Fig. S1c,d). At $\Delta f = 10$ Hz, the carrier maximum is 44 Hz. This selectivity is consistent with a double resonance: the fast loop acts as a tuned radio-frequency (RF) front end that must itself be excited before it can pass a demodulated envelope to whose dynamics affect the carrier dependence of the deep response. With direct P_1 , and off that gamma resonance the response collapses to $\sim$7% of its peak. When the field is delivered *directly* to the slow generator (P_1), the picture inverts: the envelope-locked response persists at every carrier from drive, a ridge near the column's own alpha persists across the carrier range (Fig. S7c). That ridge contains autonomous activity and is not a measurement of the demodulated component alone.

The lock-in also contains the autonomous rhythm when the beat is close to alpha; its maximum over beats cannot isolate the driven response. We therefore compare the off-alpha statistic $S(f_c)$ defined in Methods (Table 6). With P_2 drive it peaks near 39 Hz and falls to about 16–17% of that peak at a 25to 80 Hz , falling only to $\sim$25% of its peak , and the ridge sits at $\Delta f \approx 10.5$ Hz even for a 60 Hz carrier(Fig. S7c), broadband in f_c, as Eq. (10) predicts for direct coupling. With P_1 drive it peaks at 25 Hz and spans about 42–68% of that peak over 30–80 Hz. These are properties of the specified amplitudes and beat average, not universal carrier-rejection factors. Single-beat profiles have deeper minima, including a dip near a 45 Hz carrier under direct P_1 drive: the gamma circuit can affect the response in either stimulation condition.

This contrast requires the phase-sensitive read-out: because P_1 free-runs at its own alpha, band power alone buries a weak

Table 6: LaNMM carrier profiles measured away from alpha. $S(f_c)$ is the mean lock-in amplitude of v_{P_1} over the 17 beats specified in Methods. Percentages are normalized to each row's own carrier maximum; the range and median use carriers from 30 to 80 Hz.

Drive	Window	Peak S (mV)	Peak f_c (Hz)	Range (%)	Median (%)
P_2, 1.5 mV	3 s	0.450	39	23–100	42
P_2, 1.5 mV	10 s	0.450	39	23–100	42
P_1, 0.5 mV	3 s	0.092	25	42–68	53
P_1, 0.5 mV	10 s	0.091	25	42–67	52

envelope-locked drive under an autonomous rhythm that is not phase-locked to the beat, and only the lock-in at Δf separates the two (Methods).

The carrier peaks and aggregate ranges persist with the longer window, although individual normalized values change by up to 3.1 percentage points for P_2 drive and 9.7 for P_1 drive. The smallest S exceeds its mean field-free background by factors of about 16 and 8, respectively, with the 3 s window, and 62 and 32 with 10 s. Some individual beat–carrier points remain near or below background; the comparison concerns the mean over beats, not each grid point. TI's kHz carriers lie outside this model's range; what the contrast shows is that a carrier matched to a fast (gamma) network resonance couples best, while the envelope responsepersists, weaker, off resonance. This both confirms the JR mechanism and refines it: the "inert carrier" . Within it, the carrier can excite a network mode and affect the detected response, qualifying the inert-carrier limit of §2.5 is the direct-coupling idealization, while a band-limited intermediary makes the carrier choice matter, consistent with and linking it to frequency-tagging /and intermodulation paradigms [56].

The LaNMM predicts that TI efficacy should (i) peak when Δf matches a region's intrinsic alpha; (ii) widen and strengthen with modulation amplitude(the tongue); and (iii) for fields delivered via superficial fast circuits, be largest when the carrier is matched to a gamma network resonance, for example two nearby gamma carriers summing to a ∼40 Hz-centered AM field, while remaining present, weaker, for off-resonance carriers. The third is untested: existing TI studies of deep targets sweep the *beat* frequency rather than the carrier against a network resonance [57, 58], so they neither support nor contradict it.

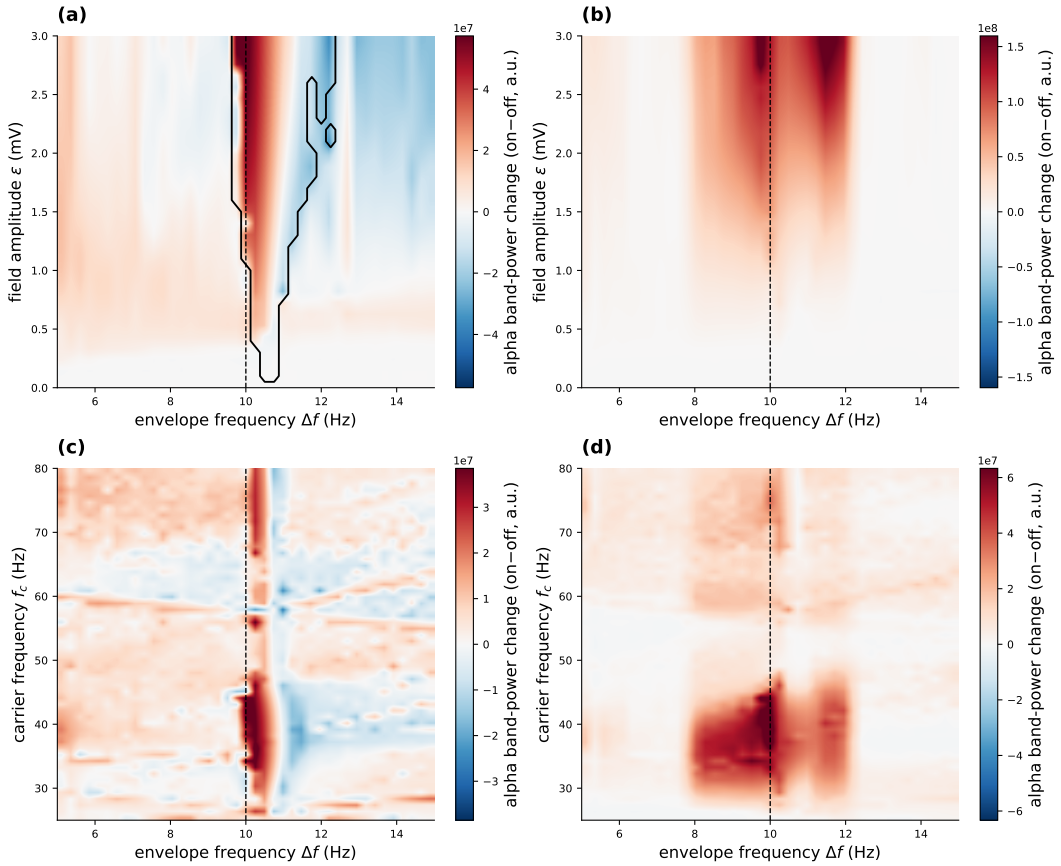


Figure S1: **LaNMM Arnold tongues: two-tone TI field on the superficial P_2 (gamma) loop. LaNMM frequency selection: two-tone TI field on the superficial P_2 (gamma) loop.** The field enters the P_2 sigmoid argument as a membrane polarization ε (mV) with all external drives flat. Color shows the signed change of alpha-band (8–12 Hz) power from the unstimulated $\varepsilon = 0$ baseline, on a zero-centered scale (arbitrary units). *(a,b)* P_1 and P_2 enhancement vs. ε and Δf (carrier 40 Hz), peaking at the P_1 alpha (10.0 Hz, dashed). The black contour in *(a)* is the frequency-dominance set $|f_{\text{out}} - \Delta f| < 0.3$ Hz (Appendix F), drawn because band power alone cannot separate a driven from an autonomous rhythm; it is a dominance screen, not a phase-capture test. The $\varepsilon = 0$ row is excluded, since with no drive the autonomous 10.67 Hz alpha already lies within the tolerance of two grid points (a resolution floor of 0.5 Hz); the set widens to 2.75 Hz at 3 mV. *(c,d)* Enhancement vs. carrier and Δf at $\varepsilon = 1.5$ mV: P_1 demodulation needs *both* a alpha-band enhancement is largest in the gamma carrier band with Δf near the P_1 alpha. At $\Delta f = 10$ Hz, the carrier maximum is 44 Hz. The field-free P_2 gamma ($\approx$ 44peak is near 39.7 Hz) and Δf near ; the P_1 alpha—a double resonancefinite-drive maximum need not coincide with it.

F Vocabulary and metrics

The three terms (forced response, entrainment, gating) are defined in Methods; this appendix gives the metrics behind them.

(i) Forced response. Below the Hopf the column does not oscillate on its own; the field elicits a driven response whose susceptibility we quantify we quantify its response by the lock-in amplitude of the read-out at the beat Δf (Eq. (25)), and there . There is no autonomous rhythm to entrain (in the stable-focus J-curve, timing, tACS). and tACS sweeps.

(ii) Frequency dominance and *entrainment.* Above the Hopf the column free-runs at f_0; entrainment means its dominant frequency is pulled to Δf. We screen for it with the dominant output frequency f_{out} (largest non-DC FFT peak) and the criterion . A 1:1 phase-capture test would follow the unwrapped phase difference from the drive and require absence of secular drift. Our maps instead report $|f_{\text{out}} - \Delta f| < 0.3$ Hz, mapping the tongue and locking range (Fig. S4); where f_{out} is used rather than a phase-locking value [59] because, when an autonomous rhythm and a driven component coexist, instantaneous-phase estimates conflate them. The dominance criterion is a screen, not a capture test: the largest peak can move to the drive frequency because a driven component outgrows the largest non-DC FFT peak. This is a frequency-dominance screen: a forced component can outgrow a persisting autonomous one . A capture test would follow the unwrapped phase difference and require the absence of secular drift; the maps therefore label the set the frequency-dominance set. without capturing it. When the components coexist, instantaneous-phase estimates also require their separation [59]. The maps therefore identify a dominance region, not a measured Arnold tongue.

(iii) Envelope locking / Beat-locked rate and *gating.* A periodic drive can instead modulate the *amplitude* Gating means that the amplitude of a persisting rhythm at is modulated by the beat without capturing its frequency (phase–amplitude coupling) [32, 33]. We quantify this by the Δf-locked component frequency capture [32, 33]. The QIF statistic used here is the lock-in of the population rate (lock-in of r_E at Δf, equivalently the rate *folded* on the Δf beat phase , averaged over many beat cyclesas a function of phase within a single cycle, so that everything not locked to Δf averages away), which isolates the driven envelope from the intrinsic rhythm (the complemented by the rate folded on beat phase over whole cycles. It measures beat-locked firing. A raw rate fold does not extract the gamma amplitude, and sidebands can arise from amplitude or phase modulation. The above-Hopf QIF panel, with its ∼11 Hz detuning, is a case of gating, not entrainment)panels therefore establish coexistence and mixing of the beat and gamma rhythms; a gamma-amplitude estimate would be needed to identify gating specifically.

The Arnold-tongue protocol for Fig. S4 places the column on the limit-cycle side (input p between the SNIC saddle-node on invariant circle and the Hopf), free-running at $f_0(p)$)and drives it with $s(t) = \varepsilon \cos \Omega t$; the implementation, including the grid , and records the dominant frequency. Grid widths and the clipping check , is in the released code. One subtlety: as onset is approachedthe cycle amplitude vanishes and the tongue merges into the forced-resonance bandwidth, so the supercritical locking range and the subcritical $1/\gamma$ susceptibility coincide there by construction—which is why responsiveness peaks at criticality on both sidesare specified in the code. As the Hopf is approached, the autonomous cycle shrinks and the frequency-dominance region broadens in these simulations. Its width and the stable-focus susceptibility describe different responses; their increase near onset does not make them the same quantity.

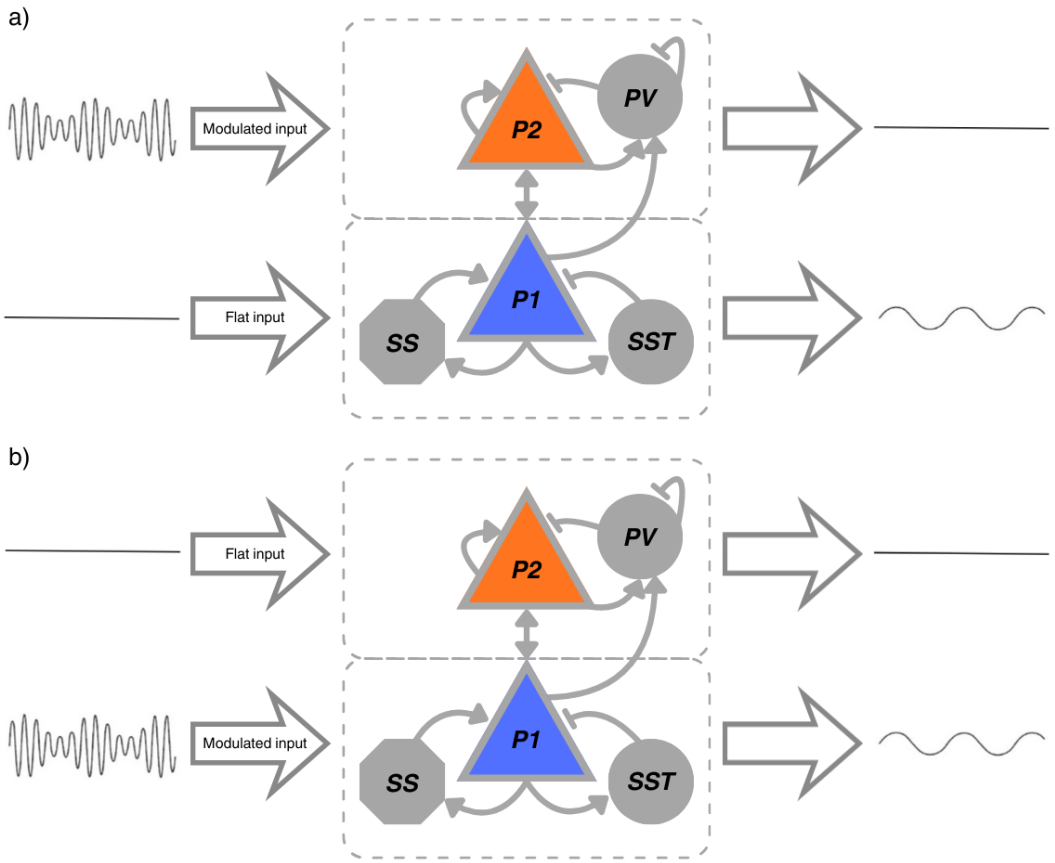


Figure S2: Stimulation setup in a LaNMM column. The column couples a superficial PING subcircuit (pyramidal P_2 + PV; gamma) and a deep JR subcircuit (pyramidal P_1 + SS + SST; alpha). *(a)* the TI field drives P_2 while P_1 receives a flat drive; *(b)* the TI field drives P_1 while P_2 is flat. Through the sigmoid nonlinearities and P_1–P_2 coupling, the generated beat-frequency component is transferred to the deep loop: P_2 carries the modulated fast carrier, while P_1 exposes the recovered low-frequency component (right traces).

G Supplementary figures

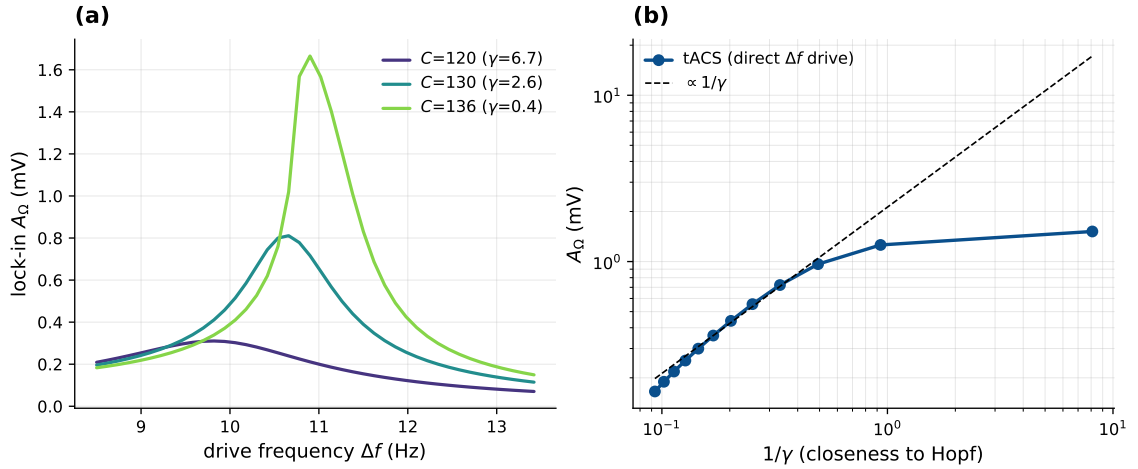


Figure S3: tACS shares the network amplifier (Jansen–Rit). A direct low-frequency (tACS) drive at Δf enters the column without a carrier, so it needs no demodulation, but feeds the same near-Hopf resonator. With the operating point pinned, sweeping the coupling $C\,(=J)$ toward the alpha Hopf: *(a)* the lock-in resonance at Δf sharpens and grows as $C \to C^*$; *(b)* the response grows as $1/\gamma$ (dashed) and saturates near criticality—the same network amplification as the demodulated TI drive (Fig. 9), but linear in the field rather than square-law. Throughout, the column is a stable focus ($\gamma > 0$).

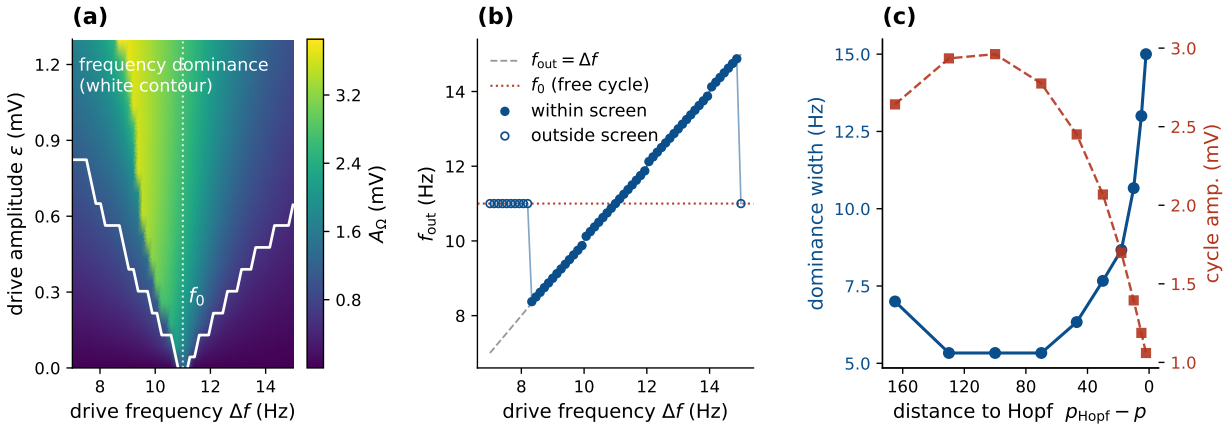


Figure S4: Above the Hopf: entrainment, not $1/\gamma$ amplification (Jansen–Rit). Frequency dominance in the driven autonomous Jansen–Rit column. The column is set in its autonomous alpha limit cycle ($p = 250$, $f_0 \approx 11$ Hz) and driven by a direct in-band sinusoid. *(a)* The 1:1 Arnold tongue, where the dominant output frequency locks to Δf, is set $|f_{out} - \Delta f| < 0.3$ Hz forms a wedge anchored at near f_0 that widens with drive. It screens for phase capture but does not establish it. *(b)* Inside this region the tongue the output dominant frequency follows Δf; outside, it falls back to remains near f_0. *(c)* Toward the Hopf at fixed drive the locking range dominance width grows as the autonomous cycle amplitude vanishes (blue, left axis; red dashed, right axis). Above the Hopf amplification reads as tongue this width rather than as describes frequency selection in a driven autonomous oscillator; it is distinct from the diverging $1/\gamma$ gain linear susceptibility of the stable-focus side (Fig. 9): the column is most responsive near . Both diagnostics increase toward criticality on both sidesin these sweeps.

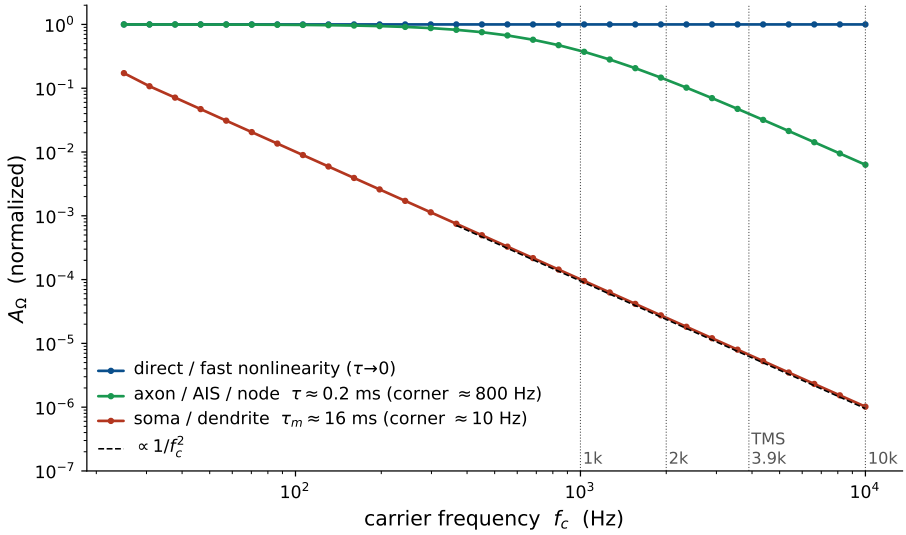


Figure S5: Carrier attenuation depends on the assumed access time (Jansen–Rit, open loop). Open-loop demodulated response (normalized to the $\tau \to 0$ value) vs. carrier frequency up to 10 kHz. With direct coupling ($\tau \to 0$) the response is flat—carrier-independent. A slow somatic membrane ($\tau_m \approx 16$ ms) rolls off as $1/f_c^2$ (dashed guide); the assumed fast response ($\tau = 0.2$ ms) retains about 0.14 of the direct response at 2 kHz and 0.04 at 3.9 kHz. These are sensitivity cases, not measurements of anatomical compartments.

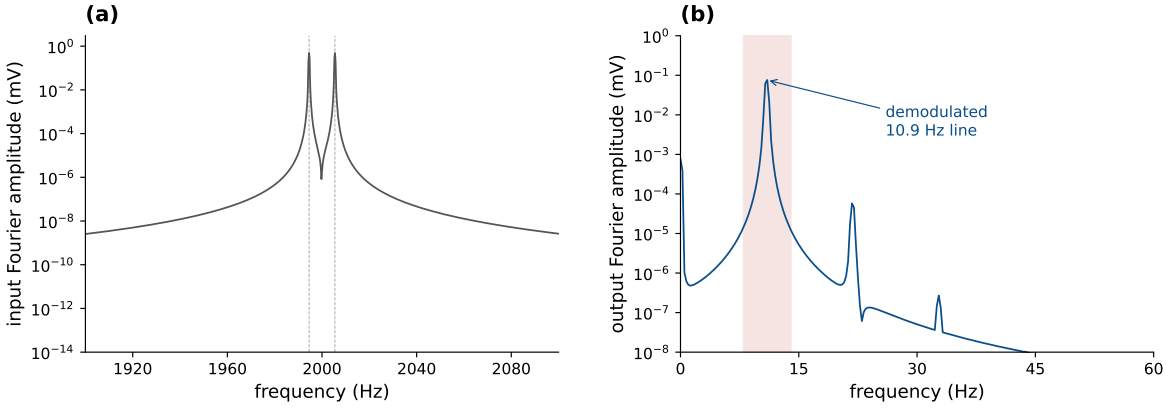


Figure S6: Two-tone TI at a kHz carrier (Jansen–Rit, assumed fast access). Two equal tones at $f_1 = 1994.54$ and $f_2 = 2005.46$ Hz, beating at approximately 10.9 Hz, pass through the assumed low-pass ($\tau = 0.2$ ms) into the recurrent column. *(a)* The input amplitude spectrum has lines only at f_1 and f_2; in the 8–14 Hz band it is 2.2×10^{-13}, zero to numerical precision. *(b)* The output carries a demodulated line at the beat, 10.9 Hz.

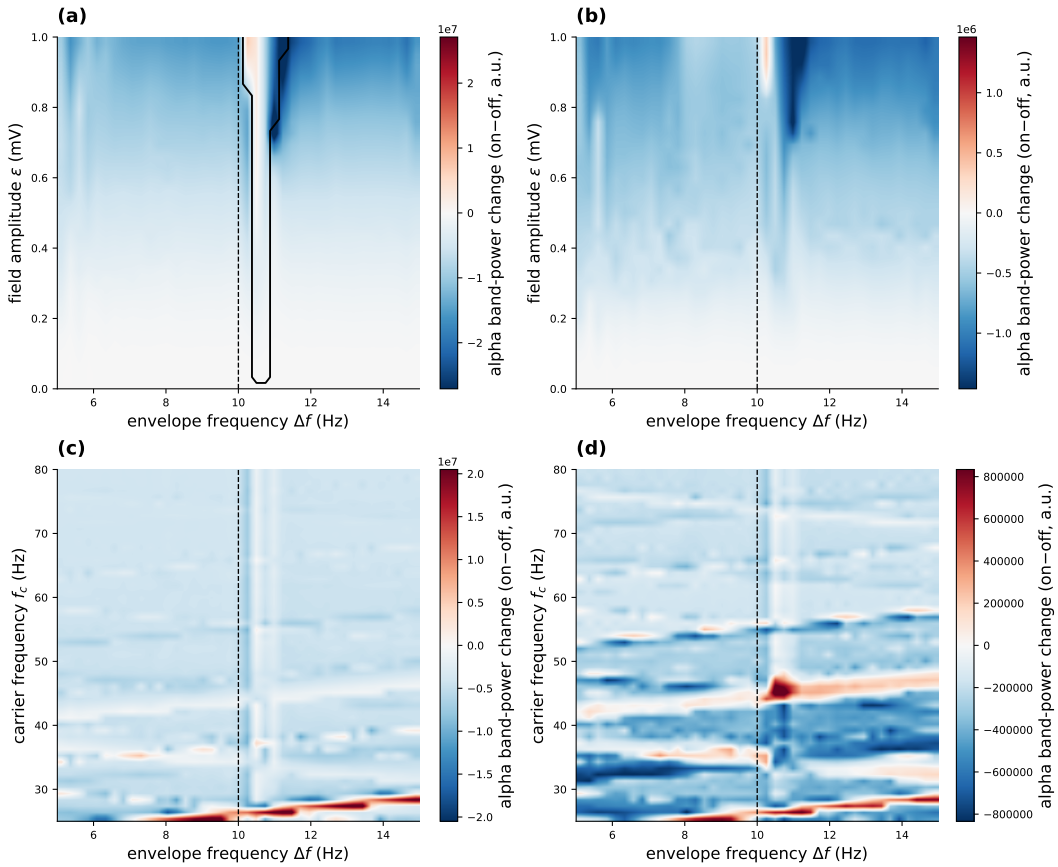


Figure S7: **LaNMM Arnold tongues: two-tone TI field delivered directly to the deep P_1 (alpha) loop. LaNMM frequency selection: two-tone TI field delivered directly to the deep P_1 (alpha) loop.** As Fig. S1 but with the field on P_1. The deep loop is captured by a much weaker field than the superficial oneshows frequency dominance at smaller fields, so the amplitude range is $\varepsilon \leq 1$ mV here against 3 mV there; above ≈ 2 mV . These finite-amplitude maps extend beyond the drive captures the whole Δf sweep and leaves the perturbative regime of the theorydescribes. Color: signed change of alpha-band power from the $\varepsilon = 0$ baseline, zero-centered; most of the grid is suppression. *(a,b)* P_1 and P_2 enhancement vs. ε and Δf; the black contour in *(a)* outlines the frequency-dominance set $|f_{\text{out}} - \Delta f| < 0.3$ Hz (Appendix F), computed from the dominant output frequency because band power alone cannot separate a driven from an autonomous rhythm; the $\varepsilon = 0$ row is excluded (resolution floor 0.5 Hz). The set widens to 1.25 Hz at $\varepsilon = 1$ mV. *(c,d)* Enhancement vs. carrier frequency and Δf at $\varepsilon = 0.5$ mV. P_1 responds The ridge near alpha persists across a *broad* the carrier band—a vertical ridge at $\Delta f \approx 10$ Hz, band and includes the direct-coupling limit of Eqautonomous rhythm. (10). Read with the A separate lock-in at Δf the response is retained at every carrier comparison away from 25 to 80 Hz (median 25% of peak)alpha, including its window and background controls, is given in contrast to the ∼7% collapse off resonance under superficial driveTable 6; these panels show band-power changes.

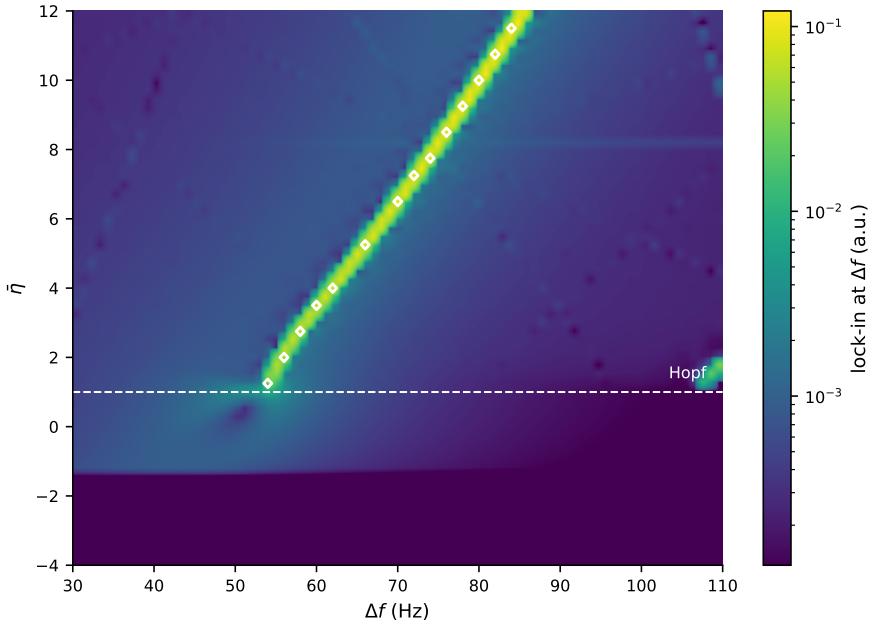


Figure S8: NMM2 PING resonance map (exact mean field). Demodulated response over the (Δf, background drive $\bar{\eta}$) plane, log color scale. The ridge follows the gamma natural frequency, with f_0 rising with $\bar{\eta}$ for these parameters. White markers outline the 1:1 captured frequency-dominance set (Appendix F), drawn only above the Hopf (dashed line) where there is an autonomous rhythm to capture; below it the same color field is a forced response. The markers do not establish phase capture. Lock-in amplitude cannot separate the twodriven and autonomous contributions, since both can place power at Δf.

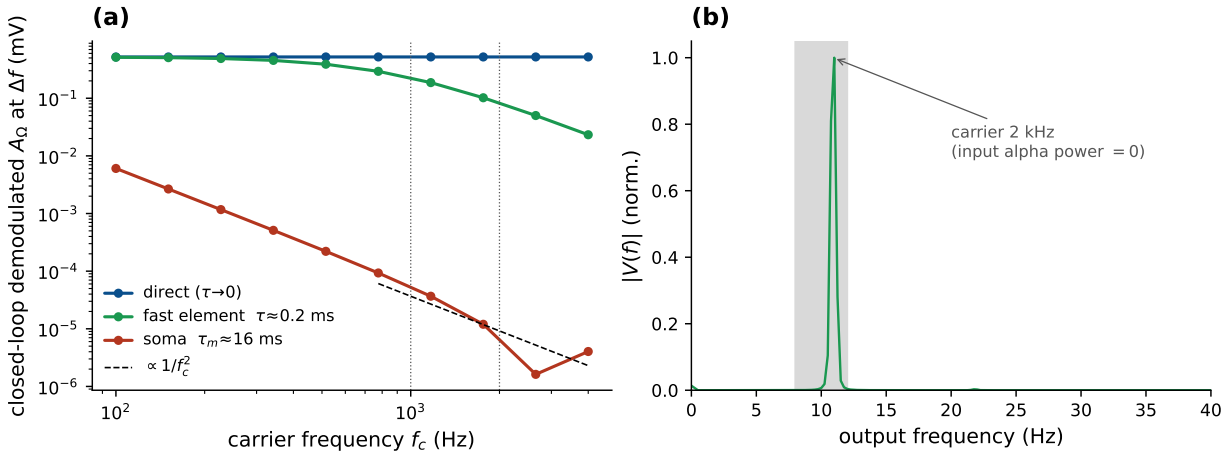


Figure S9: Demodulation at a kHz carrier (Jansen–Rit, closed loop). The applied field passes through an explicit membrane filter before the sigmoid. *(a)* Closed-loop demodulated A_Ω at $\Delta f = f_0$ vs. carrier f_c for three access models: direct ($\tau \to 0$, carrier-independent), fast ($\tau = 0.2$ ms), and somatic ($\tau_m = 16$ ms; $1/f_c^2$ roll-off). The fast time is assumed rather than assigned to a measured compartment. *(b)* Output spectrum for a 2 kHz carrier delivered through the fast element: an alpha line at f_0, synthesized by the column although the input carries no alpha power.

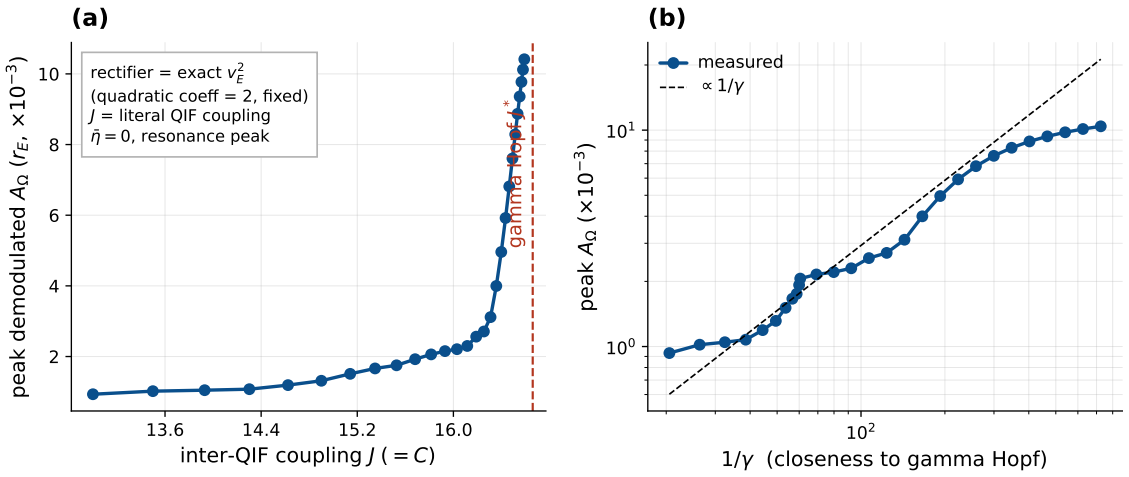


Figure S10: Coupling controls the amplification in the exact mean field (NMM2 PING, gamma). $J\,(=C)$ is the literal inter-QIF synaptic weight; at this carrier . The sweep is unpinned and uses the generated leading fast-carrier source is operating-point independent for normalization (§2.3), so no pinning is needed; its finite-carrier corrections have not been bounded across the full sweep. *(a)* The peak demodulated response of r_E grows as $J \to J^*$ (gamma Hopf, $\bar{\eta} = 0$; stable focus, $\gamma > 0$). *(b)* The gain grows as $1/\gamma$ (dashed), saturating near criticality—the JR law, now with coupling and rectifier both derived.

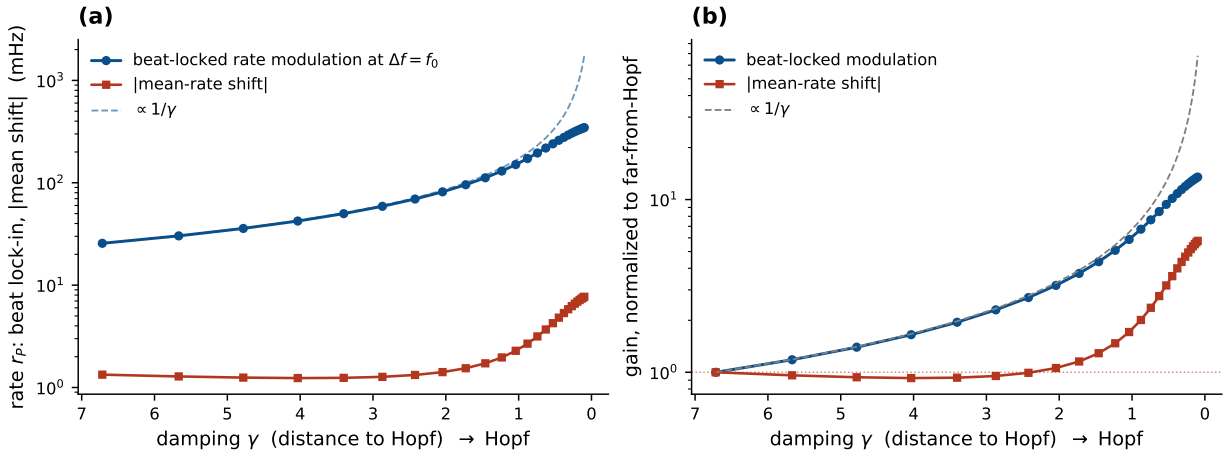


Figure S11: Envelope-locked modulation against mean-rate shift (Jansen–Rit, detection pinned). As the column is driven toward the Hopf (from the stable side, $\gamma > 0$) through the coupling at fixed $\sigma''(v^*)$, both quantities are read from the pyramidal rate $r_P = \sigma(v + s)$, in mHz. *(a)* The beat-locked modulation at $\Delta f = f_0$ (blue) is resonantly amplified and tracks $1/\gamma$ (dashed) before saturating; the magnitude of the mean-rate shift (red) stays at a few mHz and rises near the Hopf. *(b)* Both normalized to their far-from-Hopf values (log scale): the modulation gain follows $1/\gamma$; the mean-shift gain rises later and less. Modulation exceeds mean shift by 19× far from the Hopf and 45–66× near it.

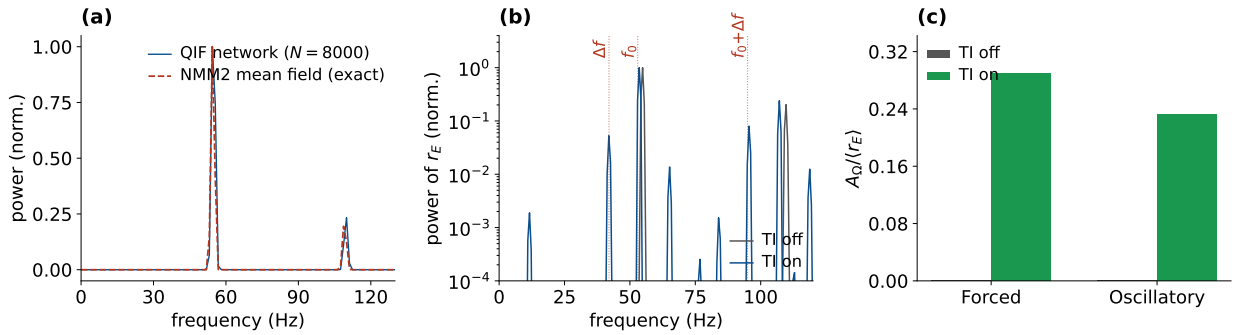


Figure S12: Timing, not rate, in the QIF network. **Beat-locked modulation and mean-rate change in the QIF network.** *(a)* Field-free power spectrum of $r_E(t)$, normalized: the spiking network ($N = 8000$) matches the exact NMM2 mean field in gamma frequency (∼53 Hz); a normalized spectrum does not test the mean rate. *(b)* Intermodulation above the Hopf (TI off vs. on, log power): the nonlinearity mixes the imposed $\Delta f = 42$ Hz beat with the intrinsic 53 Hz gamma, raising the direct Δf line and the sum sideband near 95 Hz, both absent with TI off. This is the sideband signature of These sidebands establish nonlinear mixing; they do not uniquely identify gamma-amplitude gatingrather than entrainment. *(c)* The Δf modulation depth $A_\Omega/\langle r_E \rangle$, off vs. on: below 0.003 rising to 0.29 (forced) and 0.23 (oscillatory), while the mean rate rises by about 8–10%11%. Modulation depth is reported rather than the off→on lock-in ratio, whose denominator is the field-free floor.