
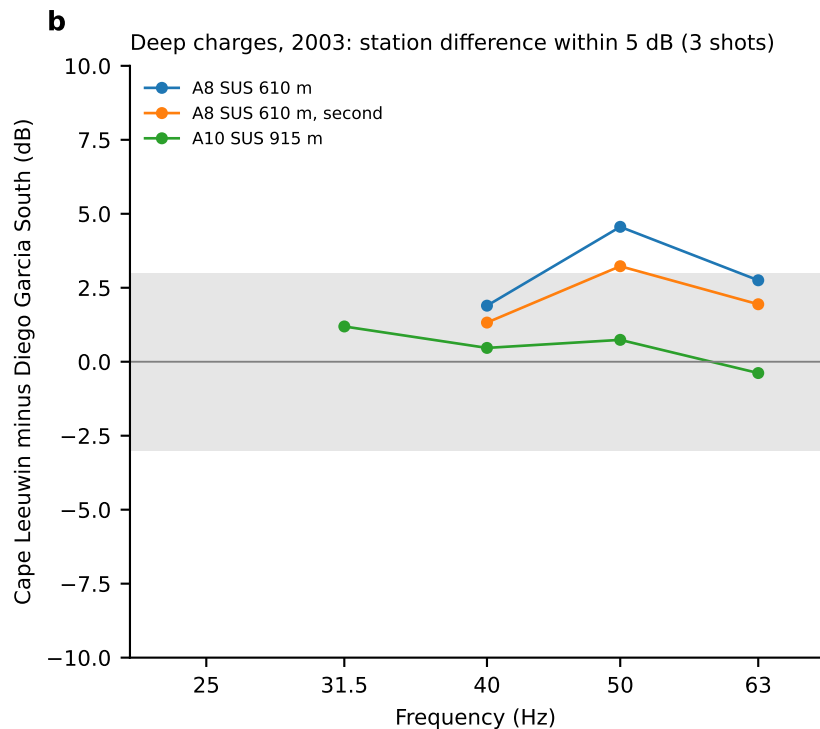


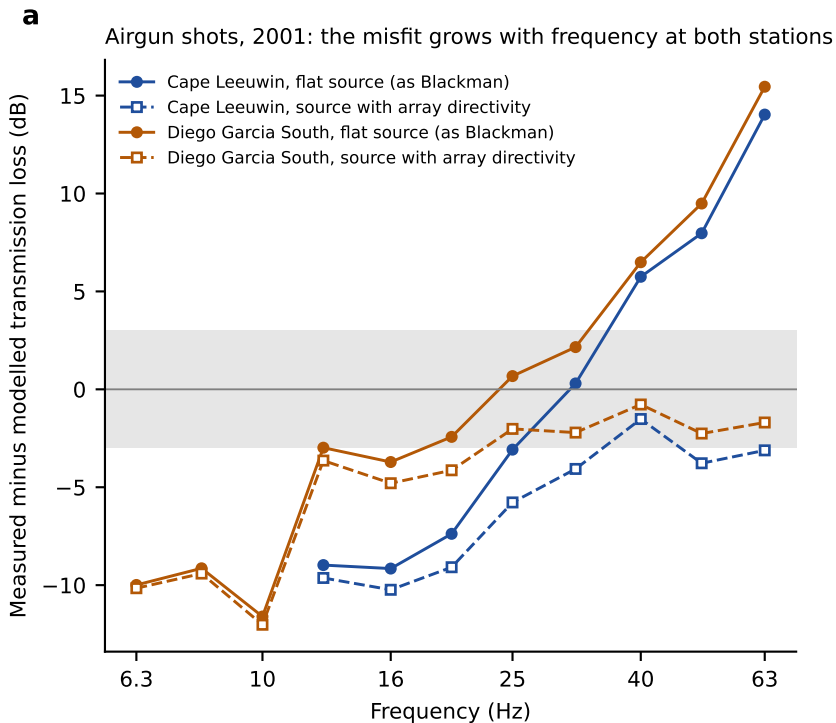

What the chart shows. (a) Airgun shots in 2001 were recorded at two stations. The model gives too much loss at low frequency and too little at high frequency, at both stations. A source that sends less sound sideways at high frequency (open markers) removes about two thirds of the change with frequency, but leaves the model 2 to 5 dB too lossy. (b) Small charges at 610 m and 915 m in 2003 were recorded at both stations. The difference between the stations agrees with the model within 5 dB above 30 Hz, and its median is within 3 dB. Below 30 Hz the charges were too weak to see at both stations at once. The grey band is ± 3 dB.

Technical. (a) $r_b = TL_{obs} - TL_{model}$, Blackman et al. 2004 Fig. 23 (p. 21) as digitised by the module (± 2 dB), KRAKEN adiabatic incoherent modes, hard half-space, 10 m source; M3 = 4×5 planar array, 24×16 m, azimuth mean, horizontal (geometry proxy, not Ewing's). Slopes (dB/octave): flat 10.4 (H01W), 7.4 (H08S); M3 3.7, 3.0. (b) $d_b = [S_b + TL_b](H01W) - [S_b + TL_b](H08S)$, S_b = noise-subtracted signal PSD from Blackman App. B (pp. 28-31) traced by the audit, bands with SNR ≥ 3 dB at both stations; module propagation on audit-built paths (GEBCO_2026, WOA23 95A4 May/June).