

ALF Tutorial – dev

Examples and exercises for the *ALF* (Algorithms for Lattice Fermions) package

Florian Goth, Johannes S. Hofmann, Jonas Schwab,
Jefferson S. E. Portela, Fakher F. Assaad

September 14, 2026

Contents

0. Installing ALF+pyALF	2
0.1. Installing ALF Requirements	2
0.2. Setting ALF directory through environment variable	3
0.3. Installing pyALF	3
0.4. Checking installation	4
0.5. Alternative: Ready-to-use container image	4
I. Just run it	4
1. A minimal ALF run	5
1.1. Exercises	8
2. Trotter systematic error - Hubbard on the square lattice	8
2.1. Exercises	12
3. Testing against ED - Hubbard on a ring	12
3.1. Exercises	16
4. Projective algorithm	16
4.1. Exercises	19
II. Getting your hands dirty - writing new code	21
1. Dimensional crossover	21
1.1. Modifying the hopping	22
1.2. The SU(2) Hubbard-Stratonovich transformation	23
2. Defining a new model: The one-dimensional t-V model	23
2.1. Define new model	23
2.2. Phase transition	25
3. Adding a new observable	25
3.1. Applying Wick's theorem	25
3.2. Necessary code modifications	26

The ALF package provides a general code for auxiliary-field Quantum Monte Carlo simulations and default analysis. In this tutorial we show how users from beginners to specialists can profit from ALF. This document is divided in two parts:

Part I. The first, introductory part of the tutorial is based on ALF's python interface – **pyALF** – which greatly simplifies using the code, making it ideal for: *obtaining benchmark* results for established models; *getting started* with QMC and ALF; or just *quickly running* a simulation.

Part II. The second part is independent of the first and aimed at more advanced users who want to simulate their own systems. It guides the user on how to modify the package's Fortran source code

and presents the resources implemented to facilitate this task.

This document is intended to be self-contained, but the interested reader should check [ALF's documentation](#), which contains a thorough, systematic description of the package.

0. Installing ALF+pyALF

0.1. Installing ALF Requirements

First, we will install the dependencies of [ALF](#) itself:

- make
- a Fortran compiler, such as `gfortran` or `ifort`,
- the libraries Lapack and Blas
- Python3 (Already needed for pyALF)
- MPI libraries (optional)
- For HDF5 (optional, but pyALF uses it by default):
 - C++ preprocessor (default: `g++`)
 - Curl or Wget
 - gzip development libraries

Linux

Instructions for installing the prerequisites for different Linux distributions

Debian/Ubuntu/Linux Mint:

```
sudo apt install make gfortran libblas-dev liblapack-dev \  
python3 libopenmpi-dev g++ curl libghc-zlib-dev git
```

Red Hat/Fedora/CentOS:

```
sudo yum install make gfortran blas-devel lapack-devel \  
python3 openmpi-devel g++ curl zlib-devel git
```

OpenSuSE/SLES:

```
sudo zypper install make gcc-fortran lapack-devel \  
python3 openmpi-devel gcc-c++ curl zlib-devel git
```

Arch Linux:

```
sudo pacman -S make gcc-fortran lapack python3 openmpi curl zlib git
```

Other Unixes

`gfortran` and the `lapack` implementation from `netlib.org` should be available for your system. Consult the documentation of your system on how to install the relevant packages. The package names from linux should give good starting points for your search.

MacOS

For MacOS, Xcode and the Apple developer tools should be installed.

gfortran for MacOS can be found at <https://gcc.gnu.org/wiki/GFortranBinaries#MacOS>. Although the most convenient way to get gfortran and MPI libraries set up might be through [Homebrew](#):

```
brew install gfortran open-mpi
```

Windows

The easiest way to compile ALF in Windows is through the [Windows Subsystem for Linux](#) (WSL). It allows to run Linux within Windows. You can install the WSL and follow the instructions for Linux.

0.2. Setting ALF directory through environment variable

Since pyALF can automatically clone ALF with git, it is not strictly necessary to download ALF manually, but pyALF will download ALF every time it does not find it. Therefore it is recommended to clone ALF once manually set its location in the environment variable `ALF_DIR`. This way, pyALF will use the same ALF source code directory every time.

ALF can be cloned with the Unix shell command

```
git clone https://git.physik.uni-wuerzburg.de/ALF/ALF.git
```

this will create a folder called ALF in the current working directory of the terminal and download the repository there.

The environment variable can be set with the command

```
export ALF_DIR="/path/to/ALF"
```

where `/path/to/ALF` is the location of the ALF code, for example `/home/someone/Programs/ALF`. To not have to repeat this command in every terminal session, it is advisable to add it to a file sourced when starting the shell, e.g. `~/.bashrc` or `~/.zshrc`.

0.3. Installing pyALF

Warning

In previous versions of pyALF, the installation instructions asked the users to set the environment variable `PYTHONPATH`. This conflicts with the newer pip package, therefore you should remove definitions of this environment variable related to pyALF.

The easiest way to install pyALF with all its Python dependencies is via the Python package installer [pip](#)¹:

```
pip install pyALF
```

To use the Jupyter Notebooks utilized in the following parts of this tutorial, Jupyter is needed:

```
pip install jupyter
```

¹It might make sense to use a dedicated Python environment using e.g. [Python venv](#) or a [conda environment](#). If you do not yet have python environment with working pip, we recommend [miniforge](#).

0.4. Checking installation

To check if things have been set up correctly, the script `minimal_ALF_run`, which has been installed with pyALF, can be used. It runs a very short simulation of the Hubbard model on a square lattice and calculates the energy. One should be able to run it by executing

```
minimal_ALF_run
```

in the Unix shell. If it does clone the ALF repository, `ALF_DIR` has not been set up correctly. Note that on the first compilation, ALF downloads and compiles HDF5², which can take up to ~15 minutes and may print out many warnings. After successful execution, there should be a folder `ALF_data`, containing the finished simulation.

0.5. Alternative: Ready-to-use container image

For a ready-to-use environment, one can use the Docker image [alfcollaboration/jupyter-pyalf-full](https://hub.docker.com/r/alfcollaboration/jupyter-pyalf-full), which has the above mentioned dependencies, ALF and pyALF installed. With a suitable container runtime e.g. [Docker](#) or [Podman](#), it can be used run ALF and pyALF without any further setup. It is derived from the Jupyter Docker Stacks, therefore [this documentation](#) applies. For example, one could run a container like this:

```
docker run -it --rm -p 127.0.0.1:8888:8888 -v "$PWD":/home/jovyan/work \
  docker.io/alfcollaboration/jupyter-pyalf-full
```

- The `-p` flag is used to expose port 8888 and you can access a JupyterLab running within the container by navigating to <http://localhost:8888/lab?token=<token>> with you browser, where `<token>` has to be replaced by the token echoed to the terminal on startup.
- The `-v` flag mounts the current working directory to `/home/jovyan/work` within the container, allowing to work on the same data in- and outside of the container.
- The `--rm` flag instructs Docker to automatically remove the container after it exits, avoiding cluttering up the system with unused containers.
- The `-i` and `-t` flags keep the container's STDIN open and attach a pseudo-terminal, allowing interactive input on the terminal.

It is also possible to use the container without launching the included JupyterLab. The following command launches a container, which executes `minimal_ALF_run`, saving the results in the current working directory and removing the container right after that.

```
docker run -it --rm -v "$PWD":/home/jovyan/work \
  docker.io/alfcollaboration/jupyter-pyalf-full \
  bash -c 'cd /home/jovyan/work && minimal_ALF_run'
```

Part I. Just run it

What follows is a collection of self-explanatory Jupyter notebooks written in Python, each centered on a detailed example followed by a few simple exercises. The notebooks printed below can be found, together with the necessary files and an increasing number of additional notebooks exploring ALF's capabilities, in the [pyALF repository](#).

Starting

Jupyter notebooks [are run](#) through a Jupyter server ³ started, e.g., from the command line:

²To avoid confusions with different compilers, ALF does (by default) not use system-provided HDF5-libraries, but instead compiles them itself on first usage.

³Note that pyALF can also be used to start a simulation from the command line, without starting a Jupyter server or using a notebook. For instance: `alf_run -R -alfdir /home/debian/ALF -config "Intel" -executable_R`

jupyter-lab

(or, depending on the installation, `jupyter lab`, or `jupyter-notebook` or `jupyter notebook`) which opens the “notebook dashboard” in your default browser, where you can navigate through your file structure to the `pyALF` directory. There you will find the interface’s core module, `py_alf.py`, some auxiliary files, and notebooks such as the ones included below. Have fun.

Notebooks

1. A minimal ALF run

In this bare-bones example we use the `pyALF` interface to run the canonical Hubbard model on a default configuration: a 6×6 square grid, with interaction strength $U = 4$ and inverse temperature $\beta = 5$.

Bellow we go through the steps for performing the simulation and outputting observables.

1. Import `ALF_source` and `Simulation` classes from the `py_alf` python module, which provide the interface with ALF:

```
[1]: from py_alf import ALF_source, Simulation # Interface with ALF
```

2. Create an instance of `ALF_source`, downloading the ALF source code from the [ALF repository](#), if `alf_dir` does not exist. Gets `alf_dir` from environment variable `$ALF_DIR`, or defaults to “./ALF”, if not present:

```
[2]: alf_src = ALF_source(branch='master')
```

```
Checking out branch master
Your branch is up to date with 'origin/master'.

Switched to branch 'master'
```

3. Create an instance of `Simulation`, overwriting default parameters as desired:

```
[3]: sim = Simulation(
    alf_src,
    "Hubbard",                # Name of Hamiltonian
    {                          # Dictionary overwriting default parameters
        "Lattice_type": "Square"
    },
    machine='GNU' # Change to "intel", or "PGI" if gfortran is not installed
)
```

4. Compile ALF. The first time it will also download and compile HDF5, which could take ~ 15 minutes.

```
[4]: sim.compile()
```

```
Compiling ALF...
Cleaning up Prog/
Cleaning up Libraries/
Cleaning up Analysis/
Compiling Libraries

entanglement_mod.F90:35:2:

   35 | #warning "You are compiling entanglement without MPI. No results
      | possible"
      | 1~~~~~
Warning: #warning "You are compiling entanglement without MPI. No results
possible" [-Wcpp]
```

Hubbard -mpi True starts a parallel run of the Hubbard model, using ALF compiled with `ifort`. Notice that `alf_run` requires a configuration file `Sims`, which defines the simulation parameters. An entry of `Sims` might read as: Hubbard, {"Lattice_type": "Square", "L1": 4 , "L2": 4, "NBin": 5, "ham_T": 0.0, "Nsweep" : 2000, "Beta": 1.0, "ham_chem": -1.0 }

```

ar: creating modules_90.a
ar: creating libqrref.a

Compiling Analysis
Compiling Program
Parsing Hamiltonian parameters
filename: Hamiltonians/Hamiltonian_Kondo_smod.F90
filename: Hamiltonians/Hamiltonian_Hubbard_smod.F90
filename: Hamiltonians/Hamiltonian_Hubbard_Plain_Vanilla_smod.F90
filename: Hamiltonians/Hamiltonian_tV_smod.F90
filename: Hamiltonians/Hamiltonian_LRC_smod.F90
filename: Hamiltonians/Hamiltonian_Z2_Matter_smod.F90
Compiling program modules
Link program
Done.

```

5. Perform the simulation as specified in `sim`:

```
[5]: sim.run()
```

```

Prepare directory "/home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_Square"
for Monte Carlo run.
Create new directory.
Run /home/jonas/Programs/ALF/Prog/ALF.out
ALF Copyright (C) 2016 - 2021 The ALF project contributors
This Program comes with ABSOLUTELY NO WARRANTY; for details see license.GPL
This is free software, and you are welcome to redistribute it under certain
conditions.
No initial configuration

```

6. Perform some simple analysis:

```
[6]: sim.analysis()
```

```

### Analyzing /home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_Square ###
/home/jonas/Programs/pyALF/Notebooks
Scalar observables:
Ener_scal
Kin_scal
Part_scal
Pot_scal
Histogram observables:
Equal time observables:
Den_eq
Green_eq
SpinT_eq
SpinXY_eq
SpinZ_eq
Time displaced observables:
Den_tau
Green_tau
SpinT_tau
SpinXY_tau
SpinZ_tau

```

7. Read analysis results into a Pandas Dataframe with one row per simulation, containing parameters and observables:

```
[7]: obs = sim.get_obs()
```

```

/home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_Square
No orbital locations saved.

```

```
[8]: obs
```

```

[8]:
/home/jonas/Programs/pyALF/Notebooks/ALF_data/H...      continuous  ham_chem  \
                                                0      0.0

/home/jonas/Programs/pyALF/Notebooks/ALF_data/H...      ham_t  ham_t2  ham_tperp  \
                                                1.0    1.0      1.0

                                                ham_u  ham_u2  mz  11  12  \

```

```

/home/jonas/Programs/pyALF/Notebooks/ALF_data/H... 4.0 4.0 1 6 6

... \
/home/jonas/Programs/pyALF/Notebooks/ALF_data/H... ...

SpinXY_tauK_err \
/home/jonas/Programs/pyALF/Notebooks/ALF_data/H... [[0.22628722504550844,
0.37685459854025805, 0...

SpinXY_tauR \
/home/jonas/Programs/pyALF/Notebooks/ALF_data/H... [[0.0575988003757706,
-0.10378742200171556, 0...

SpinXY_tauR_err \
/home/jonas/Programs/pyALF/Notebooks/ALF_data/H... [[0.01248834666799511,
0.036871289378260834, 0...

SpinXY_tau_lattice \
/home/jonas/Programs/pyALF/Notebooks/ALF_data/H... {'L1': [6.0, 0.0], 'L2':
[0.0, 6.0], 'a1': [1...

SpinZ_tauK \
/home/jonas/Programs/pyALF/Notebooks/ALF_data/H... [[0.9040036362034092,
0.5628191896020613, 0.61...

SpinZ_tauK_err \
/home/jonas/Programs/pyALF/Notebooks/ALF_data/H... [[0.1494786750311893,
0.06006336638595281, 0.0...

SpinZ_tauR \
/home/jonas/Programs/pyALF/Notebooks/ALF_data/H... [[0.1013442053139478,
-0.11445552391592478, 0...

SpinZ_tauR_err \
/home/jonas/Programs/pyALF/Notebooks/ALF_data/H... [[0.06273438448505823,
0.056390780430637014, 0...

SpinZ_tau_lattice \
/home/jonas/Programs/pyALF/Notebooks/ALF_data/H... {'L1': [6.0, 0.0], 'L2':
[0.0, 6.0], 'a1': [1...

lattice
/home/jonas/Programs/pyALF/Notebooks/ALF_data/H... {'L1': [6.0, 0.0], 'L2':
[0.0, 6.0], 'N_coord'...

[1 rows x 111 columns]

```

- The internal energy of the system (and its error) are accessed by:

```
[9]: obs.iloc[0][['Ener_scal0', 'Ener_scal0_err', 'Ener_scal_sign', 'Ener_scal_sign_err']]
```

```
[9]: Ener_scal0          -29.821914
Ener_scal0_err         0.13032
Ener_scal_sign          1.0
Ener_scal_sign_err      0.0
Name: /home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_Square, dtype:
object
```

- The simulation can be resumed by calling `sim.run()` again, increasing the precision of results:

```
[10]: sim.run()
sim.analysis()
obs2 = sim.get_obs()
obs2.iloc[0][['Ener_scal0', 'Ener_scal0_err', 'Ener_scal_sign', 'Ener_scal_sign_err']]
```

```

Prepare directory "/home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_Square"
for Monte Carlo run.
Resuming previous run.
Run /home/jonas/Programs/ALF/Prog/ALF.out
ALF Copyright (C) 2016 - 2021 The ALF project contributors
This Program comes with ABSOLUTELY NO WARRANTY; for details see license.GPL
This is free software, and you are welcome to redistribute it under certain

```

```

conditions.
### Analyzing /home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_Square ###
/home/jonas/Programs/pyALF/Notebooks
Scalar observables:
Ener_scal
Kin_scal
Part_scal
Pot_scal
Histogram observables:
Equal time observables:
Den_eq
Green_eq
SpinT_eq
SpinXY_eq
SpinZ_eq
Time displaced observables:
Den_tau
Green_tau
SpinT_tau
SpinXY_tau
SpinZ_tau
/home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_Square
No orbital locations saved.

```

```

[10]: Ener_scal0      -29.609245
      Ener_scal0_err    0.136803
      Ener_scal_sign     1.0
      Ener_scal_sign_err  0.0
      Name: /home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_Square, dtype:
      object

```

```

[11]: print("\nRunning again reduced the error from\n",
      obs.iloc[0][['Ener_scal0_err']], "\nto\n",
      obs2.iloc[0][['Ener_scal0_err']])

```

```

Running again reduced the error from
Ener_scal0_err    0.13032
Name: /home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_Square, dtype:
object
to
Ener_scal0_err    0.136803
Name: /home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_Square, dtype:
object

```

Note: To run a fresh simulation - instead of performing a refinement over previous run(s) - the Monte Carlo run directory should be deleted before rerunning.

1.1. Exercises

1. Check info/help commands such as `help(alf_src)`, `alf_src.get_ham_names()`, and `alf_src.get_default_params('Hubbard')`.
2. Rerun once again and check the new improvement in precision.
3. Look at a few other observables (`sim.analysis()` outputs the names of those available).
4. Change the lattice size by adding, e.g., `"L1": 4`, and `"L2": 1`, to the simulation parameters definitions of `sim` (step 2).

2. Trotter systematic error - Hubbard on the square lattice

In this example we use the [pyALF](#) interface to run ALF with the Mz choice of Hubbard-Stratonovich transformation (i.e., coupled to the z -component of the spin) on a 6×6 site square lattice, at $U/t = 4$ half-band filling, and inverse temperature $\beta t = 5$.

We carry out a systematic $\Delta\tau t$ extrapolation keeping $\Delta\tau t L_{\text{Trotter}} = 2$ constant. Recall that the formulation of the auxiliary field QMC approach is based on the symmetric Trotter decomposition

$$e^{-\Delta\tau(\hat{A}+\hat{B})} = e^{-\Delta\tau\hat{A}/2}e^{-\Delta\tau\hat{B}}e^{-\Delta\tau\hat{A}/2} + \mathcal{O}(\Delta\tau^3)$$

The overall error produced by this approximation is of the order $\Delta\tau^2$.

Bellow we go through the steps for performing this extrapolation: setting the simulation parameters, running it and analysing the data. A reference plot for this analyses is found in [ALF documentation](#), Sec. 2.3.2 (Symmetric Trotter decomposition).

1. Import Simulation class from the `py_alf` python module, which provides the interface with ALF, as well as mathematics and plotting packages:

```
[1]: from py_alf import ALF_source, Simulation # Interface with ALF
#
import numpy as np                        # Numerical library
from scipy.optimize import curve_fit      # Numerical library
import matplotlib.pyplot as plt          # Plotting library
alf_src = ALF_source(branch='master')    # Obtain ALF source code
```

```
Checking out branch master
Your branch is up to date with 'origin/master'.

Already on 'master'
```

2. Create instances of `Simulation`, specifying the necessary parameters, in particular the different $\Delta\tau$ values:

```
[2]: sims = []                                # Vector of Simulation instances
print('dtau values used:')
for dtau in [0.05, 0.1, 0.15]:              # Values of dtau
    print(dtau)
    sim = Simulation(
        alf_src,
        'Hubbard',                           # Hamiltonian
        {                                     # Model and simulation parameters for each Simulation instance
            'Model': 'Hubbard',               # Base model
            'Lattice_type': 'Square',         # Lattice type
            'L1': 6,                          # Lattice length in the first unit vector direction
            'L2': 6,                          # Lattice length in the second unit vector direction
            'Checkerboard': False,            # Whether checkerboard decomposition is used or not
            'Symm': True,                     # Whether symmetrization takes place
            'ham_T': 1.0,                     # Hopping parameter
            'ham_U': 4.0,                     # Hubbard interaction
            'ham_Tperp': 0.0,                 # For bilayer systems
            'beta': 5.0,                      # Inverse temperature
            'Ltau': 0,                        # '1' for time-displaced Green functions; '0' otherwise
            'NSweep': 100,                    # Number of sweeps per bin
            'NBin': 10,                       # Number of bins
            'Dtau': dtau,                     # Only dtau varies between simulations, Ltrot=beta/Dtau
            'Mz': True,                       # If true, sets the M_z-Hubbard model: Nf=2, N_sum=1,
        },                                    # HS field couples to z-component of magnetization
    )
    sims.append(sim)
```

```
dtau values used:
0.05
0.1
0.15
```

3. Compile ALF, downloading it first if not found locally. This may take a few minutes:

```
[3]: sims[0].compile()                        # Compilation needs to be performed only once
```

```
Compiling ALF...
Cleaning up Prog/
Cleaning up Libraries/
Cleaning up Analysis/
Compiling Libraries
```

entanglement_mod.F90:35:2:

```
35 | #warning "You are compiling entanglement without MPI. No results
possible"
    | 1~~~~~
Warning: #warning "You are compiling entanglement without MPI. No results
possible" [-Wcpp]
ar: creating modules_90.a
ar: creating libqrrref.a

Compiling Analysis
Compiling Program
Parsing Hamiltonian parameters
filename: Hamiltonians/Hamiltonian_Kondo_smod.F90
filename: Hamiltonians/Hamiltonian_Hubbard_smod.F90
filename: Hamiltonians/Hamiltonian_Hubbard_Plain_Vanilla_smod.F90
filename: Hamiltonians/Hamiltonian_tV_smod.F90
filename: Hamiltonians/Hamiltonian_LRC_smod.F90
filename: Hamiltonians/Hamiltonian_Z2_Matter_smod.F90
Compiling program modules
Link program
Done.
```

4. Perform the simulations, as specified in each element of `sim`:

```
[4]: for i, sim in enumerate(sims):
      sim.run()                                # Perform the actual simulation in ALF
```

```
Prepare directory "/home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_Square_
L1=6_L2=6_Checkerboard=False_Symm=True_T=1.0_U=4.0_Tperp=0.0_beta=5.0_Dtau=0.05_
Mz=True" for Monte Carlo run.
Create new directory.
Run /home/jonas/Programs/ALF/Prog/ALF.out
ALF Copyright (C) 2016 - 2021 The ALF project contributors
This Program comes with ABSOLUTELY NO WARRANTY; for details see license.GPL
This is free software, and you are welcome to redistribute it under certain
conditions.
No initial configuration
Prepare directory "/home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_Square_
L1=6_L2=6_Checkerboard=False_Symm=True_T=1.0_U=4.0_Tperp=0.0_beta=5.0_Dtau=0.1_M
z=True" for Monte Carlo run.
Create new directory.
Run /home/jonas/Programs/ALF/Prog/ALF.out
ALF Copyright (C) 2016 - 2021 The ALF project contributors
This Program comes with ABSOLUTELY NO WARRANTY; for details see license.GPL
This is free software, and you are welcome to redistribute it under certain
conditions.
No initial configuration
Prepare directory "/home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_Square_
L1=6_L2=6_Checkerboard=False_Symm=True_T=1.0_U=4.0_Tperp=0.0_beta=5.0_Dtau=0.15_
Mz=True" for Monte Carlo run.
Create new directory.
Run /home/jonas/Programs/ALF/Prog/ALF.out
ALF Copyright (C) 2016 - 2021 The ALF project contributors
This Program comes with ABSOLUTELY NO WARRANTY; for details see license.GPL
This is free software, and you are welcome to redistribute it under certain
conditions.
No initial configuration
```

5. Calculate the internal energies:

```
[5]: ener = np.empty((len(sims), 2))          # Matrix for storing energy values
      dtaus = np.empty((len(sims),))          # Matrix for Dtau values, for plotting
      for i, sim in enumerate(sims):
          print(sim.sim_dir)                  # Directory containing the simulation output
          sim.analysis()                      # Perform default analysis
          dtaus[i] = sim.sim_dict['Dtau']      # Store Dtau value
          obs = sim.get_obs()
          ener[i] = obs.iloc[0][['Ener_scal0', 'Ener_scal0_err']] # Store energy value
```

```
/home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_Square_L1=6_L2=6_Checkerbo
ard=False_Symm=True_T=1.0_U=4.0_Tperp=0.0_beta=5.0_Dtau=0.05_Mz=True
### Analyzing /home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_Square_L1=6_
```

```

L2=6_Checkerboard=False_Symm=True_T=1.0_U=4.0_Tperp=0.0_beta=5.0_Dtau=0.05_Mz=Tr
ue ###
/home/jonas/Programs/pyALF/Notebooks
Scalar observables:
Ener_scal
Kin_scal
Part_scal
Pot_scal
Histogram observables:
Equal time observables:
Den_eq
Green_eq
SpinT_eq
SpinXY_eq
SpinZ_eq
Time displaced observables:
/home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_Square_L1=6_L2=6_Checkerbo
ard=False_Symm=True_T=1.0_U=4.0_Tperp=0.0_beta=5.0_Dtau=0.05_Mz=True
No orbital locations saved.
/home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_Square_L1=6_L2=6_Checkerbo
ard=False_Symm=True_T=1.0_U=4.0_Tperp=0.0_beta=5.0_Dtau=0.1_Mz=True
### Analyzing /home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_Square_L1=6_
L2=6_Checkerboard=False_Symm=True_T=1.0_U=4.0_Tperp=0.0_beta=5.0_Dtau=0.1_Mz=Tru
e ###
/home/jonas/Programs/pyALF/Notebooks
Scalar observables:
Ener_scal
Kin_scal
Part_scal
Pot_scal
Histogram observables:
Equal time observables:
Den_eq
Green_eq
SpinT_eq
SpinXY_eq
SpinZ_eq
Time displaced observables:
/home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_Square_L1=6_L2=6_Checkerbo
ard=False_Symm=True_T=1.0_U=4.0_Tperp=0.0_beta=5.0_Dtau=0.1_Mz=True
No orbital locations saved.
/home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_Square_L1=6_L2=6_Checkerbo
ard=False_Symm=True_T=1.0_U=4.0_Tperp=0.0_beta=5.0_Dtau=0.15_Mz=True
### Analyzing /home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_Square_L1=6_
L2=6_Checkerboard=False_Symm=True_T=1.0_U=4.0_Tperp=0.0_beta=5.0_Dtau=0.15_Mz=Tr
ue ###
/home/jonas/Programs/pyALF/Notebooks
Scalar observables:
Ener_scal
Kin_scal
Part_scal
Pot_scal
Histogram observables:
Equal time observables:
Den_eq
Green_eq
SpinT_eq
SpinXY_eq
SpinZ_eq
Time displaced observables:
/home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_Square_L1=6_L2=6_Checkerbo
ard=False_Symm=True_T=1.0_U=4.0_Tperp=0.0_beta=5.0_Dtau=0.15_Mz=True
No orbital locations saved.

```

```
[6]: print('For Dtau values', dtaus, 'the measured energies are:\n', ener)
```

```

For Dtau values [0.05 0.1 0.15] the measured energies are:
[[-29.75742853  0.08560141]
 [-29.81231535  0.0437549 ]
 [-29.91469593  0.07072682]]


```

```
[7]: plt.xlabel(r'$\Delta\tau^2$')
plt.ylabel('Energy')
plt.errorbar(dtaus**2, ener[:, 0], ener[:, 1], label='Monte Carlo points')

def func(x, y0, a):
    return y0 + a*x**2
popt1, pcov = curve_fit(func, dtaus, ener[:, 0], sigma=ener[:, 1], absolute_sigma=True)
perr1 = np.sqrt(np.diag(pcov))

xs = np.linspace(0., dtaus.max())
plt.plot(xs**2, func(xs, *popt1), label=r'$\Delta\tau$ fit: '\n'
        f'${popt1[0]:.2f}\pm{perr1[0]:.2f})+({popt1[1]:.2f}\pm{perr1[1]:.2f})'
        r' \Delta\tau^2$'
        )
plt.errorbar(0, popt1[0], perr1[0], label='Extrapolated energy')
plt.legend()
```

```
[7]: <matplotlib.legend.Legend at 0x7f72d58a6350>
```

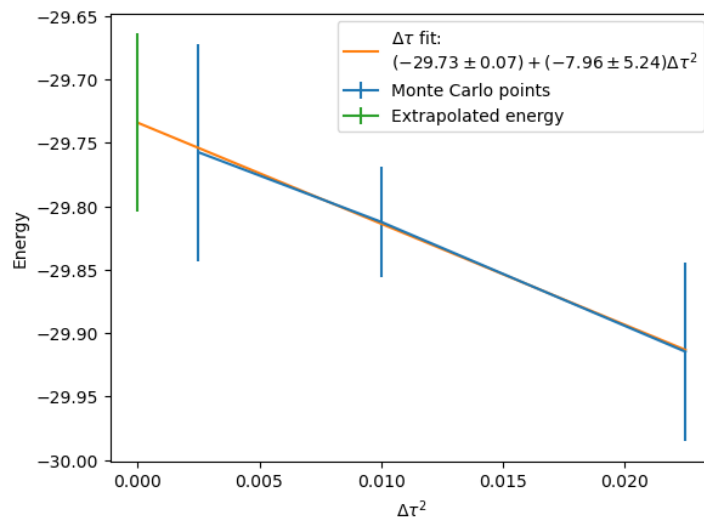

2.1. Exercises

1. Try out the four different combinations for **Checkerboard** and **Symm** settings in order to observe their effect on the output and run time. Reference: Sec. 2.3.2 - Symmetric Trotter decomposition - of the [ALF documentation](#), especially Fig. 2.

3. Testing against ED - Hubbard on a ring

In this example we use the [pyALF](#) interface to run ALF with the Mz choice of Hubbard Stratonovitch transformation on a four site ring, at $U/t = 4$ and inverse temperature $\beta t = 2$. For this set of parameters, the exact internal energy reads:

$$\left\langle -t \sum_{\langle i,j \rangle, \sigma} \hat{c}_{i,\sigma}^\dagger \hat{c}_{j,\sigma} + U \sum_{i=1}^N \hat{n}_{i,\uparrow} \hat{n}_{i,\downarrow} \right\rangle = -1.47261997t$$

To reproduce this result we will have to carry out a systematic $\Delta\tau t$ extrapolation keeping $\Delta\tau t L_{\text{Trotter}} = 2$ constant.

Recall that the formulation of the auxiliary field QMC approach is based on the Trotter decomposition

$$e^{-\Delta\tau(\hat{A}+\hat{B})} = e^{-\Delta\tau\hat{A}/2}e^{-\Delta\tau\hat{B}}e^{-\Delta\tau\hat{A}/2} + \mathcal{O}(\Delta\tau^3)$$

The overall error produced by this approximation is of the order $\Delta\tau^2$.

Bellow we go through the steps for performing this extrapolation: setting the simulation parameters, running it and analyzing the data.

1. Import Simulation class from the `py_alf` python module, which provides the interface with ALF, as well as mathematics and plotting packages:

```
[1]: from py_alf import Simulation, ALF_source # Interface with ALF
#
import numpy as np                        # Numerical library
from scipy.optimize import curve_fit      # Numerical library
import matplotlib.pyplot as plt          # Plotting library
alf_src = ALF_source(branch='master')    # Obtain ALF source code
```

Checking out branch master

Your branch is up to date with 'origin/master'.

Already on 'master'

2. Create instances of `Simulation`, specifying the necessary parameters, in particular the different $\Delta\tau$ values:

```
[2]: sims = []                                # Vector of Simulation instances
print('dtau values used:')
for dtau in [0.05, 0.1, 0.2]:                # Values of dtau
    print(dtau)
    sim = Simulation(
        alf_src,
        'Hubbard',                             # Hamiltonian
        {                                         # Model and simulation parameters for each Simulation instance
            'Lattice_type': 'N_leg_ladder',      # Lattice type
            'L1': 4,                             # Lattice length in the first unit vector direction
            'L2': 1,                             # Lattice length in the second unit vector direction
            'Checkerboard': False,               # Whether checkerboard decomposition is used or not
            'Symm': True,                        # Whether symmetrization takes place
            'ham_T': 1.0,                        # Hopping parameter
            'ham_U': 4.0,                        # Hubbard interaction
            'ham_Tperp': 0.0,                    # For bilayer systems
            'beta': 2.0,                         # Inverse temperature
            'Ltau': 0,                           # '1' for time-displaced Green functions; '0' otherwise
            'NSweep': 1000,                      # Number of sweeps per bin
            'NBin': 100,                         # Number of bins
            'Dtau': dtau,                       # Only dtau varies between simulations, Ltrot=beta/Dtau
            'Mz': True,                          # If true, sets the M_z-Hubbard model: Nf=2, N_sum=1,
                                                # HS field couples to z-component of magnetization
        },
    )
    sims.append(sim)
```

dtau values used:

0.05
0.1
0.2

3. Compile ALF, downloading it first if not found locally. This may take a few minutes:

```
[3]: sims[0].compile()                        # Compilation needs to be performed only once
```

Compiling ALF...

Cleaning up Prog/

Cleaning up Libraries/

Cleaning up Analysis/

Compiling Libraries

entanglement_mod.F90:35:2:

35 | #warning "You are compiling entanglement without MPI. No results

```
possible"
| 1~~~~~
Warning: #warning "You are compiling entanglement without MPI. No results
possible" [-Wcpp]
ar: creating modules_90.a
ar: creating libqrrref.a

Compiling Analysis
Compiling Program
Parsing Hamiltonian parameters
filename: Hamiltonians/Hamiltonian_Kondo_smod.F90
filename: Hamiltonians/Hamiltonian_Hubbard_smod.F90
filename: Hamiltonians/Hamiltonian_Hubbard_Plain_Vanilla_smod.F90
filename: Hamiltonians/Hamiltonian_tV_smod.F90
filename: Hamiltonians/Hamiltonian_LRC_smod.F90
filename: Hamiltonians/Hamiltonian_Z2_Matter_smod.F90
Compiling program modules
Link program
Done.
```

4. Perform the simulations, as specified in each element of `sim`:

```
[4]: for i, sim in enumerate(sims):
      sim.run()                                # Perform the actual simulation in ALF
```

```
Prepare directory "/home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_N_leg_1
adder_L1=4_L2=1_Checkerboard=False_Symm=True_T=1.0_U=4.0_Tperp=0.0_beta=2.0_Dtau
=0.05_Mz=True" for Monte Carlo run.
Create new directory.
Run /home/jonas/Programs/ALF/Prog/ALF.out
ALF Copyright (C) 2016 - 2021 The ALF project contributors
This Program comes with ABSOLUTELY NO WARRANTY; for details see license.GPL
This is free software, and you are welcome to redistribute it under certain
conditions.
No initial configuration
Prepare directory "/home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_N_leg_1
adder_L1=4_L2=1_Checkerboard=False_Symm=True_T=1.0_U=4.0_Tperp=0.0_beta=2.0_Dtau
=0.1_Mz=True" for Monte Carlo run.
Create new directory.
Run /home/jonas/Programs/ALF/Prog/ALF.out
ALF Copyright (C) 2016 - 2021 The ALF project contributors
This Program comes with ABSOLUTELY NO WARRANTY; for details see license.GPL
This is free software, and you are welcome to redistribute it under certain
conditions.
No initial configuration
Prepare directory "/home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_N_leg_1
adder_L1=4_L2=1_Checkerboard=False_Symm=True_T=1.0_U=4.0_Tperp=0.0_beta=2.0_Dtau
=0.2_Mz=True" for Monte Carlo run.
Create new directory.
Run /home/jonas/Programs/ALF/Prog/ALF.out
ALF Copyright (C) 2016 - 2021 The ALF project contributors
This Program comes with ABSOLUTELY NO WARRANTY; for details see license.GPL
This is free software, and you are welcome to redistribute it under certain
conditions.
No initial configuration
```

5. Calculate the internal energies:

```
[5]: ener = np.empty((len(sims), 2))          # Matrix for storing energy values
      dtaus = np.empty((len(sims),))          # Matrix for Dtau values, for plotting
      for i, sim in enumerate(sims):
          print(sim.sim_dir)                  # Directory containing the simulation output
          sim.analysis()                      # Perform default analysis
          dtaus[i] = sim.sim_dict['Dtau']      # Store Dtau value
          obs = sim.get_obs()
          ener[i] = obs.iloc[0][['Ener_scal0', 'Ener_scal0_err']] # Store energy value
```

```
/home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_N_leg_ladder_L1=4_L2=1_Che
ckerboard=False_Symm=True_T=1.0_U=4.0_Tperp=0.0_beta=2.0_Dtau=0.05_Mz=True
### Analyzing /home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_N_leg_ladder
_L1=4_L2=1_Checkerboard=False_Symm=True_T=1.0_U=4.0_Tperp=0.0_beta=2.0_Dtau=0.05
_Mz=True ###
/home/jonas/Programs/pyALF/Notebooks
```

```

Scalar observables:
Ener_scal
Kin_scal
Part_scal
Pot_scal
Histogram observables:
Equal time observables:
Den_eq
Green_eq
SpinT_eq
SpinXY_eq
SpinZ_eq
Time displaced observables:
/home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_N_leg_ladder_L1=4_L2=1_Che
ckerboard=False_Symm=True_T=1.0_U=4.0_Tperp=0.0_beta=2.0_Dtau=0.05_Mz=True
No orbital locations saved.
/home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_N_leg_ladder_L1=4_L2=1_Che
ckerboard=False_Symm=True_T=1.0_U=4.0_Tperp=0.0_beta=2.0_Dtau=0.1_Mz=True
### Analyzing /home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_N_leg_ladder
_L1=4_L2=1_Checkerboard=False_Symm=True_T=1.0_U=4.0_Tperp=0.0_beta=2.0_Dtau=0.1_
Mz=True ###
/home/jonas/Programs/pyALF/Notebooks
Scalar observables:
Ener_scal
Kin_scal
Part_scal
Pot_scal
Histogram observables:
Equal time observables:
Den_eq
Green_eq
SpinT_eq
SpinXY_eq
SpinZ_eq
Time displaced observables:
/home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_N_leg_ladder_L1=4_L2=1_Che
ckerboard=False_Symm=True_T=1.0_U=4.0_Tperp=0.0_beta=2.0_Dtau=0.1_Mz=True
No orbital locations saved.
/home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_N_leg_ladder_L1=4_L2=1_Che
ckerboard=False_Symm=True_T=1.0_U=4.0_Tperp=0.0_beta=2.0_Dtau=0.2_Mz=True
### Analyzing /home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_N_leg_ladder
_L1=4_L2=1_Checkerboard=False_Symm=True_T=1.0_U=4.0_Tperp=0.0_beta=2.0_Dtau=0.2_
Mz=True ###
/home/jonas/Programs/pyALF/Notebooks
Scalar observables:
Ener_scal
Kin_scal
Part_scal
Pot_scal
Histogram observables:
Equal time observables:
Den_eq
Green_eq
SpinT_eq
SpinXY_eq
SpinZ_eq
Time displaced observables:
/home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_N_leg_ladder_L1=4_L2=1_Che
ckerboard=False_Symm=True_T=1.0_U=4.0_Tperp=0.0_beta=2.0_Dtau=0.2_Mz=True
No orbital locations saved.

```

```
[6]: print('For Dtau values', dtaus, 'the measured energies are:\n', ener)
```

```

For Dtau values [0.05 0.1 0.2 ] the measured energies are:
[[-1.47188895  0.00256759]
 [-1.47953032  0.00227281]
 [-1.49103639  0.00250634]]

```


```
[7]: plt.figure()
plt.xlabel(r'$\Delta\tau^2$')
plt.ylabel('Energy')
plt.errorbar(dtaus**2, ener[:, 0], ener[:, 1], fmt='.', label="Monte carlo results")
```

```
plt.plot(0, -1.47261997, 'x', label='ED result')

def func(x, y0, a):
    return y0 + a*x**2
popt, pcov = curve_fit(func, dtaus, ener[:, 0], sigma=ener[:, 1], absolute_sigma=True)
perr = np.sqrt(np.diag(pcov))
xs = np.linspace(0., dtaus.max())
p = plt.plot(xs**2, func(xs, *popt))

plt.errorbar(0, popt[0], perr[0], label="Extrapolated value", color=p[0].get_color())
plt.legend()
```

[7]: <matplotlib.legend.Legend at 0x7f03c3fb5060>

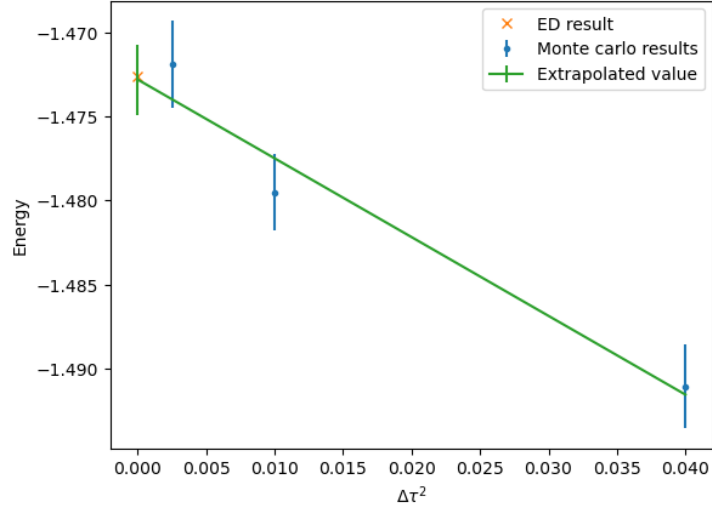

3.1. Exercises

1. Redo the extrapolation for different values of βt (e.g., for $\beta t = 1$, the internal energy is $-0.62186692t$, and for $\beta t = 4$, it is $-1.90837196t$).
2. Experiment with different settings for `Checkerboard` and `Symm`.

4. Projective algorithm

In this example we use the [pyALF](#) interface to run ALF's projective algorithm with the Mz choice of Hubbard Stratonovich transformation on a 4-site ring.

The projective approach is the method of choice if one is interested in ground-state properties. The starting point is a pair of trial wave functions, $|\Psi_{T,L/R}\rangle$, that are not orthogonal to the ground state $|\Psi_0\rangle$:

$$\langle \Psi_{T,L/R} | \Psi_0 \rangle \neq 0.$$

The ground-state expectation value of any observable $\hat{O}$ can then be computed by propagation along the imaginary time axis:

$$\frac{\langle \Psi_0 | \hat{O} | \Psi_0 \rangle}{\langle \Psi_0 | \Psi_0 \rangle} = \lim_{\theta \rightarrow \infty} \frac{\langle \Psi_{T,L} | e^{-\theta \hat{H}} e^{-(\beta-\tau) \hat{H}} \hat{O} e^{-\tau \hat{H}} e^{-\theta \hat{H}} | \Psi_{T,R} \rangle}{\langle \Psi_{T,L} | e^{-(2\theta+\beta) \hat{H}} | \Psi_{T,R} \rangle},$$

where β defines the imaginary time range where observables (time displaced and equal time) are measured and τ varies from 0 to β in the calculation of time-displace observables. For further details, see Sec. 3 of [ALF documentation](#).

1. Import Simulation class from the py_alf python module, which provides the interface with ALF, as well as numerical and plotting packages:

```
[1]: from py_alf import Simulation, ALF_source # Interface with ALF
#
import numpy as np # Numerical library
from scipy.optimize import curve_fit # Numerical library
import matplotlib.pyplot as plt # Plotting library
alf_src = ALF_source(branch='master') # Obtain ALF source code
```

Checking out branch master

Your branch is up to date with 'origin/master'.

Already on 'master'

2. Create instances of Simulation, specifying the necessary parameters, in particular the Projector to True:

```
[2]: sims = [] # Vector of Simulation instances
print('Theta values used:')
for theta in [0.5, 1, 1.5, 3, 5, 10]: # Values of Theta
    print(theta)
    sim = Simulation(
        alf_src,
        'Hubbard', # Hamiltonian
        { # Model and simulation parameters for each Simulation instance
            'Model': 'Hubbard', # Base model
            'Lattice_type': 'N_leg_ladder', # Lattice type
            'L1': 4, # Lattice length in the first unit vector direction
            'L2': 1, # Lattice length in the second unit vector direction
            'Checkerboard': False, # Whether checkerboard decomposition is used or not
            'Symm': True, # Whether symmetrization takes place
            'Projector': True, # Whether to use the projective algorithm
            'Theta': theta, # Projector parameter
            'ham_T': 1.0, # Hopping parameter
            'ham_U': 4.0, # Hubbard interaction
            'ham_Tperp': 0.0, # For bilayer systems
            'beta': 0.5, # Inverse temperature
            'Ltau': 0, # '1' for time-displaced Green functions; '0' otherwise
            'NSweep': 600, # Number of sweeps per bin
            'NBin': 50, # Number of bins
            'Dtau': 0.05, # Ltrot=beta/Dtau
            'Mz': True, # If true, sets the M_z-Hubbard model: Nf=2, N_sum=1,
        }, # HS field couples to z-component of magnetization
    )
    sims.append(sim)
```

Theta values used:

```
0.5
1
1.5
3
5
10
```

3. Compile ALF, this may take a few minutes:

```
[3]: sims[0].compile() # Compilation needs to be performed only once
```

Compiling ALF...

Cleaning up Prog/

Cleaning up Libraries/

Cleaning up Analysis/

Compiling Libraries

entanglement_mod.F90:35:2:

```
35 | #warning "You are compiling entanglement without MPI. No results
possible"
```

```
| 1~~~~~
```

Warning: #warning "You are compiling entanglement without MPI. No results

```
possible" [-Wcpp]
ar: creating modules_90.a
ar: creating libqrrref.a

Compiling Analysis
Compiling Program
Parsing Hamiltonian parameters
filename: Hamiltonians/Hamiltonian_Kondo_smod.F90
filename: Hamiltonians/Hamiltonian_Hubbard_smod.F90
filename: Hamiltonians/Hamiltonian_Hubbard_Plain_Vanilla_smod.F90
filename: Hamiltonians/Hamiltonian_tV_smod.F90
filename: Hamiltonians/Hamiltonian_LRC_smod.F90
filename: Hamiltonians/Hamiltonian_Z2_Matter_smod.F90
Compiling program modules
Link program
Done.
```

4. Perform the simulations, as specified in each element of `sim`:

```
[4]: for i, sim in enumerate(sims):
      sim.run()                                # Perform the actual simulation in ALF
```

```
Prepare directory "/home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_N_leg_1
adder_L1=4_L2=1_Checkerboard=False_Symm=True_Projector=True_Theta=0.5_T=1.0_U=4.
0_Tperp=0.0_beta=0.5_Dtau=0.05_Mz=True" for Monte Carlo run.
Create new directory.
Run /home/jonas/Programs/ALF/Prog/ALF.out
ALF Copyright (C) 2016 - 2021 The ALF project contributors
This Program comes with ABSOLUTELY NO WARRANTY; for details see license.GPL
This is free software, and you are welcome to redistribute it under certain
conditions.
No initial configuration
Prepare directory "/home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_N_leg_1
adder_L1=4_L2=1_Checkerboard=False_Symm=True_Projector=True_Theta=1_T=1.0_U=4.0_
Tperp=0.0_beta=0.5_Dtau=0.05_Mz=True" for Monte Carlo run.
Create new directory.
Run /home/jonas/Programs/ALF/Prog/ALF.out
ALF Copyright (C) 2016 - 2021 The ALF project contributors
This Program comes with ABSOLUTELY NO WARRANTY; for details see license.GPL
This is free software, and you are welcome to redistribute it under certain
conditions.
No initial configuration
Prepare directory "/home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_N_leg_1
adder_L1=4_L2=1_Checkerboard=False_Symm=True_Projector=True_Theta=1.5_T=1.0_U=4.
0_Tperp=0.0_beta=0.5_Dtau=0.05_Mz=True" for Monte Carlo run.
Create new directory.
Run /home/jonas/Programs/ALF/Prog/ALF.out
ALF Copyright (C) 2016 - 2021 The ALF project contributors
This Program comes with ABSOLUTELY NO WARRANTY; for details see license.GPL
This is free software, and you are welcome to redistribute it under certain
conditions.
No initial configuration
Prepare directory "/home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_N_leg_1
adder_L1=4_L2=1_Checkerboard=False_Symm=True_Projector=True_Theta=3_T=1.0_U=4.0_
Tperp=0.0_beta=0.5_Dtau=0.05_Mz=True" for Monte Carlo run.
Create new directory.
Run /home/jonas/Programs/ALF/Prog/ALF.out
ALF Copyright (C) 2016 - 2021 The ALF project contributors
This Program comes with ABSOLUTELY NO WARRANTY; for details see license.GPL
This is free software, and you are welcome to redistribute it under certain
conditions.
No initial configuration
Prepare directory "/home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_N_leg_1
adder_L1=4_L2=1_Checkerboard=False_Symm=True_Projector=True_Theta=5_T=1.0_U=4.0_
Tperp=0.0_beta=0.5_Dtau=0.05_Mz=True" for Monte Carlo run.
Create new directory.
Run /home/jonas/Programs/ALF/Prog/ALF.out
ALF Copyright (C) 2016 - 2021 The ALF project contributors
This Program comes with ABSOLUTELY NO WARRANTY; for details see license.GPL
This is free software, and you are welcome to redistribute it under certain
conditions.
No initial configuration
Prepare directory "/home/jonas/Programs/pyALF/Notebooks/ALF_data/Hubbard_N_leg_1
```

```

adder_L1=4_L2=1_Checkerboard=False_Symm=True_Projector=True_Theta=10_T=1.0_U=4.0
_Tperp=0.0_beta=0.5_Dtau=0.05_Mz=True" for Monte Carlo run.
Create new directory.
Run /home/jonas/Programs/ALF/Prog/ALF.out
ALF Copyright (C) 2016 - 2021 The ALF project contributors
This Program comes with ABSOLUTELY NO WARRANTY; for details see license.GPL
This is free software, and you are welcome to redistribute it under certain
conditions.
No initial configuration

```

5. Calculate the internal energies:

```

[5]: %%capture
ener = np.empty((len(sims), 2))           # Matrix for storing energy values
thetas = np.empty((len(sims),))          # Matrix for Thetas values, for plotting
for i, sim in enumerate(sims):
    print(sim.sim_dir)                    # Directory containing the simulation output
    sim.analysis()                        # Perform default analysis
    thetas[i] = sim.sim_dict['Theta']      # Store Theta value
    obs = sim.get_obs()
    ener[i] = obs.iloc[0][['Ener_scal0', 'Ener_scal0_err']] # Store energy value

```

Where the *cell magic* `%%capture` suppresses the output of `sim.analysis()`, which lists the data directories and observables.

```

[6]: print('For Theta values', thetas, 'the measured energies are:\n', ener)

```

```


For Theta values [ 0.5  1.   1.5  3.   5.  10. ] the measured energies are:
[[-2.05352132  0.00463096]
 [-2.1085726   0.00680212]
 [-2.09718603  0.00725172]
 [-2.12211566  0.0074775 ]
 [-2.0961295   0.00745434]
 [-2.10306699  0.0091302 ]]

```

```

[7]: plt.xlabel(r'$1/\Theta$')
plt.ylabel('Energy')
plt.errorbar(1/thetas, ener[:, 0], ener[:, 1])
plt.xlim(0, 2.02);

```

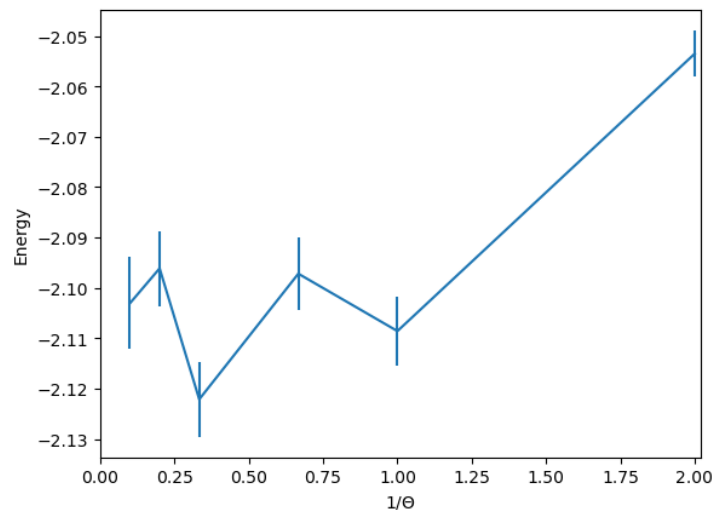

4.1. Exercises

1. A ladder system consists of chains assembled one next to the other, for instance, setting $L1=14$, $L2=3$ defines a 3-leg ladder. It is a well-known result ([Dagotto and Rice, Science 271, 5249, \(1996\)](#))

pp. 618) that spin correlations in ladder systems decay as power laws (apart from logarithmic corrections) for odd-leg ladders, and exponentially for even-leg ladders. The paper presents numerical results for the Heisenberg model. How do these correlations behave for the Hubbard model at half-filling?

Part II. Getting your hands dirty - writing new code

A lot already comes implemented in ALF, but unavoidably, as one proceeds in their own investigations, a new model has to be implemented or a new observable defined – and for that, one must grapple with the package’s Fortran source code. This second part of the tutorial consists in a set of guided exercises that exemplify how to make basic additions to the code, taking as starting point the template-like, relatively self-contained submodule `Hamiltonian_Hubbard_Plain_Vanilla_smod.F90`, which is also a good display of ALF’s internal workings.

These worked-out exercises, together with ALF’s modularity, boosted by its Predefined Structures, should make getting your hands dirty less daunting than it may sound.

Downloading and using the code and tutorial

One can use the ALF package downloaded automatically by the Python script in the first part of this tutorial, or manually, by typing

```
git clone https://git.physik.uni-wuerzburg.de/ALF/ALF.git
```

in a shell. Similarly, to download the tutorial, including solutions, enter:

```
git clone https://git.physik.uni-wuerzburg.de/ALF/ALF_Tutorial.git
```

This document is found in the directory `Tutorial-ALF-dev`.

The necessary environment variables and the directives for compiling the code are set by the script `configure.sh`:

```
source configure.sh GNU noMPI
```

followed by the command `make`. Details and further options are described in the package’s documentation found in its repository.

A workflow you can adopt for solving the exercises – or indeed using ALF in general – is the following:

1. Compile the modified Hamiltonian module, for instance:
`make all`
2. Create a data directory with the content of `Start`:
`cp -r ./Scripts_and_Parameters_files/Start ./Run && cd ./Run/`
3. Run its executable, e.g., serially:
`$ALF_DIR/Prog/ALF.out`
4. Perform default analyses⁴:
`$ALF_DIR/Analysis/ana.out *`

The structure of the data files and details on the analysis output can be found in ALF’s documentation.

Exercise 1 – Dimensional crossover

Here we will modify the code so as to allow for different hopping matrix elements along the x and y directions of a square lattice.

⁴The `analysis.sh` bash script from earlier versions of ALF, run without arguments, is still available in the `Start` directory.

1a) Modifying the hopping

To do so we start from the submodule `Hamiltonian_Hubbard_Plain_Vanilla_smod.F90`, which we here shorten to “Vanilla”, found in `$ALF_DIR/Prog/Hamiltonians/`, proceeding as follows:

- Add `Ham_Ty` to the `VAR_Hubbard_Plain_Vanilla` name space in the parameter file `parameters`.
- Declare a new variable, `Ham_Ty`, in the module’s specification on a new line between `!#PARAMETERS START# VAR_Hubbard_Plain_Vanilla` and the corresponding `!#PARAMETERS END#`.
- Modify the hopping matrix in the subroutine `Ham_Hop` in `Vanilla`:

```

Do I = 1,Latt%N
  Ix = Latt%nnlist(I,1,0)
  Op_T(1,nf)%O(I, Ix) = cmplx(-Ham_T, 0.d0, kind(0.D0))
  Op_T(1,nf)%O(Ix, I) = cmplx(-Ham_T, 0.d0, kind(0.D0))
  If ( L2 > 1 ) then
    Iy = Latt%nnlist(I,0,1)
    !!!!!!! Modifications for Exercise 1a
    !Op_T(1,nf)%O(I, Iy) = cmplx(-Ham_T, 0.d0, kind(0.D0))
    !Op_T(1,nf)%O(Iy, I) = cmplx(-Ham_T, 0.d0, kind(0.D0))
    Op_T(1,nf)%O(I, Iy) = cmplx(-Ham_Ty, 0.d0, kind(0.D0))
    Op_T(1,nf)%O(Iy, I) = cmplx(-Ham_Ty, 0.d0, kind(0.D0))
    !!!!!!!
  endif
  Op_T(1,nf)%O(I, I) = cmplx(-Ham_chem, 0.d0, kind(0.D0))
  Op_T(1,nf)%P(i) = i
Enddo

```

It is a good idea as well to get the new simulation parameter written into the file `info`, also a change in `Ham_Set`.

In the directory `Solutions/Exercise_1` we have the modified and original submodules, as well as reference data and the necessary `Start` directory (remember to copy its contents to every new `Run` directory, and to have a different `Run` directory for each simulation).

As an application of this code, we can once again consider a ladder system (e.g, a 2-leg ladder with $L_1=14$ and $L_2=2$), for different values of `Ham_Ty`. The results you should obtain for the total spin correlation function (file `SpinT_eqJR`) are summarized in Fig. 1.

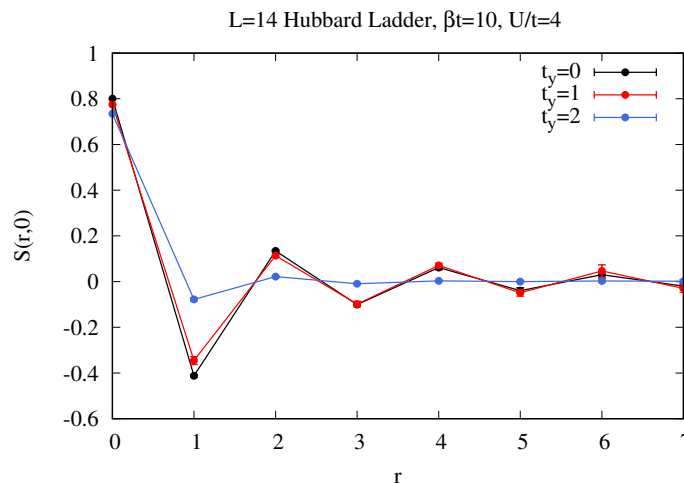


Figure 1: Spin correlation functions along one leg for the Hubbard ladder. As t_y grows the spin gap becomes large enough so as to detect the exponential decay of the spin correlation function on this small lattice size. The underlying physics of odd-even ladder systems is introduced in the article: Elbio Dagotto and T. M. Rice, “Surprises on the way from one- to two-dimensional quantum magnets: The ladder materials”, *Science* **271**, 5249 (1996) pp. 618–623.

1b) The SU(2) Hubbard-Stratonovich transformation

The SU(2) Hubbard-Stratonovich decomposition couples to the density and conserves spin rotational symmetry. Introduce into the module `Hamiltonian_Hubbard_smod.F90` and into the name space `VAR_Hubbard` the same changes done to the `Vanilla` module, described in the previous item, and enter `Mz=.F.` in the `parameters` file (in order to choose the $SU(N)$ Hubbard interaction) and compare results to those of the M_z decomposition above – especially with regard to numerical convergence.

Exercise 2 – Defining a new model: The one-dimensional t-V model

In this section, we will show what modifications have to be carried out for computing the physics of the one dimensional t-V model of spinless fermions.

$$\hat{H} = -t \sum_i \left(\hat{c}_i^\dagger \hat{c}_{i+a} + \hat{c}_{i+a}^\dagger \hat{c}_i \right) - \frac{V}{2} \sum_i \left(\hat{c}_i^\dagger \hat{c}_{i+a} + \hat{c}_{i+a}^\dagger \hat{c}_i \right)^2. \quad (1)$$

The above form is readily included in the ALF since the interaction is written in terms of a perfect square. Expanding the square yields (up to a constant) the desired model:

$$\hat{H} = -t \sum_i \left(\hat{c}_i^\dagger \hat{c}_{i+a} + \hat{c}_{i+a}^\dagger \hat{c}_i \right) + V \sum_i \left(\hat{n}_i - 1/2 \right) \left(\hat{n}_{i+a} - 1/2 \right). \quad (2)$$

Note that the t-V model is already implemented in ALF in the module `Hamiltonian_tV_smod.F90` found in `$ALF_DIR/Prog/Hamiltonians/`. While it can be used for checking your own results⁵, you are not supposed to reproduce that implementation – which is more general and makes use of predefined structures – but instead to write a simpler one, based on the module `Hamiltonian_Hubbard_Plain_Vanilla_smod.F90` as detailed below.

2a) Define new model

In the directory `Solutions/Exercise_2` we have duplicated the ALF and commented the changes that have to be carried out to the file `Hamiltonian_Hubbard_Plain_Vanilla_smod.F90`, which we here shorten to “`Vanilla`”, found in `$ALF_DIR/Prog/Hamiltonians/`. The following are the essential steps to be carried out:

- Add the `VAR_t_V` name space in the file `parameters` and set the necessary variables – or simply rename the `VAR_Hubbard_Plain_Vanilla` name space to `VAR_t_V` and, within it, `Ham_U` to `Ham_Vint`. (Ignore the name space `VAR_tV`, which is used by the general implementation mentioned above.)
- Declare a new variable, `Ham_Vint`, in `Vanilla`’s specification.
- Add the `VAR_t_V` name space (`namelist`) declaration at the `Ham_Set` subroutine of `Vanilla`, containing the same variables the name space contains in `parameters`, and read it in.
- Still in the `Ham_set` subroutine of `Vanilla`: set `NF=1`, since we are working with spinless fermions; change the output to the info file.
- In the `Ham_V` subroutine you have to add the new interaction. For a given bond at a given time slice, we need to decouple the interaction:

$$e^{\Delta\tau \frac{V}{2} (\hat{c}_i^\dagger \hat{c}_{i+a} + \hat{c}_{i+a}^\dagger \hat{c}_i)^2} = \sum_{l=\pm 1, \pm 2} \gamma_l e^{\sqrt{\Delta\tau \frac{V}{2}} \eta_l (\hat{c}_i^\dagger \hat{c}_{i+a} + \hat{c}_{i+a}^\dagger \hat{c}_i)} = \sum_{l=\pm 1, \pm 2} \gamma_l e^{g \eta_l (\hat{c}_i^\dagger, \hat{c}_{i+a}^\dagger) O(\hat{c}_i, \hat{c}_{i+a})^T}. \quad (3)$$

Here is how this translates in the code (the new integer variable, `i2`, should be declared):

```
Allocate(Op_V(Ndim,N_FL))
do nf = 1,N_FL
  do i = 1, Ndim
    call Op_make(Op_V(i,nf),2)
  enddo
```

⁵A short simulation of the t-V model can be conveniently run using its Jupyter notebook available in pyALF.

```

enddo
Do i = 1, Ndim ! Runs over bonds = # of lattice sites in one-dimension.
  i2
    = Latt%nnlist(i,1,0)
  Op_V(i,nf)%P(1) = i
  Op_V(i,nf)%P(2) = i2
  Op_V(i,nf)%O(1,2) = cmplx(1.d0 ,0.d0, kind(0.d0))
  Op_V(i,nf)%O(2,1) = cmplx(1.d0 ,0.d0, kind(0.d0))
  Op_V(i,nf)%g = sqrt(cmplx(Dtau*Ham_Vint/2.d0, 0.d0, kind(0.d0)))
  Op_V(i,nf)%alpha = cmplx(0d0 ,0.d0, kind(0.d0))
  Op_V(i,nf)%type = 2
  Call Op_set( Op_V(i,nf) )
enddo

```

- Finally, you have to update the **Obser** and **ObserT** routines for the calculation of equal- and time-displaced correlations. For the **t_V** model you can essentially use the same observables as for the **Hubbard_SU(2)** model in 1D – a step which requires a number of changes with respect to the **Vanilla** base, such as:

```

!!!! Modifications for Exercise 2
!Zpot = Zpot*ham_U ! Vanilla
Zpot = Zpot*Ham_Vint ! t-V
!!!!

```

and

```

!Zrho = Zrho + Grc(i,i,1) + Grc(i,i,2) ! Vanilla
Zrho = Zrho + Grc(i,i,1) ! t-V

```

with the observables being coded in the routine **Obser** as

```

Z = cmplx(dble(N_SUN), 0.d0, kind(0.d0))
Do I1 = 1,Ndim
  I = I1
  no_I = 1
  Do J1 = 1,Ndim
    J = J1
    no_J = 1
    imj = latt%imj(I,J)
    Obs_eq(1)%Obs_Latt(imj,1,no_I,no_J) = Obs_eq(1)%Obs_Latt(imj,1,no_I,no_J) + &
& Z * GRC(I1,J1,1) * ZP*ZS ! Green
    Obs_eq(2)%Obs_Latt(imj,1,no_I,no_J) = Obs_eq(2)%Obs_Latt(imj,1,no_I,no_J) + &
& Z * GRC(I1,J1,1) * GR(I1,J1,1) * ZP*ZS ! SpinZ
    Obs_eq(3)%Obs_Latt(imj,1,no_I,no_J) = Obs_eq(3)%Obs_Latt(imj,1,no_I,no_J) + &
& ( GRC(I1,I1,1) * GRC(J1,J1,1) * Z + &
& GRC(I1,J1,1) * GR(I1,J1,1) ) * Z * ZP*ZS ! Den
  enddo
  Obs_eq(3)%Obs_Latt0(no_I) = Obs_eq(3)%Obs_Latt0(no_I) + Z * GRC(I1,I1,1) * ZP * ZS
enddo

```

among other changes - with similar ones in the **ObserT** routine.

All necessary changes are implemented and clearly indicated in the solution provided in **Solutions/Exercise_2/Hamiltonian_Hubbard_Plain_Vanilla_smod-Exercise_2.F90**.

In the directory **Solutions/Exercise_2** we have the modified and original submodules, as well as reference data and the necessary **Start** directory (remember to copy its contents to every new **Run** directory, and to have a different **Run** directory for each simulation).

2b) Phase transition

You can now run the code for various values of V/t . A Jordan-Wigner transformation will map the $\mathbf{t}_V$ model onto the XXZ chain:

$$\hat{H} = J_{xx} \sum_i \hat{S}_i^x \hat{S}_{i+a}^x + \hat{S}_i^y \hat{S}_{i+a}^y + J_{zz} \sum_i \hat{S}_i^z \hat{S}_{i+a}^z, \quad (4)$$

with $J_{zz} = V$ and $J_{xx} = 2t$. Hence, when $V/t = 2$ we reproduce the Heisenberg model. For $V/t > 2$ the model is in the Ising regime with long-range charge density wave order and is an insulator. In the regime $-2 < V/t < 2$ the model is metallic and corresponds to a Luttinger liquid. Finally, at $V/t < -2$ phase separation between hole rich and electron rich phases occur. Fig. 2 shows typical results for the density-density correlation function (file `Den_eqJR`).

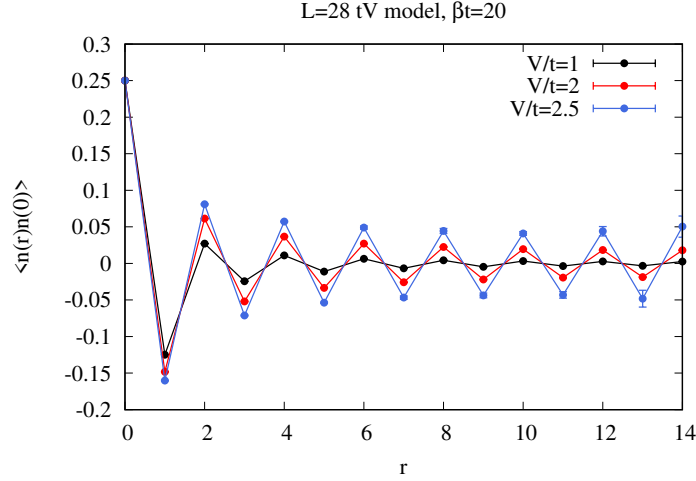


Figure 2: Density-Density correlation functions of the t - V model. In the Luttinger liquid phase, $-2 < V/t < 2$, it is known that the density-density correlations decay as $\langle n(r)n(0) \rangle \propto \cos(\pi r) r^{-(1+K_\rho)}$ with $(1 + K_\rho)^{-1} = \frac{1}{2} + \frac{1}{\pi} \arcsin\left(\frac{V}{2|t|}\right)$ (A. Luther and I. Peschel, Calculation of critical exponents in two dimensions from quantum field theory in one dimension, Phys. Rev. B **12** (1975), pp. 3908–3917.) The interested reader can try to reproduce this result.

Exercise 3 – Adding a new observable

This exercise illustrates the modifications that are required to implement a new observable, the correlation function of the bond-hopping in the 1-dimensional Hubbard chain. This observable is interesting in many different setups. For example, the model studied here exhibits an emergent $SO(4)$ symmetry that relates the anti-ferromagnetic order parameter and the bond dimerization (I. Affleck, PRL **55** (1985) pp. 1355; I. Affleck and F. D. M. Haldane, PRB **36** (1987) pp. 5291). Another example where this quantity is useful to investigate is the 1-dimensional Su-Schrieffer-Heger model describing an electron-phonon system.

3a) Applying Wick's theorem

Here the task is to define a new equal-time observable, the kinetic energy correlation, given by

$$\langle \hat{O}_{i,\delta} \hat{O}_{j,\delta'} \rangle - \langle \hat{O}_{i,\delta} \rangle \langle \hat{O}_{j,\delta'} \rangle = S_O(i - j, \delta, \delta') \quad (5)$$

where i, j refer to the unit cells and δ encodes the bond label. Since we are working in 1D, there is only one bond per unit cell and $\delta = ax$ such that

$$\hat{O}_{i,x} = \sum_{\sigma} \left(\hat{c}_{i,\sigma}^{\dagger} \hat{c}_{i+ax,\sigma} + \text{H.c.} \right). \quad (6)$$

Note that the first term of Eq. 5 is of the generic form $\sum_{\sigma,\sigma'} \langle \hat{c}_{i_1,\sigma}^\dagger \hat{c}_{i_2,\sigma} \hat{c}_{j_1,\sigma'}^\dagger \hat{c}_{j_2,\sigma'} \rangle$. This expectation value can be readily decomposed into single-particle Green functions by using Wick's theorem. It can be applied for a fixed field configuration Φ since the Hamiltonian $\hat{H}(\Phi)$ is then bi-linear in the fermion operators.

$$\sum_{\sigma,\sigma'} \langle \hat{c}_{i_1,\sigma}^\dagger \hat{c}_{i_2,\sigma} \hat{c}_{j_1,\sigma'}^\dagger \hat{c}_{j_2,\sigma'} \rangle_\Phi = \sum_{\sigma,\sigma'} \left(\langle \hat{c}_{i_1,\sigma}^\dagger \hat{c}_{i_2,\sigma} \rangle_\Phi \langle \hat{c}_{j_1,\sigma'}^\dagger \hat{c}_{j_2,\sigma'} \rangle_\Phi + \langle \hat{c}_{i_1,\sigma}^\dagger \hat{c}_{j_2,\sigma'} \rangle_\Phi \langle \hat{c}_{i_2,\sigma} \hat{c}_{j_1,\sigma'}^\dagger \rangle_\Phi \right) \quad (7)$$

The second term of vanishes for $\sigma \neq \sigma'$ due to flavor symmetry (Mz-decoupling used here in the vanilla version) or due to the $SU(2)$ symmetry (density decoupling available in the generic implementation of Hubbard model). The single-particle Green functions are provided in the **Obser** routine, where all equal-time observables are measured, as

$$GRC(i, j, \sigma) = \langle \hat{c}_{i,\sigma}^\dagger \hat{c}_{j,\sigma} \rangle_\Phi \quad (8)$$

$$GR(i, j, \sigma) = \langle \hat{c}_{i,\sigma} \hat{c}_{j,\sigma}^\dagger \rangle_\Phi. \quad (9)$$

3b) Necessary code modifications

In the directory `Solutions/Exercise_3` we have the modified and original submodule `Hamiltonian_Hubbard_Plain_Vanilla_smod.F90` found in `$ALF_DIR/Prog/Hamiltonians` (which we here shorten to “Vanilla”), as well as reference data and the necessary **Start** directory (remember to copy its contents to every new **Run** directory, and to have a different **Run** directory for each simulation). The following are the essential steps to be carried out:

- Introduce the new observable and allocate the memory required to store the measurements. This is done in the subroutine `Alloc_obs(Ltau)` by increasing the length of the array `Obs_eq` appropriately and adding a new case to specify the filename in which the results are stored on disc. (You might want to revisit this section later on to add the time-displaced version of the correlation function by changing `Obs_tau` in the same fashion.)
- The actual measurements are taken in the subroutine `Obser(GR,Phase,Ntau)`. While `GR` is passed to the subroutine, the first lines of code already implement the construct `GRC = 1 - GRT`. (This section does not have to be modified, but it is useful to keep this in mind for future reference when you implement a new model from scratch.)
- The measurement of an equal-time correlation function consists of two separate parts: the connected one given by the first term in Eq. 5, and the background, given by the second term.
- Implement the measurement of the connected part, stored as `Obs_eq(6)` in this example, using the Wick decomposition sketched above.
- Keep in mind that the background $\sum_i \langle \hat{O}_{i,\delta} \rangle \neq 0$ is non-vanishing and has to be measured separately (you can compare with the density correlation function), and is stored in `Obs_eq(6)%Obs_Latt0(1)`.
- The analysis tool will then automatically combine both contributions and evaluate Eq. 5 using the jackknife method to estimate the mean and error or the correlation function.

The 1-D Hubbard exhibits an emergent $SO(4)$ symmetry:

$$\langle \bar{S}(r) S(0) \rangle \sim \frac{(-1)^r}{r} \ln^d(r) \quad (10)$$

$$\langle \hat{O}_{r,x} \hat{O}_{0,x} \rangle - \langle \hat{O}_{r,x} \rangle \langle \hat{O}_{0,x} \rangle \sim \frac{(-1)^r}{r} \ln^\beta(r) \quad (11)$$

where $d = 1/2$ and $\beta = -3/2$ (T. Sato, M. Hohenadler et.al, Phys. Rev. B **104** (2021) L161105) and this exercise provides all the tools required to study it. Beware of the large system sizes, and therefore long run times, that are required to extract the logarithmic scaling corrections. More details are discussed in the appendix of above reference.

Finally, it is straightforward to implement the time-displaced version of this correlation function, following essentially the same steps as described above. The observable is now stored in `Obs_tau`, the measurements are taken in `ObserT`, and you can find the implementation in the solution to this exercise as well.