

Estruturas de Linguagem

Francisco Sant'Anna

francisco.santanna@gmail.com

<http://github.com/fsantanna/EDL>

Trabalho 00 - GitHub

(até quarta-feira 09/03)

- Trabalho

- Dar um *Fork* no repositório da disciplina
- Adicionar um arquivo `trabalho-00/RESPOSTA.md` com um texto “pessoal” qualquer formatado em *Markdown*

- Links

- <http://github.com/fsantanna/EDL>
- <https://help.github.com/articles/good-resources-for-learning-git-and-github/>
- <https://help.github.com/articles/basic-writing-and-formatting-syntax/>

Trabalho 00 - GitHub

The screenshot shows a web browser with two tabs. The active tab is titled 'fsantanna/EDL' and shows the GitHub repository page for 'fsantanna/EDL'. The address bar displays 'https://github.com/fsantanna/EDL'. The repository page shows the 'master' branch selected, with the path 'EDL / trabalhos / trabalho-00 /'. The repository has 3 watchers, 1 star, and 0 forks. The file list shows a commit by 'fsantanna' with files 'edl-01' and 'edl-02'. Below the file list, the 'README.md' file is displayed, containing the title 'Trabalho 00' and a bulleted list of instructions.

fsantanna/EDL

GitHub, Inc. [US] <https://github.com/fsantanna/EDL>

EDL/trabalhos/trabal... x +

GitHub, Inc. (US) <https://github.com/fsantanna/EDL/tree/master/trabalhos/trabalho-00> Google

This repository Search Pull requests Issues Gist

fsantanna / EDL Unwatch 3 Star 1 Fork 0

Code Issues 0 Pull requests 0 Wiki Pulse Graphs Settings

Branch: master EDL / trabalhos / trabalho-00 / New file Upload files Find file History

fsantanna (+) edl-01, edl-02 Latest commit 62b63d9 21 minutes ago

..

README.md (+) edl-01, edl-02 21 minutes ago

README.md

Trabalho 00


- Dar um Fork no repositório da disciplina
- Adicionar um arquivo trabalho-00/RESPOSTA.md com um texto "pessoal" qualquer formatado em Markdown.

Trabalho 01 - Artigo

(até domingo 13/03)

- Escolher uma linguagem com a qual você **não está familiarizado**.
 - evitar duplicatas com outros colegas
- Escrever um pequeno artigo (estilo wikipedia):
 - origens e influências (linha do tempo)
 - classificação (imp/func/log/oo, est/din, usos)
 - avaliação em comparação com linguagens que você conhece (read/write, expressividade)
 - exemplos de código representativos
 - `trabalho-01/ARTIGO.md`
- Slides de apresentação (4-6 slides)
 - `trabalho-01/slides.pdf`

Avaliando Languages

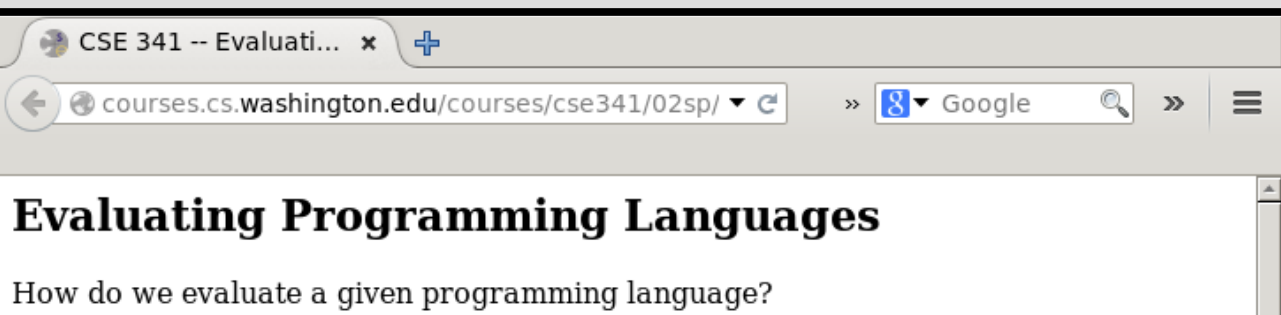

External Evaluation Criteria

The actual users of languages (businesses, engineers, secretaries, etc.) have certain demands on the language. To evaluate languages is to ask whether a given language meets the demands of its user community.

Rapid development

Programmers are more expensive than machines, so we want to make fast progress. (We should consider both the time and cost in making this evaluation.)

Easy maintenance

Maintenance is expensive.

Reliability and safety

When computers go down, planes crash, phone systems melt down, cash machines close. We'd like to avoid this.

Portability

I'd like my program to run on many different platforms.

Efficiency

The compiler should be fast. The code itself should be efficient.

Low training time (learnability)

The language should be easy to learn. Training is expensive.

Reusability

Writing software components once is cheaper than writing them many times.

Pedagogical value

The language should support and enforce the concepts of computer science.

Internal Evaluation Criteria

Although the above demands are all important, we should still ask what makes a *good* language, independent of the demands of its users. This is a little like the question "What makes a good artwork?" as opposed to "What makes a good Hollywood movie?" Here are some qualities of a good language.

Readability

Understand what you, or someone else has written.

Writeability

Say what you mean, without excessive verbiage.

Simplicity

The language should have a minimal number of primitive concepts/features.

Orthogonality

The language should support the combination of its concepts/features in a meaningful way.

Consistency

The language should not include needless inconsistencies. (But remember Ralph Waldo Emerson: "A foolish consistency is the hobgoblin of small minds.")

Expressiveness

The programmer should be able to express their algorithm naturally.

Abstraction

The language should support a high level of data and control abstraction.

We will generally make use of these and other internal evaluation criteria when comparing languages.


Manutenção

Prototipação

Readability vs Writability

```
while(<>) {  
    split;  
    print "$_[1]. $_[0]\n";  
}
```

```
chico@note:/data/UERJ/EDL/code$ cat names.txt  
Francisco Sant'Anna  
João Silva  
chico@note:/data/UERJ/EDL/code$ cat names.txt | perl names.pl  
Sant'Anna, Francisco  
Silva, João  
chico@note:/data/UERJ/EDL/code$  
chico@note:/data/UERJ/EDL/code$
```

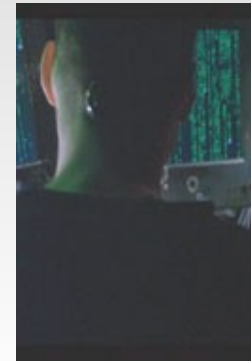

```
HelloWorld.java - Notepad  
File Edit Format Help  
public class HelloWorld {  
    public static void main(String[] args) {  
        System.out.println("Hello World!");  
    }  
}
```



Readability vs Writability

```
// C
```

```
int timeOut = 1;
```

```
<...>
```

```
timeOut = 0;
```

```
// Java
```

```
boolean timeOut = true;
```

```
<...>
```

```
timeOut = false;
```

Poder de Expressividade



I like Matthias Felleisen's notion of expressive power, which is *comparative*:

18



- Language A is strictly more expressive than language B if both of the following are true:
 - Any program written in language B can be rewritten in language A while keeping the essential structure of the program intact.
 - Some programs written in language A have to be violently restructured in order to be written in language B.

```
die ("found no solutions") unless length(solutions) > 0;
```

instead of

```
if (length(solutions) == 0) { die("found no solutions"); }
```

So you have to establish whether you're asking about expressive power of surface syntax or deeper structure.

Exemplo 1: Closures

- Função como “cidadão de primeira classe”
 - Atribuição, passagem, retorno, **criação dinâmica**
- Programação Funcional

Exemplo 2: Co-rotinas

- Controle/Pilha como “cidadão de primeira classe”
- Iteradores, Multi-Tarefa cooperativa

```
for i=1, 10 do
  local v = i*i
  print(i,v)
end
```

```
for i,v in <f_iter> do
  print(i,v)
end
```

Comparison with subroutines [[edit](#)]

"Subroutines are special cases of ... coroutines." -[Donald Knuth](#).^[3]