

# Methods

Find the sum of integers from 1 to 10,  
from 20 to 30, and from 35 to 45,  
respectively.



# Problem

```
int sum = 0;
for (int i = 1; i <= 10; i++)
    sum += i;
System.out.println("Sum from 1 to 10 is " + sum);
```

```
sum = 0;
for (int i = 20; i <= 30; i++)
    sum += i;
System.out.println("Sum from 20 to 30 is " +
sum);
```

```
sum = 0;
for (int i = 35; i <= 45; i++)
    sum += i;
System.out.println("Sum from 35 to 45 is " +
sum);
```

# Problem

```
int sum = 0;  
for (int i = 1; i <= 10; i++)  
    sum += i;
```

```
System.out.println("Sum from 1 to 10 is " + sum);
```

```
sum = 0;  
for (int i = 20; i <= 30; i++)  
    sum += i;
```

```
System.out.println("Sum from 20 to 30 is " + sum);
```

```
sum = 0;  
for (int i = 35; i <= 45; i++)  
    sum += i;
```

```
System.out.println("Sum from 35 to 45 is " + sum);
```


# Solution

```
public static int sum(int i1, int i2) {  
    int sum = 0;  
    for (int i = i1; i <= i2; i++)  
        sum += i;  
    return sum;  
}
```

```
public static void main(String[] args) {  
    System.out.println("Sum from 1 to 10 is " + sum(1, 10));  
    System.out.println("Sum from 20 to 30 is " + sum(20, 30));  
    System.out.println("Sum from 35 to 45 is " + sum(35, 45));  
}
```


# Defining Methods

A method is a collection of statements that are grouped together to perform an operation.

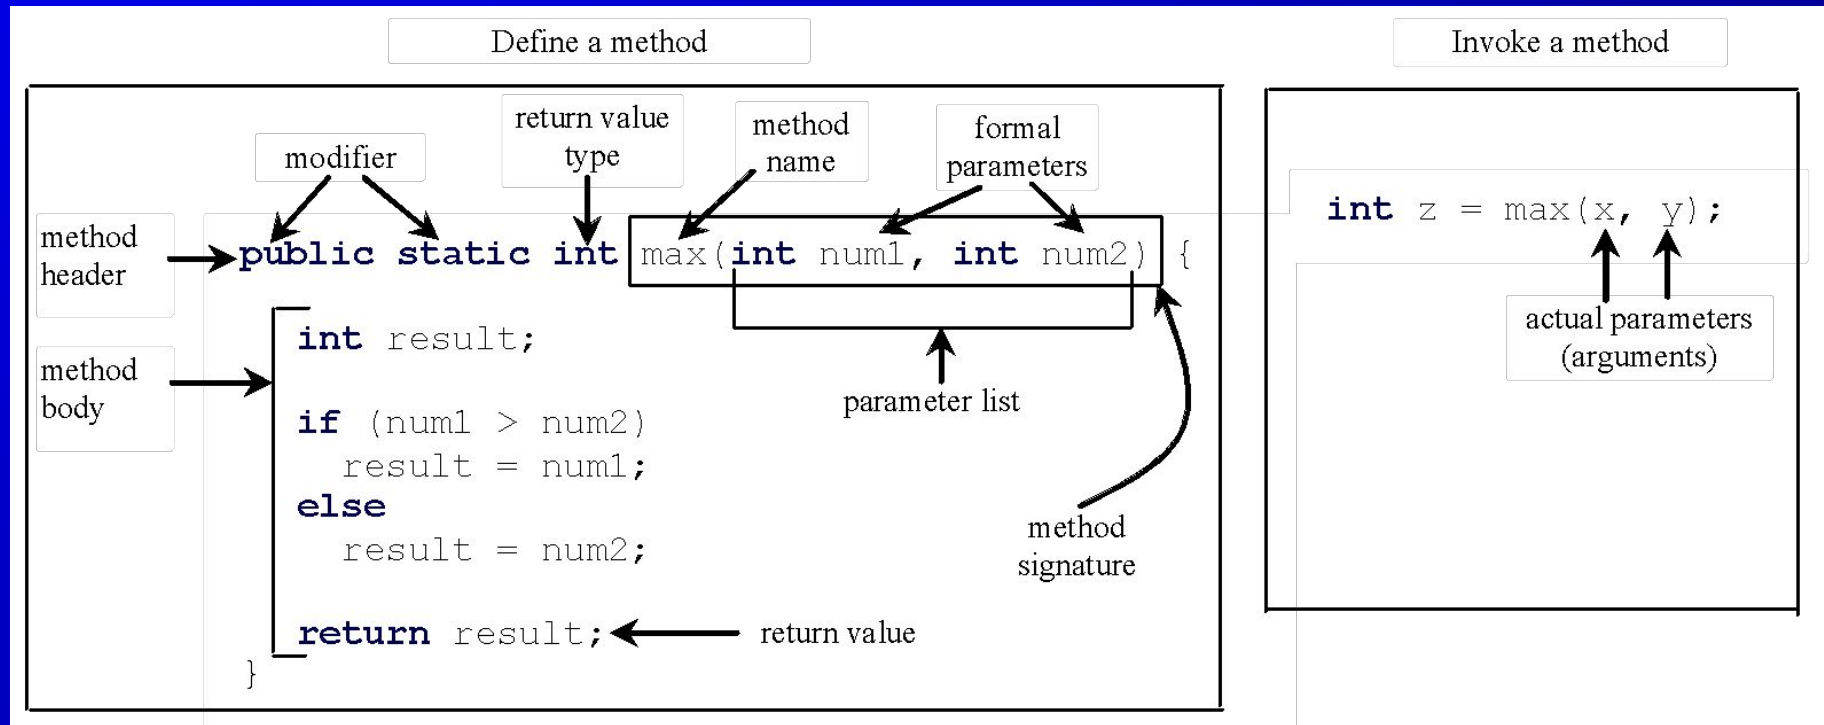


# Method Signature

*Method signature* is the combination of the method name and the parameter list.

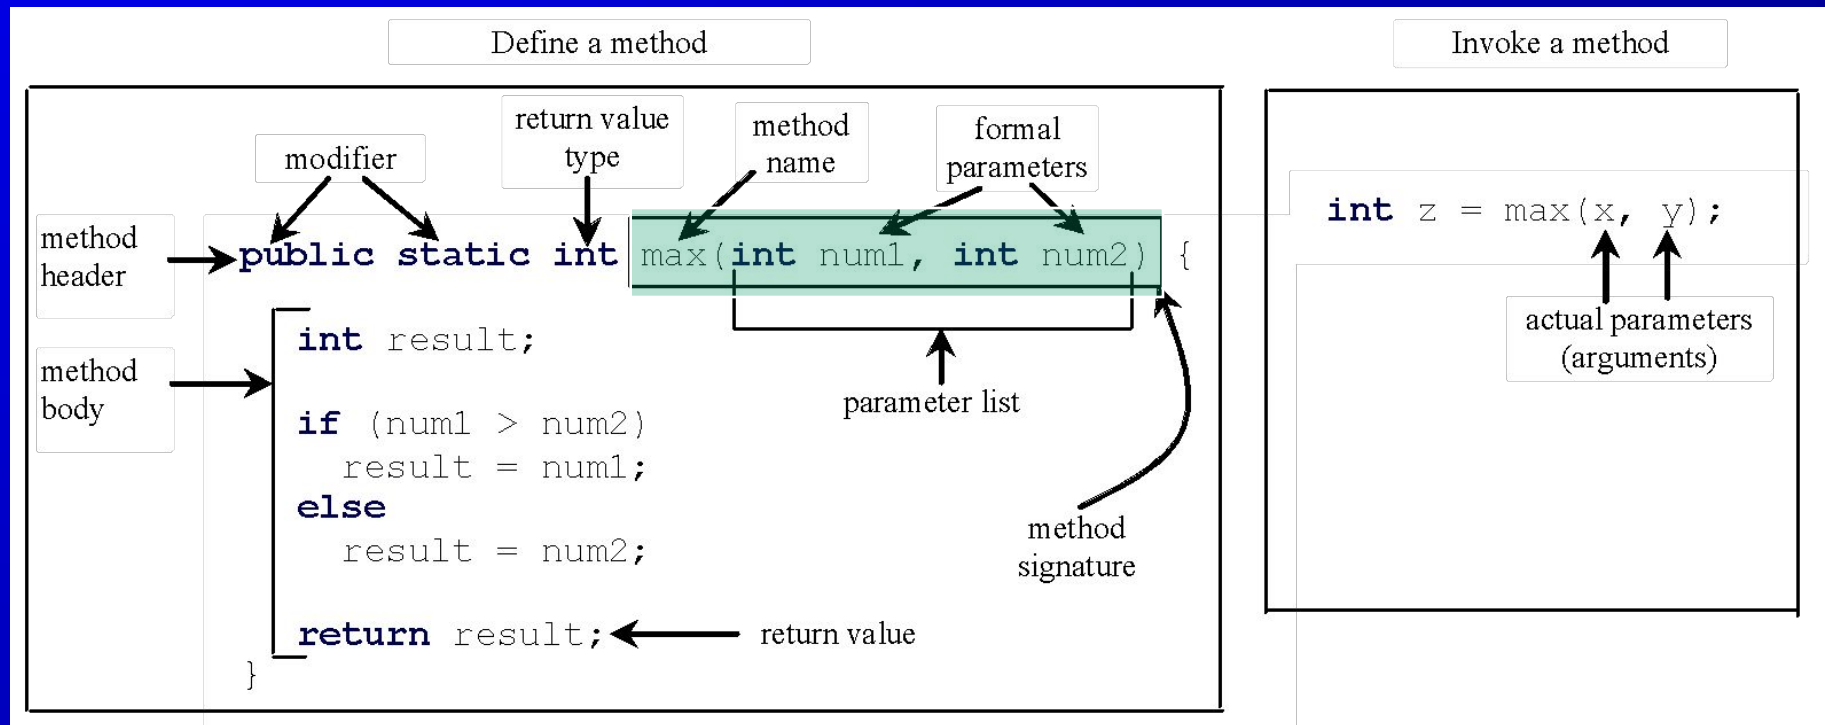


# Formal Parameters

*The variables that are defined in the method header are known as formal parameters.*

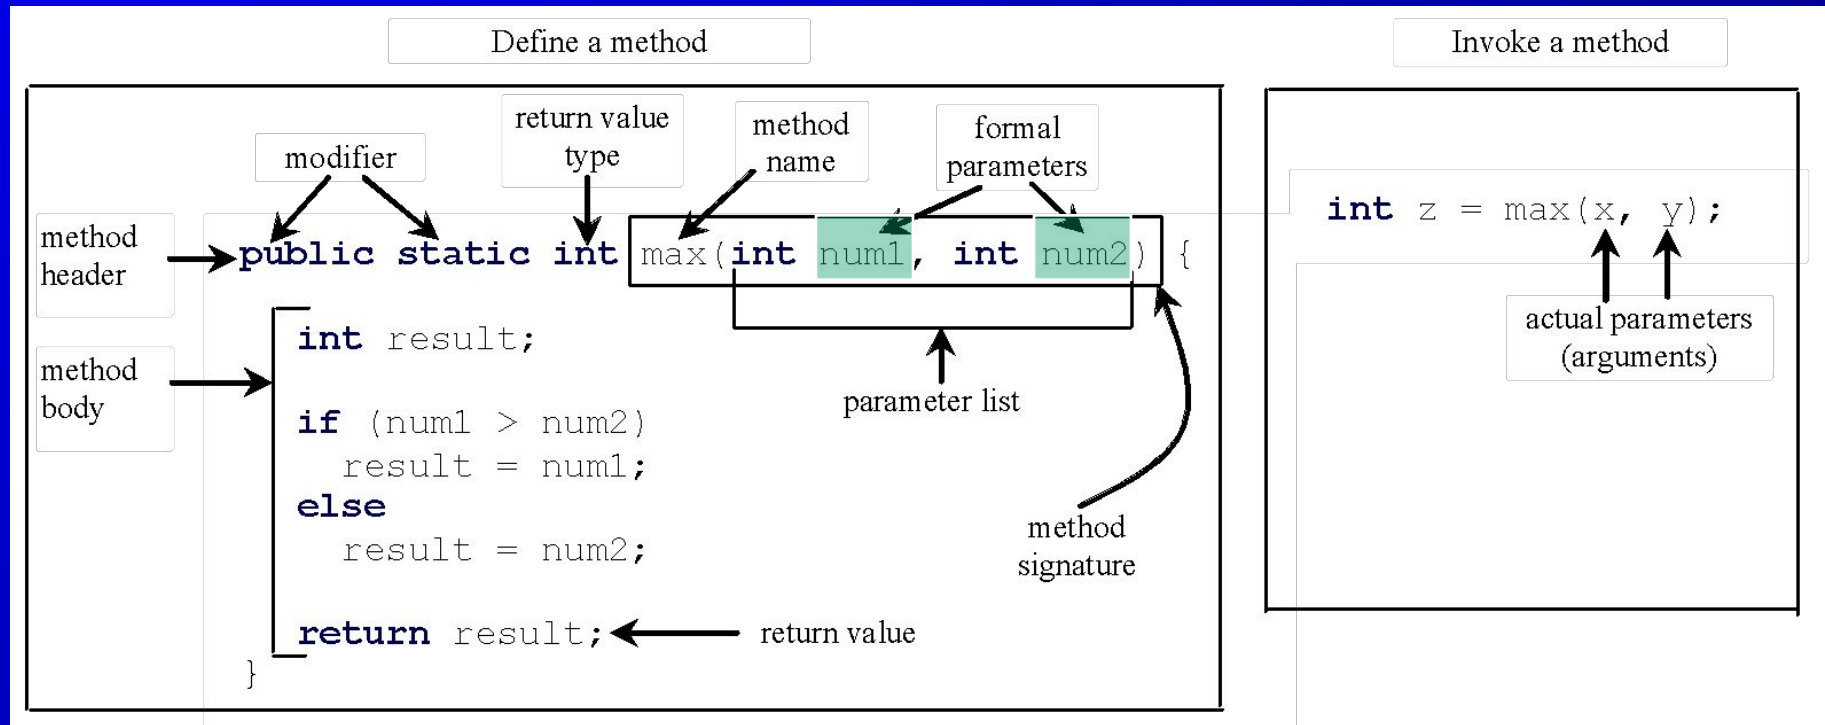

# Actual Parameters


*When a method is invoked, you pass value(s) to the formal parameter(s). This value is referred to as actual parameter or argument.*

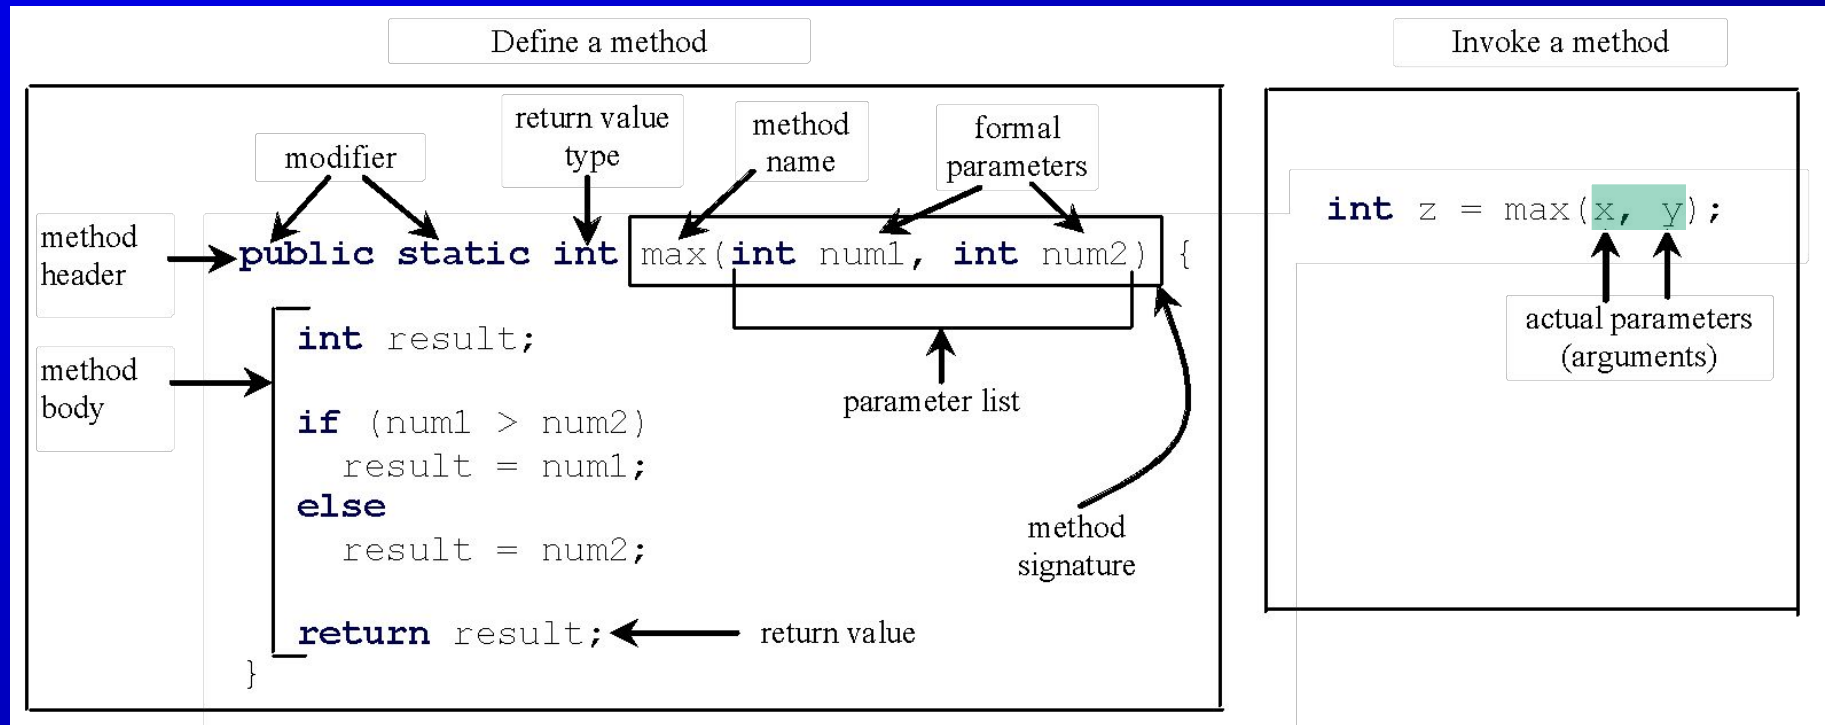




# Return Value Type

A method may return a value. The returnValue Type is the data type of the value the method returns. If the method does not return a value, the returnValue Type is the keyword void. For example, the returnValue Type in the main method is void.

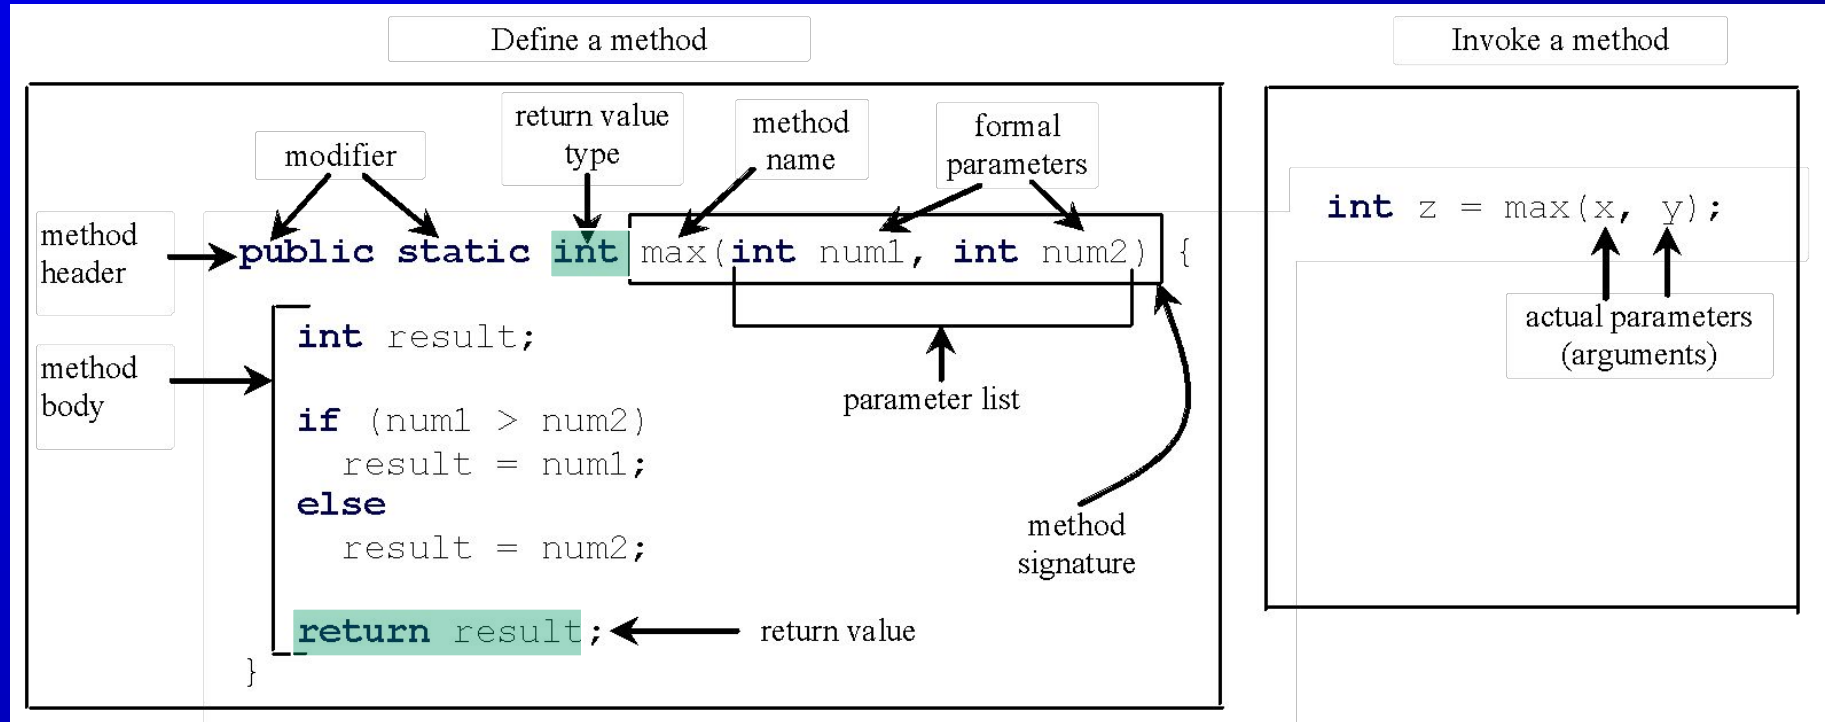

# Calling Methods

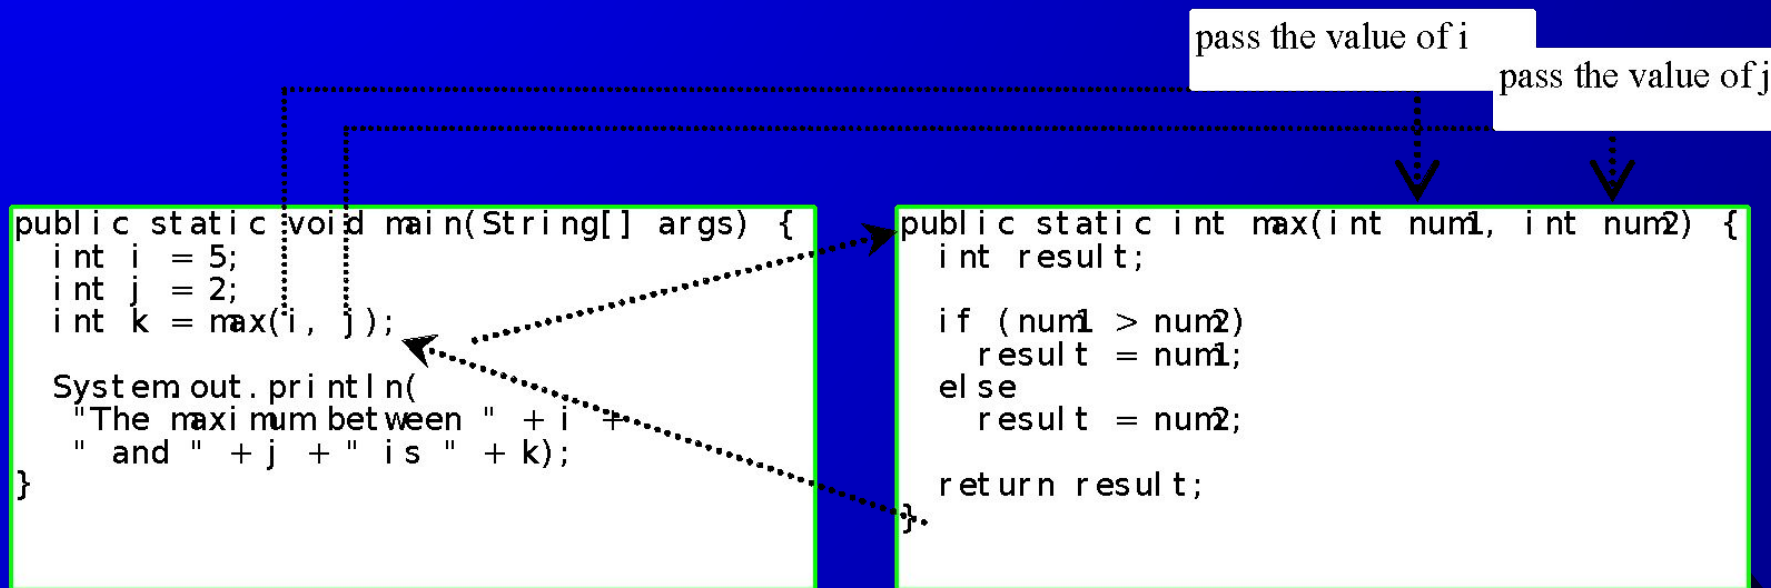

# Trace Method Invocation

i is now 5

```
public static void main(String[] args) {  
    int i = 5;  
    int j = 2;  
    int k = max(i, j);  
  
    System.out.println(  
        "The maximum between " + i +  
        " and " + j + " is " + k);  
}
```

```
public static int max(int num1, int num2) {  
    int result;  
  
    if (num1 > num2)  
        result = num1;  
    else  
        result = num2;  
  
    return result;  
}
```



# Trace Method Invocation

j is now 2

```
public static void main(String[] args) {  
    int i = 5;  
    int j = 2;  
    int k = max(i, j);  
  
    System.out.println(  
        "The maximum between " + i +  
        " and " + j + " is " + k);  
}
```

```
public static int max(int num1, int num2) {  
    int result;  
  
    if (num1 > num2)  
        result = num1;  
    else  
        result = num2;  
  
    return result;  
}
```



# Trace Method Invocation

invoke max(i, j)

```
public static void main(String[] args) {  
    int i = 5;  
    int j = 2;  
    int k = max(i, j);  
  
    System.out.println(  
        "The maximum between " + i +  
        " and " + j + " is " + k);  
}
```

```
public static int max(int num1, int num2) {  
    int result;  
  
    if (num1 > num2)  
        result = num1;  
    else  
        result = num2;  
  
    return result;  
}
```



# Trace Method Invocation

invoke max(i, j)  
Pass the value of i to num1  
Pass the value of j to num2

```
public static void main(String[] args) {  
    int i = 5;  
    int j = 2;  
    int k = max(i, j);  
  
    System.out.println(  
        "The maximum between " + i +  
        " and " + j + " is " + k);  
}
```

```
public static int max(int num1, int num2) {  
    int result;  
  
    if (num1 > num2)  
        result = num1;  
    else  
        result = num2;  
  
    return result;  
}
```



# Trace Method Invocation

declare variable result

```
public static void main(String[] args) {  
    int i = 5;  
    int j = 2;  
    int k = max(i, j);  
  
    System.out.println(  
        "The maximum between " + i +  
        " and " + j + " is " + k);  
}
```

```
public static int max(int num1, int num2) {  
    int result;  
  
    if (num1 > num2)  
        result = num1;  
    else  
        result = num2;  
  
    return result;  
}
```



# Trace Method Invocation

(num1 > num2) is true since num1 is 5 and num2 is 2

```
public static void main(String[] args) {  
    int i = 5;  
    int j = 2;  
    int k = max(i, j);  
  
    System.out.println(  
        "The maximum between " + i +  
        " and " + j + " is " + k);  
}
```

```
public static int max(int num1, int num2) {  
    int result;  
    if (num1 > num2)  
        result = num1;  
    else  
        result = num2;  
    return result;  
}
```





# Trace Method Invocation

result is now 5

```
public static void main(String[] args) {  
    int i = 5;  
    int j = 2;  
    int k = max(i, j);  
  
    System.out.println(  
        "The maximum between " + i +  
        " and " + j + " is " + k);  
}
```

```
public static int max(int num1, int num2) {  
    int result;  
  
    if (num1 > num2)  
        result = num1;  
    else  
        result = num2;  
  
    return result;  
}
```



# Trace Method Invocation

return result, which is 5

```
public static void main(String[] args) {  
    int i = 5;  
    int j = 2;  
    int k = max(i, j);  
  
    System.out.println(  
        "The maximum between " + i +  
        " and " + j + " is " + k);  
}
```

```
public static int max(int num1, int num2) {  
    int result;  
    if (num1 > num2)  
        result = num1;  
    else  
        result = num2;  
    return result;  
}
```



# Trace Method Invocation

return max(i, j) and assign the  
return value to k

```
public static void main(String[] args) {  
    int i = 5;  
    int j = 2;  
    int k = max(i, j);  
    System.out.println(  
        "The maximum between " + i +  
        " and " + j + " is " + k);  
}
```

```
public static int max(int num1, int num2) {  
    int result;  
    if (num1 > num2)  
        result = num1;  
    else  
        result = num2;  
    return result;  
}
```



# Trace Method Invocation

Execute the print statement

```
public static void main(String[] args) {  
    int i = 5;  
    int j = 2;  
    int k = max(i, j);  
}
```

```
System.out.println(  
    "The maximum between " + i +  
    " and " + j + " is " + k);
```

```
public static int max(int num1, int num2) {  
    int result;  
  
    if (num1 > num2)  
        result = num1;  
    else  
        result = num2;  
  
    return result;  
}
```



# \*\*\*\*\*CAUTION\*\*\*\*\*

A return statement is required for a value-returning method. The method shown below in (a) is logically correct, but it has a compilation error because the Java compiler thinks it possible that this method does not return any value.

```
public static int sign(int n) {  
    if (n > 0)  
        return 1;  
    else if (n == 0)  
        return 0;  
    else if (n < 0)  
        return -1;  
}
```

(a)

Should be

```
public static int sign(int n) {  
    if (n > 0)  
        return 1;  
    else if (n == 0)  
        return 0;  
    else  
        return -1;  
}
```

(b)

To fix this problem, delete if(n < 0) in (a), so that the compiler will see a return statement to be reached regardless of how the if statement is evaluated.

# Reuse Methods from Other Classes

NOTE: One of the benefits of methods is for reuse. The max method can be invoked from any class besides TestMax. If you create a new class Test, you can invoke the max method using ClassName.methodName (e.g., TestMax.max).



# Modularizing Code

Methods can be used to reduce redundant coding and enable code reuse. Methods can also be used to modularize code and improve the quality of the program.

Problem: Greatest Common Divisor, Prime Number



# Scope of Local Variables

A local variable: *A variable defined inside a method.*

Scope: *The part of the program where the variable can be referenced.*


- *The scope of a local variable starts from its declaration and continues to the end of the block that contains the variable.*
- *A local variable must be declared before it can be used.*





# Method Abstraction

You can think of the method body as a black box that contains the detailed implementation for the method.

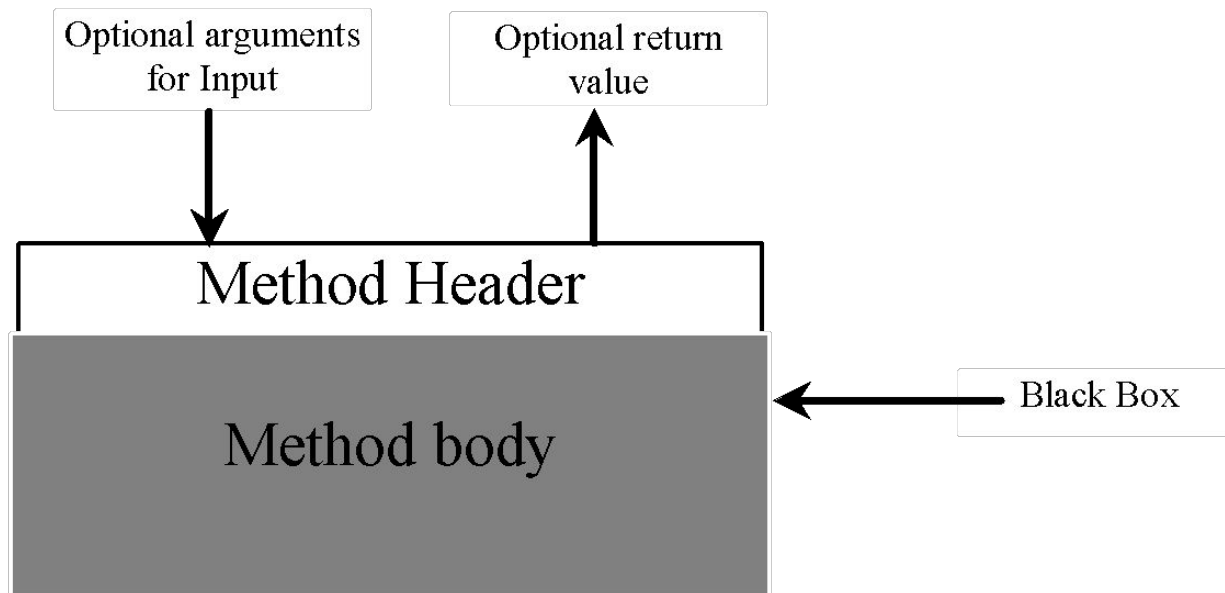

# Benefits of Methods

- Write a method once and reuse it anywhere.
- Information hiding. Hide the implementation from the user.
- Reduce complexity.

Finish!

