SF1518/19 Mästarprov 13: Strömkretsen

Hassan Al Noori
hassanan@kth.se

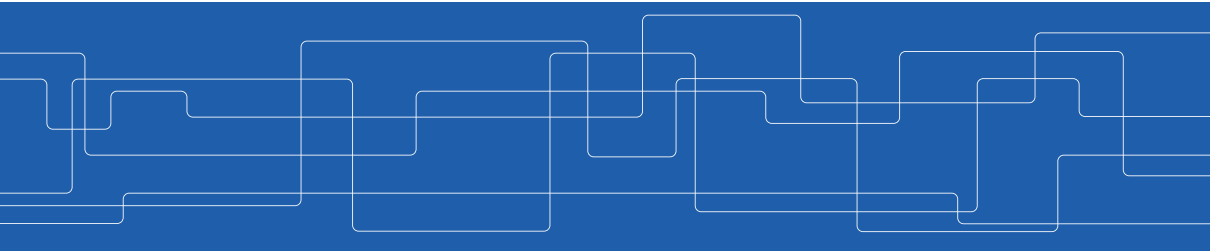

LC-circuit



LC-circuit

- What is an LC-circuit?



RFID

Electronic article surveillance

Project statement

Project statement

- What is the current in the circuit?

Project statement

- What is the current in the circuit?
- How is the current affected by the voltage?

Project statement

- What is the current in the circuit?
- How is the current affected by the voltage?
- Prove $E(t)$ is constant

Project statement

- What is the current in the circuit?
- How is the current affected by the voltage?
- Prove $E(t)$ is constant
- How big is the error?

Project statement

- What is the current in the circuit?
- How is the current affected by the voltage?
- Prove $E(t)$ is constant
- How big is the error?
- Fourier transform

Project statement

- What is the current in the circuit?
- How is the current affected by the voltage?
- Prove $E(t)$ is constant
- How big is the error?
- Fourier transform
- Voluntary part

Mathematical formulation

$$L = \frac{L_0}{1 + I^2} \qquad U = L\frac{dI}{dt}$$

$$I = -C\frac{dU}{dt} \qquad t = 0, \quad I = 0, \quad \frac{dI}{dt} = \frac{U_0}{L_0}$$

Mathematical formulation

$$\frac{d^2I}{dt^2} = \frac{2I}{1+I^2}\left(\frac{dI}{dt}\right)^2 - \frac{I\left(1+I^2\right)}{L_0C}$$

Mathematical formulation

$$\tilde{y}'(t) = \begin{bmatrix} y_1'(t) \\ y_2'(t) \end{bmatrix} = \begin{bmatrix} y_2(t) \\ \frac{2y_1(t)y_2^2(t)}{1+y_1(t)^2} - \frac{y_1(t)\left(1+y_1(t)^2\right)}{L_0 C} \end{bmatrix}$$

Numerical Methods - Runge Kutta 4

$$
\begin{aligned}
K_1 &= hf(x_n, y_n) \\
K_2 &= hf(x_n + \frac{h}{2}, y_n + \frac{k_1}{2}) \\
K_3 &= hf(x_n + \frac{h}{2}, y_n + \frac{k_2}{2}) \\
K_4 &= hf(x_n + h, y_n + k_3) \\
y_{n+1} &= y_n + \frac{1}{6}\left(K_1 + 2K_2 + 2K_3 + K_4\right) + O(h^5)
\end{aligned}
$$

Mathematical formulation

$$E(t) = U(t)^2 - log(1 + I(t)^2)$$

Mathematical formulation

$$\frac{dE}{dt} = \frac{d}{dt}\left(U(t)^2 - log(1 + I(t)^2)\right)$$

$$= \frac{d}{dt}\left(\left(\frac{L_0\frac{dI}{dt}}{1+I(t)^2}\right)^2 - log\left(1+I(t)^2\right)\right)$$

$$= \frac{d}{dt}\left(\frac{L_0 \frac{dI}{dt}}{1 + I(t)^2}\right)^2 - \frac{d}{dt}\left(log\left(1 + I(t)^2\right)\right)$$

Mathematical formulation

$$= \ldots$$

$$= 2 \left(\frac{\frac{dI}{dt} \left(1 + I(t)^2 \left(\frac{d^2 I}{dt^2} \right) - 2I(t) \left(\frac{dI}{dt} \right)^2 \right)}{\left(1 + I(t)^2 \right)^3} - \frac{I(t) \left(\frac{dI}{dt} \right)}{\left(1 + I(t)^2 \right)} \right)$$

$$= 2\left(\frac{\frac{dI}{dt}}{1+I(t)^2}\right)\left(\frac{1+I(t)^2\left(\frac{d^2I}{dt^2}\right)-2I(t)\left(\frac{dI}{dt}\right)^2}{\left(1+I(t)^2\right)^2}-\frac{I(t)}{1}\right)$$

Mathematical formulation

$$\frac{dE}{dt} = 0 \quad \forall \quad t \in \mathbb{R} \quad \Longleftrightarrow \frac{d}{dt} I(0) = 0 \quad or \quad I(0) = 0 \quad \because$$

$$\frac{dE}{dt} = 0 \Longrightarrow \frac{d^2 I}{dt^2} = \left(\frac{2I(t)\frac{dI}{dt}}{1 + I(t)^2} + \frac{4\left(\frac{dI}{dt}\right)^3 I(t)}{\left(1 + I(t)^2\right)^3} \right) \frac{\left(1 + I(t)^2\right)^2}{2\left(\frac{dI}{dt}\right)}$$

Which by definition is a second order autonomous ODE. Thus, If $I = c$ is a specific solution, then its phase line is indenpendent of the time at which initial conditions are applied. Hence

$$\frac{d^2 I}{dt^2} = 0, \quad I_0 = 0 \quad \therefore \quad \frac{dE}{dt} = 0$$

□

$U_0 = 240V$

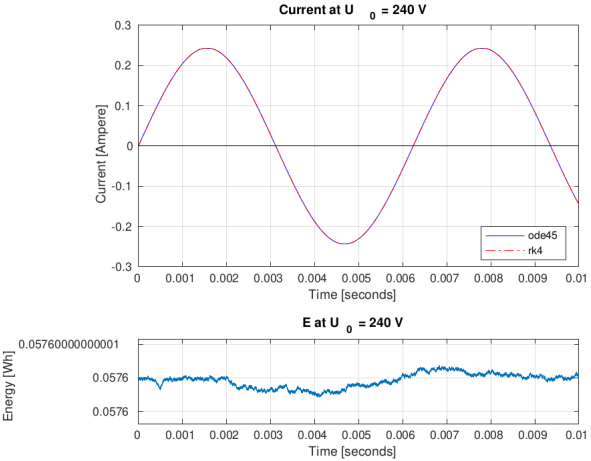
Current at U 0 = 240 V
Current [Ampere]
0.3
0.2
0.1
0
-0.1
-0.2
-0.3
0
0.001
0.002
0.003
0.004
0.005
0.006
0.007
0.008
0.009
0.01
Time [seconds]
ode45
rk4
E at U 0 = 240 V
Energy [Wh]
0.05760000000001
0.0576
0.0576
Time [seconds]

$U_0 = 1200V$

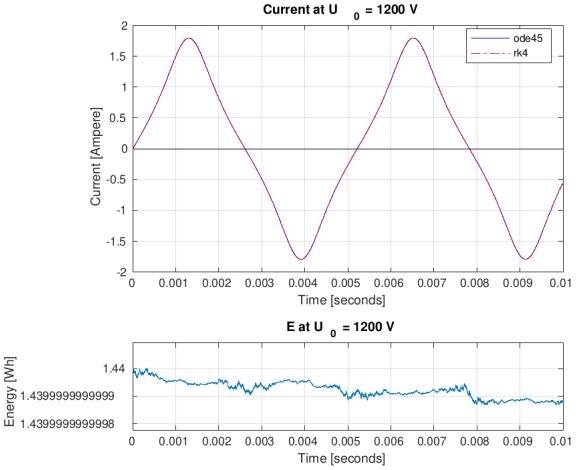
Current at U 0 = 1200 V
ode45
rk4
Current [Ampere]
Time [seconds]
E at U 0 = 1200 V
Energy [Wh]
1.44
1.4399999999999
1.4399999999998
Time [seconds]

$U_0 = 2400V$

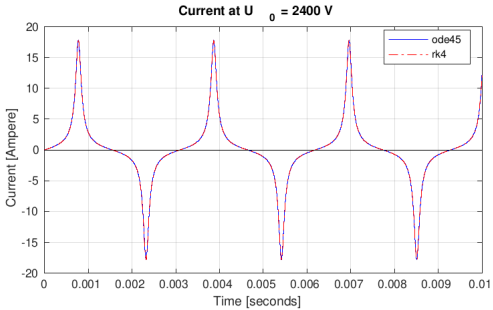
Current at U 0 = 2400 V
ode45
rk4
Current [Ampere]
Time [seconds]
E at U 0 = 2400 V
Energy [Wh]
5.7600000000005
5.76
5.7599999999995
Time [seconds]

Fourier analysis

$$I(t) = a_1 sin(\omega t) + a_2 sin(2\omega t) + a_3 sin(3\omega t) + \cdots, \qquad \omega = 2\pi/T$$

$$a_k = \frac{2}{T}\int_0^T I(t) sin(k\omega t) dt, \quad k = 1, 2, 3....$$

Fourier analysis

- Trapezoidal integration for periodic functions

$$T(h) = \frac{h}{2}\left(f_0 + f_m + 2\sum_{m-1}^{i=1} y_i\right)$$

$$I = T(h) - \frac{f'(b) - f'(a)}{12}h^2 + \frac{f'''(b) - f'''(a)}{720}h^4 - \frac{f^{(5)}(b) - f^{(5)}(a)}{30240}h^6 + O(h^8)$$

$U_0 = 240V$

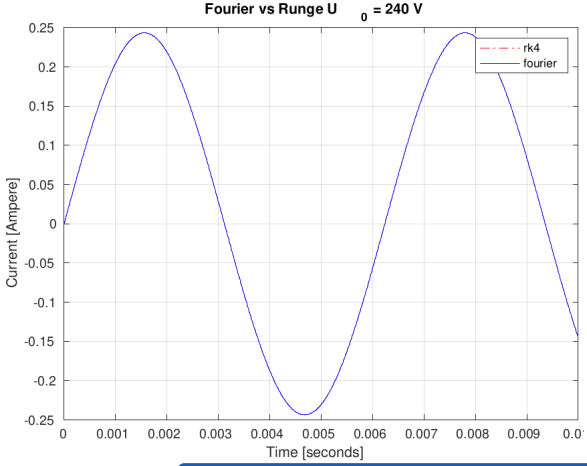
Fourier vs Runge U 0 = 240 V
rk4
fourier
Current [Ampere]
Time [seconds]
0.25
0.2
0.15
0.1
0.05
0
-0.05
-0.1
-0.15
-0.2
-0.25
0
0.001
0.002
0.003
0.004
0.005
0.006
0.007
0.008
0.009

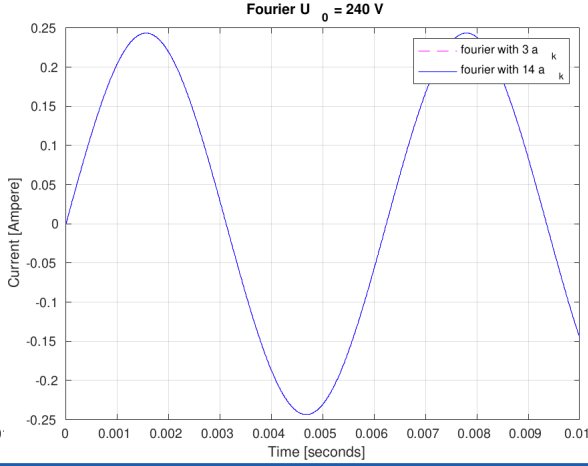
Fourier U 0 = 240 V
fourier with 3 a k
fourier with 14 a k
Current [Ampere]
Time [seconds]
0.25
0.2
0.15
0.1
0.05
0
-0.05
-0.1
-0.15
-0.2
-0.25
0
0.001
0.002
0.003
0.004
0.005
0.006
0.007
0.008
0.009
0.01

$U_0 = 1200V$

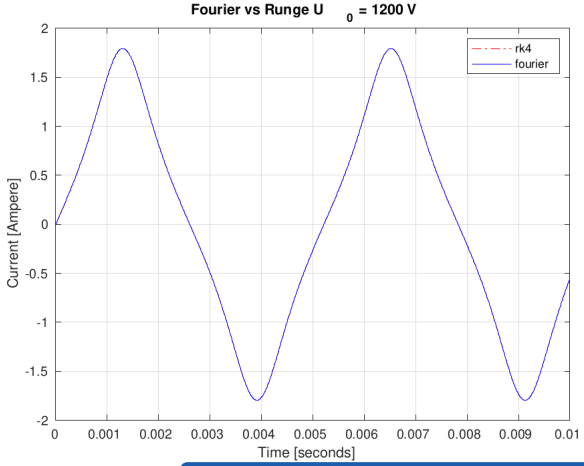
Fourier vs Runge U 0 = 1200 V
rk4
fourier
Current [Ampere]
Time [seconds]
2
1.5
1
0.5
0
-0.5
-1
-1.5
-2
0
0.001
0.002
0.003
0.004
0.005
0.006
0.007
0.008
0.009
0.01

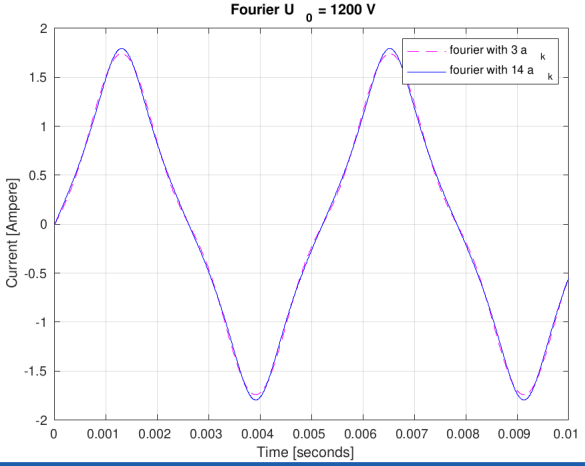
Fourier U 0 = 1200 V
fourier with 3 a k
fourier with 14 a k
Current [Ampere]
Time [seconds]
2
1.5
1
0.5
0
-0.5
-1
-1.5
-2
0
0.001
0.002
0.003
0.004
0.005
0.006
0.007
0.008
0.009
0.01

$U_0 = 2400V$

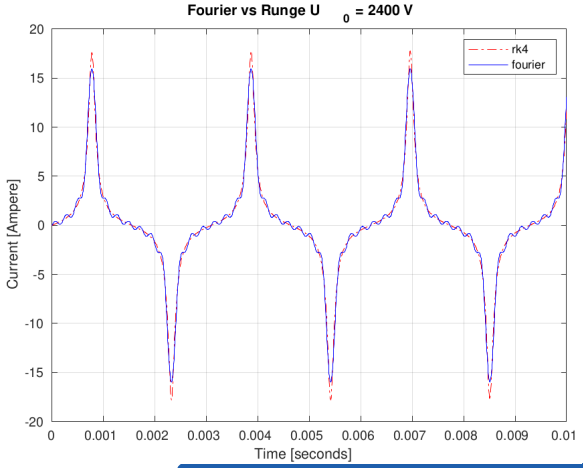
Fourier vs Runge U 0 = 2400 V
rk4
fourier
Current [Ampere]
Time [seconds]
20
15
10
5
0
-5
-10
-15
-20
0
0.001
0.002
0.003
0.004
0.005
0.006
0.007
0.008
0.009
0.01

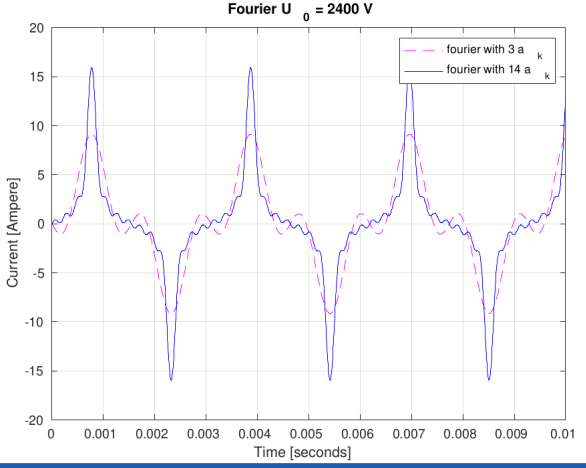
Fourier U 0 = 2400 V
fourier with 3 a k
fourier with 14 a k
Current [Ampere]
Time [seconds]
20
15
10
5
0
-5
-10
-15
-20
0
0.001
0.002
0.003
0.004
0.005
0.006
0.007
0.008
0.009
0.01

Voluntary part 1

$$I_{max} := 10$$

Voluntary part 1

$$I_{max} \coloneqq 10$$

$$I_\alpha = max\,\{\quad I(U_0^*, L_0) : U_0 \in]240, 2400[, L_0 \in \mathbb{R}\quad\}$$

Voluntary part 1

$$I_{max} := 10$$

$$I_\alpha = max\{ \quad I(U_0^*, L_0) : U_0 \in]240, 2400[, L_0 \in \mathbb{R} \quad \}$$

$$g(U_0^*, L_0) = 0 = I_{max} - I_\alpha$$

Voluntary part 1

$$I_{max} := 10$$

$$I_\alpha = max\{ \quad I(U_0^*, L_0) : U_0 \in]240, 2400[, L_0 \in \mathbb{R} \quad \}$$

$$g(U_0^*, L_0) = 0 = I_{max} - I_\alpha$$

- Bisection method

Voluntary part 1

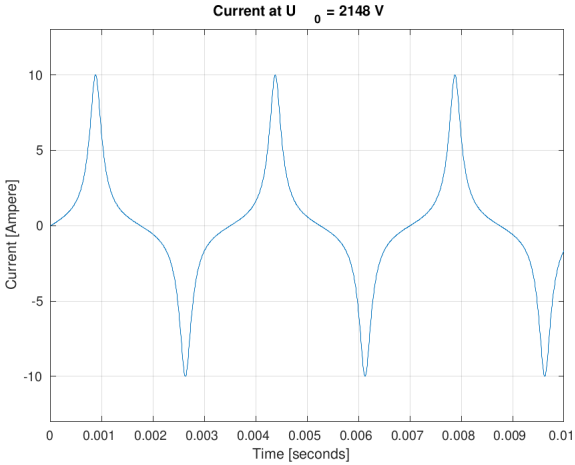

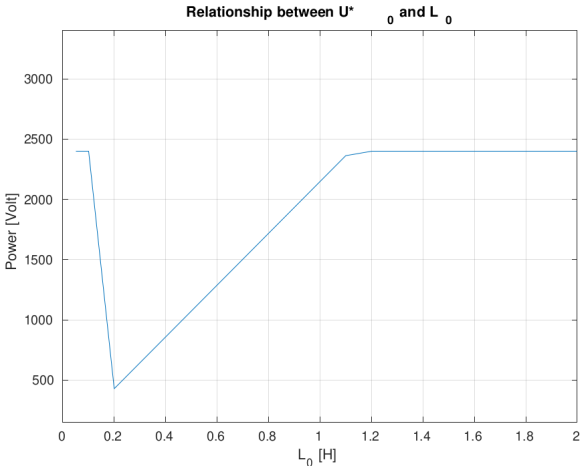

$$U = L\frac{dI}{dt} \qquad I = -C\frac{dU}{dt} \qquad L = \frac{L_0}{1 + I^2}$$

Voluntary part 2

$$\tilde{y}' = \begin{bmatrix} \frac{dI}{dt} \\ \\ \frac{dU}{dt} \end{bmatrix} = \begin{bmatrix} \frac{1+I^2}{L_0}U \\ \\ \frac{\left(\frac{dI}{dt}\right)}{-C} \end{bmatrix}$$

Voluntary part 2

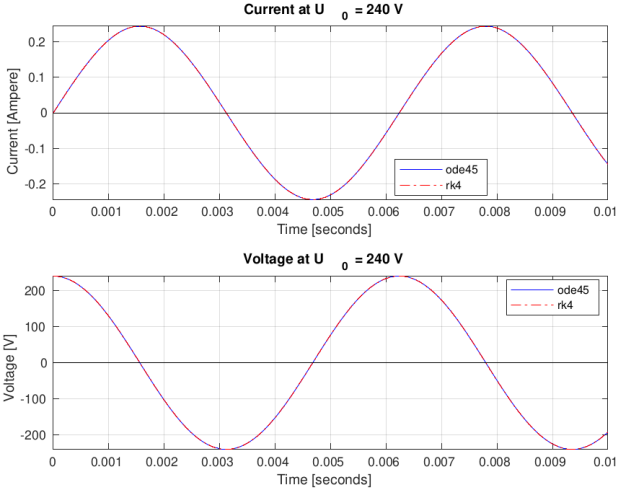

Voluntary part 2

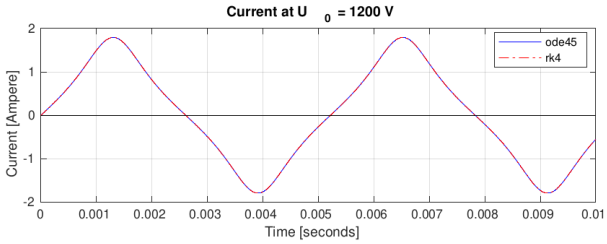

Voluntary part 2

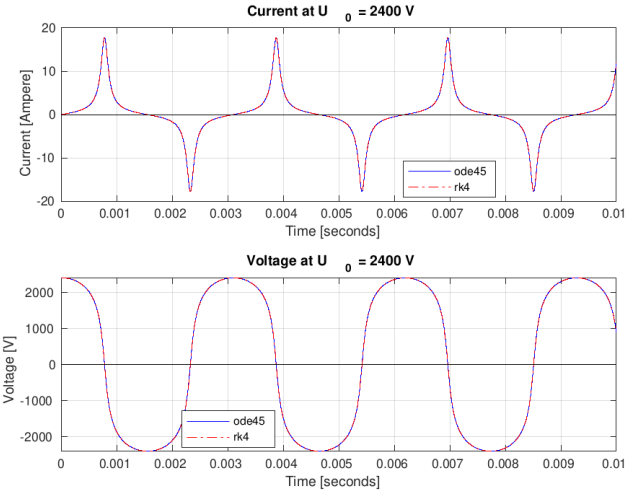

Thanks

github - haaln

mail - hassanan@kth.se