

# Migration Center User's Manual

---

**Release 7.11**

Alitbase® Tools & Utilities

Altibase Tools & Utilities Migration Center User's Manual  
Release 7.11

Copyright © 2001~2023 Altibase Corp. All Rights Reserved.

This manual contains proprietary information of Altibase® Corporation; it is provided under a license agreement containing restrictions on use and disclosure and is also protected by copyright patent and other intellectual property law. Reverse engineering of the software is prohibited.

All trademarks, registered or otherwise, are the property of their respective owners.

**Altibase Corp**

10F, Daerung PostTower II,  
306, Digital-ro, Guro-gu, Seoul 08378, Korea

Telephone : +82-2-2082-1000

Fax : +82-2-2082-1099

Customer Service Portal : <http://support.altibase.com/en/>

Homepage : <http://www.altibase.com>

# Table Of Contents

---

- [Preface](#)
- [1. Introduction](#)
  - [Overview](#)
  - [System Requirements](#)
  - [Installation and Uninstallation](#)
- [2. Getting Started](#)
  - [Understanding Migration Center](#)
  - [Understanding User Interface](#)
  - [Tools](#)
- [3. GUI Mode Quick Guide](#)
  - [Quick Step Guide for GUI User](#)
- [4. CLI Mode Quick Guide](#)
  - [Quick Step Guide for CLI User](#)
- [5. Migration Center Internals](#)
  - [Build Step](#)
  - [Reconcile Step](#)
  - [Run Step](#)
  - [Data Validation Step](#)
- [Appendix A: Migration Options](#)
  - [DB to DB Migration Options](#)
  - [DB to File Migration Options](#)
- [Appendix B: Migratable Database Objects](#)
  - [Altibase to Altibase](#)
  - [Altibase to Oracle](#)
  - [CUBRID to Altibase](#)
  - [Informix to Altibase](#)
  - [MySQL to Altibase](#)
  - [Oracle to Altibase](#)
  - [SQL Server to Altibase](#)
  - [TimesTen to Altibase](#)
  - [Tibero to Altibase](#)
  - [PostgreSQL to Altibase](#)
- [Appendix C: Data Type Mapping](#)

- [Manipulating Data Type Mapping](#)
- [Default Data Type Mapping Tables](#)
- [Automatic Correction of Character Column Length Considering Heterogeneous Character Set](#)
- [Appendix D: Mapping Default Values](#)
  - [Mapping Table for Default Values](#)
- [Appendix E: PSM Converter Rule List](#)
  - [View Conversion Rules](#)
  - [Trigger Conversion Rules](#)
  - [Function Conversion Rules](#)
  - [Procedure Conversion Rules](#)
  - [Materialized View Conversion Rules](#)
  - [Package Conversion Rules](#)
  - [Library Conversion Rules](#)
  - [DML Conversion Rules](#)
  - [PSM Conversion Rules](#)
  - [Expression Conversion Rules](#)
- [Appendix F: FAQ](#)
  - [Common](#)
  - [Oracle](#)
  - [MS-SQL](#)
  - [Altibase](#)
  - [Informix](#)
  - [MySQL](#)
  - [TimesTen](#)

## Preface

---

This manual describes Adapter for JDBC, an utility replicating modified data in Altibase to other database supporting JDBC.

### Audience

This manual has been prepared for the following Altibase users:

- Database administrators
- Performance administrators

- Database users
- Application developers
- Technical Supporters

It is recommended for those reading this manual possess the following background knowledge:

- Basic knowledge in the use of computers, operating systems, and operating system utilities
- Experience in using relational database and an understanding of database concepts
- Computer programming experience
- Experience in database server management, operating system management, or network administration

## Organization

This manual is organized as follows:

- Chapter 1: Introduction  
This chapter introduces Migration Center and explains how to install it.
- Chapter 2: Getting Started  
This chapter describes the key concepts in migration, how to use Migration Center in GUI and CLI modes, and tools provided for user convenience.
- Chapter 3: GUI Mode Quick Guide  
This chapter provides a quick step guide for GUI mode users who are new to Migration Center.
- Chapter 4: CLI Mode Quick Guide  
This chapter provides a quick step guide for CLI mode users who are new to Migration Center.
- Chapter 5: Migration Center Internals  
This chapter describes the main steps of Migration Center, namely the Build, Reconcile, Run, and Data Validation steps.
- Appendix A: Migration Options  
This appendix describes the Migration Center options.
- Appendix B: Migratable Database Objects  
This appendix provides the table that shows what database objects can be migrated using Migration Center.
- Appendix C: Data Type Mapping  
This appendix explains how to check and customize the default data type mapping for an existing project. In addition, it provides default data type mapping tables
- Appendix D: Mapping Default Values  
This appendix provides the mapping table for default values according to which Migration Center converts source database default values to comply with Altibase.
- Appendix E: PSM Converter Rule List  
This chapter describes the rules for converting PSM convertes to DDL SQL statements when migrating from Oracle to Altibase.
- Appendix F: FAQ

## Documentation Conventions










This section describes the conventions used in this manual. Understanding these conventions will make it easier to find information in this manual and in the other manuals in the series.

There are two sets of conventions:

- Syntax diagram conventions
- Sample code conventions

### Syntax Diagram Conventions

This manual describes command syntax using diagrams composed of the following elements:

Elements	Meaning
	Indicates the start of a command. If a syntactic element starts with an arrow, it is not a complete command.
	Indicates that the command continues to the next line. If a syntactic element ends with this symbol, it is not a complete command.
	Indicates that the command continues from the previous line. If a syntactic element starts with this symbol, it is not a complete command.
	Indicates the end of a statement.
	Indicates a mandatory element.
	Indicates an optional element.
	Indicates a mandatory element comprised of options. One, and only one, option must be specified.
	Indicates an optional element comprised of options.
	Indicates an optional element in which multiple elements may be specified. A comma must precede all but the first element.

### Sample Code Conventions

The code examples explain SQL statements, stored procedures, iSQL statements, and other command line syntax.

The following table describes the printing conventions used in the code examples.

Rules	Meaning	Example
-------	---------	---------

Rules	Meaning	Example
[ ]	Indicates an optional item	VARCHAR [(size)] [[FIXED   ] VARIABLE]
{ }	Indicates a mandatory field for which one or more items must be selected.	{ ENABLE   DISABLE   COMPILE }
	A delimiter between optional or mandatory arguments.	{ ENABLE   DISABLE   COMPILE } [ ENABLE   DISABLE   COMPILE ]
...	Indicates that the previous argument is repeated, or that sample code has been omitted.	SQL> SELECT ename FROM employee; ENAME ----- SWNO HJNO HSCHOI . . . 20 rows selected.
Other Symbols	Symbols other than those shown above are part of the actual code.	EXEC :p1 := 1; acc NUMBER(11,2)
Italics	Statement elements in italics indicate variables and special values specified by the user.	SELECT * FROM <i>table_name</i> ; CONNECT <i>userID/password</i> ;
Lower case words	Indicate program elements set by the user, such as table names, column names, file names, etc.	SELECT ename FROM employee;
Upper case words	Keywords and all elements provided by the system appear in upper case.	DESC SYSTEM.SYS_INDICES;

## Related Documentations

For more detailed information, please refer to the following documents.

- Installation Guide
- Getting Started Guide
- Administrator's Manual
- Replication Manual
- Precompiler User's Manual
- API User's Manual

- Altibase C Interface Manual
- iSQL User's Manual
- Utilities Manual
- General Reference
- Error Message Reference

## Altibase Welcomes Your Comments and Feedbacks

Please let us know what you like or dislike about our manuals. To help us with better future versions of our manuals, please tell us if there is any corrections or classifications that you would find useful.

Include the following information:

- The name and version of the manual that you are using
- Any comments about the manual
- Your name, address, and phone number

If you need immediate assistance regarding any errors, omissions, and other technical issues, please contact [Altibase's Support Portal](#).

Thank you. We always welcome your feedbacks and suggestions.

# 1. Introduction

---

This chapter introduces Migration Center and explains how to install it. This chapter consists of the following sections:

- Overview
- System Requirements
- Installation and Uninstallation

## Overview

Migration Center is a database migration tool that either directly or indirectly copies generally compatible database objects and data. Most databases comply with international standards, but no database is exempt from manual database migration. Generally, manual database migration is complicated, time-consuming, and error-prone. Migration Center helps users migrate databases with only a few mouse clicks in Graphic User Interface (GUI) mode, and offers Command Line Interface (CLI) mode as well.

The major benefits of using this tool are:

1. Database objects of the original database can be conveniently migrated to the target database (Altibase or Oracle) without any difficulties.
2. Directly copies data of a source database to Altibase with a JDBC driver (the most popular and widely available interface for DBMS nowadays).
3. Exports data to external files for later use in data importing to Altibase with iLoader.



4. Provides parallel execution options to shorten the migration process. By default, Migration Center automatically balances data migration load between a number of threads and also enables the user to manually split data over multiple threads.
5. Supports data type mapping of different data types between heterogeneous databases. Provides default type mapping for convenience and user-defined data type mapping for flexibility.
6. Provides GUI mode for better usability and CLI mode for special circumstances.
7. For schema migration, enables the user to modify DDL SQL statements for migrating database objects.

## System Requirements

This section discusses the system requirements for Migration Center and compatible database management systems.

- Hardware Requirements
- Software Requirements
- Compatible Database Systems

### Hardware Requirements

#### GUI Mode

- CPU: Pentium III 800MHz or better
- Main memory: 512MB or more
- Disk: 150MB or more free space
- Screen resolution: 1024 x 768 pixels or higher

#### CLI Mode

- CPU: Pentium III 800MHz or better
- Main memory: 512MB or more
- Disk: 150MB or more free space

### Software Requirements

- Java Development Kit (JDK), or Java Runtime Environment (JRE) 5 or later

Migration Center is a pure Java application that uses Swing for GUI mode. It runs regardless of the user's hardware and operating system, but relies on the JRE. The user is recommended to install Oracle, or IBM Java 5 or later. To run Migration Center in GUI mode, the user's environment must support Java Swing.

Since Migration Center is bundled with the JRE 7 for the 64-bit Microsoft Windows system, these users do not need to install the JRE. However, other operating system users must configure the JRE and related environment variables appropriately.

## Compatible Database Systems

The compatible database systems that are migratable can be divided into Altibase or Oracle depending on the target database.

### If Altibase is the target database:

If Altibase is the target database, the source database that can be migrated is as follows.

#### Destination Database

- Altibase 6.5.1 or later

#### Source Database

- Altibase: 4.3.9 or later
- Oracle Database: 9i - 11g
- Microsoft SQL Server: 2005 - 2012
- Oracle MySQL: 5.0 - 5.5
- Informix: 11.50
- Oracle TimesTen: 7.0, 11.2
- CUBRID: 8.4.1~9.3.5(ISO-8859-1, UTF-8 charset)
- Tiberio: 5~6

### If Oracle is the target database:

If Oracle is the target database, the source database that can be migrated is as follows.

#### Destination Database

- Oracle Database 10g - 11g

#### Source Database

- Altibase: 4.3.9 or later

## JDBC Driver

Migration Center is available for different versions of Altibase and other databases. This tool uses a JDBC driver for database connection, so it is important to prepare the appropriate JDBC driver for both source and destination databases. For user convenience, some JDBC drivers that are appropriate for use with supported databases are provided with Migration Center.

Please note that for legal reasons, the Microsoft SQL Server JDBC driver file, MySQL Connector/J file, informix JDBC Driver file, and TimesTen JDBC driver file are not included in the package. Also, since TimesTen only supports type 2 driver, the migration must be performed on a machine that the TimesTen Client Package is installed.

Users can download the appropriate JDBC driver file from the following site:

1. Microsoft does not support the JDBC driver for SQL Server 2005 according to the Microsoft Support Lifecycle(MSL) policy, and it also does not provide download link. Therefore, users should use the JDBC driver included in the database product they are using.
2. Microsoft JDBC Driver for SQL Server 2008, for 2008 R2, for 2012 can be downloaded from the link below. Since Migration Center has been tested with JDBC driver version 6.0 and JRE 7 environment, it is recommended for users to use the same driver version and JRE version. Also in Linux OS, the value of JAVA\_HOME environment variable must be set to the path where the JRE 7 or later is installed. If you want to use a version other than JDBC Driver 6.0, you need to check the driver version, compatible SQL Server version, and supported JRE version in the Microsoft JDBC Driver for SQL Server Support Matrix.  
Download Microsoft JDBC Driver for SQL Server:  
<https://docs.microsoft.com/en-us/sql/connect/jdbc/download-microsoft-jdbc-driver-for-sql-server?view=sql-server-2017>  
Microsoft JDBC Driver for SQL Server Support Matrix:  
<https://docs.microsoft.com/en-us/sql/connect/jdbc/microsoft-jdbc-driver-for-sql-server-support-matrix?view=sql-server-2017>
3. Oracle MySQL Connector/J  
<http://dev.mysql.com/downloads/connector/j/>
4. Informix JDBC Driver  
<http://www14.software.ibm.com/webapp/download/search.jsp?go=y&rs=ifxjdbc>
5. Oracle TimesTen  
<http://www.oracle.com/technetwork/database/database-technologies/timesten/downloads/index.html>
6. CUBRID  
[http://www.cubrid.org/?mid=downloads&item=jdbc\\_driver](http://www.cubrid.org/?mid=downloads&item=jdbc_driver)
7. Tibero  
<https://technet.tmaxsoft.com/>

## Installation and Uninstallation

Migration Center can be downloaded from Altibase's Customer Center at <http://altibase.com/support-center/en/>.

Migration Center is provided in zip or tar.gz file format. This file contains the executable file and some JDBC drivers.

To install, simply unzip the file. The generated directory contains the projects, lib, conf, and images subdirectories, other directories, and files (including migcenter.bat and migcenter.sh). Move this folder to a desired location, and Migration Center is ready for use.

To uninstall, simply delete the Migration Center directory.

## 2. Getting Started

---

This chapter describes the key concepts in migration, how to use Migration Center in GUI and CLI modes, and tools provided for user convenience.

This chapter consists of the following sections:

- Understanding Migration Center
- Understanding User Interface
- Tools

## Understanding Migration Center

This section explains the terminology and overall process of Migration Center.

- Terms
- Basic Concept


### Terms

#### Project

The Migration Center project is a basic work unit that describes all aspects of migration. This includes what to migrate, where from and where to migrate (namely, the database or datafile type), and how to migrate database objects and table data. For more detailed information about migration options, please refer to Appendix A: Migration Options. Only one project can be open at any time.

#### Basic Concept

The overall process of Migration Center consists of five steps: Prepare, Build, Reconcile, Run, and Data Validation.

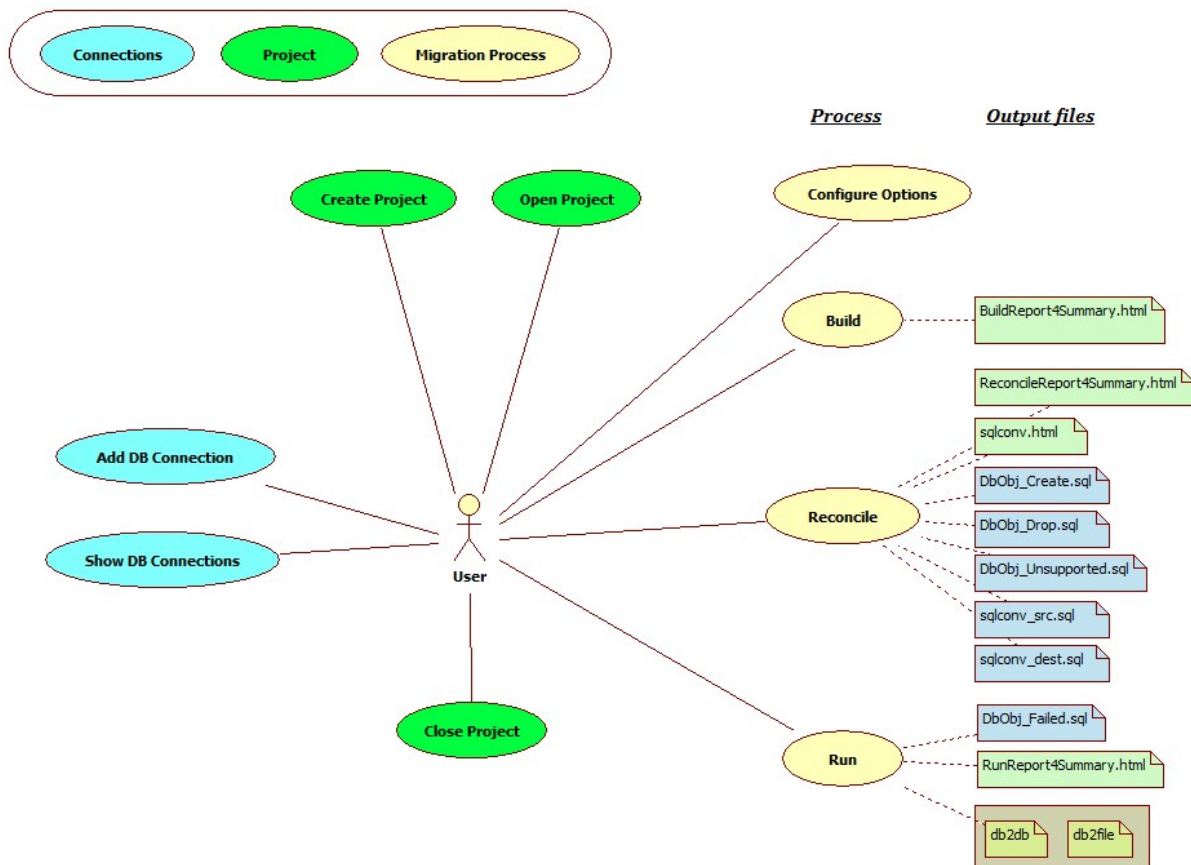

## Prepare Step

The Prepare step is an implicit step in the migration project. This step ends with an open project that has all database connections established. To get there, the user may need to add connection information of the running database, open an existing migration project, or create a new migration project by either using preconfigured database connections or establishing database connections.

## Build Step

The Build step performs initial surveys on the current status of the source and destination databases. This step retrieves information about database objects in the source and destination databases through database connections, and saves this information in the project directory. Since this information is used in other steps, it must reflect the most recent status. If any metadata is changed in the source database prior to the Run step, the Build, Reconcile, and Run steps must be re-executed to integrate changes.

## Reconcile Step

The Reconcile step builds a complete migration plan on the current status. This step is mostly 28 Migration Center User's Manual about making adjustments for differences between source and destination databases (namely, data types and tablespaces). This step enables the user to edit SELECT statements for fetching data from the source database and DDL statements to be executed on the destination database. For example, the user can specify which source database table is to be copied to which destination database tablespace.

Please remember that if changes are made to "Migration Options", this step must be re-executed.

## Run Step

The Run step executes the plan built in the Reconcile step. This step migrates schema and data either directly or indirectly.

If the migration type in "Migration Options" is set to "DB to DB", Migration Center creates database objects in the destination database (schema migration). Then, it copies data from the source database to the destination database (data migration).

If the migration type in "Migration Options" is set to "DB to File," SQL script files are created during migration. Nevertheless, the basic migration process is the same.

## Data Validation Step

The Data Validation step runs a check on migrated data. This step checks whether the data of a table that has a primary key and was migrated in the Run step is identical in the source and destination databases. If build step is performed as "Build User", this step checks the data validity of all tables that have a primary key. If build step is performed as "Build Table", this step checks the data validity of only migrated tables with a primary key.

Data that differs between the source and destination databases is stored to CSV files during this step. The user can apply data of this file to the destination database with the "FILESYNC" menu or command. To shorten the duration of this step, the data sampling feature is enabled by default. To disable the data sampling feature and run a data validation check on all data, select the "Data Validation Options" submenu from the "Migration Options" menu, and change "Data Sampling" to "No".


## Understanding User Interface

This section briefly describes GUI mode and CLI mode provided by the Migration Center. The details of two mode usages are discussed at "GUI Mode Quick Guide" and "CLI Mode Quick Guide".

### Graphic User Interface(GUI) Mode

GUI mode is a user-friendly interface and is the basic interface of Migration Center. GUI mode allows you to perform the entire migration process easily, and can be fine-tune "Reconciling the Project" step and changing the options. If the platform supports Java Swing from client computer to server, it can be executed in GUI mode.

The Migration Center GUI consists of the four panes shown below. Starting from the top left corner and moving clockwise, the four panes are Project, Information, Log, and DB Properties.

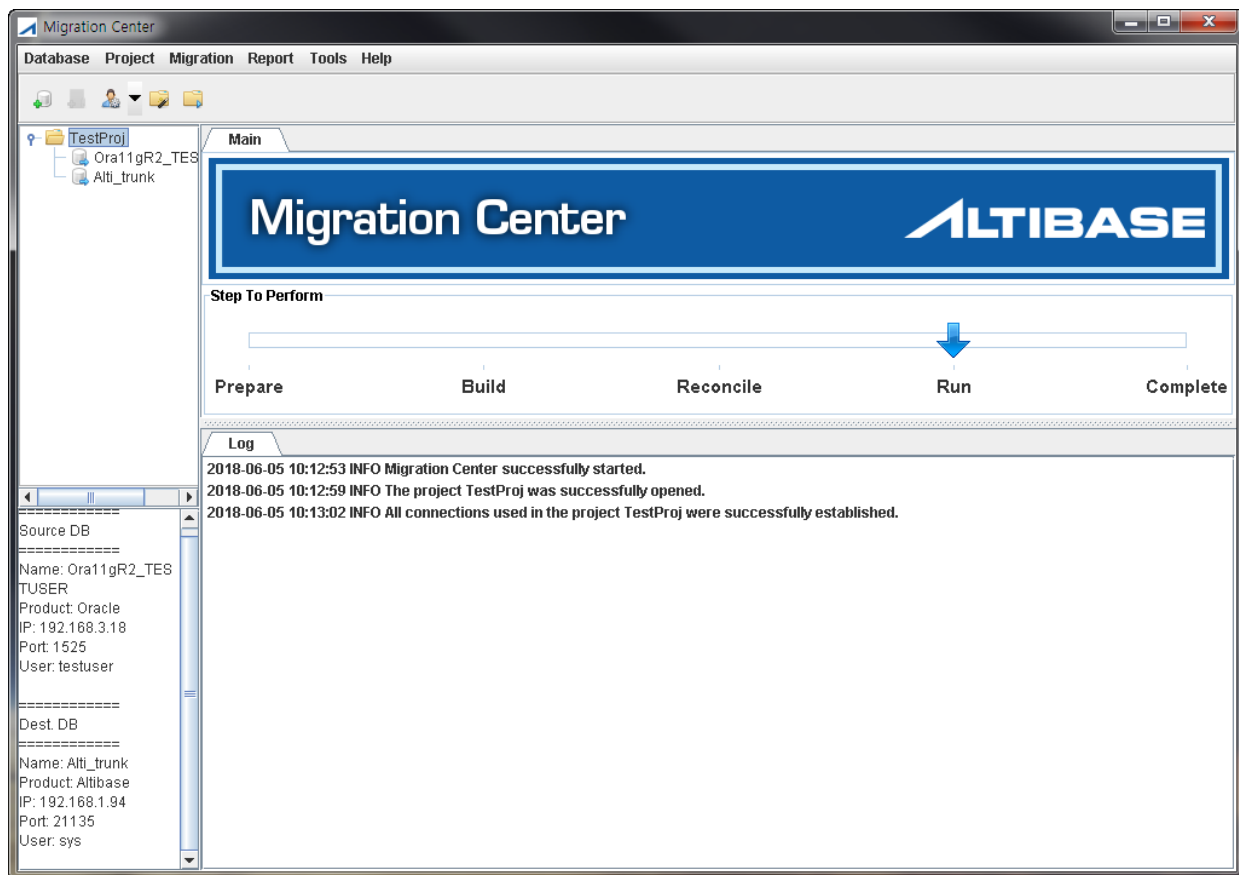

## Project Pane

The Project pane offers a project-centric view. This pane displays the open project, and its source and destination database connections. Only one project can be open at a time.

## Information Pane

The Information pane offers a simple view of the project. This pane displays the current progress and remaining steps.

## Log Pane

The Log pane displays the results of tasks performed by Migration Center in chronological order. This pane chooses information that might be of interest to the user from logs stored in the log subdirectory under the Migration Center directory.

## DB Properties Pane

The DB Properties pane displays information about the source and destination databases configured for the project.

## Command Line Interface (CLI) Mode

The primary reason for using the CLI mode is to perform a fast "run" step. The "run" step, which takes the most time during the migration, creates the converted schema in the "Reconcile" step and migrates the data from the source database into the target database. Performing the "run" step in the CLI mode on the server where the database is installed, can increase the data transfer speed by reducing the communication cost compared to executing the "run" step in the GUI mode on the client computer.

Users can take advantage of both the convenience of GUI mode and the fast performance of CLI mode when you execute only the "Run" and "Validate" steps are performed in CLI mode after executing from "Start" to "Reconcile" in GUI mode

Another reason to use in CLI mode is to perform the migration in an environment where GUI mode is not allowed. Although the entire migration process can be performed in CLI mode, it also has limitations of character-based interface. For example, user is allowed to perform "Reconcile" step only with the default value in CLI mode.

## Tools

This section introduces how to use two types of utilities included in the Migration Center

### PSM Converter for File

"PSM Converter for File" converts Oracle PL/SQL to Altibase PSM in independent file units. This tool reads a SQL file that contains Oracle PL/SQL statements, converts it into Altibase PSM, and then writes the results in a predefined SQL file. This file is provided with an HTMLformatted report file. This tool's functionality is equivalent to the PSM Converter in the Reconcile step. For more detailed information about conversion rules, please refer to PSM Converter Rule List.

To execute this tool, select "PSM Converter for File" from "Tools" in the main menu.

### Generate Migration Error Report

"Generate Migration Error Report" reports problems that arise in Migration Center. If a project is opened, and this tool is executed, it collects problem tracking information (namely, log files and revision number information) and creates it as a zip file. The user only needs to attach the zip file to an email and send it to Altibase's Customer Support with the user's client registration information.

To execute this tool, select "Generate Migration Error Report" from "Tools" in the main menu.

## 3. GUI Mode Quick Guide

---

This chapter provides a quick step guide for users new to Migration Center.

### Quick Step Guide for GUI User

The users can easily perform migration in GUI mode with this quick step guide. The overall process is listed below.

1. Start Migration Center
2. Prepare the project
  1. Register source and destination database connections
  2. Create a project
  3. Open the project
  4. Connect to source and destination databases



5. Set migration options
3. Build the project
4. Reconcile the project
5. Run the project
6. Validate the project

## Starting Migration Center

Double-click the “migcenter.bat” icon in the Migration Center folder on Microsoft Windows. Execute “migcenter.sh” on Unix-like operating systems. To use Migration Center on any environment other than a 64-bit version of Windows, please check that Java Runtime Environment (JRE) is installed, and that the PATH environment variable is set appropriately so that the JRE can be accessed from the terminal.

## Registering a Database Connection

1. From the “Database” menu, select the “Add Database Connection” submenu, or click the “Add Database Connection” icon in the main toolbar.
2. Fill in all the input fields of the “Add Database Connection” dialog box:
  1. DB Product: The database system name
  2. Connection Name: A unique database connection name to be used for Migration Center projects
  3. IP: The Internet Protocol (IP) address of the database server
  4. Port: The port number of the database server or SSL port number of the Altibase server
  5. User: The valid user ID for the database
  6. Password: The password corresponding to the user ID for the database.
  7. JDBC Driver: The JDBC driver path to be used to connect to the database.
  8. Encoding: The default character set used on the client.
  9. IP Version: The IP protocol version used in this connection.
  10. Property: The JDBC driver property to be used in this connection.  
If connecting with SSL, set `ssl_enable = true` as shown below, and \* `path_to_keystore`, `path_to_truststore`, and `password *` are set according to each authentication environment.

```
ssl_enable=true&keystore_url=path_to_keystore&keystore_password=password&truststore_
url=path_to_truststore&truststore_password=password
```

3. Click the “Test” button at the bottom of the dialog box to check the input information before adding this connection to the connection list.
4. If the connection test is successful, click the “OK” button at the bottom of the dialog box to add the connection to the connection list. Then, close the “Add Database Connection” dialog box.

## Creating the Project

1. From the "Project" menu, select the "Create Project" submenu, or click the "Create Project" icon in the main toolbar.
2. Fill in the input fields in the "New Project" dialog box:
  1. Project Name: A migration project name that is unique in Migration Center and meaningful to the user.
  2. Project Path: The folder path where migration project files will be stored. This value cannot be edited by users.
  3. Source Database: A database that contains database objects to be migrated in this project.
  4. Destination Database: An Altibase database to copy database objects from the source database and store them. This input field is mandatory, even if the project is configured for "DB to File" migration.
3. Click the "OK" button at the bottom of the "New Project" dialog box.

## Opening the Project

To open a project, select the "Open Project" submenu from the "Project" menu. A file "Open" dialog box appears. The user only needs to choose a project folder and click the "Open" button.

## Configuring the Project

The user can configure the project's basic strategy prior to setting project details. For further information, please refer to Migration Options.

## Connecting to Source and Destination Databases

Establishing connections with the source and destination databases is essential to proceed to the Build step. To connect the databases for the project, select the "Connect" submenu from the "Project" menu, or right-click the open project and click "Connect."

## Building the Project

The Build step is indispensable to migration, yet simple to execute.

1. Click "Build User" or "Build Table" from the "Migration" menu or the main toolbar.
2. A dialog box asking how to fetch records from each table in the source database appears. Select the desired method and click "OK". For further information about the available options and explanations thereof, refer to Internal Activities.
3. If "Build Table" has been selected, a dialog box shows up to list the names of migration target tables. When clicking the "+" button, you can choose migration target tables with name search. After completing configuring the table list, click the "Build" button to proceed with the build step.
4. A "Build" dialog box displaying the build progress appears. At completion, a "Report" button appears at the bottom.

5. If you click “Report”, an HTML report file is created in the project directory and the “Build Report” dialog box appears. This dialog box provides a link to the HTML report file. Once the “Report” button is clicked and an HTML report file is created, the “Build Report” submenu from the “Report” menu is activated. The user can open the “Build Report” dialog box at any time with this menu item.

## Reconciling the Project

The Reconcile step is very important because it determines how to execute the Run step, and it requires some knowledge of both source and destination databases. For further information about this step, please refer to Migration Center Internals. The following is a simple guide:

1. From the “Migration” menu, select “Reconcile”, or click the “Reconcile” icon in the main toolbar.
2. Change or confirm the default data type mapping.
3. Specify the Altibase tablespaces to which the source database is to be migrated.
4. Change or confirm how to migrate partitioned tables in the source database to Altibase.
5. Specify the Altibase tablespace to which each table or index in the source database is to be migrated.
6. Check the SELECT statement for fetching data from each table of the source database, and make changes if necessary.
7. Check whether the DDL SQL statements to be used during the schema migration process is correct, and make changes if necessary.
8. Click the “Report” button to generate a report for this step.

## Running the Project

The Run step can be as easily executed as the Build step, but is irreversible. Please check all settings before proceeding any further.

1. From the “Migration” menu, select the “Run” submenu, or click the “Run” icon in the main toolbar.
2. Click “OK” in the warning dialog box to confirm that every configuration is correct.
3. Review the progress and final report closely.

## Validating the Project

The Data Validation step checks whether data migration was properly performed in the Run step.

1. From the “Migration” menu, select the “Data Validation” submenu.
2. Click “OK” in the warning dialog box to confirm that every configuration is correct. The “Data Validation” dialog box appears and the Data Validation step is executed.
3. At completion, a “Report” button appears at the bottom.
4. If you click “Report”, an HTML report file is created in the project directory and the “Data Validation Report” dialog box appears. This dialog box provides a link to the HTML report file. Once the “Report” button is clicked and an HTML report file is created, the “Data Validation Report” submenu from the “Report” menu is activated and the user can open the “Data Validation Report” dialog box at any time with this submenu.

5. If there is a difference between the data of the source and destination databases in the report, the user can synchronize the data with the filesync feature.

The following is a simple guide for using filesync.

1. From the “Migration” menu, select the “Migration Options” submenu.
2. Click “OK” in the warning dialog box.
3. Select “FILESYNC” in the “Operation” combo box from the “Data Validation Options” submenu, and click “OK”.
4. From the “Migration” menu, select the “Reconcile” submenu, or click the “Reconcile” icon in the main toolbar.
5. Select “Table Mode” in the dialog box that appears.
6. Select the table to perform data synchronization on.
7. Click “Next” until the Reconcile step completes.
8. From the “Migration” menu, select the “Data Validation” submenu.
9. The “Data Validation” dialog box appears and filesync is executed. At completion, a “Report” button appears at the bottom.
10. Check that data difference has been solved in the report.

## 4. CLI Mode Quick Guide

---

This chapter provides a quick step guide for CLI mode users who are new to Migration Center.

### Quick Step Guide for CLI User

The user can easily perform migration in CLI mode with this quick step guide. The overall process is listed below.

1. Prepare the project
  1. Register database connection information and project
  2. Set migration options
2. Build the project
3. Reconcile the project
4. Run the project
5. Validate the project

### Prepare the Project

The source/ destination database connection information and project registration are essential to perform migration. It is possible to register the project in CLI mode, but it is recommended to register in user-friendly in GUI mode.

To register the database connection information and projects in CLI mode, you must explicitly register it in Migration Center after modifying the registration file(register.xml). What you need to input in the registration file is the project name and the source / destination database connection information to be used in the project. Multiple projects can be registered at once.

The registration file must be located in the directory where the Migration Center is installed. Please refer to the comments and samples in the "register.xml" file for more details.

### Register database connection information and project

```
% ./migcenter.sh register register.xml
```

The source / destination database connection information and the project recorded in the registration file (register.xml) is to be registered in the Migration Center. The input project name should be unique, and the database connection information should be able to connect to the target database before registrations. When the project is successfully registered, the project name folder is automatically created and source/ destination database connect information is stored in Migration Center.

If either the project recorded in the registration file or the registration of the database connection information fails, all project and database connection registration recorded in the registration file are canceled.

The user can use a name other than "register.xml" as the name of the registration file.

### Set Migration Options

The "options.xml" file is automatically created in the project folder when the project is registered. You can modify the options in the options.xml file directly in CLI mode. For details of the options, refer to the "Appendix A: Migration Options".

### Build the Project

```
% ./migcenter.sh build project_path
```

To perform the "Build" step, input the build command and the path of the target project. The number of table records in the source database is collected using the Approximate Counting Method by default.

### Reconcile the Project

```
% ./migcenter.sh reconcile project_path
```

To perform the "Reconcile" step, input the reconcile command and the path of the target project. In CLI mode, user is not allowed to tune the "Reconcile" step due to the limit of character-based interface.

## Run the Project

```
% ./migcenter.sh run project_path
```

To perform the "Run" step, input the run command and the path of the target project.

## Validate the Project

```
% ./migcenter.sh diff project_path
```

To verify the data migrated properly in the "Run" step, input the diff command and the path of the target project.

```
% ./migcenter.sh filesync project_path
```

To match the different data between the source and destination databases using the diff command, input filesync command and the path of the target project.

# 5. Migration Center Internals

---

This chapter describes the main steps of Migration Center, namely the Build, Reconcile, Run, and Data Validation steps. This chapter consists of the following sections:

- Build Step
- Reconcile Step
- Run Step
- Data Validation Step

## Build Step

### Purpose

The Build step not only collects information about database objects from the source and destination databases, but also provides a build report to make migration easier for the user. The report lists migratable database objects in the source and destination databases with byte size information. This informs the user of the scale of the migration project, and helps the user to estimate the necessary data volume and time.

The information gathered in this step is used throughout the entire migration process and must reflect the current status of the source and destination databases. If changes are made to the database objects in the source database after the Build step, all steps must be re-executed.

## Output

- Build reports

Several data volume analysis reports based on the current status of the source and destination databases are output in HTML format and stored in the project folder.

- SQL Data Definition Language (DDL) script

A file containing database object creation statements (DDLs) collected from the source database, whether or not Migration Center is supported, created in the project folder and named SrcDbObj\_Create.sql. This file is intended for user reference only and is not used at any stage of the Migration Center.

- BuildReport4Unsupported.html

It is one of the files summarizing the build results and shows the CREATE statements of objects not automatically migrated by the Migration Center. Objects that are not supported by Migration Center must be manually converted by the user, and this file can be referenced for conversion operations.

Non-automatic migration object types depend on the source database and can be found at [Appendix B: Migratable Database Objects](#). In case of Oracle to Altibase migration, this file is not created because all of Oracle database object types defined in the appendix table are supported for automatic migration. On the other hand, in case of MySQL to Altibase migration, if the source database has any database object type such as stored procedures, stored functions, views, and trigger objects, the CREATE statement of the unsupported database object is recorded at this file for user's reference.

## Internal Activities

This step consists of two internal activities; collecting information about database objects from both databases, and generating a Build report based on that information.

The collecting information can be started as either "Build User" or "Build Table".

- Build User: Collects all migratable object information of the user connected to the source database
- Build Table: Configure a list of tables to be migrated among the tables of the user connected to the source database. And collects object information of the selected tables, and constraints and indexes dependent on the selected tables

For more information on the object types that can be migrated, refer to the "Appendix B: Migratable Database Objects".

When the user starts the build step, the "Table Counting Method" dialog box appears. The user can choose one of the following options:

- Approximate Counting Method: Retrieves the number of table records by referring to the statistical value of the source database. This value is affected by the accuracy of the statistical value
- Exact Counting Method: Retrieves the exact number of table records by executing the COUNT function on every table in the source database

Of the two methods, the approximate counting method performs faster whereas, the exact counting method yields more accurate results.

The method chosen does not affect the database schema and data migration. It only affects the accuracy of the data migration progress percentage provided at the Run step in GUI mode. This is because the data migration progress is displayed as the time elapsed and the percentage of (number of migrated records / total number of records). With this, the user can estimate the total amount of time required to complete data migration.

For more detailed information about how to execute the Build step, please refer to Building the Project.

## Reconcile Step

### Purpose

The Reconcile step builds a migration plan. Migration Center users should have a plan on how to migrate the database objects of each database. Migration Center cannot migrate all database objects to Altibase databases. However, it makes migration easier by allowing users full control over migration.

Altibase offers high performance of an in-memory database and high capacity of on-disk database in a single database. Altibase generally stores frequently used and low-latency data in memory tablespaces, and the rest of the data in disk tablespaces.

For more detailed information about tablespaces in Altibase databases, please refer to the *Administrator's Manual*.

### Output

- Reconcile reports: Several reports that specify which database objects to migrate and how to migrate them in the project folder.
- SQL Data Definition Language (DDL) scripts: Sample SQL files to create and drop database objects in the destination database are provided in the project folder for user convenience. However, these files are not used in any step.
  - DbObj\_Create.sql: A SQL script file for creating database objects to be migrated.
  - DbObj\_Drop.sql: A SQL script file for dropping database objects having the same names as those to be migrated.
  - DbObj\_Unsupported.sql: A SQL script file for creating unsupported database objects.
- PL/SQL conversion reports: Several reports generated by the PL/SQL Converter.
  - sqlconv.html: A HTML report that compares the difference between source and converted PL/SQL.
  - sqlconv\_src.sql: A report that contains the input PL/SQL statements to be converted in text format.
  - sqlconv\_dest.sql: A report that contains converted PL/SQL statements and comments listing the applied conversion rules in text format.



## Internal Activities

Although the Reconcile step is very important and can get complicated, the wizard is as easy to use as a UI. For further information about how to start the Reconcile step, please refer to Reconciling the Project in Chapter 3.

### Reconcile Wizard Dialog Box

Users can check and modify the default settings in wizard dialog box. The wizard guides the user step by step, but the user can also go to any step by selecting it in the left pane.

#### "Data Type Mapping" Step

The "Data Type Mapping" step maps data types between heterogeneous databases. Please note that small differences between data types can cause unexpected data loss and truncation during data migration. For more detailed information, please refer to Data Type Mapping in Appendix C.

#### "PSM Data Type Mapping" Step

The "PSM Data Type Mapping" step maps PSM data types between heterogeneous databases. This step is only activated for Oracle to Altibase PSM Migration or TimesTen to Altibase PSM Migration. All configurations specified in this step are reflected to target DDL in the "SQL Editing" step later on.

#### "Tablespace to Tablespace Mapping" Step

The "Tablespace to Tablespace Mapping" step maps tablespaces between the source and destination databases. When tablespace mapping is set, contents of the tablespace are also mapped to the selected tablespace. This step creates a default tablespace map, and this map can be altered with the "Object to Tablespace Mapping" submenu.

#### "Object to Tablespace Mapping" Step

The "Object to Tablespace Mapping" step maps each table and index by dragging and dropping them to tablespaces in the destination tablespace. Whenever a map changes, the necessary total storage sizes for tablespaces in the destination database are recalculated. Internally, a database object size is accurately retained in bytes, but is rounded to megabytes in the dialog box. Therefore, the total size of a tablespace may not be equivalent to the sum of its contents.

#### "Select Editing" Step

The "Select Editing" step enables the user to edit the SELECT statement for fetching data from a table in the source database. The user can add hints or WHERE clauses, and immediately check the edited statement. Click the "Restore" button to undo changes.

#### "Unacceptable Name" Step

The "Unacceptable Name" step shows objects that violate the unquoted object name rules in the target database. This includes objects with special characters or spaces in the name, and creation fails during the run phase. If the user selects the "Use Double-quoted Identifier" check box, the user can avoid creating objects by wrapping only the problem names in double quotes."

## “SQL Editing” Step

The “SQL Editing” step allows the user to view and edit the DDL statements for schema migration. The user can refer to the source DDL, and directly edit the DDL statements that Migration Center will apply on the destination database. SQL statements for creating procedures, functions, triggers, and views are all displayed in PSM type. Tick the check box to select which object type within the PSM category to edit. These objects are displayed in the “Done” or “To-Do” list pane. If an object requires user confirmation, it is displayed in the todo list; otherwise, it is displayed in the done list. Click an object name in a list to view its source and destination DDL. Edit the DDL statement of an object belonging to the to-do list, then click the “Save” button, and the object will move to the done list. The migration of an object in the done list can unexpectedly fail in the Run step. In this case, the user must check the “Missing Cause” in the Run report, find the error cause, and manually migrate the object. DDL statements of PSM objects can be output as a file for users who prefer text editors. This functionality and instructions on its use are provided in the offline pane of the PSM object type. For Oracle or TimesTen to Altibase migration, the PL/SQL Converter converts the DDL statement of the PSM type object to an Altibase-compatible format. Please note that although most of the syntax is converted, statements containing semantic logic are not converted.

Note: Migration Center generates a dependency graph between objects in the source and destination databases in the Build step. If the user changes this dependency while editing destination DDL statements, migration cannot be guaranteed for the object and related objects.

## Run Step

### Purpose

The Run step copies database objects in the source database to the destination database or external files, depending on migration options.

After the Run step is complete, Run reports that contain results of this step are generated. These results may be the most important to the user. The RunReport4Summary.html report file outputs the overall result by comparing the number of database objects and table records in the source and destination databases. The RunReport4Missing.html report file outputs in detail any failure.

Data that failed to be migrated is collected in the “db2db” or “db2file” folder in the project folder. These two folders store data files and form files available for use with iLoader (the command-line data import/export tool for Altibase databases), and also scripts to easily import the generated data files to the database with iLoader. “iLoaderIn.sh” is the main script that executes the “iLoaderIn.number.sh” script which runs iLoader on other script files and tables.

### Output

- RunReport4Summary.html: A summary report file that outputs the overall result of migration.
- RunReport4Missing.html: A missing report file that outputs information about data that failed to be migrated, and the error cause.
- DbObj\_Failed.sql: A file that outputs a list of failed SQL statements and the error cause.
- The db2db folder: A subfolder in the project directory, where data that failed to be migrated is saved. This folder is only available if the “DB to DB” option is selected for “Migration Type” and “No” is selected for “Batch Execution.”

- The db2file folder: A subfolder in the project directory, where all output is saved if the “DB to File” option is selected for “Migration Type”.

## Internal Activities

The user can execute the Run step with a single mouse click in GUI mode, or a single command in CLI mode. For further information, please refer to Running the Project or Executing the Run and Data Validation Steps in CLI Mode.

Internally, this process consists of three steps to avoid database object dependencies: the PreSchema, Table & Data, and PostSchema steps. For example, index objects are migrated in the PostSchema step, after the Table & Data step is completed. This is because it is usually faster to insert data without an index, than with an index. Each step performs the following:

1. PreSchema: Migrates sequence objects
2. Table & Data: Migrates table objects and data
3. PostSchema:
  1. Queue: Migrates queue objects
  2. Constraints: Migrates constraints, namely unique, primary key, foreign key, and check constraints
  3. Index: Migrates index objects
  4. Synonym: Migrates private synonym objects
  5. Procedures, functions, materialized views, views, typesets and triggers: Depends on the database management system and its version

## Data Validation Step

### Purpose

The Data Validation step checks whether data migration was properly performed in the Run step. At completion, the user is provided with a Data Validation report for post processing. This report offers information about the source and destination databases, a list of successfully validated tables, and the number of occurrences of data accordance and difference.

The user can decide whether to re-execute the Run step or use filesync. The user is recommended to use filesync when the occurrence of data difference is low, but re-execute the Run step when the occurrence of data difference is high.

### Restrictions

- The Data Validation step can only be performed on a table with a primary key constraint.
- LOB columns are excluded as targets for data comparison.

## Output

- **Data Validation report:** A report containing a summary with information, namely the list of validated tables and the occurrences of data accordance and difference is output to the project directory.
- **Validation directory:** A subdirectory in the project directory that stores different data. This directory is valid only if “YES” is selected for the “Write to CSV” option in the “Data Validation Options” submenu.

## Internal Activities

The Data Validation step can be executed with a single click in GUI mode, or a single command in CLI mode. For further information, please refer to [Validating the Project](#) or [Executing the Run and Data Validation Steps in CLI Mode](#).

Internally, the Data Validation step is executed as below.

The data to be validated is fetched from the source and destination databases and compared. If a difference in data is detected and “Write to CSV” in the “Data Validation Options” submenu is set to “Yes”, the different data is stored in CSV format files in the validation folder. Regardless of the option, summary information is always output to the Data Validation report.

# Appendix A: Migration Options

Migration Options affect the migration project. They can be edited by selecting the “Migration Option” menu item from the Migration menu in GUI mode. Migration Options can usually be edited right after the project is created.

The primary option is the Migration Type: either “DB to DB” or “DB to File”.

- DB to DB Migration Options
- DB to File Migration Options

## DB to DB Migration Options

Object and table data of the source database to be migrated are migrated directly to the database (Altibase) to be stored.

Name	Description
Execution Thread	Specifies the maximum number of threads to be used when executing data migration. The default value is triple of the number of logical processors in the system running the Migration Center. The suggested range of this value is from 1 to triple of the number of logical processors in the system running the Migration Center.

Name	Description
Migration Target	Specifies the targets for migration: - Object & Data: Database objects and table data - Object: Database objects only
<b>Object Options</b>	
Foreign Key Migration	Specifies whether or not to include foreign key constraints in migration target. This option is set to 'No' by default.
PSM Migration	Specifies whether or not to include PSM objects such as procedures, functions, materialized views, views, typesets, and triggers in migration target. This option is set to 'No' by default.
Drop Existing Objects	Specifies whether or not to recreate the database object before migration. When this option is set to 'Yes', DROP and CREATE will be executed on migration target objects in target database. When this option is set to 'No', migration will be executed without dropping the database objects. This option is set to 'No' by default.
Keep Partition Table	Specifies whether or not to maintain partitioned tables. When this option is set to 'Yes', partitioned tables in the the source database will be migrated as partitioned tables. In this case, additional work is required for the partitioned tables in the reconcile stage's '5. Partitioned Table Conversion'. When this option is set to 'No', target partitioned tables will be migrated as non-partitioned tables. This option is set to 'No' by default.
Use Double-quoted Identifier	Specifies whether or not to use double quotation marks for schema and object names. This option is set to 'No' by default.
Remove FORCE from View DDL	Specifies whether or not to remove 'FORCE' keyword from the statement creating a view.
Postfix for reserved word	Specifies a user-defined word which is to be added to the database object name in the source database as a postfix when it conflicts with a reserved keyword of Altibase. The default value is _POC.
<b>Data Options</b>	
Batch Execution	Specifies whether or not to use batch insert in JDBC for higher performance. This option is set to 'Yes' by default.
Batch Size	Specifies the batch size when batch insert in JDBC is used. The default value is 10,000.

Name	Description
Batch LOB type	Specifies whether or not to batch process BLOB and CLOB data types. 'Yes' means to allow batch processing. However, it should be noted that problems such as out of memory (OOM) may occur depending on the size of the LOB data. Also, an exception may be raised in TimesTen, which does not support the batch processing for LOB data types. 'No' does not allow batch processing. This option is set to 'No' by default.
Log Insert-failed Data	Specifies whether or not to log insert-failed rows during data migration. This option is available only when the Batch Execution option is disabled. This option is set to 'No' by default.
File Encoding	Specifies the encoding character set to be used when logging the insert-failed data into files. This option is available only when the Log Insert-failed Data option is enabled. The default value is UTF8.
<b>Data Validation Options</b>	
Operation	Specifies the operation to be executed in the data validation stage: DIFF: Check data difference between the source and the target databases. FILESYNC: Apply the CSV file created as a result of DIFF operation to the target database.
Write to CSV	Specifies whether or not to write the inconsistent data to the CSV file.
Include LOB	Specifies whether or not to include LOB data when writing inconsistent data to the CSV file.
Data Sampling	Specifies whether or not to use data sampling feature. When this option is set to 'Yes', to decrease the data validation time, only sample data will be validated. When this option is set to 'No', each data will be validated. This option is set to 'Yes' by default.
Percent Sampling (exact counting)	Specifies the percentage of data to be sampled from target tables. This option is used only when the Exact Counting Method is selected in the build stage.
Record Count Sampling (approximate counting)	Specifies the number of records to be sampled from target tables. This option is used only if the Approximate Counting Method is selected in the build stage.

## DB to File Migration Options

Object and table data of the source database to be migrated are stored as SQL script file, form file, and CSV type data file, respectively.

The stored files can be migrated to the database (Altibase) to be saved using iSQL and iLoader.

Name	Description
Execution Thread	Specifies the maximum number of multi thread to be used when executing data migration. Default value is triple of the amount logical processors in the system running the Migration Center. The suggested range of this value is from 1 to triple of the amount logical processors in the system running the Migration Center.
Migration Target	Specifies the targets for data migration: - Object & Data: Database objects and table data - Object: Database objects only
<b>Object Options</b>	
Foreign Key Migration	Specifies whether or not to include foreign key constraints in migration target. This option is set to 'No' by default.
PSM Migration	Specifies whether or not to include PSM objects such as procedures, functions, materialized views, views, typesets, and triggers. This option is set to 'Yes' by default.
Keep Partition Table	Specifies whether or not to maintain partitioned tables. When this option is set to 'Yes', partitioned tables in the the source database will be migrated as partitioned tables. In this case, additional work is required for the partitioned tables in the reconcile stage's '5. Partitioned Table Conversion'. When this option is set to 'No', target partitioned tables will be migrated as non-partitioned tables. This option is set to 'No' by default.
Use Double-quoted Identifier	Specifies whether or not to use double quotation marks for schema and object names. This option is set to 'No' by default.
<b>Data Files</b>	
File Encoding	Specifies the encoding character set to be used for scripts and data files.

## Appendix B: Migratable Database Objects

This section will provide guidelines and explanation in regards to the migratable database objects depending on the "build" step.

Objects in the source database that Migration Center does not migrate automatically must be converted manually by the user. Starting with Migration Center 7.11, the CREATE statement of an object is written to the two files below in the Build phase, so users can refer to these files for conversion.

- SrcDbObj\_Create.sql
- BuildReport4Unsupported.html

## Altibase to Altibase

Database Object Type	Migratable in 'Build User'	Migratable in 'Build Table'	Remarks
Table	O	O	The comments specified in the bales and columns are migrated as well.
Primary Key Constraint	O	O	
Unique Constraint	O	O	
Check Constraint	O	O	
Foreign Key Constraint	O	O	
Index	O	O	
Sequence	O	X	
Queue	O	X	
Private Synonym	Partly yes	X	Synonyms that refer to objects in other schemas are also migrated
Procedure	Partly yes	X	The original DDL is performed without any additional conversion.
Function	Partly yes	X	The original DDL is performed without any additional conversion.
Package	Partly yes	X	The original DDL is performed without any additional conversion.
View	Partly yes	X	The original DDL is performed without any additional conversion.



Database Object Type	Migratable in 'Build User'	Migratable in 'Build Table'	Remarks
Materialized View	Partly yes	X	The original DDL is performed without any additional conversion.
Trigger	Partly yes	X	The original DDL is performed without any additional conversion.

## Altibase to Oracle

Database Object Type	Migratable in 'Build User'	Migratable in 'Build Table'	Remarks
Table	O	O	
Primary Key Constraint	O	O	
Unique Constraint	O	O	
Check Constraint	O	O	
Foreign Key Constraint	O	O	
Index	O	O	
Sequence	O	X	
Queue	X	X	It is automatically excluded since from the build phase since there are no convertible objects
Private Synonym	Partly Yes	X	Synonyms that refer to objects in other schemas are also migrated.
Procedure	Partly Yes	X	The original DDL is performed without any additional conversion.
Function	Partly Yes	X	The original DDL is performed without any additional conversion.
Package	Partly Yes	X	The original DDL is performed without any additional conversion.
View	Partly Yes	X	The original DDL is performed without any additional conversion.

Database Object Type	Migratable in 'Build User'	Migratable in 'Build Table'	Remarks
Materialized View	Partly Yes	X	The original DDL is performed without any additional conversion. Note that the primary key must exist in the base table for migration
Trigger	Partly Yes	X	The original DDL is performed without any additional conversion.

## CUBRID to Altibase

Database Object Type	Migratable in 'Build User'	Migratable in 'Build Table'	Remarks
Table	O	O	The comments specified in tables and columns are migrated as well
Primary Key Constraint	O	O	
Unique Constraint	O	O	
Foreign Key Constraint	O	O	
Index	O	O	Reverse index and prefix length index of CUBRID are not supported in Altibase. Since the reverse index takes a method of reversely inserting key values when creating an index, it is not supported by Altibase migration whereas prefix length index takes a method of partially indexing specific key values and so, it is converted as a general index in Altibase when migrating.
auto_increment Column Attribute	O	O	it is migrated to the sequence.
Serial	O	X	It is migrated to the sequence.

Database Object Type	Migratable in 'Build User'	Migratable in 'Build Table'	Remarks
Procedure	X	X	In the build phase, the object creation statements collected from the source database are recorded in the SrcDbObj_Create.sql and BuildReport4Unsupported.html files.
Function	X	X	In the build phase, the object creation statements collected from the source database are recorded in the SrcDbObj_Create.sql and BuildReport4Unsupported.html files.
View	X	X	In the build phase, the object creation statements collected from the source database are recorded in the SrcDbObj_Create.sql and BuildReport4Unsupported.html files.
Trigger	X	X	In the build phase, the object creation statements collected from the source database are recorded in the SrcDbObj_Create.sql and BuildReport4Unsupported.html files.

## Informix to Altibase

Database Object Type	Migratable in 'Build User'	Migratable in 'Build Table'	Remarks
Table	O	O	The comments specified in tables and columns are migrated as well.
Primary Key Constraint	O	O	
Unique Constraint	O	O	
Check Constraint	O	O	

Database Object Type	Migratable in 'Build User'	Migratable in 'Build Table'	Remarks
Foreign Key Constraint	O	O	
Index	O	O	
Serial Column Type	O	O	It is migrated to the sequence.
Sequence	O	X	
Private Synonym	Partly yes	X	Only synonyms that refer to objects in the same schema are migrated.
Procedure	X	X	In the build phase, the object creation statements collected from the source database are recorded in the SrcDbObj_Create.sql and BuildReport4Unsupported.html files.
Function	X	X	In the build phase, the object creation statements collected from the source database are recorded in the SrcDbObj_Create.sql and BuildReport4Unsupported.html files.
View	X	X	In the build phase, the object creation statements collected from the source database are recorded in the SrcDbObj_Create.sql and BuildReport4Unsupported.html files.
Trigger	X	X	In the build phase, the object creation statements collected from the source database are recorded in the SrcDbObj_Create.sql and BuildReport4Unsupported.html files.

## MySQL to Altibase

Database Object Type	Migratable in 'Build User'	Migratable in 'Build Table'	Remarks
Table	O	O	The comments specified in tables and columns are migrated as well.
Primary Key Constraint	O	O	

Database Object Type	Migratable in 'Build User'	Migratable in 'Build Table'	Remarks
Unique Constraint	O	O	
Check Constraint	O	O	
Foreign Key Constraint	O	O	
Index	O	O	
auto_increment Column Attribute	O	O	It is migrated to the sequence.
Procedure	X	X	In the build phase, the object creation statements collected from the source database are recorded in the SrcDbObj_Create.sql and BuildReport4Unsupported.html files.
Function	X	X	In the build phase, the object creation statements collected from the source database are recorded in the SrcDbObj_Create.sql and BuildReport4Unsupported.html files.
View	X	X	In the build phase, the object creation statements collected from the source database are recorded in the SrcDbObj_Create.sql and BuildReport4Unsupported.html files.
Trigger	X	X	In the build phase, the object creation statements collected from the source database are recorded in the SrcDbObj_Create.sql and BuildReport4Unsupported.html files.

## Oracle to Altibase

Database Object Type	Migratable in 'Build User'	Migratable in 'Build Table'	Remarks
----------------------	----------------------------	-----------------------------	---------

Database Object Type	Migratable in 'Build User'	Migratable in 'Build Table'	Remarks
Table	O	O	To migrate a temporary table from an Oracle database (source database) to Altibase(destination database), a volatile tablespace is required in Altibase. This is because an Altibase temporary table can only be created in a volatile tablespace. Also, the comments specified in tables and columns are migrated as well.
Primary Key Constraint	O	O	
Unique Constraint	O	O	
Check Constraint	O	O	
Foreign Key Constraint	O	O	
Index	O	O	
Sequence	O	X	
Private Synonym	Partly yes	X	Only synonyms that refer to objects in the same schema are migrated.
Procedure	Partly yes	X	Converts object creation statements according to the rules defined in the PSM converter and attempts migration.
Function	Partly yes	X	Converts object creation statements according to the rules defined in the PSM converter and attempts migration.
Package	Partly yes	X	Converts object creation statements according to the rules defined in the PSM converter and attempts migration.
View	Partly yes	X	Converts object creation statements according to the rules defined in the PSM converter and attempts migration.
Materialized View	Partly yes	X	Converts object creation statements according to the rules defined in the PSM converter and attempts migration.

Database Object Type	Migratable in 'Build User'	Migratable in 'Build Table'	Remarks
Trigger	Partly yes	X	Converts object creation statements according to the rules defined in the PSM converter and attempts migration.

## SQL Server to Altibase

Database Object Type	Migratable in 'Build User'	Migratable in 'Build Table'	Remarks
Table	O	O	The comments specified in tables and columns are migrated as well.
Primary Key Constraint	O	O	
Unique Constraint	O	O	
Check Constraint	O	O	
Foreign Key Constraint	O	O	
Index	O	O	
Identity Column Attribute	O	O	It is migrated to the sequence
Sequence	O	X	SQL Server 2012 Support
Private Synonym	Partly yes	X	Only synonyms that refer to objects in the same schema are migrated.
Procedure	X	X	In the build phase, the object creation statements collected from the source database are recorded in the SrcDbObj_Create.sql and BuildReport4Unsupported.html files.

Database Object Type	Migratable in 'Build User'	Migratable in 'Build Table'	Remarks
Function	X	X	In the build phase, the object creation statements collected from the source database are recorded in the SrcDbObj_Create.sql and BuildReport4Unsupported.html files.
View	X	X	In the build phase, the object creation statements collected from the source database are recorded in the SrcDbObj_Create.sql and BuildReport4Unsupported.html files.
Trigger	X	X	In the build phase, the object creation statements collected from the source database are recorded in the SrcDbObj_Create.sql and BuildReport4Unsupported.html files.

## TimesTen to Altibase

Database Object Type	Migratable in 'Build User'	Migratable in 'Build Table'	Remarks
Table	O	O	To migrate a temporary table from an TimesTen database (source database) to Altibase(destination database), a volatile tablespace is required in Altibase. This is because an Altibase temporary table can only be created in a volatile tablespace. Also, the comments specified in tables and columns are migrated as well.
Primary Key Constraint	O	O	
Unique Constraint	O	O	
Foreign Key Constraint	O	O	



Database Object Type	Migratable in 'Build User'	Migratable in 'Build Table'	Remarks
Index	O	O	The index ordering(ASC/DESC) or size of TimesTen(the original database) is not provided. Thus, the index ordering is set as the default value(ASC), and the size is not displayed when migrating. Among the three indexes(hash, range, bitmap) provided by Times ten, the hash•range index is converted into B-tree index of Altibase and the bitmap index is skipped when migrating. Furthermore, if the indexed column has unique constraints or is the primary key, the target index migration fails since Altibase does not allow creating an index on those constrained column(s).
Sequence	O	X	
Private Synonym	Partly yes	X	Only synonyms that refer to objects in the same schema are migrated.
Procedure	Partly yes	X	TimesTen 11.2 support
Function	Partly yes	X	TimesTen 11.2 support
Package	Partly yes	X	TimesTen 11.2 support
View	Partly yes	X	TimesTen 11.2 support
Materialized View	Partly yes	X	TimesTen 11.2 support
Trigger	Partly yes	X	TimesTen 11.2 support

## Tibero to Altibase

Database Object Type	Migratable in 'Build User'	Migratable in 'Build Table'	Remarks
----------------------	----------------------------	-----------------------------	---------

Database Object Type	Migratable in 'Build User'	Migratable in 'Build Table'	Remarks
Table	O	O	To migrate a temporary table from an Tibero database (source database) to Altibase(destination database), a volatile tablespace is required in Altibase. This is because an Altibase temporary table can only be created in a volatile tablespace. Also, the comments specified in tables and columns are migrated as well.
Primary Key Constraint	O	O	
Unique Constraint	O	O	
Check Constraint	O	O	
Foreign Key Constraint	O	O	
Index	O	O	Indexes created automatically in Tibero's LOB type column are not supported by Altibase and can not be migrated. A list of nonmigratable indexes that are filtered during the build step can be found in the Missing tab of the Build Report.
Sequence	O	X	
Private Synonym	Partly yes	X	Only synonyms that refer to objects in the same schema are migrated.
Procedure	Partly yes	X	Converts object creation statements according to the rules defined in the PSM converter and attempts migration.
Function	Partly yes	X	Converts object creation statements according to the rules defined in the PSM converter and attempts migration.
Package	Partly yes	X	Converts object creation statements according to the rules defined in the PSM converter and attempts migration.

Database Object Type	Migratable in 'Build User'	Migratable in 'Build Table'	Remarks
View	Partly yes	X	Converts object creation statements according to the rules defined in the PSM converter and attempts migration.
Materialized View	Partly yes	X	Converts object creation statements according to the rules defined in the PSM converter and attempts migration.
Trigger	Partly yes	X	Converts object creation statements according to the rules defined in the PSM converter and attempts migration.

Note: MigrationCenter uses the SQL parser for Oracle provided by Third Party to migrate Tiberio's Procedure, Function, View, Materialized View, and Trigger objects. Therefore, objects created with Tiberio native syntax that is incompatible with Oracle grammar can cause parsing errors during conversion. In this case, the user must manually translate the syntax.

## PostgreSQL to Altibase

The following table describes supported database objects, precautions, and unsupported objects when migrating from PostgreSQL to Altibase.

Database Object Type	Migratable in 'Build User'	Migratable in 'Build Table'	Remarks
Table	O	O	the comments specified in columns are migrated. Since the maximum number of columns that can be created in a table is 1,600 for PostgreSQL, and 1,024 for Altibase, must be careful when performing migration.
Primary Key Constraint	O	O	
Unique Constraint	O	O	
Check Constraint	O	O	

Database Object Type	Migratable in 'Build User'	Migratable in 'Build Table'	Remarks
Foreign Key Constraint	O	O	<p>CASCADE, NO ACTION, and SET NULL options are migrated by using the same options both source and destination databases.</p> <p>When migrating, the RESTRICT option is deleted. This is because the operation of the RESTRICT option is the same as when there is no foreign key option in Altibase.</p> <p>Since the SET DEFAULT option is not supported by Altibase, it is converted to SET NULL during migration.</p>
Index	O	O	<p>Among the various index types of PostgreSQL, only B-tree and R-tree supported by Altibase are subject to migration.</p>
Sequence	O	X	<p>The default maximum value of 9223372036854775807 in the PostgreSQL sequence is coerced to the default maximum value of 9223372036854775806 in the Altibase sequence.</p> <p>If the cache size of the PostgreSQL sequence is 1, Altibase deletes the CACHE clause and creates it with Altibase's default cache size of 20.</p> <p>Sequences explicitly created by the user in 'Build Table' are excluded from the migration target, but sequences that be created for Serial data type of the migration target table column are migrated along with the table.</p>
Function	X	X	<p>Migration is not supported. Record the object creation statements collected from PostgreSQL at the Build stage in the SrcDbObj_Create.sql and BuildReport4Unsupported.html files.</p>
View	X	X	<p>Migration is not supported. Record the object creation statements collected from PostgreSQL at the Build stage in the SrcDbObj_Create.sql and BuildReport4Unsupported.html files.</p>

Database Object Type	Migratable in 'Build User'	Migratable in 'Build Table'	Remarks
Materialized View	X	X	Migration is not supported. Record the object creation statements collected from PostgreSQL at the Build stage in the SrcDbObj_Create.sql and BuildReport4Unsupported.html files.
Trigger	X	X	Migration is not supported. Record the object creation statements collected from PostgreSQL at the Build stage in the SrcDbObj_Create.sql and BuildReport4Unsupported.html files.

Note: PostgreSQL objects not recorded in the above table(e.g., Exclusion constraints, Types, Enums, etc.) are excluded from the migration target because there are no objects corresponding to Altibase.

## Appendix C: Data Type Mapping

Migration Center's policy for mapping data types between heterogeneous databases is to minimize the loss of data. However, the user may wish to customize the way that data is mapped, even if it incurs the loss or corruption of data. To satisfy this requirement, Migration Center also allows the user to edit the data type mapping table.


This chapter explains how to check and customize the default data type mapping table during the project progress of the Migration Center. It also explains the precautions that users need to know in the Migration Center's default data type mapping table.

### Manipulating Data Type Mapping

The user can change the data type mapping table in the reconcile stage as shown below.


#### 1.Reconcile

Right-click in the project tree window and select the Reconcile menu. Or select Reconcile from the Migration menu. You must complete the Build step before you can perform this step.

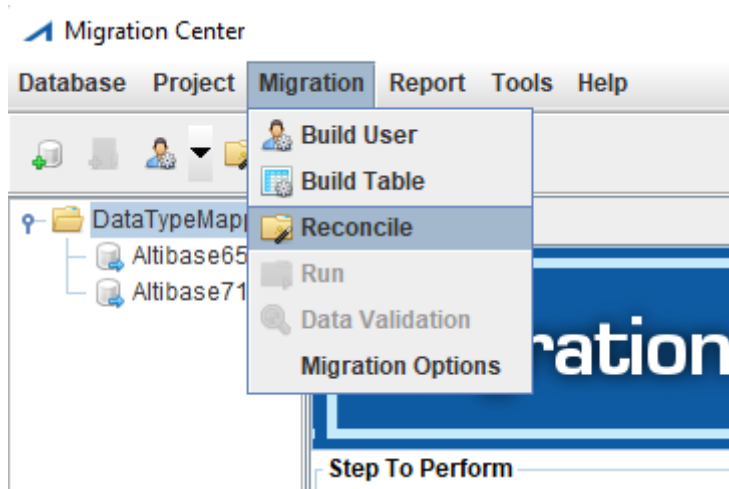

## 2. Data Type Mapping

*Reconcile* menu is clicked, the Reconcile window appears as shown below. In this window, users can view the default data type mapping table of Migration Center and change the data type of the target database in "1. Data Type Mapping". Select the data type you want to change and click the *Change* button at the bottom right.

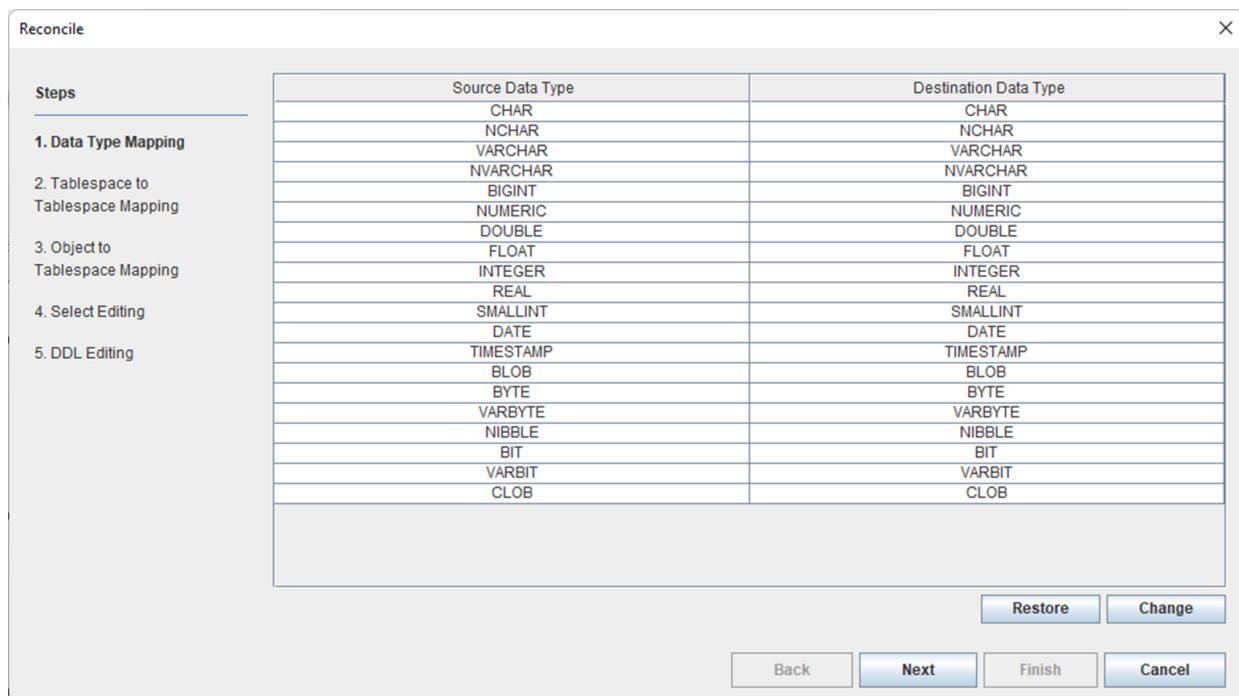

## 3. Change Mapping Type

*Change* button is clicked, the following window appears. In the "Change Mapping Type" window, select the data type to change in the Destination DB Data Type. Depending on the data type, enter Precision and Scale if necessary, and click the *OK* button.

Change Mapping Type

Source DB Data Type: CHAR

Destination DB Data Type: CHAR ▼

Precision:

Scale:

OK Cancel

## Default Data Type Mapping Tables

These tables describe the basic data type mapping tables between heterogeneous databases and precautions that users should be aware of.

Since Migration Center 7.11, if a table's column length of a source database exceeds the maximum range of the data type mapped to the target database, the data type of the target database can be automatically converted to a data type with a larger range than the default mapping table. For instance, the following data types can be changed to CLOB if necessary in order to minimize data loss.

- 

Change Mapping Type

Source DB Data Type: CHAR

Destination DB Data Type: CHAR ▼

Precision:

Scale:

OK Cancel

- VARCHAR or VARCHAR2, LVARCHAR, TT\_VARCHAR

## Oracle to Altibase

	Source	Destination	Notice
1	CHAR	CHAR	CHAR type columns defined with character length in Oracle are automatically converted to CHAR type columns with byte length in Altibase, because in Altibase, CHAR type columns can be defined only with byte length.

	Source	Destination	Notice
2	NCHAR	NCHAR	<p>The explicit sizes of the source and destination NCHAR columns are the same, e.g. NCHAR(10) -&gt; NCHAR(10).</p> <p>However, in the Oracle JDBC driver, the size of a national character column is defined as the number of bytes used, whereas in the Altibase JDBC driver, the size of a national character column is defined as the number of characters that are stored. Please note that this means that the resultant column in Altibase will be two or three times as large as necessary.</p>
3	VARCHAR2	VARCHAR	VARCHAR2 defined as character length in Oracle is converted into bytes in Altibase. Altibase's VARCHAR can be defined only in bytes.
4	NVARCHAR2	NVARCHAR	The column sizes differ, for the same reason as NCHAR.
5	LONG	CLOB	
6	NUMBER	NUMBER	<p>NUMBER type columns defined without precision and scale in Oracle are converted to the same NUMBER type columns without precision and scale for Altibase. *Both Oracle and Altibase internally handle NUMBER type columns defined without precision and scale as FLOAT type in the database.</p>
7	FLOAT	FLOAT	
8	BINARY FLOAT	FLOAT	
9	BINARY DOUBLE	VARCHAR(310)	There is no compatible data type in Altibase for the Oracle binary double type, so the data is stored in character form to prevent loss.
10	DATE	DATE	
11	TIMESTAMP	DATE	<p>A small amount of data loss may occur due to the difference in scale.</p> <p>In Oracle, the scale of a timestamp value is nanoseconds (9 digits), whereas in Altibase, the scale of a timestamp value is microseconds (6 digits)</p>
12	RAW	BLOB	



	Source	Destination	Notice
13	LONG RAW	BLOB	
14	BLOB	BLOB	
15	CLOB	CLOB	
16	NCLOB	NVARCHAR(10666)	There is no compatible data type in Altibase for the Oracle NCLOB, so the data is stored in NVARCHAR with the maximum precision. This may cause data loss during data migration when the actual data precision exceeds the NVARCHAR maximum size.
17	ROWID	VARCHAR(18)	Oracle's ROWID converts to a character data type. Altibase does not support the data type ROWID.

## Microsoft SQL Server to Altibase

	Source	Destination	Notice
1	BIGINT	BIGINT	
2	DECIMAL	NUMERIC	
3	INT	INTEGER	
4	NUMERIC	NUMERIC	
5	SMALLINT	SMALLINT	
6	MONEY	FLOAT	
7	TINYINT	SMALLINT	
8	SMALLINTMONEY	FLOAT	
9	BIT	CHAR(1)	
10	FLOAT	VARCHAR(310)	There is no compatible data type in Altibase for Microsoft SQL FLOAT type, so VARCHAR(310) is mapped to prevent data loss.
11	REAL	FLOAT	
12	DATE	DATE	

	Source	Destination	Notice
13	DATETIME2	DATE	A fraction of time can be loss due to difference in scale. Scale of DATETIME2 type of Microsoft SQL Server is hundreds of nanoseconds (7 digits), whereas the scale of DATE type of Altibase is only microseconds(6 digits).
14	DATETIME	DATE	
15	SMALLDATETIME	DATE	
16	CHAR	CHAR	
17	TEXT	CLOB	
18	VARCHAR	VARCHAR	
19	VARCHAR (MAX)	CLOB	
20	NVARCHAR	NVARCHAR	
21	NVARCHAR (MAX)	NVARCHAR (10666)	There is no compatible data type in Altibase for SQL Server NTEXT type, NVARCHAR is used with maximum precision. It may cause data loss during data migration when actual data precision exceeds maximum NVARCHAR size.
22	BINARY	BYTE	
23	IMAGE	BLOB	
24	VARBINARY	BLOB	
25	ALLIDENTITY	NUMERIC(38, 0)	
26	UNIQUEIDENTIFIER	VARCHAR(40)	There is no compatible data type in Altibase for SQL Server UNIQUEIDENTIFIER type, so VARCHAR type is used to prevent any data loss.
27	SYSNAME	NVARCHAR (128)	

## MySQL to Altibase

	Source	Destination	Notice
1	TINYINT	SMALLINT	
2	TINYINT UNSIGNED	SMALLINT	

	Source	Destination	Notice
3	SMALLINT	INTEGER	
4	SMALLINT UNSIGNED	INTEGER	
5	MEDIUMINT	INTEGER	
6	MEDIUMINT UNSIGNED	INTEGER	
7	INT (INTEGER)	INTEGER	Please note that the minimum value of Altibase INT type (-2,147,483,647) is greater than the minimum value of MySQL INT type (-2,147,483,648).
8	INT UNSIGNED	BIGINT	
9	BIGINT	BIGINT	Please note that the minimum value of Altibase BIGINTINT type (-9,223,372,036,854,775,807) is greater than the minimum value of MySQL BIGINT type (-9,223,372,036,854,775,808).
10	BIGINT UNSIGNED	NUMERIC(20,0)	There is no compatible data type in Altibase for MySQL BIGINT UNSIGNED type, so NUMERIC type is used to prevent any data loss.
11	DECIMAL (NUMERIC)	VARCHAR(70)	There is no compatible data type in Altibase for MySQL DECIMAL type, so VARCHAR type is used to prevent any data loss.
12	FLOAT	FLOAT	
13	DOUBLE	VARCHAR(310)	There is no compatible data type in Altibase for MySQL DOUBLE type, so VARCHAR type is used to prevent any data loss.
14	BIT	VARBIT	
15	DATETIME	DATE	Time parts are set to '0'
16	DATE	DATE	
17	TIMESTAMP	DATE	Except TIMEZONE
18	CHAR	CHAR	

	Source	Destination	Notice
19	VARCHAR	VARCHAR	If the MySQL's VARCHAR length exceeds 32,000 bytes, the maximum size of Altibase's VARCHAR, it is converted to Altibase's CLOB data type. This is to prevent data loss that may occur during migration due to the maximum size difference between MySQL and Altibase data types. MySQL's maximum value for VARCHAR is 65,536 bytes, larger than Altibase.
20	CHAR with National Character		The data type of Altibase varies depending on the character set of MySQL and Altibase.
		CHAR	1. If the character set of MySQL and Altibase is the same Unicode, it is converted to CHAR. 2. Even when MySQL's character set is not Unicode, it is converted to CHAR.
		NCHAR	If the character set of MySQL is Unicode and the character set of Altibase is not Unicode, it is converted to NCHAR.
21	VARCHAR with National Character		The data type of Altibase varies depending on the character set of MySQL and Altibase.
		VARCHAR	1. If the character set of MySQL and Altibase is the same Unicode, it is converted to VARCHAR. 2. Even when MySQL's character set is not Unicode, it is converted to VARCHAR.
		NVARCHAR	If the character set of MySQL is Unicode and the character set of Altibase is not Unicode, it is converted to NVARCHAR.
22	BINARY	BYTE	
23	VARBINARY	BLOB	
24	TINYBLOB	BLOB	
25	MEDIUMBLOB	BLOB	
26	BLOB	BLOB	
27	LONGBLOB	BLOB	
28	TINYTEXT	VARCHAR(255)	
29	TEXT	CLOB	

	Source	Destination	Notice
30	MEDIUMTEXT	CLOB	
31	LONGTEXT	CLOB	
32	ENUM	VARCHAR(10666)	There is no compatible data type in Altibase for MySQL ENUM type, so VARCHAR is used to prevent data loss.
33	SET	VARCHAR(10666)	There is no compatible data type in Altibase for MySQL SET type, so VARCHAR is used to prevent data loss.

## Informix 11.5 to Altibase

	Source	Destination	Notice
1	BIGINT	BIGINT	
2	INT8	BIGINT	
3	INT	INTEGER	
4	SMALLINT	SMALLINT	
5	BIGSERIAL	BIGINT	
6	SERIAL8	BIGINT	
7	SERIAL	INTEGER	
8	FLOAT	DOUBLE	
9	REAL	REAL	
10	SMALLFLOAT	REAL	
11	MONEY	NUMERIC	
12	DECIMAL_FLOAT	FLOAT	
13	DATE	DATE	
14	DATETIME	DATE	
15	BOOLEAN	CHAR(1)	

	Source	Destination	Notice
16	CHAR	CHAR	If Informix's CHAR length exceeds 32,000 bytes, the maximum size of Altibase's CHAR, it is converted to Altibase's data type to CLOB. This is to prevent data loss that may occur during migration due to the maximum size difference between Informix and Altibase data types. Informix's maximum value for CHAR is 32,767 bytes, larger than Altibase.
17	NCHAR	NCHAR	The user should note that data loss can occur due to the maximum precision of NCHAR data type at Informix (32,767) being greater than that of Altibase (32,000).
18	VARCHAR	VARCHAR	
19	NVARCHAR	NVARCHAR	
20	LVARCHAR	VARCHAR	If Informix's LVARCHAR length exceeds 32,000 bytes, the maximum size of Altibase's VARCHAR, it is converted to Altibase's data type to CLOB. This is to prevent data loss that may occur during migration due to the maximum size difference between Informix and Altibase data types. Informix's maximum value for LVARCHAR is 32,767 bytes, larger than Altibase.
21	TEXT	CLOB	
22	CLOB	CLOB	The user should keep in mind that data loss can occur due to the maximum size of CLOB data type at Informix (4GB) being greater than that of Altibase (2GB).
23	BYTE	BLOB	
24	BLOB	BLOB	The user should keep in mind that data loss can occur due to the maximum size of BLOB data type at Informix (4GB) being greater than that of Altibase (2GB).
25	INTERVAL	FLOAT	

## TimesTen to Altibase

	Source	Destination	Notice
1	BINARY	BLOB	

	Source	Destination	Notice
2	BINARY_DOUBLE	VARCHAR(310)	
3	BINARY_FLOAT	FLOAT	
4	BLOB	BLOB	
5	CHAR	CHAR	CHAR type columns defined with character length in TimesTen are automatically converted to CHAR type columns with byte length in Altibase, because in Altibase, CHAR type columns can be defined only with byte length.
6	CLOB	CLOB	
7	DATE	DATE	
8	NCHAR	NCHAR	
9	NCLOB	NVARCHAR(10666)	
10	NUMBER	NUMBER	
11	NVARCHAR2	NVARCHAR	The maximum size of VARCHAR2 of TimesTen is 2,097,152 bytes, which is greater than the maximum VARCHAR size of Altibase, which is 32,000; thus, the potential data loss can be occurred.
12	ROWID	VARCHAR(18)	
13	TIME	DATE	
14	TIMESTAMP	DATE	The maximum TIMESTAMP scale of TimesTen takes nanoseconds (9digits), which is greater than the maximum DATE scale microseconds (6digits) of Altibase; thus, the potential data loss can be occurred.
15	TT_BIGINT	BIGINT	The minimum size of TT_BIGINT in TimesTen is -9,223,372,036,854,775,808 which is smaller than the minimum BIGINT size of Altibase, which is 9,223,372,036,854,775,807; thus, the potential data loss can be occurred.
16	TT_CHAR	CHAR	
17	TT_DATE	DATE	

	Source	Destination	Notice
18	TT_DECIMAL	NUMBER	The maximum TT_DECIMAL of TimesTen is precision(40) greater than the maximum precision size(38) of NUMBER in Altibase; thus, the potential data loss can be occurred.
19	TT_INTEGER	INTEGER	The minimum TT_INTEGER size of TimesTen is -2,147,483,648, which is smaller than the minimum INTEGER size of Altibase, which is -2,147,483,647; thus, the potential data loss can be occurred.
20	TT_NCHAR	NCHAR	
21	TT_NVARCHAR	NVARCHAR	The maximum TT_NVARCHAR size (2,097,152 bytes) of TimesTen is greater than that of the Altibase(32,000 bytes); thus, the potential data loss can be occurred.
22	TT_SMALLINT	SMALLINT	The potential data loss can be occurred since the minimum TT_SMALLINT size (-32,768) of TimesTen is smaller than the minimum SMALLINT size(-32,767) of Altibase.
23	TT_TIMESTAMP	DATE	The maximum scale of TT_TIMESTAMP in TimesTen is nanoseconds (7 digits), which is greater than the maximum scale of DATE in Altibase that is microseconds (6 digits); thus, the potential data loss can be occurred.
24	TT_TINYINT	SMALLINT	
25	TT_VARCHAR	VARCHAR	If TimesTen's TT_VARCHAR legnth exceeds 32,000 bytes, the maximum size of Altibase's VARCHAR, it is converted to Altibase's data type to CLOB. This is to prevent data loss that may occur during migration due to the maximum size difference between TimesTen and Altibase data types. TimesTen's maximum value for TT_VARCHAR is 4,194,304bytes, larger than Altibase.
26	VARBINARY	BLOB	



	Source	Destination	Notice
27	VARCHAR2	VARCHAR	<p>1. If TimesTen's VARCHAR2 length exceeds 32,000 bytes, the maximum size of Altibase's VARCHAR, it is converted to Altibase's data type to CLOB. This is to prevent data loss that may occur during migration due to the maximum size difference between TimesTen and Altibase data types. TimesTen's maximum value for VARCHAR2 is 4,194,304bytes, larger than Altibase.</p> <p>2. VARCHAR2 defined as character length in TimesTen is converted into bytes in Altibase. Altibase's VARCHAR can be defined only in bytes.</p>

## CUBRID to Altibase

	Source	Destination	Notice
1	SHORT	SMALLINT	The minimum SHORT value of CUBRID is - 32,768, which is smaller than the minimum value(-32,767) of SMALLINT in Altibase; thus the potential data loss can be occurred.
2	INTEGER	INTEGER	The minimum value of CUBRID( - 2,147,483,648) is smaller than that of the Altibase( -2,147,483,647); thus the potential data loss can be occurred.
3	BIGINT	BIGINT	The minimum value of CUBRID(- 9,223,372,036,854,775,808) is smaller than that of the Altibase ( -9,223,372,036,854,775,807);thus the potential data loss can be occurred.
4	NUMERIC	NUMERIC	
5	FLOAT	REAL	
6	DOUBLE	DOUBLE	
7	MONETARY	DOUBLE	
8	DATE	DATE	
9	TIME	DATE	
10	TIMESTAMP	DATE	
11	DATETIME	DATE	

	Source	Destination	Notice
12	CHAR	CHAR	If CUBRID's CHAR length exceeds 32,000 bytes, the maximum size of Altibase's CHAR, it is converted to Altibase's data type to CLOB. This is to prevent data loss that may occur during migration due to the maximum size difference between CUBRID and Altibase data types. CUBRID's maximum value for CHAR is 1,073,741,823 bytes, larger than Altibase.
13	VARCHAR	VARCHAR	If CUBRID's VARCHAR length exceeds 32,000 bytes, the maximum size of Altibase's VARCHAR, it is converted to Altibase's data type to CLOB. This is to prevent data loss that may occur during migration due to the maximum size difference between CUBRID and Altibase data types. CUBRID's maximum value for VARCHAR is 1,073,741,823 bytes, larger than Altibase.
14	NCHAR	NCHAR	Since the maximum size of NCHAR type in CUBRID is 1,073,741,823 bytes, which is greater than that of the Altibase( 16,000bytes), potential data loss can be occurred.
15	VARCHAR	NVARCHAR	The maximum size of VARCHAR type in CUBRID is 1,073,741,823 bytes and it is greater than the maximum NVARCHAR type of Altibase, which is 16,000 bytes; thus, potential data loss can be occurred.
16	STRING	VARCHAR	The potential data loss can be occurred since the maximum VARCHAR size of CUBRID is greater than that of Altibase, which is 32,000 bytes with the identical data type.
17	BIT	BLOB	
18	VARBIT	BLOB	
19	BLOB	BLOB	The maximum length of BLOB in CUBRID is the file size which can be created in an external storage, and it differs from the maximum size of BLOB type in Altibase, which is 2GB; thus, potential data loss can be occurred.

	Source	Destination	Notice
20	CLOB	CLOB	The maximum length of CLOB in CUBRID is the file size which can be created in an external storage, and it differs from the maximum size of CLOB type in Altibase, which is 2GB; thus, potential data loss can be occurred.
21	ENUM	VARCHAR(3200)	This is the data which is not supported by Altibase. The constants of enumeration character string in CUBRID implement migration through arbitrarily converting them into VARCHAR type of Altibase.
22	COLLECTION	VARCHAR(3200)	This is the data type that Altibase does not support. The COLLECTION data type of CUBRID is converted as the VARCHAR data type of Altibase and the value of the former is also converted as string for the later during migrating.

## Altibase to Oracle

	Source	Destination	Notice
1	CHAR	CHAR	If Altibase's CHAR length exceeds 2,000 bytes, the maximum size of Oracle's CHAR, it is converted to Oracle's data type to CLOB. This is to prevent data loss that may occur during migration due to the maximum size difference between Altibase and Oracle. Altibase's CHAR maximum size is 32,000 bytes, which is larger than Oracle.
2	NCHAR	NCHAR	The potential data loss can be occurred since the maximum size of Altibase NCHAR is 32000 bytes and the maximum size of of Oracle NCHAR is 2000 bytes.
3	VARCHAR	VARCHAR2	If Altibase's VARCHAR length exceeds 4,000 bytes, the maximum size of Oracle's VARCHAR2, it is converted to Oracle's data type to CLOB. This is to prevent data loss that may occur during migration due to the maximum size difference between Altibase and Oracle. Altibase's VARCHAR maximum size is 32,000 bytes, which is larger than Oracle.
4	NVARCHAR	NVARCHAR2	The potential data loss can be occurred since the maximum size of Altibase NVARCHAR is 32000 bytes and the maximum size of of Oracle NVARCHAR is 4000 bytes or characters.
5	SMALLINT	NUMBER	

	Source	Destination	Notice
6	INTEGER	NUMBER	
7	BIGINT	NUMBER	
8	REAL	BINARY_FLOAT	
9	DOUBLE	BINARY_DOUBLE	
10	FLOAT	FLOAT	
11	NUMERIC	NUMBER	
12	DATE	TIMESTAMP	
13	BIT	CHAR	The potential data loss can be occurred since the maximum size of CHAR is 2000 bytes, and the maximum size of BIT is 64000 bits, that is, 8000 bytes.
14	VARBIT	VARCHAR2	The potential data loss can be occurred since the maximum size of VARCHAR2 is 4000 bytes, and the maximum size of VARBIT is 64000 bits, that is, 8000 bytes.
15	BYTE	RAW	The potential data loss can be occurred since the maximum size of BYTE is 32000 bytes, and the maximum size of RAW is 2000 bytes.
16	VARBYTE	RAW	The potential data loss can be occurred since the maximum size of VARBYTE is 32000 bytes, and the maximum size of RAW is 2000 bytes.
17	NIBBLE	RAW	
18	BLOB	BLOB	
19	CLOB	CLOB	

## Tibero to Altibase

	Source	Destination	Notice
1	CHAR	CHAR	Since Altibase's CHAR type can be defined only in byte length, in case of a column defined as character length in Tibero, it is automatically converted to byte length.
2	NCHAR	NCHAR	

	Source	Destination	Notice
3	VARCHAR	VARCHAR	Altibase's VARCHAR type can be defined only in byte length, so in case of a column defined as character length in Tiberio, it is automatically converted to byte length.
4	NVARCHAR	NVARCHAR	
5	LONG	CLOB	
6	NUMBER	NUMERIC	NUMBER type columns defined without precision and scale in Tiberio are converted to the same NUMBER type columns without precision and scale for Altibase. *Both Tiberio and Altibase internally handle NUMBER type columns defined without precision and scale as FLOAT type in the database.
7	BINARY FLOAT	FLOAT	
8	BINARY DOUBLE	VARCHAR(310)	There is no compatible data type in Altibase for the Tiberio binary double type, so the data is stored in character form to prevent loss.
9	DATE	DATE	
10	TIME	DATE	
11	TIMESTAMP	DATE	A small amount of data loss may occur due to the difference in scale. In Tiberio, the scale of a timestamp value is nanoseconds (9 digits), whereas in Altibase, the scale of a timestamp value is microseconds (6 digits).
12	RAW	BLOB	
13	LONG RAW	BLOB	
14	BLOB	BLOB	
15	CLOB	CLOB	
16	NCLOB	NVARCHAR(10666)	There is no compatible data type in Altibase for the Tiberio NCLOB, so the data is stored in NVARCHAR with the maximum precision. This may cause data loss during data migration when the actual data precision exceeds the NVARCHAR maximum size.
17	ROWID	VARCHAR(18)	Tiberio's ROWID converts to a character data type. Altibase does not support the data type ROWID.

# Automatic Correction of Character Column Length Considering Heterogeneous Character Set

When the character sets of the source and destination databases are different during migration, character data types (CHAR, VARCHAR) require length conversion.

For example, if the source database is set to the MS949 character set that requires a maximum of 2 bytes per character storage, and the target database is set to the UTF8 character set that requires 3 bytes per character, the character data of the target database is required to migrate without truncation. The size of the type should be 1.5 times the original.

Migration Center automatically performs this length conversion, and the length correction formula for character data types is as follows.

```
Dest. Size = Ceil(Correction Factor * Src. Size)
Correction Factor = Dest. MaxBytes / Src. MaxBytes
* MaxBytes = The maximum number of bytes required to store one character
```

However, if MaxBytes of the original is 1 or the correction factor is less than 1, the length conversion is not performed.

The MaxBytes and correction factors of the source and target databases can be found on the summary page of the build report.

## Precautions

For large tables, the length of data storage in the target database can be much larger than the original due to length correction. If there is a guarantee that the data will not be truncated without converting the length, the length can be manually specified in the reconcile step.

## Support Character Set for Each Database

For character sets not listed in the table below, Migration Center does not perform length correction.

### Altibase

Character Set	Max. Bytes Per Character
KO16KSC5601	2
MS949	2
BIG5	2
GB231280	2
MS936	2
UTF8	3
SHIFTJIS	2
MS932	2

Character Set	Max. Bytes Per Character
EUCJP	3

### Cubrid

Character Set	Max. Bytes Per Character
utf8	3
euckr	2

### Informix

Character Set	Max. Bytes Per Character
zh_cn.GB18030_2000	4
zh_tw.big5	2
zh_tw.euctw	4
zh_cn.gb	2
zh_tw.sbig5	2
zh_tw.ccdc	2
ja_jp.sjis-s	2
ja_jp.ujis	3
ja_up.sjis	2
ko_kr.cp949	2
ko_kr.ksc	2

### MySQL

See the result set of the query below.

```
SELECT CHARACTER_SET_NAME,MAXLEN FROM INFORMATION_SCHEMA.CHARACTER_SETS;
```

### SQL Server

Code Page	Max. Bytes Per Character
932	2
936	2

Code Page	Max. Bytes Per Character
949	2
950	2

## Oracle

Character Set	Max. Bytes Per Character
AL32UTF8	4
JA16EUC	3
JA16EUCTILDE	3
JA16SJIS	2
JA16SJISTILDE	2
KO16MSWIN949	2
UTF8	3
ZHS16GBK	2
ZHT16HKSCS	2
ZHT16MSWIN950	2
ZHT32EUC	4

## Tibero

Character Set	Max. Bytes Per Character
UTF8	3
EUCKR	2
MSWIN949	2
SJIS	2
JA16SJIS	2
JA16SJISTILDE	2
JA16EUC	3
JA16EUCTILDE	3
GBK	2



Character Set	Max. Bytes Per Character
ZHT16HKSCS	2

## TimesTen

Character Set	Max. Bytes Per Character
AL16UTF16	4
AL32UTF8	4
JA16EUC	3
JA16EUCTILDE	3
JA16SJIS	2
JA16SJISTILDE	2
KO16KSC5601	2
KO16MSWIN949	2
ZHS16CGB231280	2
ZHS16GBK	2
ZHS32GB18030	4
ZHT16BIG5	2
ZHT16HKSCS	2
ZHT16MSWIN950	2
ZHT32EUC	4

# Appendix E: PSM Converter Rule List

The default values for Altibase table columns are mostly compatible with the default values for the source database.

However, the default value policy can differ among heterogeneous databases. In the event of such exceptional situations, Migration Center converts source database values according to the Altibase policy.

This appendix provides a mapping table for default values according to which Migration Center converts source database default values to comply with Altibase.

## Mapping Table for Default Values

Prior to migrating data, Migration Center creates a table identical to the source database table in the migration destination database. Migration Center first creates a CREATE TABLE statement with the equivalent attributes as the source database table. To set the same default values for both source table columns and target table columns, Migration Center converts the default values in the following mapping tables and specifies them in the CREATE TABLE statement, when creating the statement. Default values excluded from the table are specified in the statement without being changed.

Note: Some default values that are not changed can be incompatible with source and destination databases. If necessary, you must manually alter the default value for the CREATE TABLE statement in the DDL Editing window at the Reconcile Step.

### Default Value Mapping Policy

Default values of most of the original database are compatible with the target database without any modifications. However, Migration Center converts source database default values according to the policy of the target database system for the following exceptions.

- The CHARACTER data type with a zero length string as the default value: Altibase identifies zero length strings as NULL; therefore, the default value is not specified.
- The DATE data type with a string expression as the default value: Since the default format for the DATE data type differs among source databases, Migration Center specifies a comment which includes the DEFAULT keyword in the CREATE TABLE statement, instead of the default value. If necessary, the user must manually set the default value later on, by referring to the comment. However, if the source database is the one among the MySQL, TimesTen or CUBRID, Migration Center automatically converts default values as shown below.
- The default value specified with a function: A function which is listed in the following table is converted accordingly, only if the function is exclusively specified as the default value in the source database. Other functions or expressions of a complex form are converted without being changed. If necessary, the user must manually change them later on.

### Oracle Database to Altibase

Expression Type	Source(Oracle)	Destination(Altibase)	Remarks
String for CHARACTER Data Type	"		
String for DATE Data Type	'97/04/21'	/* DEFAULT '97/04/21' */	
Function	DBTIMEZONE	DB_TIMEZONE()	Supported for Altibase 6.3.1.0.0 or above.
	SYS_GUID()	SYS_GUID_STR()	Supported for Altibase 6.3.1.0.0 or above.

	UID	USER_ID()	
	USER	USER_NAME()	

The following is an example of the conversion.

Oracle CREATE TABLE Statement	Altibase CREATE TABLE Statement
<pre>CREATE TABLE testtbl_4_defval ( c1 INT DEFAULT 123, c2 VARCHAR(50) DEFAULT 'test', c3 INT DEFAULT NULL, c4 CHAR(10) DEFAULT '', c5 INT DEFAULT SQRT(144) + 72, c6 DATE DEFAULT '97/04/21', c7 DATE DEFAULT TO_DATE('1999-12-01', 'YYYY-MM-DD'), c8 VARCHAR(100) DEFAULT DBTIMEZONE, c9 VARCHAR(100) DEFAULT SYS_GUID(), c10 VARCHAR(100) DEFAULT UID, c11 VARCHAR(100) DEFAULT USER );</pre>	<pre>CREATE TABLE TESTTBL_4_DEFVAL ( C1 NUMBER (38, 0) DEFAULT 123, C2 VARCHAR (50) DEFAULT 'test', C3 NUMBER (38, 0), C4 CHAR (10), C5 NUMBER (38, 0) DEFAULT SQRT(144) + 72, C6 DATE /* DEFAULT '97/04/21' */, C7 DATE DEFAULT TO_DATE('1999-12-01', 'YYYY-MM-DD'), C8 VARCHAR (100) DEFAULT DB_TIMEZONE(), C9 VARCHAR (100) DEFAULT SYS_GUID_STR(), C10 VARCHAR (100) DEFAULT USER_ID(), C11 VARCHAR (100) DEFAULT USER_NAME() );</pre>

## MS SQL Server to Altibase

Expression Type	Source (MS SQL Server)	Destination (Altibase)	Remarks
String for CHARACTER Data Type	"		
String for DATE Data Type	'December 5, 1985'	/* DEFAULT 'December 5, 1985' */	
Function	GETDATE90	SYSDATE	
	CURRENT_TIMESTAMP		
	LEN( str_expression )	LENGTH( str_expression )	

The following is an example of the conversion.

MS SQL CREATE TABLE Statement	Altibase CREATE TABLE Statement
-------------------------------	---------------------------------

MS SQL CREATE TABLE Statement	Altibase CREATE TABLE Statement
<pre>CREATE TABLE testtbl_4_defval ( c1 BIT DEFAULT 0, c2 INT DEFAULT 2 + 3, c3 VARCHAR(50) DEFAULT 'test', c4 INT DEFAULT NULL, c5 NCHAR(10) DEFAULT "", c6 FLOAT DEFAULT sqrt(12 * 12), c7 DATE DEFAULT 'December 5, 1985', c8 DATE DEFAULT getdate(), c9 DATETIME DEFAULT CURRENT_TIMESTAMP, c10 INT DEFAULT len('test'), );</pre>	<pre>CREATE TABLE TESTTBL_4_DEFVAL ( C1 CHAR (1) DEFAULT (0), C2 INTEGER DEFAULT (2)+(3), C3 VARCHAR (50) DEFAULT 'test', C4 INTEGER, C5 NCHAR (10), C6 VARCHAR (310) DEFAULT sqrt((12)*(12)), C7 DATE /* DEFAULT 'December 5, 1985' */, C8 DATE DEFAULT SYSDATE, C9 DATE DEFAULT SYSDATE, C10 INTEGER DEFAULT LENGTH('test') );</pre>

## MySQL to Altibase

Expression Type	Source (MySQL)	Destination (Altibase)	Remarks
String for CHARACTER Data Type	"		
String for DATE Data Type	'1989-04-28'	TO_DATE('1989-04-28', 'YYYY-MM-DD')	
	'1989-04-28 12:31:29'	TO_DATE('1989-04-28 12:31:29', 'YYYY-MM-DD HH:MI:SS')	
	'0000-00-00 00:00:00'	/* DEFAULT '0000-00-00 00:00:00' */	If the default value for the DATE data type is omitted, MySQL automatically specifies it as '0000-00-00 00:00:00'. However, since this value cannot be input to the DATE type for Altibase, a comment is left.
Function	CURRENT_TIMESTAMP	SYSDATE	
	CURRENT_TIMESTAMP()		
	NOW()		
	LOCALTIME		
	LOCALTIME()		

	LOCALTIMESTAMP		
	LOCALTIMESTAMP()		

Note: If the first column of a table is of the TIMESTAMP data type, MySQL automatically specifies CURRENT\_TIMESTAMP as the default value, even if the user omits it. In this case, the default value is converted to SYSDATE. Please refer to the following example.

The following is an example of the conversion.

MySQL CREATE TABLE Statement	Altibase CREATE TABLE Statement
<pre>CREATE TABLE testtbl_4_defval ( c1 TIMESTAMP NOT NULL,   c2 INT DEFAULT 123,   c3 VARCHAR(50) DEFAULT 'test',   c4 INT DEFAULT NULL,   c5 CHAR(10) DEFAULT '',   c6 DATE DEFAULT '1989-04-28',   c7 DATETIME DEFAULT '1989-04-28 12:31:29',   c8 TIMESTAMP DEFAULT '1989-04-28 12:31:29' NOT NULL,   c9 TIMESTAMP NOT NULL );</pre>	<pre>CREATE TABLE TESTTBL_4_DEFVAL ( C1 DATE DEFAULT SYSDATE NOT NULL,   C2 INTEGER DEFAULT 123,   C3 CLOB DEFAULT 'test', C4 INTEGER,   C5 CHAR (10),   C6 DATE DEFAULT TO_DATE('1989-04-28', 'YYYY-MM-DD'),   C7 DATE DEFAULT TO_DATE('1989-04-28 12:31:29', 'YYYY-MM-DD HH:MI:SS'),   C8 DATE DEFAULT TO_DATE('1989-04-28 12:31:29', 'YYYY-MM-DD HH:MI:SS') NOT NULL,   C9 DATE /* DEFAULT '0000-00-00 00:00:00' */ NOT NULL );</pre>

## Informix 11.5 to Altibase

Expression Type	Source (Informix)	Destination (Altibase)	Remarks
String for CHARACTER Data Type	"		
String for DATE Data Type	'2007-03-06'	/* DEFAULT '2007-03-06' */	
Function	CURRENT	SYSDATE	
	TODAY	SYSDATE	

The following is an example of the conversion.

Informix CREATE TABLE Statement	Altibase CREATE TABLE Statement
---------------------------------	---------------------------------

Informix CREATE TABLE Statement	Altibase CREATE TABLE Statement
<pre>CREATE TABLE testtbl_4_defval ( c1 INTEGER DEFAULT 123, c2 BOOLEAN DEFAULT 't', c3 CHAR(100) DEFAULT 'test', c4 INTEGER DEFAULT null, c5 CHAR(10) DEFAULT '', c6 DATETIME YEAR TO DAY DEFAULT DATETIME(07-3-6) YEAR TO DAY, c7 DATETIME DAY TO HOUR DEFAULT CURRENT DAY TO HOUR, c8 DATE DEFAULT TODAY );</pre>	<pre>CREATE TABLE TESTTBL_4_DEFVAL ( C1 INTEGER DEFAULT 123, C2 CHAR (1) DEFAULT 't', C3 CHAR (100) DEFAULT 'test', C4 INTEGER, C5 CHAR (10), C6 DATE /* DEFAULT '2007-03- 06' */, C7 DATE DEFAULT SYSDATE, C8 DATE DEFAULT SYSDATE );</pre>

## TimesTen to Altibase

Expression Type	Source(TimesTen)	Destination(Altibase)	Remarks
String for DATE Data Type	'1989-04-28'	TO_DATE('1989-04-28', 'YYYY-MM-DD')	
	'1989-04-28 12:31:29'	TO_DATE('1989-04-28 12:31:29', 'YYYY-MM-DD HH:MI:SS')	
	'12:31:29'	TO_DATE('12:31:29', 'HH:MI:SS')	
Function	UID	USER_ID	
	USER	USER_NAME	

The following is an example of the conversion.

TimesTen CREATE TABLE Statement	Altibase CREATE TABLE Statement
<pre>CREATE TABLE testtbl_4_defval ( c1 INT DEFAULT 123, c2 VARCHAR2(50) DEFAULT 'test', c3 INT DEFAULT NULL, c4 DATE DEFAULT '1999-12-01', c5 TIMESTAMP DEFAULT '1999- 12-01 11:30:21', c6 TIME DEFAULT '11:30:21', c7 VARCHAR(100) DEFAULT UID, c8 VARCHAR(100) DEFAULT USER );</pre>	<pre>CREATE TABLE TESTTBL_4_DEFVAL ( c1 INT DEFAULT 123, c2 VARCHAR2(50) DEFAULT 'test', c3 INT DEFAULT NULL, c4 DATE DEFAULT TO_DATE('1999-12-01', 'YYYY-MM-DD'), c5 TIMESTAMP DEFAULT TO_DATE('1999-12-01 11:30:21', 'YYYY-MM-DD HH:MI:SS'), c6 TIME DEFAULT TO_DATE('11:30:21', 'HH:MI:SS'), c7 VARCHAR(100) DEFAULT UID, c8 VARCHAR(100) DEFAULT USER );</pre>

## CUBRID to Altibase

Expression Type	Source(CUBRID)	Destination(Altibase)	Remarks
Function	USER	USER_ID()	
	CURRENT_USER	USER_NAME()	

The following is an example of the conversion.

CUBRID CREATE TABLE Statement	Altibase CREATE TABLE Statement
<pre>CREATE TABLE testtbl_4_defval ( c1 INTEGER DEFAULT 123, c2 CHARACTER VARYING (50) DEFAULT 'test', c3 INTEGER, c4 CHARACTER VARYING (100) DEFAULT 'USER', c5 CHARACTER VARYING (100) DEFAULT 'CURRENT_USER', c6 CHARACTER VARYING(100) DEFAULT '', c7 DATE DEFAULT DATE'2008-10-31', c8 TIME DEFAULT TIME'1:15', c9 TIMESTAMP DEFAULT TIMESTAMP'10/31', c10 DATETIME DEFAULT DATETIME'01:15:45 PM 2008-10-31' );</pre>	<pre>CREATE TABLE TESTTBL_4_DEFVAL ( C1 INTEGER DEFAULT 123, C2 VARCHAR (50) DEFAULT 'test', C3 INTEGER, C4 VARCHAR (100) DEFAULT USER_ID(), C5 VARCHAR (100) DEFAULT USER_ID(), C6 VARCHAR (100) DEFAULT '', C7 DATE /* DEFAULT '10/31/2008' */, C8 DATE /* DEFAULT '01:15:00 AM' */, C9 DATE /* DEFAULT '12:00:00 AM 10/31/2016' */, C10 DATE /* DEFAULT '01:15:45.000 PM 10/31/2008' */);</pre>

## Altibase to Oracle

Expression Type	Source(Altibase)	Destination(Oracle)	Remarks
String for Character type	"		
Function	DB_TIMEZONE()	DBTIMEZONE	Supported in Altibase 6.3.1.0.0 or above
	SYS_GUID_STR()	SYS_GUID()	Supported in Altibase 6.3.1.0.0 or above
	USER_ID()	UID	
	USER_NAME()	USER	

The following is an example of the conversion.

Altibase Table Creation SQL statements	Oracle Table Creation SQL statements
--	--------------------------------------

Altibase Table Creation SQL statements	Oracle Table Creation SQL statements
<pre>CREATE TABLE testtbl_4_defval ( c1 INT DEFAULT 123, c2 VARCHAR(50) DEFAULT 'test', c3 INT DEFAULT NULL, c4 CHAR(10) DEFAULT "", c5 INT DEFAULT SQRT(144) + 72, c6 DATE DEFAULT TO_DATE('1999-12-01 PM', 'YYYY-MM-DD AM'), c7 VARCHAR(100) DEFAULT DB_TIMEZONE(), c8 VARCHAR(100) DEFAULT SYS_GUID_STR(), c9 VARCHAR(100) DEFAULT USER_ID(), c10 VARCHAR(100) DEFAULT USER_NAME() );</pre>	<pre>CREATE TABLE TESTTBL_4_DEFVAL ( C1 NUMBER (10) DEFAULT 123 , C2 VARCHAR2 (50) DEFAULT 'test' , C3 NUMBER (10) , C4 CHAR (10) , C5 NUMBER (10) DEFAULT SQRT(144) + 72 , C6 TIMESTAMP DEFAULT TO_DATE('1999-12-01 PM', 'YYYY-MM-DD AM') , C7 VARCHAR2 (100) DEFAULT DBTIMEZONE , C8 VARCHAR2 (100) DEFAULT SYS_GUID() , C9 VARCHAR2 (100) DEFAULT UID , C10 VARCHAR2 (100) DEFAULT USER );</pre>

## Tibero to Altibase

Expression Type	Source(Tibero)	Destination(Altibase)	Remarks
String for CHARACTER Data Type	"		
String for DATE Data Type	'97/04/21'	/* DEFAULT '97/04/21' */	
Function	DBTIMEZONE	DB_TIMEZONE()	Supported in Altibase 6.3.1.0.0 or above.
	SYS_GUID_GUID()	SYS_GUID_STR()	Supported in Altibase 6.3.1.0.0 or above.
	UID	USER_ID()	
	USER	USER_NAME()	

The following is an example of the conversion.

Tibero CREATE TABLE Statement	Altibase CREATE TABLE Statement
-------------------------------	---------------------------------



Tibero CREATE TABLE Statement	Altibase CREATE TABLE Statement
<pre>CREATE TABLE testtbl_4_defval( c1 INT DEFAULT 123, c2 VARCHAR(50) DEFAULT 'test', c3 INT DEFAULT NULL, c4 CHAR(10) DEFAULT '', c5 INT DEFAULT QRT(144) + 72, c6 DATE DEFAULT '97/04/21', c7 DATE DEFAULT TO_DATE('1999-12-01', 'YYYY-MM-DD'), c8 VARCHAR(100) DEFAULT DBTIMEZONE, c9 VARCHAR(100) DEFAULT SYS_GUID(), c10 VARCHAR(100) DEFAULT UID, c11 VARCHAR(100) DEFAULT USER );</pre>	<pre>CREATE TABLE TESTTBL_4_DEFVAL( C1 NUMBER (38, 0) DEFAULT 123, C2 VARCHAR (50)  DEFAULT 'test', C3 NUMBER (38, 0), C4 CHAR (10), C5 NUMBER (38, 0) DEFAULT SQRT(144) + 72, C6 DATE /* DEFAULT '97/04/21' */, C7 DATE DEFAULT TO_DATE('1999-12-01', 'YYYY-MM-DD'), C8 VARCHAR (100)  DEFAULT DB_TIMEZONE(),  C9 VARCHAR (100)  DEFAULT SYS_GUID_STR(), C10 VARCHAR (100)  DEFAULT USER_ID(), C11 VARCHAR (100)  DEFAULT USER_NAME() );</pre>

## Appendix E: PSM Converter Rule List

Migration Center provides DDL SQL texts for creating PSM type database objects with the PSM converter for Oracle or TimesTen 11.2 to Altibase Migration.

The PSM converter uses rules to convert DDL SQL texts, and these rules fall into the following three categories:

- CONVERTED: Convertible
- REMOVED: Inconvertible, but may be removable
- TODO: Neither convertible nor removable

If a TODO rule is applied to a PSM object, then it will show up in the To-do list pane. If not, then it will show up in the Done list pane.

If the version scope is given for a rule, it means that the rule applies to only the specified Altibase version. On omission, the rule applies to all Altibase versions.

When converting several SQL statements, end each SQL statement with a slash (/) to separate them.

### View Conversion Rules

#### RULE-11001

- Type: REMOVED
- Description: 'WITH CHECK OPTION'이 제거되었다.
- Original SQL Text:

```
CREATE OR REPLACE VIEW v1
AS SELECT * FROM t1
```

#### **WITH CHECK OPTION;**

- Processed SQL Text:

CREATE OR REPLACE VIEW v1

AS SELECT \* FROM t1

**/\* WITH CHECK OPTION \*/ /\* [REMOVED] RULE-11001 : 'WITH CHECK OPTION' is removed \*/;**

#### **RULE-11002**

- Type: REMOVED
- Description: The alias constraints have been removed
- Original SQL Text:

CREATE OR REPLACE VIEW v1

(a1 **UNIQUE**)

AS SELECT c1 FROM t1;

- Processed SQL Text:

CREATE OR REPLACE VIEW v1

(a1 **/\* UNIQUE \*/ /\* [REMOVED] RULE-11002 : Inline constraints are removed \*/**)

AS SELECT c1 FROM t1;

#### **RULE-11003**

- Type: TODO
- Description: View level constraints must be converted manually.
- Original SQL Text:

CREATE OR REPLACE VIEW v1

(c1, CONSTRAINT v1\_uk UNIQUE(c1)

)

AS SELECT c1 FROM t1;

- Processed SQL Text:

CREATE OR REPLACE VIEW v1

(c1, CONSTRAINT v1\_uk UNIQUE(c1) **/\* [TODO] RULE-11003 : Out of line constraint must be converted manually \*/**)

AS SELECT c1 FROM t1;

## RULE-11004

- Type: REMOVED
- Description: BEQUEATH clause has been removed.
- Original SQL Text:

```
CREATE OR REPLACE VIEW v1  
BEQUEATH CURRENT_USER  
AS SELECT * FROM t1;
```

- Processed SQL Text:

```
CREATE OR REPLACE VIEW v1  
/* BEQUEATH CURRENT_USER */ /* [REMOVED] RULE-11004 : BEQUEATH clause is  
removed */  
AS SELECT * FROM t1;
```

## RULE-11005

- Type: TODO
- Description: XMLType view clause should be converted manually.
- Original SQL Text:

```
CREATE OR REPLACE VIEW v1  
OF XMLTYPE WITH OBJECT ID DEFAULT  
AS SELECT * FROM t1;
```

- Processed SQL Text:

```
CREATE OR REPLACE VIEW v1  
OF XMLTYPE WITH OBJECT ID DEFAULT /* [TODO] RULE-11005 : XMLType view should  
be manually converted */  
AS SELECT * FROM t1;
```

## RULE-11006

- Type: TODO
- Description: The clause of object type view should be manually converted.
- Original SQL Text:

```
CREATE OR REPLACE VIEW v1_1  
OF type1 UNDER v1  
AS SELECT * FROM t1;
```

- Processed SQL Text:

```
CREATE OR REPLACE VIEW v1_1  
OF type1 UNDER v1 /* [TODO] RULE-11006 : An object view must be converted  
manually */
```

AS SELECT \* FROM t1;

## RULE-11007

- Type: REMOVED
- Description: VISIBLE or INVISIBLE has been removed.
- Original SQL Text:  
CREATE OR REPLACE VIEW v1  
(c1, c2 **INVISIBLE**)  
AS SELECT \* FROM t1;
- Processed SQL Text:  
CREATE OR REPLACE VIEW v1  
(c1, c2 /\* **INVISIBLE** \*/ /\* **[REMOVED] RULE-11007 : VISIBLE or INVISIBLE is removed** \*/)  
AS SELECT \* FROM t1;

## RULE-11008

- Type: REMOVED
- Description: FORCE has been removed.
- Original SQL Text:  
CREATE OR REPLACE **FORCE** VIEW v1  
(c1, c2)  
AS SELECT \* FROM t1;
- Processed SQL Text:  
CREATE OR REPLACE /\* **FORCE** \*/ /\* **[REMOVED] RULE-11008 : FORCE has been removed** \*/ VIEW v1  
(c1, c2)  
AS SELECT \* FROM t1;

## Trigger Conversion Rules

### RULE-12002

- Version Scope: Less than the Altibase version 6.3.1.0.0
- Type: TODO
- Description: 'INSTEAD OF' should be manually converted
- Original SQL Text:  
CREATE OR REPLACE TRIGGER log\_attendance  
**INSTEAD OF** INSERT ON attendance\_view FOR EACH ROW  
BEGIN

```

IF :NEW.cnt < 2 THEN
INSERT INTO daily_log VALUES(:NEW.id, CURRENT_TIMESTAMP);
END IF;
END;

```

- Processed SQL Text:

```

CREATE OR REPLACE TRIGGER log_attendance
INSTEAD OF /* [TODO] RULE-12002 : 'INSTEAD OF' must be converted manually
*/ INSERT ON attendance_view FOR EACH ROW
BEGIN
IF :NEW.cnt < 2 THEN
INSERT INTO daily_log VALUES(:NEW.id, CURRENT_TIMESTAMP);
END IF;
END;

```

## RULE-12003

- Type: TODO
- Description: Triggers supporting multiple events must be converted manually
- Original SQL Text:

```

CREATE OR REPLACE TRIGGER trig1
BEFORE INSERT OR DELETE ON t1
BEGIN
NULL;
END;

```

- Processed SQL Text:

```

CREATE OR REPLACE TRIGGER trig1
BEFORE INSERT OR DELETE ON t1 /* [TODO] RULE-12003 : Triggers supporting
multiple events must be converted manually */
BEGIN
NULL;
END;

```

## RULE-12004

- Version Scope: Less than the Altibase version 6.3.1.0.0
- Type: TODO
- Description: AS or IS should be used regardless of that DECLARE exists or not in the PSM block.
- Original SQL Text:

```

CREATE OR REPLACE TRIGGER trig1

```

```
BEFORE INSERT ON t1
```

```
BEGIN
```

```
NULL;
```

```
END;
```

- Processed SQL Text:

```
CREATE OR REPLACE TRIGGER trig1
```

```
BEFORE INSERT ON t1
```

```
BEGIN /* [TODO] RULE-12004 : 'AS' or 'IS' should be used regardless of that  
DECLARE exists or not in the PSM block. */
```

```
NULL;
```

```
END;
```

- Version Scope: Altibase 6.3.1.0.0 ~ 6.5.1.3.7 or below
- Type: TODO
- Description: The DECLARE preceding the PSM body should be replaced with AS or IS.
- Original SQL Text:

```
CREATE OR REPLACE TRIGGER trig1
```

```
BEFORE INSERT ON t1
```

```
DECLARE
```

```
v1 NUMBER := 1;
```

```
BEGIN
```

```
NULL;
```

```
END;
```

- Processed SQL Text:

```
CREATE OR REPLACE TRIGGER trig1
```

```
BEFORE INSERT ON t1
```

```
DECLARE /* [TODO] RULE-12004 : 'AS' or 'IS' must replace 'DECLARE' that  
starts the declarative part of the block */
```

```
v1 NUMBER := 1;
```

```
BEGIN
```

```
NULL;
```

```
END;
```

## **RULE-12005**

- Type: TODO
- Description: Non-DML triggers must be converted manually
- Original SQL Text:

```
CREATE OR REPLACE TRIGGER trig1
```

## BEFORE CREATE ON DATABASE

BEGIN

NULL;

END;

- Processed SQL Text:

CREATE OR REPLACE TRIGGER trig1

**BEFORE CREATE ON DATABASE /\* [TODO] RULE-12005 : Non DML trigger must be converted manually \*/**

BEGIN

NULL;

END;

## RULE-12007

- Type: TODO
- Description: Nested tables must be converted manually
- Original SQL Text:

CREATE OR REPLACE TRIGGER trig1

INSTEAD OF DELETE ON **NESTED TABLE t1 OF v1**

BEGIN

NULL;

END;

- Processed SQL Text:

CREATE OR REPLACE TRIGGER trig1

INSTEAD OF DELETE ON **NESTED TABLE t1 OF v1 /\* [TODO] RULE-12007 : Nested table must be converted manually \*/**

BEGIN

NULL;

END;

## RULE-12008

- Type: TODO
- Description: The CALL routine clause must be converted manually
- Original SQL Text:

CREATE OR REPLACE TRIGGER trig1

AFTER DELETE ON t1

**CALL testproc1(a1, a2);**

- Processed SQL Text:

CREATE OR REPLACE TRIGGER trig1

AFTER DELETE ON t1

**CALL testproc1(a1, a2) /\* [TODO] RULE-12008 : CALL routine clause must be converted manually \*/;**

## RULE-12009

- Type: TODO
- Description: The parent row of a nested table cannot be specified.
- Original SQL Text:

CREATE OR REPLACE TRIGGER trig1

INSTEAD OF DELETE ON NESTED TABLE t1 OF v1

REFERENCING **PARENT AS parent** FOR EACH ROW

BEGIN

NULL;

END;

- Processed SQL Text:

CREATE OR REPLACE TRIGGER trig1

INSTEAD OF DELETE ON NESTED TABLE t1 OF v1

REFERENCING **PARENT AS parent /\* [TODO] RULE-12009 : Parent value of the current row cannot be specified \*/** FOR EACH ROW

BEGIN

NULL;

END;

## RULE-12010

- Type: TODO
- Description: The trigger ordering clause should be converted manually
- Original SQL Text:

CREATE OR REPLACE TRIGGER trig1

AFTER DELETE ON t1

**FOLLOWS trig2**

BEGIN

NULL;

END;

- Processed SQL Text:

CREATE OR REPLACE TRIGGER trig1

AFTER DELETE ON t1



**FOLLOWS trig2 /\* [TODO] RULE-12010 : Trigger ordering clause must be converted manually \*/**

```
BEGIN  
NULL;  
END;
```

## **RULE-12011**

- Type: CONVERTED
- Description: The omitted correlation name has been added in the REFERENCING clause.
- Original SQL Text:

```
CREATE OR REPLACE TRIGGER trig1  
AFTER INSERT ON t1 FOR EACH ROW  
  
BEGIN  
  
:new.c1 := SYSDATE;  
  
END;
```

- Processed SQL Text:  

```
CREATE OR REPLACE TRIGGER trig1  
AFTER INSERT ON t1  
  
REFERENCING NEW AS new FOR EACH ROW  
  
DECLARE  
  
BEGIN  
  
:new.c1 := SYSDATE;  
  
END;
```

## **RULE-12012**

- Type: CONVERTED
- Description: A suffix has been added to the local identifier corresponding to the reserved words of Altibase.
- Original SQL Text:

```
CREATE OR REPLACE TRIGGER trig1  
AFTER UPDATE ON t1  
  
REFERENCING NEW AS new OLD AS old FOR EACH ROW  
  
BEGIN  
  
NULL;  
  
END;
```

- Processed SQL Text:  

```
CREATE OR REPLACE TRIGGER trig1
```

AFTER UPDATE ON t1

REFERENCING NEW AS **new\_POC** OLD AS **old\_POC** FOR EACH ROW

BEGIN

NULL;

END;

## RULE-12013

- Type: REMOVED
- Description: The trigger edition clause has been removed.
- Original SQL Text:

CREATE OR REPLACE TRIGGER trig1

AFTER DELETE ON t1

**CROSSEDITION**

BEGIN

NULL;

END;

- Processed SQL Text:

CREATE OR REPLACE TRIGGER trig1

AFTER DELETE ON t1

**/\* CROSSEDITION \*/ /\* [REMOVED] RULE-12013 : Trigger edition clause is removed \*/**

BEGIN

NULL;

END;

## RULE-12014

- Type: REMOVED
- Description: The ENABLE has been removed
- Original SQL Text:

CREATE OR REPLACE TRIGGER trig1

AFTER INSERT ON t1

**ENABLE**

BEGIN

NULL;

END;

- Processed SQL Text:

CREATE OR REPLACE TRIGGER trig1

AFTER INSERT ON t1

**/\* ENABLE \*/ /\* [REMOVED] RULE-12014 : ENABLE is removed \*/**

BEGIN

NULL;

END;

## **RULE-12015**

- Type: TODO
- Description: The DISABLE should be converted manually. :
- Original SQL Text:

CREATE OR REPLACE TRIGGER trig1

AFTER DELETE ON t1

**DISABLE**

BEGIN

NULL;

END;

- Processed SQL Text:

CREATE OR REPLACE TRIGGER trig1

AFTER DELETE ON t1

**DISABLE /\* [TODO] RULE-12015 : DISABLE must be converted manually \*/**

BEGIN

NULL;

END;

## **RULE-12016**

- Type: CONVERTED
- Description: The colon preceding the alias referring to the rows defined in the REFERENCING clause has been eliminated.
- Original SQL Text:

CREATE OR REPLACE TRIGGER trig1

BEFORE INSERT ON t1 FOR EACH ROW

BEGIN

DBMS\_OUTPUT.PUT\_LINE(:new.c1);

END;

- Processed SQL Text:

CREATE OR REPLACE TRIGGER trig1

BEFORE INSERT ON t1 FOR EACH ROW

```
BEGIN  
DBMS_OUTPUT.PUT_LINE(new.c1);  
END;
```

## RULE-12017

- Type: REMOVED
- Description: The trigger label name at the end of PL/SQL block has been removed in the CREATE TRIGGER statement.
- Original SQL Text:

```
CREATE OR REPLACE TRIGGER trig1  
AFTER INSERT ON t1  
BEGIN  
NULL;  
END trig1;
```

- Processed SQL Text:

```
CREATE OR REPLACE TRIGGER trig1  
AFTER INSERT ON t1  
BEGIN  
NULL;
```

```
END /* trig1 */ /* [REMOVED] RULE-12017 : The trigger label name at the end  
of body has been removed */;
```

## Function Conversion Rules

### RULE-13001

- Version Scope: Less than the Altibase version 6.3.1.0.0
- Type: TODO
- Description: The AS LANGUAGE clause must be converted manually
- Original SQL Text:

```
CREATE OR REPLACE FUNCTION func1  
RETURN VARCHAR2
```

**AS LANGUAGE JAVA**

**NAME 'test.quote() return java.lang.String';**

- Processed SQL Text:

```
CREATE OR REPLACE FUNCTION func1  
RETURN VARCHAR2  
AS LANGUAGE JAVA
```

NAME 'test.quote() return java.lang.String' /\* [TODO] RULE-13001 : AS  
LANGUAGE clause must be converted manually \*/;

## RULE-13002

- Type: REMOVED
- Description: The AUTHID clause is removed
- Original SQL Text:

```
CREATE OR REPLACE FUNCTION func1(a1 NUMBER)  
RETURN NUMBER
```

**AUTHID CURRENT\_USER**

IS

BEGIN

RETURN a1;

END;

- Processed SQL Text:

```
CREATE OR REPLACE FUNCTION func1(a1 NUMBER)  
RETURN NUMBER
```

**/\* AUTHID CURRENT\_USER \*/ /\* [REMOVED] RULE-13002 : The invoker rights  
clause is removed \*/**

IS

BEGIN

RETURN a1;

END;

## RULE-13003

- Type: REMOVED
- Description: The PARALLEL\_ENABLE clause is removed
- Original SQL Text:

```
CREATE OR REPLACE FUNCTION func1(a1 NUMBER)  
RETURN NUMBER
```

**PARALLEL\_ENABLE**

IS

BEGIN

RETURN a1;

END;

- Processed SQL Text:

```
CREATE OR REPLACE FUNCTION func1(a1 NUMBER)
```

RETURN NUMBER

**/\* PARALLEL\_ENABLE \*/ /\* [REMOVED] RULE-13003 : PARALLEL\_ENABLE clause is removed \*/**

IS

BEGIN

RETURN a1;

END;

## **RULE-13004**

- Type: REMOVED
- Description: The RESULT\_CACHE clause is removed
- Original SQL Text:

CREATE OR REPLACE FUNCTION func1(a1 NUMBER)

RETURN NUMBER

**RESULT\_CACHE RELIES\_ON(t1, t2)**

IS

BEGIN

RETURN a1;

END;

- Processed SQL Text:

CREATE OR REPLACE FUNCTION func1(a1 NUMBER)

RETURN NUMBER

**/\* RESULT\_CACHE RELIES\_ON(t1, t2) \*/ /\* [REMOVED] RULE-13004 : RESULT\_CACHE clause is removed \*/**

IS

BEGIN

RETURN a1;

END;

## **RULE-13005**

- Type: REMOVED
- Description: DETERMINISTIC is removed
- Original SQL Text:

CREATE OR REPLACE FUNCTION tfunc1(a1 NUMBER)

RETURN NUMBER

**DETERMINISTIC**

IS

```
BEGIN
```

```
RETURN a1;
```

```
END;
```

- Processed SQL Text:

```
CREATE OR REPLACE FUNCTION func1(a1 NUMBER)
```

```
RETURN NUMBER
```

```
/* DETERMINISTIC */ /* [REMOVED] RULE-13005 : 'DETERMINISTIC' is removed  
*/
```

```
IS
```

```
BEGIN
```

```
RETURN a1;
```

```
END;
```

## **RULE-13006**

- Type: TODO
- Description: The PIPELINED keyword must be converted manually
- Original SQL Text:

```
CREATE FUNCTION getCityList RETURN tripLog_pkg.nt_city PIPELINED AS
```

```
BEGIN
```

```
FOR i IN 1..tripLog_pkg.v_cityList.LAST LOOP
```

```
PIPE ROW(tripLog_pkg.v_cityList(i));
```

```
END LOOP;
```

```
RETURN;
```

```
END;
```

- Processed SQL Text:

```
CREATE FUNCTION getCityList RETURN tripLog_pkg.nt_city PIPELINED /* [TODO]
```

```
RULE-13006 : The keyword PIPELINED must be converted manually */ AS
```

```
BEGIN
```

```
FOR i IN 1 .. tripLog_pkg.v_cityList.LAST LOOP
```

```
PIPE ROW(tripLog_pkg.v_cityList(i)) /* [TODO] RULE-32012 : The PIPE ROW  
statement must be converted manually */;
```

```
END LOOP;
```

```
RETURN;
```

```
END;
```

## RULE-13007

- Type: TODO
- Description: The PIPELINED USING/AGGREGATE USING clause must be converted manually .
- Original SQL Text:

CREATE OR REPLACE FUNCTION func1

RETURN NUMBER

**AGGREGATE USING implementation\_type;**

- Processed SQL Text:  
CREATE OR REPLACE FUNCTION func1  
RETURN NUMBER  
AGGREGATE USING implementation\_type /\* [TODO] RULE-13007 : PIPELINED USING or  
AGGRAGATE USING clause must be converted manually \*/;

## RULE-13008

- Version Scope: Altibase 6.3.1.0.0 or above
- Type: TODO
- Description: The WITH CONTEXT clause should be manually converted.
- Original SQL Text:

CREATE OR REPLACE FUNCTION func1

RETURN NUMBER IS

LANGUAGE C LIBRARY lib1 **WITH CONTEXT** PARAMETERS(CONTEXT);

- Processed SQL Text:  
CREATE OR REPLACE FUNCTION func1  
RETURN NUMBER IS  
LANGUAGE C LIBRARY lib1 **WITH CONTEXT** /\* [TODO] RULE-13008 : WITH CONTEXT  
clause must be converted manually \*/ PARAMETERS(CONTEXT);

## RULE-13009

- Version Scope: Altibase 6.3.1.0.0 or above
- Type: TODO
- Description: The AGENT IN clauue should be manually converted.
- Original SQL Text:

CREATE OR REPLACE FUNCTION func1

RETURN NUMBER IS

LANGUAGE C LIBRARY lib1 **AGENT IN(EXTPROC);**

- Processed SQL Text:  
CREATE OR REPLACE FUNCTION func1



RETURN NUMBER IS

LANGUAGE C LIBRARY lib1 **AGENT IN(EXTPROC) /\* [TODO] RULE-13009 : AGENT IN clause must be converted manually \*/;**

## RULE-13010

- Type: REMOVED
- Description: The ACCESSIBLE BY clause has been removed.
- Original SQL Text:

CREATE OR REPLACE FUNCTION func1(a1 NUMBER)

RETURN NUMBER

**ACCESSIBLE BY (TRIGGER trig1)**

IS

BEGIN

RETURN a1;

END;

- Processed SQL Text:

CREATE OR REPLACE FUNCTION func1(a1 NUMBER)

RETURN NUMBER

**/\* ACCESSIBLE BY (TRIGGER trig1) \*/ /\* [REMOVED] RULE-13010 : The ACCESSIBLE BY clause is removed \*/**

IS

BEGIN

RETURN a1;

END;

## RULE-13011

- Version Scope: Altibase 6.3.1.0.0 or later
- Type: TODO
- Description: JAVA call specification should be manually converted.
- Original SQL Text:

CREATE OR REPLACE FUNCTION func1(a1 VARCHAR2)

RETURN VARCHAR2 IS

**LANGUAGE JAVA NAME**

**'com.altibase.ex.empMgr.addEmp(java.lang.String)';**

- Processed SQL Text:

CREATE OR REPLACE FUNCTION func1(a1 VARCHAR2)

RETURN VARCHAR2 IS

## LANGUAGE JAVA NAME

'com.altibase.ex.empMgr.addEmp(java.lang.String)' /\* [TODO] RULE-13011 : Java call specification must be converted manually \*/;

## RULE-13012

- Version Scope: Altibase 6.3.1.0.0 or above
- Type: TO DO
- Description: The external parameter CONTEXT and SELF should manually converted.
- Original SQL Text:

```
CREATE OR REPLACE FUNCTION func1(a1 VARCHAR2)
```

```
RETURN NUMBER AS
```

```
LANGUAGE C LIBRARY lib1
```

```
PARAMETERS(a1, a1 LENGTH, SELF);
```

- Processed SQL Text:

```
CREATE OR REPLACE FUNCTION func1(a1 VARCHAR2)
```

```
RETURN NUMBER AS
```

```
LANGUAGE C LIBRARY lib1
```

```
PARAMETERS(a1, a1 LENGTH, SELF /* [TODO] RULE-13012 : The external parameter  
CONTEXT and SELF should be manually converted */);
```

## RULE-13013

- Version Scope: Altibase 6.3.1.0.0 or later
- Type: TODO
- Description: The properties should be manually converted except INDICATOR, LENGTH, and MAXLEN.
- Original SQL Text:

```
CREATE OR REPLACE FUNCTION func1(a1 VARCHAR2)
```

```
RETURN NUMBER AS
```

```
LANGUAGE C LIBRARY lib1
```

```
PARAMETERS(a1, a1 CHARSETID, a1 CHARSETFORM);
```

- Processed SQL Text:

```
CREATE OR REPLACE FUNCTION func1(a1 VARCHAR2)
```

```
RETURN NUMBER AS
```

```
LANGUAGE C LIBRARY lib1
```

```
PARAMETERS(a1, a1 CHARSETID /* [TODO] RULE-13013 : The property except for  
INDICATOR, LENGTH, MAXLEN must be converted manually */, a1 CHARSETFORM /*  
[TODO] RULE-13013 : The properties should be manually converted except  
INDICATOR, LENGTH, and MAXLEN */);
```

## RULE-13014

- Version Scope: Altibase 6.3.1.0.0 or later
- Type: TODO
- Description: The BY REFERENCE clause should manually converted.
- Original SQL Text:

```
CREATE OR REPLACE FUNCTION func1(a1 NUMBER)
RETURN NUMBER AS
LANGUAGE C LIBRARY lib1
PARAMETERS(a1 BY REFERENCE);
```

- Processed SQL Text:

```
CREATE OR REPLACE FUNCTION func1(a1 NUMBER)
RETURN NUMBER AS
LANGUAGE C LIBRARY lib1
PARAMETERS(a1 BY REFERENCE /* [TODO] RULE-13014 : BY REFERENCE clause must be
converted manually */);
```

## RULE-13015

- Version Scope: Altibase 6.3.1.0.0 or later
- Type: TODO
- Description: External data type of the parameters should be manually converted.
- Original SQL Text:

```
CREATE OR REPLACE FUNCTION func1(a1 NUMBER)
RETURN NUMBER AS
LANGUAGE C LIBRARY lib1
PARAMETERS(a1 OCINUMBER);
```

- Processed SQL Text:

```
CREATE OR REPLACE FUNCTION func1(a1 NUMBER)
RETURN NUMBER AS
LANGUAGE C LIBRARY lib
PARAMETERS(a1 OCINUMBER /* [TODO] RULE-13015 : External data type of the
parameters should be manually converted */);
```

## Procedure Conversion Rules

## RULE-14001

- Version Scope: Less than the Altibase version tag 6.3.1.0.0
- Type: TODO
- Description: The AS LANGUAGE clause must be converted manually
- Original SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1(a1 NUMBER)
```

```
AS LANGUAGE JAVA
```

```
NAME 'test.quote() return java.lang.String';
```

- Processed SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1(a1 INUMBER)
```

```
AS LANGUAGE JAVA
```

```
NAME 'test.quote() return java.lang.String' /* [TODO] RULE-14001 : AS  
LANGUAGE clause must be converted manually */;
```

## RULE-14002

- Type: REMOVED
- Description: The AUTHID clause is removed
- Original SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1(a1 NUMBER)
```

```
AUTHID DEFINER
```

```
IS
```

```
BEGIN
```

```
NULL;
```

```
END;
```

- Processed SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1(a1 NUMBER)
```

```
/* AUTHID DEFINER */ /* [REMOVED] RULE-14002 : AUTHID clause is removed  
*/
```

```
IS
```

```
BEGIN
```

```
NULL;
```

```
END;
```

## RULE-14003

- Version Scope : Altibase 6.3.1.0.0 or later
- Type: TODO
- Description: The WITH CONTEXT clause should manually converted.
- Original SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1 AS  
LANGUAGE C LIBRARY lib1 WITH CONTEXT;
```

- Processed SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1 AS  
LANGUAGE C LIBRARY lib1 WITH CONTEXT /* [TODO] RULE-14003 : WITH CONTEXT  
clause must be converted manually */;
```

## RULE-14004

- Version Scope : Altibase 6.3.1.0.0 or later
- Type: TODO
- Description: The AGENT IN clause should be manually converted.
- Original SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1 AS  
LANGUAGE C LIBRARY lib1 AGENT IN(EXTPROC);
```

- Processed SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1 AS  
LANGUAGE C LIBRARY lib1 AGENT IN(EXTPROC) /* [TODO] RULE-14004 : AGENT IN  
clause must be converted manually */;
```

## RULE-14005

- Type: REMOVED
- Description: The ACCESSIBLE BY clause has been removed.
- Original SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1  
ACCESSIBLE BY (TRIGGER trig1)  
IS  
BEGIN  
NULL;  
END;
```

- Processed SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1
```

**/\* ACCESSIBLE BY (TRIGGER trig1) \*/ /\* [REMOVED] RULE-14005 : The ACCESSIBLE BY clause is removed \*/**

IS

BEGIN

NULL;

END;

## **RULE-14006**

- Version Scope : Altibase 6.3.1.0.0 or later
- Type: TODO
- Description: JAVA call specification should be manually converted.
- Original SQL Text:

CREATE OR REPLACE PROCEDURE proc1(a1 VARCHAR2) AS

**LANGUAGE JAVA NAME**

**'com.altibase.ex.empMgr.addEmp(java.lang.String)';**

- Processed SQL Text:

CREATE OR REPLACE PROCEDURE proc1(a1 VARCHAR2) AS

**LANGUAGE JAVA NAME**

**'com.altibase.ex.empMgr.addEmp(java.lang.String)';**

**/\* [TODO] RULE-14006 : Java call specification should be converted manually \*/**

## **RULE-14007**

- Version Scope : Altibase 6.3.1.0.0 or later
- Type: TODO
- Description: The parameters CONTEXT and SELF should be manually converted.
- Original SQL Text

CREATE OR REPLACE PROCEDURE proc1(a1 NUMBER) AS

LANGUAGE C LIBRARY lib1

PARAMETERS(a1, a1 LENGTH, **SELF**);

- Processed SQL Text:

CREATE OR REPLACE PROCEDURE proc1(a1 NUMBER) AS

LANGUAGE C LIBRARY lib1

PARAMETERS(a1, a1 LENGTH, **SELF /\* [TODO] RULE-14007 : The parameters CONTEXT and SELF should be manually converted \*/**);

## RULE-14008

- Version Scope : Altibase 6.3.1.0.0 or later
- Type: TODO
- Description: The properties should be manually converted except INDICATOR, LENGTH, and MAXLEN.
- Original SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1(a1 NUMBER) AS  
LANGUAGE C LIBRARY lib1  
PARAMETERS(a1, a1 CHARSETID, a1 CHARSETFORM);
```

- Processed SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1(a1 NUMBER) AS  
LANGUAGE C LIBRARY lib1  
PARAMETERS(a1, a1 CHARSETID /* [TODO] RULE-14008 : The property except for  
INDICATOR, LENGTH, MAXLEN must be converted manually */, a1 CHARSETFORM /*  
[TODO] RULE-14008 : The property except for INDICATOR, LENGTH, MAXLEN must be  
converted manually */);
```

## RULE-14009

- Version Scope : Altibase 6.3.1.0.0 or later
- Type: TODO
- Description: The BY REFERENCE clause should be manually converted.
- Original SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1(a1 NUMBER) AS  
LANGUAGE C LIBRARY lib1  
PARAMETERS(a1 BY REFERENCE);
```

- Processed SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1(a1 NUMBER) AS  
LANGUAGE C LIBRARY lib1  
PARAMETERS(a1 BY REFERENCE /* [TODO] RULE-14009 : BY REFERENCE clause must be  
converted manually */);
```

## RULE-14010

- Version Scope : Altibase 6.3.1.0.0 or later
- Type: TODO
- Description: External data type of the parameters should be manually converted.
- Original SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1(a1 NUMBER) AS
```

LANGUAGE C LIBRARY lib1

PARAMETERS(a1 OCINUMBER);

- Processed SQL Text:

CREATE OR REPLACE PROCEDURE proc1(a1 NUMBER) AS

LANGUAGE C LIBRARY lib1

PARAMETERS(a1 OCINUMBER /\* [TODO] RULE-14010 : External data type of the parameters should be manually converted \*/);

## Materialized View Conversion Rules

### RULE-15004

- Type: REMOVED
- Description: All clauses between the column alias clause and subquery are removed
- Original SQL Text:

CREATE MATERIALIZED VIEW mview1

**ORGANIZATION HEAP PCTFREE 10 PCTUSED 40 INITRANS 1 MAXTRANS 255**

**NOCOMPRESS LOGGING**

**STORAGE(INITIAL 65536 NEXT 1048576 MINEXTENTS 1 MAXEXTENTS 2147483645**

**PCTINCREASE 0 FREELISTS 1 FREELIST GROUPS 1 BUFFER\_POOL DEFAULT)**

**TABLESPACE test**

**BUILD IMMEDIATE**

**USING INDEX PCTFREE 10 INITRANS 2 MAXTRANS 255**

**STORAGE(INITIAL 65536 NEXT 1048576 MINEXTENTS 1 MAXEXTENTS 2147483645**

**PCTINCREASE 0 FREELISTS 1 FREELIST GROUPS 1 BUFFER\_POOL DEFAULT)**

**TABLESPACE tbs1**

**REFRESH FAST ON DEMAND**

**WITH PRIMARY KEY USING DEFAULT LOCAL ROLLBACK SEGMENT**

**USING ENFORCED CONSTRAINTS FOR UPDATE DISABLE QUERY REWRITE**

AS SELECT \* FROM t1;

- Processed SQL Text:

CREATE MATERIALIZED VIEW mview1

**/\* ORGANIZATION HEAP PCTFREE 10 PCTUSED 40 INITRANS 1 MAXTRANS 255**

**NOCOMPRESS LOGGING**

**STORAGE(INITIAL 65536 NEXT 1048576 MINEXTENTS 1 MAXEXTENTS 2147483645**

**PCTINCREASE 0 FREELISTS 1 FREELIST GROUPS 1 BUFFER\_POOL DEFAULT)**

**TABLESPACE test**

**BUILD IMMEDIATE**



USING INDEX PCTFREE 10 INITRANS 2 MAXTRANS 255

STORAGE(INITIAL 65536 NEXT 1048576 MINEXTENTS 1 MAXEXTENTS 2147483645

PCTINCREASE 0 FREELISTS 1 FREELIST GROUPS 1 BUFFER\_POOL DEFAULT)

TABLESPACE tbs1

REFRESH FAST ON DEMAND

WITH PRIMARY KEY USING DEFAULT LOCAL ROLLBACK SEGMENT

USING ENFORCED CONSTRAINTS FOR UPDATE DISABLE QUERY REWRITE \*/ /\* [REMOVED]

**RULE-15004 : All clauses between column alias clause and subquery are removed**  
\*/

AS SELECT \* FROM t1;

## Package Conversion Rules

### RULE-16001

- Type: REMOVED
- Description: The AUTHID clause is removed
- Original SQL Text:

```
CREATE OR REPLACE PACKAGE empMgr_pkg AUTHID CURRENT_USER AS PROCEDURE
delete(p_id INTEGER);
```

```
END;
```

- Processed SQL Text:

```
CREATE OR REPLACE PACKAGE empMgr_pkg /* AUTHID CURRENT_USER */ /* [REMOVED]
```

**RULE-16001 : The invoker rights clause is removed \*/ AS PROCEDURE delete(p\_id**  
INTEGER);

```
END;
```

### RULE-16002

- Type: REMOVED
- Description: The ACCESSIBLE BY clause has been removed.
- Original SQL Text:

```
CREATE OR REPLACE PACKAGE pkg1
```

**ACCESSIBLE BY (TRIGGER trig1)**

```
AS
```

```
END;
```

- Processed SQL Text:

```
CREATE OR REPLACE PACKAGE pkg1
```

**/\* ACCESSIBLE BY (TRIGGER trig1) \*/ /\* [REMOVED] RULE-16002 : The**  
**ACCESSIBLE BY clause is removed \*/**

```
AS
```

END;

## Library Conversion Rules

### RULE-17001

- Type: REMOVED
- Description: The AGENT clause is removed
- Original SQL Text:  

```
CREATE OR REPLACE LIBRARY lib1 AS  
'${ORACLE_HOME}/lib/test_lib.so' AGENT 'test.rule.no_17001.com';
```
- Processed SQL Text:  

```
CREATE OR REPLACE LIBRARY lib1 AS  
'${ORACLE_HOME}/lib/test_lib.so' /* AGENT 'test.rule.no_17001.com' */ /*  
[REMOVED] RULE-17001 : Agent clause is removed */;
```

### RULE-17002

- Type: REMOVED
- Description: The UNTRUSTED keyword is removed
- Original SQL Text:  

```
CREATE OR REPLACE LIBRARY lib1 UNTRUSTED  
AS '${ORACLE_HOME}/lib/test_lib.so';
```
- Processed SQL Text:  

```
CREATE OR REPLACE LIBRARY lib1 /* UNTRUSTED */ /* [REMOVED] RULE-17002 :  
The keyword UNTRUSTED is removed */  
AS '${ORACLE_HOME}/lib/test_lib.so';
```

## DML Conversion Rules

### RULE-20001

- Type: TODO
- Description: The Flashback Query clause should be manually converted.
- Original SQL Text:  

```
CREATE OR REPLACE VIEW v1 AS  
SELECT * FROM t1 CROSS JOIN t2 VERSIONS BETWEEN TIMESTAMP MINVALUE AND  
MAXVALUE;
```
- Processed SQL Text:  

```
CREATE OR REPLACE VIEW v1  
AS
```

SELECT \* FROM t1 CROSS JOIN t2 **VERSIONS BETWEEN TIMESTAMP MINVALUE AND MAXVALUE** /\* [TODO] **RULE-20001 : Flashback query clause must converted manually** \*/;

## RULE-20006

- Type: TODO
- Description: DBlink must be converted manually

- Original SQL Text:

CREATE OR REPLACE VIEW v1

AS

SELECT \* FROM t1@remote;

- Processed SQL Text:

CREATE OR REPLACE VIEW v1

AS

SELECT \* FROM t1@**remote** /\* [TODO] **RULE-20006 : DBlink must be converted manually** \*/;

## RULE-20007

- Version Scope: Less than the Altibase version tag 6.5.1.0.0
- Type: TODO
- Description: The GROUPING SETS clause must be converted manually

- Original SQL Text:

CREATE OR REPLACE VIEW v1

AS

SELECT c1, c2, c3, c4, SUM( c5 )

FROM t1

GROUP BY **GROUPING SETS**((c1, c2, c3, c4), (c1, c2, c3), (c3, c4));

- Processed SQL Text:

CREATE OR REPLACE VIEW r1

AS

SELECT c1, c2, c3, c4, SUM(c5)

FROM t1

GROUP BY **GROUPING SETS**( (c1, c2, c3, c4), (c1, c2, c3), (c3, c4) ) /\* [TODO] **RULE-20007 : GROUPING SETS clause must be converted manually** \*/;

## RULE-20009

- Version Scope: Less than the Altibase version tag 6.3.1.0.0
- Type: TODO
- Description: The START WITH clause following the CONNECT BY clause must be converted manually
- Original SQL Text:

```
CREATE OR REPLACE VIEW v1
```

```
AS
```

```
SELECT c1, c2, c3, c4 FROM t1 CONNECT BY c1 = c2 START WITH c1 = c4;
```

- Processed SQL Text:

```
CREATE OR REPLACE VIEW v1
```

```
AS
```

```
SELECT c1, c2, c3, c4 FROM t1 CONNECT BY c1 = c2 START WITH c1 = c4 /* [TODO]
```

```
RULE-20009 : START WITH clause after CONNECT BY clause must be converted manually */;
```

## RULE-20010

- Version Scope: Less than the Altibase version tag 6.3.1.0.0
- Type: TODO
- Description: The IGNORE LOOP should be placed after the following condition to convert NOCYCLE.
- Original SQL Text:

```
CREATE OR REPLACE VIEW v1
```

```
AS
```

```
SELECT c1, c2, c3, c4
```

```
FROM t1 CONNECT BY NOCYCLE c1 = c2 START WITH c1 = c4;
```

- Processed SQL Text:

```
CREATE OR REPLACE VIEW v1
```

```
AS
```

```
SELECT c1, c2, c3, c4
```

```
FROM t1 CONNECT BY NOCYCLE /* [TODO] RULE-20010 : To convert 'NOCYCLE',  
'IGNORE LOOP' should come after the following condition */ c1 = c2 START WITH  
c1 = c4;
```

## RULE-20011

- Type: REMOVED
- Description: All hints are removed
- Original SQL Text:  

```
CREATE OR REPLACE VIEW v1  
AS  
SELECT /*+ORDERED */ * FROM t1;
```
- Processed SQL Text:  

```
CREATE OR REPLACE VIEW v1  
AS  
SELECT * FROM t1;
```

## RULE-20012

- Version Scope: Less than the Altibase version tag 6.1.1.0.0
- Type: TODO
- Description: The PIVOT clause must be reviewed
- Original SQL Text:  

```
CREATE OR REPLACE VIEW xmlView  
AS  
SELECT *  
FROM (SELECT d.dname, e.sex FROM departments d, employees e WHERE d.dno = e.dno)  
PIVOT XML (COUNT(*) FOR sex IN (ANY))  
ORDER BY dname;
```
- Processed SQL Text:  

```
CREATE OR REPLACE VIEW xmlView  
AS  
SELECT *  
FROM (SELECT d.dname, e.sex FROM departments d, employees e WHERE d.dno = e.dno)  
PIVOT XML (COUNT(*) FOR sex IN (ANY)) /* [TODO] RULE-20012 : PIVOT clause  
must be reviewed */  
ORDER BY dname;
```

## RULE-20013

- Version Scope: Less than the Altibase version tag 6.5.1.0.0
- Type: TODO
- Description: The UNPIVOT clause must be reviewed
- Original SQL Text:

```
CREATE OR REPLACE VIEW v1
AS
SELECT * FROM t1
UNPIVOT (c5 FOR c2 IN (c3 AS 'no', c4 AS 'name'))
ORDER BY c1, c2;
```

- Processed SQL Text:

```
CREATE OR REPLACE VIEW v1
AS
SELECT * FROM t1
UNPIVOT (c5 FOR c2 IN (c3 AS 'no', c4 AS 'name')) /* [TODO] RULE-20013 :
UNPIVOT clause must be reviewed */
ORDER BY c1, c2;
```

## RULE-20014

- Type: CONVERTED
- Description: Schema names are removed
- Original SQL Text:

```
CREATE OR REPLACE PROCEDURE testuser1.proc1(a1 NUMBER)
AS
BEGIN
INSERT INTO testuser1.t1 VALUES(1, 2, 3);
UPDATE testuser2.t1 SET c1 =3, c2 = c2 + 4, c3 = 9 WHERE c4 = 12;
DELETE FROM TESTUSER1.t1 WHERE c4 = 12;
SELECT * INTO :cur1, :cur2 FROM "TEST_USER1".t1;
SELECT * INTO :cur1, :cur2 FROM "Test_User1".t1;
END;
```

- Processed SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1(a1 NUMBER)
AS
BEGIN
INSERT INTO t1 VALUES(1, 2, 3);
UPDATE testuser2.t1 SET c1 =3, c2 = c2 + 4, c3 = 9 WHERE c4 = 12;
DELETE FROM t1 WHERE C4 = 12;
SELECT * INTO :cur1, :cur2 FROM t1;
SELECT * INTO :cur1, :cur2 FROM "Test_User1".t1;
END;
```

## RULE-20015

- Version Scope: Less than the Altibase version tag 6.3.1.0.0
- Type: TODO
- Description: The RETURNING clause must be converted manually
- Original SQL Text:

```
CREATE FUNCTION deleteMenu(p_menuName IN VARCHAR2) RETURN INTEGER
AS
v_totalCnt INTEGER;
BEGIN
SELECT COUNT(*) INTO v_totalCnt FROM menus;
DELETE FROM menus WHERE name = p_menuName RETURNING v_totalCnt - COUNT(*)
INTO v_totalCnt;
RETURN v_totalCnt;
END;
```

- Processed SQL Text:

```
CREATE FUNCTION deleteMenu(p_menuName IN VARCHAR(32000))
RETURN INTEGER
AS
v_totalCnt INTEGER;
BEGIN
SELECT COUNT(*) INTO v_totalCnt FROM menus;
DELETE FROM menus WHERE name = p_menuName RETURNING v_totalCnt - COUNT(*)
INTO v_totalCnt; /* [TODO] RULE-20015 : The RETURNING clause must be converted
manually */;
RETURN v_totalCnt;
END;
```

## RULE-20016

- Type: TODO
- Description: The CONNECT\_BY\_ISCYCLE pseudo-column should be manually converted.
- Original SQL Text:

```
CREATE OR REPLACE VIEW v1
AS
SELECT c1,
CONNECT_BY_ISCYCLE "IsCycle",
LEVEL,
SYS_CONNECT_BY_PATH(c1, '/') "Path"
```

```
FROM t1
WHERE LEVEL <= 3
START WITH c2 = 100
CONNECT BY PRIOR c2 = c3 AND LEVEL <= 4;
```

- Processed SQL Text:

```
CREATE OR REPLACE VIEW v1
AS
SELECT c1,
CONNECT_BY_ISCYCLE "IsCycle" /* [TODO] RULE-20016 : The CONNECT_BY_ISCYCLE
pseudocolumn must be converted manually */,
LEVEL,
SYS_CONNECT_BY_PATH(c1, '/') "Path"
FROM t1
WHERE LEVEL <= 3
START WITH c2 = 100
CONNECT BY PRIOR c2 = c3 AND LEVEL <= 4;
```

## RULE-20017

- Version Scope: Altibase 6.3.1.1.7 or earlier
- Type: REMOVED
- Description: NULLS FIRST and NULLS LAST are removed
- Original SQL Text:

```
CREATE OR REPLACE VIEW v1
AS
SELECT c1,
RANK() OVER (ORDER BY c1 NULLS LAST)
FROM t1
ORDER BY c1 NULLS FIRST;
```

- Processed SQL Text:

```
CREATE OR REPLACE VIEW v1
AS
SELECT c1,
RANK() OVER (ORDER BY c1 /* NULLS LAST */ /* [REMOVED] RULE-20017 : 'NULLS
FIRST' and 'NULLS LAST' are removed */)
FROM t1
ORDER BY c1 /* NULLS LAST */ /* [REMOVED] RULE-20017 : 'NULLS FIRST' and
'NULLS LAST' are removed */;
```



## RULE-20019

- Type: REMOVED
- Description: The Subquery restriction clause has been removed.
- Original SQL Text:

```
CREATE OR REPLACE VIEW v1  
AS  
SELECT * FROM (SELECT * FROM t2 WITH READ ONLY) t1;
```

- Processed SQL Text:

```
CREATE OR REPLACE VIEW v1  
AS  
SELECT * FROM (SELECT * FROM t2 /* WITH READ ONLY */ /* [REMOVED]  
RULE-20019 : Restriction clause is removed */) t1;
```

## RULE-20020

- Type: TODO
- Description: An inner join clause that is a CROSS or NATURAL INNER join must be converted manually
- Original SQL Text:

```
CREATE OR REPLACE VIEW v1  
AS  
SELECT * FROM (SELECT * FROM t1) CROSS JOIN t2;
```

- Processed SQL Text:

```
CREATE OR REPLACE VIEW v1  
AS  
SELECT * FROM (SELECT * FROM t1) CROSS JOIN t2 /* [TODO] RULE-20020 : A  
CROSS or NATURAL INNER join must be converted manually */;
```

## RULE-20021

- Type: TODO
- Description: The USING clause in a join should be manually converted.
- Original SQL Text:

```
CREATE OR REPLACE VIEW v1  
AS  
SELECT c1, c2 FROM t1 JOIN t2 USING(c1, c2);
```

- Processed SQL Text:

```
CREATE OR REPLACE VIEW v1  
AS
```

SELECT c1, c2 FROM t1 JOIN t2 USING(c1, c2) /\* [TODO] RULE-20021 : USING  
clause in a join must be converted manually \*/;

## RULE-20022

- Type: TODO
- Description: A NATURAL type outer join clause must be converted manually
- Original SQL Text:

```
CREATE VIEW sales_view  
AS  
SELECT * FROM log_guest NATURAL FULL OUTER JOIN log_sales  
ORDER BY datetime;
```

- Processed SQL Text:

```
CREATE VIEW sales_view AS  
SELECT * FROM log_guest NATURAL FULL OUTER JOIN log_sales /* [TODO]  
RULE-20022 : NATURAL type outer join clause must be converted manually */  
ORDER BY datetime;
```

## RULE-20023

- Type: CONVERTED
- Description: The UNIQUE is converted
- Original SQL Text:

```
CREATE OR REPLACE VIEW v1  
AS  
SELECT UNIQUE c1 FROM t1;
```

- Processed SQL Text:

```
CREATE OR REPLACE VIEW v1  
AS  
SELECT DISTINCT c1 FROM t1;
```

## RULE-20028

- Type: CONVERTED
- Description: Double quotations are removed. However, in the reconcile "Unacceptable Name" step, if the "Use Double-quoted Identifier" option is selected for an object that requires double quotes in the name, the quotes for the name are not removed.
- Original SQL Text:

```
CREATE OR REPLACE VIEW "USER1"."V1" ("A1")  
AS  
SELECT "CODE" "A1" FROM "T1"
```

UNION ALL

SELECT code A1 FROM T2

UNION ALL

SELECT "no" "A1" FROM "T3" WHERE "C6" = '2';

- Processed SQL Text:

CREATE OR REPLACE VIEW USER1.V1(A1)

AS

SELECT CODE A1 FROM T1

UNION ALL

SELECT code A1 FROM T2

UNION ALL

SELECT no A1 FROM T3 WHERE C6 = '2';

## **RULE-20029**

- Type: CONVERTED
- Description: The global identifier that is an Altibase keyword is converted by appending a postfix
- Original SQL Text:

CREATE PROCEDURE open(p\_objName VARCHAR2, p\_objType VARCHAR2)

AS

v\_ddl VARCHAR2(200) := 'CREATE ' || p\_objType || ' ' || p\_objName;

BEGIN

CASE p\_objType

WHEN 'TABLE' THEN v\_ddl := v\_ddl || ' (c1 INTEGER);

WHEN 'VIEW' THEN v\_ddl := v\_ddl || ' AS SELECT \* FROM dual';

END CASE;

DBMS\_OUTPUT.PUT\_LINE(v\_ddl);

EXECUTE IMMEDIATE v\_ddl;

END;

- Processed SQL Text:

CREATE PROCEDURE open\_POC(p\_objName VARCHAR2, p\_objType VARCHAR2)

AS

v\_ddl VARCHAR2(200) := 'CREATE' || p\_objType || ' ' || p\_objName;

BEGIN

CASE p\_objType

WHEN 'TABLE' THEN v\_ddl := v\_ddl || ' (c1 INTEGER);

WHEN 'VIEW' THEN v\_ddl := v\_ddl || ' AS SELECT \* FROM dual';

```

END CASE;

DBMS_OUTPUT.PUT_LINE(v_ddl);

EXECUTE IMMEDIATE v_ddl;

END;

```

## RULE-20030

- Version Scope: Greater than or equal to the Altibase version tag 6.5.1.0.0
- Type: TODO
- Description: Window functions with the GROUPING SETS clause must be converted manually
- Original SQL Text:

```

CREATE OR REPLACE VIEW v1 AS SELECT c1, c2, SUM(c3), RANK() OVER(ORDER BY c1)
FROM t1 GROUP BY GROUPING SETS(c1, c2);

```

- Processed SQL Text:
- ```

CREATE OR REPLACE VIEW v1 AS SELECT c1, c2, SUM(c3), RANK() OVER(ORDER BY c1)
/* [TODO] RULE-20030 : Window functions with the GROUPING SETS clause must be
convert manually. */ FROM t1 GROUP BY GROUPING SETS(c1, c2);

```

## RULE-20031

- Version Scope: Greater than or equal to the Altibase version tag 6.5.1.0.0
- Type: TODO
- Description: Multiple GROUPING SETS clauses must be converted manually
- Original SQL Text:

```

CREATE VIEW mgr_view
AS
SELECT mgr, job, comm, deptno, SUM(sal) FROM emp GROUP BY
GROUPING SETS(job), GROUPING SETS(mgr, deptno), GROUPING SETS(comm);

```

- Processed SQL Text:
- ```

CREATE VIEW mgr_view
AS
SELECT mgr, job, comm, deptno, SUM(sal) FROM emp GROUP BY
GROUPING SETS(job), GROUPING SETS(mgr, deptno), GROUPING SETS(comm) /* [TODO]
RULE-20031 : Multiple GROUPING SETS clauses must be converted manually. */;

```

## RULE-20043

- Type: REMOVED
- Description: The EDITIONING, EDITIONABLE, and NONEDITIONABLE properties have been removed.

- Original SQL Text:

```
CREATE OR REPLACE EDITIONABLE PROCEDURE proc1 AS

BEGIN

NULL;

END;
```

- Processed SQL Text:

```
CREATE OR REPLACE /* EDITIONABLE */ /* [REMOVED] RULE-20043 : The  
EDITIONING, EDITIONABLE, and NONEDITIONABLE properties have been removed */  
PROCEDURE proc1 AS

BEGIN

NULL;

END;
```

## **RULE-20044**

- Type: TODO
- Description: The partition extension clause defining values of partition key should be manually converted.
- Original SQL Text:

```
CREATE OR REPLACE VIEW v1 AS

SELECT *

FROM t1 PARTITION FOR ('QA', 'RND');
```

- Processed SQL Text:

```
CREATE OR REPLACE VIEW v1 AS

SELECT *

FROM t1 PARTITION FOR ('QA', 'RND') /* [TODO] RULE-20052 : Query partition  
clause must be converted manually */ /* [TODO] RULE-20044 : The partition  
extension clause specifying key value must be converted manually */;
```

## **RULE-20045**

- Version Scope: Altibase 6.3.1.0.0 or later
- Type: TODO
- Description: The alias of a subquery column in the WITH clause should be converted manually.
- Original SQL Text:

```
CREATE OR REPLACE VIEW v1 AS

WITH t1(c1, c2) AS (SELECT * FROM TABLE(func1))

SELECT * FROM t1;
```

- Processed SQL Text:

```
CREATE OR REPLACE VIEW v1 AS
```

WITH t1(c1, c2) /\* [TODO] **RULE-20045 : The column alias for subquery in the with clause must be converted manually** \*/ AS (SELECT \* FROM TABLE(func1))  
SELECT \* FROM t1;

## RULE-20046

- Version Scope: Greater than or equal to the Altibase version tag 6.1.1.0.0
- Type: TODO
- Description: The XML of PIVOT clause should be manually converted.
- Original SQL Text:  
CREATE OR REPLACE VIEW v1 AS  
SELECT \*  
FROM t1 PIVOT **XML** (SUM(c1) FOR c2 IN (ANY));
- Processed SQL Text:  
CREATE OR REPLACE VIEW v1 AS  
SELECT \*  
FROM t1 PIVOT **XML /\* [TODO] RULE-20046 : The XML keyword of the pivot clause must be converted manually \*/** (SUM(c1) FOR c2 IN (ANY));

## RULE-20047

- Version Scope: Greater than or equal to the Altibase version tag 6.1.1.0.0
- Type: TODO
- Description: ANY or a subquery declared in the pivot\_in\_clause should be manually converted.
- Original SQL Text:  
CREATE OR REPLACE VIEW v1 AS  
SELECT \*  
FROM t1 PIVOT XML (SUM(c1) FOR c2 IN (**ANY**));
- Processed SQL Text:  
CREATE OR REPLACE VIEW v1 AS  
SELECT \*  
FROM t1 PIVOT XML (SUM(c1) FOR c2 IN (**ANY /\* [TODO] RULE-20047 : The ANY keyword or a subquery in the pivot\_in\_clause must be converted manually \*/**));

## RULE-20048

- Type: TODO
- Description: The SMAPLE clause should be manually converted.
- Original SQL Text:  
CREATE OR REPLACE VIEW v1 AS  
SELECT \*

FROM t1 **SAMPLE(50)**;

- Processed SQL Text:

CREATE OR REPLACE VIEW v1 AS

SELECT \*

FROM t1 **SAMPLE(50) /\* [TODO] RULE-20048 : The sample clause must be converted manually \*/;**

## RULE-20049

- Type: TODO
- Description: The ROW LIMITING should be converted into the LIMIT clause.
- Original SQL Text:

CREATE OR REPLACE VIEW v1 AS

SELECT \*

FROM t1 **OFFSET 1 ROW**;

- Processed SQL Text:

CREATE OR REPLACE VIEW v1 AS

SELECT \*

FROM t1 **OFFSET 1 ROW /\* [TODO] RULE-20049 : The row limiting clause must be converted to the limit clause \*/;**

## RULE-20050

- Type: TODO
- Description: The SKIP LOCKED in the FOR UPDATE clause should be manually converted.
- Original SQL Text:

CREATE OR REPLACE PROCEDURE proc1 AS

v1 NUMBER := 1;

CURSOR cur1 IS SELECT c1 FROM t1 FOR UPDATE **SKIP LOCKED**;

BEGIN

OPEN cur1;

LOOP

FETCH cur1 INTO v1;

EXIT WHEN cur1%NOTFOUND;

DBMS\_OUTPUT.PUT\_LINE('v1: ' || v1);

END LOOP;

CLOSE cur1;

END;

- Processed SQL Text:

```

CREATE OR REPLACE PROCEDURE proc1 AS
v1 NUMBER := 1;

CURSOR cur1 IS SELECT c1 FROM t1 FOR UPDATE SKIP LOCKED /* [TODO] RULE-20050
: SKIP LOCKED in the FOR UPDATE clause must be converted manually */;

BEGIN

OPEN cur1;

LOOP

FETCH cur1 INTO v1;

EXIT WHEN cur1%NOTFOUND;

DBMS_OUTPUT.PUT_LINE('v1: ' || v1);

END LOOP;

CLOSE cur1;

END;

```

## RULE-20051

- Type: TODO
- Description: OF...column in the FOR UPDATE clause should be manually converted.
- Original SQL Text:

```

CREATE OR REPLACE PROCEDURE proc1 AS
v1 NUMBER := 1;

CURSOR cur1 IS SELECT c1 FROM t1 FOR UPDATE OF c1;

BEGIN

OPEN cur1;

LOOP

FETCH cur1 INTO v1;

EXIT WHEN cur1%NOTFOUND;

DBMS_OUTPUT.PUT_LINE('v1: ' || v1);

END LOOP;

CLOSE cur1;

END;

```

- Processed SQL Text:

```

CREATE OR REPLACE PROCEDURE proc1 AS
v1 NUMBER := 1;

CURSOR cur1 IS SELECT c1 FROM t1 FOR UPDATE OF c1 /* [TODO] RULE-20051 : OF
... column clause in the FOR UPDATE clause must be converted manually */;

BEGIN

OPEN cur1;

```



```

LOOP
FETCH cur1 INTO v1;
EXIT WHEN cur1%NOTFOUND;
DBMS_OUTPUT.PUT_LINE('v1: ' || v1);
END LOOP;
CLOSE cur1;
END;

```

## RULE-20052

- Type: TODO
- Description: The query partition clause should be manually converted.
- Original SQL Text:

```

CREATE OR REPLACE VIEW v1 AS
SELECT *
FROM t1 LEFT OUTER JOIN t2 PARTITION BY (10) ON t1.c2 = t2.c2;

```

- Processed SQL Text:

```

CREATE OR REPLACE VIEW v1 AS
SELECT *
FROM t1 LEFT OUTER JOIN t2 PARTITION BY (10) /* [TODO] RULE-20052 : Query
partition clause must be converted manually */ ON t1.c2 = t2.c2;

```

## RULE-20053

- Version Scope: Greater than or equal to the Altibase version tag 6.3.1.0.0
- Type: TODO
- Description: The WHERE clause in the MERGE statement should be manually converted.
- Original SQL Text:

```

CREATE OR REPLACE PROCEDURE proc1 AS
BEGIN
MERGE INTO t1 USING t2 ON (t1.c1 = t2.c1)
WHEN MATCHED THEN UPDATE SET t1.c2 = t2.c2 WHERE t1.c1 = 10;
END;

```

- Processed SQL Text:

```

CREATE OR REPLACE VIEW v1 AS
BEGIN
MERGE INTO t1 USING t2 ON (t1.c1 = t2.c1)
WHEN MATCHED THEN UPDATE SET t1.c2 = t2.c2 WHERE t1.c1 = 10 /* [TODO]
RULE-20053 : Where clause of MERGE statement must be converted manually */;

```

END;

## RULE-20054

- Type: REMOVED
- Description: The error logging clause has been removed.
- Original SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1 AS  
BEGIN  
INSERT INTO t1 VALUES('6.12') LOG ERRORS;  
END;
```

- Processed SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1 AS  
BEGIN  
INSERT INTO t1 VALUES('6.12') /* LOG ERRORS */ /* [REMOVED] RULE-20054 :  
The error logging clause is removed */;  
END;
```

## RULE-20055

- Version Scope: Greater than or equal to the Altibase version tag 6.3.1.0.0
- Type: TODO
- Description: The DELETE WHERE clause in the MERGE statement should be manually converted.
- Original SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1 AS  
BEGIN  
MERGE INTO t1 USING t2 ON (t1.c1 = t2.c1)  
WHEN MATCHED THEN UPDATE SET t1.c2 = t2.c2 DELETE t1.c1 = 11;  
END;
```

- Processed SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1 AS  
BEGIN  
MERGE INTO t1 USING t2 ON (t1.c1 = t2.c1)  
WHEN MATCHED THEN UPDATE SET t1.c2 = t2.c2 DELETE WHERE t1.c1 = 11 /* [TODO]  
RULE-20055 : The DELETE WHERE clause in MERGE statement must be converted  
manually */  
END;
```

## RULE-20056

- Type: TODO
- Description: Inserting of record type variables should be manually converted.
- Original SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1(a1 t1%ROWTYPE) AS  
BEGIN  
INSERT INTO t1 VALUES a1;  
END;
```

- Processed SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1(a1 t1%ROWTYPE) AS  
BEGIN  
INSERT INTO t1 VALUES a1 /* [TODO] RULE-20056 : Record variable insert must  
be converted manually */;  
END;
```

## RULE-20057

- Type: TODO
- Description: Conditional insert clause must be converted manually.
- Original SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1 AS  
BEGIN  
INSERT  
WHEN team = 'UX' THEN INTO emp_ux  
ELSE INTO emp_etc SELECT * FROM employees;  
END;
```

- Processed SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1 AS  
BEGIN  
INSERT  
WHEN team = 'UX' THEN INTO emp_ux  
ELSE INTO emp_etc SELECT * FROM employees; /* [TODO] RULE-20057 :  
Conditional insert clause must be converted manually */  
END;
```

## RULE-20058

- Type: TODO
- Description: The CURRENT OF clause in the WHERE clause should be manually converted.
- Original SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1 AS
c1 NUMBER;
CURSOR cur1 IS SELECT c1 FROM t1 FOR UPDATE;
BEGIN
OPEN cur1;
LOOP
FETCH cur1 INTO c1;
IF c1 > 10 THEN
DELETE FROM t1 WHERE CURRENT OF cur1;
END IF;
EXIT WHEN cur1%NOTFOUND;
END LOOP;
CLOSE cur1;
END;
```

- Processed SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1 AS
c1 NUMBER;
CURSOR cur1 IS SELECT c1 FROM t1 FOR UPDATE;
BEGIN
OPEN cur1;
LOOP
FETCH cur1 INTO c1;
IF c1 > 10 THEN
DELETE FROM t1 WHERE CURRENT OF cur1 /* [TODO] RULE-20058 : 'CURRENT OF'
clause in the WHERE clause must be converted manually */;
END IF;
EXIT WHEN cur1%NOTFOUND;
END LOOP;
CLOSE cur1;
END;
```

## RULE-20059

- Version Scope: Altibase version tag 6.5.1.0.0 or earlier
- Type: TODO
- Description: The TABLE function should be manually converted.
- Original SQL Text:

```
CREATE OR REPLACE VIEW v1 AS  
SELECT *  
FROM TABLE(func1('ALTIBASE'));
```

- Processed SQL Text:  
CREATE OR REPLACE VIEW v1 AS  
SELECT \*  
FROM TABLE(func1('ALTIBASE')) /\* [TODO] RULE-20059 : Table function must be converted manually \*/;

- Version Scope: Altibase version tag 6.5.1.0.0 or later
- Type: TODO
- Description: DML(INSERT, DELET, and UPDATE) used in the TABLE funtions should be manually converted.
- Original SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1 AS  
BEGIN  
DELETE FROM TABLE(SELECT c2 FROM t1) t WHERE t.c1 = 1;  
END;
```

- Processed SQL Text:  
CREATE OR REPLACE PROCEDURE proc1 AS  
BEGIN  
DELETE FROM TABLE(SELECT c2 FROM t1) t /\* [TODO] RULE-20059 : The TABLE function with DML(insert, delete, update) must be converted manually \*/ WHERE t.c1 = 1;  
END;

## RULE-20060

- Version Scope: Altibase version tag 6.5.1.0.0 or later
- Type: TODO
- Description: The (+) operator should be manually converted.
- Original SQL Text:

```
CREATE OR REPLACE VIEW v1 AS  
SELECT t1.c1, t1_c2.c2
```

FROM t1, TABLE(t1.c2) (+) t1\_c2;

- Processed SQL Text:

CREATE OR REPLACE VIEW v1 AS

SELECT t1.c1, t1\_c2.c2

FROM t1, TABLE(t1.c2) (+) /\* [TODO] RULE-20060 : The (+) operator must be converted manually \*/ t1\_c2;

## RULE-20061

- Version Scope: Altibase version tag 6.5.1.0.0 or later
- Type: TODO
- Description: The collection expression arguments in the TABLE function should be the user-defined function.
- Original SQL Text:

CREATE OR REPLACE VIEW v1 AS

SELECT \*

FROM TABLE(SELECT c2 FROM t1);

- Processed SQL Text:

CREATE OR REPLACE VIEW v1 AS

SELECT \*

FROM TABLE(SELECT c2 FROM t1) /\* [TODO] RULE-20061 : The collection expression arguments in the TABLE function should be the user-defined function \*/;

## RULE-20062

- Type: TODO
- Description: The ONLY clause should be manually converted.
- Original SQL Text:

CREATE OR REPLACE VIEW v1 AS

SELECT \* FROM ONLY(v2);

- Processed SQL Text:

CREATE OR REPLACE VIEW v1 AS

SELECT \* FROM ONLY(v2) /\* [TODO] RULE-20062 : ONLY Clause must be converted manually \*/;

## RULE-20063

- Type: TODO
- Description: The record type variables in the SET clause should be manually converted.
- Original SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1(a1 t1%ROWTYPE) AS
```

```
BEGIN
```

```
UPDATE t1 SET ROW = a1 WHERE c1 = a1.c1;
```

```
END;
```

- Processed SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1 AS
```

```
BEGIN
```

```
UPDATE t1 SET ROW = a1 /* [TODO] RULE-20063 : Record variable in SET clause  
must be converted manually */ WHERE c1 = a1.c1;
```

```
END;
```

## RULE-20065

- Type: TODO
- Description: Subpartitions should be manually converted.
- Original SQL Text:

```
CREATE OR REPLACE VIEW v1 AS
```

```
SELECT *
```

```
FROM t1 SUBPARTITION FOR ('HDB', 'HDB DA');
```

- Processed SQL Text:

```
CREATE OR REPLACE VIEW v1 AS
```

```
SELECT *
```

```
FROM t1 SUBPARTITION for ('HDB', 'HDB DA') /* [TODO] RULE-20065 :  
SUBPARTITION must be converted manually */ /* [TODO] RULE-20044 : The  
partition extension clause specifying key value must be converted manually  
*/;
```

## RULE-20066

- Version Scope: Altibase version tag 6.1.1.0.0 or earlier
- Type: TODO
- Description: The CROSS APPLY or OUTER APPLY join should be manually converted.
- Original SQL Text:

```
CREATE OR REPLACE VIEW v1 AS
```

```
SELECT *
```

```
FROM t1 CROSS APPLY (SELECT * FROM t2 WHERE t1.c1 = c1);
```

- Processed SQL Text:

```
CREATE OR REPLACE VIEW v1 AS
```

```
SELECT *
```

FROM t1 **CROSS APPLY** (SELECT \* FROM t2 WHERE t1.c1 = c1) /\* **[TODO]**

**RULE-20066 : CROSS APPLY or OUTER APPLY join must be converted manually \*/;**

## PSM Conversion Rules

### RULE-30001

- Type: CONVERTED
- Description: Unsupported data types are converted
- Original SQL Text:

```
CREATE OR REPLACE FUNCTION func1(a1 VARCHAR2)
```

```
RETURN VARCHAR2
```

```
IS
```

```
m_binary_double BINARY_DOUBLE;
```

```
m_number NUMBER(10) := 1234;
```

```
TYPE rt_n IS RECORD (c1 NATURAL);
```

```
TYPE rt_nn IS RECORD (c1 NATURAL);
```

```
TYPE tt_1 IS TABLE OF TIMESTAMP(3) INDEX BY VARCHAR2(10);
```

```
TYPE tt_2 IS TABLE OF TIMESTAMP(3) WITH TIME ZONE INDEX BY VARCHAR2(10);
```

```
BEGIN
```

```
RETURN a1;
```

```
END;
```

- Processed SQL Text:

```
CREATE OR REPLACE FUNCTION func1(a1 VARCHAR(65534))
```

```
RETURN VARCHAR(65534)
```

```
IS
```

```
m_binary_double DOUBLE;
```

```
m_number NUMBER := 1234;
```

```
TYPE rt_n IS RECORD (c1 INTEGER);
```

```
TYPE rt_nn IS RECORD (c1 INTEGER);
```

```
TYPE tt_1 IS TABLE OF DATE INDEX BY VARCHAR2(10);
```

```
TYPE tt_2 IS TABLE OF DATE INDEX BY VARCHAR2(10);
```

```
BEGIN
```

```
RETURN a1;
```

```
END;
```



## RULE-30002

- Type: TODO
- Description: Unsupported data types must be converted manually.
- Original SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1
```

```
IS
```

```
v_rowid ROWID;
```

```
v_urowid UROWID;
```

```
BEGIN
```

```
NULL;
```

```
END;
```

- Processed SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1
```

```
IS
```

```
v_rowid ROWID /* [TODO] RULE-30002 : Unsupported data type must be converted manually */;
```

```
v_urowid UROWID /* [TODO] RULE-30002 : Unsupported data type must be converted manually */;
```

```
BEGIN
```

```
NULL;
```

```
END;
```

## RULE-30003

- Type: TODO
- Description: If the data type of variable referencing the %TYPE were to be a userdefined or VARRAY type, it should be manually converted.
- Original SQL Text:

```
CREATE FUNCTION getSeason_thailand(p_date DATE) RETURN VARCHAR2
```

```
AS
```

```
TYPE vt_season IS VARRAY(5) OF INTEGER;
```

```
rainy vt_season := vt_season(6, 7, 8, 9, 10);
```

```
dry rainy%TYPE := vt_season(11, 12, 1, 2);
```

```
v_currSeason VARCHAR2(20) := 'Unknown';
```

```
v_currMonth NUMBER(2);
```

```
BEGIN
```

```
SELECT TO_NUMBER(TO_CHAR(p_date, 'MM')) INTO v_currMonth FROM dual;
```

```
FOR i IN 1..rainy.LAST LOOP
```

```

IF rainy(i) = v_currMonth THEN
v_currSeason := 'Rainy season';
END IF;
END LOOP;
FOR i IN 1..dry.LAST LOOP
IF dry(i) = v_currMonth THEN
v_currSeason := 'Dry season';
END IF;
END LOOP;
RETURN v_currSeason;
END;

```

- Processed SQL Text:

```

CREATE FUNCTION getSeason_thailand(p_date DATE) RETURN VARCHAR2
AS
TYPE vt_season IS VARRAY(5) OF INTEGER;
rainy vt_season := vt_season(6, 7, 8, 9, 10);

dry rainy%TYPE /* [TODO] RULE-30003 : If the data type of variable
referencing the %TYPE were to be a user-defined or VARRAY type, it should be
manually converted */ := vt_season(11, 12, 1, 2);
v_currSeason VARCHAR2(20) := 'Unknown';
v_currMonth NUMBER(2);
BEGIN
SELECT TO_NUMBER(TO_CHAR(p_date, 'MM')) INTO v_currMonth FROM dual;
FOR i IN 1..rainy.LAST LOOP
IF rainy(i) = v_currMonth THEN
v_currSeason := 'Rainy season';
END IF;
END LOOP;
FOR i IN 1..dry.LAST LOOP
IF dry(i) = v_currMonth THEN
v_currSeason := 'Dry season';
END IF;
END LOOP;
RETURN v_currSeason;
END;

```

## RULE-30004

- Type: TODO
- Description: If the data type of variables is VARRAY or the user-defined type, it should be manually converted.
- Original SQL Text:

```
CREATE FUNCTION getSeason_thailand(p_date DATE) RETURN VARCHAR2
AS
TYPE vt_season IS VARRAY(5) OF INTEGER;
rainy vt_season := vt_season(6, 7, 8, 9, 10);
dry rainy%TYPE := vt_season(11, 12, 1, 2);
v_currSeason VARCHAR2(20) := 'Unknown';
v_currMonth NUMBER(2);
BEGIN
SELECT TO_NUMBER(TO_CHAR(p_date, 'MM')) INTO v_currMonth FROM dual;
FOR i IN 1..rainy.LAST LOOP
IF rainy(i) = v_currMonth THEN
v_currSeason := 'Rainy season';
END IF;
END LOOP;
FOR i IN 1..dry.LAST LOOP
IF dry(i) = v_currMonth THEN
v_currSeason := 'Dry season';
END IF;
END LOOP;
RETURN v_currSeason;
END;
```

- Processed SQL Text:

```
CREATE FUNCTION getSeason_thailand(p_date DATE) RETURN VARCHAR2
AS
TYPE vt_season IS VARRAY(5) OF INTEGER;
rainy vt_season /* [TODO] RULE-30004 : If the datatype of variable is an
VARRAY or user-defined type, the user must convert it manually */ :=
vt_season(6, 7, 8, 9, 10);
dry rainy%TYPE:= vt_season(11, 12, 1, 2);
v_currSeason VARCHAR3(20) := 'Unknown';
v_currMonth NUMBER(2);
```

```

BEGIN
SELECT TO_NUMBER(TO_CHAR(p_date, 'MM')) INTO v_currMonth FROM dual;
FOR i IN 1..rainy.LAST LOOP
IF rainy(i) = v_currMonth THEN
v_currSeason := 'Rainy season';
END IF;
END LOOP;
FOR i IN 1..dry.LAST LOOP
IF dry(i) = v_currMonth THEN
v_currSeason := 'Dry season';
END IF;
END LOOP;
RETURN v_currSeason;
END;

```

## RULE-30005

- Type: REMOVED
- Description: The NOT NULL constraint is removed
- Original SQL Text:

```

CREATE OR REPLACE FUNCTION func1(a1 NUMBER)
RETURN NUMBER
IS
v1 PLS_INTEGER NOT NULL;
BEGIN
RETURN a1;
END;

```

- Processed SQL Text:

```

CREATE OR REPLACE FUNCTION func1(a1 NUMBER)
RETURN NUMBER
IS
v1 PLS_INTEGER /*NOT NULL */ /* [REMOVED] RULE-30005 : The NOT NULL
constraint is removed */;
BEGIN
RETURN a1;
END;

```

## RULE-30006

- Version Scope: Less than the Altibase version tag 6.5.1.0.0
- Type: REMOVED
- Description: NOCOPY is removed
- Original SQL Text:

```
CREATE PROCEDURE appendSysdate
(
  p1 IN OUT NOCOPY VARCHAR2
)
IS
  v_date VARCHAR2(50);
BEGIN
  SELECT SYSDATE INTO v_date FROM dual;
  p1 := p1 || v_date;
END;
```

- Processed SQL Text:

```
CREATE PROCEDURE appendSysdate
(
  p1 IN OUT /* NOCOPY */ /* [REMOVED] RULE-30006 : NOCOPY is removed */
VARCHAR2
)
IS
  v_date VARCHAR2(50);
BEGIN
  SELECT SYSDATE INTO v_date FROM dual;
  p1 := p1 || v_date;
END;
```

## RULE-30008

- Type: CONVERTED
- Description: The local identifier that is an Altibase reserved word is converted by appending a postfix.
- Original SQL Text:

```
CREATE PROCEDURE printDdlReplEnable
AS
true INTEGER := 1;
```

```

BEGIN
DECLARE
isEnabled INTEGER := printDdlReplEnable.true;
BEGIN
SELECT value1 INTO isEnabled
FROM v$property WHERE name='REPLICATION_DDL_ENABLE';
DBMS_OUTPUT.PUT('[Property]REPLICATION_DDL_ENABLE: ');
IF isEnabled = printDdlReplEnable.true THEN
DBMS_OUTPUT.PUT_LINE('true');
ELSE
DBMS_OUTPUT.PUT_LINE('false');
END IF;
END;
END;

```

- Processed SQL Text:

```

CREATE PROCEDURE printDdlReplEnable
AS
true_POC INTEGER := 1;
BEGIN
DECLARE
isEnabled INTEGER := printDdlReplEnable.true_POC;
BEGIN
SELECT value1 INTO isEnabled
FROM v$property WHERE name='REPLICATION_DDL_ENABLE';
DBMS_OUTPUT.PUT('[Property]REPLICATION_DDL_ENABLE:');
IF isEnabled = printDdlReplEnable.true_POC THEN
DBMS_OUTPUT.PUT_LINE('true');
ELSE
DBMS_OUTPUT.PUT_LINE('false');
END IF;
END;
END;

```

## RULE-31001

- Type: CONVERTED
- Description: All implicit cursors are converted to explicit cursors
- Original SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1(a1 NUMBER)
IS
BEGIN
FOR item1 IN (SELECT c1 FROM t1)
LOOP
NULL;
END LOOP;

FOR item2 IN (SELECT c1 FROM t2)
LOOP
NULL;
END LOOP;

END;
```

- Processed SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1(a1 NUMBER)
IS
CURSOR O2A_generated_cur_00 IS SELECT c1 FROM t1;
CURSOR O2A_generated_cur_01 IS SELECT c1 FROM t2;
BEGIN
FOR item1 IN O2A_generated_cur_00
LOOP
NULL;
END LOOP;

FOR item2 IN O2A_generated_cur_01
LOOP
NULL;
END LOOP;

END;
```

## RULE-31002

- Type: TODO
- Description: SUBTYPE type variables must be converted manually
- Original SQL Text:

```
CREATE OR REPLACE FUNCTION func1(a1 NUMBER)
RETURN NUMBER
IS
TYPE typ1 IS RECORD ( m1 NUMBER(4) NOT NULL := 99 );
TYPE typ2 IS REF CURSOR RETURN record_name%TYPE;
TYPE typ3 IS TABLE OF a1%TYPE NOT NULL;
TYPE typ4 IS VARYING ARRAY(10) OF INTEGER;
```

**SUBTYPE subtyp1 IS CHAR(10);**

```
BEGIN
RETURN a1;
END;
```

- Processed SQL Text:

```
CREATE OR REPLACE FUNCTION func1(a1 NUMBER)
RETURN NUMBER
IS
TYPE typ1 IS RECORD ( m1 NUMBER(4) NOT NULL := 99 );
TYPE typ2 IS REF CURSOR RETURN record_name%TYPE;
TYPE typ3 IS TABLE OF a1%TYPE NOT NULL;
TYPE typ4 IS VARYING ARRAY(10) OF INTEGER;
```

**SUBTYPE subtyp1 IS CHAR(10) /\* [TODO] RULE-31002 : SUBTYPE type variable must be converted manually \*/;**

```
BEGIN
RETURN a1;
END;
```

## RULE-31003

- Type: TODO
- Description: VARRAY type variables must be converted manually
- Original SQL Text:

```
CREATE FUNCTION getSeason_korea(p_date DATE) RETURN VARCHAR2 IS
TYPE vt_season IS VARRAY(4) OF VARCHAR2(20);
v_seasonList vt_season := vt_season('Winter', 'Spring', 'Summer', 'Fall');
```



```

v_currSeason VARCHAR2(20);
v_currMonth NUMBER(2);

BEGIN

SELECT TO_NUMBER(TO_CHAR(p_date, 'MM')) INTO v_currMonth FROM dual;

v_currSeason := v_seasonList(FLOOR(MOD(v_currMonth, 12) / 3 + 1));

RETURN v_currSeason;

END;

```

- Processed SQL Text:

```

CREATE FUNCTION getSeason_korea(p_date DATE) RETURN VARCHAR2 IS

TYPE vt_season IS VARRAY(4) OF VARCHAR2(20) /* [TODO] RULE-31003 : VARRAY
type variable must be converted manually */;

v_seasonList vt_season:= vt_season('Winter', 'Spring', 'Summer', 'Fall');

v_currseason VARCHAR2(20);
v_currMonth NUMBER(2);

BEGIN

SELECT TO_NUMBER(TO_CHAR(p_date, 'MM')) INTO v_currMonth FROM dual;

v_currseason := v_seasonList(FLOOR(MOD(v_currMonth, 12) / 3 + 1));

RETURN a1v_currseason;

END;

```

## **RULE-31004**

- Type: TODO
- Description: %ROWTYPE type parameters for CURSOR must be converted manually
- Original SQL Text:

```

CREATE OR REPLACE FUNCTION func1(a1 NUMBER)

RETURN t2%ROWTYPE

IS

CURSOR cur1

(

m1 collection_name%TYPE,

m2 t1.c3%ROWTYPE

) RETURN t2%ROWTYPE

IS SELECT c2, c3 FROM t1 WHERE c1 > 10;

BEGIN

RETURN cur1;

END;

```

- Processed SQL Text:

```
CREATE OR REPLACE FUNCTION func1(a1 NUMBER)
RETURN t2%ROWTYPE
IS
CURSOR cur1
(
m1 collection_name%TYPE,
m2 t1.c3%ROWTYPE /* [TODO] RULE-31004 : %ROWTYPE type parameter for CURSOR
must be converted manually */
) RETURN t2%ROWTYPE
IS SELECT c2, c3 FROM t1 WHERE c1 > 10;
BEGIN
RETURN cur1;
END;
```

## RULE-31005

- Type: TODO
- Description: The RETURN clause of CURSOR must be converted manually
- Original SQL Text:

```
CREATE OR REPLACE FUNCTION func1(a1 NUMBER)
RETURN NUMBER
IS
TYPE typ1 IS REF CURSOR RETURN record_name%TYPE;
CURSOR cur1 ( m1 NUMBER )
RETURN NUMBER
IS SELECT c2, c3 FROM t1 WHERE c1 > 10;
BEGIN
RETURN a1;
END;
```

- Processed SQL Text:

```
CREATE OR REPLACE FUNCTION func1(a1 NUMBER)
RETURN NUMBER
IS
TYPE typ1 IS REF CURSOR RETURN record_name%TYPE /* [TODO] RULE-31005 : RETURN
clause of CURSOR must be converted manually */;
CURSOR cur1 ( m1 NUMBER ) RETURN NUMBER /* [TODO] RULE-31005 : RETURN clause
of CURSOR must be converted manually */;
```

```
IS SELECT c2, c3 FROM t1 WHERE c1 > 10;

BEGIN

RETURN a1;

END;
```

## RULE-31006

- Type: REMOVED
- Description: Cannot define or declare procedure or function in the declare section
- Original SQL Text:

```
CREATE PROCEDURE util_tblMgr(p_cmd VARCHAR2, p_tblName VARCHAR2) IS

FUNCTION isTblExist(p_tblName VARCHAR2) RETURN BOOLEAN;

FUNCTION isTblExist(p_tblName VARCHAR2) RETURN BOOLEAN AS
v_cnt INTEGER;

BEGIN

SELECT COUNT(*) INTO v_cnt FROM user_tables WHERE table_name = p_tblName;

IF v_cnt > 0 THEN

RETURN true;

ELSE

RETURN false;

END IF;

END;

BEGIN

CASE p_cmd

WHEN 'EXIST' THEN

IF isTblExist(p_tblName) THEN

DBMS_OUTPUT.PUT_LINE(p_tblName || ' exists.');

ELSE

DBMS_OUTPUT.PUT_LINE(p_tblName || ' does not exist.');

END IF;

ELSE DBMS_OUTPUT.PUT_LINE('Unknown command: ' || p_cmd);

END CASE;

END;
```

- Processed SQL Text:
- ```
CREATE PROCEDURE util_tblMgr(p_cmd VARCHAR2, p_tblName VARCHAR2) IS

/* FUNCTION isTblExist(p_tblName VARCHAR2) RETURN BOOLEAN; */ /* [REMOVED]

RULE-31006 : Cannot define or declare a procedure or function in the declare
section */
```

```

/* FUNCTION isTblExist(p_tblName VARCHAR2) RETURN BOOLEAN AS
v_cnt INTEGER;

BEGIN

SELECT COUNT(*) INTO v_cnt FROM user_tables WHERE table_name = p_tblName;

IF v_cnt > 0 THEN

RETURN true;

ELSE

RETURN false;

END IF;

END; */ /* [REMOVED] RULE-31006 : Cannot define or declare a procedure or
function in the declare section */

BEGIN

CASE p_cmd

WHEN 'EXIST' THEN

IF isTblExist(p_tblName) THEN

DBMS_OUTPUT.PUT_LINE(p_tblName || ' exists.');


ELSE



DBMS_OUTPUT.PUT_LINE(p_tblName || ' does not exist.');



END IF;



ELSE DBMS_OUTPUT.PUT_LINE('Unknown command: ' || p_cmd);



END CASE;



END;


```

## RULE-31008

- Type: REMOVED
- Description: PRAGMA is removed. PRAGMA is removed. However, when it is removed, AUTONOMOUS\_TRANSACTION is excluded in Altibase 6.3.1.0.10 or higher, and EXCEPTION\_INIT is excluded in Altibase 6.5.1.0.0 or higher.
- Original SQL Text:

```

CREATE PROCEDURE addShot(p_cnt INTEGER)

AS

PRAGMA AUTONOMOUS_TRANSACTION;

tmp_opt_empty EXCEPTION;

PRAGMA EXCEPTION_INIT(tmp_opt_empty, 100);

v_currcnt INTEGER;

BEGIN

SELECT shot_cnt INTO v_currcnt FROM tmp_opt;
```

```

v_currnt := v_currnt + p_cnt;
UPDATE tmp_opt SET shot_cnt = v_currnt WHERE id = 1;
COMMIT;
EXCEPTION
WHEN tmp_opt_empty THEN
INSERT INTO tmp_opt(id, shot_cnt) VALUES (1, p_cnt + 1);
COMMIT;
END;

```

- Processed SQL Text:

```

CREATE PROCEDURE addShot(p_cnt INTEGER)
AS
/* PRAGMA AUTONOMOUS_TRANSACTION; */ /* [REMOVED] RULE-31008 : PRAGMA is removed */
tmp_opt_empty EXCEPTION;
/* PRAGMA EXCEPTION_INIT(tmp_opt_empty, 100); */ /* [REMOVED] RULE-31008 : PRAGMA is removed */
v_currnt INTEGER;
BEGIN
SELECT shot_cnt INTO v_currnt FROM tmp_opt;
v_currnt := v_currnt + p_cnt;
UPDATE tmp_opt SET shot_cnt = v_currnt WHERE id = 1;
COMMIT;
EXCEPTION
WHEN tmp_opt_empty THEN
INSERT INTO tmp_opt(id, shot_cnt) VALUES (1, p_cnt + 1);
COMMIT;
END;

```

- Original SQL Text: Altibase 6.3.1.0.10 or above

```

CREATE PROCEDURE addShot(p_cnt INTEGER)
AS
PRAGMA AUTONOMOUS_TRANSACTION;
tmp_opt_empty EXCEPTION;
PRAGMA EXCEPTION_INIT(tmp_opt_empty, 100);
v_currnt INTEGER;
BEGIN
SELECT shot_cnt INTO v_currnt FROM tmp_opt;

```

```

v_currnt := v_currnt + p_cnt;
UPDATE tmp_opt SET shot_cnt = v_currnt WHERE id = 1;
COMMIT;
EXCEPTION
WHEN tmp_opt_empty THEN
INSERT INTO tmp_opt(id, shot_cnt) VALUES (1, p_cnt + 1);
COMMIT;
END;

```

- Processed SQL Text:

```

CREATE PROCEDURE addShot(p_cnt INTEGER)
AS
PRAGMA AUTONOMOUS_TRANSACTION
tmp_opt_empty EXCEPTION;
/* PRAGMA EXCEPTION_INIT(tmp_opt_empty, 100); */ /* [REMOVED] RULE-31008 :
PRAGMA is removed */
v_currnt INTEGER;
BEGIN
SELECT shot_cnt INTO v_currnt FROM tmp_opt;
v_currnt := v_currnt + p_cnt;
UPDATE tmp_opt SET shot_cnt = v_currnt WHERE id = 1;
COMMIT;
EXCEPTION
WHEN tmp_opt_empty THEN
INSERT INTO tmp_opt(id, shot_cnt) VALUES (1, p_cnt + 1);
COMMIT;
END;

```

- Original SQL Text: Altibase 6.3.1.0.10 or above

```

CREATE OR REPLACE PROCEDURE addShot(p_cnt INTEGER)
AS
PRAGMA AUTONOMOUS_TRANSACTION;
tmp_opt_empty EXCEPTION;
PRAGMA EXCEPTION_INIT(tmp_opt_empty, 100);
v_currnt INTEGER;
BEGIN
SELECT shot_cnt INTO v_currnt FROM tmp_opt;
v_currnt := v_currnt + p_cnt;

```

```

UPDATE tmp_opt SET shot_cnt = v_currnt WHERE id = 1;
COMMIT;
EXCEPTION
WHEN tmp_opt_empty THEN
INSERT INTO tmp_opt(id, shot_cnt) VALUES (1, p_cnt + 1);
COMMIT;
END;

```

- Processed SQL Text:

```

CREATE OR REPLACE PROCEDURE addShot(p_cnt INTEGER) AS

```

```

PRAGMA AUTONOMOUS_TRANSACTION;

```

```

tmp_opt_empty EXCEPTION;

```

```

PRAGMA EXCEPTION_INIT(tmp_opt_empty, 100);

```

```

v_currnt INTEGER;

```

```

BEGIN

```

```

SELECT shot_cnt INTO v_currnt FROM tmp_opt;

```

```

v_currnt := v_currnt + p_cnt;

```

```

UPDATE tmp_opt SET shot_cnt = v_currnt WHERE id = 1;

```

```

COMMIT;

```

```

EXCEPTION

```

```

WHEN tmp_opt_empty THEN

```

```

INSERT INTO tmp_opt(id, shot_cnt) VALUES (1, p_cnt + 1);

```

```

COMMIT;

```

```

END;

```

## RULE-31010

- Type: TODO
- Description: The collection constructor must be converted manually
- Original SQL Text:

```

CREATE FUNCTION getSeason_korea(p_date DATE) RETURN VARCHAR2

```

```

AS

```

```

TYPE vt_season IS VARRAY(4) OF v_currSeason%TYPE;

```

```

v_seasonList vt_season := vt_season('Winter', 'Spring', 'Summer', 'Fall');

```

```

v_currMonth NUMBER(2);

```

```

v_currSeason VARCHAR2(20);

```

```

BEGIN

```

```

SELECT TO_NUMBER(TO_CHAR(p_date, 'MM')) INTO v_currMonth FROM dual;

```

```
v_currSeason := v_seasonList(FLOOR(MOD(v_currMonth, 12) / 3 + 1));
```

```
RETURN v_currSeason;
```

```
END;
```

- Processed SQL Text:

```
CREATE FUNCTION getSeason_korea(p_date DATE) RETURN VARCHAR(32000)
```

```
AS
```

```
TYPE vt_season IS VARRAY(4) OF v_currSeason%TYPE;
```

```
v_seasonList vt_season:= vt_season('Winter', 'Spring', 'Summer', 'Fall')
```

```
/* [TODO] RULE-31010 : The collection constructor must be converted manually */;
```

```
v_currMonth NUMBER(38, 0);
```

```
v_currSeason VARCHAR(32000);
```

```
BEGIN
```

```
SELECT TO_NUMBER(TO_CHAR(p_date, 'MM')) INTO v_currMonth FROM dual;
```

```
v_currSeason := v_seasonList(FLOOR(MOD(v_currMonth, 12) / 3 + 1));
```

```
RETURN v_currSeason;
```

```
END;
```

## RULE-31011

- Type: TODO
- Description: If the data type of associative array is defined using %TYPE or %ROWTYPE, it should be manually converted.

- Original SQL Text:

```
CREATE PACKAGE tripLog_pkg AS
```

```
curr_date DATE := SYSDATE;
```

```
TYPE at_city IS TABLE OF curr_date%TYPE INDEX BY VARCHAR2(100);
```

```
v_cityList at_city;
```

```
PROCEDURE addCity(p_city VARCHAR2, p_date DATE);
```

```
PROCEDURE delCity(p_city VARCHAR2);
```

```
PROCEDURE printCityList;
```

```
END;
```

- Processed SQL Text:

```
CREATE PACKAGE tripLog_pkg AS
```

```
curr_date DATE := SYSDATE;
```

```
TYPE at_city IS TABLE OF curr_date%TYPE /* [TODO] RULE-31011 : The %TYPE or %ROWTYPE attribute must be converted manually */ INDEX BY VARCHAR2(100);
```

```
v_cityList at_city;
```



```

PROCEDURE addCity(p_city VARCHAR2, p_date DATE);
PROCEDURE delCity(p_city VARCHAR2);
PROCEDURE printCityList;
END;

```

## RULE-31012

- Type: CONVERTED
- Description: The index data type of Associative array has been converted.
- Original SQL Text:

```

CREATE PACKAGE tripLog_pkg AS
curr_date DATE := SYSDATE;
TYPE at_city IS TABLE OF curr_date%TYPE INDEX BY VARCHAR2(100);
v_cityList at_city;
PROCEDURE addCity(p_city VARCHAR2, p_date DATE);
PROCEDURE delCity(p_city VARCHAR2);
PROCEDURE printCityList;
END;

```

- Processed SQL Text

```

CREATE PACKAGE tripLog_pkg AS
curr_date DATE := SYSDATE;
TYPE at_city IS TABLE OF curr_date%TYPE INDEX BY VARCHAR(65534);
v_cityList at_city;
PROCEDURE addCity(p_city VARCHAR2, p_date DATE);
PROCEDURE delCity(p_city VARCHAR2);
PROCEDURE printCityList;
END;

```

## RULE-32001

- Version Scope:Altibase version tag 6.3.1.0.0 or earlier
- Type: REMOVED
- Description: Cannot COMMIT while cursor is still open.
- Original SQL Text:

```

CREATE OR REPLACE PROCEDURE proc1(a1 NUMBER)
AS
m1 INTEGER;
m2 INTEGER;
m3 INTEGER;

```

```

m4 INTEGER;
CURSOR cur1 IS
SELECT c1, c2, c3, c4 FROM t1;
BEGIN
OPEN cur1;
FOR i IN 1 .. 5 LOOP
FETCH cur1 INTO m1, m2, m3, m4;
EXIT WHEN cur1%NOTFOUND;
INSERT INTO t2 VALUES(m1, m2, m3, m4);
END LOOP;
COMMIT;
CLOSE cur1;
COMMIT;
END;

```

- Processed SQL Text:

```

CREATE OR REPLACE PROCEDURE proc1(a1 NUMBER)
AS
m1 INTEGER;
m2 INTEGER;
m3 INTEGER;
m4 INTEGER;
CURSOR cur1 IS
SELECT c1, c2, c3, c4 FROM t1;
BEGIN
OPEN cur1;
FOR i IN 1 .. 5 LOOP
FETCH cur1 INTO m1, m2, m3, m4;
EXIT WHEN cur1%NOTFOUND;
INSERT INTO t2 VALUES(m1, m2, m3, m4);
END LOOP;
/* COMMIT; */ /* [REMOVED] RULE-32001 : Cannot COMMIT while cursor is still
open */
CLOSE cur1;
COMMIT;
END;

```

## RULE-32002

- Version Scope: Altibase version tag 6.3.1.0.0 or earlier
- Type: REMOVED
- Description: Cannot ROLLBACK while a cursor is still open
- Original SQL Text:

```
CREATE OR REPLACE TRIGGER trig1
BEFORE DELETE ON t1
DECLARE
m1 INTEGER;
m2 INTEGER;
m3 INTEGER;
m4 INTEGER;
CURSOR cur1 IS
SELECT c1, c2, c3, c4 FROM t1;
BEGIN
OPEN cur1;
FOR i IN 1 .. 5 LOOP
FETCH cur1 INTO m1, m2, m3, m4;
EXIT WHEN cur1%NOTFOUND;
INSERT INTO t2 VALUES(m1, m2, m3, m4);
END LOOP;
ROLLBACK;
CLOSE cur1;
ROLLBACK;
END;
```

- Processed SQL Text:

```
CREATE OR REPLACE TRIGGER trig1
BEFORE DELETE ON t1
DECLARE
m1 INTEGER;
m2 INTEGER;
m3 INTEGER;
m4 INTEGER;
CURSOR cur1 IS
SELECT c1, c2, c3, c4 FROM t1;
```

```

BEGIN
OPEN cur1;
FOR i IN 1 .. 5 LOOP
FETCH cur1 INTO m1, m2, m3, m4;
EXIT WHEN cur1%NOTFOUND;
INSERT INTO t2 VALUES(m1, m2, m3, m4);
END LOOP;
/* ROLLBACK; */ /* [REMOVED] RULE-32002 : Cannot ROLLBACK while cursor is still open */
CLOSE cur1;
ROLLBACK;
END;

```

### RULE-32003

- Type: REMOVED
- Description: The SET TRANSACTION statement is removed
- Original SQL Text:

```

CREATE OR REPLACE PROCEDURE proc1IS
BEGIN
NULL;
SET TRANSACTION READ ONLY NAME 'Test Rule 13019';
END;

```

- Processed SQL Text:

```

CREATE OR REPLACE PROCEDURE proc1IS
BEGIN
NULL;
/* SET TRANSACTION READ ONLY NAME 'Test Rule 13019'; */ /* [REMOVED]
RULE-32003 : The SET TRANSACTION statement is removed */
END;

```

### RULE-32006

- Type: CONVERTED
- Description: The FORALL statement is converted to the FOR statement
- Original SQL Text:

```

CREATE PROCEDURE delEmp
AS
TYPE nt_state IS TABLE OF CHAR(1);

```

```

stateList nt_state := nt_state('Q', 'V');
BEGIN
FORALL i IN 1..stateList.LAST
DELETE FROM employees WHERE state=stateList(i);
END;

```

- Processed SQL Text:

```

CREATE PROCEDURE delEmp
AS
TYPE nt_state IS TABLE OF CHAR(1);
stateList nt_state := nt_state('Q', 'V');
BEGIN
FOR i IN 1 .. stateList.LAST LOOP
DELETE FROM employees WHERE state=stateList(i);
END LOOP;
END;

```

## **RULE-32007**

- Type: TODO
- Description: The FORALL statement must be converted manually
- Original SQL Text:

```

CREATE PROCEDURE delEmp
AS
TYPE nt_state IS TABLE OF CHAR(1);
stateList nt_state := nt_state('Q', 'V');
BEGIN
FORALL i IN INDICES OF stateList
DELETE FROM employees WHERE state=stateList(i);
END;

```

- Processed SQL Text:

```

CREATE PROCEDURE delEmp
AS
TYPE nt_state IS TABLE OF CHAR(1);
stateList nt_state:= nt_state('Q', 'V');
BEGIN
FORALL i IN INDICES OF stateList

```

DELETE FROM employees WHERE state=stateList(i); /\* [TODO] RULE-32007 : The  
**FORALL statement must be converted manually \*/**

END;

## RULE-32008

- Type: CONVERTED
- Description: A whitespace is appended before and after the range value in the FOR LOOP statement
- Original SQL Text:

```
CREATE FUNCTION getCityList RETURN tripLog_pkg.nt_city PIPELINED AS
BEGIN
FOR i IN 1..tripLog_pkg.v_cityList.LAST LOOP
PIPE ROW(tripLog_pkg.v_cityList(i));
END LOOP;
RETURN;
END;
```

- Processed SQL Text:

```
CREATE FUNCTION getCityList
RETURN tripLog_pkg.nt_city PIPELINED AS
BEGIN
FOR i IN 1 .. tripLog_pkg.v_cityList.LAST LOOP
PIPE ROW(tripLog_pkg.v_cityList(i));
END LOOP;
RETURN;
END;
```

## RULE-32009

- Type: CONVERTED
- Description: The condition in the CONTINUE statement is converted
- Original SQL Text:

```
CREATE PROCEDURE showMail(p_from DATE)
AS
v_cnt INTEGER;
v_title VARCHAR2(256);
v_date DATE;
BEGIN
SELECT COUNT(*) INTO v_cnt FROM mailbox;
```

```

IF v_cnt > 0 THEN
FOR i IN 1..v_cnt LOOP
SELECT datetime INTO v_date FROM mailbox WHERE id = i;
IF p_from != SYSDATE THEN
CONTINUE WHEN v_date < p_from;
END IF;
SELECT title INTO v_title FROM mailbox WHERE id = i;
DBMS_OUTPUT.PUT_LINE('Title: ' || v_title || ', Date: ' || v_date);
END LOOP;
END IF;
END;

```

- Processed SQL Text:

```

CREATE PROCEDURE showMail(p_from DATE)
AS
v_cnt INTEGER;
v_title VARCHAR2(256);
v_date DATE;
BEGIN
SELECT COUNT(*) INTO v_cnt FROM mailbox;
IF v_cnt > 0 THEN
FOR i IN 1 .. v_cnt LOOP
SELECT datetime INTO v_date FROM mailbox WHERE id = i;
IF p_from != SYSDATE THEN
IF v_date < p_from THEN
CONTINUE;
END IF;
END IF;
SELECT title INTO v_title FROM mailbox WHERE id = i;
SYSTEM.PRINTLN('Title: ' || v_title || ', Date: ' || v_date);
END LOOP;
END IF;
END;

```

## RULE-32010

- Type: TODO
- Description: The host variabels should be manually converted.
- Original SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1 AS  
BEGIN  
SELECT c2 BULK COLLECT INTO :v_arr FROM t1;  
END;
```

- Processed SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1 AS  
BEGIN  
SELECT c2 BULK COLLECT INTO :v_arr /* [TODO] RULE-32010 : The host variable  
must be converted manually */ FROM t1;  
END;
```

## RULE-32012

- Type: TODO
- Description: The host variabels should be manually converted.
- Original SQL Text:

```
CREATE FUNCTION getCitiList  
RETURN tripLog_pkg.nt_city PIPELINED  
AS  
BEGIN  
FOR i IN 1..tripLog_pkg.v_cityList.LAST LOOP  
PIPE ROW(tripLog_pkg.v_cityList(i));  
END LOOP;  
RETURN;  
END;
```

- Processed SQL Text:

```
CREATE FUNCTION getCitiList  
RETURN tripLog_pkg.nt_city PIPELINED  
AS  
BEGIN  
FOR i IN 1..tripLog_pkg.v_cityList.LAST LOOP  
PIPE ROW(tripLog_pkg.v_cityList(i)) /* [TODO] RULE-32012 : The PIPE ROW  
statement must be converted manually */;
```



END LOOP;

RETURN;

END;

## RULE-32013

- Type: CONVERTED
- Description: The label in the CONTINUE statement is converted
- Original SQL Text:

```
CREATE PROCEDURE showMail(p_from DATE)
AS
v_cnt INTEGER;
v_title VARCHAR2(256);
v_date DATE;
BEGIN
SELECT COUNT(*) INTO v_cnt FROM mailbox;
IF v_cnt > 0 THEN
<<for_loop>>
FOR i IN REVERSE 1..v_cnt LOOP
SELECT datetime INTO v_date FROM mailbox WHERE id = i;
IF v_date <= p_from THEN
CONTINUE for_loop;
END IF;
SELECT title INTO v_title FROM mailbox WHERE id = i;
DBMS_OUTPUT.PUT_LINE('Title: ' || v_title || ', Date: ' || v_date);
END LOOP for_loop;
END IF;
END;
```

- Processed SQL Text:

```
CREATE PROCEDURE showMail(p_from DATE)
AS
v_cnt INTEGER;
v_title VARCHAR2(256);
v_date DATE;
BEGIN
SELECT COUNT(*) INTO v_cnt FROM mailbox;
IF v_cnt > 0 THEN
```

```

<<for_loop>>
FOR i IN REVERSE 1 .. v_cnt LOOP
SELECT datetime INTO v_date FROM mailbox WHERE id = i;
IF v_date <= p_from THEN
GOTO O2A_generated_label_00;
END IF;
SELECT title INTO v_title FROM mailbox WHERE id = i;
SYSTEM_.PRINTLN('Title: ' || v_title || ', Date: ' || v_date);
<<O2A_generated_label_00>>

NULL;
END LOOP for_loop;
END IF;
END;

```

## RULE-32014

- Type: TODO
- Description: SCN (System Change Number) cannot be assigned to the transaction
- Original SQL Text:

```

CREATE OR REPLACE PROCEDURE proc1 AS
BEGIN
COMMIT FORCE 'ORCL.C50E231F042A.10.5.109239', 143217566;
END;

```

- Processed SQL Text:

```

CREATE OR REPLACE PROCEDURE proc1 AS
BEGIN
COMMIT FORCE 'ORCL.C50E231F042A.10.5.109239', 143217566 /* [TODO] RULE-32014
: SCN cannot be assigned to the transaction */;
END;

```

## RULE-32015

- Type: TODO
- Description: The corrupt transaction cannot be committed
- Original SQL Text:

```

CREATE OR REPLACE PROCEDURE proc1 AS
BEGIN
COMMIT FORCE CORRUPT_XID_ALL;
END;

```

- Processed SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1 AS
BEGIN
COMMIT FORCE CORRUPT_XID_ALL; /* [TODO] RULE-32015 : The corrupt transaction
cannot be committed */
END;
```

## RULE-32016

- Type: REMOVED
- Description: The WRITE clause in the COMMIT statement is removed
- Original SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1
AS
v_cnt INTEGER;
BEGIN
SELECT COUNT(*) INTO v_cnt FROM t1;
INSERT INTO t1 VALUES(v_cnt, CURRENT_TIMESTAMP);
```

**COMMIT WRITE NOWAIT IMMEDIATE;**

END;

- Processed SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1
AS
v_cnt INTEGER;
BEGIN
SELECT COUNT(*) INTO v_cnt FROM t1;
INSERT INTO t1 VALUES(v_cnt, CURRENT_TIMESTAMP);

COMMIT /* WRITE NOWAIT IMMEDIATE */ /* [REMOVED] RULE-32016 : The WRITE
clause in the COMMIT statement is removed */;
END;
```

## RULE-32017

- Type: REMOVED
- Description: The COMMENT clause in the COMMIT statement is removed
- Original SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1 AS
BEGIN
COMMIT COMMENT 'PROCEDURE proc1 committed';
```

END;

- Processed SQL Text:

CREATE OR REPLACE PROCEDURE proc1 AS

BEGIN

COMMIT /\* **COMMENT 'PROCEDURE proc1 committed' \*/ /\* [REMOVED] RULE-32017 :**

**The COMMENT clause in the COMMIT statement is removed \*/;**

END;

## RULE-32018

- Type: CONVERTED
- Description: The TO SAVEPOINT clause in the ROLLBACK statement is converted
- Original SQL Text:

CREATE OR REPLACE PROCEDURE proc1 AS

BEGIN

**ROLLBACK TO sp1;**

END;

- Processed SQL Text:

CREATE OR REPLACE PROCEDURE proc1 AS

BEGIN

**ROLLBACK TO SAVEPOINT sp1;**

END;

## RULE-32019

- Type: REMOVED
- Description: The label in the CASE statement has been removed.
- Original SQL Text

CREATE OR REPLACE FUNCTION func1(a1 VARCHAR2)

RETURN VARCHAR2 AS

v1 VARCHAR2(25);

BEGIN

<<test>>

CASE UPPER(a1)

WHEN 'ROCK' THEN v1 := 'Paper';

WHEN 'PAPER' THEN v1 := 'Scissor';

WHEN 'SCISSOR' THEN v1 := 'Rock';

ELSE v1 := 'Unavailable input value';

**END CASE test;**

```
RETURN v1;
```

```
END;
```

- Processed SQL Text:

```
CREATE OR REPLACE FUNCTION func1(a1 VARCHAR2)
```

```
RETURN VARCHAR2 AS
```

```
v1 VARCHAR2(25);
```

```
BEGIN
```

```
<<test>>
```

```
CASE UPPER(a1)
```

```
WHEN 'ROCK' THEN v1 := 'Paper';
```

```
WHEN 'PAPER' THEN v1 := 'Scissor';
```

```
WHEN 'SCISSOR' THEN v1 := 'Rock';
```

```
ELSE v1 := 'Unavailable input value';
```

```
END CASE ;
```

```
RETURN v1;
```

```
END;
```

## **RULE-32020**

- Version Scope : Altibase 6.5.1.0.0 or earlier
- Type: TODO
- Description: The BULK COLLECT INTO clause of the FETCH statement should be
- Original SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1 AS
```

```
TYPE at_1 IS TABLE OF NUMBER;
```

```
CURSOR cur1 IS SELECT c1 FROM t1;
```

```
arr1 at_1;
```

```
BEGIN
```

```
OPEN cur1;
```

```
FETCH cur1 BULK COLLECT INTO arr1;
```

```
DBMS_OUTPUT.PUT_LINE(arr1.COUNT);
```

```
CLOSE cur1;
```

```
END;
```

- Processed SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1 AS
```

```
TYPE at_1 IS TABLE OF NUMBER;
```

```
CURSOR cur1 IS SELECT c1 FROM t1;
```

```

arr1 at_1;

BEGIN

OPEN cur1;

FETCH cur1 BULK COLLECT INTO arr1 /* [TODO] RULE-32020 : BULK COLLECT INTO
clause of the FETCH statement must be converted manually */;

DBMS_OUTPUT.PUT_LINE(arr1.COUNT);

CLOSE cur1;

END;

```

## RULE-32021

- Type: TODO
- Description: The dynamic RETURNING clause should be manually converted.
- Original SQL Text:

```

CREATE OR REPLACE PROCEDURE proc1 AS
v1 t1%ROWTYPE;

BEGIN

EXECUTE IMMEDIATE 'DELETE FROM t1 WHERE c1=SYSDATE' RETURNING INTO v1;

END;

```
- Processed SQL Text:

```

CREATE OR REPLACE PROCEDURE proc1 AS
v1 t1%ROWTYPE;

BEGIN

EXECUTE IMMEDIATE 'DELETE FROM t1 WHERE c1=SYSDATE' RETURNING INTO v1 /*
[TODO] RULE-32021 : Dynamic returning clause must be converted manually */;

END;

```

## RULE-32022

- Type: REMOVED
- Description: THE in front of the subquery has been removed.
- Original SQL Text:

```

CREATE OR REPLACE PROCEDURE proc1 AS
v1 NUMBER;

BEGIN

SELECT t1.c1 INTO v1

FROM THE (SELECT EXTRACT(MONTH FROM SYSDATE) curr_month FROM dual) dt, t1

WHERE t1.c2 = dt.curr_month;

DBMS_OUTPUT.PUT_LINE(v1);

```

END;

- Processed SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1 AS
```

```
v1 NUMBER;
```

```
BEGIN
```

```
SELECT t1.c1 INTO v1
```

```
FROM /* THE */ /* [REMOVED] RULE-32022 : The THE keyword is removed */
```

```
(SELECT EXTRACT(MONTH FROM SYSDATE) curr_month FROM dual) dt, t1
```

```
WHERE t1.c2 = dt.curr_month;
```

```
DBMS_OUTPUT.PUT_LINE(v1);
```

```
END;
```

## RULE-32024

- Type: REMOVED
- Description: The target procedure has been removed.
- Original SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1 ( p_emp_no IN integer ) AS
```

```
v1 NUMBER;
```

```
BEGIN
```

```
DBMS_OUTPUT.ENABLE;
```

```
SELECT i1 INTO v1
```

```
FROM t1 WHERE i1 = p_emp_no;
```

```
DBMS_OUTPUT.PUT_LINE( 'i1 : ' || v1 );
```

```
END;
```

- Processed SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1 ( p_emp_no IN integer ) AS
```

```
v1 NUMBER;
```

```
BEGIN
```

```
/* DBMS_OUTPUT.ENABLE; */ /* [REMOVED] RULE-32024 : The target procedure  
has been removed */
```

```
SELECT i1 INTO v1
```

```
FROM t1 WHERE i1 = p_emp_no;
```

```
DBMS_OUTPUT.PUT_LINE( 'i1 : ' || v1 );
```

```
END;
```

## RULE-33001

- Type: TODO
- Description: This is an exception which is not supported.
- Original SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1 AS
BEGIN
NULL;
EXCEPTION
WHEN ACCESS_INT0_NULL THEN
DBMS_OUTPUT.PUT_LINE('Exception Name: ACCESS_INT0_NULL, Error Code: -6530');
END;
```

- Processed SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1 AS
BEGIN
NULL;
EXCEPTION
WHEN ACCESS_INT0_NULL /* [TODO] RULE-33001 : Unsupported exception */ THEN
DBMS_OUTPUT.PUT_LINE('Exception Name: ACCESS_INT0_NULL, Error Code: -6530');
END;
/
```

## RULE-33002

- Version Scope : Altibase 6.3.1.0.0 or later
- Type: TODO
- Description: The user should check whether the built-in package is installed in Altibase.
- Original SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1 AS
BEGIN
NULL;
EXCEPTION
WHEN UTL_FILE.INVALID_FILENAME THEN
DBMS_OUTPUT.PUT_LINE('Exception Name: UTL_FILE.INVALID_FILENAME, Error Code:');
END;
```

- Processed SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1 AS
BEGIN
```



```

NULL;

EXCEPTION

WHEN UTL_FILE.INVALID_FILENAME /* [TODO] RULE-33002 : Confirm the target
built-in package is installed at Altibase */ THEN

DBMS_OUTPUT.PUT_LINE('Exception Name: UTL_FILE.INVALID_FILENAME, Error Code:');

END;

```

## **RULE-33003**

- Type: CONVERTED
- Description: The exception has been converted according to Altibase grammar.
- Original SQL Text:

```

CREATE OR REPLACE PROCEDURE proc1 AS

BEGIN

NULL;

EXCEPTION

WHEN UTL_FILE.INVALID_PATH THEN

DBMS_OUTPUT.PUT_LINE('Exception Name: UTL_FILE.INVALID_PATH, Error Code:');

END;

```
- Processed SQL Text:

```

CREATE OR REPLACE PROCEDURE proc1 AS

BEGIN

NULL;

EXCEPTION

WHEN INVALID_PATH THEN

DBMS_OUTPUT.PUT_LINE('Exception Name: UTL_FILE.INVALID_PATH, Error Code:');

END;

```

## **Expression Conversion Rules**

### **RULE-40001**

- Type: CONVERTED
- Description: The built-in package has been converted.
- Original SQL Text:

```

CREATE OR REPLACE PROCEDURE proc1 AS

BEGIN

DBMS_OUTPUT.PUT('Hello');

DBMS_OUTPUT.PUT_LINE('world!');

```

END;

- 변환된 SQL 문장:

```
CREATE OR REPLACE PROCEDURE proc1 AS
```

```
BEGIN
```

```
SYSTEM_.PRINT('Hello ');
```

```
SYSTEM_.PRINTLN('world!');
```

```
END;
```

## RULE-40002

- Version Scope: Altibase 6.3.1.0.0 or later
- Type: TODO
- Description: The user should check whether the target built-in package is installed in Altibase.
- Original SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1 AS
```

```
BEGIN
```

```
DBMS_OUTPUT.NEW_LINE;
```

```
END;
```

- Processed SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1 AS
```

```
BEGIN
```

```
DBMS_OUTPUT.NEW_LINE /* [TODO] RULE-40002 : Confirm the target built-in  
package is installed at Altibase */;
```

```
END;
```

## RULE-40003

- Type: TODO
- Description: The target built-in packages should be manually converted.
- Original SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1(p_file FILE_TYPE) AS
```

```
BEGIN
```

```
UTL_FILE.PUTF(p_file, 'Hello %s!', 'world');
```

```
END;
```

- Processed SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1(p_file FILE_TYPE) AS
```

```
BEGIN
```

```
UTL_FILE.PUTF(p_file, 'Hello %s!', 'world') /* [TODO] RULE-40003 : The target  
built-in package must be converted manually */;
```

END;

## RULE-40004

- Type: CONVERTED
- Description: The target SQL functions have been converted.
- Original SQL Text:

```
CREATE OR REPLACE VIEW v1 AS  
SELECT UID FROM dual;
```

- Processed SQL Text:  
CREATE OR REPLACE VIEW v1 AS  
SELECT **USER\_ID()** FROM dual;

## RULE-40005

- Type: TODO
- Description: This function is not supported.
- Original SQL Text:

```
CREATE OR REPLACE FUNCTION func1(p1 VARCHAR2)  
RETURN NUMBER AS  
v1 NUMBER := LENGTHC(p1);  
BEGIN  
RETURN v1;  
END;
```

- Processed SQL Text:  
CREATE OR REPLACE FUNCTION func1(p1 VARCHAR2)  
RETURN NUMBER AS  
v1 NUMBER := **LENGTHC(p1) /\* [TODO] RULE-40005 : Unsupported function \*/;**  
BEGIN  
RETURN v1;;  
END;

## RULE-40006

- Type: CONVERTED
- Description: The arguments of TRIM have been converted.
- Original SQL Text:

```
CREATE OR REPLACE VIEW stats AS  
SELECT TRIM(LEADING 0 FROM total_stats)  
FROM test_result WHERE date = SYSDATE;
```

- Processed SQL Text:

```
CREATE OR REPLACE VIEW stats AS
```

```
SELECT LTRIM(total_stats, 0)
```

```
FROM test_result WHERE date = SYSDATE;
```

## RULE-40007

- Type: CONVERTED
- Description: The arguments of BIN\_TO\_NUM function have been converted by being connected with '||'.

- Original SQL Text:

```
CREATE OR REPLACE VIEW status_view AS
```

```
SELECT BIN_TO_NUM(cp_plan, hp_plan, tv_plan, net_plan) status
```

```
FROM service_tbl WHERE ym = TO_CHAR(SYSDATE, 'YYYYMM');
```

- Processed SQL Text:

```
CREATE OR REPLACE VIEW status_view AS
```

```
SELECT BIN_TO_NUM(cp_plan || hp_plan || tv_plan || net_plan) status
```

```
FROM service_tbl WHERE ym = TO_CHAR(SYSDATE, 'YYYYMM');
```

## RULE-40008

- Type: TODO
- Description: The CAST function containing a subquery as an argument should be manually converted.

- Original SQL Text:

```
CREATE OR REPLACE VIEW v1 AS
```

```
SELECT c1, CAST(MULTISET(SELECT c1 FROM t2 ORDER BY c2) AS tmp_tbl)
```

```
FROM t1 ORDER BY c1;
```

- Processed SQL Text:

```
CREATE OR REPLACE VIEW v1 AS
```

```
SELECT c1, CAST(MULTISET(SELECT c1 FROM t2 ORDER BY c2) AS tmp_tbl) /* [TODO]
```

```
RULE-40008 : The CAST function containing a subquery as an argument should be manually converted */
```

```
FROM t1 ORDER BY c1;
```

## RULE-40009

- Type: TODO
- Description: The DUMP function contains multiple arguments should be manually converted.

- Original SQL Text:

```
CREATE OR REPLACE VIEW v1 AS
```

```
SELECT DUMP(c3, 8, 3, 2)
```

```
FROM t1 WHERE c3 = 100 ORDER BY c2;
```

- Processed SQL Text:

```
CREATE OR REPLACE VIEW v1 AS
```

```
SELECT DUMP(c3, 8, 3, 2) /* [TODO] RULE-40009 : The DUMP function contains  
multiple arguments should be manually converted */
```

```
FROM t1 WHERE c3 = 100 ORDER BY c2;
```

## **RULE-40010**

- Type: CONVERTED
- Description: The EXTRACT function has been converted.
- Original SQL Text:

```
CREATE OR REPLACE VIEW rsvStats_year AS
```

```
SELECT EXTRACT(YEAR FROM rsv_date) year, COUNT(*) cnt
```

```
FROM rsv_table GROUP BY EXTRACT(YEAR FROM rsv_date);
```

- Processed SQL Text:

```
CREATE OR REPLACE VIEW rsvStats_year AS
```

```
SELECT EXTRACT(rsv_date, 'YEAR') year, COUNT(*) cnt
```

```
FROM rsv_table GROUP BY EXTRACT(rsv_date, 'YEAR');
```

## **RULE-40011**

- Type: TODO
- Description: The datetime field prefixed with 'TIMEZONE' in the EXTRACT function should be manually converted.
- Original SQL Text:

```
CREATE VIEW view1 AS
```

```
SELECT EXTRACT(TIMEZONE_REGION FROM CURRENT_TIMESTAMP) FROM dual;
```

- Processed SQL Text:

```
CREATE VIEW view1 AS
```

```
SELECT EXTRACT(TIMEZONE_REGION /* [TODO] RULE-40011 : The datetime field  
prefixed 'TIMEZONE' in the EXTRACT function should be manually converted */
```

```
FROM CURRENT_TIMESTAMP) FROM dual;
```

## **RULE-40012**

- Type: TODO
- Description: The EXTRACT function containing XMLType instance as parameters should be manually converted.
- Original SQL Text:

```
CREATE VIEW view1 AS
```

```
SELECT EXTRACT(emp_into, 'Employee/Name') emp_name FROM dual;
```

- Processed SQL Text:

```
CREATE VIEW view1 AS
```

```
SELECT EXTRACT(emp_info, 'Employee/Name') /* [TODO] RULE-40012 : The EXTRACT function containing XMLType instance as parameters should be manually converted */ emp_name FROM dual;
```

## **RULE-40013**

- Type: CONVERTED
- Description: The SYS\_CONTEXT function has been converted.
- Original SQL Text:

```
CREATE VIEW view1 AS
```

```
SELECT SYS_CONTEXT('USERENV', 'SESSION_USER') FROM dual;
```

- Processed SQL Text:

```
CREATE VIEW view1 AS
```

```
SELECT USER_NAME() FROM dual;
```

## **RULE-40014**

- Type: TODO
- Description: The precision degree, which is an optional argument, of the CURRENT\_TIMESTAMP function should be manually converted.
- Original SQL Text:

```
CREATE VIEW view1 AS
```

```
SELECT CURRENT_TIMESTAMP(0) FROM dual;
```

- Processed SQL Text:

```
CREATE VIEW view1 AS
```

```
SELECT CURRENT_TIMESTAMP(0) /* [TODO] RULE-40014 : The optional argument of the function CURRENT_TIMESTAMP, precision must be converted manually */ FROM dual;
```

## **RULE-40015**

- Type: TODO
- Description: The nlsparam, which is an optional argument, specifying languages should be manually converted.
- Original SQL Text:

```
CREATE VIEW view1 AS
```

```
SELECT TO_CHAR(SYSDATE, 'DL', 'NLS_DATE_LANGUAGE = korean') FROM dual;
```

- Processed SQL Text:

```
CREATE VIEW view1 AS
```

```
SELECT TO_CHAR(SYSDATE, 'DL', 'NLS_DATE_LANGUAGE = korean' /* [TODO]
```

**RULE-40015 : The optional argument, nlsparam must be converted manually \*/)**

```
FROM dual;
```

## RULE-40016

- Type: TODO
- Description: The optional argument match\_param, which may affect operating a function, should be manually converted.

- Original SQL Text:

```
CREATE VIEW view1 AS
```

```
SELECT REGEXP_SUBSTR(content, '(Name: )([a-z]+) ([a-z]+))', 1, 1, 'i',  
3) "First Name" FROM page_pi;
```

- Processed SQL Text:

```
CREATE VIEW view1 AS
```

```
SELECT REGEXP_SUBSTR(content, '(Name: )([a-z]+) ([a-z]+))', 1, 1, 'i' /*
```

**[TODO] RULE-40016 : The optional argument, match\_param must be converted manually \*/, 3) "First Name" FROM page\_pi;**

## RULE-40017

- Version Scope: Altibase 6.3.1.0.0 or above
- Type: TODO
- Description: The optional argument subexpr should be manually converted.

- Original SQL Text:

```
CREATE VIEW view1 AS
```

```
SELECT REGEXP_SUBSTR(content, '(Name: )([a-z]+) ([a-z]+))', 1, 1, 'i', 4)  
"Family Name" FROM page_pi;
```

- Processed SQL Text:

```
CREATE VIEW view1 AS
```

```
SELECT REGEXP_SUBSTR(content, '(Name: )([a-z]+) ([a-z]+))', 1, 1, 'i', 4 /*
```

**[TODO] RULE-40017 : The optional argument, subexpr must be converted manually \*/) "Family Name" FROM page\_pi;**

## RULE-40018

- Type: CONVERTED
- Description: The MOD operator has been converted as a function.
- Original SQL Text:

```
CREATE FUNCTION func1(p1 PLS_INTEGER) RETURN PLS_INTEGER AS
```

```
v1 PLS_INTEGER := p1 MOD 2;
```

```
BEGIN
```

```
RETURN v1;
```

```
END;
```

- Processed SQL Text:

```
CREATE FUNCTION func1(p1 PLS_INTEGER) RETURN PLS_INTEGER AS
```

```
v1 PLS_INTEGER := MOD(p1, 2);
```

```
BEGIN
```

```
RETURN v1;
```

```
END;
```

## **RULE-40019**

- Type: CONVERTED
- Description: The built-in package has been converted.
- Original SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1
```

```
AS
```

```
BEGIN
```

```
DBMS_MVIEW.REFRESH('CAL_MONTH_SALES_MV', 'F', 'CF', ' ', TRUE,  
FALSE, 0,0,0, FALSE, FALSE);
```

```
END;
```

- Processed SQL Text:

```
CREATE OR REPLACE PROCEDURE proc1
```

```
AS
```

```
BEGIN
```

```
REFRESH_MATERIALIZED_VIEW(USER_NAME(), 'CAL_MONTH_SALES_MV');
```

```
REFRESH_MATERIALIZED_VIEW(USER_NAME(), 'F', 'CF', ' ', TRUE,  
FALSE, 0,0,0, FALSE, FALSE);
```

```
END;
```

## **RULE-40020**

- Type: CONVERTED
- Description: The WM\_CONCAT function has been converted to the LISTAGG function.
- Original SQL Text:

```
SELECT WM_CONCAT(val) FROM t1;
```

- Processed SQL Text:

```
SELECT LISTAGG(val, ',') WITHIN GROUP(ORDER BY val) FROM t1;
```



## RULE-40021

- Type: TODO
- Description: The parameter in the function 'SYS\_CONTEXT' should be converted manually.
- Original SQL Text:

```
CREATE VIEW v_r40021 AS SELECT SYS_CONTEXT('USERENV', 'INSTANCE_NAME') FROM dual;
```

- Processed SQL Text:

```
CREATE VIEW v_r40021 AS SELECT SYS_CONTEXT('USERENV', 'INSTANCE_NAME') /*  
[TODO] RULE-40021 : The parameter in the function 'SYS_CONTEXT' should be  
converted manually. */ FROM dual;
```

## RULE-40022

- Type: CONVERTED
- Description: The third argument of the function 'SYS\_CONTEXT', which indicates the length of the return value, is converted to the function 'SUBSTR' surrounding 'SYS\_CONTEXT'.
- Original SQL Text:

```
CREATE VIEW v_r40022 AS SELECT SYS_CONTEXT('USERENV', 'INSTANCE_NAME', 100)  
FROM dual;
```

- Processed SQL Text:

```
CREATE VIEW v_r40022 AS SELECT SUBSTR(SYS_CONTEXT('USERENV', 'INSTANCE_NAME'),  
0, 100) FROM dual;
```

# Appendix F: FAQ

---

## Common

### FAQ 1. OutOfMemoryError occurs during data transfer.

#### Cause

This error can occur due to a lack of memory while several threads are inserting data into the target database through batch operations.

#### Solution

According to the error message output from OutOfMemoryError, there are two cases as below.

#### <Java heap space>

Depending on the situation, you can choose between the two methods below.

- Change performance property values to reduce memory usage

1. Open the project.

2. Click the menu "Migration" -> "Migration Options".

3. Lower the Batch Size and Thread Count values

- Increase the maximum amount of memory the program can use

1. Open the executable file (migcenter.bat or migcenter.sh) with the editor.

2. Set the value of the option '-Xmx' that sets the maximum heap size in the JVM to be higher than the existing value.

Note: On Windows 32 bit machines, you can set Xmx values up to 1.5 GB due to OS dependency.

#### <PermGen space>

1. Open the executable file (migcenter.bat or migcenter.sh) with the editor.

2. Set the '-XX: MaxPermSize' option to set the maximum size of the permanent generation space in the JVM above the existing value.

#### <Metaspace>

If the version of the JVM you are using is Java 8 or higher, the lack of space in Metaspace may be the cause. Metaspace, implemented since Java 8, is a replacement for PermGen (permanent generation space).

- Open the executable file (migcenter.bat or migcenter.sh) with an editor.
- Option to set the maximum size of permanent generation space in JVM  
Change '-XX: MaxPermSize' to an option that determines the maximum size of the metaspace, and modify it higher than the existing value.
- - Before change: -XX:MaxPermSize=128m
  - After change: -XX:MaxMetaspaceSize=256 m

References:

- <https://dzone.com/articles/java-8-permgen-metaspace>
- <https://www.infoq.com/articles/Java-PERMGGEN-Removed>

## **The NOT NULL constraint on a table column whose data type is LOB is not migrated.**

### **Cause**

It is a phenomenon that the Migration Center arbitrarily removes the NOT NULL constraint on the LOB column.

The Migration Center inserts data into the target database using a query that contains parameters (for example, "insert into tablename values (?,?)").

Unlike other columns, Altibase processes data into LOB columns by initializing data to null first, then receiving data through LOB Locator and inputting data. Therefore, if the column has a NOT NULL constraint, the insertion is failed because the data cannot be initialized to null.

In order to overcome this difference, the Migration Center removes the NOT NULL constraint on the LOB column to perform data migration. For more detailed information, refer to the *General Reference* - 1. Data Type - LOB Data Type - Restrictions.

Because Oracle performs constraint checking only at commit time, you can insert data even under these conditions.

### **Solution**

After the migration, execute an SQL statement that adds a NOT NULL constraint to the corresponding column in Altibase

## **Database Character Set Notes**

Generally, it is recommended to use the same DB character set of the source database and target database.

If you need to specify different character sets because of special circumstances, you should check whether each DB character set is compatible. If you migrate data between incompatible character sets, the data may be corrupted.

### **Example**

1. From source database KSC5601 to Destination database UTF8:

Migratable

KSC5601 Korean data can be written in UTF8. Therefore, each character set is compatible with each other.

**Note:** Because the data length can be longer, you need to increase the size of the character type column when you relocate the table object.

2. From source database KSC5601 to Destination database GB231280:

Not migratable

KSC5601 Korean data cannot be written as GB231280. Therefore, each character set is incompatible with each other.

If data migration is required under these conditions, the table column data types CHAR and VARCHAR of the target database should all be changed to NCHAR and NVARCHAR, and data transfer must be performed.

## **JDBC & Migration Center Character Set Process**

1. When fetching data from the source database, get the char data as the source database DB character set and store it in a byte array.
2. Convert the data stored in the byte array to UTF-16 format and store it in a String object of Java base type.
3. Pass the String object to the PreparedStatement object that inserts the data into the target database with the setString function.
4. JDBC driver converts the String object into data into the DB character set of the target database and insert them into the target database.

## The program terminates abnormally while selecting the JDBC driver file.

### Cause

This is an error that can occur when running the Migration Center in a Windows environment. While selecting the JDBC driver file when registering the connection information, changing the directory may cause the problem that the program terminates abnormally. This is a Java JVM crash caused by a communication problem between the JVM and the Windows operating system. Users can check for the Java crashes that usually occurs in the old version of the JVM through the link below.

[http://www.java.com/en/download/help/error\\_hotspot.xml](http://www.java.com/en/download/help/error_hotspot.xml)

### Solution

Install the latest version of the JRE, modify the JAVA\_HOME path in the migcenter.bat file, and rerun the Migration Center.

## When running the CLI Mode, UnsatisfiedLinkError: /usr/lib/jvm/java-8-oracle/jre/lib/amd64/libawt\_xawt.so: libXrender.so.1: cannot open shared object file: No such file or directory has occurred.

This error occurs when the 64-bit libXrender.so file is requested by the JVM, but the package is not installed in the OS.

### Cause

This usually occurs when you install a 32-bit JRE on a 64-bit device and try to run the Java program by using it.

### Solution

After installing a new JRE that matches the bit value of the device, change JAVA\_HOME to the appropriate location. Debian-like Linux installs a package by executing the following command.

```
sudo apt-get install libxrender1
```

### References:

- <http://www.jmeter-archive.org/Bug-in-running-Jmeter-on-Ubuntu-12-04-td5722692.html>
- <https://www.spigotmc.org/threads/bungeecord-not-starting-up-on-java-8.24652/>

## When Running the Migration Center, the message "Could not create the java virtual machine" is displayed and the startup fails.

### Cause

This is an error that can occur when the maximum memory allocation value (-Xmx) set in bat and sh is larger than the memory allocated by the system. In particular, this error is frequently reported in Window O/S 32 bit

## **Solution**

Change the value of -Xms -Xmx in bat and sh according to the user environment, and then restart Migration Center.

## **Oracle**

### **FAQ 1. The error message 'ORA-01652 unable to extend temp segment by 128 in tablespace TEMP' is printed.**

#### **Cause**

This error is caused by a lack of Oracle's temporary tablespace space during large-volume query processing.

#### **Solution**

The temporary table space for the connected user must be extended.

### **FAQ 2. During the Run phase, error message 'Fetch data from source database has been failed. Stream has already been closed' is printed and migration of some data is failed.**

#### **Cause**

Tables containing LONG or LONG RAW and LOB columns can cause problems during data migration. Below is an excerpt from the Oracle JDBC Developer's Guide ([link](#)).

#### 12. Java Streams in JDBC - Streaming LONG or LONG RAW Columns

Because the column data remains in the communications channel, the streaming mode interferes with all other use of the connection. Any use of the connection, other than reading the column data, will discard the column data from the channel.

In Oracle, data transmission of a LONG or LONG RAW column is done through a stream. If stream of other data types also is transmitted through the same connection, the data transmission can be interrupted. This means that if a LONG or LONG RAW column and a LOB column are in the same table, it cannot guarantee that the data in the table will succeed. For this reason, Oracle does not recommend using this configuration.

#### **Solution**

The table cannot be migrated via the Migration Center.

**When you start the Reconcile step, the error message 'Unable to find any volatile tablespace to store temporary tables in the destination database' is displayed.**

## Cause

If there is a global temporary table among the list of migration objects of the source database, Oracle, a volatile tablespace must exist in the target database, Altibase. Oracle's global temporary tables are migrated to Altibase's temporary tables, and Altibase's temporary tables can only be stored in volatile tablespaces. (Refer to the manual: *SQL Reference* - 3. Data Definition Language - CREATE TABLE - Description)

When performing the Reconcile step, the Migration Center takes a list of Altibase tablespaces that the user can access and tries to map tablespaces and tables between databases. At this time, this error occurs when there is no accessible volatile tablespace in Altibase to be mapped for a global temporary table in Oracle.

## Action

Create a volatile tablespace in the target database, Altibase, grant access privileges, and then perform the reconcile step again.

## SQLException: Protocol violation occurs during data migration.

### Cause

An OOM error occurred during communication and it was lost, and a protocol violation error was returned.

### Solution

Increase the maximum memory size that the program can use.

1. Open the executable file (migcenter.bat or migcenter.sh) with an editor.
2. Modify the value of option '-Xmx', which determines the maximum heap size in the JVM, than the existing value.

### References:

- <https://stackoverflow.com/questions/29372626/sqlexception-protocol-violation-in-oracle>
- <https://stackoverflow.com/questions/18227868/protocol-violation-oracle-jdbc-driver-issue?rq=1>

## Various SQLExceptions can occur after an OutOfMemoryError occurs during data migration.

During a large amount of data migration, there are several cases in which there are multiple SQLException related to fetch or bind in Oracle. In this case, if only one of the tables is successful in table mode, the error caused by OOM can be suspected.

Example)

Caused by: java.sql.SQLException: Fail to convert to internal representation  
at oracle.jdbc.driver.CharCommonAccessor.getBigDecimal(CharCommonAccessor.java:414)

Invalid column type: getCLOB not implemented for class oracle.jdbc.driver.T4CVarCharAccessor

## Cause

Various malfunctions are possible after the OOM occurs inside the Oracle JDBC driver.

## Solution

Refer to OutOfMemoryError in the Common section.

## NullPointerException may occur during the build phase.

When the source database is Oracle 9i, 10, the following NullPointerException may occur during the build phase due to Oracle JDBC driver compatibility error:

```
Fail to retrieve Source DDL: java.lang.NullPointerException
at oracle.jdbc.driver.T4C8Oall.getNumRows(T4C8Oall.java:1046)
at oracle.jdbc.driver.T4CPreparedStatement.executeForRows(T4CPreparedStatement.java:1047)
at oracle.jdbc.driver.OracleStatement.executeMaybeDescribe(OracleStatement.java:1207)
at oracle.jdbc.driver.OracleStatement.doExecuteWithTimeout(OracleStatement.java:1296)
at oracle.jdbc.driver.OraclePreparedStatement.executeInternal(OraclePreparedStatement.java:3608)
at oracle.jdbc.driver.OraclePreparedStatement.executeQuery(OraclePreparedStatement.java:3652)
at
oracle.jdbc.driver.OraclePreparedStatementWrapper.executeQuery(OraclePreparedStatementWrapp
er.java:1207)
at
com.altibase.migLib.meta.SrcDbMeta_Oracle_9_0_0_0.getSrcDdlDbmsMetaData(SrcDbMeta_Oracle_9_
0_0_0.java:2251)
```

## Cause

Oracle JDBC Driver compatibility issues

## Solution

Replace the JDBC driver file for Oracle in MigrationCenter with the JDBC driver file for your Oracle DBMS.

# MS-SQL

## When "Test" button is pressed during connection information registration, connection is failed with error message

## Cause

During registering MS-SQL connection information, when "Test" button is clicked, the following error message may be displayed:

- "Migration Center can support MS-SQL user who has a single schema only."
- "User doesn't have appropriate schema in target database."

Registration is not allowed because the schema relationship of the user of the connection information is incompatible with Altibase.

MS-SQL has a different relationship between users and schemas from that of Altibase. Altibase has a structure that a single schema is assigned to each user and the database object is dependent on the schema. On the other hand, in MS-SQL, a single user is allowed to have from zero to multiple schemas, and each schema has its own database objects. the Migration Center allows connection information registration only if the MS-SQL user owns only one schema.

Therefore, if an MS-SQL user has no schema or multiple schemas, it is unable to register a connection information with that user due to schema structure difference.

### **Solution**

Let the user of the connection information have only one schema.

## **When the "Test" button is pressed during connection information registration, the program stops.**

### **Cause**

It is presumably due to a conflict between the JVM installed on the appliance and the JVM embedded in the Migration Center. This problem may be shown up when the running operating system is Windows and a Java Runtime Environment (JRE) is installed before installing a Migration Center.

### **Solution**

You should open the executable file migcenter.bat with an editor and change the value of the environment variable JAVA\_HOME to the location of the JRE already installed on the machine. The JRE should be changed to Java SE 5.0 or later.

## **The error message 'Unable to insert (or update) NULL into NOT NULL column.' is printed and data migration is failed.**

### **Cause**

This is because the difference between databases on how to handle zero-length string in column with not null constraint. MS-SQL allows inserting a zero-length string into a table column that is subject to a NOT NULL constraint. In Altibase, a zero-length string means NULL, so it does not allow inserting a zero-length string into a table column that is subject to a NOT NULL.

### **Solution**

Reconcile phase - In DDL Editing, delete the NOT NULL constraint from the Destination DDL of the corresponding table and click the "Save" button to save it.

## **Migration of duplicate foreign key is failed..**

### **Cause**

MS-SQL allows duplicate foreign keys while Altibase does not. So, only one foreign key will be migrated.



## Action

In the "Missing" tab of the report created after the Run step, you can see the foreign keys that failed to escalate.

## Altibase

### When migrating Altibase version 5.1.5 or lower, the characters are broken.

#### Cause

Altibase version 5.1.5 or lower does not support globalization, so JDBC does not know how to handle the character set of the database.

#### Action

You must include the character set value (for example, KSC5601) set in the destination database in the encoding option of the corresponding database connection information in the Migration Center. Here's how to check the Altibase character set.

- Version 4.3.9 ~ 5.1.5:  
`SELECT VALUE1 FROM V$PROPERTY WHERE NAME = 'NLS_USE';`
- Version 5.3.3 or later:  
`SELECT NLS_CHARACTERSET FROM V$NLS_PARAMETERS;`

### In the Reconcile step, "Tablespace to Tablespace Mapping" does not show a specific tablespace.

#### Cause

The user in the connection information at the Migration Center does not have privilege to access to the tablespace.

#### Solution

Grant the Altibase user access to the tablespace.

### When migrating Altibase version 4.5.1.0 or earlier, it fails to retrieve information of a column whose data type is BLOB, byte, or nibble.

#### Cause

The Altibase JDBC driver of the corresponding version cannot return the BLOB, byte, or nibble data type to UNKNOWN to know the column data type.

#### Solution

Tables with BLOB, byte, and nibble data types are migrated using aexport and iloader.

## **Some data of bit, varbit, and nibble data types migrated from Altibase 6.1.1 and earlier versions do not match the original database.**

### **Cause**

When the Altibase 6.1.1 or lower JDBC driver inserts bit, varbit, or nibble type data in batch execution, it fails to migrate some data normally.

### **Solution**

Open the project, click the menu Migration-Migration Option, select 'No' for Batch Execution, and perform data migration.

## **Informix**

### **Java.sql.SQLException: Encoding or code set not supported in Informix JDBC Driver during data migration."**

The following SQLException occurred while fetching from Informix during data migration. This is an exception that occurs when retrieving this value when a byte of a multi-byte character is input to the Informix DB while being cut off.

Example)

```
java.sql.SQLException: Encoding or code set not supported.  
at com.informix.util.IfxErrMsg.getSQLException(IfxErrMsg.java:412)  
at com.informix.jdbc.IfXChar.fromIfX(IfXChar.java:235)  
at com.informix.jdbc.IfXRowColumn.a(IfXRowColumn.java:380)  
at com.informix.jdbc.IfXRowColumn.a(IfXRowColumn.java:282)  
at com.informix.jdbc.IfXSqli.a(IfXSqli.java:4657)  
at com.informix.jdbc.IfXResultSet.a(IfXResultSet.java:666)  
at com.informix.jdbc.IfXResultSet.b(IfXResultSet.java:638)  
at com.informix.jdbc.IfXResultSet.getString(IfXResultSet.java:724)  
at com.altibase.migLib.run.databinder.DataBinder.getValuesFromSrc(DataBinder.java:445)
```

### **Cause**

If an Informix DB is entered with bytes of multi-byte characters truncated, an exception occurs when retrieving this value.

### **Solution**

Add IFX\_USE\_STRENC = true to Informix connection properties.

### **References:**

<https://m.blog.naver.com/PostView.nhn?blogId=jangkeunna&logNo=70146227929&proxyReferer=https%3A%2F%2Fwww.google.co.kr%2F>

# MySQL

**When the data type of a table column is VARCHAR or CHAR with a size of 1 or 2, data of size 1 is migrated to null.**

## Cause

If you find that the MySQL JDBC driver returns a null value when importing data with a size of 1, it is probably a MySQL JDBC driver issue.

## Action

You need to replace the driver with version 5.0.8 of MySQL Connector / J ([link](#)). If the same happens in the retry, cancel Batch Execution by following the procedure below.

1. Open the project.
2. Click the menu "Migration" -> "Migration Options".
3. Change the value of "Batch Execution" to "No".

**Data types CHAR and VARCHAR are changed to NCHAR and NVARCHAR.**

## Cause

MySQL does not support NCHAR or NVARCHAR data types. Instead, it allows for user to specify national character set as an attribute of the CHAR or VARCHAR data type column. The Migration Center converts national character set specified CHAR or VARCHAR column to NCHAR and NVARCHAR column in order to migrate data successfully.

## Solution

This phenomenon is normal.

## Note:

In the default DataType Map of Migration Center, MySQL's NVARCHAR is mapped to NVARCHAR (10666) in Altibase. If the number of bytes per character in the national character set between MySQL and Altibase is different, performing the escalation without consideration of this may cause the schema not to be generated beyond the limit byte count. To avoid this situation, the Migration Center basically fixed the size of the NVARCHAR.

If the data size of the corresponding table column is not large, you can transfer the size of the source database as it is by following the procedure below.

1. Reconcile step: Click on "NVARCHAR" row in "Data Type Mapping"
2. Click the "Change" button
3. Select 'NVARCHAR' as Destination DB Data Type, leave Precision blank, and save

# TimesTen

**When registering connection information, when clicking "Test" button, error message 'Problems with loading native library / missing methods: no ttJdbcCS in java.library.path' is output.**

## Cause

This message shows up when the TimesTen Type 2 JDBC is failed to load the native library.

## Solution

Install the TimesTen client package on the machine where you want to run the Migration Center, then rerun the Migration Center. If the target operating system is Linux, users have to add the lib directory path of the client package to LD\_LIBRARY\_PATH environment variable after installing the client package.

**When I click "Test" button while registering connection information, I get error message 'Problems with loading native library / missing method: ~\bin\ttJdbcCS1122.dll: Cannot load AMD 64-bit.dll on a IA 32-bit platrom'.**

## Cause

The error message shows up when incompatible bit-version, 32-bit or 64-bit, between TimesTen client package and the JRE the Migration Center is using.

## Solution

Open the executable file (migcenter.bat or migcenter.sh) with an editor and change the value of the environment variable JAVA\_HOME. Specify the JAVA\_HOME path to the JRE that matches the number of bits in the installed TimesTen client package, then rerun the Migration Center.

**When registering connection information, when clicking "Test" button, error message 'Data source name not found and no default driver specified' is displayed.**

## Cause

This message is output when the DSN value entered in the connection information is invalid.

## Solution

Enter the DSN registered in the server into the DSN field.