

Project Online Data Migration

Migration Reference

Table of Contents

TABLE OF CONTENTS.....	2
DOCUMENT DETAILS.....	3
VERSION HISTORY.....	3
DOCUMENT PURPOSE.....	3
DOCUMENT STRUCTURE.....	3
MIGRATION OVERVIEW	4
INTRODUCTION.....	4
<i>What is being retired?</i>	4
<i>What will remain available?</i>	4
<i>Why is Microsoft retiring Project Online?</i>	4
MIGRATION REFERENCE.....	5
PROJECT ONLINE.....	5
<i>Overview</i>	5
<i>Exporting Data.....</i>	6
<i>Resources.....</i>	7
Unmodified Script.....	7
Modified Script.....	7
<i>Projects.....</i>	10
Unmodified Script.....	10
Modified Script.....	10
<i>Tasks.....</i>	13
Unmodified Script.....	13
Migration tasks to MS Project local custom fields.....	14
Migrating tasks directly to Altus.....	15
Lookup Tables.....	17
Cost Rates.....	19
Baselines.....	20
SHAREPOINT ONLINE.....	21
<i>Overview</i>	21
<i>Risks.....</i>	21
Unmodified Script.....	21
Modified Script.....	22
<i>Issues</i>	24
Unmodified Script.....	24
Modified Script.....	24
<i>Custom Lists.....</i>	27
<i>Documents.....</i>	29

Document Details

Version History

Version	Date	Author	Details
0.1	21 st April 2026	John Price	First draft.
1	22 nd April 2026	John Price	First version.
2	29 th April 2026	John Price	Updated to include information on filtering the export script using the ODATA feed.
3	29 th May 2026	John Price	Updated to include steps for updating the ImportTasks.ps1 for the direct migration of custom fields to Altus (bypassing Project Desktop).

Document Purpose

The purpose of this document is to provide the reader with technical details regarding the following:

- What data is migrated by the scripts without modifications?
- What data can be migrated with modifications to the scripts?
- What data is not migrated or is unsupported?

Document Structure

The document is structured around each part of the data migration and as such, is grouped into the following sections:

- Project Online
 - Projects
 - Resources
 - Tasks
 - Lookup tables
 - Cost Rates
 - Baselines
- SharePoint Online
 - Risks
 - Issues
 - Custom Lists
 - Documents

Migration Overview

Introduction

In 2024, Microsoft announced that it had **brought forward** the **original** retirement of Project Online from 2030 to **2026**, and then they announced that the official end date of Project Online would be **30th September 2026**.

From this date, Project Online will be shut down and no longer accessible. All Project Web App (PWA) access, data, and integrations will stop working.

What is being retired?

Project Online will be fully decommissioned. This includes the project subsites where users stored list-based information such as Risks, Issues, Actions, and Project Documentation.

What will remain available?

The following applications will remain available thew new and existing customers:

- Project Desktop (Stand-alone and M365 versions).
- [Project Server Subscription Edition](#).

Why is Microsoft retiring Project Online?

Microsoft has stated that the Project Online legacy architecture (built on older SharePoint services) limits the ability to deliver modern cloud, AI and integration features. Innovation investment is now focused on newer platforms built on the Microsoft Power Platform, Dataverse, and AI-enabled capabilities (like Planner Premium/Project Manager Agent).

Migration Reference

This section provides detailed information about the data that is migrated by each script. It contains references to the scripts and how/if they can be modified and extended by consultants.

Project Online

Overview

The Altus migration scripts enable the following data to be migrated from Project Online to Altus.

Data	Details
Resources	Resources represent the people, equipment, or materials required to complete project work.
Projects	Projects are structured containers that define a body of work with a specific goal, timeline, and set of deliverables.
Tasks	Tasks are the individual activities or work items that make up a project schedule.
Lookup tables	Lookup tables that have been created in PWA Settings in Project Online can be migrated to Altus. This includes hierarchical and multi-select lookup tables.
Cost Rates	Cost rates define how much a resource costs over time (e.g., hourly, daily, or per use).
Baselines	Baselines are snapshots of a project's original (or approved) schedule, cost, and scope at a specific point in time.

The sections below will specify which pieces of data are migrated without changes to the scripts and what types of data can be migrated by extending the scripts.

Exporting Data

The export script doesn't need to be modified but can be parameterised to filter the data that's in Project Online. This is useful in scenarios where the customer doesn't want to migrate all their projects to Altus.

The details below cover options for using the ODATA feed to filter the export results.

The export script can be updated to utilise different filters. Some examples of these have been provided below for reference:

Operators

These can be used to determine how fields are filtered:

Operator	Syntax
Equals	eq
Not Equals	ne
Greater Than	gt
Greater Than or Equal To	ge
Less Than	lt
Less Than or Equal To	le

Examples

Filter Value	Syntax
Text	EnterpriseProjectTypeName eq 'Major Project'
Numbers	ProjectFixedCost gt 0
Guids	EnterpriseProjectTypeId eq guid'7473ef8c-9f25-e911-afb0-00155da06b17'
Booleans	ProjectEnterpriseFeatures eq true
Date	ProjectStartDate gt datetime'2024-09-01T00:00:00Z'

The Project Online ODATA API can be accessed via this link if you wish to view the fields and data you wish to filter by:

https://<tenantname>.sharepoint.com/sites/pwa/_api/ProjectData

Resources

Unmodified Script

The unmodified script migrates the following data to Altus for resources:


.MPP Table	Altus Table
Resource Entry	sensei_bookableresource

.MPP Field	Altus Field	Details	Example
Name	sensei_name	Firstname Surname	Lucius Fox
User Logon Account	sensei_user	Firstname Surname	Lucius Fox
Max. Units	sensei_targetutilization	Default value set	100
Type	sensei_resourcetype	Default value set	Named
Role	sensei_primaryrole	Default value set	Unclassified
Calendar GUID	Sensei_enterprisecalendar	Default value set	Default Calendar

Modified Script

This script can be extended to migrate custom fields:

ImportResources.ps1

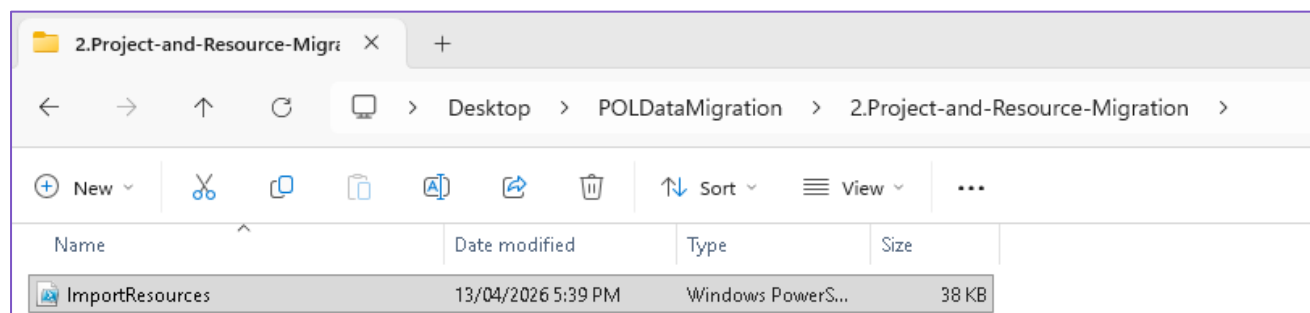

The script can be extended to migrate the following field types from Project Online to Altus:

Project Online Field Type	Dataverse Field Type	Dataverse Field Sub-type
Cost	Currency	N/A
Date (Date only)	Date and time	Date only
Date (Date and Time)	Date and time	Date and time
Duration	Whole Number	Duration
Flag	Choice	Yes/no
Number (Whole)	Whole Number	None
Number (Decimal)	Decimal	None
Text (Single line of Text)	Single line of text	Text
Lookup (Single Select)	Lookup	Text
Lookup (Multi Select)	Lookup	Text

Examples of the script blocks have been provided below.

The parts of the script that are highlighted below are as follows. Only these parts of the script block need to be updated.

Attribute	Details
Project Online Field	Display name for the field as it appears in Project Online.
Altus Field	This is the Logical Name for the Altus field.
Default.ps1 script reference	Reference to another Altus script, specifically the alias.
Additional Altus variables	Altus references to related tables.

Project Online Field Type	PowerShell script block for migration
Cost	<pre>\$costValue = Get-ResourceCustomFieldTextValue -ProjectResource \$ProjectResource - CustomFieldName 'Resource Example Cost Field' if (\$costValue) { \$resourceBody['ce_resourceexamplecostfield'] = (\$costValue -as [decimal]) }</pre>
Date (Date only)	<pre>\$dateValue = Get-ReportingCustomFieldTextValue -ProjectResource \$ProjectResource - CustomFieldName 'Resource Example Date Field' if (\$dateValue) { \$resourceBody['ce_resourceexampledatefield'] = (\$dateValue -as [datetime]).ToString("yyyy-MM-dd") }</pre>
Date (Date and Time)	<pre>\$dateValue = Get-ReportingCustomFieldTextValue -ProjectResource \$ProjectResource - CustomFieldName 'Resource Example Date Field' if (\$dateValue) { \$resourceBody['ce_resourceexampledatefield'] = (\$dateValue -as [datetime]).ToString("yyyy-MM-dd") }</pre>
Duration	<pre>\$durationValue = Get-ResourceCustomFieldTextValue -ProjectResource \$ProjectResource -CustomFieldName 'Resource Example Duration Field' if (\$durationValue) { \$resourceBody['ce_resourceexampledurationfield'] = [int][double]\$durationValue }</pre>
Flag to Flag	<pre>\$cfValue = Get-ResourceCustomFieldTextValue -ProjectResource \$ProjectResource - CustomFieldName 'Resource Example Flag Field' if (\$cfValue) { if (\$cfValue -eq 'true') { \$ynValue = \$true } else { \$ynValue = \$false } # must be set as True and False not 1 and 0. \$resourceBody['ce_resourceexampleflagfield'] = \$ynValue }</pre>
Lookup to Flag	<pre>\$cfValue = Get-ResourceCustomFieldTextValue -ProjectResource \$ProjectResource - CustomFieldName 'Resource Example Choice Field' if (\$cfValue) { if (\$cfValue -eq 'Yes') { \$ynValue = \$true } else { \$ynValue = \$true } \$resourceBody['ce_resourceexampleflagfield2'] = \$ynValue }</pre>
Number (Whole)	<pre>\$numberValue = Get-ResourceCustomFieldTextValue -ProjectResource \$ProjectResource - CustomFieldName 'Resource Example Number Field' if (\$numberValue) { \$resourceBody['ce_resourceexamplenumberfield'] = [int][double]\$numberValue }</pre>
Number (Decimal)	<pre>\$numberValue = Get-ResourceCustomFieldTextValue -ProjectResource \$ProjectResource - CustomFieldName 'Resource Example Number Field' if (\$numberValue) { \$resourceBody['ce_resourceexamplenumberfield'] = [int][double]\$numberValue }</pre>
Text (Single line of Text)	<pre>\$textValue = Get-ResourceCustomFieldTextValue -ProjectResource \$ProjectResource - CustomFieldName 'Resource Example text field' if (\$textValue) { \$resourceBody['ce_resourceexampletextfield'] = [string]\$textValue }</pre>
Lookup to Choice	<pre>Set-ResourceChoiceField -ResourceBody \$resourceBody -ProjectResource \$ProjectResource -POLCustomFieldName 'Resource Example Choice Field' -ChoiceName 'choice_YesNo' -DataverseFieldName 'ce_resourceexamplechoicefield'</pre>

Project Online Field Type	PowerShell script block for migration
Lookup (Single select)	<pre>Set-ResourceLookupField -ResourceBody \$resourceBody -ProjectResource \$ProjectResource -POLCustomFieldName 'Resource Example Lookup Field' -LookupName 'lookup_EmploymentStatus' -DataverseFieldName 'ce_ResourceExampleLookupField'</pre> Note: The Dataverse field name in this example is case sensitive.
Lookup (Multi select)	<pre>Set-ResourceManyToManyRelationship -ResourceBody \$resourceBody -ProjectResource \$ProjectResource -POLCustomFieldName 'Resource Example Multiselect Lookup Field' - LookupName 'lookup_MultiValueTable' -RelationshipName 'ce_sensei_bookableresource_ce_ExampleMultiSelectLookup_ce_ExampleMultiSelectLookup' -RelatedTableCollectionName 'ce_examplemultiselectlookups' -RelatedTablePrimaryKey 'ce_examplemultiselectlookupid'</pre>

Projects

Unmodified Script

The unmodified script migrates the following data to Altus for projects:


.MPP Table	Altus Table
Task Entry (<i>Task Level 0</i>)	sensei_project

.MPP Field	Altus Field	Details	Example
Task Name	sensei_name	Where the TaskID = 0	Adelaide Fitness Project
N/A	sensei_projecttype	Default value set	Major Project
N/A	sensei_externalprojectid	Set the GUID = Project Online GUID	ProjectDesktop_d14bae12-39b3-e911-b07b-00155d9c3f18

Modified Script

This script can be extended to migrate custom fields:

ImportProjects.ps1

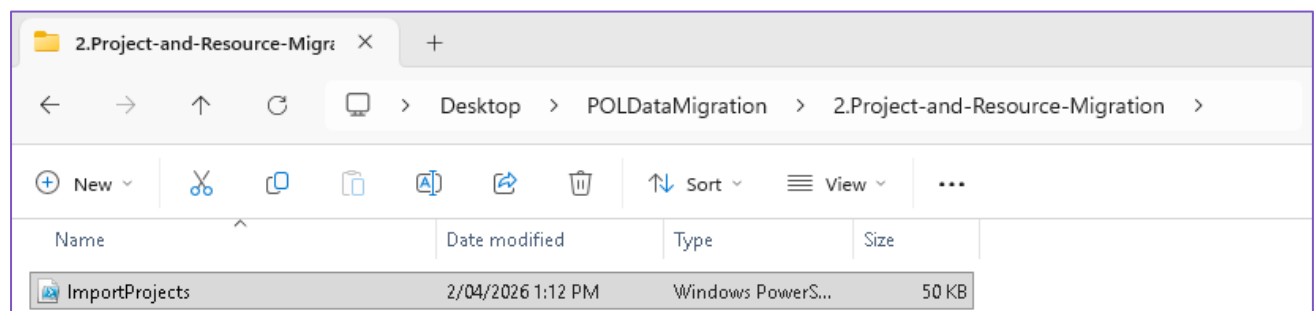

The script can be extended to migrate the following field types from Project Online to Altus:

Project Online Field Type	Dataverse Field Type	Dataverse Field Sub-type
Cost	Currency	N/A
Date (Date only)	Date and time	Date only
Date (Date and Time)	Date and time	Date and time
Duration	Whole Number	Duration
Flag	Choice	Yes/no
Number (Whole)	Whole Number	None
Number (Decimal)	Decimal	None
Text (Single line of Text)	Single line of text	Text
Lookup (Single Select)	Lookup	Text
Lookup (Multi Select)	Lookup	Text

Examples of the script blocks have been provided below.

The parts of the script that are highlighted below are as follows. Only these parts of the script block need to be updated.

Attribute	Details
Project Online Field	Display name for the field as it appears in Project Online.
Altus Field	This is the Logical Name for the Altus field.
Default.ps1 script reference	Reference to another Altus script, specifically the alias.
Additional Altus variables	Altus references to related tables.

Project Online Field Type	PowerShell script block for migration
Cost	<pre>\$costValue = Get-ReportingCustomFieldValue -ReportingProject \$ReportingProject -CustomFieldName 'Example Cost Field' if (\$costValue) { \$Project['ce_examplecostfield'] = (\$costValue -as [decimal]) }</pre>
Date (Date only)	<pre>\$dateValue = Get-ReportingCustomFieldValue -ReportingProject \$ReportingProject -CustomFieldName 'Example Date Field' if (\$dateValue) { \$Project['ce_exampledatefield'] = (\$dateValue -as [datetime]).ToString("yyyy-MM-dd") }</pre>
Date (Date and Time)	<pre>\$dateValue = Get-ReportingCustomFieldValue -ReportingProject \$ReportingProject -CustomFieldName 'Example Date Field' if (\$dateValue) { \$Project['ce_exampledatefield'] = (\$dateValue -as [datetime]).ToString("yyyy-MM-dd") }</pre>
Duration	<pre>\$durationValue = Get-ReportingCustomFieldValue -ReportingProject \$ReportingProject -CustomFieldName 'Example Duration Field' if (\$durationValue) { \$Project['ce_exampledurationfield'] = [int][double]\$durationValue }</pre>
Flag to Flag	<pre>\$cfValue = Get-ReportingCustomFieldValue -ReportingProject \$ReportingProject -CustomFieldName 'Example Flag Field' if (\$cfValue) { if (\$cfValue -eq 'true') { \$ynValue = \$true } else { \$ynValue = \$false } # must be set as True and False not 1 and 0. \$Project['ce_exampleflagfield'] = \$ynValue }</pre>
Lookup to Flag	<pre>\$cfValue = Get-ReportingCustomFieldValue -ReportingProject \$ReportingProject -CustomFieldName 'Example Choice Field' if (\$cfValue) { if (\$cfValue -eq 'Yes') { \$ynValue = \$true } else { \$ynValue = \$true } \$Project['ce_exampleflagfield2'] = \$ynValue }</pre>
Number (Whole)	<pre>\$numberValue = Get-ReportingCustomFieldValue -ReportingProject \$ReportingProject -CustomFieldName 'Example Number Field' if (\$numberValue) { \$Project['ce_examplenumberfield'] = [int][double]\$numberValue }</pre>
Number (Decimal)	<pre>\$numberValue = Get-ReportingCustomFieldValue -ReportingProject \$ReportingProject -CustomFieldName 'Example Number Field' if (\$numberValue) { \$Project['ce_examplenumberfield'] = [int][double]\$numberValue }</pre>
Text (Single line of Text)	<pre>\$textValue = Get-ReportingCustomFieldValue -ReportingProject \$ReportingProject -CustomFieldName 'Example Multi line text field' if (\$textValue) { \$Project['ce_examplemultinetextfield'] = [string]\$textValue }</pre>
Lookup to Choice	<pre>Set-ProjectChoiceField -ProjectBody \$Project -ReportingProject \$ReportingProject -POLCustomFieldName 'Example Choice Field' -ChoiceName 'choice_YesNo' -DataverseFieldName 'ce_examplechoicefield'</pre>

Project Online Field Type	PowerShell script block for migration
Lookup (Single select)	<pre>Set-ProjectLookupField -ProjectBody \$Project -ReportingProject \$ReportingProject - POLCustomFieldName 'Example Lookup Field' -LookupName 'lookup_TeamName' - DataverseFieldName 'ce_ExampleLookupField'</pre> Note: The Dataverse field name in this example is case sensitive.
Lookup (Multi select)	<pre>Set-ProjectManyToManyRelationship -ProjectBody \$Project -ReportingProject \$ReportingProject -POLCustomFieldName 'Example Multiselect Lookup Field' - LookupName 'lookup_MultiValueTable' -RelationshipName 'ce_ExampleMultiSelectLookup_sensei_project_sensei_project' - RelatedTableCollectionName 'ce_examplemultiselectlookups' - RelatedTablePrimaryKey 'ce_examplemultiselectlookupid'</pre>

Tasks

There are two options for migrating task custom fields to Altus:

1. Mapping them to local custom fields in Microsoft Project Desktop.
2. Mapping them directly to Altus task custom fields.

Unmodified Script

The unmodified script migrates the following data to Altus for tasks:

.MPP Table	Altus Table
Task Entry	sensei_task

.MPP Field	Altus Field	Example Data
Task Name	Name	Identify Goals and Objectives
Resource Names	Assigned To	Project Manager
Start	Start	2-12-19
Finish	Finish	6-12-19
% Complete	Percent Complete	25%
Work	Effort (Hours)	40
Remaining Work	Effort Remaining (Hours)	30
Actual Work	Effort Completed (Hours)	10
Duration	Duration (Days)	5 days
Type	Task Type	Fixed Units
Task Mode	Manually Schedule	Yes
Notes	Notes	Goals were discussed
Deadline	Due Date	6-12-19
Summary	Summary	No
Milestone	Milestone	No
Locked	Locked	No

Migration tasks to MS Project local custom fields

The mapping of custom fields for tasks is different to the process for mapping Project and Resource custom fields. There is no script to update here. Instead, the following process applies:

1. Create the task custom field in Altus.
2. Select a custom field MS Project field (e.g., Date4) and map this to the Altus task custom field.
3. Run the script to map the Project Online task custom field to the Project Desktop custom field.

MS Project Desktop Local Custom Field Type	Number Available to Use
Date	10 (Date1 - Date10)
Finish	10 (Finish1 - Finish10)
Flag	20 (Flag1 - Flag20)
Number	20 (Number1 - Number20)
Start	10 (Start1 - Start10)
Text	26 (Text1 - Text26)
Outline Code	10 (Outline Code1 - Outline Code10)

At the time of writing, Cost and Duration fields are not currently supported in the Altus task scheduler. We are working to address this limitation.

Below is an example of a field mapping completed in Altus settings:

Field Mapping

Field Mapping between Microsoft Project and Altus

Microsoft Project Field

Date1

The Field on Microsoft Project

Table

sense_task

Table

Altus Field

TaskExampleDateField

The Field on Altus


OK

Cancel

Migrating tasks directly to Altus

This script can be extended to migrate custom fields:

ImportTasks.ps1

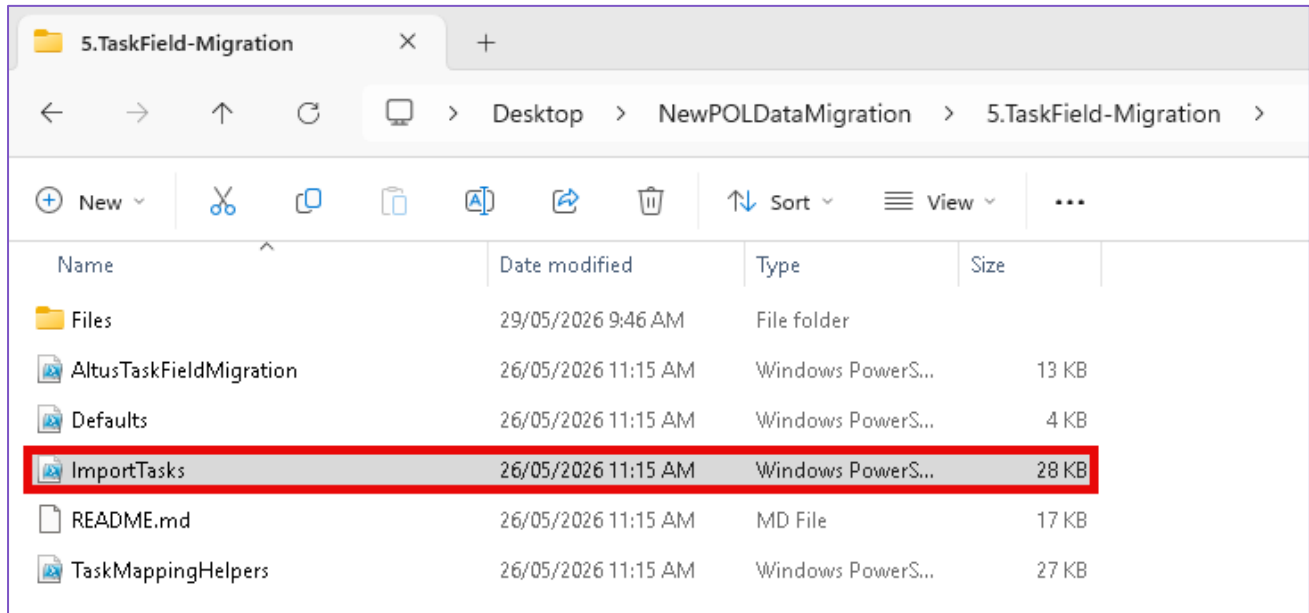

The script can be extended to migrate the following field types from Project Online to Altus:

Project Online Field Type	Dataverse Field Type	Dataverse Field Sub-type
Date (Date only)	Date and time	Date only
Duration	Whole Number	Duration
Flag	Choice	Yes/no
Number (Whole)	Whole Number	None
Number (Decimal)	Decimal	None
Text (Single line of Text)	Single line of text	Text
Lookup (Single Select)	Lookup	Text
Lookup (Multi Select)	Lookup	Text

Examples of the script blocks have been provided below.

The parts of the script that are highlighted below are as follows. Only these parts of the script block need to be updated.

Attribute	Details
Project Online Field	Display name for the field as it appears in Project Online.
Altus Field	This is the Logical Name for the Altus field.
Default.ps1 script reference	Reference to another Altus script, specifically the alias.
Additional Altus variables	Altus references to related tables.


Project Online Field Type	PowerShell script block for migration
Text	\$textValue = Get-ReportingTaskCustomFieldTextValue -ReportingTask \$ReportingTask -CustomFieldName 'Task Example Text Field' if (\$textValue) { \$Task['ce_taskexampletextfield'] = [string]\$textValue }
Date (Date only)	\$dateValue = Get-ReportingTaskCustomFieldTextValue -ReportingTask \$ReportingTask -CustomFieldName 'Task Example Date Field' if (\$dateValue) { \$Task['ce_taskexampledatefield'] = (\$dateValue -as [datetime]).ToString("yyyy-MM-dd") }
Duration	\$durationValue = Get-ReportingTaskCustomFieldTextValue -ReportingTask \$ReportingTask -CustomFieldName 'Task Example Duration Field' if (\$durationValue) { \$Task['ce_taskexampledurationfield'] = [int][double]\$durationValue }
Flag to Flag	\$cfValue = Get-ReportingTaskCustomFieldTextValue -ReportingTask \$ReportingTask -CustomFieldName 'Task Example Flag Field' if (\$cfValue) { if (\$cfValue -eq 'true') { \$ynValue = \$true } else { \$ynValue = \$false } # must be set as True and False not 1 and 0. \$Task['ce_taskexampleflagfield'] = \$ynValue }
Lookup to Flag	\$cfValue = Get-ReportingTaskCustomFieldTextValue -ReportingTask \$ReportingTask -CustomFieldName 'Task Example LookupToFlag Field' if (\$cfValue) { if (\$cfValue -eq 'Yes') { \$ynValue = \$true } else { \$ynValue = \$true } \$Task['ce_taskexamplelookuptoflagfield'] = \$ynValue }
Number (Whole)	\$numberValue = Get-ReportingTaskCustomFieldTextValue -ReportingTask \$ReportingTask -CustomFieldName 'Task Example Number Field' if (\$numberValue) { \$Task['ce_taskexamplenumberfield'] = [int][double]\$numberValue }
Number (Decimal)	\$numberValue = Get-ReportingTaskCustomFieldTextValue -ReportingTask \$ReportingTask -CustomFieldName 'Task Example Decimal Field' if (\$numberValue) { \$Task['ce_taskexampledecimalfield'] = [int][double]\$numberValue }
Lookup to Choice	Set-TaskChoiceField -TaskBody \$Task -ReportingTask \$ReportingTask -POLCustomFieldName 'Task Example LookupToChoice Field' -ChoiceName 'choice_YesNo' -DataverseFieldName 'ce_taskexamplelookuptochoicefield'
Lookup (Single select)	Set-TaskLookupField -TaskBody \$Task -ReportingTask \$ReportingTask -POLCustomFieldName 'Task Example Lookup Field' -LookupName 'lookup_TeamName' -DataverseFieldName 'ce_TaskExampleLookupField'
	Note: The Dataverse field name in this example is case sensitive.

RelatedTableCollectionName = Copy Set Name

RelatedTableCollectionName = UniqueIdentifier field

Lookup Tables

The LookupTablesToImport.ps1 can be updated to map lookup tables for import into Altus. The table below provides details of what to update in this script.

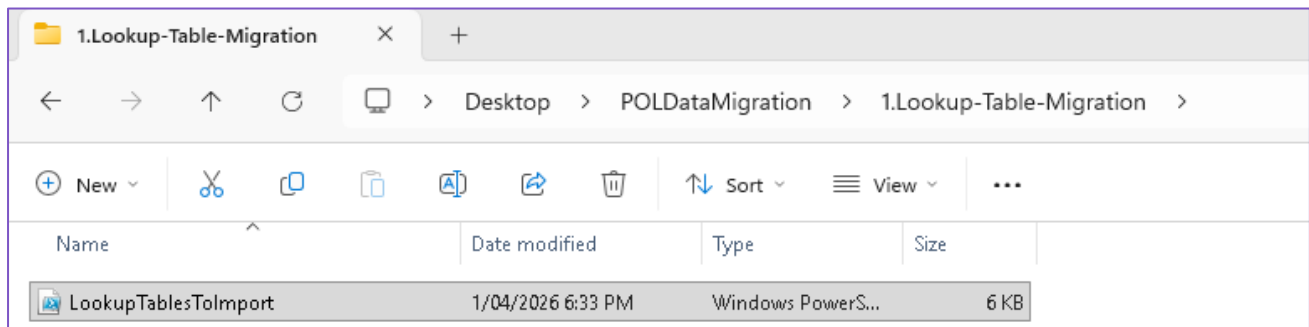

Attribute	Details
Source File	This is the name of the .CSV file that was exported from Project Online.
Altus Table Logical Name	The logical name for the lookup table in Altus.
Altus Table Collection Name	The collection (or plural name) for the lookup table in Altus.
Name Field	The logical name for the primary name field in the lookup table.
Description Field	The logical name for the description field in the lookup table.
Prev Level Lookup Field	The logical name for the parent field (for hierarchical lookup tables).

Type	PowerShell script block for migration
Flat Lookup table	<pre>@{ SourceFile = "LookupTable_Employment Status.csv" # CSV file exported from ExportLookupTableData.ps1 MapAsHierarchy = \$false # A value of \$false maps to a flat table. A value of \$true maps to a self referential hierarchy table. DataverseTable = @{ TableLogicalName = "ce_employmentstatus" # Dataverse table LOGICAL (singular) name to map to. TableCollectionName = "ce_employmentstatuses" # Dataverse table COLLECTION (plural) name to map to. NameField = "ce_name" # Field in Dataverse table to map the Name/Value to DescriptionField = "ce_description" # (Optional) Field in Dataverse table to map the Description to } }</pre>
Hierarchical Lookup table	<pre>@{ SourceFile = "LookupTable_Skills.csv" # CSV file exported from ExportLookupTableData.ps1 MapAsHierarchy = \$true # A value of \$false maps to a flat table. A value of \$true maps to a self referential hierarchy table. DataverseTable = @{ TableLogicalName = "ce_skills" # Dataverse table LOGICAL (singular) name to map to. TableCollectionName = "ce_skillses" # Dataverse table COLLECTION (plural) name to map to. NameField = "ce_name" # Field in Dataverse table to map the Name/Value to</pre>

Type	PowerShell script block for migration
	<pre> DescriptionField = "ce_description" # (Optional) Field in Dataverse table to map the Description to PrevLevelLookupField = "ce_parent" # PrevLevelLookup property should identify the self referential lookup field for this table. } }</pre>

Cost Rates

The resource rates are mapped as follows:

MS Project	Altus
Cost Rate Table A	Bookable Resource > Rates

The schedule publish script (script) also publishes the following information to Altus.

MS Project Field Name	Altus Field Display Name	Altus Field Internal Name
Standard Rate	Rate (Hourly)	sensei_rate
Effective Date	Effective Date	sensei_effectivedate

There is no mechanism to extend these scripts to migrate additional information.

Baselines


The baseline fields between Project Online and Altus are mapped as follows.

The fields below are in the sensei_taskbaseline table:

MS Project Field Name	Altus Field Display Name	Altus Field Internal Name
Baseline Start	Baseline Start	sensei_taskstart
Baseline Finish	Baseline Finish	sensei_taskfinish
Baseline Work	Baseline Effort	sensei_effort
Baseline Duration	Baseline Duration	sensei_duration

The baselining functionality in Altus only sets these fields. There are plans to extend this to time-phased baselines in future once the altus tasks engine can support this data.

All 11 Project Online Baselines (0-5 Protected, 6-10 Unprotected) can be migrated to Altus using this adding to this script:

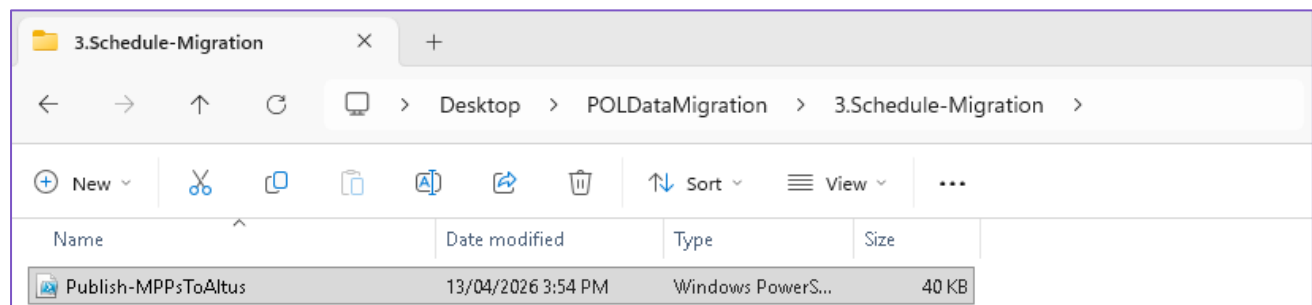

You can use the -IsReportable \$true to set this as the reportable baseline in Altus:

Project Online Baseline	Script block
Baseline 0	.\Publish-MPPsToAltus.ps1 -BaselineNumber 0 -IsReportable \$true
Baseline 1	.\Publish-MPPsToAltus.ps1 -BaselineNumber 1 -IsReportable \$true
Baseline 2	.\Publish-MPPsToAltus.ps1 -BaselineNumber 2 -IsReportable \$true
Baseline 3	.\Publish-MPPsToAltus.ps1 -BaselineNumber 3 -IsReportable \$true
Baseline 4	.\Publish-MPPsToAltus.ps1 -BaselineNumber 4 -IsReportable \$true
Baseline 5	.\Publish-MPPsToAltus.ps1 -BaselineNumber 5 -IsReportable \$true
Baseline 6	.\Publish-MPPsToAltus.ps1 -BaselineNumber 6 -IsReportable \$true
Baseline 7	.\Publish-MPPsToAltus.ps1 -BaselineNumber 7 -IsReportable \$true
Baseline 8	.\Publish-MPPsToAltus.ps1 -BaselineNumber 8 -IsReportable \$true
Baseline 9	.\Publish-MPPsToAltus.ps1 -BaselineNumber 9 -IsReportable \$true
Baseline 10	.\Publish-MPPsToAltus.ps1 -BaselineNumber 10 -IsReportable \$true

SharePoint Online

Overview

The Altus migration scripts enable the following data to be migrated from Project Online to Altus.

Data	Details
Lists	SharePoint Lists are structured data repositories used to store and manage tabular information, similar to a database table, within a project site.
Documents	Documents in SharePoint are files (e.g., Word, Excel, PDFs) stored in Document Libraries, which are associated with Project Online project sites.

Risks

Unmodified Script

The unmodified Altus scripts migrate the following data from the SharePoint Online Risks list to the Altus.


Risks	sensei_risk
Issues	sensei_issue

SharePoint Field	Altus Field	Example Data
Title	sensei_name	Requirements Not Clearly Defined
Description	sensei_description	Project requirements are incomplete or ambiguous, leading to rework and delays.
DueDate	sensei_duedate	30/04/2026 0:00
Status	statuscode	(1) Active
Category	sensei_category	(2) Category2
Probability	sensei_likelihood	50%
Impact	sensei_consequence	5
Exposure	sensei_riskscore	2.5
Cost	sensei_cost	\$10,000.00
Mitigation_x0020_plan	sensei_mitigationplan	Conduct workshops with stakeholders, document requirements, and obtain formal sign-off.
Contingency_x0020_plan	sensei_contingencyplan	Rebaseline scope and timeline if major requirement changes emerge.
Trigger_x0020_Description	sensei_triggerdescription	When the due date is lapsed, a decision will be require.
Trigger	sensei_trigger	Date
Owner	sensei_riskowner	John Price
AssignedTo	sensei_assignedto	Marc Soester

Modified Script

The **export.config.json** can be modified to map custom fields. Examples of the script blocks have been provided below.

The parts of the script that are highlighted below are as follows. Only these parts of the script block need to be updated.

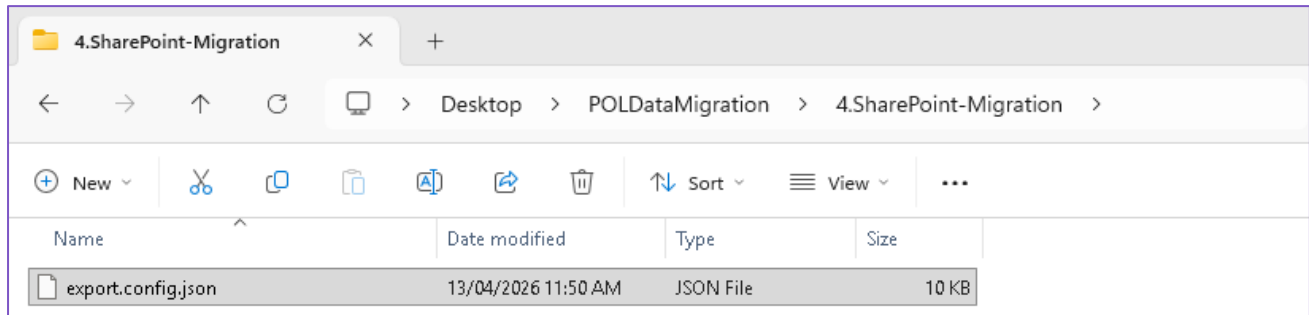

Attribute	Details
SharePoint Online Field	Internal name of the SharePoint field. This is set when the field is created in SharePoint.
Altus Field	This is the logical name for the field in the Altus Table.
SharePoint Online Field Format (type)	This is the SharePoint Online field type such as Text, Boolean, DateTime, etc.
SharePoint Online Value	This is the choice field value selected in SharePoint Online.
Altus Value	This is the Value field in Altus e.g. 955000000. This is the identifier for the label.

SharePoint Online Field Type	PowerShell script block for migration
Text	<pre>{ "_fielddetails": "This is a custom Single line of Text field.", "spFieldInternalName": "ExampleTextField", "entityAttribute": "ce_examplesptextfield", "type": "Text" }</pre>
Date & Time	<pre>"_fielddetails": "This is a custom Date and Time field.", "spFieldInternalName": "ExampleDateAndTimeField", "entityAttribute": "ce_examplespdateandtimefield", "type": "DateTime" }</pre>
Date Only	<pre>{ "_fielddetails": "This is a custom Date Only field.", "spFieldInternalName": "ExampleDateOnlyField", "entityAttribute": "ce_examplespdateonlyfield", "type": "DateOnly" }</pre>
Decimal	<pre>{ "_fielddetails": "This is a custom Decimal field.", "spFieldInternalName": "ExampleDecimalField", "entityAttribute": "ce_examplespdecimalfield", "type": "Decimal", "divider": 2 }</pre>
Number	<pre>{ "_fielddetails": "This is a custom Whole Number field.",</pre>

SharePoint Online Field Type	PowerShell script block for migration
	<pre> "spFieldInternalName": "ExampleNumberField", "entityAttribute": "ce_examplespnumberfield", "type": "Number" } </pre>
Lookup	<pre> { "_fielddetails": "This is a custom Lookup field.", "spFieldInternalName": "ExampleLookupField", "entityAttribute": "ce_examplespllookupdecisioncategory", "type": "Lookup", "lookupEntity": "DecisionCategory" } </pre>
Currency	<pre> { "_fielddetails": "This is a custom Money field.", "spFieldInternalName": "ExampleMoneyField", "entityAttribute": "ce_examplespmoneyfield", "type": "Money" } </pre>
Choice	<pre> { "_fielddetails": "This is a custom OptionSet field.", "spFieldInternalName": "ExampleOptionSetField", "entityAttribute": "ce_examplespoptionsetfield", "type": "OptionSet", "choiceMap": { "Resource": 955000000, "Scope": 955000001, "Schedule": 955000002, "Technology": 955000003, "Other": 955000004, "Business Process": 955000005, "Vendor": 955000006, "Management Escalation": 955000007 } } </pre>
Yes/No	<pre> { "_fielddetails": "This is a custom Flag (Boolean) field.", "spFieldInternalName": "ExampleBooleanField", "entityAttribute": "ce_examplespbooleanfield", "type": "Bool" } </pre>

Issues

Unmodified Script

The unmodified Altus scripts migrate the following data from the SharePoint Online Risks list to the Altus.


SharePoint List	Altus Table
Issues	sensei_issue

SharePoint Field	Altus Field	Example Data
Title	sensei_name	Resource Overallocation
Discussion	sensei_description	Key developer assigned to multiple projects causing delays.
DueDate	sensei_duedate	24/04/2026 00:00
Status	statuscode	(1) Active
Category	sensei_category	(3) Category3
Priority	sensei_priority	(2) Medium
AssignedTo	sensei_assignedto	John Price
Cost_x0020_Impact	sensei_costimpact	\$10,000.00
Resolution	sensei_resolution	Rebalance workload and secure additional support.

Modified Script

The **export.config.json** can be modified to map custom fields. Examples of the script blocks have been provided below.

The parts of the script that are highlighted below are as follows. Only these parts of the script block need to be updated.

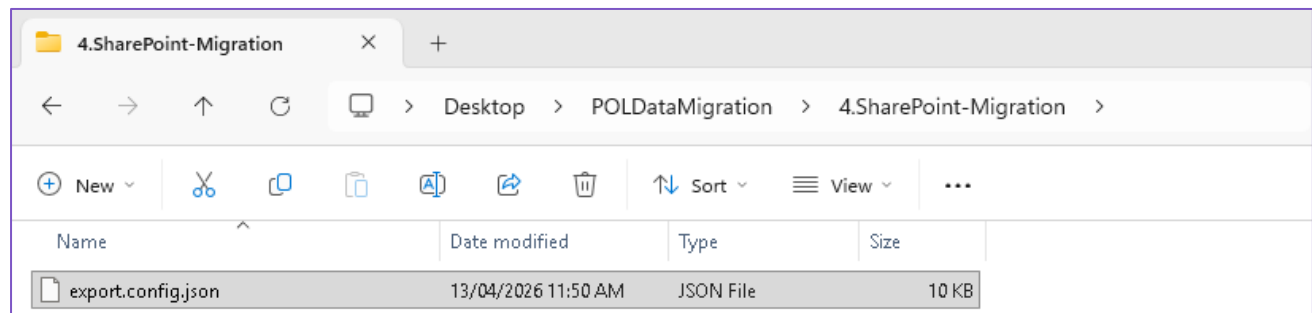

Name	Date modified	Type	Size
export.config.json	13/04/2026 11:50 AM	JSON File	10 KB

Attribute	Details
SharePoint Online Field	Internal name of the SharePoint field. This is set when the field is created in SharePoint.
Altus Field	This is the logical name for the field in the Altus Table.
SharePoint Online Field Format (type)	This is the SharePoint Online field type such as Text, Boolean, DateTime, etc.
SharePoint Online Value	This is the choice field value selected in SharePoint Online.
Altus Value	This is the Value field in Altus e.g. 955000000. This is the identifier for the label.


SharePoint Online Field Type	PowerShell script block for migration
Text	<pre>{ "_fielddetails": "This is a custom Single line of Text field.", "spFieldInternalName": "ExampleTextField", "entityAttribute": "ce_examplesptextfield", "type": "Text" }</pre>
Date & Time	<pre>"_fielddetails": "This is a custom Date and Time field.", "spFieldInternalName": "ExampleDateAndTimeField", "entityAttribute": "ce_examplespdateandtimefield", "type": "DateTime" }</pre>
Date Only	<pre>{ "_fielddetails": "This is a custom Date Only field.", "spFieldInternalName": "ExampleDateOnlyField", "entityAttribute": "ce_examplespdateonlyfield", "type": "DateOnly" }</pre>
Decimal	<pre>{ "_fielddetails": "This is a custom Decimal field.", "spFieldInternalName": "ExampleDecimalField", "entityAttribute": "ce_examplespdecimalfield", "type": "Decimal", "divider": 2 }</pre>
Number	<pre>{ "_fielddetails": "This is a custom Whole Number field.", "spFieldInternalName": "ExampleNumberField", "entityAttribute": "ce_examplespnumberfield", "type": "Number" }</pre>
Lookup	<pre>{ "_fielddetails": "This is a custom Lookup field.", "spFieldInternalName": "ExampleLookupField", "entityAttribute": "ce_examplesplookupdecisioncategory", "type": "Lookup", "lookupEntity": "DecisionCategory" }</pre>
Currency	<pre>{ "_fielddetails": "This is a custom Money field.", "spFieldInternalName": "ExampleMoneyField", "entityAttribute": "ce_examplespmoneyfield", "type": "Money" }</pre>
Choice	<pre>{ "_fielddetails": "This is a custom OptionSet field.", "spFieldInternalName": "ExampleOptionSetField", "entityAttribute": "ce_examplespoptionsetfield", "type": "OptionSet", "choiceMap": { "Resource": 955000000, "Scope": 955000001, "Schedule": 955000002, "Technology": 955000003, "Other": 955000004, "Business Process": 955000005, "Vendor": 955000006, } }</pre>

SharePoint Online Field Type	PowerShell script block for migration
	<pre>"Management Escalation": 955000007 } }</pre>
Yes/No	<pre>{ "_felddetails": "This is a custom Flag (Boolean) field.", "spFieldInternalName": "ExampleBooleanField", "entityAttribute": "ce_examplespbooleanfield", "type": "Bool" }</pre>

Custom Lists

The **export.config.json** can be modified to map custom fields. Examples of the script blocks have been provided below.

The parts of the script that are highlighted below are as follows. Only these parts of the script block need to be updated.

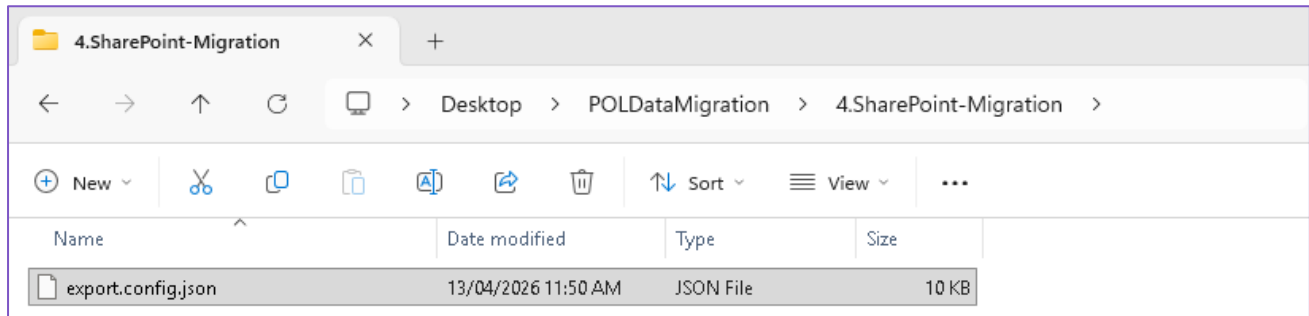

Attribute	Details
SharePoint List	Title of the List as it appears in List Settings.
Altus Table	Logical name for the Altus table.
Altus Lookup table	References to other Altus tables which this table has a relationship to. The example below is a register that has a parent-child relationship to the sensei_project table.
Field Mappings	Code block to map fields between SharePoint Online and Altus.

```
{
  "spListTitle": "Actions",
  "entityLogicalName": "ce_action",
  "projectLookupAttribute": "ce_sensei_project",
  "projectLookupEntityLogicalName": "ce_sensei_project",
  "projectLookupTextSource": "Web.Title",
  "backlinkAttribute": "sensei_sourceitemurl",
  "columnMap": [
    {
      "spFieldInternalName": "Title",
      "entityAttribute": "ce_name",
      "type": "Text"
    },
    {
      "spFieldInternalName": "Description",
      "entityAttribute": "ce_description",
```

```
"type": "Text"
```

```
}
```


```
}
```

```
]
```

```
}
```

Documents

In the documents export scripts, you can modify this to determine what you want exported. The script blocks below articulate this in more detail:

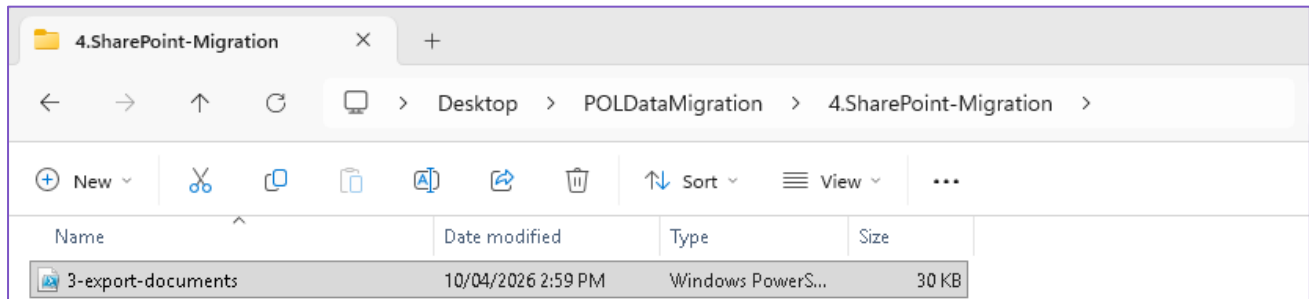

Script Part	What can be modified?
[Parameter(Mandatory = \$false)] [bool] \$ExcludeVersionHistory = \$true	Setting this to \$false will enable the full version history for all documents to be exported.
[Parameter(Mandatory = \$false)] [bool] \$DetailedMetadata = \$false	Setting this to \$true will export all document metadata when the documents are exported.
[Parameter(Mandatory = \$false)] [string] \$ExcludeLibraries = "Style Library,Preservation Hold Library,Form Templates,Recycle Bin,Site Assets"	This can be modified to include certain types of libraries. If you wish to export these types of libraries, simply remove it from the \$ExcludeLibraries parameter.
[Parameter(Mandatory = \$false)] [string[]] \$ExcludeFilePatterns = @("*.aspx")	This can be used to exclude certain file types. By default all are exported except for .aspx files. To exclude additional types, add a comma and escape quotes for the file extension.
[Parameter(Mandatory = \$false)] [switch] \$IncludeRootWeb	This can be used to exclude the root web I Project Online.