

INCLUDES SPECIAL VERSION OF SYMANTEC C++ FOR MACINTOSH

Dave Mark

Addison-Wesley Publishing Company
Reading, Massachusetts • Menlo Park, California • New York
Don Mills, Ontario • Wokingham, England • Amsterdam
Bonn • Sydney • Singapore • Tokyo • Madrid • San Juan
Paris • Seoul • Milan • Mexico City • Taipei

Many of the designations used by manufacturers and sellers to distinguish their products are claimed as trademarks. Where those designations appear in this book, and Addison-Wesley was aware of a trademark claim, the designations have been printed in initial capital letters.

The authors and publishers have taken care in preparation of this book and software package, but make no expressed or implied warranty of any kind and assume no responsibility for errors or omissions. No liability is assumed for incidental or consequential damages in connection with or arising out of the use of the information or programs contained herein.

Library of Congress Cataloging-in-Publication Data

```
Mark, Dave.
```

Learn C++ on the Macintosh: includes a special version of
Symantec's C++ compiler / Dave Mark.
p. cm.
Includes bibliographical references and index.
ISBN 0-201-62204-1
1. Macintosh (Computer)--Programming. 2. C++ (Computer program language) I. Title.
QA76.8.M3M36772 1993
005.26'2--dc20 93-61
CIP

Copyright © 1993 by Dave Mark

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of the publisher. Printed in the United States of America. Published simultaneously in Canada.

Sponsoring Editor: Keith Wollman Project Editor: Elizabeth G. Rogalin Production Coordinator: Gail McDonald Jordan Cover design: Jean Seal Icons in book designed by Crystal Sarno, Graphic Perspectives, Inc. Set in 11 point Palatino by Rob Mauhar and Lenity Himburg, CIP

2 3 4 5 6 7 8 9 -MA- 9796959493 Second printing, January 1994 To the rest of the quadrangle:

Daniel, Deneen, and Stu.

See you all New Year's Eve!

Contents

	Preface ix Acknowledgments xi	
Chapter 1	Welcome Aboard	1
	What's in the Package? 3 Why Learn C++? 4 What Should I Know to Get Started? 4 What Equipment Do I Need? 5 The Lay of the Land 5 Strap Yourself In 8	
Chapter 2	Installing THIN C++	9
	Installing THIN C++ 12 Testing THIN C++ 13 Features of THIN C++ 16 Summary 20	
Chapter 3	Remembering C	21
	Literal Constants 24 Variables 28 Operators 36	

Statements 41
Functions 42
Preprocessor Directives 43
Comments 43
Summary 44

Chapter 4 Introducing C++

45

Getting C Code to Run under C++ 48
New Features of C++ 52
The // Comment Marker 52
Handling Input and Output 53
Default Argument Initializers 63
Reference Variables 66
Function Name Overloading 73
The new and delete Operators 77
The Scope Resolution Operator 84
inline Functions 87
Summary 90

Chapter 5 Object Programming Basics

91

The Organizational Power of the Struct 94
Encapsulating Data and Functions 95
Creating an Object 96
Accessing an Object's Members 97
Deleting an Object 100
Writing Member Functions 101
Access Priveleges 106
Bringing It All Together 109
Friends 115
Summary 123

Chapter 9 C++ Potpourri

241

Templates 244
The Templates Approach 245
Multiple Inheritance 256
Resolving Ambiguities 264
Initialization Versus Assignment 274
Memberwise Initialization 278
Summary 286

Chapter 10 Moving On

287

The User Interface 289
The Macintosh Toolbox 291
Class Libraries 293
Books and Other Reference Material 296
Go Get 'Em... 299

Appendices

Appendix A Glossary 301

Appendix B Source Code Listings 307

Appendix C fstream.h 345

Appendix D iomanip.h 353

Appendix E iostream.h 355

Appendix F strstrea.h 379

Appendix G Unofficial C++ Style Guide 385

Appendix H The Complete Symantec C++

Development Environment 421

Appendix I Bibliography 431

Preface

Some time ago, back in 1988 or 1989, I remember reading an article written by someone at Apple Computer. The article was addressed to all Macintosh programmers, and spoke to the future of Macintosh software development. Back then, the vast majority of Macintosh programs were written in either C or Pascal. Sure, there might have been a little Basic here, and a little C++ there, but those languages were viewed as the fringe—a definite minority.

Anyway, this article went on to describe the wonders of object programming and of C++ in particular. Normally, I would have turned the page, since I was perfectly happy programming in C and Pascal, my personal languages of choice. But this article quickly captured my attention. As I read, I began to realize something basic was happening. This article wasn't just an interesting discussion of an alternative development methodology. It was a warning shot across my bow. Apple was making a real commitment to object programming and to C++. At development conferences, the message was also becoming clear. Apple expected all Macintosh software developers not just to understand, but to embrace object programming.

Pay attention to this message: Object programming is the future, and C++ is the language for object programming. Why C++? Apple rewrote MacApp (their object development library) entirely in C++. Apple rewrote much of their operating system in C++. When Symantec and Apple announced their joint crossplatform development library, Bedrock, they made it clear that Bedrock would be written entirely in C++.

Once you've made the commitment to learn about object programming and C++, you're ready to take the next step. Bring this book home with you (pay for it first) and start reading. *Learn C++ on the Macintosh* will do the rest.

By the way, if you feel like getting in touch, I'd love to hear from you. Get on CompuServe, type **GO MACDEV**, and leave a message in the *Learn Programming* section (section 11). In the meantime, let's get started...

D.M. Arlington, Virginia

Acknowledgments

I'd like to take a few moments to thank all the people who made this book possible. First and foremost, I'd like to thank my good friend Steve Baker. His programming experience and C++ expertise provided invaluable assistance. Steve put in a lot of long hours helping to put this book together. Whether he was fine tuning the table of contents or tinkering with one of my C++ sample programs, Steve's heart and soul were poured into this book. By the way, thanks also to Steve's family, Kelly, Michael, and Matthew, for patience and understanding above and beyond the call of duty.

Thanks to Elizabeth Rogalin, my friend, confidante, and project editor, for seeing this book through. Thanks, Elizabeth!

Thanks to Steve Bushell and Jaime Jouris at Symantec for putting together THIN C++ and for answering all my questions.

Thanks to my old pal Julie Stillman up in Vermont. Happy birthday to you! Wish I could have been there.

Thanks to Crystal Sarno for her excellent artwork. Crystal designed the icons sprinkled throughout the book.

Thanks to Jean Peck for an incredible job copyediting the book.

Thanks to Gail McDonald Jordan for doing a superb job producing this book.

Thanks to Carlos Derr for guidance and friendship.

Finally, thanks to Deneen Joanne Melander, for companionship, love, and understanding. LFUEMISFOK?

Chapter 1

Welcome Aboard

Interested in learning how to program in C++? Well, you've come to the right place. Grab your Mac, hop into your most comfortable chair, and read on...

This Chapter at a Glance

What's in the Package?
Why Learn C++?
What Should I Know to Get Started?
What Equipment Do I Need?
The Lay of the Land

The Chapters and Appendices
The Conventions Used in This Book
Strap Yourself In...

WELCOME! BY PURCHASING THIS BOOK/DISK PACKAGE, you've taken the first step toward learning the C++ programming language. As you make your way through the book, you'll learn one of the most popular and powerful programming languages in the world today—you've definitely made a wise investment.

Before we start programming, we first need to address a few questions.

What's in the Package?

Learn C++ *on the Macintosh* is a book/disk package. The book is filled with interesting facts, figures, and programming examples, all of which are designed to teach you how to program in C++.

In the back of the book is a Macintosh floppy disk that contains all the software you'll need to run each of the book's programming examples on your own computer. Included on this disk is THIN C++, a customized version of the leading Macintosh programming environment, written especially for this book. The disk also includes each of the programs presented in the book so that you don't have to type the examples yourself. Such a deal!

Why Learn C++?

There are a lot of reasons for learning C++. Perhaps the biggest reason is the popularity of C++ as a programming language. Go to your local technical bookstore and count the books dedicated to each programming language. Ten years ago, you would have found that the most popular language out there was Pascal. Five years ago, the pendulum shifted and C became the most popular language. Now, the move is toward C++.


Apple recently began rewriting the majority of the Macintosh operating system in C++. Apple and Symantec recently announced Bedrock, a cross-platform development vehicle written completely in C++. You'll find support for C++ everywhere. There are C++ compilers for Unix, Windows, DOS, and, of course, the Macintosh. The number of C++ programming texts is growing by leaps and bounds. Opportunities for a good C++ programmer are endless.


The bottom line is this: C++ is *the* language of the nineties. Major computer companies like Apple, Microsoft, and Sun are basing their future operating system designs around C++. Knowledge of C or Pascal just isn't enough anymore. In my opinion, C++ is a must!

What Should I Know to Get Started?

There are two prerequisites to using this book. First, you must have a basic knowledge of the Macintosh. Do you know how to double-click on an application to start it up? Does the scrolling list in Figure 1.1 look familiar to you? Do you know how to use a word processor like MacWrite or Microsoft Word? If you can use the Macintosh to run programs and edit documents, you're halfway there.

Second, you should have a working knowledge of C. If you're just getting started with programming or if your language of choice is a language other than C, you might want to pick up a copy of my book *Learn C on the Macintosh*. If you just need a quick C refresher course, check out Chapter 3 of this book. Once you have a handle on both C and the Macintosh, you're ready to tackle C++.



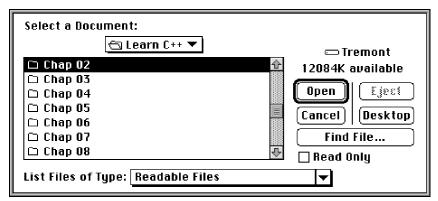

What Equipment Do I Need?

While it is possible to learn C++ just by reading a book, you'll get the most out of this book if you run each example program as you read and discover how it works. To do this, you need a Macintosh. If you don't have one, borrow one from a friend. You'll need a Macintosh with at least 2 megabytes of memory. THIN C++ will run with most Macintosh system software, from System 6.05 on up through the various versions of System 7.

If you can, upgrade your Mac to the latest version of System 7. At the same time, see whether you can get a couple of extra megabytes to bring your Mac up to 4 megs or more. The extra breathing room will help.

The Lay of the Land

This book was designed with several different readers in mind. If you're new to programming, you'll want to read each and every chapter. Try not to skip over material that seems fuzzy. If you get stuck, find a C++ programmer who can answer your questions. Most C++ programmers are friendly and are usually more than glad to help someone just getting started. Make a commitment to finish this book. You can do it!

If you're a C master, you might want to skip the C review in Chapter 3. Do *not* skip Chapter 2, however. Chapter 2 walks you through the THIN C++ installation process and ensures that you copy all the sample code to the right spot on your hard drive.

The Chapters and Appendices

This book is made up of ten chapters and nine appendices. This chapter provides an overview of the book and gets you started down the right path.

Chapter 2 introduces the disk part of this book/disk package. You'll learn about THIN C++, the C++ programming environment designed especially for use with this book. You'll install THIN C++ on your hard drive and test out the software to make sure it's installed properly. In Chapter 2, you'll run your first C++ program. No matter what programming experience you already have, don't skip Chapter 2!

Chapter 3 contains a refresher course in C. Even if you're a seasoned C programmer, you might want to take a quick look through this chapter just to make sure everything in it looks familiar.

Chapter 4 introduces the basic syntax of C++. It covers topics ranging from C++ operators and keywords to reference types and function name overloading.

Chapter 5 introduces you to the basics of object programming, the heart and soul of C++. You'll learn all about classes and objects and the C++ functions that allow you to create objects of your very own.

Chapter 6 takes the concept of classes one step further. It shows you how to use one class as the basis for a new, derived class. Derived classes play a critical role in extending an existing set of C++ classes.

Chapter 7 introduces the concept of operator overloading. C++ allows you to overload its built-in operators, customizing them to work with objects you define. For example, you might overload the + operator, enabling you to add two arrays together.

Chapter 8 introduces **iostream**, C++'s equivalent of C's **stdio** library. Just as routines such as **printf()** and **scanf()** allow you to build a portable user interface in C, the **iostream** functions allow you to build a portable C++ interface.

Chapter 9 takes you down the homestretch by exploring a potpourri of miscellaneous C++ topics. When you finish this chapter, you'll have completed the first phase of your C++ education.

Chapter 10 wraps things up. It prepares you for the next step on your programming path. You'll learn about class libraries like Bedrock, MacApp, and the THINK Class Library. You'll take a look at several Macintosh C++ development environments and choose the one that's right for you. Finally, you'll read about some of the books and reference materials that you'll want by your side as you start your own C++ development efforts.

Appendix A is a glossary of the technical terms used in this book.

Appendix B contains a complete listing of all the examples used in this book. This section will come in handy as a reference, as you write your own C++ programs. Need an example of an overloaded operator? Turn to the examples in Appendix B.

Appendices C, D, E, and F contain listings of the files <iostream.h>, <fstream.h>, <strstrea.h>, and <iomanip.h>, respectively. These files are all critical parts of the iostream library. If you'll be using iostream in your own applications, you'll find these appendices helpful.

Appendix G contains a reprint of an article that appeared in the April 1990 issue of Apple's excellent programming magazine *develop*. The article is titled "Unofficial C++ Style Guide." Take the time to read the style guide. It is packed with extremely useful information that every C++ programmer should have.


Appendix H describes Symantec C++ for Macintosh, the full version of the development environment used in this book.

Appendix I is a bibliography of useful programming titles.

The Conventions Used in This Book

As you read this book, you'll encounter a few standard conventions that make the book easier to read. For example, technical terms appearing for the first time are displayed in **boldface**. (You'll find most of these terms in the glossary in Appendix A.)

All of the source code examples in this book are presented using a special font, known as the **code font**. This includes source code fragments that appear in the middle of running text. Menu items, or items you'll click on, appear in **Chicago font**.

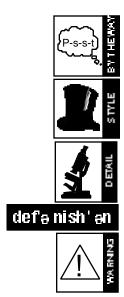

Occasionally, you'll come across a block of text set off in a box, like this. These blocks are called tech blocks and are intended to add technical detail to the subject currently being discussed. Each tech block will fit into one of five categories: "By the Way," "Style," "Detail," "Definition," and "Warning." Each category has its own special icon, which will appear to the left of the tech block. As the names imply, "By the Way" tech blocks are intended to be informative but not crucial. "Style" tech blocks contain information relating to your C++ programming style. "Detail" tech blocks offer more detailed information about the current topic. "Definition" tech blocks contain the definition of an important C++ term. "Warning" tech blocks are usually trying to caution you about some potential programming problem, so pay attention!

Strap Yourself That's about it. Let's get started!

Chapter 2

Installing THIN C++

Before you get into the details of C++ programming, you need to install the C++ development environment included with this book. This chapter takes you step-by-step through the THIN C++ installation process.

This Chapter at a Glance

Installing THIN C++
Testing THIN C++
Opening the hello++ Project
Running hello++.
Features of THIN C++
Summary

TUCKED INTO THE BACK OF *LEARN C++ ON THE MACINTOSH* is a floppy disk containing THIN C++, a sort of swiss army knife for programmers. THIN C++ provides you with all the tools you'll need to work with the programming examples presented in the book.



THIN C++ was created especially for this book by Symantec. In Macintosh programming circles, Symantec is known best as the maker of THINK C and Symantec C++ for Macintosh, the programmer's choice among Macintosh development environments.

THIN C++'s built-in text editor allows you to edit the source code included with each of the sample programs. The THIN C++ compiler is fast and efficient, making short work of the book's largest programs. Once your code is compiled, THIN C++ will even run your program for you.


Installing THIN C++

Before you do anything else, make a backup copy of the THIN C++ disk and place the original disk in a safe place. From now on, only work with the backup copy of THIN C++. That way, when your dog uses your backup disk as a teething ring, you'll still have the original tucked away to make a new backup from.

Next, insert the THIN C++ backup disk (you did make a backup, didn't you?) into your floppy drive. The disk contains a single file named **THIN C++.sea**. That file is a self-extracting archive. It contains the files that make up THIN C++ as well as the examples from this book, all rolled together in a special compressed format.

To decompress the archive, double-click on the **THIN C++.sea** icon. A dialog box, like the one shown in Figure 2.1, will appear and ask you to select a location for all the THIN C++ files. Navigate to the top level of your hard drive (so that the name of your hard drive appears on the pop-up menu label), and then press the **Extract** button.

FIGURE 2.1 Selecting a location for the THIN C++ files.

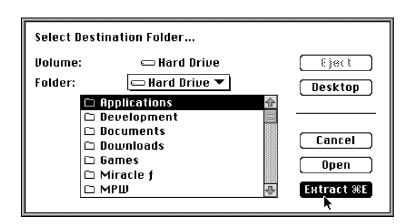



When you press the **Extract** button, don't worry if one of the files or folders in the scrolling list is highlighted. The THIN C++ files will be stored in the folder whose name appears in the dialog box's pop-up label.


Once you press the **Extract** button, the extraction software will start to decompress the THIN C++ files. All the files from the archive are stored in a folder called **THIN C++ Development**. Within this folder, the THIN C++ compiler and its related files are stored in a folder called **THIN C++ Folder**. Also within **THIN C++ Development**, the examples from the book are stored in a folder called **THIN C++ Projects**.

Testing THIN C++

Now that you've installed THIN C++, you're ready to take it for a test drive. On your hard drive, open the folder **THIN C++ Development** and then open the folder **THIN C++ Projects**. Inside **THIN C++ Projects**, you'll find a subfolder for every sample program in the book. Notice that the subfolders are in numerical order, sorted by chapter number. Open the first subfolder in the list, **Chap 02.01 - hello++**.

Figure 2.2 shows the files in **Chap 02.01 - hello++**. One file is named **hello++.cp**; the other, **hello++.** Each of these files is necessary to run the example program called **hello++**.

FIGURE 2.2 The hello++ subfolder.



The file hello++.cp contains the hello++ source code. The file hello++. is known as a project file. A project file holds information about a program, including the list of the program's source code files, as well as the object code generated when these source code files are compiled. Together, these two files make up the hello++ project.



All of the sample programs in this book are presented in project form. THIN C++'s older sibling, Symantec C++ for Macintosh, is also based on the project concept. The term *project* is not part of C++, however. Outside the Symantec development universe, use the term *program* instead.

Opening the hello++ Project

Just to make sure THIN C++ is installed properly, let's take the hello++ project for a spin. Double-click on the icon for the project file hello++. A program called the THIN Project Manager will start running. As its name implies, the THIN Project Manager manages your project files and takes care of tasks like calling the compiler and running your projects once they're compiled.




If the Finder has trouble locating the THIN Project Manager when you double-click on the hello++. icon, don't panic. You'll need to rebuild your Mac's desktop file. To do this, restart your Macintosh while holding down both the option and command keys (the command key is the one with the symbol on it). Keep holding down these keys until your Mac asks you if it's alright to rebuild the desktop file. Click on the **OK** button and, when you get back to the finder, double-click on the hello++. icon again.

If you don't want to rebuild your desktop file, you can also solve this problem by launching the THIN Project Manager directly. You'll find the THIN Project Manager in the THIN C++ Development folder, inside the THIN C++ Folder. When the THIN C++ Project Manager prompts you for a project to open, go back to the THIN C++ Projects folder and open the hello++. project.

Once the **THIN Project Manager** starts up, the **hello++ project window** will appear (see Figure 2.3). The project window is the focal point for the project. Its title reflects the name of the project file, in this case, **hello++**.

FIGURE 2.3 The hello++ project window.



Inside the project window is a list of the files that make up the project. The project file **hello++**. makes use of four files: The files **CPlusLib**, **ANSI++**, and **IOStreams** are libraries that contain various C++ support functions; the file **hello++.cp** contains the source code for the project.

Wheel your mouse over to the project window and double-click on the name hello++.cp. The first click causes the name hello++.cp to be highlighted. The second click opens an editing window showing the source code contained in the file hello++.cp. You can use the standard Macintosh text-editing techniques (clicking, dragging, and typing) to edit the source code in this window. You'll have plenty of editing opportunities later in the book. For now, close the source code window, leaving the source code as you found it.




As the more adventurous of you may have already discovered, the rest of the files in the project are not source code files. For example, if you double-click on the name **ANSI++** in the project window, nothing happens. THIN C++ allows you to edit source code only, not libraries.

Running hello++.

Now try running the program whose source code you just looked at. Select **Run** from the **Project** menu. THIN C++ will first compile and then run your program. A new window will appear on the screen, similar to the one shown in Figure 2.4. Hit the return key to exit the program. If you encounter problems running **hello++.**, try recopying the files from the original floppy disk.

FIGURE 2.4 Running hello++. .

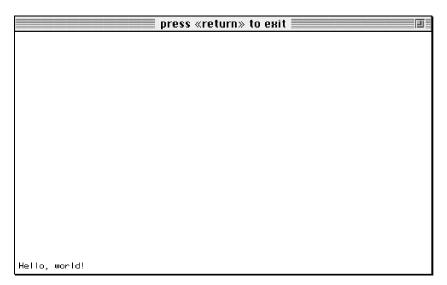

Features of THIN C++

A few features of THIN C++ are worth mentioning at this point. Most of these features are accessed via THIN C++'s pull-down menus. Look at the **File** menu (as shown in Figure 2.5). By selecting **New**, **Open...**, or **Close**, you create, open, or close a text file. For the most part, the only text files you'll work with are the project source code files. Since these files already exist, you probably won't have much need for the **New** command. Since you can open a source code file by double-clicking its name in the project window and can close the file by clicking on the window's close box, you also probably won't have much need for **Open...** or **Close**. On the other hand, it's nice to know these options are available.

FIGURE 2.5 THIN C++'s **File** menu.

File		
New	3€ N	
Open	₩0	
Close	жш	
Save	жs	
Save As		
Revert		
Page Setup		
Print	æ₽	
Quit	жQ	


The rest of the **File** menu is fairly straightforward. **Save** and **Save As...** are useful for saving your source code once you've made changes to it. **Revert** reverts the open file back to the last saved version. **Page Setup...** and **Print...** are useful for printing a copy of your source code. **Quit** exits THIN C++.

The **Edit** menu (Figure 2.6) starts with the Macintosh standards **Undo**, **Cut**, **Copy**, **Paste**, and **Clear**. The **Set Tabs & Font** item brings up a dialog box (Figure 2.7) that allows you to set the tabs and font for the currently open source code file. The number in the **Tabs** field determines how many characters wide a tab character is; the **Font** pop-up menus establish the font and font size for the source code file.

FIGURE 2.6 The **Edit** menu.


Edit		
Undo	₩Z	
Cut	≆H	
Copy	₩C	
Paste	₩IJ	
Clear		
Set Tabs & Font		
Find Text	3€ F	

FIGURE 2.7 The **Set Tabs & Font...** dialog box.

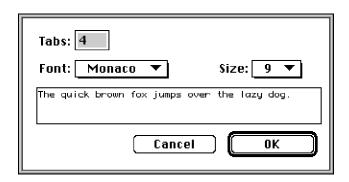

The **Find Text...** item brings up a dialog box (Figure 2.8) that lets you search through your source code for a specific text string.

FIGURE 2.8
The **Find Text...**dialog box.

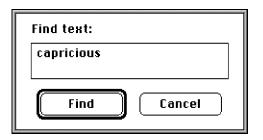

The **Project** menu (Figure 2.9) is perhaps the most used menu in THIN C++. If no project is open, the **Open Project...** item prompts you for a project to open. **Close Project** closes the currently open project and then prompts you for a project to open.

FIGURE 2.9 The **Project** menu.



Remove Objects is useful for compacting project files (and therefore saving disk space). When THIN C++ compiles your source code, it saves the newly created object code inside the

project file. This makes the project file bigger, taking up precious disk space. **Remove Objects** deletes the object code from the project file, saving you some disk space.



Normally, once you've compiled a project, you can run the project again and again without recompiling. Two things will force THIN C++ to recompile your code: making a change to your source code or performing a **Remove Objects**.

Since **Remove Objects** does save you disk space, it's a good idea to **Remove Objects** once you finish exploring a project.

The final item on the **Project** menu is by far the most useful. Selecting **Run** asks THIN C++ to run your program for you.



If you plan on running the THIN C++ code from inside the full Symantec C++ environment, here are a few tips.

Though you can open a THIN C++ project from within Symantec C++, you might like to change things so that Symantec C++ is launched when you double-click on a THIN C++ project. To do this, use a tool like ResEdit to change each project's creator from Jaim to KAHL. If you don't know how to change a file's creator or if you're not comfortable using ResEdit, find someone who's done this before to help you out. ResEdit is a powerful tool, so be careful!

Once you open a THIN C++ project in Symantec C++, you've still got a little work to do. You're now going to tell the THINK Project Manager to use the Symantec C++ compiler rather than the THIN C++ compiler to compile all the source code in this project. Go into the **Edit** menu and select **THINK Project Manager...** from the **Options** submenu. When the options dialog appears, select **Extensions** from the pop-up menu near the upper left corner.

When the list of file extensions appears, click on the .cp file extension. Its translator should be listed as THIN C++. With the .cp line highlighted, select Symantec C++ from the Translator pop-up menu and click on the Replace button. The .cp translator should change to Symantec C++. Do the same for the .cpp file extension. Click OK to save your changes.

You'll have to repeat this process for each of the THIN C++ projects.

Summary

That's about it for our THIN C++ intro. Are you ready to get started? Get comfortable, and turn the page. Here we go!

Chapter 3

Remembering C

One of the basic assumptions made in this book is that you are already acquainted with the C programming language. This chapter contains a quick refresher course in C. Even if you're a seasoned C programmer, you might want to take a few moments to look over this material.

This Chapter at a Glance

Literal Constants

Integral Constants

Floating-Point Constants

Character Constants

String Constants

Enumerations

Variables

Arrays

Initialization

Structures

Unions

Typedefs

Automatic Type Conversion

Typecasting

The const Qualifier

Storage-Class Specifiers

Pointers

Operators

Arithmetic Operators

Assignment Operators

Bitwise Logical Operators

The Conditional Operator

Increment and Decrement Operators

Logical Operators

Relational Operators

The Comma Operator

The sizeof() Operator

Operator Precedence

Statements

Functions

The Ellipsis

Preprocessor Directives

Comments

Summary

BEFORE WE GET STARTED WITH C++, IT'S IMPORTANT that you have a good grasp of the C programming language. This chapter offers a review of the primary features of C. Since C is a subset of C++, you'll want to make sure you feel comfortable with all the material covered here. As you read through the chapter, build yourself a checklist of the C features you need to bone up on. Then grab your favorite C reference and plug away.

Literal Constants

This section covers the various forms you can use to represent a constant in C.

Integral Constants

Integral constants (constants that represent mathematical integers) can be represented in decimal, octal, or hexadecimal format. Decimal constants appear as plain numbers. Octal (base 8) constants always start with a leading zero. Hexadecimal (base 16) constants always start with the two characters **0x**.

The size in bytes of an octal or a hex constant is determined by the number of characters that appear in the constant. For example, since there are two characters to every hex byte, this constant is 4 bytes long:

0x00FF00FF

Decimal constants default to the size of an **int**.

To represent a decimal constant as a **long**, tack an **L** (in either upper or lower case) at the end:

205L

To represent a decimal constant as an **unsigned int**, tack a **U** (in either upper or lower case) at the end:

205U

The characters **UL** (in either upper or lower case) are used to denote a decimal constant of type **unsigned long**:

205UL



The characters \mathbf{v} and \mathbf{L} can also be used at the end of octal and hexadecimal constants.

Floating-Point Constants

Floating-point constants represent signed, real numbers. A complete floating-point constant consists of an integer portion (to the left of the decimal point), a fractional portion (to the right of the decimal point), and an exponent. For example the constant

103.75e2

represents 103.75 times 10 to the second power, or 10,375.

To qualify as a floating-point constant, either the decimal point or the exponent (or both) must be present. All of the following are legal constants:

100.e2 .5e2 100.5 .5 100e5

Normally, floating-point constants are represented as a **double**. To represent a floating-point constant as a **float**, tack an **F** at the end:

125.7F

To represent a floating-point constant as a **long double**, tack an **L** at the end:

125.7L

float, **double**, and **long double** are the three floating-point types offered by C. For more information on these types, read the section on variables a few pages down the road.

Character Constants

Single-byte character constants are represented by enclosing a character in single quotes, like this:

'a'

The $\$ character (backslash) is used to create special single-byte character constants. If the first character following the $\$ is a zero, the remainder of the constant is interpreted as an octal ASCII character code. If the first character following the $\$ is an \mathbf{x} , the remainder of the constant is interpreted as a hexadecimal ASCII character code. For example, both of the following constants represent the ASCII bell character:

```
'\007'
```

'\x7'

In addition, there are 11 backslash combinations that represent single-byte characters (Figure 3.1). For example, the constant '\a' represents the ASCII bell character.



The most frequently used backslash sequence is the newline character, represented by the sequence '\n'. When placed at the end of a string sent to the console, the newline character forces the cursor to the beginning of the next line of output.

Finally, the constant '\0' represents a single byte with a value of 0. This constant is used as a terminator for C character strings.

FIGURE 3.1 Single-byte backslash characters.

Constant	Meaning
\a	Bell
\b	Backspace
\f	Formfeed
\n	Newline
\r	Return
\t	Horizontal tab
\v	Vertical tab
//	Backslash
\?	Question mark
\'	Single quote
\"	Double quote

String Constants

String constants are formed when a set of zero or more characters is surrounded by double quotes, like this:

```
char *nickname = "Apple dumpling";
```

Each character in the string consumes 1 byte of memory. A null terminator (' $\0$ ') is automatically placed at the end of the string. The $\$ combinations presented in the previous section are particularly useful when placed inside a string constant.

Enumerations

Enumerations are types declared using the **enum** keyword and a list of enumeration constants. These constants provide an alternative to the **#define** mechanism (described later in the chapter) by allowing you to declare a series of constants with a single statement. Here's an example:

```
enum weekDays { monday = 2, tuesday, wednesday,
  thursday, friday }
```

By default, the first constant starts with a value of 0, and following constants increase in value by 1. Any or all of these constants can be initialized automatically. In the example just given, **monday** is initialized to 2, **tuesday** to 3, **wednesday** to 4, and so on.

Variables

Variables can be defined within any block of code. The basic variable types are **char**, **int**, and **float**. All three of these can be defined as **signed** or **unsigned**. A **signed** variable can represent either a positive or a negative number, while an **unsigned** variable is limited to nonnegative numbers. For example, a **signed char** can hold values ranging from –128 to 127 and an **unsigned char** can hold values from 0 to 255.

In addition to **signed** and **unsigned**, an **int** can be defined using the qualifier **short** or **long**, as in these examples:

```
long int myLong;
short int myShort;
```

Most programmers prefer the shorthand notation, using **long** for **long int** and **short** for **short int**:

```
long myLong;
short myShort;
```

As pointed out earlier, the ANSI standard does not specify the size of the **int** data type, leaving that decision up to the development environment.

Just as **char**, **short**, and **long** represent a steadily increasing sequence of integral types, **float**, **double**, and **long double** are a steadily increasing sequence of floating-point types.

According to the ANSI standard, a **double** is at least as large as a **float**, and a **long double** is at least as large as a **double**. Typically, a **float** is four bytes long, and a **double**, appropriately enough, is 8 bytes long. On most machines, a **long double** is the same size as a **double**.

Arrays

Any variable data type can form the basis of an array definition. Array definitions consist of a *type*, an *identifier*, and a *dimension*, as in the following:

```
short myShortArray[ 10 ];
```

Arrays can be multidimensional. For example, the code

```
unsigned char bytes[ 10 ][ 20 ];
```

defines an array named **bytes** that totals 200 bytes in size. **bytes** is actually an array of 10 arrays, each of which is 20 bytes in length.



In real life, multidimensional arrays are seldom necessary. In most cases, an array of pointers serves the same purpose and allows the size of each "row" to be specified independently, as opposed to the fixed row size of a multidimensional array.

Initialization

Here are a few examples of variable and array initialization:

```
char firstLetter = 'a';
char *name = "Dave Mark";
short value = 0xFFAA;
float numbers[ 5 ] = { 10.0, 20.0, 35.0, 6.7, .2 };
```

Structures

Structures allow you to group a set of variables under a single name and are declared using the **struct** keyword. The individual variables in a **struct** are known as *fields*. To access a

struct field, use the . operator, as shown in the following example:

```
struct
{
    short myFirstField;
    float mySecondField;
} myStruct, *myStructPtr;

myStruct.myFirstField = 20;
```

To access a **struct** using a pointer, use the **->** operator as follows:

```
myStructPtr = &myStruct;
myStructPtr->myFirstField = 20;
```

Unions

Unions allow you to interpret the same block of memory in more than one way. Unions are declared using the same format as a struct declaration, but the **union** keyword is substituted for the **struct** keyword. In a union, however, enough memory is allocated to hold the largest of the declared fields. The contents of the union are interpreted based on the field you reference. Here's an example:

```
union short_or_long
{
   short myShort;
   long myLong;
}
union short_or_long myUnion;
```

The union declaration just given merges a **short** and a **long** into a single entity. If you refer to

```
myUnion.myShort
```

the first 2 bytes of the union will be interpreted as a **short**. If you refer to

myUnion.myLong

all 4 bytes of the union will be used as a **long**. The size of the union is determined by the largest of the union's fields.

Typedefs

Typedefs are used to create new variable types from existing types. For example, the **typedef** statement

```
typedef short MyType;
```

creates a new type called **MyType**, which can be used in future variable definitions, such as the following:

```
MyType myVariable;
```

Typedefs are frequently used in combination with structure and union declarations. Here's a **struct** example:

```
typedef struct
{
   short shortField;
   long longField;
} MyStructType;

MyStructType myStruct;

myStruct.shortField = 20;
```

The **typedef** statement in this example creates a new symbol with the name **MyStructType**, which can then be used to define a **struct** named **myStruct**.

Automatic Type Conversion

When an operator joins two operands of differing data types, the operands are converted to a common type before the operation is performed. Here's an example:

```
short myShort = 20;
long myLong = 10;
long result;
result = myLong + myShort;
```

In this code, the + operator joins a **short** (2 bytes) and a **long** (4 bytes). Since the **long** is larger than the **short**, the **short** is converted to a **long** before the addition is performed, producing a **long** as a result.

This example typifies C's approach toward automatic type conversion. In general, a small type will be converted to a larger type, rather than the other way around. In this way, no information is lost by truncating a value.

If an operator's operands are built-in C data types (one of char, short, int, long, unsigned, unsigned long, float, double, or long double), the following rules are used to guide the automatic type conversion:

- First, if either of the operands is a **char** or a **short**, that operand is converted to an **int**.
- Next, if the operands are of different types, the shorter of the two operands is converted to the longer of the two types.
- Finally, the result of the operation is converted to the type of the l–value.

For example, if the operands were an **int** and a **double**, the **int** would be promoted to a **double** before the operation was performed. A comparison between a **float** and a **char** would first see the promotion of the **char** to an **int**, then the promotion of the **int** to a **float**.

The rules change when the operands are pointer types instead of built-in types. With one exception, pointer types need to match exactly. If they don't, you'll need to cast one of the pointers to the type of the other pointer.

The exception to this rule involves the **void** pointer (**void***). The **void** pointer was designed to serve as a generic pointer type, pointing to a block of data whose type may not be known at compile time. In an expression where one of the two operands is a **void** pointer, no typecasting is necessary. This means that the following code will compile (even if it doesn't do very much):

```
void *voidPtr;
short *shortPtr;

voidPtr = shortPtr;
shortPtr = voidPtr;
```

When we get to the topic of automatic type conversion in C++ (see Chapter 4), you'll find that these rules change slightly.

Typecasting

Typecasting offers a more direct method for translating one variable data type to another. A typecast is a combination of types and * operators embedded in parentheses that determine the order of casting. The following code casts a **short** to a **long**:

```
(long)myShort
```

The next code casts a **short** pointer to a **long** pointer:

```
(long *)myShortPtr
```

The const Qualifier

When a variable is defined using the **const** qualifier, an initial value must be provided in the definition, and that value cannot be changed for the duration of the program. Here are two examples:

```
const float serialNumber = 523.5876;
const char myName[] = "Dave Mark";
```

Storage-Class Specifiers

The storage-class specifiers auto, extern, static, register, and volatile define the mechanism used to create the associated variable. A variable marked as auto has the same properties as a local, nonstatic variable. This means that space for the variable is allocated when the defining block is entered and the same space is deallocated when the block is exited.

The **extern** specifier tells you that space for a variable is allocated outside the current scope. **static** variables retain their value even after the block they're defined in is exited. **register** variables are allocated using a register, if the current implementation allows for it.

Finally, **volatile** is a little used qualifier that marks a variable as modifiable from outside the program. **volatile** is implementation dependent. For more information on it, check the manual that comes with your development environment.

Pointers

A variable defined as a pointer is designed to hold the address of a variable or function of a specific type. The * operator combines with a normal variable definition to create a pointer variable, as in the following example:

```
long myLong;
long *myLongPtr;
```

These definitions create a **long** and a pointer to a variable of type **long**. To make the pointer point to a **long**, use the & operator. The unary & operator returns the address of its operand:

```
myLongPtr = &myLong;
```

To retrieve a value from a pointer, use the * operator. The * operator takes an address and returns the value at that address:

```
myLong = *myLongPtr;
```

As mentioned earlier, the -> operator can be used with a pointer to a struct to access one of the struct's fields. The * and . operators can be used in the same way. The code

myStructPtr->myField

has the same effect as the following code:

(*myStructPtr).myField

Pointers are frequently used to step through an array. To do this, you'll make use of the +, ++, -, and -- operators (described in the section on operators). The + and ++ operators increase the value of a pointer based on the size of the pointer's base type. The - and -- operators do the reverse. For example, + will increment a **char** pointer by 1 byte, a **short** pointer by 2 bytes, and a **long** pointer by 4 bytes. This is precisely the amount of memory you want to increment a pointer to move it from one element of an array to the next element.

Pointer arithmetic comes in especially handy when you're working with character strings, which are implemented as an array of **char**s. For example, the following code copies one character string to another:

```
void CopyString( char *source, char *dest )
{
   while ( *source != '\0' )
   {
      *dest = *source;
      dest++;
      source++;
   }
   *dest = '\0';
}
```

This example copies each byte of **source** to the corresponding byte in **dest** until **source**'s terminating null byte is encountered. The **++** operator is used to bump the pointers along the character strings.



Here's a version of the preceding string-copying example that's preferred by many C programmers:

```
voidCopyString( char *source, char *dest )
{
  while ( *dest++ = *source++ )
  ;
}
```

The key to this code is the combination of the =, *, and ++ operators inside the while clause. Take a few minutes to analyze this code. This method of copying a null-terminated string is so common (and elegant, in my opinion) that you may want to add it to your personal toolbox.

Operators

At the heart of C is an extensive set of operators that allow you to build complex expressions. Some of the operators work with a single operand. Others require two or more operands. Some operators are mathematical in nature. Some are comparative. This section lists the complete set of ANSI C operators.

Arithmetic Operators

The arithmetic operators are +, -, *, /, and %. Each of these operators is binary (takes two operands). +, -, and * perform addition, subtraction, and multiplication, respectively. / performs integer division, truncating its result to an integral value. % divides its first operand by its second and returns the remainder.

Assignment Operators

All of the assignment operators are binary. The = operator copies the value of its right side to the variable on its left side. All of the other assignment operators combine = with some other operator, as in this example:

```
leftSide += rightSide;
```

This expression is equivalent to the following statement:

```
leftSide = leftSide + rightSide;
```

The augmented assignment operators are +=, -=, *=, /=, %=, >>=, <<=, &=, |=, and ^=. Each of these operators follows the pattern just described. The operator portions of the augmented assignment operators are described individually throughout this section.

Bitwise Logical Operators

The bitwise logical operators are &, |, ^, <<, >>, and ~. ~ is a unary operator (takes a single operand). The remainder of the bitwise logical operators are binary. ~ produces a one's complement of its operand. & performs a bitwise AND, | a bitwise OR, and ^ a bitwise EXCLUSIVE OR on their two operands.

<< and >> perform a left and a right bit shift, respectively, on the left-hand argument. The right-hand argument determines the number of bit positions to shift.



The bitwise OR operator (|) is typically used to change the value of a specified bit to 1. For example, suppose you had a byte with a value, in binary, of 00001111, and you wanted to set its high bit to 1. Use the bitwise OR operator, along with the binary value 10000000:

```
unsigned char highBitIsOne = 0x80;
  /* 10000000 */
unsigned char myByte = 0x0F;
  /* 00001111 */

myByte |= highBitIsOne; /* Now myByte
  is 10001111 */
```

The bitwise AND operator (&) is typically used to test whether a bit is set to 1 or to change a bit (or bits) to 0.

Consider these two variables:

```
unsigned char highBitIsOne = 0x80;
   /* 10000000 */
unsigned char myByte = 0x0F;
   /* 00001111 */
```

To test whether the high bit of myByte is set, use the bitwise AND operator:

```
if ( (myByte & highBitIsOne) ==
  highBitIsOne )
```

This expression will evaluate to true only if the high bit of myByte is set to 1.

This line of code will set the high bit of myByte to 0:

```
myByte &= 0x7F; /* 0x7F == 011111111 */
```

The Conditional Operator

The conditional operator (?:) is C's only ternary operator (requiring three operands). The operator takes the following form:

```
expression1 ? expression2 : expression3
```

The first expression is evaluated. If it evaluates to true, the second expression is evaluated and that result is the result of the entire ?: operation. If, however, the first expression evaluates to false, the third expression is evaluated and that result is the result of the entire expression.

Increment and Decrement Operators

The increment and decrement operators offer a quick way to increment or decrement a variable. Both of these operators are unary. The increment operator (++) increments its operand by 1. The decrement operator (--) decrements its operand by 1. Applying

either of these operators to an array pointer changes the value of the pointer to point to the next element (either up or down) in the array.

These two operators may be placed before the operand (prefix notation) or immediately after the operand (postfix notation). In prefix notation, the increment or decrement operation is performed before the enclosing expression is evaluated. In postfix notation, the increment or decrement operation is performed after the enclosing expression is evaluated.

Logical Operators

The three logical operators are &&, ||, and !. They manipulate their operands using Boolean logic according to the table in Figure 3.2. && and || are binary operators and perform logical AND and logical OR operations, respectively. ! is a unary operator and performs a logical NOT operation.

FIGURE 3.2 Logic table for the &&, | |, and ! operators.

В	!A	A&&B	AIIB
True	False	True	True
False	False	False	True
True	True	False	True
False	True	False	False
	False True	True False False False True True	True False True False True True False True False False False

Relational Operators

The six relational operators are >, >=, <, <=, ==, and !=. All are binary operators and compare the first operand with the second. > returns true if the first operand is greater than the second. >= returns true if the first operand is greater than or equal to the second. < returns true if the first operand is less than the second. <= returns true if the first operand is less than or equal to the second. == returns true if the two operands are equal. != returns true if the two operands are not equal.

The Comma Operator

The comma operator (,) is used to fuse two expressions into a single expression. For example, the line of code

i++, j++;

increments the variables **i** and **j**. The expressions that surround the comma operator are evaluated from left to right. The result of the operation is the value of the rightmost expression.

The sizeof() Operator

Although it appears to be a function call, <code>sizeof()</code> is actually a C operator that takes a single parameter. <code>sizeof()</code> returns the size in bytes of the argument. If the argument is a variable, <code>sizeof()</code> returns the number of bytes allocated for that variable. If the parameter is a type, <code>sizeof()</code> returns the number of bytes necessary to allocate a variable of that type.

Operator Precedence

All of C's operators are ranked according to precedence. In this expression

6 + 3 * 5

the order in which the two operators are evaluated has a definite effect on the expression's value. If + has a higher precedence than *, the expression will evaluate to 45. If * has a higher precedence, the result will be 21 (the correct answer is 21, by the way).

Two factors determine the order in which an expression's operators are evaluated. If one operator has a higher precedence than another, that operator is evaluated first. If the operators have equal precedence, the operators are evaluated from either left to right or right to left, depending on the operators. The chart in Figure 3.3 ranks each of C's operators and, for each grouping of equal operators, tells whether that group is evaluated from left to right or right to left.

FIGURE 3.3 C operators listed in high to low precedence.

Operators (High to Low Precedence)	Order
->, . Typecast, *, &, unary + and -, !, ~, ++,, sizeof	Left to right Right to left
Arithmetic *, /, %	Left to right
Arithmetic + and -	Left to right
<<, >>	Left to right
>, >=, <, <=,	Left to right
==, !=	Left to right
& (bitwise AND)	Left to right
^	Left to right
	Left to right
&&	Left to right
	Left to right
?:	Right to left
=, +=, -=, *=, /=, %=, >>=, <<=, &=, =, ^=	Right to left
,	Left to right

Statements

C statements are terminated by a semicolon (;). They can be grouped into blocks by using a matching pair of curly braces (left { and right }). Figure 3.4 lists the keywords that can be used in the construction of ANSI C statements. You should be familiar with each of these keywords.

FIGURE 3.4 C statement keywords.

ANSI C Keywords					
auto break case char const continue default	do double else enum extern float for	goto if int long register return	short signed sizeof static struct switch	typedef union unsigned void volatile while	

Functions

C statements can be grouped into individual functions. Every program contains at least one function, main().main() is automatically called to start the program. When the program starts, main() takes two parameters, argc and argv. argc and argv are known as command-line arguments. argc specifies the number of parameters embedded in the second argument, argv. argv is an array of parameters.

Functions can take parameters, and those parameters may be passed by value or by reference. Each function can also return a value of a specified type. If you don't specify a return type, int is assumed by the compiler. The predefined type void indicates an absence of a return type or an absence of parameters. A function with no parameters and no return values might look like this:

```
void GoodForNothing( void )
{
}
```

Typically, functions are declared at the top of the program file (or in a header file) by using function prototypes. Function prototypes allow you to specify a function's return type as well as the type of each of its parameters, adding an extra layer of type checking to your program.

The Ellipsis

Used at the end of a function's argument list, the ellipsis (...) indicates that a variable number of arguments may be passed to the function. For example, consider the following function declaration:

```
void MyFunc( short atLeastOne, ... );
```

MyFunc() requires at least one parameter but may take more than one. The type of the first parameter is **short**. The type of any additional parameters is unspecified.

The classic example of ellipsis use is in the declaration of printf():

```
int printf( char *format, ... );
```

The first parameter is a text string containing the format specification. The remaining arguments (if there are any) are determined by the format string.

Preprocessor Directives

Traditional C compilers compile your program in two passes. The first of these two passes is known as the *preprocessor pass*. There are a number of commands that you can place in your code to instruct the compiler to take a special action during this pass. These commands are known as *preprocessor directives* and always start with the pound sign (#).

Two widely used preprocessor directives are **#define** and **#include**. **#define** takes two parameters and asks the preprocessor to substitute the second parameter for the first throughout the remainder of the code. Since this substitution happens during the first compiler pass, the substitutions are in place for the second pass.

#include includes the specified file in the source code, also in time for interpretation by the second pass of the compiler. Typically, the name of the included file ends in .h (instead of C's traditional .c). These files are known as *header files* and contain **typedefs**, **#defines**, function prototypes, and other useful nonexecutable statements.

Other preprocessor directives include #elif, #else, #endif, #error, #if, #ifdef, #ifndef, #line, #pragma, and #undef.

Comments

The character combinations /* and */ have a special meaning in C. /* marks the beginning and */ marks the end of a source code comment. When the compiler encounters these characters in your code, it will ignore all characters in the comment, including /* and */.

C comments cannot be nested. This means that you can't put a comment block inside another comment block. Also, /* and */ lose their meaning when placed inside a string or character literal.

Summary

It is downright impossible to describe the entire C language in one chapter. However, if you understand the concepts presented here, you are definitely ready for C++. If you ran into trouble anywhere along the line, pick up a copy of *Learn C on the Macintosh* (by yours truly) or the second edition of *The C Programming Language* by Kernighan and Ritchie. Better yet, hook up with your local neighborhood C guru or ask your teacher for help. You'll get much more out of this book once you understand C.

When you're ready, turn the page. C++, here we come!

Chapter 4

Introducing C++

Welcome to the world of C++. This chapter covers all the basics, from operators and keywords to reference types and function name overloading.

This Chapter at a Glance

Getting C Code to Run under C++

Function Prototypes Are Required Automatic Type Conversion Scope Issues

New Features of C++ The // Comment Marker Handling Input and Output

An iostream Output Example An iostream Input Example iostream and Objects

Default Argument Initializers

A Default Argument Initializer Example

Reference Variables

The Reference Variable
A Reference Variable Example

Function Name Overloading

A Function Name Overloading Example Matching Rules for Overloaded Functions

The new and delete Operators

What to Do When new Fails A new Example

The Scope Resolution Operator

A Scope Resolution Operator Example

inline Functions

An inline Function Example

Summary

NOW THAT YOU'VE GOT A REVIEW OF C UNDER YOUR BELT, you're ready to tackle C++. C++ supports all the features of C, with a few twists and a lot more features thrown in.

This chapter starts with a comparison of C and C++, focusing on changes you'll need to make to compile your ANSI C code with an ANSI C++ compiler. It then moves on to some features unique to C++.

Getting C Code to Run under C++

Think of C++ as a superset of C. For the most part, every single feature you've come to know and love in C is available in C++ (albeit with a few changes). As in C, C++ programs start with a main() function. All of C's keywords and functions work just fine in C++. If you've ever written a C program that takes advantage of the command-line arguments argc and argv, you'll be glad to know that they're still around in C++.

In fact, with only a few tweaks here and there, your C programs should run quite well in the C++ world. Try not to get too wrapped up in this section. While it is important that you be aware of each of the issues discussed, some of this stuff is pretty subtle and you may never run into it in your own code. You may want to skim the rest of this section, then come back to it for a quick review once you start coding. Be sure you're back on full alert, however, when we get into new features of C++.

Function Prototypes Are Required

In C, function prototypes are optional. As long as there's no type conflict between a function call and the same function's declaration, your program will compile.

In C++, a function prototype is *required* for each of your program's functions. Your C++ program will not compile unless each and every function prototype is in place. As in C, you can declare a function without a return type. If no return type is present, the function is assumed to have a return type of **int**.

Automatic Type Conversion

If you haven't already, turn back to Chapter 3 and review the section that describe C's automatic type conversion. C++ uses the same rules as C for automatic type conversion, but with a slight twist.

Although a **void** pointer can be assigned the value of another pointer type without explicit typecasting, the reverse is not true. For example, although the following code compiles properly in C, it will *not* compile in C++:

Scope Issues

There are several subtle differences between C and C++ involving **scope**. A variable's scope defines the availability of the variable throughout the rest of a program. For example, a global variable is available throughout a program, while a local variable is limited to the block in which it is declared. Though C++ follows the same scope rules as C, there are a few subtleties you should be aware of.

For example, take a look at the following code. Try to guess the value of **size** at the bottom of **main()**:

```
char dummy[ 32 ];
int main()
{
  long size;
  struct dummy
{
```

```
char myArray[ 64 ];
};
size = sizeof( dummy );
return 0;
}
```

In C, **size** ends up with a value of 32; the reference to **dummy** in the **sizeof()** statement matches the global variable declared at the top of the program. In C++, however, **size** ends up with a value of 64; the reference to **dummy** matches the **struct** tag inside **main()**.

In C++, a structure name declared in an inner scope can hide a name in an outer scope. This same rule holds true for an enumeration:

```
enum color { red, green, blue };
```

In C++, this **enum** creates a type named **color** that can be used to declare other **enum**s and would obscure a global with the same name.

Here's another example:

```
int main()
{
   struct s
   {
     enum { good, bad, ugly } clint;
   };
   short good;
   return 0;
}
```

An ANSI C compiler will not compile this code, complaining that the identifier **good** was declared twice. The problem here is with the scope of the enumeration constant **good**. In C, an enumeration constant is granted the same scope as a local variable, even if it is embedded in a **struct** definition. When the compiler hits the

short declaration, it complains that it already has a **good** identifier declared at that level.

In C++, this code compiles cleanly. Why? C++ enumeration constants embedded in a **struct** definition have the same scope as that **struct**'s fields. Thus, the enumeration constant **good** is hidden from the **short** declaration at the bottom of **main()**.

A third example involves multiple declarations of the same variable within the same scope. Consider the following code:

```
short gMyGlobal;
short gMyGlobal; /* Cool in C, error in C++ */
```

The C compiler will resolve these two variable declarations to a single declaration. The C++ compiler, on the other hand, will report an error if it hits two variable declarations with the same name.

defa nish'an

It's useful to be aware of the difference between a **declaration** and a **definition**. A declaration specifies the types of all elements of an identifier. For example, a function prototype is a declaration. Here are some more declarations:

```
char name[ 20 ];
typedef int myType;
const short kMaxNameLength = 20;
extern char aLetter;
short MyFunc( short myParam );
```

As you can see, a declaration can do more than tie a type to an identifier. A declaration can also be a definition. A definition instantiates an identifier, allocating the appropriate amount of memory. In this declaration:

```
const short kMaxNameLength = 20;
```

the constant kMaxNameLength is also defined and initialized.

New Features of C++

OK, here comes the good stuff! The remainder of this chapter will take you beyond C into the heart of C++. While we won't explore object programming in this chapter, we will cover just about every other C++ concept.

The // Comment Marker

C's comment block markers, /* and */, perform the same function in C++. In addition, C++ supports a single-line comment marker. When a C++ compiler encounters the characters //, it ignores the remainder of that line of code. Here's an example:

```
int main()
{
   short numGuppies; // May increase suddenly!!
   return 0;
}
```

As you'd expect, the characters // are ignored inside a comment block. In the following example, // is included as part of the comment block:

```
int main()
{
   /*   Just a comment...
   // */
   return 0;
}
```

Conversely, the comment characters /* and */ have no special meaning inside a single-line comment. The start of the comment block in the following example is swallowed up by the single-line comment:

```
int main()
{
   // Don't start a /* comment block
   inside a single-line comment...
   This code WILL NOT compile!!! */
```

```
return 0;
}
```

The compiler will definitely complain about this example!

Handling Input and Output

In a standard C program, input and output are usually handled by Standard Library routines such as <code>scanf()</code> and <code>printf()</code>. While you can call <code>scanf()</code> and <code>printf()</code> from within your C++ program, there is an elegant alternative. The <code>iostream</code> facility allows you to send a sequence of variables and constants to an output stream, just as <code>printf()</code> does. Also, <code>iostream</code> makes it easy to convert data from an input stream into a sequence of variables, just as <code>scanf()</code> does.



Though the iostream features presented in this section may seem simplistic, don't be fooled. iostream is actually quite sophisticated. In fact, iostream is far more powerful than C's standard I/O facility. The material given here will allow you to perform the input and output you'll need to get through the next few chapters. Later in the book, we'll explore iostream in more depth.

iostream predefines three streams for input and output.
cin is used for input, cout for normal output, and cerr for error
output. The << operator is used to send data to a stream. The >>
operator is used to retrieve data from a stream.

defa nish' an

The << operator is known as the **insertion operator** because it allows you to insert data into a stream. The >> operator is known as the **extraction operator** because it allows you to extract data from a stream.

Here's an example of the << operator:

```
#include <iostream.h>
int main()
{
   cout << "Hello, world!";
   return 0;
}</pre>
```

This program sends the text string "Hello, world!" to the console, just as if you'd used printf(). The include file <iostream.h> contains all of the definitions needed to use iostream. Since << is a binary operator, it requires two operands. In this case, the operands are cout and the string "Hello, world!". The destination stream always appears on the left side of the << operator.



Just like the & and * operators, >> and << have more than one meaning (>> and << are also used as the right and left shift operators). Don't worry about confusion, however. The C++ compiler uses the operator's context to determine which meaning is appropriate.

As with any other operator, you can use more than one << on a single line. Here's another example:

```
#include <iostream.h>
int main()
{
   short   i = 20;
   cout << "The value of i is " << i;
   return 0;
}</pre>
```

This program produces the following output:


The value of i is 20

iostream knows all about C++'s built-in data types. This means that text strings are printed as text strings, shorts as shorts, and floats as floats, complete with decimal point. No special formatting is necessary.

An iostream Output Example

Here's an interesting example of iostream and output. Start up THIN C++ by double-clicking on the file named THIN Project Manager. You'll find the THIN Project Manager inside the THIN C++ Development folder, inside the THIN C++ Folder. THIN C++ will prompt you for a project file to open (Figure 4.1). Go into the folder called THIN C++ Projects (you'll have to move up one level to find it), then into the subfolder named Chap 04.01 - cout, and open the project file named cout.


FIGURE 4.1 THIN C++ prompts you for a project file to open.

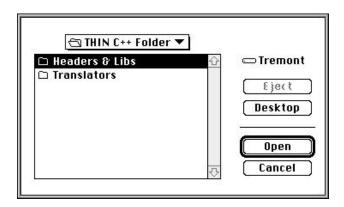

At this point, the **cout.** project window will appear, as shown in Figure 4.2. Each of the four names in the project window represents a separate file. **cout.cp** is the file containing the C++ source code. The other three files are libraries containing various support routines. The **iostreams** library contains all the **iostream** functions, **CPlusLib** is a set of support routines for

the C++ compiler, and **ANSI++** is the Standard Library from C with some modifications to support C++. You'll see these three libraries in all of your projects.

FIGURE 4.2 Project window for cout. .




If you double-click on the name **cout.cp** in the project window, a new window will appear, containing the **cout** source code, as follows:

Running cout.

Select **Run** from the **Project** menu. THIN C++ will compile your source code, then run the compiled program. When the console window appears, compare your output with that shown in Figure 4.3. To exit the program, type a carriage return. Let's take a closer look at the code.

FIGURE 4.3 THIN C++'s console window, showing the cout output.

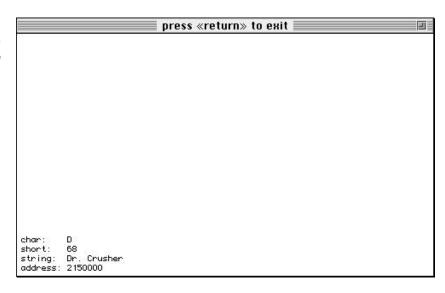

The cout Source Code

The program starts by initializing the **char** pointer **name**, pointing it to the text string **"Dr. Crusher"**. Next comes one giant statement featuring eleven different occurrences of the **<<** operator. This statement produces four lines of output.

The following line of code

```
cout << "char: " << name[ 0 ] << '\n'</pre>
```

produces this line of output:

```
char: D
```

As you'd expect, printing name[0] produces the first character in name, an uppercase D.

The next line of code is

```
<< "short: " << (short)(name[ 0 ]) << '\n'</pre>
```

The output associated with this line of code is as follows:

short: 68

This result was achieved by casting the character 'D' to a **short**. In general, **iostream** displays integral types (such as **short** and **int**) as an integer. As you'd expect, a **float** is displayed in floating-point format.

The next line of code

```
<< "string: " << name << '\n'
```

produces this line of output:

```
string: Dr. Crusher
```

When the << operator encounters a **char** pointer, it assumes you want to print a zero-terminated string.

The final chunk of code in our example shows another way to display the contents of a pointer:

```
<< "address: " << (unsigned long)name;
```

Again, name is printed, but this time is cast as an unsigned long. Here's the result:

address: 2150000



Anytime you encounter an address, take it with a grain of salt. Since your computer and mine are probably quite different, your addresses will probably be different from those shown in the book.

As you can see, **cout** does what it thinks makes sense for each type it prints. Later in the book, you'll learn how to customize **cout** by using it to print data in a specified format or teaching it how to print your own data types.



According to the ARM (*The Annotated C++ Reference Manual*) main()'s type is implementation dependent. Traditionally, main() is declared to return an int. If main() doesn't return a value, the compiler assumes its type to be void. Consider this code:

```
main()
{
}
```

Different compilers deal with this code in different ways. Some print a warning message, telling you that a return value from main() was expected, while at least one compiler (Symantec's) refuses to compile this code, generating a compile error.

All of the programs in this book declare main() to return an int. To avoid compile warnings/errors, each main() ends with the line:

```
return 0;
```

To avoid repetition, I ignore this line in the code walkthroughs. Just thought you'd like to know why it's in there.

An iostream Input Example


Our next example explores the flip side of iostream by reading data in as well as printing it out. Close cout. by selecting Close Project from THIN C++'s Project menu. When prompted for a new project file to open, go back to the THIN C++ Projects folder, open the subfolder named Chap 04.02 - cin, and open the project file named cin.

Running cin.

Select **Run** from the **Project** menu. First, you'll be prompted to type in your first name. Type in a single name (don't type in any spaces, tabs, or other white space characters) and hit return. Next, you'll be prompted for three numbers: a **short**, a **long**, and a

float. Type all three numbers on the same line, separating each by a space, and then hit return. **cin** will then list your name, as well as each of the three numbers you typed in (Figure 4.4). Once you're done admiring your handiwork, type a carriage return to exit the program.

FIGURE 4.4 THIN C++'s console window, showing the cin. output.

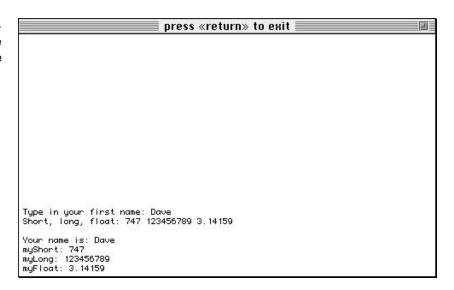



If things didn't go exactly as planned, try running the program again. This time, when prompted for your first name, be careful to type only a single word containing no white space characters. Next, be sure that the three numbers are in the proper order, a short, followed by a long, followed by a float. As you'll see, cin is pretty picky about the format of its input data.

The cin Source Code

As is always the case when you use **iostream**, the program starts by including the file **<iostream.h>**. Next, the constant **kMaxNameLength** is defined, providing a length for the **char** array **name**:

```
#include <iostream.h>
const short kMaxNameLength = 40;
int main()
```



When a variable is defined using the const qualifier, an initial value must be provided in the definition, and that value cannot be changed for the duration of the program. Although some C programmers tend to use #define instead of const, C++ programmers prefer const to #define.

cin uses cout and << to prompt for a text string, a short, a
long, and a float. cin and >> are used to read the values into
the four variables name, myshort, mylong, and myfloat:

```
char name[ kMaxNameLength ];
short myShort;
long myLong;
float myFloat;

The next line uses << to send a text string to the console:
cout << "Type in your first name: ";

Next, >> is used to read in a text string:
cin >> name;
```

Type your first name and hit a carriage return. Be sure to type your first name only. When the >> operator reads a text string, it reads a character at a time until a white space character (like a space or a tab) is encountered.

Now, three more pieces of data are read using a single statement. First, display the prompt

```
cout << "Short, long, float: ";</pre>
```

Then, read in the data, separating the three receiving variables by consecutive >> operators:

```
cin >> myShort >> myLong >> myFloat;
```



Be sure to separate each of the three numbers by a space (or some white space character). Also, make sure the numbers match the type of the corresponding variable. For example, it's probably not a good idea to enter 3.52 or 125000 as a short, although an integer like 47 works fine as a float.

Finally, display each of the variables we worked so hard to fill:

```
cout << "\nYour name is: " << name;
cout << "\nmyShort: " << myShort;
cout << "\nmyLong: " << myLong;
cout << "\nmyFloat: " << myFloat;
return 0;
}</pre>
```

iostream and Objects

So far, iostream might seem primitive compared to the routines in C's Standard Library. After all, routines like scanf() and printf() give you precise control over your input and output. Routines like getchar() and putchar() allow you to process one character at a time, letting you decide how to handle white space.

Be patient. I promise you that **iostream** is awesome. The trouble is, to unleash **iostream**'s true power, you must first come up to speed on object programming. The **iostream** concepts presented here are the bare minimum you'll need to get through the sample programs in the next few chapters. Later in the book, we'll examine **iostream** with an electron microscope. For now, basic input and output are all we need.

Argument Initializers

Default C++ allows you to assign default values (known as **default argu**ment initializers) to a function's arguments. For example, here's a routine designed to generate a tone at a specified frequency:

```
void GenerateATone( short frequency = 440 )
{
    // A frequency of 440 is equal to an A note
}
```

If you call this function with a parameter, the value you pass in is used. For example, the call

```
GenerateATone( 330 );
```

will generate a tone with a frequency of 330 beats per second, which, in musical notation, is equivalent to an E note. If you call the function without specifying a value, the default value is used. The call

GenerateATone();

will generate a tone with a frequency of 440, which represents an A note.

This technique works with multiple parameters as well, although the rules get a bit more complicated. You can specify a default value for a parameter only if you also specify a default for all the parameters that follow it. For example, this declaration is cool:

```
void GotSomeDefaults( short manny, short moe=2,
                       char jack='x' );
```

Since the second parameter has a default, the third parameter *must* have a default. The next declaration *won't* compile, however, because the first parameter specifies a default and the parameter that follows does not:

```
void WillNotCompile( long time=100L, short stack );
```

Default parameter values are specified in the function prototype rather than in the function's implementation. For example, here's a function prototype, followed by the function itself:

```
void MyFunc( short paraml = 27 );
void MyFunc( short paraml )
{
   // Body of the function...
}
```



Many C++ programmers create a separate #include file for their function prototypes. Gathering all the function declarations, including parameters and default values, into a single list makes a handy reference tool. I keep my prototypes in alphabetical order and follow each one with a comment telling me where the actual code for that routine is. Here's an example:

```
void MyFunc( short param1 = 27 );
// MySourceFile.cp
```

A Default Argument Initializer Example

Let's take default argument initializers out for a quick spin. Close cin., go back to the THIN C++ Projects folder, open the subfolder named Chap 04.03 - protoTester, and open the project file named protoTester. Next, run protoTester. by selecting Run from the Project menu. Here's what you'll see:

```
MyFunc( 1, 0, 0 )
MyFunc( 1, 2, 0 )
MyFunc( 1, 2, 3 )
```

Hit a return to exit **protoTester**. Let's take a look at the source code.

The protoTester Source Code

The key to **protoTester** lies in the function **MyFunc()** and its default-laden parameter list. After the obligatory **#include** of the file **<iostream.h>**, you'll find the prototype for **MyFunc()**:

#include <iostream.h>

Notice that defaults are provided for the second and third parameters only. Both of these parameters have a default value of 0.

main() calls MyFunc() using three different calling sequences. Since no default is provided for MyFunc()'s first parameter, all calls to MyFunc() must include at least one value. Calls like

MyFunc();

or

MyFunc(, 1);

will cause the compiler to complain bitterly.

The first call of MyFunc() passes a single value, forcing MyFunc() to rely on its default values for the second and third parameters. The call

MyFunc(1);

produces this line of output:

```
MyFunc( 1, 0, 0 )
```

Notice that the default value of 0 is used for the second and third parameters.

Next, the code

```
MyFunc( 1, 2 );
```

produces this line of output:

```
MyFunc( 1, 2, 0 )
```

In this case, values are passed in for the first and second parameters, while the default value of 0 is used for the third parameter. Finally, the code

```
MyFunc( 1, 2, 3 );
```

produces this line of output:

```
MyFunc( 1, 2, 3 )
```

In this last case, the three values passed in override all of the parameter defaults.

The function MyFunc() uses iostream to print the current values of MyFunc()'s three parameters:

Notice that the defaults are specified in the function prototype and not in the function title.

Reference Variables

In C, all parameters are passed by value as opposed to being passed by reference. When you pass a parameter to a C function, the value of the parameter is passed on to the function. Any changes you make to this value are *not* carried back to the calling function.

```
Here's an example:
```

```
void DoubleMyValue( short valueParam )
{
  valueParam *= 2;
}
int main()
{
  short number = 10;
  DoubleMyValue( number );
  return 0;
}
```

main() sets number to 10, then passes it to the function DoubleMyValue(). Since number is passed by value, the call to DoubleMyValue() has no effect on number. When DoubleMyValue() returns, number still has a value of 10.

Here's an updated version of the program:

```
void DoubleMyValue( short *numberPtr )
{
    *numberPtr *= 2;
}
int main()
{
    short number = 10;
    DoubleMyValue( &number );
    return 0;
}
```

In this version, **number**'s address is passed to **DoubleMyValue()**. By dereferencing this pointer, **DoubleMyValue()** can reach out and change the value of **number**. When **DoubleMyValue()** returns, **number** will have a value of 20.

The Reference Variable

Reference variables allow you to pass a parameter by reference, without using pointers. Here's another version of the program, this time implemented with a reference variable:

```
void DoubleMyValue( short &referenceParam )
{
   referenceParam *= 2;
}
int main()
{
   short number = 10;
   DoubleMyValue( number );
   return 0;
}
```

Notice that this code looks just like the first version, with one small exception. **DoubleMyValue()**'s parameter is defined using the & operator:

short &referenceParam

The & marks referenceParam as a reference variable and tells the compiler that referenceParam and its corresponding input parameter, number, are one and the same. Since both names refer to the same location in memory, changing the value of referenceParam is exactly the same as changing number.



Some people declare their reference variables and parameters like this:

short &referenceParam

placing the & next to the variable, some like this:

short & referenceParam

leaving white space in between the two, and others like this:

short& referenceParam

placing the & directly after the type. All of these will work. Use whichever one you prefer, just be consistent.

A Reference Variable Example

Here's an example that should make things a little clearer. Close protoTester., go back to the THIN C++ Projects folder, open the subfolder named Chap 04.04 - reference, and open the project file named reference. Next, run reference. by selecting Run from the Project menu. Here's what you'll see:

&valueParam: 5306602 After ByValue: 12

&refParam: 5306630
After ByRef(short): 24

&refParam: 5306628 After ByRef(long): 12



The seven-digit numbers shown in this example are addresses. Unless you snuck in here and have been using my Mac, your addresses will probably be different.

Hit a carriage return to exit **reference**. Let's take a look at the source code.

The reference Source Code

reference starts with a pair of function prototypes. Just like the routine **DoubleMyValue()** presented earlier, both of these routines take a single parameter and double its value:

```
#include <iostream.h>
void CallByValue( short valueParam );
void CallByReference( short &refParam );
```

Notice that CallByValue() takes a short as a parameter using the standard by-value parameter passing mechanism; while CallByReference() takes a reference variable as a parameter passed by reference.

main() starts by defining two variables, a short and a long,
initializing each to a value of 12:

```
int main()
{
  short number = 12;
  long longNumber = 12L;
```

Next, the address of both variables is printed in the console. When a parameter is successfully passed by reference, the calling and receiving parameters will have the same address:

```
cout << "&number: " <<
  (unsigned long)&number << "\n";

cout << "&longNumber: " <<
  (unsigned long)&longNumber << "\n\n";</pre>
```



You may have noticed that reference prints its addresses in decimal, rather than hexadecimal, format. Later in the book, you'll learn how to customize cout to print data in any format you like. For the moment, we'll print out addresses by casting them to unsigned longs.

Next, number is passed by value to CallByValue():

```
CallByValue( number );
```

CallByValue() prints the address of, and then doubles the value of, its parameter. **number**'s address, which we printed earlier, was **5306630**. The address of the value parameter is **5306602**. Clearly, this parameter was not passed by reference, which explains why **number**'s value is not changed by the call to **CallByValue()**. As proof, the value of **number** is printed again. As you can see by the output, the value stays at 12:

```
cout << "After ByValue: " << number << "\n\n";
Then, number is passed to CallByReference():
CallByReference( number );</pre>
```

CallByReference() also prints the address of its parameter. When we compare this address with the address printed earlier, they match exactly. number's address (printed earlier) was 5306630. The address of CallByReference()'s parameter is also 5306630. This call by reference was successful! As proof, when the value of number is printed for a third time, its value doubles to 24:

```
cout << "After ByRef( short ): " << number << "\n\n";
Finally, a long is passed to CallByReference():
CallByReference( longNumber );</pre>
```

Since CallByReference() declares its parameter as a reference to a **short**, the compiler is faced with an interesting problem. Reference variables work only if the type of the variable being referenced agrees with the type of the reference variable. When this isn't the case, the compiler creates a temporary variable that is referenced by the reference parameter in the called routine. When a change is made to this parameter, the change is made to the temporary variable and not to the matching parameter in the calling function.

In this case, the value of the long is passed on to CallByReference(). As proof, compare the address of longNumber, which is 5306632 with the parameter address printed out by CallByReference(), which is 5306628. As you can see, the addresses don't match.



Some C++ compilers generate warnings when they encounter this line of code:

```
CallByReference( longNumber );
```

The problem here is that longNumber is a long, but CallByReference() expects a short reference variable. Since the types don't agree, the compiler prints a warning and then creates a temporary variable.

To add more proof to the pudding, when the value of **longNumber** is printed upon **CallByReference()**'s return, it remains at 12, unchanged from its original value:

```
cout << "After ByRef( long ): " << longNumber << "\n";
return 0;
}</pre>
```



Reference variables are frequently used as call-byreference parameters. However, they can also be used to establish a link between two variables in the same scope. Here's an example:

```
short romulus;
short &remus = romulus;
```

The first line of code defines a **short** with the name **romulus**. The second line of code declares a reference variable with the name **remus**, linking it to the variable **romulus**. Just as before, the & marks **remus** as a reference variable.

Now that **remus** and **romulus** are linked, they share the same location in memory. Changing the value of one is *exactly* the same as changing the value of the other.

It's important to note that a reference variable must be initialized with a variable as soon as it is declared. The following code will not compile:

```
short romulus;
short &remus; // Will not compile!!!
remus = romulus;
```

The reference variable must also be of the same type as the variable it references. The following code won't work:

```
short romulus;
long &remus = romulus; // Type mismatch!!!
```

In addition, once established, the link between a reference and a regular variable cannot be changed as long as the reference remains in scope. In other words, once remus is linked to romulus, it cannot be set to reference a different variable.

Function Name Overloading

The next feature up for discussion, **function name overloading**, allows you to write several functions that share the same name.

Suppose you needed a function that would print the value of one of your variables, be it **long**, **short**, or a text string. You could write one function that takes four parameters:

The first parameter might act like a switch, determining which of the three types you were passing in for printing. The main code of the function might look like this:

```
if ( whichType == kIsLong )
  cout << "The long is: " << longParam << "\n";</pre>
```

```
else if ( whichType == kIsShort )
  cout << "The short is: " << shortParam << "\n";
else if ( whichType == kIsText )
  cout << "The text is: " << text << "\n";</pre>
```

Another solution is to write three separate functions, one for printing **shorts**, one for **longs**, and one for text strings:

```
void DisplayLong( long longParam );
void DisplayShort( short shortParam );
void DisplayText( char *text );
```

Each of these solutions has an advantage. The first solution groups all printing under a single umbrella, making the code somewhat easier to maintain. On the other hand, the second solution is more modular than the first. If you want to change the method you use to display <code>longs</code>, you modify only the routine that works with <code>longs</code>; you don't have to deal with the logic that displays other types.

As you might expect, there is a third solution that combines the benefits of the first two. Here's how it works.

As mentioned earlier, C++ allows several functions to share the same name by way of function name overloading. When an overloaded function is called, the compiler compares the parameters in the call with the parameter lists in each of the candidate functions. The candidate with the most closely matching parameter list is the one that gets called.

defa nish'an

A function's parameter list is also known as its **signature**. A function's name and signature combine to distinguish it from all other functions. Note that a function's return type is not part of its signature.

A Function Name Overloading Example

Earlier, we looked at two solutions to our multitype printing problem. As promised, here's a third solution that takes advantage of function name overloading. Close reference., navigate up a level, then down into the subfolder named Chap 04.05 - overload and open the project file named overload. Next, run overload. by selecting Run from the Project menu. Here's what you'll see:

```
The short is: 3
The long is: 12345678
The text is: Make it so...
```

Hit a carriage return to exit **overload**. Let's look at the code.

The overload Source Code **overload** starts with three function prototypes, each of which shares the name **Display()**:

```
#include <stream.h>
void Display( short shortParam );
void Display( long longParam );
void Display( char *text );
```

Notice that each version of **Display()** has a unique signature. This is important. You are *not* allowed to define two functions with the same name and the same signature.

main() starts by defining three variables: a short, a long
and a text string.

```
int main()
{
  short myShort = 3;
  long myLong = 12345678L;
  char *text = "Make it so...";
```

Next, **Display()** is called three times. First, a **short** is passed as a parameter. Since this call exactly matches one of the **Display()** routines, the compiler doesn't have a problem deciding which function to call:

```
Display( myShort );
```

Similarly, the calls passing a **long** and a text string to **Display()** match perfectly with the **Display()** functions having **long** and text string signatures:

```
Display( myLong );
Display( text );
return 0;
}
The signatures of these three versions of Display() feature a short, a long, and a text string, respectively:
void Display( short shortParam )
{
  cout << "The short is: " << shortParam << "\n";
}
void Display( long longParam )
{
  cout << "The long is: " << longParam << "\n";
}
void Display( char *text )
{</pre>
```

Matching Rules for Overloaded Functions

cout << "The text is: " << text << "\n";</pre>

The preceding example was fairly straightforward. The compiler had no difficulty deciding which version of <code>Display()</code> to call because each of the calls matched perfectly with one of the <code>Display()</code> functions. What do you think would happen if you passed a <code>float</code> to <code>Display()</code>?

```
Display( 1.0 );
```

When the compiler can't find an exact match for an overloaded function call, it turns to a set of rules that determine the best match for this call. After applying each of the rules, unless one and only one match is found, the compiler reports an error.

As you've already seen, the compiler starts the matching process by looking for an exact match between the name and signature of the function call and a declared function. If a match is not found, the compiler starts promoting the type of any integral parameters in the function call, following the rules for automatic type conversion described in Chapter 3. For example, a **char** or a **short** would be promoted to an **int** and a **float** would be promoted to a **double**.

If a match is still not found, the compiler starts promoting non-integral types. Finally, the ellipsis operator in a called function is taken into account, matching against zero or more parameters.

In answer to our earlier question, passing a **float** to **Display()** would result in an error, listing the function call as ambiguous. If we had written a version of **Display()** with a **float** or a **double** in its signature, the compiler would find the match.

The new and delete Operators

In C, memory allocation typically involves a call to **malloc()** paired with a call to **free()** when the memory is no longer needed. In C++, the same functionality is provided by the operators **new** and **delete**.

Call **new** when you want to allocate a block of memory. For example, the following code allocates a block of 1024 **chars**:

```
char *buffer;
buffer = new char[ 1024 ];
```

new takes a type as an operand, allocates a block of memory the same size as the type, and returns a pointer to the block. To return the memory to the heap, use the **delete** operator. The next code frees up the memory just allocated:

```
delete [] buffer;
```



The brackets in the preceding line of code indicate that the item to be deleted is a pointer to an array. If you are deleting something other than a pointer to an array, leave the brackets out:

```
int myIntPtr;
myIntPtr = new int;
delete myIntPtr;
```

new can be used with any legal C++ type, including those you create yourself. Here are a few examples:

Here's an example of a *bad* use of **new**, guaranteed to bring the compiler to its knees:

```
short *shortPtr;
shortPtr = new 1024; // Will not compile!!!
```

Though you can pass a constant to malloc(), a constant is not a type and has no place in new.

What to Do When new Fails

Every program that allocates memory runs the risk that its request for memory will fall on deaf ears, most likely because there's no more memory left to allocate. If your program uses **new** to allocate memory, it had better detect, and handle, any failure on **new**'s part.

Since new returns a value of 0 when it fails, the simplest approach just checks this return value, taking the appropriate action when new fails:

```
char *bufPtr;
bufPtr = new char[ 1024 ];
if ( bufPtr == 0 )
  cout << "Not enough memory!!!";
else
  DoSomething( bufPtr );</pre>
```

This code uses **new** to allocate a 1024-byte buffer. If **new** fails, an error message is printed; otherwise, the program goes on its merry way.

This approach requires that you check the return value every time you call **new**. If your program performs a lot of memory allocation, this memory-checking code can really add up. As your programs get larger and more sophisticated, you might want to consider a second strategy.

C++ allows you to specify a single routine, known as a **new** handler, that gets called if and when **new** fails. Design your **new** handler for the general case so that it can respond to *any* failed attempt to allocate memory.



Whether or not you designate a new handler, new will still return 0 if it fails. This means you can design a two-tiered memory management strategy combining a new handler and code that runs if new returns 0.

To specify a **new** handler, pass the handler's name to the function **set_new_handler()**. To use **set_new_handler()**, be sure to include the file **<new.h>**:

```
#include <new.h>
void NewFailed( void );
int main()
{
  set_new_handler( NewFailed );
    .
    .
}
```



One possible memory allocation strategy is to allocate a block of memory at the beginning of your program, storing a pointer to the block in a global variable. Then, when **new** fails, your program can free up the spare memory block, ensuring that it will have enough memory to perform any housekeeping chores that it requires in a memory emergency.

A new Example

Our next sample program repeatedly calls **new** until the program runs out of memory, keeps track of the number of memory requests, and then reports on the amount of memory allocated before failure. This program uses the spare memory scheme just described.

Close overload., navigate up a level, then down into the subfolder named Chap 04.06 - newTester, and open the project file named newTester. Next, run newTester. by selecting Run from the Project menu. Here's what you'll see:

```
Installing NewHandler...
Number of blocks allocated: 25
```



The number of blocks you can allocate before you run out of memory depends on the amount of memory you make available to your program. Don't be too surprised if your number differs from the number of blocks shown in this example.

Hit a carriage return to exit **newTester**. Let's take a look at the source code.

The newTester Source Code

newTester starts by including both <iostream.h> for access
to the iostream library and <new.h> for access to the
set_new_handler() function:

```
#include <iostream.h>
#include <new.h>
```

NewFailed() is the function we want called if **new** fails in its attempt to allocate memory:

```
void NewFailed();
```

newTester makes use of two global variables. **gDone** acts as a flag, initially set to **false**, but set to **true** when we're ready to exit our memory allocation loop; **gSpareBlockPtr** is a pointer to the spare block of memory we allocate at the beginning of the program:

```
char gDone = false;
char *gSpareBlockPtr = 0;
```



You should be aware that true and false are *not* part of the C++ language. Though Thin C++ defines the constants true and false for you, most development environments do not predefine them.

main() uses two local variables. myPtr acts as a pointer to the blocks of memory we allocate; numBlocks tracks the number of blocks we allocate before new finally fails:

```
int main()
{
  char *myPtr;
  long numBlocks = 0;
```

Next, we'll send an appropriate message to the console. This message serves a subtle purpose. It causes iostream to allocate all the memory it needs for the console window before the program consumes all remaining free memory. This guarantees that our subsequent console output will appear.

```
cout << "Installing NewHandler...\n";</pre>
```

set_new_handler() is called to set NewFailed() as the
routine to be called if and when new fails:

```
set_new_handler( NewFailed );
```

Then, the spare block of memory (20 kilobytes) is allocated, and a pointer to the spare block is stored in gSpareBlockPtr:

```
gSpareBlockPtr = new char[20480];
```



Your C++ environment most likely has a fixed limit on the size of a single block of memory. Many environments limit a single block to 32 kilobytes. If you need more memory than your environment allows, design a workaround using multiple blocks.

Next, we enter an endless loop, allocating a 1-kilobyte block and incrementing **numBlocks**:

```
while ( gDone == false )
```

```
{
  myPtr = new char[1024];
  numBlocks++;
}
```



Notice that we don't squirrel away the pointers to these allocated blocks. Once we allocate a new block, we lose the pointer to the previously allocated block. That block can never be deleted and is lost forever. Not a particularly good memory management scheme, eh? Make sure you balance every use of new with a corresponding delete.

Once we've allocated all the available memory, **new** will fail and **NewFailed()** will be called. **NewFailed()** sets **gDone** to **true**, and the memory allocation loop exits. Once the loop exits, we print out the number of blocks we were able to allocate:

```
cout << "Number of blocks allocated: " <<
   numBlocks;
return 0;
}</pre>
```

NewFailed() starts by checking to see whether gSpareBlockPtr actually points to a block of memory. After all, new might fail when we first try to allocate the spare block. If we were able to allocate the spare block, NewFailed() uses delete to return the block to the heap and gSpareBlockPtr is reset to 0:

```
if ( gSpareBlockPtr != 0 )
{
   delete gSpareBlockPtr;
   gSpareBlockPtr = 0;
}
```

Finally, gDone is set to true:

```
gDone = true;
}
```

The Scope Resolution Operator

The next feature we'll examine is C++'s **scope resolution operator** (::). The scope resolution operator precedes a variable, telling the compiler to look outside the current block for a variable of the same name.

Suppose you declare a global variable and a local variable with the same name:

```
short number;
int main()
{
  short number;

  number = 5;  // local reference
  ::number = 10;  // global reference
  return 0;
}
```

Inside main(), the first assignment statement refers to the local definition of number. The second assignment statement uses the scope operator to refer to the global definition of number. This code leaves the local number with a value of 5 and the global number with a value of 10.



Many programmers start all their global variables with a lowercase g to differentiate them from local variables. If you use this convention, you'll never be in the situation where a local variable is obscuring a global variable.

This doesn't mean you should ignore the scope resolution operator, however! Later in the book, as we get into object programming, you'll find that the scope

resolution operator is invaluable. For now, follow through the sample program, then file the scope resolution operator away for future reference.

A Scope Resolution Operator Example

Our next sample program offers a quick demonstration of the scope resolution operator. Close **newTester.**, navigate up a level, then down into the subfolder named **Chap 04.07 - scopeTester**, and open the project file named **scopeTester.** Next, run **scopeTester.** by selecting **Run** from the **Project** menu. Here's what you'll see:

```
yourValue: 5
yourValue: 10
yourValue: 5
```

Hit a carriage return to exit **scopeTester**. Let's look at the source code.

The scopeTester Source Code scopeTester defines a global variable with the name myValue, initializing it to a value of 5:

```
#include <iostream.h>
short myValue = 5;
```

main() defines a local variable named yourValue and assigns
it the value in myValue:

```
int main()
{
   short yourValue = myValue;
```

Then, **yourValue** is printed out, showing it with a value of 5, the same as the global **myValue**:

```
cout << "yourValue: " << yourValue << "\n";</pre>
```

Next, a local with the name **myValue** is defined and initialized with a value of 10. When **myValue** is copied to **yourValue**, which variable is copied, the local or the global?

```
short myValue = 10;
yourValue = myValue;
```

As you can see from the output, the reference to **myValue** matches with the local declaration, showing **yourValue** with a value of 10:

```
cout << "yourValue: " << yourValue << "\n";</pre>
```

Then, the scope resolution operator is used to copy myValue to yourValue. When yourValue is printed again, it has a value of 5, showing that ::myValue refers to the global declaration of myValue:

```
yourValue = ::myValue;
cout << "yourValue: " << yourValue << "\n";
return 0;
}</pre>
```



The scope resolution operator can be applied only when a match is available. Applying the scope resolution operator to a local variable without a corresponding global will generate a compile error. To see this for yourself, add the following code to the end of main() and try to compile it:

```
::yourValue = 20;
```

Since there is no global named yourValue, the code will not compile.

inline Functions

OK. One final topic, then we'll move on to object programming. Traditionally, when a function is called, the CPU executes a set of instructions that move control from the calling function to the called function. Tiny as these instructions may be, they still take time. C++, however, provides **inline functions**, which allow you to bypass these instructions and save a bit of execution time. Here's how this feature works.

When you declare a function using the **inline** keyword, the compiler copies the body of the function into the calling function, making the copied instructions a part of the calling function as if it were written that way originally. The benefit to you is a slight improvement in performance. The cost is in memory usage. Why? If you call an inline function twenty times from within your program, twenty copies of the function will be grafted into your object code.

An inline Function Example

Our final sample program features a single inline function that returns the value achieved when its first argument is raised to its second argument's power. As an example, the following call will return the value $2^5 = 2*2*2*2*2 = 32$:

```
power( 2, 5 );
```

Close **scopeTester.**, navigate up a level, then down into the subfolder named **Chap 04.08 - inline**, and open the project file named **inline**. Next, run **inline**. by selecting **Run** from the **Project** menu. Here's what you'll see:

```
power( 2, 3 ): 8
power( 3, 6 ): 729
power( 5, 0 ): 1
power( -3, 4 ): 81
```

Hit a carriage return to exit **inline**. Let's take a look at the source code.

The inline Source Code

inline starts with the standard include file, followed by a function prototype that features the keyword **inline**:

By preceding **power()**'s declaration by the **inline** keyword, we've asked the compiler to replace each of the four function calls in **main()** with the code in **power()**. Note that this replacement effects the object code and has no impact on the source code:

```
inline long power( short base, short exponent )
{
  long product = 1;
  short i;

if ( exponent < 0 )
  return( 0 );</pre>
```

```
for ( i=1; i<=exponent; i++ )
    product *= base;

return( product );
}</pre>
```



There are two clear benefits that arise from using inline code instead of a #define macro: type-safety and side-effects protection.

Consider this #define macro:

```
#define square(a) ( (a) * (a) )
```

Compare that macro to this inline function:

```
inline int square( int a )
{
  return( a * a );
}
```

The inline version restricts its parameter to an integral value while the #define performs a simple-minded text substitution.

Now suppose you call **square()** with a prefix operator:

```
xSquared = square( ++x );
```

The #define version expands this as follows:

```
xSquared = ( (++x) * (++x) );
```

which has the unwanted side-effect of incrementing \mathbf{x} twice. The **inline** version doesn't do this.

The upshot here is that both #defines and inlines offer an in-line performance advantage, but the inline does its job a little more carefully.

Summary

Congratulations! You've reached the first summit in your quest for C++ mastery. You've moved well beyond the boundaries of C and covered most of the syntax you'll need to build your own C++ programs. Your next goal is to move on to Chapter 5 and explore the world of object programming.

Chapter 5

Object Programming Basics

This chapter introduces you to the basics of object programming, the heart and soul of C++. You'll learn all about C++ structures, see what sets them apart from their C brethren, and learn how to use C++ to create objects of your very own.

This Chapter at a Glance

The Organizational Power of the Struct Encapsulating Data and Functions Creating an Object

Accessing an Object's Members

The Current Object

The "This" Object Pointer

Deleting an Object

Writing Member Functions

The Constructor Function
Adding Parameters to Your Constructor
The Destructor Function

Access Priveleges

Access Specifiers
The class Keyword

Bringing It All Together

An Object Programming Example

Friends

Three Types of Friends A Friendly Example

Summary

BEFORE WE GET INTO THE MAIN THRUST OF THIS CHAPTER, let's take a moment and talk about **objects**.

There is nothing mysterious about the concept of an object. In C++, an object is any instance of a data type. For example, this line of code:

int myInt;

declares an **int** object. This chapter will teach you how to use C++ to create, destroy, and manipulate objects in very powerful ways.

The first object we'll take a look at is the structure.

The Organizational Power of the Struct

One of the most valuable features shared by C and C++ is the structure. Without the structure, you'd have no way to group data that belonged together. For example, suppose you wanted to implement an employee data base that tracked an employee's name, employee ID, and salary. You might design a structure that looks like this:

```
const short kMaxNameSize = 20;
struct Employee
{
   char    name[ kMaxNameSize ];
   long   id;
   float   salary;
};
```

The great advantage of this structure is that it lets you bundle several pieces of information together under a single name. This concept is known as **encapsulation**.

For example, if you wrote a routine to print an employee's data, you *could* write:

```
Employee newHire;

.
.
.
PrintEmployee( newHire.name, newHire.id, newHire.salary );
```



Did you notice anything unusual about the declaration of newHire in the preceding code sample? In C, this code would not have compiled. Instead, the declaration would have looked like this:

```
struct Employee newHire; /* The C version */
```

When the C++ compiler sees a structure declaration, it uses the structure name to create a new data type, making it available for future structure declarations.

On the other hand, it would be so much more convenient to pass the data in its encapsulated form:

```
PrintEmployee( &newHire );
```

Encapsulation allows you to represent complex information in a more natural, easily accessible form. In the C language, the **struct** is the most sophisticated encapsulation mechanism available. As you'll soon see, C++ takes encapsulation to a new level.

Encapsulating Data and Functions

While C structures are limited strictly to data, C++ supports structures composed of both data and functions.

Here's an example of a C++ structure declaration:

```
const short kMaxNameSize = 20;
struct Employee
{
   //     Data members...
     char     employeeName[ kMaxNameSize ];
     long     employeeID;
     float     employeeSalary;

//     Member functions...
     void     PrintEmployee();
};
```

This example declares a new type named **Employee**. You can use the **Employee** type to declare individual **Employee** objects. Each **Employee** object is said to be a member of the **Employee** class.

The **Employee** class consists of three data fields as well as a function named **PrintEmployee()**. In C++, a class's data fields are known as **data members** and its functions are known as **member functions**.

Each **Employee** object you create gets its own copy of the **Employee** class data members. All **Employee** objects share a single set of **Employee** member functions.

Later in the chapter, you'll see how to access an object's data members and member functions. For now, let's take a look at the mechanisms C++ provides to create and destroy objects.

Creating an Object

There are two ways to create a new object. The simplest method is to define the object directly, just as you would a local variable:

Employee employee1;

This definition creates an **Employee** object whose name is **employee1**. **employee1** consists of a block of memory large enough to accommodate each of the three **Employee** data members.

When you create an object by defining it directly, as we did above, memory for the object is allocated when the definition moves into scope. That same memory is freed up when the object drops out of scope.

For example, you might define an object at the beginning of a function:

When the function is called, memory for the object is allocated, right along with the function's other local objects. When the function exits, the object's memory is deallocated.

defa nish'an

When the memory for an object is deallocated, the object is said to be **destroyed**.

If you want a little more control over when your object is destroyed, take advantage of C++'s **new** operator (introduced in Chapter 4).

First, define an object pointer, then call **new** to allocate the memory for your object. **new** returns a pointer to the newly created object. Here's some code that creates an **Employee** object:

```
Employee *employeePtr;
employeePtr = new Employee;
```

The first line of code defines a pointer designed to point to an **Employee** object. The second line uses **new** to create an **Employee** object. **new** returns a pointer to the newly created **Employee**.

Accessing an Object's Members

Once you've created an object, you can modify its data members and call its member functions. If you've defined the object directly, you'll refer to its data members using the • operator:

```
Employee employee1;
employee1.employeeSalary = 200.0;
```

If you're referencing the object through a pointer, use the -> operator:

```
Employee *employeePtr;
employeePtr = new Employee;
employeePtr->employeeSalary = 200.0;
```

To call a member function, use the same technique. If the object was defined directly, you'll use the • operator:

```
Employee employee1;
employee1.PrintEmployee();
```

If you're referencing the object through a pointer, you'll use the -> operator:

```
Employee *employeePtr;
employeePtr = new Employee;
employeePtr->PrintEmployee();
```

The Current Object

In the previous examples, each reference to a data member or member function started with an object or object pointer. Inside a member function, however, the object or object pointer isn't necessary to refer to the object for which the member function is executing.

For example, inside the **PrintEmployee()** function, you can refer to the data member **employeeSalary** directly, without referring to an object or object pointer:

```
if ( employeeSalary <= 200 )
  cout << "Give this person a raise!!!";</pre>
```

This code is kind of puzzling. What object does **employeeSalary** belong to? After all, you're used to saying:

```
myObject->employeeSalary
```

instead of just plain:

```
employeeSalary
```

The key to this puzzle lies in knowing which object spawned the call of **PrintEmployee()** in the first place. Although this may not be obvious, a call to a nonstatic member function *must* originate with a single object.



As you'll see later in the book, class members may be declared as static. A static data member holds a value that is global to a class and not specific to a single object of that class. A static member function is usually designed to work with a class's static data members.

Suppose you called **PrintEmployee()** from a non-**Employee** function (such as **main()**). You *must* precede this call with a reference to an object:

```
employeePtr->PrintEmployee();
```

Whenever a member function is called, C++ keeps track of the object used to call the function. This object is known as the **current object**.

In the call of **PrintEmployee()** above, the object pointed to by **employeePtr** is the current object. Whenever this call of **PrintEmployee()** refers to an **Employee** data member or function *without* using an object reference, the current object (in this case, the object pointed to by **employeePtr**) is assumed.

Suppose PrintEmployee() then called another Employee function. The object pointed to by employeePtr is still considered the current object. A reference to employeeSalary would still refer to the current object's copy of employeeSalary.

The point to remember is, a nonstatic member function always starts up with a single object in mind.

The "This" Object Pointer

C++ provides a generic object pointer, available inside any member function, that points to the current object. The generic pointer has the name "this". For example, inside every **Employee** function, the line:

```
this->employeeSalary = 400;
```

is equivalent to this line:

```
employeeSalary = 400;
```

this is useful when a member function wants to return a pointer to the current object, pass the address of the current object on to another function, or just store the address somewhere. This line of code:

```
return this;
```

returns the address of the current object.

Deleting an Object

When you create an object using **new**, you've got to take responsibility for destroying the object at the appropriate time. Just as a C programmer balances a call to **malloc()** with a call to **free()**, a C++ programmer balances each use of the **new** operator with an eventual use of the **delete** operator. Here's the syntax:

```
Employee *employeePtr;
employeePtr = new Employee;
delete employeePtr;
```

As you'd expect, **delete** destroys the specified object, freeing up any memory allocated for the object. Note that this freed up memory only includes memory for the actual object and does not include any extra memory you may have allocated.

For example, suppose the object is a structure and one of its data members is a pointer to another structure. When you **delete** the first structure, the second structure is not **delete**d.



If delete is used with a pointer having a value of 0, delete does nothing. If the pointer has any other value delete will try to destroy the specified object.

Writing Member Functions

Once your structure is declared, you're ready to write your member functions. Member functions behave in much the same way as ordinary functions, with a few small differences. One difference, pointed out earlier, is that a member function has access to the data members and member functions of the object used to call it.

Another difference lies in the function implementation's title line. Here's a sample:

```
void Employee::PrintEmployee()
{
  cout << "Employee Name: " << employeeName << "\n";
}</pre>
```

Notice that the function name is preceded by the class name and two colons. This notation is mandatory and tells the compiler that this function is a member of the specified class.

The Constructor Function

Typically, when you create an object, you'll want to perform some sort of initialization on the object. For instance, you might want to provide initial values for your object's data members. The **constructor function** is C++'s built-in initialization mechanism.

The constructor function (or just plain constructor) is a member function that has the same name as the object's class. For example, the constructor for the **Employee** class is named **Employee()**. When an object is created, the constructor for that class gets called.

Consider this code:

```
Employee *employeePtr;
employeePtr = new Employee;
```

In the second line, the **new** operator allocates a new **Employee** object, then immediately calls the object's constructor. Once the constructor returns, the address of the new object is assigned to **employeePtr**.

This same scenario holds true in this declaration:

```
Employee employee1;
```

As soon as the object is created, its constructor is called.

Here's our **Employee struct** declaration with the constructor declaration added in:

```
const short kMaxNameSize = 20;
struct Employee
{
11
        Data members...
              employeeName[ kMaxNameSize ];
    char
    long
              employeeID;
    float
              employeeSalary;
        Member functions...
              Employee();
    void
              PrintEmployee();
};
```

Notice that the constructor is declared without a return value. Constructors *never* return a value.

Here's a sample constructor:

```
Employee::Employee()
{
  employeeSalary = 200.0;
}
```

As mentioned earlier, the constructor is declared without a return value. This is proper form.



Constructors are optional. If you don't have any initialization to perform, don't define one.

Adding Parameters to Your Constructor

If you like, you can add parameters to your constructor. Constructor parameters are typically used to provide initial values for the object's data members. Here's a new version of the **Employee()** constructor:

The constructor copies the three parameter values into the corresponding data members.



Notice that strncpy() was used, ensuring that the copy will work, even if the source string was not properly terminated. A null terminator is provided at the end of the string for just such an emergency.

The object that was just created is always the constructor's current object. In other words, when the constructor refers to an **Employee** data member, such as **employeeName** or **employeeSalary**, it is referring to the copy of that data member in the newly created object.

This line of code supplies the **new** operator with a set of parameters to pass on to the constructor:

```
employeePtr = new Employee( "Dave Mark", 1000, 200.0 );
```

This line of code does the same thing without using new:

```
Employee employee1( "Dave Mark", 1000, 200.0 );
```

As you'd expect, this code creates an object named **employee1** by calling the **Employee** constructor, passing it the three specified parameters.

Just for completeness, here's the class declaration again, showing the new constructor:

```
struct Employee
11
        Data members...
    char
              employeeName[ kMaxNameSize ];
    long
              employeeID;
    float
              employeeSalary;
11
        Member functions...
              Employee( char *name, long id,
                         float salary );
    void
              PrintEmployee();
};
```

The Destructor Function

The destructor function is called for you, just as the constructor is. Unlike the constructor, however, the destructor is called when an object in its class is **deleted** or goes out of scope. Use the destructor to clean up after your object before it goes away. For instance, you might use the destructor to deallocate any additional memory your object may have allocated.

The destructor function is named by a tilde character (~) followed by the class name. The destructor for the **Employee** class is named ~**Employee()**. The destructor has *no* return value and *no* parameters.

Here's a sample destructor:

```
Employee::~Employee()
{
   cout << "Deleting employee #" << employeeID << "\n";
}</pre>
```



Technically, the name of the **Employee** constructor is **Employee::Employee()** and the name of its destructor is **Employee::~Employee()**. Just thought you'd like to know.

If you created your object using **new**, the destructor is called when you use **delete**:

```
Employee *employeePtr;
employeePtr = new Employee;
delete employeePtr;
```

If your object was defined directly, the destructor is called just before the object is destroyed. For example, if the object was declared at the beginning of a function, the destructor is called when the function exits.



If your object was declared as a global or static variable, its constructor will be called at the beginning of the program and its destructor will be called just before the program exits. Yes, global objects have scope, just as local objects do.

Here's an updated **Employee** class declaration showing the constructor and destructor:

```
class Employee
{
// Data members...
   char employeeName[ kMaxNameSize ];
   long employeeID;
   float employeeSalary;
```

Access Priveleges

When you declare a class, you need to decide which data members and functions you'd like to make available to the rest of your program. C++ gives you the power to hide a class's functions and data from all the other functions in your program, or allow access to a select few.

For example, consider the **Employee** class we've been working with throughout the chapter. In the current model, an **Employee**'s name is stored in a single array of **chars**. Suppose you wrote some code that created a new **Employee**, specifying the **name**, **id**, and **salary**, then later in your program you decided to modify the **Employee**'s **name**, perhaps adding a middle name provided while your program was running.

With the current design, you could access and modify the **Employee**'s **employeeName** data member from anywhere in your program. As time passes and your program becomes more complex, you might find yourself accessing **employeeName** from several places in your code.

Now imagine what happens when you decide to change the implementation of **employeeName**. For example, you might decide to break the single **employeeName** into three separate data members, one each for the first, middle, and last names. Imagine the hassle of having to pore through your code finding and modifying every single reference to **employeeName**, making sure you adhere to the brand new model.

C++ allows you to hide the **implementation** details of a class (the specific type of each data member, for example), funneling all access to the implementation through a specific set of **interface** routines. By hiding the implementation details, the rest of your program is forced to go through the interface routines your class provides. That way, when you change the implementation, all you have to do is make whatever changes are necessary to the class's interface, without having to modify the rest of your program.

The mechanism C++ provides to control access to your class's implementation is called the **access specifier**.

Access Specifiers

C++ allows you to assign an access specifier to any of a class's data members and member functions. The access specifier defines which of your program's functions have access to the specified data member or function. The access specifier must be **public**, **private**, or **protected**.

If a data member or function is marked as **private**, access to it is limited to member functions of the same class (or, as you'll see later in the chapter, to classes or member functions marked as a **friend** of the class).

On the flip side, the **public** specifier gives complete access to the member function or data member, limited only by scope.



The third C++ access code is protected. The protected access code offers the same protection as private, with one exception. A protected data member or function can also be accessed by a class **derived** from the current class. Since we won't get to derived classes till later in the book, we'll put off discussion of the protected access code till then.

By default, the data members and member functions of a class declared using the **struct** keyword are all **public**. By adding the **private** keyword to our class declaration, we can limit access to the **Employee** data members, forcing the outside world to go through the provided member functions:

```
struct Employee
{
// Data members...
private:
   char employeeName[ kMaxNameSize ];
```

Once the compiler encounters an access specifier, all data members and functions that follow are marked with that code, at least until another code is encountered. In this example, the three data members are marked as **private** and the three member functions are marked as **public**.



Note the : after the access specifier. Without it, your code won't compile!

The class Keyword

So far, all of our classes have been created using the **struct** keyword. You can also create classes, using the exact same syntax, substituting the keyword **class** for **struct**. The only difference is, the members of a **struct** are all **public** by default and the members of a **class** are all **private** by default.

Why use **class** instead of **struct**? If you start with a **struct**, you give the world complete access to your class members unless you intentionally limit access using the appropriate access specifiers. If you start with a **class**, access to your class members is limited right from the start. You have to intentionally allow access by using the appropriate access specifiers.

For the remainder of this book, we'll use the **class** keyword to declare our classes. Here's the new version of the **Employee** class:

```
class Employee
        Data members...
//
 private:
    char
              employeeName[ kMaxNameSize ];
    long
              employeeID;
    float
              employeeSalary;
        Member functions...
 public:
              Employee( char *name, long id,
                         float salary );
              ~Employee();
   void
              PrintEmployee();
};
```

Notice that the **private** access specifier is still in place. Since the members of a **class**-based class are **private** by default, the **private** access specifier is not needed here, but it does make the code a little easier to read. The **public** access specifier is necessary, however, to give the rest of the program access to the **Employee** member functions.

Bringing It All Together

With all that we've covered so far, we're about ready for our next sample program. **Employee.cpp** brings these concepts together.

An Object Programming Example

If THIN C++ is already running, close the current project by selecting **Close Project** from the **Project** menu. If THIN C++ isn't running, launch it by double-clicking on the **THIN Project** Manager inside the **Development** folder, inside the **THIN C++** folder. Either way, when prompted for a project file to open, go into the **THIN C++ Projects** folder, open the subfolder named **Chap 05.01 - employee**, and open the project file named **employee**. Next, run **employee**. by selecting **Run** from the **Project** menu. Here's what you'll see:

```
Creating employee #1
Creating employee #2
----
Name: Dave Mark
ID: 1
Salary: 200
----
Name: Steve Baker
ID: 2
Salary: 300
----
Destroying employee #2
Destroying employee #1
```

Hit a return to exit **employee**. Let's take a look at the source code.

The employee Source Code

As you look through **employee.cp**, you should see some familiar sights. This program takes the **Employee** class described throughout this chapter through its paces.

In addition to the standard include file **<iostream.h>**, you'll notice the additional include file **<string.h>**, which is needed for the call to **strncpy()** later in the program:

```
#include <iostream.h>
#include <string.h>
```

The **const kMaxNameSize** and the **Employee** class declaration are identical to those presented earlier in the chapter. Notice that the data members are all marked as **private** (unnecessary, but it does make the code easier to read) while the member functions are marked as **public**.

```
const short kMaxNameSize = 20;
class Employee
{
// Data members...
private:
```

The **Employee** class has three member functions: a constructor, a destructor, and a utility routine named **PrintEmployee()**. The constructor, **Employee()**, uses its three parameters to initialize each of the **Employee** data members.

```
Employee::Employee( char *name, long id, float salary )
{
```

To avoid a possible nonterminated string in the name parameter, we'll use strncpy() to copy all the bytes from name into employeeName. strncpy() copieskNameSize characters from name to employeeName. If the name string is less than kNameSize characters long, strncpy() will also copy over the null terminator.

```
strncpy( employeeName, name, kMaxNameSize );
```

If name is not null-terminated or is kMaxNameSize bytes long or longer, we'll stick a null terminator at the very end of employeeName to ensure that one exists.

```
employeeName[ kMaxNameSize - 1 ] = '\0';
```

Finally, we'll copy the remaining two parameters into their respective data members.

```
employeeID = id;
employeeSalary = salary;
```

Once the data members are initialized, the constructor sends a message to the console, telling us which **Employee** object was just created.

```
cout << "Creating employee #" << employeeID << "\n";
}</pre>
```

Since no extra memory was allocated, there's not a whole lot for the destructor to do. Just like the constructor, the destructor sends a message to the console, telling us which **Employee** object was just deleted.

```
Employee::~Employee()
{
  cout << "Deleting employee #" << employeeID << "\n";
}</pre>
```

PrintEmployee() displays the contents of the three data members of the current object:

```
void Employee::PrintEmployee()
{
  cout << "----\n";
  cout << "Name: " << employeeName << "\n";
  cout << "ID: " << employeeID << "\n";
  cout << "Salary: " << employeeSalary << "\n";
  cout << "----\n";
}</pre>
```

main() is the control center, where all the action is. First, we
define an Employee object, passing three parameters to the
constructor:

```
int main()
{
   Employee employee1( "Dave Mark", 1, 200.0 );
```

As the **Employee** constructor is called, it displays the following line on the console:

```
Creating employee #1
```

Next, an **Employee** object pointer is defined:

```
Employee *employee2;
```

This time, **new** is used to create a second **Employee** object:

```
employee2 = new Employee( "Steve Baker", 2, 300.0 );
```

Once again, the **Employee** constructor is called, sending another line to the console:

```
Creating employee #2
```

Now, both objects are used to call the **PrintEmployee()** member function. **employee1** is an object and uses the . operator to access its member function. Since **employee2** is a pointer and uses the -> operator to access the **PrintEmployee()** function:

```
employee1.PrintEmployee();
employee2->PrintEmployee();
```

These two calls result in the following output:

```
Name: Dave Mark

ID: 1

Salary: 200

---

Name: Steve Baker

ID: 2

Salary: 300

---

Next, the object pointed to by employee2 is deleted:

delete employee2;

return 0;

}
```

This causes **employee2**'s destructor to be called, resulting in this line of output:

Destroying employee #2

Finally, main() exits and all of main()'s local variables (including employee1) are deallocated. As soon as employee1 was deallocated, its destructor was called, resulting in a final line of output being sent to the console:

Destroying employee #1

Notice that **employee1**'s destructor wasn't called till **main()** had exited.



Before you move on to the next section, take another look at your program's output. If you like, go run the program again. Notice that every single line of output was produced by an object's member function. Although you did call PrintEmployee() directly, the constructor and destructor functions were called for you when you created and deleted an object.

Consider the line of code used to delete an **Employee** object:

delete employee1;

This line of code does not contain a function call. It does not contain code that prints information to the console. Even so, a function call was made (the destructor function, called for you). A line of output was sent to the console.

The point here is that there's action going on behind the scenes. Stuff happens automatically. You delete an object, the destructor gets called for you. This might seem like a minor point, but this is your first peek at the power of object programming.

Friends

In our last program, the **Employee** class marked its data members as **private** and its member functions as **public**. As we discussed earlier, the idea behind this strategy is to hide the implementation details of a class from the rest of the program, funneling all access to the class's data members through a set of interface routines.

For example, suppose we wanted to provide access to the Employee class's employeeSalary data member. Since employeeSalary is marked as private, there's no way to access this data member outside the Employee class. If we wanted to, we could provide a pair of public member functions a user of the Employee class could use to retrieve (GetEmployeeSalary()) and modify (ChangeEmployeeSalary()) the value of employeeSalary.

Sometimes this strategy just doesn't cut it. For example, suppose you created a Payroll class to generate paychecks for your Employees. Clearly, the Payroll class is going to need access to an Employee's salary. But if you create a public GetEmployeeSalary() member function (or mark employeeSalary as public) you'll make employeeSalary available to the entire program, something you might not want to do.

The solution to this problem is provided by C++'s **friend** mechanism. C++ allows you to designate a class or a single member function as a **friend** to a specific class. In the previous example, we could designate the **Payroll** class as a **friend** to the **Employee** class:

```
class Employee
{
   friend class Payroll;

// Data members...
   private:
      char employeeName[ kMaxNameSize ];
   long employeeID;
   float employeeSalary;

// Member functions...
```

The friend statement (see the first line of the Employee class declaration) is always placed in the class whose data members and functions are being shared. In this case, the Employee class is willing to share its private data members and functions with its new friend, the Payroll class. Once the Payroll class has friend access to the Employee class, it can access private data members and functions like employeeSalary.

Three Types of Friends

There are three ways to designate a **friend**. As we've already seen, you can designate an entire class as a **friend** to a second class. You can also designate a specific class function as a **friend** to a class. For example, the **Payroll** class we just declared contains a function named **PrintCheck()**. We might want to designate the **PrintCheck()** function as a **friend** of the **Employee** class, rather than the entire **Payroll** class.

```
class Employee
{
  friend void Payroll::PrintCheck( Employee *payee );;
```

This time, the **friend** definition specified the **Payrol1** member function **Payrol1::PrintCheck()** instead of the entire **Payrol1** class. Since the **friend** statement referred to a member function of another class, the full name of the function (including the class name and the two colons) was included.

You can also designate a nonmember function as a **friend**. For example, you could designate **main()** as a **friend** to the **Employee** class:

This arrangement gives main() access to all Employee data members and functions, even those marked as private. Just because main() is a friend doesn't give any special priveleges to any other functions, however. Choose your friends carefully!

A Friendly Example

Our next example combines the Employee class created earlier with the Payroll class described in this section. Close the current project by selecting **Close Project** from the **Project** menu. When prompted for a project file to open, go up to the THIN C++ Projects folder, open the subfolder named Chap 05.02 - friends, and open the project file named friends. Next, run friends. by selecting **Run** from the **Project** menu. Here's what you'll see:

```
Creating payroll object
Creating employee #1000
----
Name: Carlos Derr
ID: 1000
Salary: 500
----
Pay $500 to the order of Carlos Derr...
Destroying employee #1000
Destroying payroll object
```

const short kMaxNameSize = 20;

Hit a return to exit **friends**. Let's take a look at the source code.

```
The friends Source Code

friends.cp starts out just like employee.cp, with the same
two #includes and the same const definition:

#include <iostream.h>
#include <string.h>
```

Since the **Payroll** class declaration refers to the **Employee**

class (check out the parameter to **PrintCheck()**) and its declaration comes first, we'll need a forward declaration of the **Employee** class:

To keep this example as simple as possible, we've stripped Payroll down to its bones: no data members, a constructor, a destructor, and a PrintCheck() function. Further down in the source, the Employee class will mark the PrintCheck() function as a friend.

Next comes the **Employee** class declaration. You may have noticed that we didn't list the **Payroll** member functions right after the **Payroll** class declaration. This was because **Payroll::PrintCheck()** refers to the **Employee** data member **employeeSalary**, which hasn't been declared yet.

```
//----- Employee

class Employee
{
  friend void Payroll::PrintCheck( Employee *payee );

// Data members...
  private:
    char employeeName[ kMaxNameSize ];
```

Take a look at the **friend** declaration inside the **Employee** class declaration. Notice that we've opted to make **Payroll::PrintCheck()** a **friend** of the **Employee** class. Now, **PrintCheck()** is the only **Payroll** function with access to the **private Employee** data members.



Interestingly, if you leave PrintCheck()'s parameter out of the friend statement, the code won't compile. Since you can have more than one function with the same name (Remember overloaded functions from Chapter 4?), if the parameter is left out, the compiler tries to match the friend statement with a version of PrintCheck() with no parameters. When it doesn't find one, the compiler reports an error.

Next come the Payroll member functions. The constructor and destructor print messages letting you know they were called, while PrintCheck() prints up a simulated check using the private Employee data members employeeSalary and employeeName.

```
//----- Payroll Member Functions
Payroll::Payroll()
{
  cout << "Creating payroll object\n";
}
Payroll::~Payroll()</pre>
```

```
cout << "Destroying payroll object\n";</pre>
void Payroll::PrintCheck( Employee *payee )
  cout << "Pay $" << payee->employeeSalary
       << " to the order of "
       << payee->employeeName << "...\n\n";</pre>
}
   The Employee member functions are the same as they were
in Employee.cp.
//---- Employee Member Functions
Employee::Employee( char *name, long id,
                     float salary )
{
  strncpy( employeeName, name, kMaxNameSize );
  employeeName[ kMaxNameSize - 1 ] = '\0';
  employeeID = id;
  employeeSalary = salary;
  cout << "Creating employee #" << employeeID << "\n";</pre>
}
Employee::~Employee()
  cout << "Destroying employee #" << employeeID << "\n";</pre>
void Employee::PrintEmployee()
  cout << "---\n";
  cout << "Name: " << employeeName << "\n";
cout << "ID: " << employeeID << "\n";</pre>
  cout << "Salary: " << employeeSalary << "\n";</pre>
  cout << "---\n";
}
```

Once again, main() is where the action is. We start off by defining a couple of pointers, one to an **Employee** object and one to a **Payroll** object.

```
//---- main
int main()
  Employee *employee1Ptr;
 Payroll *payroll1Ptr;
   Next, we use new to create a new Payroll object and a new
Employee object.
 payroll1Ptr = new Payroll;
  employee1Ptr = new Employee( "Carlos Derr", 1000,
                                500.0);
   The two constructors are called, generating these two lines of
output:
Creating payroll object
Creating employee #1000
   Next, PrintEmployee() is called.
  employee1Ptr->PrintEmployee();
The PrintEmployee() call generates these five lines of output:
Name:
       Carlos Derr
       1000
ID:
Salary: 500
   Next, PrintCheck() is called. PrintCheck() takes a pointer
```

payroll1Ptr->PrintCheck(employee1Ptr);

to the **Employee** object as a parameter.

A check is printed to the specified **Employee** using **employeeName** and **employeeSalary**:

```
Pay $500 to the order of Carlos Derr...

Next, both objects are deleted:

delete employee1Ptr;
delete payroll1Ptr;

return 0;
}

The two destructors print their respective messages:

Destroying employee #1000

Destroying payroll object
```

Summary

So far, you've gotten a taste of object programming. You've learned how to create a class and how to define objects of that class, either directly or by using **new**. You've learned about constructors and destructors and you've seen how these routines are called when an object is created or destroyed.

You've learned the difference between **private** and **public** data members and functions. You've also learned how to establish a **friend** relationship between a class and another class or function.

Perhaps most important of all, you've started down a new programming path. You are now well on your way to becoming an object programmer. Our next chapter, Chapter 6, will take you further down that path, exploring some of the fundamental techniques you'll want to develop as your C++ programs become more and more sophisticated.

Chapter 6

Derived Classes

C++ allows you to create classes that are based on other classes. These derived classes retain access to all the data members and member functions of their base class. This feature, known as inheritance, plays a critical role in object programming.

This Chapter at a Glance

Inheritance

Access and Inheritance

A Class Derivation Example

Derivation, Constructors, and Destructors

The Derivation Chain

A Derivation Chain Example

Some Food for Thought

Base Classes and Constructors with Parameters

Another Classy Example

Overriding Member Functions

Creating a Virtual Function

A Virtual Function Example

Summary

C++ ALLOWS YOU TO USE ONE CLASS DECLARATION, KNOWN as a **base class**, as the basis for the declaration of a second class, known as a **derived class**. For example, you might declare an **Employee** class that describes your company's employees. Next, you might declare a **Sales** class, based on the **Employee** class, that describes employees in the sales department.

This chapter is filled with examples that emphasize the advantages of classes derived from other classes. As you read through the chapter, focus on the syntax and techniques demonstrated by each example. The mechanics and philosophy presented here form the body and soul of that part of object programming known as **class derivation**.

Inheritance

One of the most important features of class derivation is **inheritance**. Just like the cherished heirlooms you hope to inherit from your granduncle Morty, a derived class inherits all of the data members and member functions from its base class.


As an example, consider the following class declaration:

```
class Base
{
  public:
    short baseMember;

  void SetBaseMember( short baseValue );
};
```

This class, Base, has two members, a data member named baseMember and a member function named SetBaseMember(). Both of these members will be inherited by any classes derived from this class. Figure 6.1 shows how an object of the Base class might look from a graphic perspective.

FIGURE 6.1 An object of the Base class.



Here's another class declaration:


```
class Derived : Base
{
   public:
     short derivedMember;

   void SetDerivedMember( short derivedValue );
}
```

This class is a derived class named, appropriately enough, **Derived**. The ": Base" at the end of the title tells you that this

class is derived from the class named **Base**. Figure 6.2 shows what a **Derived** object might look like from a graphic perspective. As you'd expect, this object has its own copy of the data member **derivedMember** as well as access to the member function **SetDerivedMember()**.

FIGURE 6.2 An object of the **Derived** class.

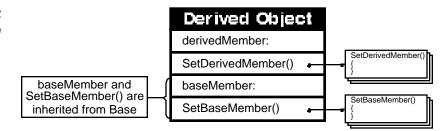

What you might not have expected are the members *inherited* by this object, that is, the **Base** class data member **baseMember** as well the **Base** class member function **SetBaseMember()**.

Here's some code that allocates a **Derived** object, then accesses various data members and functions:

```
Derived *derivedPtr;
derivedPtr = new Derived;
derivedPtr->SetDerivedMember( 20 );
cout << "derivedMember = " << derivedPtr->derivedMember;
derivedPtr->SetBaseMember( 20 );
cout << "\nbaseMember = " << derivedPtr->baseMember;
```

Notice that the object pointer **derivedPtr** is used to access its own data members and functions as well as its inherited data members and functions. Notice also that the example does not create a **Base** object. This is important. When an object inherits data members and functions from its base class, the compiler allocates the extra memory needed for all inherited members right along with memory for the object's own members.

Access and Inheritance

Although a derived class inherits all of the data members and member functions from its base class, it doesn't necessarily retain access to each member.

Here's how this works. When you declare a derived class, you declare its base class as either **public** or **private**. One way to do this is to include either **public** or **private** in the title line of the declared class.

For example, in this declaration, the class **Base** is marked as **public**:

```
class Derived : public Base
{
  public:
    short derivedMember;

    void SetDerivedMember( short derivedValue );
}

In this declaration, Base is marked as private:

class Derived : private Base
{
  public:
    short derivedMember;

    void SetDerivedMember( short derivedValue );
}
```



You can also mark a base class as public or private by leaving off the access specifier. If you use the class keyword to declare the derived class, the base class defaults to private. If you use the struct keyword to declare the derived class, the base class defaults to public.

Once you know whether the base class is **public** or **private**, you can determine the access of each of its inherited members by following these three rules:

- 1. The derived class does not have access to **private** members inherited from the base class. This is true regardless of whether the base class is **public** or **private**.
- 2. If the base class is **public**, the members inherited from the base class retain their access level (providing the inherited member is not **private**, of course). This means that an inherited **public** member remains **public** and an inherited **protected** member remains **protected**.
- 3. If the base class is **private**, the members inherited from the base class are marked as **private** in the derived class.



If these rules seem a bit confusing, don't worry. As you go through each of the chapter's sample programs, things should become clearer. For the moment, just mark this page so you can refer back to it later.

In Chapter 5, we adopted the strategy of declaring our data members as **private** and our member functions as **public**. This approach works well if the class will never be used as a base class for later derivation. If you ever plan on using a class as the basis for other classes, declare your data members as **protected** and your member functions as **public**.

A **protected** member can be accessed only by members of its class or by members of any classes derived from its class. In a base class, **protected** is just like **private**. The advantage of **protected** is that it allows a derived class to access the member, while protecting it from the outside world. We'll get back to this strategy in a bit. For now, let's take a look at an example of class derivation.

A Class Derivation Example

So far in this chapter, you've learned how to derive one class from another and you've been introduced to the **protected** access specifier. Our first sample program brings these lessons to life.

If THIN C++ is already running, close the current project by selecting **Close Project** from the **Project** menu. If THIN C++ isn't running, launch it by double-clicking on the **THIN Project** Manager inside the **Development** folder, inside the **THIN C++ folder**. Either way, when prompted for a project file to open, go into the **THIN C++ Projects** folder, open the subfolder named **Chap 06.01 - derived**, and open the project file named **derived**. Next, run **derived**. by selecting **Run** from the **Project** menu. Here's what you'll see:

```
baseMember was set to 10 derivedMember was set to 20
```

Hit a return to exit **derived**. Let's take a look at the source code.

The derived Source Code
As usual, derived.cp starts by including <iostream.h>:

```
#include <iostream.h>
```

Next, we declare a class named **Base**, which we'll use later as the basis for a second class named **Derived**:

```
//----- Base class Base {
```

Base has a single data member, a short named baseMember, which is marked as private.

```
// Data members...
private:
    short baseMember;
```

Base also includes two member functions, each marked as protected. SetBaseMember() sets baseMember to the specified value while GetBaseMember() returns the current value of baseMember.

```
// Member functions...
protected:
   void SetBaseMember( short baseValue );
   short GetBaseMember();
};

void Base::SetBaseMember( short baseValue )
{
   baseMember = baseValue;
}

short Base::GetBaseMember()
{
   return baseMember;
}
```

Since baseMember is private, it cannot be accessed by any function outside the Base class. Since SetBaseMember() and GetBaseMember() are protected, they can only be accessed by Base member functions and from within any classes derived from Base. Note that main() cannot access either of these functions.

Our second class, **Derived**, is derived from **Base**:

```
//----Base:Derived

class Derived: public Base
{
```

The **public** keyword following the colon in the class title line marks **Base** as a **public** base class.

As mentioned earlier, if a base class is declared as **public**, all inherited **public** members remain **public** and inherited **protected** members remain **protected**. Inherited **private** members are not accessible by the derived class.



If you marked Base as private instead of public all inherited members would be marked as private and would not be accessible by any classes derived from

Derived. The point here is this: If you mark the base class as **private** you effectively end the inheritance chain.

As a general rule, you should declare your derived classes using **public** inheritance:

```
class Derived : public Base
```

It's rare that you'd want to reduce the amount of information inherited by a derived class. Most of the time, a derived class is created to *extend* the reach of the base class by adding new data members and functions. As you go through the examples in this and later chapters, the idea of derived classes as extenders will appear again and again.

Derived has a single data member, a **short** named **derivedMember**, which is declared as **private**:

```
// Data members...
private:
    short derivedMember;
```

derivedMember can only be accessed by a **Derived** member function. That's it. **Derived** contains two member functions, **SetMembers()** and **PrintDataMembers()**.

SetMembers() takes two **shorts**, assigns the first to **derivedMember**, and passes the second to **SetBaseMember()**. **SetBaseMember()** was used because **Derived** does not have direct access to **baseMember**.

```
{
  derivedMember = derivedValue;
  SetBaseMember( baseValue );
}
```

PrintDataMembers() prints the values of **baseMember** and **derivedMember**. Since **Derived** doesn't have direct access to **baseMember**, **GetBaseMember()** is called to retrieve the value.

main() starts by declaring a Derived pointer and then using
new to create a new Derived object (since we didn't include a
constructor for either of our classes, nothing exciting has happened yet):

```
//----- main()
int main()
{
  Derived *derivedPtr;
  derivedPtr = new Derived;
```

It's important to understand that when the **Derived** object is created, it receives its own copy of **baseMember**, even though it doesn't have access to **baseMember**. If the **Derived** object wants to modify its copy of **baseMember**, it will have to do so via a call to **Base::SetBaseMember()**, which it also inherited.

Now things start to get interesting. main() uses the pointer to the Derived object to call SetMembers(), setting its copy of baseMember to 10 and derivedMember to 20.

```
derivedPtr->SetMembers( 10, 20 );
```

Next, we call the Derived member function PrintDataMembers():

```
derivedPtr->PrintDataMembers();
return 0;
}
```

As you saw when you ran the program, the values of the two data members are successfully set:

```
baseMember was set to 10 derivedMember was set to 20
```

Just as the **Derived** object pointer is able to take advantage of inheritance to call **SetBaseMember()**, **PrintDataMembers()** is able to print the value of the inherited data member **baseMember** by calling **GetBaseMember()**.

For the moment, don't worry too much about the advantages of inheritance. Instead, concentrate on the mechanics and syntax of inheritance. Once you master the *how*, the *why* will come naturally.

Derivation, Constructors, and Destructors


When an object is created, its constructor is called to initialize the object's data members. When the object is deleted, its destructor is called to perform any necessary cleanup.

Suppose the object belongs to a derived class, and suppose it inherits a few data members from its base class. How do these inherited data members get initialized? When the object is deleted, who does the cleanup for the inherited data members?

As it turns out, C++ solves this tricky issue for you. Before the compiler calls an object's constructor, it first checks to see whether the object belongs to a derived class. If so, the constructor belonging to the base class is called and then the object's own constructor is called. The base class constructor initializes the object's inherited members, while the object's own constructor initializes the members belonging to the object's class (Figure 6.3).

The *reverse* holds true for the destructor. When an object of a derived class is deleted, the derived class's destructor is called and then the base class's destructor is called.

FIGURE 6.3
The base class
constructor is called
before the derived
class constructor.

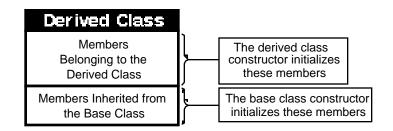


The Derivation Chain

There will frequently be times when you derive a class from a base class that is, itself, derived from some other class. Each of these classes acts like a link in a **derivation chain**. The constructor/destructor calling sequence just described still holds, no matter how long the derivation chain.

Suppose you declare three classes, A, B, and C, where class B is derived from A and C is derived from B. Take a look at Figure 6.4.

FIGURE 6.4
Three classes in a single derivation chain where class B is derived from A and C is derived from B.

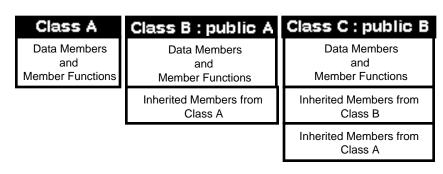

When you create an object of class B, it will inherit the members from class A. When you create an object of class C, it will inherit the members from class B, which includes the previously inherited members from class A.

When an object from class C is created, the compiler follows the derivation chain from C to B to A and discovers that A is the ultimate base class in this chain. The compiler calls the class A constructor, then the class B constructor, and finally the class C constructor. When the object is deleted, the class C destructor is called first, followed by the class B destructor and, finally, by the class A destructor.

A Derivation Chain Example

Our second sample program demonstrates the order of constructor and destructor calls in a three-class derivation chain. Close the current project by selecting **Close Project** from the **Project** menu. When prompted for a project file to open, go up to the **THIN C++ Projects** folder, open the subfolder named **Chap 06.02 - gramps**, and open the project file named **gramps**. Next, run **gramps**. by selecting **Run** from the **Project** menu. Here's what you'll see:

```
Gramps' constructor was called!

Pops' constructor was called!

Junior's constructor was called!

----

Junior's destructor was called!

Pops' destructor was called!

Gramps' destructor was called!
```

Hit a return to exit **gramps**. As you can see by the output, each class constructor was called once, then each class destructor was called once in reverse order. Let's take a look at the source code.

Notice that none of the classes in this program have any data members. For the moment, we're interested only in the order of constructor and destructor calls.

Both the constructor and the destructor are declared **public**:

```
// Member functions...
public:
    Gramps();
    ~Gramps();
};
```

The **Gramps** constructor and destructor are pretty simple; each prints an appropriate message to the console:

Notice that we use the **public** keyword in the class title line. This ensures that the constructor and the destructor inherited from **Gramps** are marked as **public** inside the **Pops** class.

Once again, this class has no data members. Both the constructor and the destructor are marked as **public**. They'll be inherited by any class derived from **Pops**:

```
// Member functions...
public:
    Pops();
```

```
~Pops();
};
```

Just like those of **Gramps**, the **Pops** constructor and destructor are simple and to the point; each sends an appropriate message to the console:

```
Pops::Pops()
{
   cout << "Pops' constructor was called!\n";
}
Pops::~Pops()
{
   cout << "Pops' destructor was called!\n";
}</pre>
```

Junior is to Pops what Pops is to Gramps. Junior inherits not only the Pops members but the Gramps members as well (as you'll see in a minute, when you create and then delete a Junior object, both the Gramps and the Pops constructor and destructor will be called):

```
//----- Junior:Pops
class Junior : public Pops
{
// Data members...

// Member functions...
 public:
    Junior();
    ~Junior();
};
```

The **Junior** constructor and destructor are just like those of **Gramps** and **Pops**; each sends an appropriate message to the console:

```
Junior::Junior()
{
   cout << "Junior's constructor was called!\n";
}</pre>
```

```
Junior::~Junior()
{
    cout << "Junior's destructor was called!\n";
}
    main()'s job is to create and delete a single Junior object.
Watch what happens:
//----- main()
int main()
{
    Junior *juniorPtr;</pre>
```

When the **Junior** object is created, the derivation chain is followed backward until the ultimate base class, **Gramps**, is reached:

```
juniorPtr = new Junior;
```

The **Gramps** constructor is called, giving the **Gramps** class a chance to initialize its data members. Next, the **Pops** constructor is called, and, finally, the **Junior** constructor is called:

```
Gramps' constructor was called!

Pops' constructor was called!

Junior's constructor was called!
```

Then, a dividing line is printed, just for looks:

```
cout << "---\n";
```

Next, the **Junior** object is deleted, and, this time, the derivation chain is followed in the reverse order. The **Junior** destructor is called, then the **Pops** destructor, and, finally, the **Gramps** destructor:

```
delete juniorPtr;
  return 0;
}
```

Here's the output produced by these destructor calls:

Junior's destructor was called! Pops' destructor was called! Gramps' destructor was called!

Some Food for Thought

Before we move on to our next program, take a minute to look back over the **gramps** source code. Notice that each of the three classes marked their constructor and destructor as **public**. What would happen if you changed the **Gramps** constructor to **private**? Go try it. I'll wait.

Your code didn't compile because **Junior** no longer has access to the **Gramps** constructor. Now go change the **Gramps** constructor from **private** to **protected** and compile your program.

This time your program compiled. Why? This time, when Junior inherited the Gramps constructor it had access to the Gramps constructor. Remember, when a derived class inherits a protected member from a public base class, the inherited member is marked as protected.

Now go and change the **Junior** constructor from **public** to **protected** and recompile. What happened?

This time the compiler complained that the Junior constructor was not accessible. Since the Junior constructor was declared protected it is accessible by classes derived from Junior, but not by outside functions like main(). When main() creates a new Junior object, it must have access to the Junior constructor.

On the other hand, you've seen that main() does *not* need access to the **Gramps** or **Pops** constructors to create a **Junior** object. When you changed the **Gramps** constructor to **protected**, **Junior** had access to the **Gramps** constructor and **main()** didn't yet the program still compiled.

Think about these issues. Go back to the previous program, **derived**, and make similar changes to it. Get to know the rules for inheritance and access.

Base Classes and Constructors with Parameters Our first program in this chapter, **derived**, declared two classes, **Base** and **Derived**. Neither of these classes included a constructor. Our second program, **gramps**, featured three classes. Though all three classes declared a constructor, none of the constructors declared any parameters.

Our next example enters uncharted waters by declaring classes whose constructors contain parameters. What's the big deal about constructor parameters? In a world without class derivation, not much. When you add derived classes into the picture, however, things get a bit more complex. Here's why.

Imagine a base class whose constructor sports a single parameter:

```
class Base
{
   public:
      Base( short baseParam );
};

   Now, add a derived class based on this base class:
class Derived : public Base
{
   public:
      Derived();
};
```

Notice that the derived class constructor is declared without a parameter. When a **Derived** object is created, the **Base** constructor is called. What parameter is passed to this constructor?

The secret lies in the definition of the derived class constructor. When a base class constructor has parameters, you have to provide some extra information in the derived class constructor's title line. This information tells the compiler how to map data from the derived class constructor to the base class constructor's parameter list.

For example, we might define the derived class constructor this way:

```
Derived::Derived() : Base( 20 )
{
```

```
cout << "Inside the Derived constructor";
}</pre>
```

Notice the ": Base(20)" at the end of the title line. This code tells the compiler to pass the number 20 as a parameter when the Base constructor is called.

This technique is really useful when your derived class constructor also has parameters. Check out the following piece of code:

```
Derived::Derived( short derivedParam ) : Base(
  derivedParam )
{
}
```

This constructor takes a single parameter, **derivedParam**, and maps it to the single parameter in its base class constructor. When a **Derived** object is created, as follows,

```
Derived *derivedPtr;
derivedPtr = new Derived( 20 );
```

the parameter is passed to the **Base** constructor. Once the **Base** constructor returns, the same parameter is passed to the **Derived** constructor.



In the preceding example, the **Derived** constructor does nothing but pass along a parameter to the **Base** constructor. Though it may take some getting used to, this technique is quite legitimate. It is perfectly fine to define an empty function whose sole purpose is to map a parameter to a base class constructor.

Another Classy Example

Our next example combines the class derivation techniques from our first two programs with the constructor parameter-mapping mechanism described in the previous section. Close the current When prompted for a project file to open, go into the THIN C++ Projects folder, open the subfolder named Chap 06.03 - square, and open the project file named square. Next, run square. by selecting Run from the Project menu. Here's what you'll see:

```
Area is: 100
Area is: 150
```

Hit a return to exit **square**. Let's take a look at the source code.

```
The square Source Code square.cp starts in the usual way, by including <iostream.h>:
```

```
#include <iostream.h>
```

Next, the first of two classes is declared. **Rectangle** will act as a base class:

```
//---- Rectangle class Rectangle {
```

The data members of our base class are declared as **protected**; the member functions, **public**. **height** and **width** hold the height and width of a **Rectangle** object:

```
// Data members...
protected:
    short height;
    short width;
```

The Rectangle() constructor takes two parameters, heightParam and widthParam, that are used to initialize the Rectangle data members. The member function DisplayArea() displays the area of the current object:

```
// Member functions...
public:
```

```
Rectangle( short heightParam, short
             widthParam );
    void DisplayArea();
};
   Rectangle() uses its two parameters to initialize the
Rectangle data members:
Rectangle::Rectangle( short heightParam, short
  widthParam )
  height = heightParam;
  width = widthParam;
void Rectangle::DisplayArea()
  cout << "Area is: " <<
    height * width << '\n';
}
   The Square class is derived from the Rectangle class. Just
as a square is a specialized form of rectangle (a rectangle whose
sides are all equal), a Square object is a specialized Rectangle
object. The Square class has no data members, just a single
member function, the Square() constructor:
```

The **Square()** constructor has one purpose in life. It maps the single **Square()** parameter to the two parameters required by the **Rectangle()** constructor. A square whose side has a length of **side** is equivalent to a rectangle with a height of **side** and a width of **side**:

The **Square** pointer is used to create a new **Square** object with a side of 10:

```
mySquare = new Square( 10 );
```

As specified by the Square() constructor's title line, the compiler calls Rectangle(), passing 10 as both heightParam and widthParam. The Rectangle() constructor initializes the Square object's inherited data members height and width to 10, just as if you'd created a Rectangle with a height of 10 and a width of 10.

Next, the **Square** object's inherited member function, **DisplayArea()**, is called:

```
mySquare->DisplayArea();
```

DisplayArea() uses the inherited data members height and width to calculate the area of the Square:

```
Area is: 100
```



As far as DisplayArea() is concerned, the object whose area it just calculated was a Rectangle. It had no idea it was working with data members *inherited* from a Rectangle. That's part of the power of object programming.

Finally, the **Rectangle** pointer is used to create a new **Rectangle** object with a height of 10 and a width of 15:

```
myRectangle = new Rectangle( 10, 15 );
myRectangle->DisplayArea();
return 0;
}
```

When we call **DisplayArea()**, it displays the appropriate area:

Area is: 150

An Important Lesson

This program demonstrates a very important point. With just a few lines of code, we can add a new dimension to an existing class without modifying the existing class.

The **Square** class takes advantage of what's already in place, building on the data members and member functions of its base class. Essentially, **Square** added a shortcut to the **Rectangle** class, a quicker way to create a **Rectangle** when the height and width are the same.

This may not seem like a significant gain to you, but there's an important lesson behind this example. C++ makes it easy to build upon existing models, to add functionality to your software by deriving from existing classes.

As you gain experience in object programming, you'll build up a library of classes that you'll use again and again. Sometimes, you'll use the classes "as is." At other times, you'll extend an existing class by deriving a new class from it. By deriving new classes from existing classes, you get the best of both worlds. Code that depends on the base classes will continue to work quite

well without modification. Code that takes advantage of the new, derived classes will work just as well, allowing these classes to live in harmony with their base classes.

In my mind, this is what object programming is all about.

Overriding Member Functions

In the preceding example, the derived class, **Square**, inherited the member function, **DisplayArea()**, from its base class, **Rectangle**. Sometimes, it's useful to override a member function from the base class with a more appropriate function in the derived class. For example, you could have provided **Square** with its own version of **DisplayArea()** that based its area calculation on the fact that the height and width of a square are equal.

Here's another example. Suppose you create a base class named **Shape** and a series of derived classes such as **Rectangle**, **Circle**, and **Triangle**. You can create a **DisplayArea()** function for the **Shape** class, then override **DisplayArea()** in each of the derived classes.

Suppose you want to create a linked list of **Shapes**. To simplify matters for the software that manages the linked list, you can treat the derived objects as **Shapes**, no matter what their actual type. Then, when you call the **Shape's DisplayArea()** function, their true identity will emerge. A **Triangle** will override the **Shape DisplayArea()** function with a **Triangle DisplayArea()** function. The **Rectangle** and **Circle** will have their own versions as well. The trick is to get C++ to call the proper overriding function, if one exists.

Creating a Virtual Function

The linked list example just presented has a slight problem. Suppose the linked list contains a pointer to a **Shape** which is actually one of **Rectangle**, **Triangle**, or **Circle**. Now suppose that **Shape** pointer is used to call the member function **DisplayArea()**:

```
myShapePtr->DisplayArea();
```

As it is now, this code will call the function Shape::DisplayArea() even if the Shape pointed to by myShapePtr is a Rectangle, Triangle, or Circle.

The solution to this problem? Declare **Shape::DisplayArea()** as a **virtual** function. By declaring a base member function that we intend to override using the **virtual** keyword, we are asking the compiler to call the overriding function instead of the base function, even if the object used to call the function belongs to the base class.

A Virtual Function Example

Our final program in this chapter provides a simple example of virtual function overriding by using a base class named **Shape** and two derived classes, **Rectangle** and **Triangle**. Close the current project by selecting **Close Project** from the **Project** menu. When prompted for a project file to open, go into the **THIN C++ Projects** folder, open the subfolder named **Chap 06.04 - whatAmI**, and open the project file named **whatAmI**. Next, run **whatAmI**. by selecting **Run** from the **Project** menu. Here's what you'll see:

```
I'm a rectangle!
I'm a triangle!
I don't know what kind of shape I am!
```

Hit a return to exit **whatAmI**. Let's take a look at the source code.

The whatAmI Source Code whatAmI.cp starts in the usual way, by including <iostream.h>:

#include <iostream.h>

Next, the base class **Shape** is declared. **Shape** contains a single member function, **WhatAmI()**. When it is called, **WhatAmI()** tells you what kind of shape it belongs to. Notice that it is declared using the **virtual** keyword, which tells the compiler that you'd like any overriding function to be called, if one exists:

```
class Shape
//
       Data members...
        Member functions...
  public:
    virtual void WhatAmI();
};
   Here's the definition of Shape::WhatAmI():
void Shape::WhatAmI()
  cout << "I don't know what kind of shape I am!\n";</pre>
Notice that the virtual keyword isn't used here. The virtual
keyword is only allowed in the function declaration inside the
class declaration.
   Our next class, Rectangle, is derived from the Shape class.
Rectangle also has a single member function named WhatAmI():
//-----
Shape:Rectangle
class Rectangle : public Shape
{
        Data members...
        Member functions...
  public:
    void WhatAmI();
};
   Rectangle's version of What AmI () is called when the object
doing the calling is a Rectangle:
void Rectangle::WhatAmI()
  cout << "I'm a rectangle!\n";</pre>
```

Our next class, **Triangle**, is also derived from **Shape**:

```
//-----
Shape:Triangle
class Triangle : public Shape
11
      Data members...
// Member functions...
 public:
   void WhatAmI();
};
  Once again, Triangle has its own version of WhatAmI():
void Triangle::WhatAmI()
 cout << "I'm a triangle!\n";</pre>
}
  Now comes the fun part. main() declares three Shape point-
ers, s1, s2, and s3:
//---- main()
int main()
 Shape *s1, *s2, *s3;
Each of these pointers is used to create a new object, a Rectangle,
a Triangle, and a Shape:
 s1 = new Rectangle;
```

You may be wondering why the three pointers are all declared as **Shape**s while the objects assigned to the pointers are of three different types. This is intentional. If you're building a linked list

s2 = new Triangle; s3 = new Shape; of shapes, you can store a pointer to each object in the list as a **Shape** pointer rather than as a **Rectangle** pointer or **Triangle** pointer. In this way, your list management software doesn't have to know what type of shape it is dealing with. If you want to call **WhatAmI()** (or some other, more useful function) for each object in the list, you just step through the list, one object at a time, treating each object as if it were a **Shape**. If the object belongs to a derived class that overrides the function, C++ will make sure the correct function is called.

Once our three objects are created, we try using each object to call WhatAmI():

```
s1->WhatAmI();
s2->WhatAmI();
s3->WhatAmI();
return 0;
}
```

When the **Rectangle** object is used to call **WhatAmI()**, we get this result:

I'm a rectangle!

When the **Triangle** object is used to call **WhatAmI()**, we get this result:

I'm a triangle!

Finally, when the **Shape** object is used to call **WhatAmI()**, we get this result:

I don't know what kind of shape I am!

In this example, the **Shape** class exists just so that we can create useful, derived classes from it. Creating a **Shape** object is not particularly useful.

Summary

Congratulations! You've made it through the hardest part of object programming with C++. You've mastered most of the skills you'll need to write your own object-oriented programs.

The remainder of this book is dedicated to filling in the gaps. Though there's still a major topic or two to cover, you'll find that most of the toughest aspects of C++ are behind you. Once again, congratulations, and welcome to the world of object programming!

Chapter 7

Operator Overloading

C++ allows you to overload its built-in operators, customizing them to work with objects you define. This chapter provides examples that show you how to take full advantage of this powerful and creative technique.

This Chapter at a Glance

The Operator Overloading Alternative

Calling an Operator Overloading Function
Operator Overloading Using a
Member Function
Multiple Overloading Functions
An Operator Overloading Example

A Few Restrictions Covering All the Bases

Overloading an Overloading Function How Many Versions Are Needed? An Overloader Overloading Example

Special Cases

Summary

Overloading new and delete
An operator new Example
Overloading ()
An operator() Example
Overloading []
An operator[] Example
Overloading ->
An operator-> Example
Overloading =
An operator= Example

THE C++ FEATURE UP FOR DISCUSSION IN THIS CHAPTER is **operator overloading**. In C++, you can overload any of the built-in operators, such as + or *, giving each one your own personal twist.

For instance, imagine that you're running a restaurant and you want to write some software to handle your billing, print your menus, and so on. Your program might create a **MenuItem** class that looks something like this:

Your software would define a **MenuItem** object for each item on the menu. When someone orders, you'd calculate the bill by adding together the **price** of each **MenuItem**. Here's an example:

This particular diner had the chicken and a glass of the house wine. The total is calculated using the member function **GetPrice()**. Nothing new here.

The Operator Overloading Alternative

Operator overloading provides an alternative way of figuring up the bill. If things are set up properly, the compiler will interpret the statement

```
total = chicken + houseWine;
```

by adding the **price** of **chicken** to the **price** of **houseWine**. Ordinarily, the compiler would complain if you tried to use a nonintegral type with the + operator. You can get around this limitation by giving the + operator a new meaning.

To do this, create a function to overload the + operator:

```
float operator+( MenuItem item1, MenuItem item2 )
{
  return( item1.GetPrice() + item2.GetPrice() );
}
```

Notice the name of this new function. Any function whose name follows the form

```
operator<C++ operator>
```

is said to *overload the specified operator*. When you overload an operator, you're asking the compiler to call your function instead of interpreting the operator as it normally would.

Calling an Operator Overloading Function

When the compiler calls an overloading function, it maps the operator's operands to the function's parameters. For example, suppose the function

```
float operator+( MenuItem item1, MenuItem item2 )
{
  return( item1.GetPrice() + item2.GetPrice() );
}
```

is used to overload the + operator. When the compiler encounters the expression

chicken + houseWine

it calls **operator+()**, passing **chicken** as the first parameter and **houseWine** as the second parameter. **operator+()**'s return value is used as the result of the expression.



The number of operands taken by an operator determines the number of parameters passed to its overloading function. For example, a function designed to overload a unary operator takes a single parameter; a function designed to overload a binary operator takes two parameters.

Operator Overloading Using a Member Function

You can also use a member function to overload an operator. For example, the function

```
float MenuItem::operator+( MenuItem item )
{
  return( GetPrice() + item.GetPrice() );
}
```

overloads the + operator and performs pretty much the same function as the earlier example. The difference lies in the way a member function is called by the compiler.

When the compiler calls an overloading member function, it uses the first operand to call the function and passes the remainder of the operands as parameters. So with the function just given in place, the compiler handles the expression

chicken + houseWine

by calling **chicken.operator+()**, passing **houseWine** as a parameter, as if you had made the following call:

```
chicken.operator+( houseWine )
```

Again, the value returned by the function is used as the result of the expression.

Multiple Overloading Functions

The previous example brings up an interesting point. What will the compiler do when it encounters several functions that overload the same operator? For example, both of the following functions overload the + operator:

```
float operator+( MenuItem item1, MenuItem item2 )
float MenuItem::operator+( MenuItem item )
```

If both are present, which one is called?

The answer to this question is, neither! The compiler will not allow you to create an ambiguous overloading situation. You can create several functions that overload the same operator, however. You might create one version of <code>operator+()</code> that handles <code>MenuItems</code> and another that allows you to add two arrays together. The compiler chooses the proper overloading function based on the types of the operands.

An Operator Overloading Example

Here's an example that brings some of these concepts to life. First, we'll declare a **Time** class and use it to store a length of time specified in hours, minutes, and seconds. Then, we'll overload the + and *= operators and use them to add two times together and to multiply a time by a specified value.

If THIN C++ is already running, close the current project by selecting **Close Project** from the **Project** menu. If THIN C++ isn't running, launch it by double-clicking on the **THIN Project**

Manager. Either way, when prompted for a project file to open, go into the THIN C++ Projects folder, open the subfolder named Chap 07.01 - time, and open the project file named time. Next, run time. by selecting Run from the Project menu. Here's what you'll see:

```
(1:10:50)
(2:24:20)
-----
(3:35:10)
* 2
-----
(7:10:20)
```

Hit a return to exit time. Let's take a look at the source code.

The time Source Code

As usual, time.cp starts by including <iostream.h>:

```
#include <iostream.h>
```

Next, we declare the **Time** class, which is used to store time in **hours**, **minutes**, and **seconds**:

```
class Time
{
// Data members...
private:
    short hours;
    short minutes;
    short seconds;
```

Next come the member functions. The first, NormalizeTime(), converts any overflow in the seconds and minutes data members; for example, 70 seconds is converted to 1 minute and 10 seconds. NormalizeTime() will only be used from within the Time class. Since we're not planning on deriving any classes from Time, we've left it as private. The rest of the member functions will be public.

```
// Member functions...
  void NormalizeTime();
  public:
```

The **Time** class sports two constructors. The first takes no parameters and is used to create a **Time** object with all three data members set to 0 (You'll see why later on in the code). The second **Time** constructor uses its three parameters to initialize the three **Time** data members.

```
Time();
Time( short h, short m, short s );
```

Display() displays the time stored in the current object,
operator+() overloads the + operator, and operator*=()
overloads the *= operator:

```
void Display();
  Time operator+( Time &aTime );
  void operator*=( short num );
};
```

Next come the two overloaded constructors. The first one initializes all three data members to 0. The second initializes the data members and then calls **NormalizeTime()** to resolve any overflow.

```
Time::Time()
{
   seconds = 0;
   minutes = 0;
   hours = 0;
}

Time::Time( short h, short m, short s)
{
   seconds = s;
   minutes = m;
   hours = h;

   NormalizeTime();
}
```

NormalizeTime() starts by adding the seconds overflow to minutes, and then it adds the minutes overflow to hours:

```
void Time::NormalizeTime()
{
  hours += ((minutes + (seconds/60)) / 60);
```

Next, the same calculation is performed to calculate a new value for minutes and then for seconds:

operator+() is called when the + operator is used to add two Time objects together. The first operand is used as the current object, and the second operand corresponds to the parameter aTime.

```
Time Time::operator+( Time &aTime )
{
   short h;
   short m;
   short s;
```



Notice that aTime is declared as a reference parameter. Why? This code would also work if aTime were declared without the &.

Without the &, the compiler would create a copy of the parameter to pass in to operator+(). Since C++ passes its parameters on the stack, this could cause a problem if the parameter was big enough. With the &, aTime is a reference to the object passed in as a parameter.

Next, the **hours**, **minutes**, and **seconds** data members of the two objects are added together and stored in the local variables **h**, **m**, and **s**:

```
h = hours + aTime.hours;
m = minutes + aTime.minutes;
s = seconds + aTime.seconds;
```

Next, a new **Time** object is created using **h**, **m**, and **s**. Since the **Time** constructor calls **NormalizeTime()**, there's no need to do that here.

```
Time tempTime( h, m, s );
```



It is perfectly OK to declare an object in the middle of your code. In this case, we wanted to initialize h, m, and s before we created tempTime.

Finally, we return the newly created object. Since we are not using a reference, the compiler will make a copy of **tempTime**, then return the copy. The compiler is responsible for destroying this copy, so you don't have to worry about it.

```
return tempTime;
}
```

operator*=() is called when the *= operator is used to
multiply a Time object by a constant. Notice that operator*=()
does not return a value because the multiplication is performed
inside the Time object that appears as the first operand:

```
void Time::operator*=( short num )
{
```

Each of the **Time** object's data members is multiplied by the specified **short**:

```
hours *= num;
minutes *= num;
seconds *= num;
```

Since we won't be creating a new **Time** object, we call **NormalizeTime()** to fix any overflow problems that may have just been caused:

```
NormalizeTime();
}
```



In general, your overloading functions return a value if it makes sense for the operator being overloaded. If the operator includes an =, chances are you'll make your changes in place and won't return a value, as we did with operator*=(). If the operator doesn't include an =, you'll most likely return a value, as we did with operator+().

Before you make the decision, build a few expressions using the operator under consideration. Do the expressions resolve to a single value? If so, then you want your overloading function to return a value.

main() starts by defining two Time objects (the values in parentheses represent the hours, minutes, and seconds, respectively):

```
int main()
{
   Time firstTime( 1, 10, 50 );
   Time secondTime( 2, 24, 20 );
```

Next, a third **Time** object is created, this time via a call to the **Time** constructor that doesn't take any parameters.

```
Time sumTime;
```

Display() is called to display the data members of the two **Time** objects, and then a line is drawn under the two **Time**s:

```
firstTime.Display();
secondTime.Display();
cout << "----\n";
Here are the results:
(1:10:50)</pre>
```

(2:24:20)

Next, the + operator is used to add the two **Time**s together, and the resulting object is displayed:

```
sumTime = firstTime + secondTime;
sumTime.Display();
```

Here's what this result looks like:

```
(3:35:10)
```

Now, two more lines are sent to the console:

```
cout << "* 2\n";
cout << "----\n";</pre>
```

Here's what they look like:

```
* 2
```

These lines indicate that we'll be multiplying our previous result by 2.

We accomplish this multiplication by using the ***=** operator and then display the results:

```
sumTime *= 2;
sumTime.Display();
```

```
return 0;
```

Here's the final time:

(7:10:20)

If you like, try substituting your own numbers and run the program again.

A Few Restrictions

Now that you've mastered the basics of operator overloading, you need to be aware of a few restrictions. First, you can only overload C++'s built-in operators (see Figure 7.1). This means that you can't create any new operators. You can't suddenly assign a new meaning to the letter *z*, for example.

FIGURE 7.1 You can overload these operators.

Ove	Overloadable Operators								
+	-	*	/	%					
^	&		~	!					
,	=	<	>	<=					
>=	++		<<	>>					
==	!=	&&		+=					
-=	/=	%=	^=	& =					
=	*=	<<=	>>=	[]					
()	->	->*	new	delete					

Second, it may not be obvious from Figure 7.1, but there are a few built-in operators that you can't overload (see Figure 7.2).

FIGURE 7.2 You can't overload these operators.

Nonoverloadable Operators						
	.*	::	?:	sizeof()		

Third, you can't change the way an operator works with a predefined type. For example, you can't write your own operator() function to add two ints together.



Here's a rule of thumb for you. If you want the compiler to even consider calling your overloading function, either make the function a class member function, or else make one of its parameters an object. Remember, the compiler will complain if you write an operator() function designed to work solely with C++'s built-in types.

Fourth, when you overload the ++ and -- operators, you'll have to provide two versions of the **operator** function, one to support prefix notation and one to support postfix notation. The compiler distinguishes between the two by checking for a dummy **int** parameter. Prefix version of your **operator** function shouldn't have any parameters, while the postfix version takes a single **int**.



Here's an example of a prefix and postfix ++ overloading operator for the Time class from our last program. First, the prefix operator function:

```
Time operator++()
{
   *this = *this +1;
   return *this;
}
```

Now here's a version of the postfix operator function:

```
Time operator++( int )
{
   Time aTime = *this;

   *this = *this + 1;
   return aTime;
}
```

Notice the unused int parameter in the postfix operator++() function. That's how the compiler identifies this function as postfix. Finally, you'll want to add a

new version of operator+() to handle adding 1 to a Time object (as we do in the two functions above):

```
Time Time::operator+( int num )
{
  hours += 1;
  return *this;
}
```

Go ahead and add this code to your program. Don't forget to add the function declarations to your Time class declaration.

Fifth, you can't change an operator's precedence by overloading it. If you want to force an expression to be evaluated in a specific order, use parentheses.

Sixth, overloading functions cannot specify default parameters. This restriction makes sense since a function with default parameters can be called with a variable number of arguments. For example, you could call the function

```
MyFunc( short a=0, short b=0, short c=0 )
```

using anywhere from zero to three arguments. If an <code>operator()</code> function allowed default parameters, you'd be able to use an operator without any operands! If you did that, how would the compiler know which overloading function to call? You get the idea.

Seventh, you can't change the number of operands handled by an operator. For example, you couldn't make a binary operator unary.

Covering All the Bases

Earlier in the chapter, we looked at a function that overloaded the + operator and was designed to add the **price** of two **MenuItems** together:

```
float operator+( MenuItem item1, MenuItem item2 )
{
```

```
return( item1.GetPrice() + item2.GetPrice() );
}
```

When the compiler encountered an expression like

```
chicken + houseWine
```

where both **chicken** and **houseWine** were declared as **MenuItems**, it called **operator+()**, which passed the two operands as parameters. The **float** produced by adding both **prices** together was returned as the result of the expression.

What happens when the compiler evaluates an expression like

```
chicken + houseWine + applePie
```

This expression seems innocent enough, but look at it from the compiler's viewpoint. First, the subexpression

```
chicken + houseWine
```

is evaluated, resolving to a **float**. Next, this **float** is combined with **applePie** in the expression

```
<float> + applePie
```

Hmmm...what does the compiler do with this expression? We designed an overloading function that handles the + operator when its operands are both MenuItems, but we don't have one that handles a float as the first operand and a MenuItem as the second operand.

Now take a look at the following expression:

```
chicken + (houseWine + applePie)
```

First, the compiler evaluates the subexpression

```
(houseWine + applePie)
```

resolving it to a **float**. That leaves us with the expression

```
chicken + <float>
```

Once again, we designed an **operator+()** function that handles **+** and two **MenuItems**, but we don't have one that handles a **MenuItem** as the first operand and a **float** as the second operand.

Overloading an Overloading Function

As you can see, you frequently need more than one version of the same <code>operator()</code> function. To accomplish this task, you use a technique introduced back in Chapter 4, function overloading. Just as with any other function, you can overload an <code>operator()</code> function by providing more than one version, each with its own unique signature.



Remember, a function's signature is based on its parameter list and not on its return value.

How Many Versions Are Needed?

Figuring out how many versions of an **operator()** function to provide is actually pretty straightforward. Start by making a list of the number of possible types you want to allow for each of the operator's operands. Don't forget to include the type returned by your **operator()** function.

In the previous example, we wanted operator+() to handle a float or a MenuItem as either operand, which yields the possibilities shown in Figure 7.3. The left column shows the possibilities for the left operand; the right column shows the possibilities for the right operand. Your list will have left * right entries in it, where left is the number of types allowed for the left operand and right is the number of types allowed for the right operand.

Figure 7.3 lists four possible operand combinations. The first case involves an expression of the form

<float> + <float>

FIGURE 7.3
Possible operands for the + operator, given that each operand can be either a float or a Menultem.

Left	+	Right
float		float
float		Menultem
Menultem		float
Menultem		Menultem

As pointed out earlier, you can't create an **operator()** function based solely on built-in types. Fortunately, the compiler does a perfectly fine job of adding two **floats** together.

With this first case taken care of by the compiler, we're left to construct the remaining three **operator+()** functions. Our next program, **menu**, uses function overloading to do just that.

An Overloader Overloading Example

Close the current project by selecting **Close Project** from the **Project** menu. When prompted for a project file to open, go up to the **THIN C++ Projects** folder, open the subfolder named **Chap 07.02 - menu**, and open the project file named **menu**. Next, run **menu**. by selecting **Run** from the **Project** menu. Here's what you'll see:

```
MenuItem::operator+( MenuItem item )
operator+( float subtotal, MenuItem item )
Total: 15.969999
MenuItem::operator+( MenuItem item )
MenuItem::operator+( float subtotal )
Total: 15.969999
```

Hit a return to exit menu. Let's take a look at the source code.

The menu Source Code menu starts with two include files and a single constant:

```
#include <iostream.h>
#include <string.h>
```

```
const short kMaxNameLength = 40;
```

Next, the MenuItem class is declared. The MenuItem class contains two data members. price lists the price of the item while name contains the item's name as it might appear on a menu:

```
//----- MenuItem

class MenuItem
{
  private:
    float price;
    char name[ kMaxNameLength ];
```

Notice that both data members are marked as **private**, which shouldn't be a problem since we won't be deriving any new classes from **MenuItem**.

The MenuItem class features four member functions. The constructor, MenuItem(), initializes the MenuItem data members; the GetPrice() function returns the value of the price data member:

The two **operator+()** functions handle the cases where a **MenuItem** object appears as the first operand to the **+** operator. If the second operand is also a **MenuItem**, the first of the two functions is called; if the second operand is a **float**, the second function is called:

```
float operator+( MenuItem item );
float operator+( float subtotal );
};
```

The MenuItem() constructor copies its first parameter into the price data member, and then it uses strcpy() to copy the second parameter into the name data member:

```
MenuItem::MenuItem( float itemPrice, char *itemName )
{
  price = itemPrice;
  strcpy( name, itemName );
}
```



For the sake of simplicity, we used strcpy() to copy the parameter into name. The Employee constructor in Chapter 5's first sample program provides a safer alternative. Check it out.

GetPrice() returns the value stored in the data member **price**.

```
float MenuItem::GetPrice()
{
  return( price );
}
```

The first version of **operator+()** handles expressions of the form

```
<MenuItem> + <MenuItem>
```

First, it prints out a message showing which **operator+()** function is called:

```
float MenuItem::operator+( MenuItem item )
{
  cout << "MenuItem::operator+( MenuItem item )\n";</pre>
```

Next, it adds together the two versions of price representing the left and the right operands. GetPrice() retrieves the price of the left operand (the MenuItem acting as the current object), and item.GetPrice() retrieves the price of the right operand (the MenuItem passed as a parameter). The sum of these two prices is returned as a float:

```
return( GetPrice() + item.GetPrice() );
}
```

The second version of **operator+()** handles expressions of the form

```
<MenuItem> + <float>
```

First, it prints out a message showing which **operator+()** function is called:

```
float MenuItem::operator+( float subtotal )
{
  cout << "MenuItem::operator+( float subtotal )\n";</pre>
```

Next, it adds together the **price** of the current object, retrieved by calling **GetPrice()**, and the **float** passed as a parameter. The sum is returned as a **float**:

```
return( GetPrice() + subtotal );
}
```

The third version of **operator+()** is, by necessity, not a member function of any class. To understand why this is so, take a look at the expressions this version of **operator+()** is designed to handle:

```
<float> + <MenuItem>
```

As mentioned earlier, the compiler uses the first operand to determine how the overloading <code>operator()</code> function is called. If the first parameter is an object, that object is used to call the <code>operator()</code> function and all other operands are passed to the function as parameters. If the first parameter is not an object, the compiler's list of candidate overloading functions is reduced to the program's nonclass <code>operator()</code> functions. Once a matching function is located, the compiler calls it, passing <code>all</code> of the operands as parameters.

Just like its compatriots, the third version of **operator+()** starts by printing a message showing which **operator+()** function is called:

```
//---- operator+()
```

```
float operator+( float subtotal, MenuItem item )
  cout <<
     "operator+( float subtotal, MenuItem item )\n";
Next, the float and the MenuItem's price, retrieved by calling
GetPrice(), are added together and returned as a float:
  return( subtotal + item.GetPrice() );
}
   OK, here comes the good stuff! main() declares three
MenuItem objects, initializing each with a price and a name:
int main()
 MenuItem chicken( 8.99, "Chicken Kiev with salad" );
 MenuItem houseWine( 2.99, "Riesling by the glass" );
 MenuItem applePie( 3.99, "Apple Pie a la Mode" );
   main() also declares a float used to hold the result of our
Menu addition.
  float
          total;
   Next, the three MenuItems are added together, the result
stored in total, and the total printed.
  total = chicken + houseWine + applePie;
  cout << "\nTotal: " << total</pre>
    << "\n\n";
When the compiler encounters the expression
chicken + houseWine + applePie
it first processes the subexpression
chicken + houseWine
```

Since we're adding two MenuItems together, the compiler calls the first of our three operator+() functions, as shown by the first line of output:

```
MenuItem::operator+( MenuItem item )
```

Next, this subtotal is used to process the remainder of the expression:

```
<subtotal> + applePie
```

Since we're now adding a **float** to a **MenuItem**, the compiler calls the third **operator+()** function, as shown by the next line of output:

```
operator+( float subtotal, MenuItem item )
```

Once the calculations are complete, the total is printed:

Total: 15.969999



Why 15.969999 instead of 15.97? Since we are using the default settings of the iostream library, we don't have much control over the precision used to print floats. In our next chapter, we'll explore the mechanisms you can use to fine-tune your iostream output.

Then, the three **MenuItem**s are added together again, this time with a slight wrinkle—the addition of parentheses wrapped around the last two operands:

```
total = chicken + (houseWine + applePie);
```

These parentheses force the compiler to start by evaluating the subexpression

```
(houseWine + applePie)
```

Once again, we're adding two **MenuItem**s together, as shown by the next line of output:

```
MenuItem::operator+( MenuItem item )
```

Next, this subtotal is used to process the remainder of the expression:

```
chicken + <subtotal>
```

Since we're now adding a **MenuItem** to a **float**, the compiler calls the second **operator+()** function, as shown by the following line of output:

```
MenuItem::operator+( float subtotal )
    Finally, the total is printed a second time:
    cout << "\nTotal: " << total;
    return 0;
}</pre>
```

As expected, this matches the earlier total:

```
Total: 15.969999
```

Special Cases

The remainder of this chapter is dedicated to a few special cases. Specifically, we'll focus on writing operator() functions that overload the new, delete, (), [], ->, and = operators.



One characteristic shared by each of these operators is that they can only be overloaded by a nonstatic class member function. Basically, this means that you won't be using the non-class operator() function strategy from our previous example for any of the operators in this section.

Overloading new and delete

There are two ways you can overload **new** and **delete**. You can create two member functions named **operator new()** and **operator delete()** as part of your class design. You might do this if you wanted to implement your own memory management scheme for a specific class.

Another way to overload **new** and **delete** is to overload the global **new** and **delete** operators by providing **operator new()** and **operator delete()** functions that are not members of a class. You might do this if you wanted **new** and **delete** to always initialize newly allocated memory.



Whatever your reasons for overloading new anddelete, proceed with caution. No matter how you do it, once you overload new and delete, you are taking on a big responsibility, one that can get you in deep trouble if you don't handle things properly.

An operator new Example

Here's a small example you can use as the basis for your own new and delete operator() functions. Close the current project by selecting Close Project from the Project menu. When prompted for a project file to open, go up to the THIN C++ Projects folder, open the subfolder named Chap 07.03 - new, and open the project file named new. Next, run new. by selecting Run from the Project menu. Here's what you'll see:

```
new: 2 byte(s).
delete: 2 byte(s).
```

Hit a return to exit **new**. Let's take a look at the source code.

The new Source Code **new** starts with a **#include** you've seen before:

```
#include <iostream.h>
```

new defines a class named **Blob**, which doesn't do much, but it does contain overloading functions for **new** and **delete**:

There are lots of details worth noting in the **new** and **delete operator()** functions. First, notice the space between the words **operator** and **new** and between **operator** and **delete**. Without the space, the compiler might think you were creating a function called **operatornew()**, a perfectly legal C++ function name.

Next, note that **operator new()** returns a **void ***. This is required. In general, your version of **new** will return a pointer to the newly allocated object or block of memory. If your memory management scheme calls for relocatable blocks, you might want to return a handle (pointer to a pointer) instead. The choice is yours.

```
void *Blob::operator new( size_t blobSize )
{
  cout << "new: " << blobSize << " byte(s).\n";
  return new char[ blobSize ];
}</pre>
```

The **operator new** function must take at least one parameter of type **size_t**. The value for this parameter is provided automatically by the compiler and specifies the size of the object to be

allocated. Any parameters passed to **new** will follow the **size_t** in the parameter list.

The **operator delete** function never returns a value and *must* be declared to return a **void**. **delete** always takes at least one parameter, a **pointer** to the block to be deleted. The second parameter, a **size_t**, is optional. If you provide it, it will be filled with the size, in bytes, of the block pointed to by the first parameter.

```
void Blob::operator delete( void *blobPtr, size_t
blobSize )
{
  cout << "delete: " << blobSize << " byte(s).\n";
  delete [] blobPtr;
}</pre>
```



Sometimes the size passed as the second parameter to operator delete() isn't quite what you expected. If the pointer being deleted is a pointer to a base class yet the object pointed to belongs to a class derived from the base class, the second parameter to operator delete() will be the size of the base class.

There is an exception to this rule. If the base class's destructor is **virtual**, the **size** parameter will hold the proper value, the size of the object actually being **deleted**.

Overloading delete and new is tricky work. If you plan on writing your own operator() functions for new and delete, check out section 12.5 in *The Annotated C++ Reference Manual.*

```
main() creates a new Blob and then deletes it:

//----- main()
int main()
{
    Blob *blobPtr;
```

```
blobPtr = new Blob;
delete blobPtr;

return 0;
}
```

When the **Blob** is created, the overriding **new** is called, and the following line of output appears:

```
new: 2 byte(s).
```

Where did the value 2 come from? This value is actually compiler dependent. THIN C++ allocates a minimum of 2 bytes for an object, regardless of whether the object has any data members or not.

When the object is deleted, the overloaded version of **delete** is called, and the next line of output is generated:

```
delete: 2 byte(s).
```

Overloading ()

The next special case is the function that overloads the () operator, also known as the *function call operator*. One reason to overload the function call operator is to provide a shorthand notation for accessing an object's critical data members. As mentioned earlier, () can only be overloaded by a nonstatic class member function. Here's an example.

An operator() Example

Close the current project by selecting **Close Project** from the **Project** menu. When prompted for a project file to open, go up to the **THIN C++ Projects** folder, open the subfolder named **Chap 07.04 - call**, and open the project file named **call**. Next, run **call**. by selecting **Run** from the **Project** menu. Here's what you'll see:

```
Price of Stimpy doll: $36.990002
Price with 4.5% tax: $38.654552
```

Hit a return to exit **call**. Let's take a look at the source code.

The call Source Code
call starts with the standard #include:

#include <iostream.h>

Next, call defines an Item class. An Item object represents an item for sale at Uncle Ren's Toy-o-rama. For the purpose of this example, I've kept things pretty simple. Item features a single data member, price, and two member functions, the Item() constructor and a function designed to overload the call operator:

```
class Item
{
  private:
    float price;

  public:
        Item( float itemPrice );
        float operator()( float taxRate = 0 );
};
```

The **Item()** constructor copies its parameter into the **price** data member:

```
Item::Item( float itemPrice )
{
  price = itemPrice;
}
```

The **operator()()** function may look odd, but the syntax using two pairs of parentheses is correct:

```
float Item::operator()( float taxRate )
{
```

The first pair of parentheses designates the operator being overloaded; the second pair surrounds any parameters being passed to the function. In this case, one parameter, taxRate, is specified. Notice that taxRate has a default value of 0. You'll see why in a minute.

The operator()() function takes the specified taxRate and applies it to the Item's price, returning the Item's total price:

```
return( ((taxRate * .01) + 1) * price );
}
```



Since the function call operator can only be overloaded by a class member function, the previous reference to price refers to the data member of the object used in combination with the call operator.

main() starts by creating an Item object. The Stimpy doll
was Uncle Ren's biggest seller last year (although Log came in a
close second):

```
//----- main()
int main()
{
   Item stimpyDoll( 36.99 );

Here's where the call overload comes into play:
   cout << "Price of Stimpy doll: $" << stimpyDoll();

By taking advantage of the default parameter, the function call
stimpyDoll()
returns stimpyDoll's price. We could have accomplished the same thing by coding
stimpyDoll.price
or</pre>
```

stimpyDoll(0)

Next, we use the same function to calculate the cost of the doll with 4.5% tax included:

Once again, we take advantage of the overloaded function call operator. This time, we provide a parameter. Notice that the same overloading function is used for two different (though closely related) purposes.



You may have noticed that the Stimpy doll's price (including tax) printed as

```
Price with 4.5% tax: $38.654552
```

Wouldn't it be nice if you could trim the price to \$38.65 (who needs those extra digits, anyway)? Well, stick around until Chapter 8, where you'll learn how to customize iostream in all sorts of ways.

The key to properly overloading the function call operator is to use it to provide access to a key data member. If your object represents a character string, you might overload () to provide access to a substring, using a pair of parameters to provide the starting position and length of the substring.

Another strategy uses () as an iterator function for accessing data kept in a sequence or list. Each call to () bumps a master pointer to the next element in the list and returns the new data element. No question about it, the function call operator is a useful operator to overload.

Overloading []

Another useful operator to overload is [], also known as the *subscript operator*. Although it can be used for other things, [] is frequently overloaded to provide range checking for arrays. You'll see how to do this in a moment.

The subscript overloading syntax is similar to that of the function call operator. In the statement

```
myChar = myObject[ 10 ];
```

the [] overloading function belonging to the same class as **myObject** is called with a single parameter, 10. The value returned by the function is assigned to the variable **myChar**.

On the flip side of the coin, the [] overloading function *must* support a [] expression on the left side of the assignment statement, like so:

```
myObject[ 10 ] = myChar;
```

The next example shows you how to properly overload [].

An operator[] Example

Close the current project by selecting **Close Project** from the **Project** menu. When prompted for a project file to open, go up to the **THIN C++ Projects** folder, open the subfolder named **Chap 07.05 - subscript**, and open the project file named **subscript**. Next, run **subscript**. by selecting **Run** from the **Project** menu. Here's what you'll see:

```
B. X. Clinton
index out of bounds!!!
Z. X. Clinton
```

Hit a return to exit **subscript**. Let's take a look at the source code.

The subscript Source Code

subscript starts with some familiar **#include**s and a constant that is used to declare a string data member:

```
#include <iostream.h>
#include <string.h>

const short kMaxNameLength = 40;
```

The **Name** class is fairly simple. It is designed to hold a NULL-terminated string containing a person's name as well as a **short** containing the length of the string:

```
class Name
{
  private:
    char    nameString[ kMaxNameLength ];
    short    nameLength;
```

The member functions include a constructor as well as two operator overloading functions. One function overloads []; the other overloads ():

The constructor copies the provided string to the nameString data member and places the length of the string in the nameLength data member:

```
Name::Name( char *name )
{
  strcpy( nameString, name );
  nameLength = strlen( name );
}
```

The () operator overloading function simply prints the character string in nameString:

```
void Name::operator()()
{
  cout << nameString << "\n";
}</pre>
```

The [] operator overloading function takes a single parameter, an index into the character string. Notice the unusual return type. By specifying a **char** reference as a return type, the function ensures that the [] operator can appear on either side of an assignment statement. Essentially, an expression such as

```
myObject[ 0 ]
```

is turned into a **char** variable containing the character returned by the [] overloading function:

```
char& Name::operator[]( short index )
{
```

Here's the real advantage to overloading the [] operator. Before you access the specified character, you can first do some bounds checking, making sure the character is actually *in* the character string! If the specified **index** is out-of-bounds, we print a message and point to the first character in the string. In real life, you'd probably want to jump to some error-handling code, but I've decided to keep things simple here:

```
if ( ( index < 0 ) || ( index >= nameLength ) )
{
  cout << "index out of bounds!!!\n";
  return( nameString[ 0 ] );
}</pre>
```

If the **index** is in bounds, the specified character is returned:

```
else
  return( nameString[ index ] );
}
```

main() contains the proof of the pudding. First, a Name object is created, bearing a presidential tag:

```
//---- main()
int main()
{
   Name pres( "B. J. Clinton" );
```

Next, the fourth character in the string is replaced by the character $'\mathbf{x}'$:

```
pres[ 3 ] = 'X';
pres();
```

When pres() is called, the modified string is displayed:

B. X. Clinton

Then, the character 'z' is placed well out-of-bounds and the string is displayed again:

```
pres[ 25 ] = 'Z';
pres();

return 0;
}
```

The [] overloading function lets you know that the specified index is out-of-bounds and the assignment is performed on the first character of the string instead:

```
index out of bounds!!!
Z. X. Clinton
```

Overloading ->

Next on the special cases list is the -> operator, also known as the *member access operator*. Like the other operators presented in this section, overloading -> provides a shorthand notation that can save you code and add an elegant twist to your program.

When the compiler encounters the -> operator, it checks the type of the left-hand operand. If the operand is a pointer, -> is evaluated normally. If the operand is an object or object reference, the compiler checks to see whether the object's class provides an -> overloading function.

If no -> overloading function is provided, the compiler reports an error, since the -> operator requires a pointer, not an object. If the -> overloading function *is* present, the left operand is used to call the overloading function. When the overloading function returns, its return value is substituted for the original left operand, and the evaluation process is repeated. When used this way, the -> operator is known as a **smart pointer**.

If these rules sound confusing, hold on. The next example should make them loud and clear.

An operator-> Example

Close the current project by selecting **Close Project** from the **Project** menu. When prompted for a project file to open, go up to the **THIN C++ Projects** folder, open the subfolder named **Chap 07.06 - smartPtr**, and open the project file named **smartPtr**. Next, run **smartPtr**. by selecting **Run** from the **Project** menu. Here's what you'll see:

Name: Bill Clinton

Hit a return to exit **smartPtr**. Let's take a look at the source code.

The smartPtr Source Code

smartPtr starts with some #includes and a constant that you
know and love:

```
#include <iostream.h>
#include <string.h>
const short kMaxNameLength = 40;
```

smartPtr defines two classes. The **Name** class holds two zero-terminated strings containing a person's first and last names.

The member function **DisplayName()** displays the name in the console window:

```
//---- Name
class Name
 private:
   char first[ kMaxNameLength ];
   char last[ kMaxNameLength ];
 public:
         Name( char *lastName, char *firstName );
   void DisplayName();
};
Name::Name( char *lastName, char *firstName )
 strcpy( last, lastName );
 strcpy( first, firstName );
void Name::DisplayName()
 cout << "Name: " << first << " " << last;</pre>
  The Politician class represents a politician. To keep things
simple, the info is limited to the politician's age and a pointer to a
Name object containing the politician's name:
//----- Politician
class Politician
 private:
   Name
          *namePtr;
   short
           age;
 public:
```

Politician(Name *namePtr, short age);

The Politician class also contains a member function designed to overload the -> operator. The function returns a pointer to the politician's **Name** object (the fact that it returns a pointer is key, as you'll see):

```
Name *operator->();
};

Politician::Politician( Name *namePtr, short age )
{
   this->namePtr = namePtr;
   this->age = age;
}

Name *Politician::operator->()
{
   return( namePtr );
}

   main() embeds a last and first name into a Name object and
```

main() embeds a last and first name into a Name object and then uses that object to create a new Politician object (so far, no big deal):

```
//---- main()
int main()
{
  Name         myName( "Clinton", "Bill" );
  Politician billClinton( &myName, 46 );
```

Next, the **Politician** object is combined with the smart pointer to call **DisplayName()**:

```
billClinton->DisplayName();
  return 0;
}
```

There are several problems here. First, **billClinton** is an object and not a pointer, yet it is used with the -> operator. Second, the member function **DisplayName()** is not a member of the **Politician** class. How can it be called directly from a **Politician** object?

Basically, the -> overloading function is doing its thing as a smart pointer by bridging the gap between a **Politician** object and a **Name** member function. When the compiler encounters the -> operator, it checks the type of the left operand. Since **billClinton** is not a pointer, the compiler checks for an -> overloading function in the **Politician** class. When the overloading function is found, it is called, using **billClinton** as the current object. The function returns a pointer to a **Name** object. The compiler substitutes this return value for the original, yielding

namePtr->DisplayName();

The compiler again checks the type of the left operand. This time, the operand is a pointer and the -> operator is evaluated normally. The namePtr is used to call the Name function DisplayName(), resulting in the following line of output:

Name: Bill Clinton

As you can see, overloading the -> operator provides a shortcut that allows you to run a direct line between two different classes.



You can take this model one step further by supposing that the -> overloading function returns a Name object rather than a pointer to a Name object. The compiler then substitutes the Name object in the original expression and reevaluates:

myName->DisplayName();

Once again, since the left operand is an object and not a pointer, the left operand's class is examined in search of another -> overloading function. This substitution and call of -> overloading functions is repeated until a pointer is returned (the end of the chain is reached). Only then is the -> operator evaluated in its traditional form.

You can use this technique to walk along a chain of objects. Each -> overloading function evaluates some criteria, returning an object if the search should continue or a pointer if the end condition has been met. C++ is cool, eh?

Overloading =

And now, finally, we've reached the last of the special cases, the operator=() function. Why overload the = operator? To best understand why, take a look at what happens when you assign one object to another.

Suppose you define a **String** class, like this:

The data member **s** points to a null-terminated string. The data member **stringLength** contains the length of the string. The constructor **string()** initializes both data members. Notice that no memory has been allocated for **s**. This is done inside the constructor.

Now suppose you create a pair of **Strings**, like this:

```
String source( "from" );
String destination( "to" );
```

And then, you assign one of the **String** objects to the other, like this:

```
destination = source;
```

What happens?

As it turns out, the = operator copies one object to another by a process called **memberwise assignment**. Basically, this means that each data member within one object is copied, one at a time, to the corresponding data member in the receiving object.

The trouble with memberwise assignment is in the way it deals with allocated memory, such as you'd find with a null-terminated character string. When one (char *) is copied to

another, the address stored in the (char *) is copied, not the data pointed to by the address. Once the statement

```
destination = source;
```

executes, both **String**s point to the same null-terminated string in memory. The default = operator isn't smart enough to allocate the appropriate amount of new memory and then use **strcpy()** to make a copy of the string. That's where **operator=()** comes in.

If you want the ability to assign the contents of one object to another, and the objects contain allocated memory, you'll have to write a smart = overloading function that knows how to do it right. Here's an example.

An operator= Example

Close the current project by selecting **Close Project** from the **Project** menu. When prompted for a project file to open, go up to the **THIN C++ Projects** folder, open the subfolder named **Chap 07.07 - equals**, and open the project file named **equals**. Next, run **equals**. by selecting **Run** from the **Project** menu. Here's what you'll see:

```
String address: 3259462
String address: 3259472
----
String address: 3259462
String address: 3261024
```

Hit a return to exit **equals**. Let's take a look at the source code.

The equals Source Code equals starts with the same old **#includes**:

```
#include <iostream.h>
#include <string.h>
```

The **String** class described earlier is defined next, with a few additions:

```
//----- String
class String
{
  private:
    char *s;
  short stringLength;
```

The constructor still allocates the memory for the specified string, but now several new functions are added:

The constructor starts by calculating the length of the specified string, storing the result in **stringLength**. Next, **new** is used to allocate the proper amount of memory (the extra byte is for the null terminator at the end of the string). Finally, **strcpy()** is called to copy the source string to the data member **s**:

```
String::String( char *theString )
{
   stringLength = strlen( theString );
   s = new char[ stringLength + 1 ];
   strcpy( s, theString );
}
```



If s is declared as an array of fixed size, instead of as a dynamic string pointer, memberwise initialization works just fine since the memory for the array is part of the object itself. Since s points to a block of memory outside the object, memberwise initialization passes it by.

The **String** destructor uses **delete** to destroy the array of **chars** pointed to by **s**:

```
String::~String()
{
  delete [] s;
}
```

The member function **String::DisplayAddress()** provides a shorthand way of displaying the address of the first byte of a string:

Here's the = overloading function. Just like <code>operator[]()</code>, this function must return an l-value. In this case, we return a reference to a <code>String</code> object. We also take a <code>String</code> reference as a parameter. Use the following sample code as a template for all your <code>operator=()</code> functions:

```
String &String::operator=( const String &fromString )
{
```



Since you can only assign an object to another object of the same class, the type of the return value will always agree with the type of the parameter. const in the parameter declaration just marks the parameter as readonly.

operator=() starts by freeing up the memory occupied by
the old string. Next, the new value for the data member
stringLength is copied from the source String. After that,
new is used to allocate a block for the new string, and strcpy()
is used to copy the source string into s:

```
delete [] s;
  stringLength = fromString.stringLength;
  s = new char[ stringLength + 1 ];
  strcpy( s, fromString.s );
   Since this is a pointer to the current object, *this is the
object itself. We return *this to satisfy our need to return an l-value.
  return( *this );
}
   main() puts everthing to the test. First, two String objects
are created and initialized:
//---- main()
int main()
  String captain( "Picard" );
  String doctor( "Crusher" );
Next, the address of each string's string is displayed, using the
overloaded () operator:
  captain.DisplayAddress();
  doctor.DisplayAddress();
The result is the following two lines of output:
String address: 3259462
String address: 3259472
Notice that the addresses of the two strings are different.
   Now, a separator line is printed:
  cout << "---\n";
Here's the result:
```

Then, the object **captain** is assigned to the object **doctor**, and the addresses of the two text strings are again displayed:

```
doctor = captain;
captain.DisplayAddress();
doctor.DisplayAddress();
return 0;
}
```

Again, notice that the addresses are different:

```
String address: 3259462
String address: 3261024
```

If the = operator is not overloaded, the address of the captain string simply copies into the doctor object's s data member and both addresses are the same. Want to prove this? Easy. Comment out the operator=() function (every single line, not just the insides) as well as its declaration inside the String class declaration, and run the program again. Without the operator=() function, the String destructor would try to delete the same block of memory twice!



To open a source code file, either select **Open** from the **File** menu or double-click on the file name in the project window. Once you make your changes, run the program again by selecting **Run** from the **Project** menu.

Summary

Congratulations are definitely in order here! Personally, I think that operator overloading is one of the most difficult part of C++ to understand but provides the most fun in experimentation.

Well, the fun isn't over yet. In Chapter 8, You're going to dive into **iostream**. You'll find out how to overload the << and >> operators, giving you more control over your output, and you'll learn the difference between file handling in C and file handling in C++. Let's go!

Chapter 8

Inside iostream

Every sample program in this book has taken advantage of C++'s iostream library. This chapter takes a closer look at iostream's rich feature set.

This Chapter at a Glance

The Character-Based Interface The iostream Classes

istream and ostream
Working with istream and ostream
Some Useful Utilities

Working with Files

Reading Data from a File A File-Reading Example

The iostream State Bits

The Coolness of good()
A good() Example

More File Info

Writing Data to a File

Customizing iostream

An >> and << Overloading Example

Formatting Your Output

The Formatting Flags
A Formatting Example
More Flags and Methods

Using Manipulators

The Manipulators

istrstream and ostrstream

A strstream Example

Summary

THROUGHOUT THIS BOOK, WE'VE DEPENDED ON iostream's insertion operator (<<) for all of our output and iostream's extraction operator (>>) for all of our input. While these operators serve us well, there's much more to iostream than has been demonstrated so far.

For example, you can easily customize **iostream** so that the >> and << operators recognize your own personally designed

data structures and classes. You can also use **iostream** to write to and read from files or even character arrays. As you'll see, **iostream** is a powerful extension of the C++ language.

The Character-Based Interface

iostream's basic unit of currency is the character. Before a number is written to a file, it is converted to a series of chars. When a number is read from the console, it is read as a series of chars and then, if necessary, converted to the appropriate numerical form and stored in a variable.

iostream was designed to support a character-based user interface. As characters are typed on the user's keyboard, they appear on the console. When your program has something to say to the user, it uses **iostream** to send a stream of characters to the console.



If you plan to write programs for environments such as the Macintosh, Windows, or perhaps even a graphical version of Unix (Motif, X-windows, whatever), you'll probably do all your user-interface development using class libraries that come with your development environment. iostream doesn't know a thing about pull-down menus, windows, or even a mouse, but as you'll see, it's more than a library of user-interface routines.

Even if your user interface isn't character-based, <code>iostream</code> still has a lot to offer. You can use the same mechanisms you'd use to manage your console I/O to manage your program's file I/O. The same methods you'd use to write a stream of characters to a file can be used to write those same characters to an array in memory. What links these disparate techniques is their common ancestry.

The iostream Classes

The iostream library is built upon a set of powerful classes. The iostream base class is named ios. While you might not work directly with an ios object, you'll definitely work with ios' members as well as with classes derived from ios.

istream and ostream

You've already started to work with two classes derived from ios. The istream class is designed to handle input from the keyboard. cin is an istream object that C++ automatically creates for you. The ostream class is designed to handle output to the console. cout, cerr, and clog are ostream objects that are also automatically created for you. As you've already seen, cout is used for standard output. cerr and clog are used in the same way as cout. They provide a mechanism for directing error messages.



Usually cerr is tied to the console, although some operating systems (such as Unix) allow you to redirect cerr, perhaps sending the error output to a file or to another console. cerr is unbuffered which means that output sent to cerr appears immediately on the cerr device. clog is a buffered version of cerr and is not supported by all C++ development environments. To decide which error output vehicle to use (clog or cerr), consult your operating system manual.

Working with istream and ostream

Up to this point, your experience with **iostream** has centered on the extraction (>>) and insertion (<<) operators. For example, the following code reads in a number, stores it in a variable, and then prints out the value of the number:

```
short myNum;
cout << "Type a number: ";
cin >> myNum;
cout << "Your number was: " << myNum;</pre>
```

There are a couple of things worth noting in this example. First, the **iostream** input and output are buffered. Just as in C, all input and all output are accumulated in buffers until either the buffers are filled or the buffers are flushed. On the input side, the buffer is traditionally flushed when a carriage return is entered. On the output side, the buffer is usually flushed either when input is requested or when the program ends. Later in the chapter, you'll learn how to flush your own buffers (how exciting!).

The second feature worth noting is that >> eats up white space. In other words, >> ignores spaces and tabs in the input stream. To >>, the line

123

is the same as this line:

123

If you're reading in a series of numbers, this works out pretty well. But if you're trying to read in a stream of text, you might want to preserve the white space interspersed throughout your input. Fortunately, **istream** offers some member functions that are white-space savvy.

```
get()
```

The **istream** member function **get()** reads a single character from the input stream. **get()** comes in three different flavors.

The first version of **get()** takes a **char** reference as a parameter and returns a reference to an **istream** object:

```
istream &get(char &destination);
```

Since **get()** is an **istream** member function, you can use **cin** to call it (after all, **cin** is just an **istream** object):

```
char c;
cin.get( c );
```

This version of **get()** reads a single character from the input stream, writes the **char** into its **char** parameter (**c**), and then returns the input stream reference (**cin**). Since **get()** returns the input stream, it can be used in a sequence, as in the following example:

```
char c;
short myShort;
cout << "Type a char and a short: ";
cin.get( c ) >> myShort;
```

This code grabs the first character from the input stream and stores it in c. Next, the input stream is parsed for a **short**, and the **short** is placed in **myShort**. If the input to this example were

123

then **c** would end up with the character **1**, while **myShort** would end up with the value **23**.

The second version of get () is declared as follows:

This version of <code>get()</code> extracts up to <code>length - 1</code> characters and stores them in the memory pointed to by <code>buffer</code>. If the <code>chardelimiter</code> is encountered in the input stream, the <code>char</code> is pushed back into the stream and the extraction stops. For example, the code

```
char buffer[ 10 ];
cin.get( buffer, 10, '*' );
```

starts to read characters from the input stream. If a * is encountered, the extraction stops, the * is pushed back into the stream, and a null terminator is placed at the end of the string just read into buffer.

If no * is encountered, nine characters are read into **buffer**, and, again, **buffer** is null-terminated. Notice that **get()** reads only n-1 characters, where n is specified as the second parameter; **get()** is smart enough to save one byte for the null terminator.

If the third parameter is left out, this version of <code>get()</code> uses '\n' as the terminating character. This allows you to use <code>get()</code> to extract a full line of characters without overflowing your input buffer. For example, the code

```
char buffer[ 50 ];
cin.get( buffer, 50 );
```

reads up to 49 characters or one line from the input stream, whichever is shorter. Either way, the string stored in **buffer** gets null-terminated.

The third version of get() is declared as follows:

```
int get();
```

This version of **get()** reads a single character from the input stream and returns the character, cast as an **int**, as in the following example:

```
int c;
while ( (c = cin.get()) != 'q' )
  cout << (char)c;</pre>
```

This code reads the input stream, one character at a time, until a **q** is read. Each character is echoed to the console as it is read.

The third version of **get()** returns an **int** and not a **char** to allow it to return the end-of-file character. Typically, **EOF** has a value of -1. By returning an **int**, **get()** allows for 256 possible **char** values as well as for the end-of-file character. Although **EOF** isn't particularly useful when reading from the console, we'll use this version of **get()** later in the chapter to read the contents of a file.

```
getline()
```

Another istream member function that you might find useful is getline():

```
istream &getline(char *buffer, int length, char
delimiter = '\n');
```

getline() behaves just like the second version of **get()**, but it returns the delimiter character instead of pushing it back into the input stream.

```
ignore()
```

ignore() is used to discard characters from the input stream:

```
istream &ignore(int length = 1, int delimiter = EOF);
```

ignore() follows the same basic algorithm as getline(). It
reads up to length characters from the input stream and discards them. This extraction stops if the specified delimiter is
encountered. Notice that each of these parameters has a default
value, which allows you to call ignore() without parameters.

Here's an example:

```
char buffer[ 100 ];
cin.ignore( 3 ).getline( buffer, 100 );
cout << buffer;</pre>
```

This code drops the first three characters from the input stream and then reads the remainder of the first line of input into buffer. Next, the string stored in buffer is sent to the console. Notice that the value returned by ignore() is used to call getline(). This is equivalent to the following sequence of code:

```
cin.ignore( 3 );
cin.getline( buffer, 100 );
```

Once again, pick a style you're comfortable with and stick with it.

peek()

peek() allows you to sneak a peek at the next character in the input stream without removing the character from the stream:

```
int peek();
```

Just like the third version of get(), peek() returns an int rather than a char. This allows peek() to return the end-of-file character, if appropriate, which makes peek() perfect for peeking at the next byte in a file.

put()

The **ostream** member function **put()** provides an alternative to the << operator for writing data to the output stream:

```
ostream &put(char c);
```

put() writes the specified character to the output stream. It then returns a reference to the stream, so put() can be used in a sequence. Here's an example:

```
cout.put( 'H' ).put( 'i' ).put( '!' );
```

As you might have guessed, the preceding line of code produces this friendly message:

Hi!

putback()

putback() puts the specified char back into the input stream, making it the next character to be returned by the next input operation:

```
istream &putback(char c);
```

Note that **c** must be the last character extracted from the stream. Since **putback()** returns an **istream** reference, it can be used in a sequence, similar to the example combining **ignore()** and **getline()** shown earlier.

seekg() and seekp()

The **istream** member function **seekg()** gives you random access to an input stream:

```
istream &seekg(streampos p);
```

Call **seekg()** to position a stream's **get** pointer exactly where you want it. A second version of **seekg()** allows you to position the **get** pointer relative to the beginning or end of a stream or relative to the current **get** position:

```
istream &seekg( streamoff offset, relative_to
  direction );
```

In this second version of **seekg()**, the second parameter is one of **ios::beg, ios::cur**, or **ios::end**.

The ostream member function seekp() gives you random access to an output stream:

```
ostream &seekp(streampos p);
```

Just like **seekg()**, **seekp()** allows you to position a stream's **put** pointer exactly where you want it. **seekp()** also comes in a second flavor:

```
ostream &seekp( streamoff offset, relative_to
  direction );
```

For more detail on **seekg()**, **seekp()**, and their miscellaneous support routines, browse through **<iostream.h>**.

Some Useful Utilities

To aid you with your stream input and output operations, C++ provides a set of standard utilities that you may find useful (plain old ANSI C also provides these routines). To use any of the utilities described in this section, you must include the header file <ctype.h>.

Each of the thirteen functions takes an **int** as a parameter. The **int** represents an ASCII character. Two of the functions, **tolower()** and **toupper()**, map this character either to its lowercase or its uppercase ASCII equivalent. For example, **tolower('A')** would return **'a'**, while **toupper('x')** would return **'x'**.

The remaining eleven functions return either 1 or 0, depending on the nature of the character passed in. The function <code>isalpha()</code> returns 1 if its argument is a character in the range <code>'a'</code> through <code>'z'</code> or in the range <code>'A'</code> through <code>'Z'</code>. The function <code>isdigit()</code> returns 1 if its argument is a character in the range <code>'0'</code> through <code>'9'</code>. The function <code>isalnum()</code> returns 1 if its argument causes either <code>isalpha()</code> or <code>isdigit()</code> to return 1.

The function <code>ispunct()</code> returns <code>1</code> if the character is a punctuation character. The punctuation characters are ASCII characters in the ranges 33–47, 58–64, 91–96, and 123–126 (consult your nearest ASCII chart). The function <code>isgraph()</code> returns <code>1</code> if its argument causes <code>isalpha()</code>, <code>isdigit()</code>, or <code>ispunct()</code> to return <code>1</code>.

islower() returns 1 if the character is in the range 'a' through 'z'. isupper() returns 1 if the character is in the range 'A' through 'Z'. isprint() returns 1 if the character is a printable ASCII character. iscntrl() returns 1 if the character is a control character. isspace() returns 1 if the character has an ASCII value in the range 9–13 or if it has a value of 32 (space). Finally, isxdigit() returns 1 if the character is a legal hex digit (0–9, a–f, or A–F).

The thirteen functions just described are summarized in the table in Figure 8.1.

Working with Files

iostream contains two classes created especially for working
with files. The ifstream class is derived from istream and is
designed to read data from a file. Since ifstream inherits
istream's member functions, you can use an ifstream object
to take advantage of istream functions like get().

FIGURE 8.1 Some useful utilities. Don't forget to include the file <ctype.h>.

Some Useful Utilities	
int isalnum(int);	True if char isalpha() or isdigit().
int isalpha(int);	Is char in range a-z or A-Z?
int iscntrl(int);	Is char control character?
int isdigit(int);	Is char in range 0-9?
int isgraph(int);	True if char isalpha() or isdigit() or ispunct().
int islower(int);	Is char in range a-z?
int isprint(int);	Is char printable ASCII character?
int ispunct(int);	Is char in ASCII range 33-47, 58-64, 91-96, 123-126?
int isspace(int);	Is char in ASCII range 9–13 or 32?
int isupper(int);	Is char in range A to Z?
int isxdigit(int);	Is char in ASCII range 0-9, a-f, A-F?
int tolower(int);	Maps upper case to lower case.
int toupper(int);	Maps lower case to upper case.

The **ofstream** class is derived from **ostream** and is designed to write data to a file. Since **ofstream** inherits **ostream**'s member functions, you can use an **ofstream** object to take advantage of **ostream** functions like **put()**.

Reading Data from a File

The **ifstream** constructor comes in several varieties. The most widely used of these takes two parameters:

```
ifstream(const char* name, int mode=ios::in );
```

The first parameter is a null-terminated string containing the name of a file to be opened. The second describes the mode used to open the file. The legal modes are described in the table in Figure 8.2. They are declared as part of the <code>ios</code> class (check out <code><iostream.h></code>). The default mode is <code>ios::in</code>, which opens the file for reading.

FIGURE 8.2
These file-opening modes are declared as part of the ios class.

File-Opening Modes		
ios::in	Input allowed	
ios::out	Output allowed	
ios::ate	Seek to EOF at open	
ios::app	Output allowed, append only	
ios::trunc	Output allowed, discard existing contents	
ios::nocreate	Open fails if file doesn't exist	
ios::noreplace	Open fails if file does exist	



Some operating systems (such as Unix) support a third, optional parameter for ifstream (and for ofstream as well). The third parameter specifies the protection level used to open the file. In general, the protection parameter is used only with multiple-user operating systems where more than one person has access to the same set of files. Read your development environment manual to see whether this extra parameter is supported.

Since you'll most likely want to use the default mode of ios::in when you open a file for reading, you can leave off the last parameter when you create an ifstream object:

```
ifstream readMe( "My File" );
```

This definition creates an **ifstream** object named **readMe**. Next, it opens a file named **My File** for reading, attaching the open file to **readMe**.

ifstream objects have data members that track whether a file is attached to the stream and, if so, whether the file is open for reading. If a file is attached and open for reading, a **get** pointer is maintained that marks how far you've read into the file. Normally, the **get** pointer starts life at the very beginning of the file.

Once your file is opened for reading, you can use all of the **iostream** input functions described earlier to read data from the

file. For example, the following code opens a file and then reads a single character from it:

```
char     c;
ifstream    readMe( "My File" );
readMe.get( c );
```

A File-Reading Example

Our first sample program uses this technique to read a file and display the contents in the console window. If THIN C++ is already running, close the current project by selecting **Close Project** from the **Project** menu. If THIN C++ isn't running, launch it by double-clicking on the **THIN Project Manager**. Either way, when prompted for a project file to open, go into the **THIN C++ Projects** folder, open the subfolder named **Chap 08.01 - readMe**, and open the project file named **readMe**. Next, run **readMe**. by selecting **Run** from the **Project** menu. Here's what you'll see:

```
The Darlan-Ferengi wars raged on
for centuries before the final battle,
known as the "Dawn of Arcturus", was fought.
```

Hit a return to exit **readMe**. Let's take a look at the source code.

The readMe Source Code

As usual, readMe.cp starts by including <iostream.h>. Next, you'll encounter a new include file, <fstream.h>, which contains the declarations of the ifstream and ofstream classes (take some time and look through this include file; you'll learn a lot about the nooks and crannies of iostream file management):

```
#include <iostream.h>
#include <fstream.h>
```

main() starts by defining an ifstream object named readMe,
asking the constructor to open the file named My File with the
default mode of ios::in:

```
int main()
{
  ifstream readMe( "My File" );
```

We're now ready to read the contents of the file.

The variable \mathbf{c} is used to hold each character read from the file:

```
char c;
```

Next comes a while loop that reads the contents from the file associated with readMe, one character at a time. Each time a character is successfully read, it is written out to the console. Notice that the ifstream object readMe is used just like the istream object cin when it comes to calling get(), which is true for all of the other istream member functions as well:

```
while ( readMe.get( c ) )
    cout << c;
return 0;
}</pre>
```

You may be wondering how this loop ever terminates. Since <code>get()</code> returns an <code>istream</code> reference, how will <code>readMe.get(c)</code> ever evaluate to false? The answer to this question lies in understanding the <code>iostream</code> state bits.

The iostream State Bits

Every stream, whether an **istream** or an **ostream**, has a series of four **state bits** associated with it:

```
enum io_state
{
   goodbit=0,
   eofbit=1,
   failbit=2,
   badbit=4
};
```

iostream uses these bits to indicate the relative health of their associated stream. You can poke and prod these bits yourself, but there are four functions that reflect each bit's setting.

For example, the function

```
int good();
```

returns nonzero if the stream used to call it is ready for I/O. Basically, if **good()** returns **1**, you can assume that all is right with your stream and expect that your next I/O operation will succeed.

The function

```
int eof();
```

returns **1** if the last I/O operation puts you at end-of-file. The function

```
int fail();
```

returns 1 if the last operation fails for some reason. As an example, an input operation might fail if you try to read a **short** but encounter a text string instead.

The function

```
int bad();
```

returns **1** if the last operation fails *and* the stream appears to be corrupted. When **bad()** returns **1**, you're in deep guacamole. Finally, the function

```
void clear( int newState=0 );
```

is used to reset the state bits to the state specified as a parameter. In general, you should call clear() without specifying a parameter. clear()'s default parameter sets the state bits back to the pristine, good setting. If you don't clear the state bits after a failure, you won't be able to continue reading data from the stream. (You'll see an example of this in a moment.)

For the most part, you should focus on the value returned by <code>good()</code>. As long as <code>good()</code> returns <code>1</code>, there's no need to check any of the other functions. Once <code>good()</code> returns <code>0</code>, you can find out why by querying the other three state functions.

The Coolness of good()

Now comes the cool part. In the program **readMe.cp**, we encountered a **while** loop that used an **iostream** function as its conditional expression:

```
while ( readMe.get( c ) )
    cout << c;</pre>
```

What caused this **while** loop to exit? **readMe.get(c)** returns a reference to **readMe**, correct? Actually, this is where the C++ compiler displays a little sleight of hand. When the compiler detects an **iostream** I/O function used where an **int** is expected, it uses the current value of **good()** as the return value for the function. The previous **while** loop exits when **readMe.get(c)** either fails or hits an end-of-file.

A good() Example

Our second sample program demonstrates the basics of working with the iostream state bits and state bit functions. Close the current project by selecting **Close Project** from the **Project** menu. When prompted for a project file to open, go up to the **THIN C++ Projects** folder, open the subfolder named **Chap 08.02 - stateBits**, and open the project file named **stateBits**. Next, run **stateBits**. by selecting **Run** from the **Project** menu. Here's what you'll see:

Type a number:

Type a number small enough to fit inside a **short**, like 256:

```
Type a number: 256
```

When you hit a return, **stateBits** will tell you what your number is and then ask you to type another:

```
Your number is: 256

Type a number:
```

This time, type the letter *x* and hit a return. **stateBits** will tell you that the *x* is not a number and then ask you for another number:

```
Type a number: x x is not a number...Type 0 to exit Type a number:
```

Now type the number 0, which tells **stateBits** to drop out of its main loop:

```
Type a number: 0 Goodbye...
```

Hit a return to exit **stateBits**. Let's take a look at the source code.

The stateBits Source Code

stateBits.cp starts with the usual **#include** (since we won't be doing any file I/O, there's no need to include **<fstream.h>**):

```
#include <iostream.h>
```

stateBits creates a loop that reads in a number and then prints the number in the console window. If the number entered is 0, the program exits. Things start to get interesting when a letter is entered instead of a number.

```
int main()
{
  char done = false;
  char c;
  short number;
```

Note that **done** acts as a Boolean logic operator. When it is set to **true**, the loop exits. **c** and **number** are used to hold data read from the console.



Some C++ environments declare true and false; others don't. Since true and false aren't technically part of the C++ language, be prepared to add them to your header files. THIN C++ takes care of this for you.

We enter the main loop, are prompted for a number and then use >> to read the number from the console:

```
while ( ! done )
{
  cout << "Type a number: ";
  cin >> number;
```

If a number appropriate for a **short** is typed at the prompt, **cin.good()** returns **true**:

```
if ( cin.good() )
```

If the number typed is 0, we say goodbye and drop out of the loop; otherwise, we display the number and start all over again:

If the input is of the wrong type (the letter x or 1.34, for instance) or is a number that is too large (99999) or too small (-72999), the input operation fails and **cin.fail()** returns 1:

```
else if ( cin.fail() )
```

The first thing we must do is call **clear()** to reset the state bits (if we don't clear the state bits back to their supple, healthy state, we won't be able to continue reading data from the stream):

```
{
  cin.clear();
```

Once the state bits are reset, we read the character that caused the the stream to choke. Since we're not trying to interpret this character as a number, this read won't fail. Having read in the offending character, we display it, along with an appropriate message on the console:

```
cin.get( c );
cout << c << " is not a number...";
cout << "Type 0 to exit\n\n";
}</pre>
```



This example implements a pretty simple-minded recovery algorithm. If you typed in something like xxzzy, the loop would fail five times since you knock out only a single character with each recovery. You might want to try your hand at a more sophisticated approach. For example, you might use cin.ignore() to suck in all the characters up to and including a carriage return. Better yet, you might use cin.get() to read in the remainder of the offending characters and then package them in an appropriate error message.

The final possibility lies with a call to **bad()**. Since the **bad** bit will likely never be set, you'll probably never see this message. No sense taking chances, though:

```
else if ( cin.bad() )
{
   cout << "\nYikes!!! Gotta go...";
   done = true;
}
return 0;</pre>
```

More File Info

Earlier, the **ifstream** constructor was used to open a file for reading:

```
ifstream readMe( "My File" );
```

In the same way, the **ofstream** constructor can be used to open a file for writing:

```
ofstream writeMe( "My File" );
```

Writing Data to a File

The **ofstream** constructor takes two parameters, with **ios::out** used as the default **mode** parameter. Note that you can pass more than one **mode** flag at a time. To open a file for writing if the file *doesn't* already exist, try something like this:

```
ofstream writeMe( "My File", ios::out |
ios::nocreate );
```

Refer back to the table in Figure 8.2 for the rest of the **mode** flags.



There is a way to open a file for both reading and writing. Use the fstream class and pass both the ios::in and ios::out mode flags, like this:

```
fstream inAndOut( "Read and Write", ios::in
    | ios::out );
```

The fstream class is set up with two file position indicators, one for reading and one for writing. You really should read through the file <fstream.h>. You'll find all kinds of cool stuff in there. While you're at it, read through <iostream.h> as well. If you see a file named <stream.h>, beware! <stream.h> was written to support a library known as streams, a predecessor to iostream. <stream.h> is obsolete.

Once your file is open, you can close it by calling the **close()** member function:

```
writeMe.close();
```

In general, this call isn't really necessary since the **ifstream** and **ofstream** destructors automatically close the file attached to their associated stream.

You can also create an **ifstream** or **ofstream** without associating it with a file. Why would you want to do this? If you planned on opening a series of files, one at a time, you might want to do this by using a single stream, not by declaring one stream for each file. Using a single stream is more economical. Here's an example:

```
ifstream readMe;
readMe.open( "File 1" );
// Read contents - be sure to include error checking!
readMe.close();
readMe.open( "File 2" );
// Read contents - be sure to include error checking!
```

```
readMe.close();
// Repeat this as necessary...
read(), write(), and Others
```

There are some **istream** member functions that are particularly useful when dealing with files. The member function **read()** reads a block of **size** bytes and stores the bytes in the buffer pointed to by **data**:

```
istream &read(void *data, int size);
```

As you'd expect, if an end-of-file is reached before the requested bytes are read, the **fail** bit is set. The member function **istream::gcount()** returns the number of bytes successfully read:

```
size_t gcount();
```

The member function write() inserts a block of size bytes from the buffer pointed to by data:

```
ostream &write(const void *data, size_t size);
```

The member function ostream::pcount() returns the number of bytes inserted by the preceding write() call:

```
size_t pcount();
```

Customizing iostream

There are times when the standard operators and member functions of **iostream** just don't cut it. For example, remember the **MenuItem** class we declared in Chapter 7:

```
class MenuItem
{
  private:
    float price;
    char name[ 40 ];
```

Suppose you want to display the contents of a **MenuItem** using **iostream**. You can write a **DisplayMenuItem()** member function that takes advantage of **iostream**, but that is somewhat awkward. If you want to display a **MenuItem** in the middle of a **cout** sequence, you have to break the sequence up, sandwiching a call to **DisplayMenuItem()** in the middle:

```
cout << "Today's special is: ";
myItem.DisplayMenuItem();
cout << "...\n";</pre>
```

Wouldn't it be nice if **iostream** knew about **MenuItem**s so that you could do something more convenient, like this:

```
cout << "Today's special is: " << myItem << "...\n";</pre>
```

Why, there *is* a way to do this, after all! Using the techniques covered in Chapter 7, you create an **operator**<<() function that knows exactly how you want your **MenuItem** displayed. (You'll see an example of this in a moment.)

What's more, you can overload the >> operator, providing an operator>>() function that knows how to read in a MenuItem. The only restriction on both of these cases is that your >> and << overloading functions must return the appropriate stream reference so that you can use the >> and << operators in a sequence.

An >> and << Overloading Example

Our next sample program extends the ostream and istream classes by adding functions that overload both >> and <<. Close the current project by selecting **Close Project** from the **Project** menu. When prompted for a project file to open, go into the **THIN** C++ Projects folder, open the subfolder named **Chap 08.03** - overload, and open the project file named overload. Next,

run overload. by selecting **Run** from the **Project** menu. Here's what you'll see:

```
Spring Rolls ($2.99)
Hot and Sour Soup ($3.99)
Hunan Chicken ($8.99)
General Tso's Shrimp ($9.99)
Spring Surprise ($15.99)
```

Hit a return to exit **overload**. Let's take a look at the source code.

The overload Source Code

overload.cp starts with some familiar #includes and a const definition from Chapter 7's **menu** program:

```
#include <iostream.h>
#include <fstream.h>
#include <string.h>
const short kMaxNameLength = 40;
```

The MenuItem class is a slightly modified version of the one in Chapter 7. For one thing, the constructor is left out. Instead of initializing the data members when a MenuItem is created, iostream is used to read in a series of MenuItems from a file and initialize each data member using the newly added SetName() and SetPrice() member functions:

```
//---- MenuItem
class MenuItem
 private:
   float price;
   char name[ kMaxNameLength ];
 public:
   void
         SetName( char *itemName );
   char
         *GetName();
   void
        SetPrice( float itemPrice );
   float GetPrice();
};
```

SetName() is used to set the value of the **name** data member:

```
void MenuItem::SetName( char *itemName )
{
   strcpy( name, itemName );
}
```

GetName() returns a pointer to the **name** data member. By giving the caller of this **public** function direct access to **name**, we're sort of defeating the purpose of marking **name** as **private**. A more appropriate approach might be to have **GetName()** return a copy of **name**. For the purposes of discussion, the version of **GetName()** shown next will do:

```
char *MenuItem::GetName()
{
   return( name );
}

SetPrice() is used to set the value of the price data member:

void MenuItem::SetPrice( float itemPrice )
{
   price = itemPrice;
}

GetPrice() returns the value of the price data member:

float MenuItem::GetPrice()
{
   return( price );
}
```

The operator>>() function is called by the compiler whenever the >> operator is encountered having an istream as its left operand and a MenuItem as its right operand. Since all >> sequences are resolved to istream references, the left operand is always an istream object. To make this a little clearer, imagine an >> sequence with several objects in it:

```
cin >> a >> b;
```

iostream starts by evaluating this expression from the left, as if
it were written like this:

```
(cin >> a) >> b;
```

Since the >> operator resolves to an **istream** object, the expression **cin** >> **a** resolves to **cin**, leaving this:

```
cin >> b;
```

The same logic holds true for the << operator:

```
cout << a << b;
```

As the compiler evaluates this expression from left to right, the left operand of the << operator is always an **ostream** object.

The point is, whether **istream** or **ostream**, all an **operator()** function needs to do to support sequences is to return the stream reference passed in as the first parameter:

```
//----- iostream operators
istream &operator>>( istream &is, MenuItem &item )
{
  float itemPrice;
  char itemName[ kMaxNameLength ];
```

operator>>() reads a single MenuItem object from the specified input stream. First, getline() is used to read the item's name. Notice that the second parameter to getline() is used to limit the number of characters read in, ensuring that itemName doesn't exceed its bounds. SetName() is used to copy the entered name into the name data member:

```
is.getline( itemName, kMaxNameLength );
item.SetName( itemName );
```

Then, >> is used to read the item's price into itemPrice, and SetPrice() is used to copy itemPrice into the price data member:

```
is >> itemPrice;
item.SetPrice( itemPrice );
```

When the extraction operator reads the price from the input stream, it leaves the carriage return following the number unread. ignore() is used to grab the carriage return, leaving the stream set up to read the next MenuItem:

```
is.ignore( 1, '\n' );
```

Finally, the stream passed in to the **operator>>()** function is returned, preserving the integrity of the sequence:

```
return( is );
}
```

operator<<() is somewhat simpler. It uses << to write the
name and price data members:</pre>

Once again, the stream passed in as the first parameter is returned:

```
return( os );
}
```

main() declares an ifstream object and ties it to the file named Menu Items. This file contains a list of MenuItems with the name and price of each item appearing on its own line:

```
//---- main()
int main()
{
   ifstream readMe( "Menu Items" );
```

main() also declares a MenuItem object named item. Notice
that no parameters are passed because there's no constructor to
do anything with the parameters:

```
MenuItem item;
```

Next, a while loop is used to read in all the MenuItems that can be read from the input stream (which is, in this case, a file named Menu Items). The overloaded version of >> is used to read in a MenuItem, and the overloaded version of << is used to display the MenuItem in the console window:

```
while ( readMe >> item )
   cout << item << "\n";
return 0;
}</pre>
```

Here's what appears on the console:

```
Spring Rolls ($2.99)
Hot and Sour Soup ($3.99)
Hunan Chicken ($8.99)
General Tso's Shrimp ($9.99)
Spring Surprise ($15.99)
```



It's important to note that operator>>() and operator<<() are designed to work with any input and output stream. In this case, the MenuItems are read from a file and displayed in the console window. By making a few changes to main()—and not changing the two operator() functions—you can easily change the program to read from standard input (you'd probably want to add in a prompt or two) and send the output to a file. That's the real beauty of iostream!

Formatting Your Output

In the preceding program, we overloaded the << operator so that we could display a **MenuItem** precisely the way we wanted it to appear. Unfortunately, there's no way to overload the << operator to customize the appearance of built-in data types such as **short** or **float**. Fortunately, **iostream** provides several mechanisms that allow you to customize your I/O operations.



In general, iostream follows some fairly simple rules when it comes to formatting output. If you insert a single char in a stream, exactly one character position is used. When some form of integral data is inserted, the insertion is exactly as wide as the number inserted, including space for a sign, if applicable. No padding characters are used.

When a float is inserted, room is made for up to six places of precision to the right of the decimal place. Trailing zeros are dropped. If the number is either very large or very small (how big or how small depends on the implementation), exponential notation is used. Again, room is made for a sign, if applicable. For example, the number 1.234000 takes up five character positions in the stream since the trailing zeros are dropped:

1.234

When a string is inserted, each character, not including any null terminator, takes up one character position.

The Formatting Flags

The ios class maintains a set of flags that control various formatting features. You can use the ios member functions setf() and unsetf() to turn these formatting features on and off. Each feature corresponds to a bit in a bit field maintained by the ios class.

Some features are independent, while others are grouped together. For example, the flag ios::skipws determines whether white space is skipped during extraction operations. This feature is not linked to any other features, so it may be turned on and off without impacting any of the other formatting flags.

To turn an independent flag on and off, you use the **setf()** and **unsetf()** member functions as follows:



Alternatively, you can use the flag() member function to retrieve the current flag settings as a group, OR the new flag into the group, and then use flag() again to reset the flag settings with the newly modified bit field:

```
myFlags = cout.flag(); // returns flag bitfield
myFlags |= ios::skipws; // ORs in skipws flag
cout.flag( myFlags ); // resets flags
```

int myFlags;

Unless you really need to work at this level, you're better off sticking with setf() and unsetf(). Just thought you'd like to see the whole picture.

Turning independent flags on and off individually is no problem, but things get interesting when flags are grouped. For example, the radix flags determine the default base used to represent numbers in output. The radix flags are **dec**, **oct**, and **hex**, representing decimal, octal, and hexadecimal formats, respectively. The problem here is that only one of these flags should be turned on at a time. If you use **setf()**, you could easily turn all three flags on, producing unpredictable results.

To handle grouped flags, **setf()** makes use of a second, optional parameter that indicates which group a flag belongs to.

For example, the radix flags **dec**, **oct**, and **hex** belong to the group **basefield**. To set the **hex** flag, you make the following call:

```
cout.setf( ios::hex, ios::basefield );
```

This call ensures that when the specified flag is set, the remainder of the fields in the group get unset.

The grouped flags left, right, and internal are part of the adjustfield group. They are used in combination with the width() member function. width() determines the minimum number of characters used in the next numeric or string output operation. If the left flag is set, the next numeric or string output operation appears left-justified in the currently specified width(). The output is padded with the currently specified fill() character. You can use fill() to change this padding character. An example should make this formatting feature clearer.

A Formatting Example

#include <iostream.h>

Close the current project by selecting **Close Project** from the **Project** menu. When prompted for a project file to open, go into the **THINC++ Projects** folder, open the subfolder named **Chap 08.04 - formatter**, and open the project file named **formatter**. Next, run **formatter**. by selecting **Run** from the **Project** menu. Here's what you'll see:

```
202
202xx
-=====101
****Hello
```

Hit a return to exit **formatter**. Let's take a look at the source code.

```
The formatter Source Code formatter.cp starts with the standard #include:
```

main() starts by displaying the number 202 in the console
window:

```
//---- main()
int main()
{
   cout << 202 << '\n';</pre>
```

As you'd expect, this code produces the following line of output:

202

Next, width() is used to set the current width to 5, and fill() is used to make **x** the padding character:

```
cout.width( 5 );
cout.fill( 'x' );
```

Remember, width() applies only to the very next string or numeric output operation, even if it is part of a sequence. The padding character lasts until the next call of fill() or until the program exits.



If your output operation produces more characters than the current width setting, don't worry. All your characters will be printed.

Now, the **left** flag is set, asking **iostream** to left-justify the output in the field specified by **width()**:

```
cout.setf( ios::left, ios::adjustfield );
cout << 202 << '\n';</pre>
```

When the number 202 is printed again, it appears like this:

202xx

Then, width() is pumped up to 10, fill() is changed to =, and the internal flag is set. The internal flag asks iostream to place padding in between a number and its sign, if appropriate, so that it fills the width() field:

```
cout.width( 10 );
cout.fill( '=' );
cout.setf( ios::internal, ios::adjustfield );
cout << -101 << '\n';</pre>
```

Printing the number –101 produces the following line of output:

```
-=====101
```

Finally, width() is reset to 10 (otherwise, it would have dropped to its default of 0), fill() is set to *, and the right flag is set to right-justify the output:

```
cout.width( 10 );
cout.fill( '*' );
cout.setf( ios::right, ios::adjustfield );

cout << "Hello";

return 0;
}</pre>
```

When the string **"Hello"** is printed, this line of output appears:

```
****Hello
```

More Flags and Methods

The **showbase** flag is independent. If it is set, octal numbers are displayed with a leading zero and hex output appears with the two leading characters **0x**. The **showpoint**, **uppercase**, and **showpos** flags are also independent. If **showpoint** is set, trailing zeros in floating-point output are displayed. If **uppercase** is set, **E** rather than **e** is used in scientific notation and **X** rather than **x** is

used in displaying hex numbers. If **showpos** is set, positive numbers appear with a leading +.

The **scientific** and **fixed** flags belong to the **floatfield** group. If **scientific** is set, scientific notation is used to display floating-point output. If **fixed** is set, standard notation is used. If neither bit is set, the compiler uses its judgment and prints very large or very small numbers using scientific notation and all other numbers using standard notation. To turn off both bits, you pass a zero instead of **fixed** or **scientific**:

```
cout.setf( 0, ios::floatfield );
```

Both the **fixed** and **scientific** flags are tied to the **precision()** member function. **precision()** determines the number of digits displayed after the decimal point in floating-point output:

```
cout.precision( 6 ); // The default for precision...
```

Finally, the **unitbuf** and **stdio** flags are related but not grouped. If **unitbuf** is set, the output buffer is flushed after each output operation. **stdio**, which is only for folks using C I/O, flushes **stdout** and **stderr** after every insertion.

Using Manipulators

iostream provides a set of special functions known as **manipulators** that allow you to perform specific I/O operations while you're in the middle of an insertion or an extraction. For example, consider this line of code:

```
cout << "Enter a number: " << flush;</pre>
```

This code makes use of the **flush** manipulator. When its turn comes along in the output sequence, the **flush** manipulator flushes the buffer associated with **cout**, forcing the output to appear immediately as opposed to waiting for the buffer to get flushed naturally (sort of like a C++ version of prunes!).

Just as an I/O sequence can appear in different forms, a manipulator can be called in several different ways. Here are two more examples, each of which calls the **flush** manipulator:

```
cout.flush(); // Call as a stream member function
flush( cout ); // Call with the stream as a parameter
```

Use whichever form fits in with the I/O sequence you are currently building. If you plan on calling any manipulators that take parameters, be sure to include the file <iomanip.h>. In addition, some iostream implementations require you to link with the math library to use certain manipulators. Check your development environment manual to be sure.

The Manipulators

dec(), oct(), and hex() turn on the appropriate format flags, thus turning off the rest of the flags in the basefield group. endl() places a carriage return ('\n') in its output stream and then flushes the stream. ends() places a null character in its output stream and then flushes the stream. ws() eats up all the white space in its input stream until it hits either an end-of-file or the first non-white-space character.

None of the manipulators presented so far take any parameters. The six remaining to be discussed all take a single parameter and require the included file <iomanip.h>.

setbase(int b) sets the current radix to either 8, 10, or 16.
setfill(int f) is a manipulator version of the fill() member
function. setprecision(int p) is the manipulator version of
precision().setw(intw) is the manipulator version of width().
setiosflags(long f) is the manipulator version of setf().
resetiosflags(long f) is the manipulator version of
unsetf().

Here are two manipulator examples. The line

```
cout << setbase( 16 ) << 256 << end1;
produces this line of output:

100
And, the line
cout << setprecision( 5 ) << 102.12345;</pre>
```

produces this line of output:

102.12

istrstream and ostrstream

If you've ever worked with the C stdio function sprintf(), you'll recognize a similar feature in C++. sprintf() allows you to perform all the standard I/O functions normally associated with printf() and fprintf() on an array of characters.

The **istrstream** and **ostrstream** classes offer all the power of their ancestor classes (**istream** and **ostream** and, ultimately, **ios**) and allow you to write formatted data to a buffer that you create in memory. Here's an example.

A strstream Example

Close the current project by selecting **Close Project** from the **Project** menu. When prompted for a project file to open, go into the **THINC++Projects** folder, open the subfolder named **Chap 08.05 - strstream**, and open the project file named **strstream**. Next, run **strstream**. by selecting **Run** from the **Project** menu. Here's what you'll see:

```
Number of characters written: 10 Buffer contents: abcdefghi
```

Hit a return to exit **strstream**. Let's take a look at the source code.

The strstream Source Code

strstream.cp starts with two #includes, the standard
<iostream.h> and the file required for the istrstream and
ostrstream classes, <strstrea.h>.

```
#include <iostream.h>
#include <strstrea.h>
```

The constant **kBufferSize** is used to define the size of the buffer that makes up the **ostrstream** object:

```
const short kBufferSize = 10;
```

main() creates a buffer to hold the stream's characters. The ostrstream constructor takes two parameters, a pointer to the buffer and the size of the buffer. The variable i is used to keep track of the number of characters written to the ostrstream:

```
//----- main()
int main()
{
  char    buffer[ kBufferSize ];
  ostrstream   ostr( buffer, kBufferSize );
  short    i = 0;
```

Next, a while loop uses ostr just as it would use cout, writing characters to the stream until an end-of-file causes the loop to terminate. iostream generates the end-of-file when the put() pointer points beyond the last character in the stream's buffer (just like its ifstream counterpart). When the loop exits, ten characters, from a to j, have been written to the stream's buffer:

```
while ( ostr << (char)('a' + i) )
   i++;</pre>
```

Now, the number of characters written to the stream is displayed:

Here's the output generated by the previous line of code:

```
Number of characters written: 10
```

Next, a null terminator is written on the last byte of the stream's buffer, creating a null-terminated string in **buffer**:

```
buffer[ kBufferSize - 1 ] = '\0';
```

Finally, the contents of the stream are printed:

```
cout << "Buffer contents: " << buffer;
return 0;
}</pre>
```

The previous line of code results in this line of output:

Buffer contents: abcdefghi

Just as an **ostrstream** object mirrors the behavior of **cout**, you can create a similar example, using an **istrstream** object, that mirrors the behavior of **istrstream**. The **istrstream** constructor takes the same two parameters as the **ostrstream** constructor.

Together, **istrstream** and **ostrstream** give you a powerful set of tools to use when you work with strings in memory.

Summary

iostream offers you a significant capability. You can use the classes and member functions provided to build an ample user interface for your programs. In the event that you're working with a class library that provides a more sophisticated, graphical user interface, you can still use **iostream** to manage your file I/O as well as to manage an in-core string manipulation facility.

Although I've made every effort to present a complete description of iostream, there's no substitution for a thorough reading of the iostream included files. You'll find complete listings of the four included files <iostream.h>, <fstream.h>, <iomanip.h>, and <strstrea.h> in appendices at the back of the book.

Chapter 9 starts off with a relatively new feature of C++ known as *templates* and then moves on to a potpourri of other topics. See you there!

Chapter 9

C++ Potpourri

This chapter takes you down the homestretch, exploring an array of miscellaneous C++ topics. Once you finish this chapter, you'll have completed the first phase of your C++ education.

This Chapter at a Glance

Templates

The Templates Approach

Declaring an Object Using a Template
A Template Argument List Containing More
Than One Type
Function Templates
Function Template Instantiation

A Template Example

Multiple Inheritance

A Multiple Inheritance Example Static Members Back to multiinh

Resolving Ambiguities

A Multiple-Root Example The Virtual Base Class Alternative A Virtual Base Class Example

Initialization Versus Assignment

const and Reference Types
A Member Initialization List Example

Memberwise Initialization

The Copy Constructor

A Memberwise Initialization Example

Summary

CONGRATULATIONS! YOU'VE REALLY COME A LONG way. By getting to this point in the book, you've built yourself a strong C++ foundation. Now you're ready for a few of the more advanced topics. We'll start off with one of the newest additions to C++, a feature known as **templates**.

Templates

When you design a class, you're forced to make some decisions about the data types that make up that class. For example, if your class contains an array, the class declaration specifies the array's data type. In the following class declaration, an array of **shorts** is implemented:

In this class, the constructor allocates an array of arraySize elements, each element of type short. The destructor deletes the array. The data member arrayPtr points to the beginning of the array. To make the class truly useful, you'd probably want to add a member function that gives access to the elements of the array. You might extend the class further by adding a bounds-checking feature.

This Array class works just fine as long as an array of **shorts** meets your needs. What happens when you decide that an Array of **shorts** doesn't quite cut it? Perhaps you need to implement an array of **longs** or, even better, an array of your own, homebrewed data type.

One approach you can use is to make a copy of the **Array** class (member functions and all) and change it slightly to implement an array of the appropriate type. For example, here's a version of the **Array** class designed to work with an array of **longs**:

```
class LongArray
{
  private:
```

There are definitely problems with this approach. You are creating a maintenance nightmare by duplicating the source code of one class to act as the basis for a second class. Suppose you add a new feature to your **Array** class. Are you going to make the same change to the **LongArray** class?

The Templates Approach

C++ templates allow you to parameterize the data types used by a class or function. Instead of embedding a specific type in a class declaration, you provide a template that defines the type used by that class. An example should make this a little clearer.

Here's a templated version of the **Array** class presented earlier:

The keyword **template** tells the compiler that what follows is not your usual, run-of-the-mill class declaration. Following the keyword **template** is a pair of angle brackets that surround the template's **template** argument list. This list consists of a series of comma-separated arguments (one argument is the minimum).

Each argument is made up of the keyword **class** followed by the argument name. In this case, the template argument list contains a single argument, **T**. Throughout the body of the class declaration that follows, the template arguments may be used as if they were data types. In the **Array** class, **T** is used to declare the data member **arrayPtr**.

Declaring an Object Using a Template

Once your class template is declared, you can use it to create an object. When you declare an object using a class template, you have to specify a template argument list along with the class name.

Here's an example:

```
Array<long> longArray( 20 );
```

The compiler uses the single parameter, **long**, to convert the **Array** template into an actual class declaration. This declaration is known as a **template instantiation**. The instantiation is then used to create the **longArray** object.

A Template Argument List Containing More Than One Type

As mentioned earlier, a template's argument list may contain more than one type. The **class** keyword must precede each argument, and an argument name may not be repeated.

Here's an example:

This template takes two arguments. The first, **Able**, is used to declare the constructor's single parameter. The second, **Baker**, is used in the declaration of **MemberFunction()** both as a return type and to declare the **MemberFunction()** parameter. Here's a definition of a **MyClass** object:

```
MyClass<long, char *> myObject( 250L );
```

Take a look at the template arguments. The first, **long**, will be substituted for **Able**. The second, **char ***, will be substituted for **Baker**.

Function Templates

The template technique can also be applied to functions. Here's an example of a function template declaration:

As you'd expect, the declaration starts with the **template** keyword, which is immediately followed by the template argument list. The types defined in the template argument list are then used freely throughout the remainder of the function declaration. Once again, a type may not be repeated in the template argument list, and the template argument list must contain at least one argument.

There is one additional rule that applies to function templates. Each of the template arguments must appear at least once in the function's signature. Since a function's signature does *not* include the function's return type, you must use each of the template arguments in the function's parameter list.



If you use a template to define a function, you must also include the same template information in the function's prototype. Here's a prototype for MyFunc():

```
template <class T, class U>
T MyFunc( T param1, U param2 );
```

Function Template Instantiation

When you call a function that has been templated, the compiler uses the parameters passed to the function to determine the types of the template arguments.

Here's a simple example:

```
template <class T>
void MyFunc( T param1 );
```

Suppose this function template were called as follows:

```
char *s;
MyFunc( s );
```

The compiler would match the type of the calling parameter (char *) with the type of the receiving parameter (T). In this case, an instantiation of the function is created, and the type char * is substituted for T everywhere it occurs.

Here's another example:

```
template <class T>
void MyFunc( T *param1 );
```

Suppose this function template were called as follows:

```
char *s;
MyFunc( s );
```

In this case, the type **char** * would be matched against the template argument type **T** *. Again, an instantiation is created, but this time the type **char** is substituted for **T**.

In the case where more than one parameter is used, the typematching process always starts with the first parameter and moves to the right. Each occurrence of a template argument type is checked and a substitute type deduced. Once a substitute type is determined, any further occurrences of that formal parameter must match the first occurrence *exactly*.

Consider this template:

```
template <class T>
void MyFunc( T param1, T param2 );
This call of MyFunc() won't compile:
short i;
int j;
MyFunc(i, j);
```

First, the compiler matches the first parameter and determines that **T** is a **short**. When the compiler moves on to the second parameter, it finds that **T** should be an **int**. Even though an **int** and a **short** are kissin' cousins, since they are not an exact match, the compiler coughs politely and then spits out your code.



If you so desire, you can overload a function template just as you overload any other function. Just remember that every call to a template function must match one and only one of the overloaded functions.

You can also design a nontemplated version of a function to work alongside a templated version. When a function call occurs, the compiler tries to match the parameters against the nontemplated version first. If the parameters match up, the nontemplated function is called. If no match is found, the regular template-matching process is started.

A Template Example

Our first sample program provides a basic demonstration of class and function templates. If THIN C++ is already running, close the current project by selecting **Close Project** from the **Project** menu. If THIN C++ isn't running, launch it by clicking on the **THIN Project Manager**. Either way, when prompted for a project file to open, go into the **THIN C++ Projects** folder, open the subfolder named **Chap 09.01 - template**, and open the project file named **template**. Next, run **template**. by selecting **Run** from the **Project** menu. Here's what you'll see:

```
index out of bounds(10)
myRay[0]: 1
myRay[1]: 4
myRay[2]: 16
myRay[3]: 64
myRay[4]: 256
myRay[5]: 1024
myRay[6]: 4096
myRay[7]: 16384
myRay[8]: 0
myRay[9]: 0
myLongRay[0]: 1
myLongRay[1]: 4
myLongRay[2]: 16
myLongRay[3]: 64
myLongRay[4]: 256
myLongRay[5]: 1024
myLongRay[6]: 4096
myLongRay[7]: 16384
myLongRay[8]: 65536
myLongRay[9]: 262144
```

Hit a return to exit **template**. Let's take a look at the source code.

The template Source Code

As usual, template.cp starts by including <iostream.h>. Next, a const, which is used at various points in the program, is declared:

```
#include <iostream.h>
const short kNumElements = 10;
```

template declares a class template named **Array**. **Array** implements an array of type **T**, where **T** is the template's single argument:

```
//----- Array

template <class T>

class Array
```

Array features three data members, all of them **private**. **arraySize** is the number of elements in the array; **arrayPtr** points to the beginning of the array; **errorRetValue** is identical in type to one of the array elements and comes into play when you try to exceed the bounds of the array:

```
{
  private:
    short arraySize;
    T *arrayPtr;
    T errorRetValue;
```

The Array() constructor allocates memory for the array, the destructor deletes the allocated memory, and operator[]() is used to implement bounds checking:

In the following code, notice the format used to define a class template member function. The function starts with the **template** keyword, followed by the template's argument list. Next comes the class name, followed by the argument types surrounded by angle brackets. Finally, the traditional :: is followed by the function's name and signature:

```
template <class T>
Array<T>::Array( short size )
```

The constructor uses its parameter, **size**, to initialize **arraySize**. Then, an array of **size** elements of type **T** is allocated. Finally, **errorRetValue** is initialized to zero:

```
{
  arraySize = size;
  arrayPtr = new T[ size ];
  errorRetValue = 0;
}
```

The destructor uses **delete** to delete the memory allocated for the array. This statement tells the compiler that the destructor should be applied to every element in the array pointed to by **arrayPtr** (without the [loperators, the destructor is called only for the first element of the array; while this is not particularly interesting in the case of an array of **shorts**, it is vital in working with an array of objects having a specific destructor):

```
template <class T>
Array<T>::~Array()
{
   delete [] arrayPtr;
}
```

operator[]() is called whenever an Array element is accessed via the [] operators. operator[]() first checks to see whether the index is out of bounds. If it is, an error message is printed and the pseudo-element, errorRetValue, is returned (by placing an unusual value in errorRetValue, you can clue the calling code to the fact that the array reference was illegal if printing an error message doesn't fit into your error-handling strategy):

```
template <class T>
T &Array<T>::operator[]( short index )
{
  if ( ( index < 0 ) || ( index >= arraySize ) )
  {
    cout << "index out of bounds(" << index << ")\n";
    return( errorRetValue );
}</pre>
```

If the index is in bounds, the appropriate element of the array is returned:

```
else
   return( arrayPtr[ index ] );
}
```

}

The next function in the source code is the templated function <code>Power()</code>. As you can see, <code>Power()</code> is declared using the <code>template</code> keyword and a single template type, <code>T. Power()</code> takes two parameters of type <code>T</code> and returns a value of type <code>T</code> (the key here is that the type of the two parameters must match <code>exactly</code>):

main() starts by defining a short version of Array and a
long version of Array (you could have declared a class named
EraserHead and used Array to create an array of EraserHeads):

When i is equal to knumElements, the array runs out-of-bounds, causing an error message to be printed on the console:

```
index out of bounds(10)
```

Next, a separator line is sent to the console:

```
cout << "---\n";
```

This loop prints the value of each element in the **short** array:

Here's the output:

```
myRay[0]: 1
myRay[1]: 4
myRay[2]: 16
myRay[3]: 64
myRay[4]: 256
myRay[5]: 1024
myRay[6]: 4096
```

```
myRay[7]: 16384
myRay[8]: 0
myRay[9]: 0
```

By the time we get to **Power(4,8)** we've reached the limits of a signed **short**. Our solution? Redo the whole thing using **long**s. Thank goodness for templates, eh?

This loop uses the same approach to fill the array of **long**s, but this time we won't let the array run out-of-bounds:

```
for ( i=0; i<kNumElements; i++ )
  myLongRay[ i ] = Power( longBase, (long)i );</pre>
```

We print a separator line and then print the elements of the **long** array:

```
cout << "---\n";
  for ( i=0; i<kNumElements; i++ )</pre>
    cout << "myLongRay[" << i</pre>
      << "]: " << myLongRay[ i ] << "\n";
  return 0;
}
   Here's the output:
myLongRay[0]: 1
myLongRay[1]: 4
myLongRay[2]: 16
myLongRay[3]: 64
myLongRay[4]: 256
myLongRay[5]: 1024
myLongRay[6]: 4096
myLongRay[7]: 16384
myLongRay[8]: 65536
myLongRay[9]: 262144
```


Templates are an extremely powerful part of C++. You might not make use of them right away, but as you develop more and more C++ code, you'll use templates to build a set of parameterized utility classes. For example, you'll probably want to create a linked-list template that you can customize to link up objects of varying types.

Multiple Inheritance

Our next topic is a variation on an earlier theme, class derivation. In the examples presented in Chapter 6, each derived class was based on a single base class. That doesn't have to be the case, however. C++ allows you to derive a class from more than one base class, a technique known as **multiple inheritance**. As its name implies, multiple inheritance means that a class derived from more than one base class inherits the data members and member functions from each of its base classes.

Why would you want to inherit members from more than one class? Check out the derivation chain in Figure 9.1. The ultimate base class, known as the **root base class**, in this chain is **Computer**. The two classes **ColorComputer** and **LaptopComputer** are

FIGURE 9.1 Multiple inheritance (the boldfaced data members are inherited).

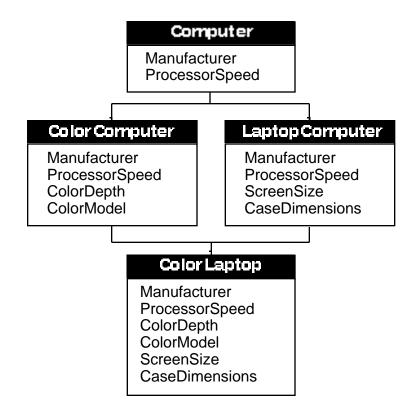

special types of **Computers**, each inheriting the nonprivate members from **Computer** and adding members of their own as well.

Here's where multiple inheritance comes into play. The class ColorLaptop is derived from both ColorComputer and LaptopComputer and inherits members from each class. Multiple inheritance allows you to take advantage of two different classes that work well together. If you want a program that models a color, laptop computer and you already have a ColorComputer class that manages color information and a LaptopComputer class that manages information about laptops, why reinvent the wheel? Think of the ColorLaptop class as the best of both worlds—the union of two already designed classes.



Just as with single inheritance, there are times when multiple inheritance makes sense and times when it is inappropriate. Use the "is a" rule to guide your design. If the derived class "is a" subset of the base class, derivation is appropriate. In our preceding example, a ColorComputer "is a" Computer and a LaptopComputer "is a" Computer. At the same time, a ColorLaptop is both a ColorComputer and a LaptopComputer. This model works just fine.

Let's look at another example. Imagine a Date class and a Time class. The Date class holds a date, like 07/27/94, while the Time class holds a time of day, like 10:24 am. Now suppose you wanted to create a TimeStamp class, derived from both the Date and Time classes. Would this make sense?

The answer is no! A TimeStamp is not a Date and it is not a Time. Instead, a TimeStamp "has a" Date and "has a" Time. When your derivation fits the "has a" model rather than the "is a" model you should rethink your design. In this case, the TimeStamp class should include Date and Time objects as data members, rather than using multiple inheritance.

"is a" indicates inheritance. If "has a" describes the relationship between your derived and base classes, rethink your design.

A Multiple Inheritance Example

Our second sample program demonstrates multiple inheritance as well as a few additional C++ features that you should find interesting. Close the current project by selecting **Close Project** from the **Project** menu. When prompted for a project file to open, go into the **THIN C++ Projects** folder, open the subfolder named **Chap 09.02 - multInherit**, and open the project file named **multInherit**. Next, run **multInherit**. by selecting **Run** from the **Project** menu. Here's what you'll see:

```
Favorite prey: Mice
Favorite toy: Ball of yarn
catID: 1
Favorite prey: Crickets
Favorite toy: Bottle cap
catID: 2
Favorite prey: Moths
Favorite toy: Spool of thread
_____
Cat destructor called: catID = 3...
Pet destructor was called!
Predator destructor was called!
Cat destructor called: catID = 2...
Pet destructor was called!
Predator destructor was called!
Cat destructor called: catID = 1...
Pet destructor was called!
Predator destructor was called!
```

Hit a return to exit **multInherit**. Let's take a look at the source code.

The multinherit Source Code multiinh.cp starts off with a few #includes and a familiar const:

```
#include <iostream.h>
#include <string.h>
const short kMaxStringLength = 40;
```

Next, three classes are defined. The **Predator** class represents a predatory animal while the **Pet** class represents a housepet. The **Cat** class is derived from both the **Predator** class and the **Pet** class. After all, a cat "is a" predator and a cat "is a" pet, right?

The **Predator** class is pretty simple. It features a single data member, a string containing the predator's favorite prey:

```
class Predator
  private:
    char favoritePrey[ kMaxStringLength ];
   The Predator class also features a constructor and a destructor:
  public:
        Predator( char *prey );
         ~Predator();
};
   The constructor initializes the favoritePrey data member
and then prints its value:
Predator::Predator( char *prey )
  strcpy( favoritePrey, prey );
  cout << "Favorite prey: "</pre>
    << prey << "\n";
   The destructor prints an appropriate message, just to let you
know it was called:
Predator::~Predator()
```

```
cout << "Predator destructor was called!\n\n";</pre>
   The Pet class is almost identical to the Predator class, with
a favorite toy substituted for a favorite prey:
//----- Pet
class Pet
 private:
    char favoriteToy[ kMaxStringLength ];
 public:
          Pet( char *toy );
          ~Pet();
};
Pet::Pet( char *toy )
  strcpy( favoriteToy, toy );
  cout << "Favorite toy: "</pre>
    << toy << "\n";
}
Pet::~Pet()
  cout << "Pet destructor was called!\n";</pre>
```

The Cat class is derived from both the Predator and Pet classes. Notice that the keyword public precedes each of the base class names and that the list of base classes is separated by commas:

```
//----- Cat:Predator,Pet
class Cat : public Predator, public Pet
```

Cat contains two data members. The first, catID, contains a unique ID for each Cat. While numbering your cats might not be

that useful, if we were talking about **Employee**s or **Computers**, a unique employee ID or serial number can be an important part of your class design.

Notice that the second data member, lastCatID, is declared using the static keyword.

```
{
   private:
    short catID;
   static short lastCatID;
```

Static Members

When you declare a data member or member function as **static**, the compiler creates a single version of the member that is shared by all objects in that class.

Why do this? **static** members can be very useful. Since a **static** data member is shared by all objects, you can use it to share information between all objects in a class.



One way to think of a static member is as a global variable whose scope is limited to the class in which it is declared. This is especially true if the static member is declared as private or protected.

In this case, **lastCatID** is incremented every time a **Cat** object is created. Since **lastCatID** is not tied to a specific object, it always holds a unique serial number (which also happens to be the number of **Cat**s created).

The declaration of a **static** data member is just that, a declaration. When you declare a **static** within a class declaration you need to follow it up with a definition in the same scope. Typically, you'll follow your class declaration immediately with a definition of the **static** data member, like this:

```
short Object::lastObjectID;
```

If you like, you can use this definition to initialize the **static** member. **static** data member scope is limited to the file it is declared in.



You'll typically stick your class declaration (along with the class's static member declarations) in a .h file. This is not the case for your static member definition. The definition should appear in the .cp file where it will be used.

Along with your **static** data members, you can also declare a **static** member function. Again, the function is not bound to a particular object and is shared with the entire class. If the class **MyClass** included a **static** member function named **MyFunc()**, you could call the function using this syntax:

```
MyClass::MyFunc();
```

Since there is no current object when MyFunc() is called, you don't have the advantages of this and any references to other data members or member functions must be done through an object.

static member functions are usually written for the sole purpose of providing access to an associated static data member. To enhance your design, you might declare your static data member as private and provide an associated static member function marked as public or protected.

Back to multiinh

The Cat class has a constructor and a destructor:

The **Cat** constructor uses a syntax first laid out in Chapter 6 to map its input parameters to the **Predator** and **Prey** constructors.

```
Cat::Cat( char *prey, char *toy ) :
   Predator( prey ), Pet( toy )
```

def'a nish' an

The list that follows the constructor's parameter list is called the **member initialization list**. As you can see, a colon *always* precedes a constructor's member initialization list.

Next, **lastCatID** is incremented and the new value assigned to **catID**. Then, the new ID and a separator line are printed:

The **Cat** destructor also prints a message containing the **catID**, just to make the program a little easier to follow:

Next, the **static** member **lastCatID** is defined. Without this definition, the program wouldn't compile. Notice also that we take advantage of this definition to initialize **lastCatID**.

```
short Cat::lastCatID = 0;
```



static data members, just like C++ globals, are automatically initialized to 0. To make the code a little more obvious, we kept the initialization in there, even though it is redundant.

Finally, main() creates three Cat objects. Compare the three Cat declarations with the program's output. Notice the order of constructor and destructor calls. Just as in Chapter 6's gramps program, the destructors are called in the reverse order of the constructors.

```
int main()

{
   Cat TC( "Mice", "Ball of yarn" );
   Cat Benny( "Crickets", "Bottle cap" );
   Cat Meow( "Moths", "Spool of thread" );
   return 0;
}
```

Resolving Ambiguities

Deriving a class from more than one base class brings up an interesting problem. Suppose the two base classes from our previous example, Predator and Pet, each have a data member with the same name (which is perfectly legal, by the way). Let's call this data member clone. Now suppose that a Cat object is created, derived from both Predator and Pet. When this Cat refers to clone, which clone does it refer to, the one inherited from Predator or the one from Pet?

As it turns out, the compiler would complain if the **Cat** class referred to just plain **clone** because it can't resolve this ambiguity. To get around this problem, you can access each of the two **clone**s by referring to


Predator::clone

or

Pet::clone

Here's another interesting problem brought on by multiple inheritance. Take a look at the derivation chain in Figure 9.2. Notice that the **Derived** class has two paths of inheritance back to its ultimate base class, **Root**.

FIGURE 9.2 Four classes in a derivation chain.

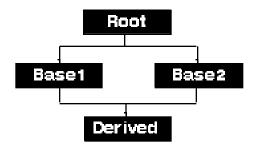

Since **Derived** is derived from both **Base1** and **Base2**, when a **Derived** object is created, **Base1** and **Base2** objects are created as well. When the **Base1** object is created, a **Root** object is created. When the **Base2** object is created, a second **Root** object is created.

Why is this a problem? Suppose **Root** contains a data member destined to be inherited by **Derived**. When **Derived** refers to the **Root** data member, which of the two **Root** objects contains the data member **Derived** is referring to? Sounds like another ambiguity to me.

A Multiple-Root Example

Before we resolve this latest ambiguity, here's an example that shows what happens when a derived class has two paths back to its root class. Close the current project by selecting **Close Project** from the **Project** menu. When prompted for a project file to open, go into the **THIN C++ Projects** folder, open the subfolder named **Chap 09.03 - nonVirtual**, and open the project

file named **nonVirtual**. Now, run **nonVirtual**. by selecting **Run** from the **Project** menu. Here's what you'll see:

Root constructor called Basel constructor called Root constructor called Base2 constructor called Derived constructor called

Hit a return to exit **nonVirtual**. Let's take a look at the source code.

The nonVirtual Source Code

As usual, nonVirtual.cp starts by including <iostream.h>:

#include <iostream.h>

nonVirtual declares the four classes shown in Figure 9.2. **Root** consists of a constructor that prints a message letting you know it was called:

```
public:
    Base1();
};
Base1::Base1()
  cout << "Base1 constructor called\n";</pre>
}
   Base2 is also derived from Root. Its constructor also prints a
message in the console window:
//---- Base2
class Base2 : public Root
 public:
   Base2();
Base2::Base2()
  cout << "Base2 constructor called\n";</pre>
   Derived is derived from both Base1 and Base2. Just like all
the other classes, Derived has its constructor print a message in
the console window just to let you know it was called:
//----- Derived
class Derived : public Base1, public Base2
  public:
   Derived();
};
Derived::Derived()
  cout << "Derived constructor called\n";</pre>
}
```

main() starts the constructor roller coaster by creating a
Derived object.

```
//----- main()
int main()
{
   Derived myDerived;
   return 0;
}
```

Since Base1 is listed first in the Derived derivation list, a Base1 object is created first. Since Base1 is derived from Root, it causes a Root object to be created. The Root constructor is called and then the Base1 constructor is called, resulting in the following two lines of output:

Root constructor called Basel constructor called

Next, this process is repeated as a **Base2** object is created. Since **Base2** is also derived from **Root**, it causes a *second* **Root** object to be created. Once the **Root** constructor is called, control returns to **Base2** and its constructor is called:

Root constructor called Base2 constructor called

Once the Base2 object is created, control returns to the Derived class and the Derived constructor is called:

Derived constructor called

The Virtual Base Class Alternative

Once again, think about the problem raised by this last example. If the **Root** class contained a data member, how would the **Derived** object access the data member? Which of the two **Root** objects would contain the *real* copy of the data member?

The answer to this problem lies in the use of **virtual base classes**. Back in Chapter 6's **whatAmI** program, we declared a member function as **virtual** to allow a derived class to override the function. Basically, when a virtual function is called by dereferencing a pointer or reference to the base class, the compiler follows the derivation chain down from the root class to the most derived class and looks at each level for a function matching the virtual function. The lowest-level matching function is the one that is called.



Virtual functions are extremely useful. Here's why. Suppose you're writing a program that implements a window-based user interface. Let's say that your standard window is broken into several areas (we'll call them panes) and that each pane is broken into subpanes. When the time comes to draw the contents of your window, your Window class's Draw() member function is called. If your Pane class also has a Draw() member function and if the Window version of Draw() is declared as virtual, the Pane's Draw() is called instead.

This same logic applies to your SubPane class and its Draw() function. If it is derived from Pane, the SubPane's Draw() is called instead of the Pane's Draw(). This strategy allows you to derive from an existing class using a new class whose actions are more appropriate or more efficient.

A similar technique can be used to remove the ambiguity brought up when a derived class has two different paths back to one of its ancestor classes. In our earlier example, Root was the root class, and Basel and Base2 were derived from Root. Finally, Derived was derived from both Basel and Base2. When we created a Derived object, we ended up creating two Root objects. Thus the ambiguity.

By declaring **Root** as a virtual base class, we're asking the compiler to merge the two **Root** object creation requests into a

single **Root** object (you'll see how to mark a class as **virtual** in a moment). The compiler gathers every reference to the virtual base class from the different constructor member initialization lists and picks the one that's tied to the deepest constructor. That reference is used, and all the others are discarded. This will become clearer as you walk through the next sample program.

To create a virtual base class, you must insert the **virtual** keyword in the member initialization lists between the virtual base class and the potentially ambiguous derived class. You don't need to mark every class between **Root** and **Derived** as long as the compiler has no path between **Root** and **Derived** that doesn't contain at least one **virtual** reference. The general strategy is to mark all *direct* descendants of the virtual base class. In this case, we'd need to place the **virtual** keyword in both the **Base1** and **Base2** member initialization lists.

Here's an example:

```
class Base1 : public virtual Root
{
  public:
    Base1();
};
```

The **virtual** keyword can appear either before or after the **public** keyword.

Once the **virtual** keywords are in place, the compiler ignores all member initialization list references to the **Root** class constructor except the deepest one. This sample **Derived** constructor includes a reference to the **Root** constructor:

```
Derived::Derived( short param ) : Root( param )
{
  cout << "Derived constructor called\n";
}</pre>
```

Even if the Base1 and Base2 constructors map parameters to the Root constructor, their mappings are superseded by the deeper, Derived constructor. By overriding the constructor mappings, the compiler makes sure that only a single object of the virtual base class (in this case, Root) is created.

A Virtual Base Class Example

This next example brings these techniques to life. Close the current project by selecting **Close Project** from the **Project** menu. When prompted for a project file to open, go up to the **THIN C++ Projects** folder, open the subfolder named **Chap 09.04 - virtual**, and open the project file named **virtual**. Next, run **virtual**. by selecting **Run** from the **Project** menu. Here's what you'll see:

```
Root constructor called
Basel constructor called
Base2 constructor called
Derived constructor called
-----
num = 3
```

Hit a return to exit **virtual**. Let's take a look at the source code.

```
The virtual Source Code
As usual, virtual.cp starts by including <iostream.h>:
```

```
#include <iostream.h>
```

This version of the ${\tt Root}$ class includes a data member named ${\tt num}$:

```
//-----
class Root
{
  protected:
    short num;

  public:
        Root( short numParam );
};
```

The **Root()** constructor takes a single parameter and uses it to initialize **num** (as you read through the code, try to figure out where the value for this parameter comes from):

```
Root::Root( short numParam )
 num = numParam;
  cout << "Root constructor called\n";</pre>
   Base1 is derived from Root, but it treats Root as a virtual
base class:
//---- Base1
class Basel : public virtual Root
 public:
   Base1();
};
Notice that the Basel() constructor asks the compiler to call the
Root () constructor and passes it a value of 1. Will this call take
place?
Basel::Basel() : Root( 1 )
  cout << "Base1 constructor called\n";</pre>
}
   Base2 also declares Root as a virtual base class. Now there's
no path down from Root that's not marked as virtual:
//----- Base2
class Base2 : public virtual Root
 public:
   Base2();
};
```

The Base2() constructor asks the compiler to pass a value of 2 to the Root() constructor. Is this the value that is passed on to the Root() constructor?

```
Base2::Base2() : Root( 2 )
{
  cout << "Base2 constructor called\n";
}</pre>
```

The **Derived** class doesn't need the **virtual** keyword (although it wouldn't hurt things if **virtual** were used here):

```
//----- Derived

class Derived : public Base1, public Base2
{
   public:
        Derived();
        short GetNum();
};
```

The **Derived()** constructor also asks the compiler to pass a value on to the **Root()** constructor. Since **Derived** is the deepest class, this is the constructor mapping that takes precedence. The **Root** data member **num** should be initialized with a value of 3:

```
Derived::Derived() : Root( 3 )
{
  cout << "Derived constructor called\n";
}</pre>
```

This function makes the value of num available to main(). Why can't main() reference num directly? Derived inherits num and main() doesn't:

```
short Derived::GetNum()
{
  return( num );
}
```

main() creates a Derived object, causing a sequence of
constructor calls:

```
//---- main()

int main()
{
    Derived myDerived;
```

Notice that the **Root** constructor is called only once:

Root constructor called Basel constructor called Base2 constructor called Derived constructor called

Finally, the value of **num** is printed (drum roll, please):

As you've already guessed, **num** has a value of 3, showing that the **Base1** and **Base2** constructor initializations are overridden by the deeper, **Derived** constructor initialization:

```
-----
num = 3
```

Initialization Versus Assignment

When you think about initialization, you might think of a line of code like this, where the variable \mathbf{i} is defined and *initialized* to a value of 21:

```
short i = 21;
```

In the following code **i** is defined and then a value of 21 is assigned to **i**:

```
short i;
i = 21;
```

The point here is that the compiler thinks of initialization and assignment as two completely different operations. Every constructor is broken into two parts, the initialization part and the assignment part. The initialization part takes place in the *member initialization list*. The assignment part takes place in the *body* of the constructor. The remainder of this section discusses things you should know about initialization and assignment as they relate to object construction.

const and Reference Types

When a **const** is defined, a value is tied to it at initialization. In the strictest sense of the word, you can't *assign* a value to a **const**. This code will compile:

```
const short kMaxNameLength = 20;
This code won't compile:
const short kMaxNameLength;
kMaxNameLength = 20; // Aaack!
```

The same holds true for a reference type. A reference type must be given a value at initialization. This code compiles just fine:

```
short number = 20;
short &numberAlias = number;
```

This code, on the other hand, is destined for failure:

You can declare a class data member as a **const** or a reference type, but beware! You can't provide these data members their

initial value via an assignment statement. Instead, you must use the member initialization list to do your dirty work for you. Here's an example:

Up until this point, we've used the member initialization list to map parameters from the constructor to a base class. In this example, we use the member initialization list to initialize some members. How appropriate!

If you include a data member name in the member initialization list and follow the name by an expression surrounded by parentheses, the compiler uses the expression to initialize the data member. In the previous chunk of code, kMaxNameLength is initialized to the value in constValue and numberAlias is set to reference number. As you can see, the member initialization list is pretty useful.

A Member Initialization List Example

Here's a working version of the previous chunk of code. Close the current project by selecting **Close Project** from the **Project** menu. When prompted for a project file to open, go into the **THIN C++ Projects** folder, open the subfolder named **Chap 09.05 - init**, and open the project file named **init**. Next,

run init. by selecting **Run** from the **Project** menu. Here's what you'll see:

```
Before: number = 10
After: number = 20
```

Hit a return to exit **init**. Let's take a look at the source code.

The init Source Code

As usual, init.cp starts by including <iostream.h>:

```
#include <iostream.h>
```

The declaration of **MyClass** is pretty much the same as the one you just saw. To simplify things, all the data members are declared as **public**. Also, the constructor is filled out to make things a little more interesting:

The constructor takes a single parameter, a value used to initialize our **const** variable. The member initialization list is used to initialize **kMaxNameLength** and **numberAlias**:

```
MyClass::MyClass( short constValue ) :
   kMaxNameLength( constValue ), numberAlias( number )
```

We start off by assigning number the value stored in kMaxNameLength:

```
number = kMaxNameLength;
```

To prove that **kMaxNameLength** is initialized properly, we print out the value in **number**:

```
cout << "Before: number = "
  << number << "\n";</pre>
```

This results in the following line of output:

```
Before: number = 10
```

Next, to prove that numberAlias references number, numberAlias is incremented by 10:

```
numberAlias += 10;
```

Now, we print out the value of **number** again:

Just as we'd hoped, **number** now has a value of 20:

```
After: number = 20
```

main() has a pretty simple job—just to create a MyClass object and pass a value of 10 to its constructor:

```
//---- main()
int main()
{
   MyClass myObject( 10 );
   return 0;
}
```

Memberwise Initialization

In certain instances, a special form of initialization, known as **memberwise initialization**, is used to initialize a newly created object. Basically, memberwise initialization is the technique of copying the contents of one object, data member by data member, into another object.

Memberwise initialization is a convenient way to make a copy of an object. Here's one way to do this:

```
MyClass obj1( 20 );
MyClass obj2 = obj1; // Uses memberwise initialization
```

The first line of code defines an object of class MyClass and passes the number 20 to its constructor. The second line creates another MyClass object, but instead of calling the constructor, the second object becomes an exact duplicate of the first object.



There are several other ways to achieve memberwise initialization. If you pass an object by value as a parameter, the compiler creates a local copy of your parameter, using memberwise initialization to initialize the copy. Also, if you write a function that returns an object, memberwise initialization is used to copy the returned object into the object receiving the returned object.

Memberwise initialization is easy to use and it *is* convenient, but there's a catch. Memberwise initialization makes an exact copy of an object, *including any and all pointers*. Suppose you declare a **Name** class that holds someone's first and last names:

```
class Name
{
  private:
    char *last;
    char *first;

  public:
    Name( char *firstParam, char *lastParam );
};
```

Suppose also that the Name() constructor allocates the memory for last and first, based on the size of the two constructor parameters. This being the case, you might define a Name like this:

```
Name yourAuthor( "Dave", "Mark" );
```

What happens if you define a second **Name** by using the memberwise initialization syntax?

Name aCopy = yourAuthor;

Now, **yourAuthor** and **aCopy** share some common memory. Both copies of **last** point to the same block of memory, and both copies of **first** point to the same block of memory. If you **delete** one of the objects, the other object is left with a dangling pointer. That can be a problem.

The Copy Constructor

You can provide a memberwise initialization function for any of your classes. Before the compiler does a memberwise copy, it first checks to see whether your class includes an overloaded version of your constructor having the form

MyClass(const MyClass&)

where **MyClass** is the class being copied. This special constructor is known as a **copy constructor**.

If you provide a copy constructor, it is called whenever memberwise initialization is called for. Your copy constructor should copy the current object into the object passed by reference as a parameter. If the object to be copied contains any pointers, you may want to reallocate the necessary memory in the copy instead of blindly copying the pointers.

A Memberwise Initialization Example

Here's a working version of the previous chunk of code. Close the current project by selecting **Close Project** from the **Project** menu. When prompted for a project file to open, go into the **THIN C++ Projects** folder, open the subfolder named **Chap 09.06 - memberWise**, and open the project file named **memberWise**. Next, run **memberWise**. by selecting **Run** from the **Project** menu. Here's what you'll see:

```
Original constructor...
Copy constructor...
Original constructor...
Name: Dave Mark
Name: Dave Mark
Name: Scott Knaster
   Hit a return to exit memberWise. Let's take a look at the
source code.
The memberWise Source Code
memberWise.cp starts by including <iostream.h> and
<string.h>:
#include <iostream.h>
#include <string.h>
   The Name class includes two data members, last and first:
class Name
 private:
    char *last;
    char *first;
```

The first Name() constructor is for regular Name objects; the second constructor is our copy constructor:

```
public:
    Name( char *firstParam, char *lastParam );
    Name( const Name &original );
```

The destructor frees up the memory allocated for **first** and **last**:

```
~Name();
```

The **Display()** function is used to display the data members of the current **Name** object:

```
void Name::Display();
```

The Name class's operator=() function provides a service similar to the Name() copy constructor. When the compiler encounters an expression of the form

```
myObject = yourObject
```

where both operands belong to the same class, it performs a memberwise copy of the right operand to the left operand. If the class in question provides an **operator=()** function in the proper form, the **operator=()** function is called in lieu of performing the memberwise copy.

```
Name &Name::operator=( const Name &original );
};
```

The regular Name() constructor uses new to allocate memory for first and last:

```
Name::Name( char *firstParam, char *lastParam )
{
  first = new char[ strlen(firstParam) + 1 ];
  last = new char[ strlen(lastParam) + 1 ];
```

Next, **strcpy()** is called to copy the two parameters into their associated data members:

```
strcpy( first, firstParam );
strcpy( last, lastParam );
```

Then, a message is printed to let us know which constructor we're in:

```
cout << "Original constructor...\n";
}</pre>
```

When the copy constructor is called, the current object is the new **Name** object. The parameter passed in is the original **Name** object from which the data is being copied:

```
Name::Name( const Name &original )
{
```

```
first = new char[ strlen(original.first) + 1 ];
last = new char[ strlen(original.last) + 1 ];
strcpy( first, original.first );
strcpy( last, original.last );

Once again, a message is printed telling us which constructor we're in:
    cout << "Copy constructor...\n";
}
    The destructordeletes the char arrays pointed to by first and last:

Name::~Name()
{
    delete [] first;
    delete [] last;
}
    Again, the Display() function prints the current Name:

void Name::Display()
{
    cout << "Name: " << first << " " " << last << "\n";</pre>
```

The operator=() function starts by checking to see whether the left and right operands are the same object, as in this expression:

```
myObject = myObject;
```

}

Why is this case special? As you'll see, before we copy the right operand to the left operand, we **delete** any memory allocated to the left operand. If the left and right objects are the same object, we'll lose data if we **delete**:

```
Name &Name::operator=( const Name &original )
{
  if ( this == &original )
    return( *this );
```

Once we know we're dealing with two different objects, we start by deleting any previously allocated memory. Remember, the lefthand operand is the current object; the right hand operand is passed in as the parameter **original**:

```
delete [] first;
  delete [] last;
The next four lines are lifted right from the copy constructor:
  first = new char[ strlen(original.first) + 1 ];
  last = new char[ strlen(original.last) + 1 ];
  strcpy( first, original.first );
  strcpy( last, original.last );
Finally, we return the current object as the result of the = operation:
 return( *this );
}
  main() starts by creating an original Name, reflecting the
identity of your hard-working author:
//---- main()
int main()
{
 Name yourAuthor( "Dave", "Mark" );
```

This results in a call of the original constructor, and the following message appears in the console window:

```
Original constructor...
```

Next, another **Name** is created using the copy constructor:

```
Name aCopy = yourAuthor;
```

This results in the following line of output:

```
Copy constructor...
```

The third Name object is used to test our operator=() function:

```
Name anotherAuthor( "Scott", "Knaster" );
```

This results in the following line of output:

```
Original constructor...
```

When yourAuthor.Display() is called, the contents of the original Name are printed:

```
yourAuthor.Display();
```

Here's the result:

```
Name: Dave Mark
```

When aCopy.Display() is called, the contents of the copy are printed:

```
aCopy.Display();
```

Here's the result:

```
Name: Dave Mark
```

Next, the = operator is used to copy anotherAuthor to aCopy. Before the copy is done, aCopy has the name Dave Mark and anotherAuthor has the name Scott Knaster.

```
aCopy = anotherAuthor;
aCopy.Display();
return 0;
}
```

This call of aCopy() results in the following line of output:

```
Name: Scott Knaster
```

If you have any doubts about memberwise initialization, add some additional output statements to the program to verify that a copied object has its own unique memory allocated for it. To do this, print the addresses of **first** and **last** in both the original and the copy.

Summary

OK, time to break out the good champagne (grab a Perrier if you're driving). You have now officially made it through the basics of C++. Although there are still many interesting things to learn, you've mastered the essentials and you're ready to code. Chapter 10 offers a look at some C++ class libraries and development environments. Let's rip!

Chapter 10

Moving On

Now that you've mastered the basics of C++ programming, you're ready to develop some applications. This chapter takes a look at a variety of Macintosh development environments and class libraries.

This Chapter at a Glance

The User Interface The Macintosh Toolbox

Accessing the Macintosh Toolbox

Class Libraries

Class Library Economics Waiting for Bedrock What Next?

Books and Other Reference Material

Inside Macintosh
THINK Reference
The Macintosh C Programming Primer
Macintosh Programming Secrets
Unofficial C++ Style Guide
The Bibliography

Go Get 'Em...

WHAT DOES IT TAKE TO DEVELOP A C++ APPLICATION? The answer depends on the computer and operating system under which your application will ultimately run. Are you building a program destined for a text-based environment like DOS or Unix? Are you writing an application that will run only on a Macintosh? Are you trying to write an application that will run on a variety of platforms?

The User Interface

If you can live within the confines of a text-oriented user interface, almost any C++ development environment will work for you. By taking advantage of the **iostream** library, you can build a C++ application with a completely portable user interface. The upside here is that you can develop an application on a Macintosh, copy the source code to a PC, and recompile, and (with some minor retooling, perhaps) you'll have a perfectly acceptable DOS application.

The down side is that a text-oriented user interface is limited. The console works, but it isn't pretty. (If you tried to fob off an iostream-based user interface on seasoned Macintosh users, they'd likely run you out of town.) Most graphical user interfaces (GUIs, pronounced "gooeys") require strict adherence to a set of interface guidelines. In the Macintosh world, these guidelines are described in *Inside Macintosh*, and in the *Macintosh Human Interface Guidelines* (both of these are listed in the bibliography at the back of the book). The Windows' environment has its own interface guidelines, as do GUIs such as Motif and OpenLook.

If you can live within the confines of <code>iostream</code>, you'll have the ultimate in application portability. If you want to create an application with the look and feel of the environment it's running under, you'll have some extra work to do. First, you must become an expert user of the destination environment. You'll need to recognize each of the elements that make up that environment's user interface, as well as the proper behavior of each element. When a window is in front, does it look different than when it is behind another window? What's the proper way to disable a menu item? Where do scroll bars usually appear? How do you resize a window? When you've mastered this <code>interface vocabulary</code>, you're ready to design your application's interface.



If you plan to develop an application that will run on more than one platform, you have even more work to do. First, you must absorb the interface vocabulary for each platform you plan to support.

Next, you'll have to make some decisions about your user interface. Your programming task will be simpler if you build your interface by using elements common to all of the platforms your application will run on. For example, unless all of the candidate platforms support pop-up menus, you might consider leaving them out of your interface. Each special case that you support will make your software more difficult to maintain.

Another option is to take advantage of a cross-platform development system, a development environment that can generate versions of your application for several different platforms, all from the same specifications/

code. The upside to a cross-platform development system is the ease with which you can maintain your product. Instead of updating your product on each platform you support, you'll only have to make your changes once.

Their are several down sides. Most cross-platform development systems are very expensive (thousands of dollars). Some restrict their feature set to the smallest common denominator of the features offered by all supported platforms. In other words, if a specific feature is not found on each and every platform, you won't be able to use it at all.

The Macintosh Toolbox

For the moment, let's assume that you wish to use your newfound C++ talents to build a Macintosh application with all of the user-interface elements that Mac users have come to know and love. Fortunately, every Macintosh that rolls off the assembly line comes with a slew of user-interface functions built right in. Collectively, these user-interface routines are known as the **Macintosh Toolbox**. The more than 2000 routines that make up the Macintosh Toolbox are stored on board the Macintosh, burned into the Mac's **read-only memory** (**ROM**).

The Macintosh Toolbox contains functions that create windows on the screen and others that draw text in these windows. There are functions for drawing shapes, lines, and dots in color and in black and white. There's a set of functions that allow you to implement your own pull-down menus. The Mac Toolbox is huge.

Every program that supports the standard Macintosh interface relies on the Mac Toolbox. That's why Macintosh programs have such a consistent look and feel. Take a look at the pull-down menu in Figure 10.1. Although the item names may be different, this menu bears a striking resemblance to every other Macintosh pull-down menu because the same Mac Toolbox routines are used to implement all Macintosh pull-down menus. When Mac programmers want to implement a pull-down menu, they always turn to this set of functions, collectively known as the *Menu Manager*. The Menu Manager has a set of rules it follows to create


FIGURE 10.1 An **Edit** menu. This one comes from the Finder.

Edit	
Undo	₩Z
Cut	₩X
Copy	Ж С
Paste	₩ U
Clear	
Select All	₩A
Show Clipboard	

a pull-down menu. For example, a standard Macintosh menu is always drawn using the **Chicago** font. The **Chicago** font is built into every Macintosh ROM, from the tiniest PowerBook to the mightiest Quadra.

The Mac Toolbox is divided into a series of managers. As you learn to implement a standard Macintosh interface, you'll learn about the functions that make up each manager. For example, you'll learn how to use the functions that make up the *Window Manager* to create and maintain your program's windows. You'll use the *Control Manager* to manage scroll bars, push buttons, and other standard Macintosh controls, like the ones shown in Figure 10.2.

FIGURE 10.2
A set of radio buttons, a push button, and a scroll bar. Each of these is created and maintained via the Control Manager.

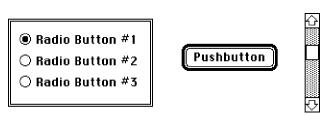

Accessing the Macintosh Toolbox

Every Macintosh development environment worth its salt provides a mechanism for calling each and every Mac Toolbox function. In the THINK C and THINK C++ environments, this mechanism is implemented via the MacTraps library. Many of the most popular Macintosh programs were written using nothing more than THINK C and MacTraps (OK, and maybe some pizza and Snapple).



The official name of Symantec's C++ environment is Symantec C++ for Macintosh. Almost everyone I know calls it "THINK C++," but your friendly neighborhood software dealer might not respond to anything but the complete name. Incidentally, THINK C's offical name is "THINK C 6.0." Just thought you'd like to know.

Since THINK C++ also comes with the **MacTraps** library, you can take full advantage of the Macintosh Toolbox from inside your THINK C++ application. In fact, you might design a set of classes and have each one implement a different piece of the Macintosh user interface. You might build one group of classes to create and manage windows and another group of classes to implement your program's menus.

This approach is just fine, though it might take you a fair amount of time to implement all of the Toolbox pieces that you'll need. An alternative is to take advantage of one of the existing class libraries.

Class Libraries

A class library is a collection of predefined classes. There are several class libraries designed specifically to simplify the process of creating a Macintosh application. Probably the most famous of these class libraries is Apple's MacApp, which contains classes that implement every nook and cranny of the Mac Toolbox. The MacApp classes are organized in a treelike hierarchy, known as an **application framework**. This application framework is much more than just an object-oriented translation of the Toolbox. Think of it as a generic application, complete with menu and window-handling code in place and ready to go. Rather than starting from scratch, your job is to customize this generic application, shaping its look and behavior to suit your design. For the most part, you do this by deriving new classes from the existing MacApp classes and then adding your own classes as the need arises.

Another popular class library is the THINK Class Library (TCL), brought to you by Symantec, the folks responsible for

THIN and THINK C++. The TCL classes are also organized hierarchically as an application framework. Just as with MacApp, you start with a generic TCL application and then customize it to suit your needs.

To allow it to work with both THINK C and THINK C++, the TCL was written in C with special C++-like extensions. So, if you work with the TCL, you won't be able to use C++ features like overloading, default arguments, and multiple inheritance. Since the TCL is so popular, I'd say that most programmers don't have much trouble living with these limitations.

Class Library Economics

Which class library should you choose—MacApp or TCL? Both of these libraries are Macintosh specific, so you won't be able to use them to create a Unix or Windows application. Some people feel that MacApp is more robust, and, since MacApp has been around longer, this makes sense. MacApp supports true C++, while TCL puts some definite restrictions on C++ compatibility. On the other hand, consider the economics of programming with each library.

To make full use of MacApp, you need to purchase Apple's Macintosh Programmer's Workshop (MPW), a Unixlike development environment. You also need to buy MacApp as well as a C++ compiler (either CFront or Symantec's C++ for MPW). Finally, you need at least 16 megabytes if you want a little elbow room. Overall, this is a pretty pricey proposition. According to my APDA catalog, the latest MPW/C++ bundle costs \$575 and the latest version of MacApp costs \$350 if you have a CD-ROM drive, \$395 on floppies, for a total ranging from \$925 to \$970. Ouch!

To make full use of the TCL, you have only one thing to buy—either THINK C or THINK C++, both of which come with their respective versions of the TCL. THINK C lives comfortably in 4 megabytes of RAM, while THINK C++ needs about 8. THINK C 6.0 lists for \$299, and *Symantec C++ for Macintosh* lists for \$499 (the street price of each is definitely lower). If saving money is your chief objective, the THINK Class Library is your best bet.



APDA is the Apple Programmers and Developers Association, a branch of Apple that sells all kinds of cool developer goodies. If you don't have a current APDA catalog, get one immediately. You can reach APDA at:

- (800) 282-2732 in the United States
- (800) 637-0029 in Canada
- (716) 871-6555 internationally
- (716) 871-6511 by fax

Waiting for Bedrock

Just when you thought you had this class library thing figured out, along comes a new wrinkle—Bedrock. Bedrock is the class library that is being developed jointly by Apple and Symantec and is scheduled for release in late 1993. Bedrock is intended as the standard cross-platform class library, capable of generating applications that will run on the Macintosh as well as under Windows and Unix. While you can use Bedrock exclusively for the creation of Macintosh applications, the beauty of Bedrock is that by changing a few settings, you can use the same source code to generate applications that will run on multiple platforms.

Although several good cross-platform development systems are available that support the Macintosh, Windows, and Unix, none of them have the gold seal of approval that goes along with being developed by Apple and Symantec. If Bedrock turns out to be as good as is hoped, it could very well represent the future of Macintosh development. There will be some competition, however. Only time will tell.

What Next?

If Bedrock is the future, where does that leave MacApp and the TCL? Apple and Symantec have promised to create a migration path from both MacApp and the TCL to Bedrock. So, if you invest

your time learning either one of these class libraries, your investment will pay off handsomely if and when you make the switch to Bedrock.



If you do decide to order THINK C++, make sure you take advantage of the money-saving coupon in the back of the book.

Books and Other Reference Material

Once you've decided on a class library, you'll be ready to turn your sights to the Macintosh Toolbox. If you're new to the Toolbox, you'll be glad to know that there's a lot of reading material available to help ease you through the Toolbox learning curve.

Inside Macintosh

If there is one item found on every Macintosh programmer's bookshelf, it's a well-worn copy of *Inside Macintosh*, Apple's official Macintosh programmer's reference guide. It covers the Toolbox in depth, describing each of the Toolbox managers along with their respective functions, including each functions' parameters and each function's place in the Mac universe.

When the Macintosh was first introduced, Apple also published the first two volumes of *Inside Macintosh*. As new Macintosh models were released, Apple put out new volumes of *Inside Macintosh* to keep programmers abreast of the latest developments.

The six volumes of the original *Inside Macintosh* truly stood the test of time, lasting from 1984 until now. In 1992, however, Apple decided to give the whole series a facelift, and the new *Inside Macintosh* was born. Instead of being organized historically, the new series is organized by topic. For example, *Inside Macintosh: Files* tells you everything you need to know about the Macintosh Hierarchical File System (HFS). Other books in the series include *Macintosh Toolbox Essentials, Overview, Processes*, and *Memory*. I

suggest you start by picking up a copy of *Overview* and of *Macintosh Toolbox Essentials*. Then, add *Inside Macintosh* volumes as the need arises.

THINK Reference

One resource that I just can't live without is THINK Reference from Symantec. THINK Reference is a data base tool that contains a relatively comprehensive summary of the Toolbox, broken down in a variety of ways. With THINK Reference, you can list all of the Window Manager's functions and data structures or you can display a detailed listing of one of the Menu Manager's routines. THINK Reference is awesome!

The Macintosh C Programming Primer

When *Inside Macintosh* was written, Pascal was the primary Macintosh programming language. Because of this, all of the function descriptions and examples presented in *Inside Macintosh* were written in Pascal. In addition, *Inside Macintosh* was written as a reference and not a tutorial. It becomes indispensable once you understand the basics of Toolbox programming; its not the ideal reading material for getting you started.

There is a book that helps bridge the gap for first-time Macintosh programmers. The *Macintosh C Programming Primer*, by Dave Mark and Cartwright Reed, offers a step-by-step tour through the mysteries of the Toolbox. The *Mac Primer* walks you through each of the Toolbox managers, punctuating each chapter with a variety of sample programs. The *Mac Primer* takes the sting out of learning to program using the Mac Toolbox.

The *Mac Primer* also offers a lot of advice for programmers who want to get involved with the Macintosh development community. Whether you are interested in developing your own best-selling Macintosh application or you just want to hook up with other Macintosh developers, the *Mac Primer* can help. Inside, you'll find descriptions of Apple's developer relations programs, designed to help you get your products out the door. You can read

about AppleLink, Apple's internal electronic mail system that you can be a part of. There are descriptions of technical reference material available from Apple as well as from third parties.

In general, Cartwright and I tried to put everything into the *Mac Primer* that we were looking for when we were first learning to program the Macintosh. We hope you enjoy it.

Macintosh Programming Secrets

A book that I frequently turn to is Scott Knaster's excellent *Macintosh Programming Secrets*. This book is chock-full of Macintosh programming tips, tricks, and techniques. Scott takes his years of experience as an Apple employee and puts them to good use, revealing some of the deep, dark secrets that only a Mac aficionado could know. Once you've mastered the basics of Macintosh Toolbox programming, give this book a try.

Unofficial C++ Style Guide

In 1990, Apple's technical magazine *develop* featured an article called "Unofficial C++ Style Guide." I love this article and think you will too. You'll find a copy of it in Appendix G. Take the time to read the style guide. It is packed with useful, even critical, information that no C++ programmer can afford to be without. Hats off to David Goldsmith and Jack Palevich, the authors of this article. Great stuff!



Though the style guide was written with MacApp in mind, its contents apply just as well to the TCL. As an example, when the style guide refers to a specific class name, it uses MacApp's class-naming convention, starting each class name with T. Since the TCL starts all of its classes with C, you just substitute the leading Ts for Cs when reading for the TCL.

The Bibliography

Be sure to check out the bibliography in Appendix I, where you'll find a list of books that will help ease your transition into Macintosh C++ programming. Now that you've mastered the basics of C++, you should pick up a good reference guide to help complete your education. *The C++ Programming Language* by Bjarne Stroustrup (the principal architect of C++) is a must. C++ *Primer* by Stanley Lippman is also very helpful. Make sure you get the second edition of both books.

Go Get 'Em...

Well, that's it. I hope you enjoyed reading *Learn C++ on the Macintosh* as much as I enjoyed writing it. Above all, I hope you are excited about C++. Now go out there and write some source code!

Appendix A

Glossary

abstract class: A base class whose sole purpose is to provide a basis for derived classes. You'll never create an object based on an abstract class.

access function: A function designed specifically to provide access to a data member.

access specifier: One of public, private, or protected, the access code defines which of your program's functions has access to the specified data member or function.

application framework: A collection of classes that implement a generic application. Typically, the classes in an application framework act as placeholders. The programmer overloads various parts of the framework to give the application the desired look and feel.

base class: A class used as the basis for the declaration of a second class, known as a derived class. The derived class inherits all the members of the base class.

class: A C++ structure that encapsulates data and functions, known as data members and member functions.

class derivation: The technique of deriving classes based on other classes.

class library: A collection of classes, sometimes used to implement a platform's user interface. Many class libraries come in the form of an application framework.

- **constructor function**: A member function having the same name as its class. The constructor function is typically used to initialize an object's data members.
- **copy constructor**: A constructor designed to provide an alternative to memberwise initialization for copying one object to another.
- **current object**: The object that launched the current member function. The members of the current object may be referred to from within a member function without using the normal object notation. **this** is always a pointer to the current object.
- data member: One of the data elements of a class.
- **declaration**: A statement that creates a reference to an object or function, without actually allocating memory for the object or function.
- **default argument initializer**: A function argument with an associated default value. If the function is called and no value is passed in corresponding to the argument, the argument is initialized to its default value.
- **definition**: A statement that causes memory to be allocated for a variable or function. A function prototype is a declaration. The entire function, including curly braces and all the statements between, is known as the function definition.
- **derivation chain**: The chain of classes running from a root class, through a sequence of derived classes, to the ultimate derived class, which is the last class in the derivation chain.
- **derived class**: A class declared using a base class. The derived class inherits all the members of its base class.
- **destructor function**: A member function having the same name as its class preceded by the ~ character. The destructor function is typically used to delete any member allocated for an object.
- **extraction operator**: The >> operator, part of **iostream**, that allows you to extract data from a stream.
- **formatting flags**: A series of flags maintained by the **ios** class used to control various iostream formatting features.
- **function name overloading**: A feature that allows you to create several functions with the same name, but having different signatures. Each call of an overloaded function is compared against the available signatures and the matching function is called. If no match is found, the compiler reports an error.

- **inheritance**: The technique wherein a derived class inherits the characteristics of its base class.
- **inline function**: A function declared using the **inline** keyword. The body of an inline function is actually copied into the calling function, allowing you to bypass the overhead normally associated with calling a function.
- insertion operator: The << operator, part of iostream, that allows you to insert data
 into a stream.</pre>
- **interface guidelines**: A document that guides you through the process of designing a user interface for a specific platform. The Macintosh user interface guidelines are found in *Macintosh Human Interface Guidelines*, published by Addison-Wesley Publishing Co.
- **interface vocabulary**: A language that describes the elements in a platform's user interface. The terms scroll bar, window, and pull-down menu are all part of the Macintosh interface vocabulary.
- **Macintosh Toolbox**: The more than 2000 routines built into every Macintosh computer. These routines give Macintosh applications their unique Macintosh look and feel.
- **manipulator**: A special function, provided as part of the **iostream** library, that allows you to perform a specific I/O operation while you are in the middle of in insertion or extraction.
- **member function**: One of the functions declared as part of a class.
- **member initialization list**: The list that optionally follows a constructor's parameter list, used to initialize an object's members. The member initialization list is always preceded by a :.
- **memberwise assignment**: The process of copying the value of the data members of one object to the data members of another object belonging to the same class, one at a time.
- **memberwise initialization**: A special form of initialization used to copy one object to another. The first object's data members are copied to those of the second, one at a time.
- **multiple inheritance**: The technique of defining a class derived from more than one class.
- **object**: Any C++ entity that occupies memory.

- operator overloading: Similar to function overloading, the technique of assigning more than one meaning to one of the built-in C++ operators. Overloaded operators rely on functions having the name operator, followed by the name of the operator being overloaded. For example, the function operator+() overloads the + operator.
- **project**: A collection consisting of a project file and all the other files that contribute to a particular program.
- **project file**: A file used by Symantec's development environments to manage all of a program's source and object code. By convention, project files usually end in ". ".
- **project window**: A window that appears when you open a project using the Think Project Manager. The window that describes all the source code file and library files that make up the project.
- **read-only memory (ROM)**: Computer memory that can only be read from, not written to. On a Macintosh, the ROM is used to store the Macintosh Toolbox.
- **reference variable**: A variable designed to act as an alias to another variable of the exact same type. To denote a variable as a reference variable, precede its name with an & in its definition. Reference variables must be initialized (set to alias another variable) at the same time they are defined.
- **root base class**: The ultimate base class in a derivation chain.
- **scope**: A variable's scope defines the availability of the variable throughout the rest of the program.
- **scope resolution operator**: The scope resolution operator, ::, precedes a variable, telling the compiler to look outside the current block for a variable of the same name. The scope resolution operator is also used to refer to a class's static members.
- **signature**: A function's parameter list. A function's name and signature combine to distinguish it from all other functions. A function's return type is not part of its signature.
- **smart pointer**: An overloaded version of the -> operator, used to walk down a chain of pointers.
- **state bits**: A series of bits that reflect the current status of a stream. The bits are **goodbit**, **eofbit**, **failbit**, and **badbit**.

- **static member**: A data member or member function declared using the **static** keyword. A static data member is shared by the entire class, rather than allocated for each object of the class. A static member function is typically created to control access to a static data member. The **this** pointer is unavailable in a static member function.
- **template**: A function or class definition containing a series of placeholders, each of which represents a type that isn't provided until the function is called or until an object of the class is defined.
- **template argument list**: The list of type placeholders following the **template** keyword in a function or class template.
- template instantiation: A function or class defined based on a template.
- **two-stage construction**: An alternative to a single constructor. The second constructor is named by placing the letter **I** in front of the class name. The **I** constructor is used to perform an object's memory allocation, which is inappropriate for the object's constructor.
- virtual base class: A root base class having all derived classes marked using the virtual keyword. This ensures that a derived class having more than one path back to the virtual base class will not instantiate more than one copy of the root base class.

Appendix B

Source Code Listings

```
call
                 #include <iostream.h>
(Chapter 7)
                 class Item
                     private:
                         float
                                  price;
                     public:
                                    Item( float itemPrice );
                         float operator()( float taxRate = 0 );
                 };
                 Item::Item( float itemPrice )
                     price = itemPrice;
                 float Item::operator()( float taxRate )
                     return( ((taxRate * .01) + 1) * price );
                 }
```

```
//---- main()
                  int main()
                     Item
                             stimpyDoll( 36.99 );
                     cout << "Price of Stimpy doll: $" << stimpyDoll();</pre>
                     cout << "\nPrice with 4.5% tax: $" << stimpyDoll( 4.5 );</pre>
                     return 0;
                  }
                  #include <iostream.h>
                  const shortkMaxNameLength = 40;
                  int main()
                     char
                             name[ kMaxNameLength ];
                     short myShort;
                     long myLong;
                     float myFloat;
                     cout << "Type in your first name: ";</pre>
                     cin >> name;
                     cout << "Short, long, float: ";</pre>
                     cin >> myShort >> myLong >> myFloat;
                     cout << "\nYour name is: " << name;</pre>
                     cout << "\nmyShort: " << myShort;</pre>
                     cout << "\nmyLong: " << myLong;</pre>
                     cout << "\nmyFloat: " << myFloat;</pre>
                     return 0;
                  }
                  #include <iostream.h>
(Chapter 4)
                  int main()
                             *name = "Dr. Crusher";
                      char
                     cout << "char:
                                        " << name[ 0 ] << '\n'
                      << "short: " << (short)(name[ 0 ]) << '\n'
                      << "string: " << name << '\n'
                      << "address: " << (unsigned long)name;
```

```
return 0;
               }
    derived #include <iostream.h>
(Chapter 6)
               //---- Base
               class Base
                       Data members...
                  private:
                     short baseMember;
                        Member functions...
                  protected:
                            SetBaseMember( short baseValue );
                     void
                     short GetBaseMember();
               };
               void Base::SetBaseMember( short baseValue )
                  baseMember = baseValue;
               }
               short Base::GetBaseMember()
                  return baseMember;
               //----- Base:Derived
               class Derived : public Base
                       Data members...
                  private:
                     short derivedMember;
                       Member functions...
                  public:
                     void
                            SetMembers( short baseValue,
                                      short derivedValue );
                     void
                            PrintDataMembers();
               };
               void Derived::SetMembers( short baseValue,
                                        short derivedValue )
               {
```

```
derivedMember = derivedValue;
                    SetBaseMember( baseValue );
                }
                void
                      Derived::PrintDataMembers()
                    cout << "baseMember was set to "</pre>
                        << GetBaseMember() << '\n';
                    cout << "derivedMember was set to "
                        << derivedMember << '\n';
                }
                //---- main()
                int main()
                {
                    Derived
                              *derivedPtr;
                    derivedPtr = new Derived;
                    derivedPtr->SetMembers( 10, 20 );
                    derivedPtr->PrintDataMembers();
                    return 0;
                }
 employee
                #include <iostream.h>
                #include <string.h>
(Chapter 5)
                const short kMaxNameSize = 20;
                class Employee
                {
                11
                          Data members...
                    private:
                       char employeeName[ kMaxNameSize ];
                        long
                              employeeID;
                        float employeeSalary;
                //
                          Member functions...
                    public:
                              Employee( char *name, long id, float salary );
                               ~Employee();
                       void PrintEmployee();
                };
```

```
Employee::Employee( char *name, long id, float salary )
                     strncpy( employeeName, name, kMaxNameSize );
                     employeeName[ kMaxNameSize - 1 ] = '\0';
                     employeeID = id;
                     employeeSalary = salary;
                     cout << "Creating employee #" << employeeID << "\n";</pre>
                 }
                 Employee::~Employee()
                     cout << "Destroying employee #" << employeeID << "\n";</pre>
                 }
                 void
                       Employee::PrintEmployee()
                     cout << "----\n";
                     cout << "Name: " << employeeName << "\n";</pre>
                     cout << "ID: " << employeeID << "\n";</pre>
                     cout << "Salary: " << employeeSalary << "\n";</pre>
                     cout << "----\n";
                 }
                 int main()
                 {
                     Employee
                                employee1( "Dave Mark", 1, 200.0 );
                     Employee
                                *employee2;
                     employee2 = new Employee( "Steve Baker", 2, 300.0 );
                     employee1.PrintEmployee();
                     employee2->PrintEmployee();
                     delete employee2;
                     return 0;
                 }
      equals
                 #include <iostream.h>
                 #include <string.h>
(Chapter 7)
                 //---- String
                 class String
                 {
```

```
private:
       char
              *s;
       short stringLength;
   public:
              String( char *theString );
              ~String();
       void
              DisplayAddress();
       String &operator=( const String &fromString );
};
String::String( char *theString )
   stringLength = strlen( theString );
   s = new char[ stringLength + 1 ];
   strcpy( s, theString );
}
String::~String()
   delete [] s;
}
void
     String::DisplayAddress()
   cout << "String address: " << (unsigned long)s << "\n";</pre>
String &String::operator=( const String &fromString )
   delete [] s;
   stringLength = fromString.stringLength;
   s = new char[ stringLength + 1 ];
   strcpy( s, fromString.s );
   return( *this );
}
//---- main()
int main()
{
              captain( "Picard" );
   String
              doctor( "Crusher" );
   String
   captain.DisplayAddress();
```

```
doctor.DisplayAddress();
                     cout << "----\n";
                     doctor = captain;
                     captain.DisplayAddress();
                     doctor.DisplayAddress();
                     return 0;
                 }
  formatter
                 #include <iostream.h>
(Chapter 8)
                 int main()
                     cout << 202 << '\n';
                     cout.width( 5 );
                     cout.fill( 'x' );
                     cout.setf( ios::left, ios::adjustfield );
                     cout << 202 << '\n';
                     cout.width( 10 );
                     cout.fill( '=' );
                     cout.setf( ios::internal, ios::adjustfield );
                     cout << -101 << '\n';
                     cout.width( 10 );
                     cout.fill( '*' );
                     cout.setf( ios::right, ios::adjustfield );
                     cout << "Hello";
                     return 0;
                 }
     friends
                 #include <iostream.h>
                 #include <string.h>
(Chapter 5)
                 const shortkMaxNameSize = 20;
```

```
class Employee;
//----- Payroll
class Payroll
//
     Data members...
   private:
        Member functions...
  public:
            Payroll();
            ~Payroll();
      void PrintCheck( Employee *payee );
};
//----- Employee
class Employee
   friend void Payroll::PrintCheck( Employee *payee );
//
        Data members...
   private:
      char employeeName[ kMaxNameSize ];
      long employeeID;
      float employeeSalary;
        Member functions...
   public:
             Employee( char *name, long id, float salary );
             ~Employee();
      void PrintEmployee();
};
//----- Payroll Member Functions
Payroll::Payroll()
   cout << "Creating payroll object\n";</pre>
Payroll::~Payroll()
   cout << "Destroying payroll object\n";</pre>
     Payroll::PrintCheck( Employee *payee )
void
```

```
cout << "Pay $" << payee->employeeSalary
       << " to the order of "
        << payee->employeeName << "...\n\n";
}
//---- Employee Member Functions
Employee::Employee( char *name, long id, float salary )
   strncpy( employeeName, name, kMaxNameSize );
   employeeName[ kMaxNameSize - 1 ] = '\0';
   employeeID = id;
   employeeSalary = salary;
   cout << "Creating employee #" << employeeID << "\n";</pre>
}
Employee::~Employee()
   cout << "Destroying employee #" << employeeID << "\n";</pre>
void Employee::PrintEmployee()
   cout << "----\n";
   cout << "Name: " << employeeName << "\n";</pre>
                  " << employeeID << "\n";
   cout << "ID:
   cout << "Salary: " << employeeSalary << "\n";</pre>
   cout << "----\n";
}
//---- main
int main()
{
             *employee1Ptr;
   Employee
   Payroll
              *payroll1Ptr;
   payroll1Ptr = new Payroll;
   employee1Ptr = new Employee( "Carlos Derr", 1000, 500.0 );
   employee1Ptr->PrintEmployee();
   payroll1Ptr->PrintCheck( employee1Ptr );
   delete employee1Ptr;
   delete payroll1Ptr;
```

```
return 0;
               }
    gramps #include <iostream.h>
(Chapter 6)
               //----- Gramps
               class Gramps
                    Data members...
                       Member functions...
                  public:
                            Gramps();
                            ~Gramps();
               };
               Gramps::Gramps()
                  cout << "Gramps' constructor was called!\n";</pre>
               Gramps::~Gramps()
                  cout << "Gramps' destructor was called!\n";</pre>
               //---- Pops:Gramps
               class Pops : public Gramps
                   Data members...
               // Member functions...
                  public:
                           Pops();
                            ~Pops();
               Pops::Pops()
                  cout << "Pops' constructor was called!\n";</pre>
               Pops::~Pops()
                  cout << "Pops' destructor was called!\n";</pre>
```

```
//---- Junior:Pops
                class Junior : public Pops
                          Data members...
                          Member functions...
                    public:
                              Junior();
                              ~Junior();
                };
                Junior::Junior()
                    cout << "Junior's constructor was called!\n";</pre>
                Junior::~Junior()
                    cout << "Junior's destructor was called!\n";</pre>
                int main()
                    Junior *juniorPtr;
                    juniorPtr = new Junior;
                    cout << "---\n";
                    delete juniorPtr;
                    return 0;
                }
    hello++
                #include <iostream.h>
(Chapter 2)
                int main()
                    cout << "Hello, world!";</pre>
                    return 0;
```

```
#include <iostream.h>
(Chapter 9)
                class MyClass
                   public:
                       const short kMaxNameLength;
                       short
                                    &numberAlias;
                       short
                                    number;
                       MyClass( short constValue );
                };
                MyClass::MyClass( short constValue )
                   : kMaxNameLength( constValue ), numberAlias( number )
                   number = kMaxNameLength;
                   cout << "Before: number = "</pre>
                       << number << "\n";
                   numberAlias += 10;
                    cout << "After: number = "</pre>
                       << number << "\n";
                }
                int main()
                   MyClass myObject( 10 );
                   return 0;
                }
                #include <iostream.h>
(Chapter
                inline long power( short base, short exponent );
                int main()
                   cout << "power( 2, 3 ): " <<
```

power(2, 3) << "\n";

```
cout << "power( 3, 6 ): " <<
                               power( 3, 6 ) << "\n";</pre>
                       cout << "power( 5, 0 ): " <<
                                power( 2, 0 ) << "\n";</pre>
                       cout << "power( -3, 4 ): " <<
                               power( -3, 4 ) << "\n";
                       return 0;
                    }
                    inline long power( short base, short exponent )
                               product = 1;
                       long
                       short i;
                       if ( exponent < 0 )
                           return( 0 );
                       for ( i=1; i<=exponent; i++ )</pre>
                           product *= base;
                       return product;
                    }
memberWise
                    #include <iostream.h>
                    #include <string.h>
  (Chapter 9)
                    //---- Name
                    class Name
                       private:
                           char
                                  *last;
                                  *first;
                           char
                       public:
                                  Name( char *firstParam, char *lastParam );
                                  Name( const Name &original );
                                  ~Name();
                           void
                                  Display();
                           Name
                                  &operator=( const Name &original );
                    };
                    Name::Name( char *firstParam, char *lastParam )
                       first = new char[ strlen(firstParam) + 1 ];
                       last = new char[ strlen(lastParam) + 1 ];
```

```
strcpy( first, firstParam );
   strcpy( last, lastParam );
   cout << "Original constructor...\n";</pre>
}
Name::Name( const Name &original )
   first = new char[ strlen(original.first) + 1 ];
   last = new char[ strlen(original.last) + 1 ];
   strcpy( first, original.first );
   strcpy( last, original.last );
   cout << "Copy constructor...\n";</pre>
}
Name::~Name()
   delete [] first;
   delete [] last;
}
void
     Name::Display()
   cout << "Name: " << first << " " << last << "\n";
}
Name
       &Name::operator=( const Name &original )
{
   if ( this == &original )
       return( *this );
   delete [] first;
   delete [] last;
   first = new char[ strlen(original.first) + 1 ];
   last = new char[ strlen(original.last) + 1 ];
   strcpy( first, original.first );
   strcpy( last, original.last );
   return( *this );
}
//---- main()
int main()
   Name
          yourAuthor( "Dave", "Mark" );
```

```
Name
                            aCopy = yourAuthor;
                            anotherAuthor( "Scott", "Knaster" );
                    Name
                    yourAuthor.Display();
                    aCopy.Display();
                    aCopy = anotherAuthor;
                    aCopy.Display();
                    return 0;
                 }
                 #include <iostream.h>
                 #include <string.h>
(Chapter
                 const short kMaxNameLength = 40;
                 //---- MenuItem
                 class MenuItem
                    private:
                                   price;
                        float
                                   name[ kMaxNameLength ];
                        char
                    public:
                                   MenuItem( float itemPrice, char *itemName );
                        float
                                   GetPrice();
                        float
                                   operator+( MenuItem item );
                        float
                                   operator+( float subtotal );
                 };
                 MenuItem::MenuItem( float itemPrice, char *itemName )
                    price = itemPrice;
                    strcpy( name, itemName );
                 }
                 float MenuItem::GetPrice()
                    return( price );
                 }
                 float MenuItem::operator+( MenuItem item )
                    cout << "MenuItem::operator+( MenuItem item )\n";</pre>
                    return( GetPrice() + item.GetPrice() );
                 }
```

```
float MenuItem::operator+( float subtotal )
                   cout << "MenuItem::operator+( float subtotal )\n";</pre>
                   return( GetPrice() + subtotal );
               }
                //----- operator+()
                float operator+( float subtotal, MenuItem item )
                   cout << "operator+( float subtotal, MenuItem item )\n";</pre>
                   return( subtotal + item.GetPrice() );
               }
                //---- main()
                int main()
                             chicken( 8.99, "Chicken Kiev with salad" );
                   MenuItem
                             houseWine( 2.99, "Riesling by the glass" );
                   MenuItem
                             applePie( 3.99, "Apple Pie a la Mode" );
                   float
                             total;
                   total = chicken + houseWine + applePie;
                   cout << "\nTotal: " << total</pre>
                      << "\n\n";
                   total = chicken + (houseWine + applePie);
                   cout << "\nTotal: " << total;</pre>
                   return 0;
                }
multInherit
               #include <iostream.h>
                #include <string.h>
(Chapter 9)
                const short kMaxStringLength = 40;
                //----- Predator
                class Predator
```

```
private:
              favoritePrey[ kMaxStringLength ];
      char
   public:
              Predator( char *prey );
              ~Predator();
};
Predator::Predator( char *prey )
   strcpy( favoritePrey, prey );
   cout << "Favorite prey: "</pre>
     << prey << "\n";
}
Predator::~Predator()
   cout << "Predator destructor was called!\n\n";</pre>
//----- Pet
class Pet
   private:
      char favoriteToy[ kMaxStringLength ];
   public:
              Pet( char *toy );
              ~Pet();
};
Pet::Pet( char *toy )
   strcpy( favoriteToy, toy );
   cout << "Favorite toy: "</pre>
      << toy << "\n";
}
Pet::~Pet()
   cout << "Pet destructor was called!\n";</pre>
//----- Cat:Predator,Pet
class Cat : public Predator, public Pet
```

```
private:
                      short
                                    catID;
                      static short lastCatID;
                   public:
                             Cat( char *prey, char *toy );
                             ~Cat();
                };
                Cat::Cat( char *prey, char *toy ) :
                   Predator( prey ), Pet( toy )
                   catID = ++lastCatID;
                   cout << "catID: " << catID</pre>
                     << "\n----\n";
                }
                Cat::~Cat()
                   cout << "Cat destructor called: catID = "</pre>
                      << catID << "...\n";
                short Cat::lastCatID = 0;
                //---- main()
                int main()
                   Cat TC( "Mice", "Ball of yarn" );
                   Cat Benny( "Crickets", "Bottle cap" );
                   Cat Meow( "Moths", "Spool of thread" );
                   return 0;
                }
                #include <iostream.h>
(Chapter
                //----- Blob
                class Blob
                   public:
                            *operator new( size_t blobSize );
                      void
                      void operator delete( void *blobPtr, size_t blobSize );
                };
```

```
void *Blob::operator new( size_t blobSize )
                    cout << "new: " << blobSize << " byte(s).\n";</pre>
                    return new char[ blobSize ];
                 }
                 void
                        Blob::operator delete( void *blobPtr, size_t blobSize )
                    cout << "delete: " << blobSize << " byte(s).\n";</pre>
                    delete [] blobPtr;
                 //---- main()
                 int main()
                    Blob *blobPtr;
                    blobPtr = new Blob;
                    delete blobPtr;
                    return 0;
                 }
                 #include <iostream.h>
                 #include <new.h>
(Chapter
                 void NewFailed();
                 char
                        gDone = false;
                      *gSpareBlockPtr = 0;
                 char
                 int main()
                    char
                           *myPtr;
                    long
                           numBlocks = 0;
                    cout << "Installing NewHandler...\n";</pre>
                    set_new_handler( NewFailed );
                    gSpareBlockPtr = new char[20480];
                    while ( gDone == false )
                        myPtr = new char[1024];
```

```
numBlocks++;
                  }
                  cout << "Number of blocks allocated: " << numBlocks;</pre>
                  return 0;
               }
               void
                    NewFailed()
                  if ( gSpareBlockPtr != 0 )
                      delete gSpareBlockPtr;
                     gSpareBlockPtr = 0;
                  gDone = true;
               }
nonVirtual
               #include <iostream.h>
(Chapter 9)
               //---- Root
               class Root
                  public:
                    Root();
               };
               Root::Root()
                  cout << "Root constructor called\n";</pre>
               //---- Base1
               class Basel : public Root
                  public:
                     Base1();
               };
               Base1::Base1()
                  cout << "Base1 constructor called\n";</pre>
```

```
class Base2 : public Root
                  public:
                    Base2();
               };
               Base2::Base2()
                  cout << "Base2 constructor called\n";</pre>
               //---- Derived
               class Derived : public Base1, public Base2
                  public:
                     Derived();
               };
               Derived::Derived()
                  cout << "Derived constructor called\n";</pre>
               //---- main()
               int main()
                  Derived myDerived;
                  return 0;
               }
  overload
               #include <iostream.h>
(Chapter 4)
               void Display( short shortParam );
               void Display( long longParam );
               void Display( char *text );
               int main()
                  short myShort = 3;
                         myLong = 12345678L;
                  long
                  char
                         *text = "Make it so...";
```

//----- Base2

```
Display( myShort );
                      Display( myLong );
                      Display( text );
                      return 0;
                  }
                  void
                         Display( short shortParam )
                      cout << "The short is: " << shortParam << "\n";</pre>
                  }
                  void
                        Display( long longParam )
                      cout << "The long is: " << longParam << "\n";</pre>
                  }
                  void
                        Display( char *text )
                      cout << "The text is: " << text << "\n";</pre>
   overload
                  #include <iostream.h>
                  #include <fstream.h>
(Chapter 8)
                  #include <string.h>
                  const short kMaxNameLength = 40;
                  class MenuItem
                      private:
                                     price;
                          float
                          char
                                     name[ kMaxNameLength ];
                      public:
                                     SetName( char *itemName );
                         void
                         char
                                     *GetName();
                         void
                                     SetPrice( float itemPrice );
                         float
                                     GetPrice();
                  };
                         MenuItem::SetName( char *itemName )
                  {
                      strcpy( name, itemName );
                  }
```

```
char *MenuItem::GetName()
   return( name );
}
void MenuItem::SetPrice( float itemPrice )
   price = itemPrice;
float MenuItem::GetPrice()
   return( price );
//---- iostream operators
istream &operator>>( istream &is, MenuItem &item )
   float itemPrice;
   char
          itemName[ kMaxNameLength ];
   is.getline( itemName, kMaxNameLength );
   item.SetName( itemName );
   is >> itemPrice;
   item.SetPrice( itemPrice );
   is.ignore( 1, '\n' );
   return( is );
ostream &operator<<( ostream &os, MenuItem &item )</pre>
   os << item.GetName() << " ($"
      << item.GetPrice() << ") ";
   return( os );
//---- main()
int main()
   ifstream readMe( "Menu Items" );
   MenuItem
             item;
```

```
while ( readMe >> item )
                         cout << item << "\n";</pre>
                      return 0;
protoTester
                  #include <iostream.h>
(Chapter 4)
                         MyFunc( short param1,
                  void
                                 short param2 = 0,
                                 short param3 = 0);
                  int main()
                  {
                      MyFunc(1);
                      MyFunc( 1, 2 );
                      MyFunc( 1, 2, 3 );
                      return 0;
                  }
                  void
                         MyFunc( short param1,
                                 short param2,
                                 short param3 )
                      cout << "MyFunc( " << param1</pre>
                          << ", " << param2
                          << ", " << param3
                           << " )\n";
                  }
     readMe
                  #include <iostream.h>
                  #include <fstream.h>
(Chapter 8)
                  int main()
                  {
                                 readMe( "My File" );
                      ifstream
                      char
                                 c;
                      while ( readMe.get( c ) )
                         cout << c;
                      return 0;
                  }
```

```
reference
                  #include <iostream.h>
 (Chapter 4)
                    void CallByValue( short valueParam );
                    void CallByReference( short &refParam );
                    int main()
                       short number = 12;
                       long
                               longNumber = 12L;
                       cout << "&number:
                                             " <<
                           (unsigned long)&number << "\n";
                       cout << "&longNumber: " <<</pre>
                           (unsigned long)&longNumber << "\n\n";</pre>
                       CallByValue( number );
                       cout << "After ByValue: " << number << "\n\n";</pre>
                       CallByReference( number );
                       cout << "After ByRef( short ): " << number << "\n\n";</pre>
                       CallByReference( longNumber );
                       cout << "After ByRef( long ): " << longNumber << "\n";</pre>
                       return 0;
                    }
                    void
                         CallByValue( short valueParam )
                       cout << "&valueParam: " <<</pre>
                            (unsigned long)&valueParam << "\n";</pre>
                       valueParam *= 2;
                    }
                    void
                           CallByReference( short &refParam )
                       cout << "&refParam: " <<
                            (unsigned long)&refParam << "\n";</pre>
                       refParam *= 2;
                    }
scopeTester
                    #include <iostream.h>
 (Chapter 4)
                    short myValue = 5;
                    int main()
```

```
short yourValue = myValue;
                    cout << "yourValue: " << yourValue << "\n";</pre>
                    short myValue = 10;
                    yourValue = myValue;
                    cout << "yourValue: " << yourValue << "\n";</pre>
                    yourValue = ::myValue;
                    cout << "yourValue: " << yourValue << "\n";</pre>
                    return 0;
                }
   smartPtr
                #include <iostream.h>
                #include <string.h>
(Chapter
                const short kMaxNameLength = 40;
                //----- Name
                class Name
                    private:
                       char
                                  first[ kMaxNameLength ];
                                  last[ kMaxNameLength ];
                       char
                    public:
                                  Name( char *lastName, char *firstName );
                       void
                                  DisplayName();
                };
                Name::Name( char *lastName, char *firstName )
                    strcpy( last, lastName );
                    strcpy( first, firstName );
                }
                void Name::DisplayName()
                    cout << "Name: " << first << " " << last;</pre>
                //----- Politician
                class Politician
```

```
private:
                     Name
                                *namePtr;
                      short
                                age;
                  public:
                                Politician( Name *namePtr, short age );
                      Name
                                *operator->();
               };
               Politician::Politician( Name *namePtr, short age )
                   this->namePtr = namePtr;
                   this->age = age;
               }
                    *Politician::operator->()
               Name
                  return( namePtr );
               //---- main()
               int main()
                               myName( "Clinton", "Bill" );
                  Name
                  Politician
                               billClinton( &myName, 46 );
                  billClinton->DisplayName();
                  return 0;
    square
               #include <iostream.h>
(Chapter 6)
               //----- Rectangle
               class Rectangle
                        Data members...
                  protected:
                      short height;
                      short width;
                        Member functions...
                  public:
                            Rectangle( short heightParam, short widthParam );
                      void DisplayArea();
               };
```

```
height = heightParam;
                  width = widthParam;
               }
                    Rectangle::DisplayArea()
               void
                  cout << "Area is: " <<
                     height * width << '\n';
               }
               //----- Rectangle: Square
               class Square : public Rectangle
                        Data members...
                        Member functions...
                  public:
                            Square( short side );
               };
               Square::Square( short side ) : Rectangle( side, side )
               //---- main()
               int main()
               {
                            *mySquare;
                  Square
                  Rectangle *myRectangle;
                  mySquare = new Square( 10 );
                  mySquare->DisplayArea();
                  myRectangle = new Rectangle( 10, 15 );
                  myRectangle->DisplayArea();
                  return 0;
               }
               #include <iostream.h>
(Chapter 8)
               int main()
```

Rectangle::Rectangle(short heightParam, short widthParam)

```
done = false;
                     char
                     char
                            c;
                     short number;
                     while ( ! done )
                         cout << "Type a number: ";</pre>
                         cin >> number;
                         if ( cin.good() )
                             if ( number == 0 )
                                cout << "Goodbye...";</pre>
                                done = true;
                            }
                            else
                                cout << "Your number is: " << number << "\n\n";</pre>
                         else if ( cin.fail() )
                            cin.clear();
                            cin.get( c );
                            cout << c << " is not a number...";</pre>
                            cout << "Type 0 to exit\n\n";</pre>
                         }
                         else if ( cin.bad() )
                            cout << "\nYikes!!! Gotta go...";</pre>
                            done = true;
                         }
                     }
                     return 0;
                 }
  strstream
                 #include <iostream.h>
                 #include <strstrea.h>
(Chapter 8)
                 const short kBufferSize = 10;
                 //---- main()
                 int main()
                               buffer[ kBufferSize ];
                     ostrstream ostr( buffer, kBufferSize );
                     short
                               i = 0;
```

```
while ( ostr << (char)('a' + i) )
                         i++;
                     cout << "Number of characters written: "</pre>
                             << i << '\n';
                     buffer[ kBufferSize - 1 ] = '\0';
                     cout << "Buffer contents: " << buffer;</pre>
                     return 0;
                 }
  subscript
                 #include <iostream.h>
(Chapter
                 #include <string.h>
                 const short kMaxNameLength = 40;
                 //---- Name
                 class Name
                     private:
                                nameString[ kMaxNameLength ];
                         char
                         short nameLength;
                     public:
                                Name( char *name );
                         void
                                operator()();
                         char
                                &operator[]( short index );
                 };
                 Name::Name( char *name )
                     strcpy( nameString, name );
                     nameLength = strlen( name );
                 }
                 void
                       Name::operator()()
                 {
                     cout << nameString << "\n";</pre>
                 char& Name::operator[]( short index )
                     if ( ( index < 0 ) | \cdot | ( index >= nameLength ) )
                         cout << "index out of bounds!!!\n";</pre>
                         return( nameString[ 0 ] );
```

```
}
                   else
                      return( nameString[ index ] );
               }
               //---- main()
               int main()
               {
                            pres( "B. J. Clinton" );
                  Name
                  pres[ 3 ] = 'X';
                  pres();
                  pres[ 25 ] = 'Z';
                  pres();
                  return 0;
               }
  template
               #include <iostream.h>
(Chapter 9)
               const short kNumElements = 10;
               //----- Array
               template <class T>
               class Array
                  private:
                      short
                                arraySize;
                                *arrayPtr;
                      Т
                                errorRetValue;
                  public:
                               Array( short size );
                                ~Array();
                                &operator[]( short index );
               };
               template <class T>
               Array<T>::Array( short size )
                   arraySize = size;
                   arrayPtr = new T[ size ];
                   errorRetValue = 0;
               }
```

```
template <class T>
Array<T>::~Array()
   delete [] arrayPtr;
template <class T>
  &Array<T>::operator[]( short index )
   if ( ( index < 0 ) || ( index >= arraySize ) )
       cout << "index out of bounds(" << index << ")\n";</pre>
       return( errorRetValue );
   }
   else
      return( arrayPtr[ index ] );
}
//----- Power
template <class T>
  Power( T base, T exponent )
   T i, product = 1;
   for ( i=1; i<=exponent; i++ )</pre>
      product *= base;
   return( product );
}
//---- main()
int main()
{
   Array<short> myRay( kNumElements );
   Array<long> myLongRay( kNumElements );
   short
                 i, shortBase = 4;
   long
                 longBase = 4L;
   for ( i=0; i<=kNumElements; i++ )</pre>
       myRay[ i ] = Power( shortBase, i );
   cout << "---\n";
   for ( i=0; i<kNumElements; i++ )</pre>
       cout << "myRay[" << i << "]: " << myRay[ i ] << "\n";
   for ( i=0; i<kNumElements; i++ )</pre>
       myLongRay[ i ] = Power( longBase, (long)i );
```

```
cout << "---\n";
                    for ( i=0; i<kNumElements; i++ )</pre>
                        cout << "myLongRay[" << i</pre>
                            << "]: " << myLongRay[ i ] << "\n";
                    return 0;
                 }
                 #include <iostream.h>
(Chapter 7)
                 //---- Time
                 class Time
                 {
                           Data members...
                    private:
                        short hours;
                        short minutes;
                        short seconds;
                 //
                           Member functions...
                        void
                               NormalizeTime();
                    public:
                               Time();
                               Time( short h, short m, short s );
                        void
                               Display();
                        Time
                               operator+( Time &aTime );
                        void
                               operator*=( short num );
                 };
                 Time::Time()
                    seconds = 0;
                    minutes = 0;
                    hours = 0;
                 Time::Time( short h, short m, short s )
                    seconds = s;
                    minutes = m;
                    hours = h;
                    NormalizeTime();
                 }
                 void
                        Time::NormalizeTime()
```

```
hours += ((minutes + (seconds/60)) / 60);
   minutes = (minutes + (seconds/60)) % 60;
   seconds %= 60;
}
void
      Time::Display()
   cout << "(" << hours << ":" << minutes
          << ":" << seconds << ")\n";
}
     Time::operator+( Time &aTime )
   short h;
   short m;
   short s;
   h = hours + aTime.hours;
   m = minutes + aTime.minutes;
   s = seconds + aTime.seconds;
   Time
        tempTime( h, m, s );
   return tempTime;
}
       Time::operator*=( short num )
void
   hours *= num;
   minutes *= num;
   seconds *= num;
   NormalizeTime();
}
//---- main
int main()
          firstTime( 1, 10, 50 );
   Time
          secondTime( 2, 24, 20 );
   Time
   Time
        sumTime;
   firstTime.Display();
   secondTime.Display();
   cout << "----\n";
```

```
sumTime = firstTime + secondTime;
                    sumTime.Display();
                   cout << "*
                                 2\n";
                    cout << "----\n";
                   sumTime *= 2;
                   sumTime.Display();
                   return 0;
                }
                #include <iostream.h>
(Chapter 9)
                class Root
                   protected:
                      short num;
                   public:
                              Root( short numParam );
                };
                Root::Root( short numParam )
                   num = numParam;
                   cout << "Root constructor called\n";</pre>
                }
                //---- Base1
                class Basel : public virtual Root
                   public:
                       Base1();
                };
                Basel::Basel() : Root( 1 )
                   cout << "Base1 constructor called\n";</pre>
```

```
//----- Base2
class Base2 : public virtual Root
  public:
     Base2();
};
Base2::Base2() : Root( 2 )
   cout << "Base2 constructor called\n";</pre>
//----- Derived
class Derived : public Base1, public Base2
   public:
           Derived();
     short GetNum();
};
Derived::Derived() : Root( 3 )
   cout << "Derived constructor called\n";</pre>
}
short Derived::GetNum()
  return( num );
//---- main()
int main()
  Derived myDerived;
   cout << "----\n"
     << "num = " << myDerived.GetNum();
   return 0;
}
```

whatAml #include <iostream.h> (Chapter 6)

```
//---- Shape
class Shape
   Data members...
// Member functions...
  public:
    virtual void WhatAmI();
};
void Shape::WhatAmI()
 cout << "I don't know what kind of shape I am!\n";
//----- Shape:Rectangle
class Rectangle : public Shape
//
    Data members...
       Member functions...
  public:
    void WhatAmI();
};
void Rectangle::WhatAmI()
 cout << "I'm a rectangle!\n";</pre>
//---- Shape:Triangle
class Triangle : public Shape
{
//
       Data members...
       Member functions...
  public:
    void WhatAmI();
};
void Triangle::WhatAmI()
```

```
cout << "I'm a triangle!\n";
}

//------ main()

int main()
{
    Shape *s1, *s2, *s3;

    s1 = new Rectangle;
    s2 = new Triangle;
    s3 = new Shape;

    s1->WhatAmI();
    s2->WhatAmI();
    s3->WhatAmI();
    return 0;
}
```

Appendix C

fstream.h

```
// IOStreams Package
// Steve Teale April 1992
// Copyright Symantec Corp 1990-1992. All Rights Reserved.
#ifndef ___FSTREAM_H
#define __FSTREAM_H
#include <iostream.h>
class filebuf : public streambuf {
// This is a streambuf class specialized for handling files.
// The get and put pointers are locked together so that reads and writes
// happen at the same offset into the file.
  public:
    enum { openprot = 0644 };
    filebuf();
     // The default constructor. Creats a filebuf that is not associated
     // with any file. open() or attach() can then be used to connect
     // to a file.
     filebuf(int file_descriptor, int io_mode = ios::in|ios::out
       #if M_UNIX || M_XENIX
         );
       #else
          |ios::translated);
```

```
#endif
// Constructs a filebuf for the open file attached to the argument
// file descriptor. More comprehensive io_mode information can
// be specified e.g. ios::app, if required
filebuf(int descriptor, char *memory, int length,
  int io_mode = ios::in|ios::out
  #if M_UNIX || M_XENIX
    );
  #else
     |ios::translated);
  #endif
// Constructs a filebuf for the open file attached to the
// file_descriptor, and sets the buffer to "memory", which is of
// "length" bytes in size. If memory is 0 or length is <= 0,
// it is taken as a request that the file be unbuffered.
~filebuf();
filebuf *attach(int file_descriptor,
  int io_mode = ios::in|ios::out
  #if M_UNIX_ || M_XENIX
    );
  #else
     |ios::translated);
  #endif
// Attaches an open file to a filebuf. Returns "this" if successful,
// 0 if the filebuf is already attached to a file.
filebuf *close();
// Flushes output, closes the file, and detaches the file from this
// filebuf. Clears the error state unless there is an error flushing
// the output. Will always close the file and detach it from the
// filebuf, even if there are errors.
int fd() const { return file; };
// Returns the file descriptor for the connected file. If the
// filebuf is closed or not attached to a file, returns EOF.
int is_open() const { return file != EOF; };
// Returns non-zero when this filebuf is attached to a file,
// otherwise returns zero.
filebuf *open(const char *name, int io_mode,
  int protection = openprot);
// Opens the file "name", and connects it to this filebuf.
// io_mode is a bit-mask containing one or more of the values of
// enum open_mode:
// ios::in
                   Open for reading.
// ios::out
                  Open for writing.
```

```
// ios::ate
                     Position to the end-of-file.
  // ios::app
                     Open the file in append mode.
  // ios::trunc
                     Truncate the file on open.
                     Do not attempt to create the file if itdoes not exist.
  // ios::nocreate
  // ios::noreplace Cause the open to fail if the file exists.
  // ios::translate Convert CR/LF to newline on input and vice versa on output
  streampos seekoff(streamoff offset, ios::relative_to,
     int which);
  // Relative seek the get and put pointers within the file.
  // The get and put pointers of a filebuf always point to the
  // same byte of the file.
  streambuf *setbuf(char *memory, int length);
  // Set the buffer to use "memory", of "length" bytes.
  // If memory == 0 or length <= 0, it is taken as a request that
  // I/O to the file be unbuffered.
  int sync();
  // Flush any bytes in the get buffer, and re-position the file so
  // that is appears they were never read. Write any bytes in the
  // put buffer to the file.
  #if __ZTC__ > 0x214
     int overflow(int c);
  #else
     int overflow(int c = EOF);
  #endif
  // Flush bytes in the put area to the file.
  int underflow();
  // Get more bytes for reading.
protected:
  int doallocate();
  int pbackfail(int c);
  // Called to atempt recovery if putback attempted at
  // start of get buffer
private:
  void buffer_setup();
  // Internal. Set up I/O buffer.
  int newlines();
  // count newline chars in the get buffer
  int syncin();
  int syncout();
  // two halves of sync() function
```

```
int fillbuf();
     int flushbuf();
     // Functions which actually transfer to/from the file
     // File descriptor for the associated file.
     short mode:
     // I/O mode from the argument to open().
     char unbuf[2];
     // pseudo buffer for unbuffered operation
     char *gptr_;
     char *egptr_;
     // Save old gptr() & egptr() while using the
     // pushback buffer.
     char pushback_buf[4];
     // Reserve buffer for pushback.
     // Only used if there is no room for pushback in
     // the regular buffer.
     char do_not_seek;
     // Set if the file (device) does not support seeks.
     // This is set for a TTY, or a Unix pipe.
     char own_file_descriptor;
     // Set if the file descriptor is from open, and
     // the file should be closed by the destructor.
     static const int lseek consts[3];
     // A look up table for the lseek constants from
     // the appropriate C header file
};
class fstream_common : virtual public ios {
// Features common to ifstream, ofstream, and fstream.
  public:
     void attach(int file_descriptor, int io_mode);
     // Attach the filebuf to the argument file descriptor, error state
     // set to ios::failbit|ios::badbit on failure.
     void close();
     // Flush the filebuf, and close the file attached to it. Error state
     // set ios::failbit|ios::badbit if rdbuf()->sync() fails. File closed
     // regardless.
```

```
void open(const char *name, int io_mode,
       int protection = filebuf::openprot);
     // Open a file, and attach it to the filebuf. Error state set to
     // ios::failbit|ios::badbit on failure
     void setbuf(char *memory, int length)
         buffer.setbuf(memory, length);
     // Use the argument memory, of the given length, as the I/O buffer.
     filebuf *rdbuf() { return &buffer; }
     // Note that fstream_common::rdbuf returns a filebuf*
     // instead of a streambuf*.
  protected:
     fstream_common();
     filebuf buffer;
};
class ifstream : public fstream_common, public istream {
  public:
     ifstream();
     // Create an ifstream not attached to any file.
  ifstream(const char *name, int io_mode = ios::in | ios::nocreate
     #if M_UNIX || M_XENIX
       ,int protection = filebuf::openprot);
     #else
       | ios::translated, int protection = filebuf::openprot);
     #endif
  // Open the argument file and create an ifstream attached to it.
  ifstream(int file_descriptor, int io_mode = ios::in
     #if M_UNIX || M_XENIX
       );
     #else
       | ios::translated);
     #endif
  // Create an ifstream attached to the argument file descriptor.
  ifstream(int file_descriptor, char *memory, int length,
     int io_mode = ios::in
     #if M_UNIX || M_XENIX
       );
     #else
       | ios::translated);
     #endif
  // Create an ifstream attached to the argument file descriptor, and
  // using the argument memory as the I/O buffer.
```

```
~ifstream();
  void attach(int file_descriptor, int io_mode = ios::in
     #if M_UNIX || M_XENIX
     #else
       | ios::translated)
     #endif
  {
     fstream_common::attach(file_descriptor, io_mode);
  }
  void open(const char *name, int io_mode = ios::in
     #if M_UNIX || M_XENIX
       ,int protection = filebuf::openprot)
     #else
       | ios::translated, int protection = filebuf::openprot)
     #endif
  {
     fstream_common::open(name, io_mode, protection);
  }
};
class ofstream : public fstream_common, public ostream {
  public:
     ofstream();
     // Create an ofstream not attached to any file.
  ofstream(const char *name, int io_mode = ios::out
     #if M_UNIX || M_XENIX
       ,int protection = filebuf::openprot);
     #else
       | ios::translated, int protection = filebuf::openprot);
     #endif
  // Open the argument file and create an ofstream attached to it.
  ofstream(int file_descriptor, int io_mode = ios::out
     #if M_UNIX || M_XENIX
       );
     #else
       | ios::translated);
     #endif
  // Create an ofstream attached to the argument file descriptor.
  ofstream(int file_descriptor, char *memory, int length,
     int io_mode = ios::out
     #if M_UNIX || M_XENIX
       );
     #else
```

```
| ios::translated);
     #endif
  // Create an ofstream attached to the argument file descriptor, and
  // using the argument memory as the I/O buffer.
  ~ofstream();
  void attach(int file_descriptor, int io_mode = ios::out
     #if M_UNIX || M_XENIX
      )
     #else
       ios::translated)
     #endif
  {
     fstream_common::attach(file_descriptor, io_mode);
  void open(const char *name, int io_mode = ios::out
     #if M_UNIX_ || M_XENIX
       ,int protection = filebuf::openprot)
     #else
      | ios::translated, int protection = filebuf::openprot)
     #endif
  {
     fstream_common::open(name, io_mode, protection);
  }
};
class fstream : public fstream_common, public iostream {
  public:
     fstream();
// Create an fstream not attached to any file.
  fstream(const char *name, int io_mode = ios::in|ios::out
     #if M_UNIX || M_XENIX
       ,int protection = filebuf::openprot);
     #else
       ios::translated, int protection = filebuf::openprot);
  // Open the argument file and create an fstream attached to it.
  fstream(int file_descriptor, int io_mode = ios::in | ios::out
     #if M_UNIX || M_XENIX
      );
     #else
       | ios::translated);
     #endif
  // Create an fstream attached to the argument file descriptor.
```

```
fstream(int file_descriptor, char *memory, int length,
     int io_mode = ios::in | ios::out
     #if M_UNIX || M_XENIX
       );
     #else
       ios::translated);
     #endif
  // Create an fstream attached to the argument file descriptor, and
  // using the argument memory as the I/O buffer.
  ~fstream();
  void attach(int file_descriptor, int io_mode = ios::in | ios::out
     #if M_UNIX || M_XENIX
     #else
       | ios::translated)
     #endif
  {
     fstream_common::attach(file_descriptor, io_mode);
  }
  void open(const char *name, int io_mode = ios::in | ios::out
     #if M_UNIX || M_XENIX
       ,int protection = filebuf::openprot)
     #else
       | ios::translated, int protection = filebuf::openprot)
     #endif
  {
     fstream_common::open(name, io_mode, protection);
  }
};
#endif // __FSTREAM_H
```

Appendix D

iomanip.h

```
// IOStreams Package
// Steve Teale April 1992
// Copyright Symantec Corp 1990-1992. All Rights Reserved.
#ifndef __IOMANIP_H
#define __IOMANIP_H
#include <iomdefs.h>
ios &_iomanip_resetiosflags(ios&, long);
inline SMANIP<long> resetiosflags(long f)
  { return SMANIP<long>(_iomanip_resetiosflags,f); }
ios &_iomanip_setfill(ios&, int);
inline SMANIP<int> setfill(int filler)
  { return SMANIP<int>(_iomanip_setfill,filler); }
ios &_iomanip_setiosflags(ios&, long);
inline SMANIP<long> setiosflags(long f)
  { return SMANIP<long>(_iomanip_setiosflags,f); }
ios &_iomanip_setprecision(ios&, int);
inline SMANIP<int> setprecision(int n)
  { return SMANIP<int>(_iomanip_setprecision,n); }
ios &_iomanip_setw(ios&, int);
inline SMANIP<int> setw(int w)
  { return SMANIP<int>(_iomanip_setw,w); }
ios &_iomanip_setbase(ios&, int);
inline SMANIP<int> setbase(int n)
  { return SMANIP<int>(_iomanip_setbase,n); }
#endif // __IOMANIP_H
```

Appendix E

iostream.h

```
// IOStreams Package
// Steve Teale April 1992
// Copyright Symantec Corp 1990-1992. All Rights Reserved.
#ifndef __IOSTREAM_H
#define __IOSTREAM_H
#include <stddef.h>
#include <2comp.h>
#define seek_dir relative_to
#ifndef EOF
const int EOF = -1;
#endif
const int _ios_default_decimal_precision = 6;
const int _ios_n_extended_format_words = 10;
// This is the number of extended format state words reserved for use
// by derived classes and user inserters. This value should be reasonably
// small, as it inflates the size of each instance of ios.
class streampos {
friend class streamoff;
public:
  streampos(long elems, size_t elemsize = 1) : ne(elems), es(elemsize) {}
  operator long() const { return (ne == -1)? EOF: ne*es; }
private:
  long ne;
  size_t es;
};
```

```
class streamoff {
public:
  streamoff(long elems, size_t elemsize = 1) : ne(elems), es(elemsize) {}
  streamoff(streampos &a) : ne(a.ne), es(a.es) {}
  size_t stepsize() const { return es; }
  long steps() const { return ne == -1? 0: ne; }
  streamoff& operator += (long o) { ne += o; return *this; }
  streamoff& operator -= (long o) { ne -= o; return *this; }
  operator long() const { return steps()*es; }
private:
  long ne;
  size_t es;
class streambuf;
class ostream;
class istream;
class ios {
// This is the base class for istream and ostream, and all of their
// derivations.
friend ostream &endl(ostream &);
public:
  enum io_state {
     goodbit=0,
     // No errors - everything hunky dory!
     // Normally set when underflow failed because there was no more file.
     // An error has ocurred, but it is probably recoverable, and the
     // stream is still in a useable state
     badbit=4
     // A fatal error has ocurred
  // This is called seek_dir in the AT & T version, which is misleading.
  // A define is included above for compatibility. These enumerators are
  // used to specify relative seeks in streams.
  enum relative_to {
    beg,
     // For seek operations relative to the beginning of the stream (file),
     // relative to the current position in the stream (file),
```

```
end
  // and relative to the end of the stream (file)
// The following enumeration applies to file related derivatives.
enum open_mode {
  in=0x1.
  // Input allowed
  out=0x2,
  // Output allowed
  ate=0x4,
  // A seek to the end of the file to be performed during open.
  app=0x8,
  // All writes are to the end of the file - implies out
  trunc=0x10,
  // Existing contents of the file to be discarded. Implies out
  // unless ate or app specified as well.
  nocreate=0x20,
  // Open will fail if the file does not already exist
  noreplace=0x40,
  // Open will fail if the file does already exist
  translated = 0x80
  // CR/LF pairs to be translated to newline characters on input
  // and newline characters to be translated to CR/LF pairs on
  // output (the normal behaviour for DOS)
};
// The formatting state is a bit-mask used to control some of the
// inserters and extractors. All of the bits of the format state
// can be manipulated by flags(), setf(), and unsetf(). Some
// specialized parts of the formatting state can be manipulated
// by fill(), width(), and precision() . Here are the meanings
// of the various bits:
enum format_mode {
  skipws = 0x1,
  // Skip past leading white space when extracting.
  // Since zero-width fields are considered an
  // error by the numeric extractors, attempting
  // to extract white-space into a number without
  // this bit set will set an error flag.
  left = 0x2,
  // Left-adjust values when inserting (fill on the right).
```

```
right = 0x4,
// Right-adjust values when inserting (fill on the left).
internal = 0x8,
// When inserting, fill _between_ the numeric sign or
// base indicator and the value.
dec = 0x10, oct = 0x20, hex = 0x40,
// Default radix for integers. If neither dec, octal,
// or hex is set, integer inserters use base 10, and
// integer extractors interpret numbers according to the
// C++ lexical convention: "0x" precedes a base-16 number,
// and a number with a leading zero is base-8.
showbase = 0x80,
// If this is set, base-16 numbers will be inserted with a
// leading "0x", and base-8 numbers will have a leading zero.
showpoint = 0x100,
// If this is set, the floating-point inserters will print a
// decimal point and trailing zeroes, even when the trailing
// places are not significant.
uppercase = 0x200,
// If this is set, "E" instead of "e" will be used to indicate
// the exponent of a floating point number, and "A" through "F"
// will be used to represent base-16 numerals instead of "a"
// through "f".
11
// If uppercase and showbase are both set, the string "0X" \,
// instead of "0x" will be used to indicate a base-16 number.
showpos = 0x400,
// If this is set, positive numbers will be inserted with a
// leading "+".
scientific = 0x800,
// If this is set, the floating-point inserters will print a
// number with one digit before the decimal point, and the
// number of digits after the decimal point equal to the
// value of precision(). The character "e" will introduce the
// exponent.
fixed = 0x1000,
// If this is set, the floating-point inserters will use
// precision() to determine the number of digits after the
// decimal point.
//
// If neither scientific or fixed is set, numbers with
// exponents smaller than -4 or greater than precision() will
// be printed as if scientific were set. Other numbers will
// be printed using zeroes to explicitly show the decimal place.
```

```
unitbuf = 0x2000,
    // When this is set, a flush is performed after each insertion
    // (by ostream::osfx()). This is more efficient than using
    // unbuffered output, but provides most of the same advantages.
    stdio = 0x4000
    // When this is set, streams using stdiobufs will flush stdout and
    // stderr after each insertion.
    // Note that it is not possible to use bit 0x8000 in this way,
    // as this evaluates to an enumerator with a negative value and
    // lots of bits set.
  }; // end enum format_mode
static const long stickywidth; static const long spacing;
  enum format_mode_mask {
    defaults = right|skipws, basefield = dec|oct|hex,
    adjustfield = left right internal, floatfield = scientific fixed
  };
public: // just a reminder!
  ios(streambuf *buffer);
  // Construct an ios associated with the argument streambuf.
  // "buffer" should not be null.
  virtual ~ios();
// Functions to interrogate/set the error state
  int good() const { return error_state == 0; };
  // If there are no error bits set, this returns non-zero, otherwise
  // it returns zero.
  int eof() const { return error_state & eofbit; };
  // If eofbit is set in the error state, this return non-zero, otherwise
  // it returns zero. This indicates that end-of-file has been reached
  // while reading the character stream.
  int fail() { return error_state & (badbit | failbit); }
  // If badbit or failbit is set in the error state, return non-zero.
  // Otherwise, return zero. Failbit generally indicates that some
  // extraction has failed, but the stream may still be used once
  // failbit has been cleared.
  int bad() const { return error_state & badbit; }
  // Returns non-zero if badbit is set in the error state. This
  // indicates some unrecoverable error, generally an I/O error.
  int operator!() const
    return error_state & (badbit|failbit);
```

```
// Return non-zero if badbit or failbit is set in the error state,
  // which allows expressions of the form:
  // if (!cout )
  operator void*()
    return (error_state & (badbit|failbit))?
       0: this;
  // Convert an ios to a value that can be compared to zero, but can
  \ensuremath{//} not be easily used accidentally. The return value is a void pointer
  // that will be zero if failbit or badbit is set in the error state,
  // and non-zero otherwise. This allows an iostream to be used
  // in conditional expressions that test its state, as in:
  // if ( cin ) and if ( cin >> variable )
  int rdstate() const { return error_state; };
  // Returns the current error state.
  void clear(int new_state = 0) { error_state = new_state; }
  // Stores "new_state" as the error state.
  //
  // To set a bit without clearing others requires something like
  // clear(bits_to_set | rdstate()) .
// Functions to set/interrogate various options
  char fill(char new_value)
    char old_value = padding_character;
    padding_character = new_value;
    return old_value;
  // Sets the fill character, and returns the old value. This is the
  // character used to pad output when the left, right, or internal
  // adjustments are in effect.
  char fill() const { return padding_character; }
  // Returns the fill character.
  int precision(int new_value)
    int old_value = decimal_precision;
    decimal_precision = new_value >= 0?
       new_value: _ios_default_decimal_precision;
    return old_value;
  \ensuremath{//} Sets the decimal precision, and returns the old value.
  // This controls the number of digits inserted after the decimal
  // point by the floating-point inserter.
```

```
int precision() const { return decimal_precision; }
// Returns the current decimal precision.
ostream *tie(ostream * new_value)
  ostream *old_value = tied_ostream;
  tied_ostream = new_value;
  return old_value;
};
// Facilitate automatic flushing of iostreams.
// Associate this ios to an ostream such that the ostream will be
// flushed before this ios makes a request for characters, or flushes
// output characters. These ties exist by default:
// cin.tie(cout);
// cout.tie(cerr);
// cout.tie(clog);
11
// For other instances of ios, the tie is set to zero by default.
// This returns the old value.
long flags() const { return format_state; }
// Return the format state flags.
long flags(long new_value)
  long old_value = format_state;
  format_state = new_value;
  return old_value;
// Sets the format state flags, returning the old values.
long setf(long bits_to_set, long mask = 0) {
  long old_value = format_state; format_state =
     (format_state & ~mask) | bits_to_set;
  return old_value;
// Clears the bits corresponding to mask in the format state, and
// then sets only those bits from the value of bits_to_set.
long unsetf(long bits_to_clear)
  long old_value = format_state;
  format_state &= ~bits_to_clear;
  return old_value;
};
// Clears flags in the format state.
ostream *tie() const { return tied_ostream; };
// Return the current "tied" ostream.
int width(int new_value);
// Sets the field width used by inserters.
```

```
// When the width is zero, inserters will use only as many characters
  // as necessary to represent a value. When the width is non-zero,
  // inserters will insert at least that many characters, using the
  // fill character to pad out the field. Inserters will never truncate,
  // so they may output more characters than the current width.
  int width() const { return field_width; };
  // Returns the current width.
// Other utilities
  streambuf *rdbuf() { return buf; }
  // Returns a pointer to the streambuf associated with this ios.
  static void sync_with_stdio();
  // Use this when mixing C and C++ in the same program.
  // It resets cin, cout, cerr, and clog to use stdiobufs, and
  // thus makes I/O to these streams compatible with the C stdio.
  // Invoking this degrades performance.
// Functions to manipulate user defined format flags and control
// words.
  static int bitalloc();
  // Returns an int with one previously-unallocated bit set.
  // This allows users who need an additional format flag to
  // get one. Note that this allocation is global for class ios,
  // not local to any instance of class ios.
  static int xalloc();
  // Returns a previously-unused index into an array of words usable
  // as format-state variables by derived classes.
  long &iword(int index)
  {
    return extended_format_words[index].1;
  // Returns a reference to one of the auxillary format state words
  // reserved for use by derived classes and user inserters, where
  // index is a value returned by xalloc().
  void* &pword(int index)
  {
    return extended_format_words[index].vp;
  // Returns a reference to a pointer to one of the auxillary format
  // state words reserved for use by derived classes and user
  // inserters, where index is a value returned by xalloc().
```

```
protected:
  void set_buffer(streambuf *b) { buf = b; }
private:
  streambuf *buf;
  ostream *tied_ostream;
  long format_state;
  char error state:
  char padding_character;
  short decimal_precision;
  short field_width;
  union {
    void *vp;
    long 1;
     } extended_format_words[_ios_n_extended_format_words];
  ios(const ios&);
  ios &operator=(const ios&);
  // These copying functions are private so that the compiler
  // will complain about an attempt to assign an ios. It is not
  // actually defined. Instead of copying an ios, assign a pointer
  // to it.
};
// Manipulator functions
ios &dec(ios&);
// Set the default integer radix to 10.
// Invoke this (and the other manipulators) this way:
// stream >> dec;
// stream << dec;
ios &hex(ios&);
ios &oct(ios&);
ios &defaults(ios&);
class streambuf {
// Streambuf abstracts the operations used to perform I/O on a character
// stream such as a computer terminal, a file or a string.
11
// The two basic operations are "get", which fetches characters from the
// stream, and "put", which places characters on the stream. Some streambufs
// are unidirectional, in which case they support the "get" operation but
// not "put", or vice-versa.
11
// Some streambufs are bi-directional, with the "get" and "put" offsets
// at different locations in the stream. Some streambufs may implement
// a circular buffer between the "get" and "put" offsets, as in a FIFO.
// Some streambufs lock the "get" and "put" offset together, as in a UNIX file.
// Some streambufs provide buffered I/O on the underlying character streams
// for efficiency.
```

```
// Streambufs contain a buffer, a get area, and a put area. Usually, the
// get area and put area overlap the buffer, but do not overlap each other.
public:
  streambuf();
  // The default constructor.
  streambuf(char *memory, int length);
  // Constructs a streambuf, possibly using the argument buffer.
  virtual ~streambuf();
  void dbp();
  // Write debugging information about the streambuf on file
  // descriptor 1. Nothing about the form of that information
  // is specified.
  int in_avail() const { return _egptr - _gptr; }
  // Return the number of characters that can be read immediately
  // with a guarantee that no errors will be reported.
  int out_waiting() const { return _pptr - _pbase; }
  // Return the number of characters that have not
  // been flushed away, or EOF if there are no characters.
  virtual streambuf *setbuf(char *memory, int length);
  // Requests that this streambuf use the argument memory buffer.
  // Special case: a null memory argument, or a length argument that is
  // zero or negative, is taken as a request that this streambuf be
  // unbuffered.
  11
  // If the request to set the buffer is honored, return "this",
  // otherwise return 0.
  // * Use of this interface, except by a derived class of streambuf,
  // is discouraged. It is not protected for compatibility with the
  // original stream package in Stroustrup.
  // The default version of this member will honor the request if no
  // buffer has been allocated.
  virtual streampos seekpos(streampos position,
     int which=ios::in|ios::out);
  // Performs an absolute seek of the get or put pointers, or both, to
  // "position". Position is an implementation-dependent value which
  // should not have arithmetic performed on it. "which" signifies what
  // pointer is to be affected: ios::in signifies the get pointer, and
  // ios::out signifies the put pointer. The two "which" values may be
  // or-ed together, in which case the operation affects both pointers.
  //
  // * The default version of this member returns
           seekoff(position, ios::beg, which)
```

```
// thus is is only necessary for a derived class to define
// seekoff(), and use the inherited seekpos().
virtual streampos seekoff(streamoff offset, ios::relative_to pos,
  int which=ios::in|ios::out);
// Performs a relative seek of the get or put pointers, or both, by
// "offset". Position is a byte offset, and may be negative.
// "pos" may be ios::beg, which signifies a seek relative to
// the beginning of the stream; ios::cur, which signifies a seek
// relative to the current position in the stream; and ios::end, which
// signifies a seek relative to the end of the stream.
// "which" signifies what pointer is to be affected: ios::in
// signifies the get pointer, and ios::out signifies the put pointer.
// The two "which" values may be or-ed together, in which case the
// operation affects both pointers.
// * The default version of this member always returns EOF.
int sgetc()
  return _gptr < _egptr?
     (unsigned char) *_gptr: underflow();
// Returns the character at the get pointer, without moving the get
// pointer.
int sbumpc()
{
  return _gptr < _egptr?
     (unsigned char) *_gptr++: sbumpc_special();
// Moves the get pointer forward one character, and return the
// character it moved past.
int sgetn(char *buffer, int count);
// Fetch the "count" characters following the get pointer, and
// stores them in "buffer". If there are less than "count" characters,
// the number remaining are fetched. The get pointer is repositioned
// after the fetched characters, and the number of characters fetched
// is returned.
int snextc()
  return _gptr+1 < _egptr?
     ((unsigned char) *(++_gptr)): underflow();
// Skip past the character at the get pointer, and return the
// character after that, or EOF.
int sputbackc(char c)
{
  return _gptr > _gbase?
     (*(--_gptr) = c, 0): pbackfail(c & 0x00ff);
```

```
// Move the get pointer back one character. If c is not the last
// character retrieved, the effect is undefined. In this implementation
// it should work
int sputc(int c)
  return _pptr < _epptr?
     (*_pptr++ = c, 0): overflow(c & 0x00ff);
// Store c on the character stream, advancing the "put" pointer.
// Return EOF when an error occurs.
int sputn(const char *string, int length);
// Store "n" characters on the character stream, advancing the "put"
// pointer past the stored characters. Return the number of characters
// stored, which may be less than "n" if there is an error.
void stossc()
{
  if (_gptr < _egptr) ++_gptr;</pre>
// Skip the "get" pointer forward, wasting one character of input.
// If the get pointer is already at the end of the sequence
// this has no effect.
virtual int sync();
// Make the external character stream and the streambuf consistent
// with each other. This usually means:
// 1. If there are characters in the get area, return them to the
11
     stream, or throw them away. Re-position the stream so that
      it appears that the characters that had been in the get area
//
     had never been taken from the stream.
// 2. If there are characters in the put area, store them to the
11
      stream. Re-position the stream immediately after the characters
11
      just stored.
// 3. Return EOF if there's an error, otherwise return some other
//
//
       * The default version of this member will return 0 if the get area
//
         is empty, otherwise it returns EOF.
virtual int overflow(int c = EOF);
// This is called to store characters in the character stream, usually
// when the put area is full. It generally stores all of the characters
// that are in the put area, stores c if it is not EOF, and calls
// setp() to establish a new put area. It should return EOF if it
// has an error, otherwise return some other value.
virtual int underflow();
// This is called to read characters from the character stream,
// usually when the get area is empty. It should read one or more
```

```
// characters, and place them in the get area. It should return the
// first character in the get area, without incrementing the get
// pointer. It should return EOF if there's a problem.
// Buffer base and one past the end
char *base() const { return _base; }
char *ebuf() const { return _ebuf; }
// Get pointer, pushback limit, and one past end of put area
char *gptr() const { return _gptr; }
char *eback() const { return _gbase; }
char *egptr() const { return _egptr; }
// Put pointer, and one past end of put area
char *pbase() const { return _pbase; }
char *pptr() const { return _pptr; }
char *epptr() const { return _epptr; }
int blen() const { return _ebuf-_base; }
// Return the size in characters of the buffer.
int allocate();
// Try to set up the buffer. If one already exists or unbuffered() is
// non-zero, return 0 without doing anything. If something goes wrong,
// return EOF. Otherwise, return 1. This function is only called by
// virtual members of the base class streambuf, thus you can override
// everything that uses it.
virtual int doallocate();
// This is called when allocate() determines that space is needed.
// This function must call setb() to set up the buffer, and return
// a non-eof value, or return EOF if it can not get space.
// This function is only called if unbuffered() is zero, and base()
// is zero.
//
\ensuremath{//} * The default version allocates a buffer using operator new.
virtual int pbackfail(int c);
// This is called by sputbackc() when the get pointer is equal to
// the base of the get area, and there is thus no space to put back
// characters. It may try to re-arrange the buffer so that it is
// possible to put back characters, and then put back c. If it
// succeeds it should return c, otherwise it should return EOF.
// * The default version of this member always returns EOF.
void setg(char *base, char *get, char *end)
  _gbase = base;
  _gptr = get;
  _egptr = end;
// Sets the base of the get area, the get pointer, and the end of
// the get area.
```

```
void setp(char *base, char *end)
     _pbase = _pptr = base;
     _epptr = end;
  // Sets the base of the put area, the put pointer, and the end of
  // the put area.
  void setb(char *base, char *end, int own = 0);
  // Sets the base and end of the buffer. If own is true, then this
  // streambuf will delete base in its destructor or if setb() is called
  // again.
  void gbump(int n) { _gptr += n; }
void pbump(int n) { _pptr += n; }
  int unbuffered() const { return _unbuffered; }
  void unbuffered(int u) { _unbuffered = u; }
private:
  char *_base;
  char *_ebuf;
  char *_gbase;
  char *_gptr;
  char *_egptr;
  char *_pbase;
  char *_pptr;
  char *_epptr;
  char _unbuffered;
  char _owned;
  char unbuf[2];
  // This is big enough to deal with the translated case when unbuffered
  int sbumpc_special();
  // Called by sbumpc() when get_pointer == get_area_end.
  // Simply calls overflow(), increments the get pointer, and
  // returns the value returned by overflow(). It's here so that
  // the special-case code does not have to be inlined.
class ostream : virtual public ios {
// This is the class used for formatted character output.
// The various "operator << (...)" members are called "inserters", because
// they insert information into the character stream.
// Unless otherwise noted, all of the functions here that do output set
// the error state on failure.
//
// Where the inserters perform conversions of numbers to a readable string,
// the conversion is affected by the format state flags in ios::flags().
```

```
public:
  ostream(streambuf * buffer);
  // Construct an ostream associated with the argument streambuf.
  virtual ~ostream();
  ostream &flush();
  // Flush any characters queued for output.
  int opfx();
  // Perform output-prefix operations.
  // If the error state is non-zero, return zero immediately.
  // If there is a tied ostream (see ios::tie()), flush it.
  // Return non-zero. If you define your own inserter that directly
  // manipulates the streambuf instead of calling other inserters,
  // it should call this when it starts.
  void osfx();
  // Perform output-suffix operations.
  // If ios::unitbuf is set in the format state, flush output.
  // If ios::stdio is set, flush stdio and stderr.
  // If you define your own inserter that directly manipulates the
  // streambuf, it should call this just before returning.
  // All of the inserters in ostream call this.
  // The binary put() and write() functions do not call this.
  ostream &put(char c);
  // Inserts a character
  ostream &seekp(streampos position);
  // Absolute seeks the output stream to "position".
  ostream &seekp(streamoff offset, seek_dir direction);
  // Relative seeks the output stream. See streambuf::seekoff()
  streampos tellp():
  // Returns the current position in the output stream.
  ostream &write(const void *data, size_t size);
  size_t pcount() { return write_count; }
  // Inserts the block of "size" bytes starting at "data". Does not
  // perform any formatting. The number of characters successfully
  // output can be determined by a following call to ostream::pcount().
  ostream &operator<<(const char *string);</pre>
  ostream &operator<<(const signed char *string)</pre>
     { return operator<<((const char *) string); }
  ostream &operator << (const unsigned char *string)
     { return operator<<((const char *) string); }
  // Insert a null-terminated string.
```

```
ostream &operator << (char c);
  ostream &operator<<(signed char c)
     { return operator<<((char) c); }
  ostream & operator << (unsigned char c)
     { return operator<<((char) c); }
  // Insert a single character.
  ostream &operator<<(short v)
     { return _2Comp::insert(*this,&v,sizeof(short),1); }
  ostream & operator << (int v)
     { return _2Comp::insert(*this,&v,sizeof(int),1); }
  ostream &operator<<(long v)
     { return _2Comp::insert(*this,&v,sizeof(long),1); }
  ostream &operator<<(unsigned short v)</pre>
     { return _2Comp::insert(*this,&v,sizeof(unsigned short),0); }
  ostream &operator<<(unsigned v)</pre>
     { return _2Comp::insert(*this,&v,sizeof(unsigned),0); }
  ostream &operator<<(unsigned long v)
     { return _2Comp::insert(*this,&v,sizeof(unsigned long),0); }
#if macintosh
  ostream &operator<<(float v) { return operator<<((long double) v); }</pre>
  ostream &operator<<(double v) { return operator<<((long double) v); }</pre>
  ostream &operator<<(long double);
#else
  ostream &operator<<(float v) { return operator<<((double) v); }</pre>
  ostream &operator<<(double);</pre>
#endif
  ostream &operator<<(void *);</pre>
  // Convert a pointer to a hex integer, and insert.
  ostream &operator<<(streambuf *source);</pre>
  // Insert all of the characters that can be fetched from the streambuf.
  ostream &operator<<(ostream &(*manipulator)(ostream &))</pre>
     { return (*manipulator)(*this); }
  // Parameterless manipulators are implemented by providing an
  // inserter for the type pointer to function taking an ostream reference
  // argument and returning an ostream reference. The specified function
  // is simple executed for the current ostream.
  ostream & operator << (ios & (*manipulator)(ios &))
     (*manipulator)(*this);
     return *this;
  // Similar facility to insert a pointer to function taking an ios
  // reference argument.
```

```
// This isn't in the draft standard, but it is so useful in the
  // implementation of inserters that it is made public here.
  int pad(int where, int wide);
protected:
  ostream();
  // ios will be initialized by derived class
  size_t write_count;
  // Records number of bytes actually put out by a write()
  void eof_fail() { clear(ios::badbit | ios::failbit | ios:: eofbit); }
  // Internal. Set error flags after an output EOF error.
#if macintosh
  int fixed_point(long double, char *);
  int fixed_point(double, char *);
#endif
// Internal. Convert double to fixed-point string.
#if macintosh
  int sci_notation(long double, char *, int &);
#else
  int sci_notation(double, char *, int &);
#endif
// Internal. Convert double to scientific-notation string.
  int adjust(int bit_to_test, int field_width);
  // Manages padding
  void flush_stdio();
  // Called by osfx() if ios::stdio is set. This function is in a
  // separate module to prevent the stdio stuff from being pulled
  // in when it is not required.
};
// The following functions provide parameterless inserters of the
\ensuremath{//} type noted above. They have to be real functions because we
// need to take their address.
ostream &ends(ostream&);
// Ends a string by inserting a null character. Use this on strstreams
// before you call ostrstream::freeze() .
// stream << "whatever" << ends;</pre>
ostream &flush(ostream&);
// Flushes output on an ostream.
// stream << "whatever" << flush
```

```
ostream &endl(ostream &);
// Inserts the appropriate new-line character(s) for the system, and flushes
// output. On Unix the new-line character is inserted. On DOS, the
// carriage-return and new-line characters are inserted. Thus, using endl
// instead of '\n' or "\r\n" is more portable.
11
// stream << "whatever" << endl;</pre>
ostream &stickywidth(ostream &);
// Sets the state so that width is not reset after each insertion
// unlatch this by a call to width() or use setw manipulator.
ostream &spacing(ostream &);
ostream &nospacing(ostream &);
// Sets the state so that a space is output after any item which
// makes a call to osfx() except the endl manipulator.
ostream &fixed(ostream &);
ostream &scientific(ostream &);
ostream &showpoint(ostream &);
ostream &floating(ostream &);
ostream &uppercase(ostream &);
// Manipulate the floating point format, floating sets the default state.
ostream &leftjust(ostream &);
ostream &rightjust(ostream &);
ostream &internal(ostream &);
ostream &showbase(ostream &);
// Set a justify mode
// types used by istream dfa extractor function
typedef void (*translate_function_t)(void *, const char *, void *);
typedef int (*helper_function_t)(int, char, void *);
class istream : virtual public ios {
// This is the class used for character input.
// The various "operator>>(...)" members are called "extractors", because
// they extract information from the character stream.
// * Where the extractors perform conversions of a string to a number,
// the conversion is affected by the format state flags in ios::flags()
// Each of the extractors calls ipfx() first, and returns immediately if
// ipfx returns zero. Extractors indicate errors by setting bits of the
// error state. ios::failbit means the input characters weren't a
// representation of the required type. ios::badbit means that the I/O
// system failed to get the required characters.
// * The unformatted extractors (get(), getline()) will set ios::failbit
// only if they are not able to extract at least one character.
// * Caveat: The ATT version ignores overflow. This version attempts to set
// the error flags on overflow.
```

```
public:
  static int is_white_space(char c);
  // Internal. Return 1 if the argument character is white-space,
  // otherwise return 0.
  istream(streambuf *buffer);
  // Construct a new istream associated with the argument streambuf.
  virtual ~istream();
  size_t gcount() { return read_count; }
  // Return the number of characters extracted by the last unformatted
  // input function. Other input functions may call the unformatted
  // input functions, so this counter is only accurate immediately
  // after a call to an unformatted input function.
  istream &get(char *data, int length, char delimiter = '\n');
  istream &get(signed char *data, int length, char delimiter = '\n');
  istream &get(unsigned char *data, int length, char delimiter = '\n');
  // Both of these extract up to "length" characters, storing them in
  // "data". If a character equal to "delimiter" is seen, it is pushed
  // back on the input stream and extraction stops.
  istream &get(char &destination);
  istream &get(signed char &destination);
  istream &get(unsigned char &destination);
  // Extract a single character.
  istream &get(streambuf &destination, char delimiter = '\n');
  // Call ipfx(0), and if the result is non-zero, get characters until
  // the delimiter is seen or EOF, and stuff the characters into the
  // streambuf. Doesn't extract the delimiter character. Only sets
  // ios::badbit if it can't extract at least one character.
  int get();
  // Get one character, and return it in an int. Return EOF if there's
  // an error.
  istream &getline(char *data, int length, char delimiter = '\n');
  istream &getline(signed char *data, int length, char delimiter = '\n');
  istream &getline(unsigned char *data, int length, char delimiter = '\n');
  // These two are like get(char *data, int length, char delimiter),
  // except that they extract the terminating delimiter instead of
  // pushing it back.
  istream &ignore(int length = 1, int delimiter = EOF);
  // Extract and throw away up to "length" characters. Extraction
  // stops if "delimiter" is extracted, or at EOF. If "delimiter"
  // is EOF, it won't match any character, and thus will not stop
  // extraction.
```

```
int ipfx(int need = 0);
// Perform input-prefix operations.
// The argument "need" is the number of characters that will be
// required, or 0 if you don't know how many you'll need. The
// formatted input functions call this with 0, and the unformatted
// input functions call it with 1.
// * If the error state is non-zero, this returns zero immediately.
// Otherwise, it returns non-zero when finished.
// If there is a tied stream (see ios::tie()) and need is 0 or greater
// than the number of immediately available characters, the tied
// iostream is flushed.
// * If ios::skipws is set in the format state, and "need" is zero,
// leading white-space characters are thrown away and the stream
// is advanced to the first available character.
// This returns zero if there is an error while skipping a
// white-space character, otherwise it returns non-zero.
int peek();
// Calls ipfx(1). If that returns zero, or if the input character
// stream is at EOF, return EOF. Otherwise return the next character
// without extracting it from the input stream.
istream &putback(char c);
// Attempt to push the last character read back onto the input stream.
// "c" must be the last character read. This does not call ipfx(), but
// it will return without doing anything if the error state is
// non-zero.
istream &read(void *data, int size);
// Extracts a block of "size" bytes and stores them at "data".
// If EOF is reached before "size" bytes are extracted,
// ios::failbit is set. The number of characters actually
// extracted is available as the return value of istream::gcount().
istream &seekg(streampos position);
// Absolute-seek the input character stream to "position".
istream &seekg(streamoff offset, seek_dir direction);
// Relative-seek the input character stream by "offset" relative to
// the current position.
int sync();
// Establishes consistency between the internal data structure
// and the external character source. This usually means that
// characters that were buffered for input are thrown away, and
// the file pointer is decremented so that it appears that the
// buffered characters were never read.
streampos tellg();
// Return the current file position. The value returned is a magic
// cookie that is usable only as an argument to seekg(streampos).
// Don't perform arithmetic on the return value.
```

```
istream &operator>>(char *);
istream &operator>>(signed char *s)
  { return operator>>((char *) s); }
istream & operator >> (unsigned char *s)
  { return operator>>((char *) s); }
// For the string extractors, characters are extracted until a
// white-space is seen. The white-space is pushed back on the
// incoming character stream. If width() is non-zero, it is taken
// as the size of the argument character array, and no more than
// width()-1 characters are extracted. A terminating null character
// is ALWAYS stored, even when nothing else is done because of
// the error state.
istream &operator>>(char &);
// Extracts a single character, similar to get()
#if macintosh
  istream &operator>>(signed char &c)
     { return operator>>((char) c); }
  istream &operator>>(unsigned char &c)
    { return operator>>((char) c); }
#else
  istream &operator>>(signed char &c)
     { return _2Comp::extract(*this,&c,1); }
  istream &operator>>(unsigned char &c)
    { return _2Comp::extract(*this,&c,1); }
#endif
// Extract byte wide integers -128 - +127 and 0 - 255 respectively
istream &operator>>(short &v)
  { return _2Comp::extract(*this,&v,sizeof(short)); }
istream &operator>>(int &v)
  { return _2Comp::extract(*this,&v,sizeof(int)); }
istream &operator>>(long &v)
  { return _2Comp::extract(*this,&v,sizeof(long)); }
istream &operator>>(unsigned short &v)
  { return _2Comp::extract(*this,&v,sizeof(unsigned short)); }
istream & operator >> (unsigned int &v)
  { return _2Comp::extract(*this,&v,sizeof(unsigned int)); }
istream &operator>>(unsigned long &v)
  { return _2Comp::extract(*this,&v,sizeof(unsigned long)); }
istream &operator>>(float &);
istream &operator>>(double &);
#if macintosh
  istream & operator >> (long double &);
#endif
istream &operator>>(streambuf*);
// Calls ipfx(0), and if the result is non-zero, extracts characters
// and stuffs them into the argument streambuf until EOF is reached.
// Only sets ios::badbit if it can't get at least one character.
```

```
istream &operator>>(istream &(*manip)(istream&))
     (*manip)(*this);
     return *this;
  // Provides an pseudo extractor which allows for parameterless
  // manipulators. The target type is pointer to function returning
  // istream reference and taking istream reference argument.
  istream &operator>>(ios &(*manip)(ios&))
  {
     (*manip)(*this);
     return *this;
  // Similar facility to manipulate an ios object directly
protected:
  istream(); // derived class will initialize ios directly
private:
  friend istream &_2Comp::extract(istream&, void *, int);
// The extract function provides for general type translation using
// a character set string and a DFA transition table
istream &extract(void *type, const char *okchars, int *tt,
  translate_function_t tf, helper_function_t hf, void *tds);
  size_t read_count;
};
istream &ws(istream&);
// Manipulator to skip white-space, positioning the input
// character stream to the first available non-white-space
// character.
class iostream : public istream, public ostream {
// A stream that supports both insertion and extraction.
public:
  iostream(streambuf *buf);
  // Construct an iostream associated with the argument streambuf.
  virtual ~iostream();
protected:
  iostream(); // derived class will initialize ios directly
// Iostream classes that support assignment.
//
// They're used for cin, cout, cerr, and clog, but you should not use them for
// anything else. Instead, use a regular stream and assign a pointer to it.
```

```
class istream_withassign : public istream {
public:
  istream_withassign();
  istream_withassign(streambuf *);
  ~istream_withassign();
  istream_withassign &operator=(istream &);
  istream_withassign &operator=(istream_withassign &s)
     {return operator=((istream &)s);}
  istream_withassign &operator=(streambuf *);
private:
  short assigned_to;
class ostream_withassign : public ostream {
public:
  ostream_withassign();
  ostream_withassign(streambuf *);
  ~ostream_withassign();
  ostream_withassign &operator=(ostream &);
  ostream_withassign &operator=(ostream_withassign &s)
     {return operator=((ostream &)s);}
  ostream_withassign &operator=(streambuf *);
private:
  short assigned_to;
class iostream_withassign : public iostream {
public:
  iostream_withassign();
  iostream_withassign(streambuf *);
  ~iostream_withassign();
  iostream_withassign &operator=(ios &);
  iostream_withassign &operator=(iostream_withassign &s)
     {return operator=((ios &)s);}
  iostream_withassign &operator=(streambuf *);
private:
  short assigned_to;
extern istream_withassign cin;
extern ostream_withassign cout;
extern ostream_withassign cerr;
#ifdef __XENIX__
extern ostream_withassign clog;
#endif
```

```
class IosTie {
public:
    IosTie(ios *a, ostream *b) {a->tie(b);
    #if THINK_CPLUS
    ios::sync_with_stdio(); #endif
    } };

class IosUnitbuf {
public:
IosUnitbuf(ios *a) { a->setf(ios::unitbuf); }
};
#endif // __IOSTREAM_H
```

Appendix F

strstrea.h

```
// IOStreams Package
// Steve Teale April 1992
// Copyright Symantec Corp 1990-1992. All Rights Reserved.
#ifndef __SSTREAM_HPP
#define __SSTREAM_HPP
#include <iostream.hpp>
const int default_allocation = 32;
class strstreambuf : public streambuf {
// This is a streambuf that holds a character array, and I/O is to that
// character array instead of a file or some external character stream.
// There is a dynamic-allocation mode that allocates space for characters
// as needed. Get, put, and seeks are supported within the character array.
// The call freeze() returns a pointer to the array, so that the data may
// be read by conventional string-handling routines.
public:
  // state flags
  enum sstream_flags {
    statmem = 1,
     // Set if the buffer was set with an argument to the constructor or
     // setbuf, and I should not do dynamic allocation if it runs out of
     // space.
```

```
frozen = 2,
  // Set when the buffer is frozen.
  merged = 4,
  // Set if the get and put areas are considered to be overlapped. This
  // will be the case if the strstreambuf is dynamic, or if a simultaneous
  // seek of both the get and put pointers has been done.
  rdonly = 0x10
  // Puts are not allowed.
strstreambuf(int chunksize = default_allocation);
// Create a strstreambuf in dynamic-allocation mode, with the initial
// allocation at least "chunksize" bytes long, defaulted to default
// allocation
strstreambuf(char *memory, int length = 0, char *start_of_put_area = 0);
// Create a strstreambuf using the static buffer at "memory".
// If "length" is positive, that is taken as the length of the
// buffer. If it is zero, the length is taken from strlen(memory).
// If "length" is negative, the buffer is assumed to be of infinite
// The get pointer is initialized to "memory". If "start_of_put_area"
// is zero, the get area covers the entire buffer and a put will be
// considered an error. If "start_of_put_area" is non-zero, the
// get area consists of the bytes between "memory" and
// "start_of_put_area" - 1, and the put area consists of the bytes
// between "start_of_put_area" and the end of the buffer.
strstreambuf(unsigned char *memory, int length = 0,
  unsigned char *start_of_put_area = 0);
// Same as above, but for an unsigned character buffer.
strstreambuf(void * (*allocate_function)(size_t), void (*free_function)(void *),
  int chunksize = default_allocation);
// Create a streambuf in dynamic allocation mode. Use
// void * allocate_function(size_t length) to allocate memory,
// and void free_function(void * memory) to free it. Allocation
// chunk size can be specified.
~strstreambuf();
void freeze(int on = 1);
void unfreeze() { freeze(0); }
// If the argument is non-zero, "freeze" the strstreambuf. This
// inhibits automatic deletion of the current character buffer.
// This is only important in dynamic-allocation mode. Stores into
\ensuremath{//} the buffer are invalid when it is "frozen". Calling this with
// a zero argument "un-freezes" the buffer. Deleting a strstreambuf
// will not de-allocate a frozen buffer - you must delete it yourself.
```

```
int pcount() const { return pptr()-pbase(); }
  // Return the number of characters inserted. Not accurate after
  // a seek.
  char *str();
  // Freeze the buffer and return a pointer to its first byte.
  // The pointer may be null if no bytes have been stored and the
  // buffer is in dynamic-allocation mode. The buffer may be "un-frozen"
  // by calling freeze(0). Deleting a strstreambuf will not de-allocate
  // a frozen buffer - you must delete it yourself.
  streambuf *setbuf(char *memory, int length);
  // The memory argument is not used. The next time the streambuf
  // does dynamic allocation, it will allocate at least "length" bytes.
  // This function in fact sets the allocation granularity.
  #if __ZTC__ > 0x214
    int overflow(int c = EOF);
  #else
    int overflow(int c);
  #endif
  int underflow();
  streampos seekoff(streamoff offset, ios::seek_dir direction,
    int which =ios::in|ios::out);
  int sync():
  // All of these are virtual functions derived from streambuf.
  // There's more documentation on them in iostream.h.
protected:
  int doallocate();
private:
  short sflags;
  int chunk;
  // The minimum amount to allocate when doing dynamic allocation.
  void *(*allocate_function)(size_t size);
  // Points to the function used to allocate memory.
  void (*free_function)(void *memory);
  // Points to the function used to free memory.
  void buffer_setup(char *memory, int length,
    char *start_of_put_area);
};
class istrstream : public istream {
\ensuremath{//} A class of istream that takes as input a character array, and extracts
// information from it.
```

```
public:
  istrstream(char *memory, int length = 0);
  // Create an istrstream attached to the character array at "memory",
  // of length "length". If length is zero, strlen() is used, if length
  // is negative, the stream is considered to be of a length equivalent
  // to the maximum value of type size_t.
  ~istrstream():
  strstreambuf *rdbuf() { return &buffer; }
private:
  strstreambuf buffer;
class ostrstream : public ostream {
// A class of ostream that inserts information into a character array.
public:
  ostrstream();
  // Create an ostrstream in dynamic-allocation mode.
  ostrstream(char *memory, int length, int mode=ios::out);
  // Create an ostrstream attached to the character array at "memory",
  // of length "length". If ios::ate or ios::app is set in "mode",
  // the buffer is assumed to contain a null-terminated string, and
  // the put area begins at the null character. Otherwise the put
  // area will begin at "memory".
  ~ostrstream();
  int pcount() const { return buffer.pcount(); }
  // Returns the number of bytes that have been put into the buffer.
  char *str();
  // Freezes the buffer, and returns a pointer to the first byte of the
  // buffer. Once the buffer is frozen it will not be deleted by
  // the destructor of the stream: it becomes the user's responsibility
  // to delete it.
  void unfreeze();
  // Unfreeze the buffer and unconditionally clear the state flags.
  strstreambuf *rdbuf() { return &buffer; }
private:
  strstreambuf buffer;
```

```
class strstream : public iostream {
// A class of iostream that inserts and extracts information in a character array.
public:
  strstream();
  // Create a strstream in dynamic-allocation mode.
  strstream(char *memory, int length = 0, int mode = ios::in|ios::out);
  // Create a strstream attached to the character array at "memory",
  // of length "length". If length is zero, then "memory" is assumed to
  \ensuremath{//} contain a null terminated string, and the langth is taken from
  // strlen. If ios::ate or ios::app is set in "mode", the buffer is
  // assumed to contain a null-terminated string, and the put area begins
  // at the null character. Otherwise the put area will begin at "memory".
  ~strstream();
  char *str();
  // Freezes the buffer, and returns a pointer to the first byte of the
  // buffer. Once the buffer is frozen it will not be deleted by
  // the destructor of the stream: it becomes the user's responsibility
  // to delete it.
  void unfreeze();
  // Unfreeze the buffer and unconditionally clear the state flags.
  strstreambuf *rdbuf() { return &buffer; }
private:
  strstreambuf buffer;
#endif // __SSTREAM_HPP
```

Appendix G

Unofficial C++ Style Guide

by Dave Goldsmith and Jack Palevich

This article is reprinted without with permission from develop, The Apple Technical Journal, Issue 2, April 1990. It's an enhanced version of an internal, informal Apple style guide written by David Goldsmith. Jack Palevich edited the original document to bring it into this form. The opinions expressed in this document are David's and/or Jack's; they are not necessarily those of Apple Computer.

develop provides an in-depth look at code and techniques that show the "Apple way" of doing things. Each issue comes with a CD that contains the source code for that issue, as well as all back issues, Technical Notes, sample code, and other useful software and documentation. Subscriptions to develop and back issues are available through APDA; call 1-800-282-2732.

C++ is fast emerging as the premier object-based language of the 1990s. Its expressive power combined with its down-and-dirty C heritage makes it a natural choice for writing Macintosh applications. But beware: all is not sweetness and light. Harnessing C++'s power without getting tripped up by some of its less savory features isn't all that easy. Here are guidelines that make it easier to write, debug, and change C++ programs.

When we first started using C++ several years ago, we learned the hard way—by trial and error—a lot of what we're about to tell you. After thousands of hours of C++ programming, we've formed strong opinions about the best way to use C++. In this unofficial style guide we tell you which features to use and which ones to avoid. Following our techniques will lead to programs that are easier to write, debug, and change. You may not agree with all of our guidelines—some are more a matter of taste than of science—but we hope you'll find them useful and enlightening.

Part 1: Style

In this part you'll find fairly simple advice on formatting source files. Even if you prefer to use a different style in your own work, you may be interested to see how we handle these standard matters of style.

Source File Conventions

Use the following conventions to keep your source files easy to read, easy to use, and legally protected.

Include a copyright notice. To protect your intellectual property rights, include the following line at the front of every file you create:

```
// Copyright \odot 1990 ~~~Your name or company~~~. // All rights reserved.
```

You can make the © by typing Option-g. The "All rights reserved" is specifically for our foreign friends. (We bet you thought all you

had to say was "Copyright." Ha!) In addition, any binary files you ship should contain a copyright notice somewhere.

If you modify a file in more than one calendar year, you must list every year in which you modified it. For example,

```
// Copyright \odot 1988-1990 ~~~Your name or company~~~. // All rights reserved.
```

Add helpful comments. We won't go into a lengthy discussion of comment style here. We'll only say it's good to have them. Also, comments that describe something subtle about the source are more helpful than comments like assign a to b.

Be careful about omitting argument names in function prototypes. It's OK to omit dummy argument names in function prototypes, but only if the meaning is clear without them. It's almost always necessary to include argument names when you have more than one argument of the same type, as it's impossible to figure out which one is which otherwise.

If you are getting compiler warnings of the form "warning: foo not used" where foo is an argument to a function, leaving the argument name out of the function header for the function's implementation will stop the warning. Whether or not an argument name appears in the function's declaration has no bearing on the warning.

Put only related classes in one file. To keep your class definitions under control and to make life easier for those trying to decipher them, follow the lead of the MPW {CIncludes} files. Limit each header file to a single class definition or a set of related class definitions. MPW C has always followed this convention, for example, Windows.h, Controls.h versus Toolbox.h.

On the implementation side, put only one class implementation in a given source file (classes private to the implementation of the class may be declared and implemented in the same source file). Name the file after the class, but without the initial T—for example, put the class TMyView in MyView.c.

Make it easy to use your header files. Trying to figure out whether you've included all the necessary antecedents for a header file is a pain. To save your clients this pain, enclose the definitions in your header with code that looks like the following:

```
#ifndef __MYCLASS__
#define __MYCLASS__
#include "prerequisite1.h"
#include "prerequisite2.h"
... definitions for MyClass
#endif
```

Now you can include your header's prerequisites without caring whether they've already been included elsewhere (assuming that everyone follows this convention). The name of the preprocessor variable should be all uppercase and consist of the file name (without .h) surrounded by two underlines on either side.

To speed up compilation, you can even do this in your files that use foo.h:

```
#ifndef __FOO__
#include "foo.h"
#endif
```

which skips the overhead of reading and parsing foo.h.

Store files in Projector. As soon as a file is published for use by others (for example, you stick it on a file server so others can use it), you should start storing it in Projector. Projector is part of

MPW 3.0. It consists of a collection of built-in MPW commands and windows that help programmers (both individuals and teams) control and account for changes to all the files (documentation, source, applications, and so forth) associated with a software project. This lets you recreate old versions if necessary, and makes sure things don't get lost.

Since the whole point of using Projector is to make it easier for those who follow you in the great chain of software being, please use the features that will make their lives easier. Try to maintain a proper set of versions (for example, don't remove your file from Projector and then add it again—that loses all the revisions), and use the comment features when you check things in and out.

Naming Conventions

To make C++ even more readable, you should adopt a consistent set of naming conventions. Here at Apple we use the following conventions:

Type names. *All* type names begin with a capital letter. In addition, class names begin with a *T* for base classes, and an *M* for mix-in classes. See "Multiple Inheritance" in Part 2. Examples: Boolean, TView, MAdjustable. Never use C types directly; see below.

Member names. Member names should begin with an *f*, for "field." Member function names need only begin with a capital letter. Examples: fVisible, Draw.

Global names. Names of global variables (*including* static members of classes) should begin with a *g*. Examples: gApplication, TGame::gPlayingField.

Local and parameter names. Names of local variables and function arguments should begin with a word whose initial letter is lowercase. Examples: i, thePort, aRegion.

Constant names. Names of constants should begin with a *k*. Example: kSaveDialogResID.

Abbreviations. It's best to avoid abbreviations, especially ad hoc ones. Inconsistent use of abbreviations makes it hard for clients to remember the correct name of a function or variable. Abbreviations are OK as long as they are consistent and universal. For example, don't use VisibleRegion some places and VisRgn others; use one or the other throughout.

Multiple-word names. In any name that contains more than one word, the first word should follow the convention for the type of the name, and subsequent words should immediately follow, with the first letter of each word capitalized. Do not use underscores in names. Here are multiple-word examples of each type:

TSortedList class name

fSubViewsdata member of classDrawContentsfunction member of classgDeviceListglobal or static data member

theCurrentSize local or parameter

kMaxStringLength constant

Names with global scope. Any name with global scope (for example, class names, typedefs, constants, globals) should have a distinctive and unique name. This will help avoid name conflicts. Names like Short and Number are fairly nondescript and likely to wind up conflicting with identifiers from other header files accidentally (this is a big problem with MPW and the ROM interfaces today). Better in these cases would be kShortLived (to follow our advice on constant names) or StringLength (more descriptive of the function). When you name something with global scope, think about the fact that it's in a global name space and someone may have to figure out what it is without context. Use more specific names rather than more general ones.

C++ relieves this problem somewhat by adding enumerations with class scope and static members. Enumerations declared inside classes are accessible using qualification, as in

```
class TFoo {
public:
   enum {kFred, kBarney};
...
};
```

```
i = TFoo::kFred;
```

This lets you put constants associated with different classes into different name spaces, somewhat like when C changed a few years back so that structure members from different structs were in different name spaces.

Static members let you put ordinary functions and global variables associated with a class into the scope of the class. For example:

```
class TView {
public:
    static void Initialize();
    static const TView kWhizzyView;
    static const long kMagicNumber;
...
};
TView::Initialize();
...TView::kWhizzyView...
i = TView::kMagicNumber;
```

Putting such global functions and variables into the scope of the class helps avoid name collisions. In fact, we frown on the use of ordinary globals: most global functions and variables should be static members of some class. The same with constants; they should be made members of an enumeration inside a class, if possible. Of course, global variables that are not constants of the sort shown above shouldn't be public at all; instead, access should be through static or normal member functions:

```
class TFoo {
public:
   static Boolean gWhoopeeFlag; // BAD!
}
TFoo::gWhoopeeFlag = TRUE; // BAD!
```

The Preprocessor

One of the most powerful features of the C and C++ languages is the C preprocessor.

Don't use it.

Except for include files and conditional compilation, C++ has features that supersede most of the techniques that used the preprocessor. Sometimes you need to use the preprocessor to accomplish things you can't with C++, but far less often than with straight C.

Use const for constants. Don't use #define for symbolic constants. Instead, C++ defines the const storage class. As with #define symbols, these are evaluated at compile time. Unlike #define symbols, they follow the C scope rules and have types associated with them. You can also use enums. For example:

This prevents a host of problems. With #define symbols, for example, if you accidentally redefine a name, the compiler will silently change the meaning of your program. With const or enums, you'll get an error message. Even better, with enums you can put the identifiers in the scope of an enclosing class; see "Naming Conventions," earlier. As an extra bonus, each enumeration defined is treated as a separate type for purposes of type-checking (much like the way scalars are handled in Pascal).

Unlike in ANSI C, objects in C++ that are declared const and initialized with compile-time expressions are themselves compile-time constants (but only if they are of integral type). Thus, they can be used as case labels and such.

Use enum for a set of constants. If your constants define a related set, don't use separate const definitions. Instead, make your constants an enumerated type. For example:

```
// Bleah.
const int kRed = 0;
const int kBlue = 1;
const in kGreen = 2;
// All11 Riiiight!
enum ColorComponent {kRed, kBlue, kGreen};
```

This causes ColorComponent to become a distinct type that is type-checked by the compiler. Values of type ColorComponent will be automatically converted to int as needed, but integers cannot be changed to ColorComponents without a cast. If you need to assign particular numerical values, you can do that too:

```
enum ColorComponent {kRed = 0x10, kGreen = 0x20,
   kBlue = 0x40};
```

Where possible, the type declaration should occur within the scope of a class. Then, references to the constants outside of the class's member functions must be qualified:

```
class TColor {
public:
   ColorComponent enum {kRed, kGreen, kBlue};
...
}
foo = TColor::kRed;
```

Note that the enum type name is not local to the class, only the actual constants. The enum type name should not be qualified.

Use inline for macro functions. Function macros are another source of fun problems in C programs, like this classic example:

```
#define SQUARE(x) ((x)*(x))
SQUARE(y++);
```

C++ allows functions to be declared inline (see also "Inline Functions" in Part 2), which completely obviates the need for function macros. Like const, inline functions follow the C++ scope rules and allow argument type-checking. Both member functions and nonmember functions can be declared inline. So the preceding example becomes

```
inline int Square(int x)
{
  return x*x;
};
Square(y++);
```

which does the right thing, and is actually more efficient than the macro version (as well as being correct).

Use the preprocessor only in these cases. As stated earlier, the preprocessor is necessary for #include files, and preprocessor symbols are necessary for conditional compilation.

Use of const

Both ANSI C and C++ add a new modifier to declarations, const. You use this modifier to declare that the specified object cannot be changed. The compiler can then optimize code, and also warn you if you do something that doesn't match the declaration. Here are some examples of const declarations:

```
const int *foo;
```

This is a modifiable pointer to constant integers. foo can be changed, but what it points to cannot be.

```
int *const foo;
```

This is a constant pointer to modifiable integers. The pointer cannot be changed (once initialized), but the integers it points to can be changed at will.

```
const int *const foo;
```

This is a constant pointer to a constant integer. Neither the pointer nor the integer it points to can be changed.

Note that const objects can be assigned to non-const objects (thereby making a copy), and the modifiable copy can of course be changed. However, *pointers* to const objects *cannot* be assigned to pointers to non-const objects, although the converse is allowed. Both of these assignments are legal:

```
(const int *) = (int *);
(int *) = (int *const);
```

Both of these assignments are illegal:

```
(int *) = (const int *);
(int *const) = (int *);
```

When const is used in an argument list, it means that the argument will not be modified. This is especially useful when you want to pass an argument by reference, but you don't want the argument to be modified. For example:

```
void BlockMove(const void* source,
  void* destination, size_t length);
```

Here we are explicitly stating that the source data will not be modified, but that the destination data will be modified. (Of course, if the length is 0, then the destination won't actually be modified.)

All of these rules apply to class objects as well; you can declare something (const TView *). There used to be a hole in the language, however: you could call any member function of an object using a const pointer to it, and that member function could modify the object (since there was no way to declare which member functions modify the object). For example, this was legal:

```
const TView *aView;
...
aView->ModifySomething();
```

To plug this hole, member functions that will be called for const objects must now be declared const; see the 1985-1989 paper discussed in the sidebar "Background Reading" for details. The syntax looks like this:

Note that inside a const member function, the pointer has type const TFoo *, so you really can't change the object. You could cast the pointer to be just a TFoo *, but then you may be surprising your clients. Even though you think that your change to the object is not externally visible (that is, it doesn't change the state of the object as far as clients are concerned; one example is an internal cache), it can have an impact. If your object is being used by an interrupt routine that "reads" it, your client may assume that it's OK to call a const member function, since he or she thinks the object isn't going to change. However, if the internal state of the object changes anyway, access by multiple "readers" will cause its state to become corrupted.

Another example is an object placed in ROM. The client thinks it's all right to call a const member function of the object, and then gets a bus error because the attempted write access fails.

The bottom line is that if you attempt to cast your this pointer to a non-const version inside a const member function, you had better think through the implications of this for your clients, and you had better document it.

Part 2: Using Language Features

In this part you'll find advice on using particular features of the C++ language. The topics are arranged roughly in order of increasing difficulty.

Global Variables (!)

Static class members are the same as global variables (actually, better). Static class members do have one major advantage over regular globals: scope. Regular globals (that is, static extern variables) have global scope. That means there are potential name collisions with globals from any other include file the developer may use. Static class members, however, have full scoping: they're qualified by the name of their class, and don't conflict with any identifier outside the class. They can also be protected. If you were going to have a simple global, consider a static member instead.

Be careful about static initialization. If you design a class that depends on some other facility in its constructor, be careful about order dependencies in static initialization. The order in which static constructors (that is, the constructors of objects with static storage class) get called is undefined. You cannot count on one object being initialized before another. Therefore, if you have such a dependency, you must either document that your class cannot be used for static objects, or you must use "lazy evaluation" to defer the dependency until later.

Inline Functions

We mentioned inline functions under "The Preprocessor," earlier. Never use them. Well, hardly ever. The main reason is that they get compiled into your caller's code. This makes them a tad difficult to override. Also, you have to ship their source code to everyone. There are, however, a few times when it's OK to use them.

Use an inline function if it expands to call to something else. If your inline function just calls something else that isn't inline, that's fine, as long as the other function has identical semantics. An example: You might have a class that defines a virtual function IsEqual, which compares two objects for equality. It also has an inline definition for operator ==, as a notational convenience. Since operator == just turns around and calls the IsEqual function, it's OK for it to be inline and not virtual. This does not apply if your function just happens to have a one-line implementation.

Use an inline function if efficiency is very, very important and you'll never change it. Of course, the other time it's OK to use inline is if efficiency is extremely important. Note that code size may increase due to duplication of code. You may actually decrease system performance by making something inline, since you're increasing the amount of code that must fit in memory. Also, once a function is more than a couple of lines long, the function call overhead is a very small fraction of the total time, and you are not buying much by making it inline.

An example is addition for a complex number type; here, the efficiency consideration together with the low probability of a future change makes an inline implementation a good idea. The complex number implementation shipped with C++ makes addition and subtraction inlines (fairly short), but makes multiplication and division regular functions (they are longer, so the overhead for a call is less important and the code size issue is more important).

If you don't *know* (that is, God has told you in person) that your implementation must be inline, *don't make it inline*. Build it normally and then *measure* the performance. Experience has shown again and again that programmers spend lots of time optimizing code that hardly ever gets executed, while totally missing the real bottlenecks. The empirical approach is much more reliable. Experience has also shown that a better algorithm or smarter data structures will buy you a lot more performance than code tweaking.

Don't write inlines in declarations. C++ has two ways of declaring an inline member function (of course). One is to declare the member function normally and then supply an inline function definition later in the same header file. The other is to write the function definition directly in the class declaration. Never use this latter form; always declare the function normally and then put an inline definition at the end of the file. That way, it's much easier to change between inline and regular implementations of a function, and it's no less efficient. The fact that something is inline should not be made obvious in the class declaration, since clients may start counting on it.

Unspecified and Default Arguments

It's possible to partially circumvent the strong type-checking C++ imposes on function arguments. You should avoid doing this if at all possible.

Don't use unspecified arguments. C++, like ANSI C, allows you to cling to C's wild and woolly past, by declaring functions that take unspecified numbers and types of arguments, the classic example being

```
void printf(char *, ...);
```

This is a cheesy leftover from the Cretaceous era. There are very few functions indeed that need to have an interface like this. If you want to be able to omit arguments, for example, you can use default arguments or function overloading (both defined below). Unspecified arguments come from hell.

Do use default arguments, but cautiously. A better technique than unspecified arguments is default arguments. You can specify default values for arguments that are only used sometimes. This is especially handy in constructors. For example,

```
TView::TView(TVPoint itsSize, TVPoint itsLocation,
   TView *itsSuperView = NIL);
```

which can be called either with three arguments or with two. This can help you avoid that agonizing decision as to whether to include an option or not. However, be sparing; clearly, long strings of defaults can make it hard to figure out what's going on. Furthermore, you can only leave off arguments at the end, not the middle, so if you have ten defaults and someone wants to specify the last one, they must specify the preceding nine as well. This sort of defeats the idea. Having more than two default arguments is a bad idea, and even two is questionable.

Also remember that for both default arguments and function overloading, having too many versions of the same function decreases the safety provided by type-checking, and makes it more

likely that you will accidentally call a different version from the one you intended to call.

Function Name Overloading

C++ also lets you overload function names, by letting two functions (member or nonmember) have the same name as long as the types of their arguments differ. This feature is useful when you want to have different versions of the same function; they should all be related. For example, you may want to have a constructor that takes lots of options, as well as one that is simple to use. Also, you may want to make functions that take different types. Examples include:

```
Rectangle::Rectangle(Point leftTop,
   Point rightBottom)
Rectangle::Rectangle(short top, short left,
   short bottom, short right)
void TPort::MoveTo(short, short)
void TPort::MoveTo(Point)
TComplex TComplex::Add(TComplex)
TComplex TComplex::Add(int)
```

This can be very useful but also can cause problems.

Don't unintentionally use the wrong argument type. The biggest problem is the unintentional use of the wrong argument type when overloading, which defines a new function. If TView has a member function

```
and you define a subclass where, intending to override this function, you declare
```

```
TMyView::Print(const TStdPrintRecord *)
Or
TMyView::Print(TPrintRecord *)
```

TView::Print(const TPrintRecord *)

or even

```
TMyView::print(const TPrintRecord *)
```

because you forgot the type of the original argument (or misspelled the name), C++ assumes you don't want to overload the original function and simply declares it as a new function. You have not overridden the original; it's still available. The latest version of CFront will warn you about the first two cases, but not the last.

Also remember that, as mentioned earlier, the more variants a function has, the easier it is to call the wrong one unintentionally because the arguments you supply just happen to match another variant.

Watch your overrides. If you have an overloaded member function (whether virtual or not), and you override it in a derived class, then your override hides all overloaded variants of that member function, not just the one you overrode. Thus, if you want to override an overloaded member function, you must override all of the overloaded variants. C++ treats the overloaded function as a single entity; the scope resolution rule for C++ is to find the first class that has any function with that name defined, then look for a match based on argument type. The C++ team at AT&T believes this is the correct rule; their reasoning is that an overloaded set of functions is really just one function with a bunch of variants, and that you should not be naming functions with the same name unless they are really the same function.

An example that illustrates this behavior follows:

```
class A {
public:
   void Foo(long);
   void Foo(double);
};

class B: public A {
public:
   void Foo(double);
};
```

B bar;
bar.Foo(2);

The call actually winds up calling B::Foo(double) after coercing the integer argument to double.

On a positive note, CFront will warn you if you override some but not all of a set of overloaded member functions. For details, see the 1985-1989 paper discussed in the "Background Reading" sidebar, and the reference manual.

Don't abuse function overloading. Function overloading can be abused. Functions should not have the same name unless they basically perform the same operation, as in the preceding examples. If that is the case, then having the functions identically named can be a great help in reducing the number of things a programmer must remember.

Operator Overloading

Another fun C++ feature is the ability to define operators for your own classes. If you define a fixed-point data type, C++ lets you define the standard arithmetic operators for it, which makes code a lot easier to read.

Use operator overloading only where appropriate and clear. Operator overloading also has tremendous potential for abuse. Defining the + operator for fixed-point numbers helps clarify code. Defining it as set union is also fairly clear. Defining => to mean "send a message" is crazy. Operator redefinition only helps when the new function is similar to the standard meaning of the operator; otherwise, it just confuses people. An example is C++'s streams facility, which redefines < and > as output and input operators. This confuses a lot of people.

If you like, use functional syntax to call a base class's operator. C++ occasionally delivers a pleasant surprise. One example is the syntax for calling overloaded operators. Of course, you can use the usual inline operator syntax; that's why C++ has operator overloading. The surprise is that you can also use functional

syntax, which is sometimes essential, especially for calling a base class operator. Here is an example of a subclass operator using the base class's operator:

```
const TWindow& TWindow::operator=(const TView &v)
{
  this->TView::operator=(v);
  return *this;
}
```

(The explicit this-> is actually unnecessary here but was included for clarity.) In this example, TWindow has a base class TView, and we want to be able to assign a TView to a TWindow by just copying the TView part and leaving the rest of TWindow alone. To do this, we want to use TView's assignment operator. The functional notation here is the only way to do it. The pleasant surprise was that this notation is allowed.

Type Coercion

Use type coercion selectively. Like so many C++ features, type coercion can either clarify or obfuscate your code. If a type coercion seems "natural," like the coercion between reals and integers, then providing a coercion function seems like a good idea. If the coercion is unusual or nonsensical, then the existence of a coercion function can make it very hard to figure out what's going on. In the latter case, you should define a conversion function that must be called explicitly.

In general, coercion operators are useful in a way similar to operator overloading, and the same guidelines make sense.

Define type coercion rules for C++ to use. C++ will automatically coerce one type to another, but only if there is a direct way of doing so. In other words, if a coercion is defined from type A to type B, C++ will use it automatically where appropriate. It will *not* concatenate coercion operators if there is not a direct coercion. So even though a coercion may be defined from type A to type B, and type B to type C, C++ will not automatically coerce type A to type C (you can do it explicitly via casts, though).

There are two ways of defining type coercions for C++ to use: constructors and type coercion operators. They are appropriate under different circumstances. Note that since all coercion operators must be member functions of some class, it is not possible to define a coercion from one nonclass type to another nonclass type. Also note that if more than one function is defined to perform the same coercion, they cannot be used implicitly or via a cast, since an ambiguity exists as to which to call. They can still be invoked explicitly.

If you have a constructor with a prototype that looks like any of the following:

```
TargetClass::TargetClass(SourceType)
TargetClass::TargetClass(SourceType &)
TargetClass::TargetClass(const SourceType &)
```

then C++ will use it to convert from SourceType to TargetClass where appropriate. This form is useful when (1) the target type is a class (it can't be used for a primitive target type), and (2) the author of the target type wants to provide a coercion. If either of these conditions don't hold, you can use the second form of type coercion.

If the source type is a class, you can define a member operator function to perform the coercion. These operators have prototypes that look like

```
SourceClass::operator TargetType()
```

TargetType may be either a primitive type or a class. It need not be the name of a type; it can be any type specifier (as long as it does not contain array of [] or function () forms. Those must be handled via a typedef). This form is appropriate when the target type is not a class, or the source code for the target type is not available (that is, the coercion is being provided by someone else).

Encapsulation and Data-Hiding

Make explicit use of public, private, protected. C++ thoughtfully allows you to leave out the private keyword in several places. Don't: it decreases C++'s well-known clarity. Class defini-

tions should always explicitly state the visibility of their members and/or base classes. Write it like this:

```
class TFoo: public TBar, private MBaz {
public:
   public members;

protected:
   protected members;

private:
   private members;
};
```

Your public interface should come before your protected interface, and since your private interface is only necessary to make the compiler happy, it should be last.

Use no public or protected members that aren't functions. Always make all member variables private. (It's OK to make functions protected or public. In fact, classes that don't are very boring.) You can provide access functions to get and set your variables if you want (although you should think about exporting a more abstract interface instead). If you're really concerned with performance, you can make those functions inline (but see "Inline Functions," earlier). Remember, don't compromise for the sake of performance *until you have numbers* to base your decision on!

Understand what "protected" really means. What the "protected" access mode means is not completely clear from Bjarne's various books and papers, so we will attempt to clarify the issue.

When a member of a class is declared protected, to clients of the class it is as if the member were private. Subclasses, however, can access the member as if it were declared private to them. This means that a subclass can access the member, but only as one of its own private fields. Specifically, it *cannot* access a protected field of its parent class via a pointer to the parent class, only via a pointer to itself (or a descendant). Here are some examples:

```
class A {
protected:
```

```
void Bar();
class B: public A {
 void Foo();
class C: public B {
};
void B::Foo()
 A *pa;
 B *pb;
  C *pc;
 pa->Bar(); // Illegal: A::Bar() is "private"
               // OK: "this" is of type B*
 Bar();
               // Also OK
 pb->Bar();
  pc->Bar();
               // Also OK
};
```

Protect constructors for abstract base classes. It's frequently useful to have a class that is not meant to be instantiated as an actual object, but only to be used as a base class for other classes. Examples include classes such as TApplication or TView. Such classes are called *abstract base classes*. If you want to enforce this status, you can make it impossible to instantiate such a class by making all of its constructors protected. In that case, the object cannot be created by itself, but only as part of a derived class.

In addition, there is a way to declare a member function abstract (that is, to require that it be overridden in descendants); this is called a *pure virtual function*. A class with such a member function cannot be instantiated, nor can any descendant class, unless all such functions are overridden. The syntax for this is as follows:

```
class Foo {
public:
   virtual void Bar() = 0;
};
```

You can also declare some (but not all) of the constructors for a class protected if you want those constructors to be used only by derived classes. The class can still be instantiated using the constructors that are public.

As a shortcut, declare private base classes. When you declare a base class private in C++, the derived class inherits all of its members as private members. This means that the derived class is *not* considered a subtype of the base class, even though it is a subclass. You cannot pass a pointer to an object of the derived class when a pointer to the base is expected. This lets you inherit the behavior of a class without inheriting its type signature.

Since the derived class is not a subtype, it doesn't have an "isa" relationship with the base class. Why not just make it a member, then? This is what you would normally do. However, if you need to reexport most of the functionality of the base class, you would have to write wrapper functions in your derived class that turned around and called the member class functions. Instead, you can use this slimy shortcut.

By making the class a private base class, you don't inherit the type signature, but you do inherit the functionality, which can be made selectively visible without having to write wrapper functions. If A is a private base class of B, and B wants to make A::Foo() visible, then write the following in the declaration of B:

```
public:
   void A::Foo();
```

which makes Foo() visible to clients of B.

Use friends sparingly. Friend classes and functions are another C++ feature. Needless to say, they are a breach in the safety of types and in the integrity of the data abstraction provided by classes. If you have friends, you're probably doing something wrong (like taking frequent showers).

About the only time this feature should be used is when implementing binary operators that can't be member functions. Another circumstance is a set of tightly related classes (an example from

Bjarne's book is matrices and vectors). Generally, however, avoid friend classes and functions.

Hide implementation classes by declaring them incomplete. Sometimes a public class (one that you export to clients) must refer to a class that is only used in your implementation. How do you avoid exposing the implementation class? If the only reference is a pointer, then you can declare the implementation class as an incomplete class:

```
class TImplementation;
class TInterface {
    ...
private:
    TImplementation *fHidden;
};
```

This also works if your member functions have arguments of type TImplementation * or TImplementation &. If you have actual TImplementation objects as fields, though, you must include the full declaration of TImplementation.

Don't expose yourself. The most important thing to remember is not to expose your implementation to either your clients or your subclasses (which are really just another kind of client). If you do so, you are tying the hands of those who must enhance your code.

It is very important to make sure that your class acts like a black box. The interface you export to clients and subclasses should reflect precisely what they need to know and nothing more. You should ask yourself, for every member function you export (remember, you're not exporting any data members, right?), "Does my client (or subclass) really need to know this, or could I recast the interface to reveal less?"

If you find that the interface to your class consists mostly of functions to get and set your private data members, you should ask yourself whether your object is really defining an abstract enough interface. The key is to think about the abstraction that your object represents and how clients view and use that abstraction, not how it is implemented. This is possibly the hardest thing to do in object-based design, but is also one of the biggest advantages and has the biggest long-term payoff.

See Alan Snyder's paper. For an excellent discussion of the issues involved in data abstraction, encapsulation, and typing, see Alan Snyder's paper "Encapsulation and Inheritance in Object-Based Programming Languages" in the 1986 OOPSLA proceedings.

Virtual Functions

(Almost) all member functions should be virtual. Virtual functions are pretty inexpensive. Because of this, any class that is intended to be used in a polymorphic fashion (that is, a pointer to a subclass may be passed where a pointer to the class is expected) should have all of its functions virtual. It's hard to guess in advance which functions may be overridden in the future (although private functions can't be, and so need not be virtual).

You should only use nonvirtual functions where you are very sure that the class (or this particular aspect of it) *will never have a subclass*. An example is a fixed-point data type, which is self-contained, or a graphics point, or other similar classes.

The assignment operator is also a special case. Assignment isn't inherited like other operators. If you do not define an assignment operator, one is automatically defined for you; it consists of calls to the assignment operators of all of your base classes and members (this is discussed in the 1985-1989 paper mentioned in the sidebar "Background Reading"). It's OK to make your assignment operator virtual, but it's only useful under rather specialized circumstances. A virtual function call will be generated for a virtual assignment operator only when the left-hand side of an assignment is a reference or a dereferenced pointer.

(Almost) all destructors should be virtual. What the !@&#%! is a virtual destructor, you ask? And well you might, because this is actually something you should never have had to worry about. What do you think happens here?

```
class A {
   ~A();
};

class B: A {
   ~B();
};

A *foo = new B;
delete foo;
```

B::~B gets called, then A::~A, right? Wrong! Only A::~A gets called! Isn't that special? For the right thing to happen, you must declare your destructors virtual. For example,

```
virtual ~A();
virtual ~B();
```

If you do this, the right destructors will get called. Needless to say, *any* class that has a virtual member function, inherits one, or is used in a polymorphic fashion *must* have its destructor declared virtual, or horrible things will happen.

Be careful when you call virtual functions in constructors and destructors. If you call a virtual function from a constructor, be aware that the version of the function that corresponds to the constructor will be called, not the version that would normally be called. For example, if A has a method foo, B is a subclass of A, and B overrides foo, a call to foo from A's constructor calls A::foo, not B::foo. A call to foo from B's constructor does call B::foo. This is sufficiently confusing that it is best not to call a virtual function from a constructor at all. Naturally, this only applies to virtual functions of the object whose constructor is running; virtual functions of other objects (including those of the same class) are perfectly fine (unless they in turn call one of your virtual functions).

If you think about it, it doesn't make sense to call virtual functions from constructors and destructors. Since base class constructors are called before derived class constructors, and base class destructors are called after derived class destructors, the object is in a partially valid state. If a virtual function overridden in a derived class is called from the base class constructor, it may access derived class features that have not been initialized. Similarly, if it is called from the destructor, it may access features that have already been destroyed.

Use virtual functions the right way. If you are coming from the non-object-based programming world, a word about use of virtual functions might be in order. Virtual functions should be used whenever you want to have more than one implementation of the same abstract class. They allow the system to defer the decision on which function to execute until run time.


The right way to use virtual functions is to structure them around well-defined abstractions. If someone is to override a virtual function, they must have a clear definition of what the function does, even if they only call the inherited version after a little bit of processing.

The *wrong* way to use virtual functions is via a "come-from" mechanism like some Macintosh trap patches. Don't override a virtual function because "I know it's called from over here with these parameters." Needless to say, this wreaks havoc with the data abstractions that are one of the major benefits of object-based programming. This is why the function must have a definition that is clear in terms of the object it belongs to, without any reference to its possible callers. If you override a function, the override must make sense in terms of the definition of the function itself.

Multiple Inheritance

Multiple inheritance is a fairly new feature in object-based languages. To understand it better, look at Figure 1. In the single inheritance class hierarchy on the left, each class has only one parent. By contrast, in the multiple inheritance class hierarchy on the right, a class can have more than one parent. Note, for instance, that TAirplane inherits from both MFlyingObject and MVehicle.

FIGURE 1 Single inheritance vs. multiple inheritance.

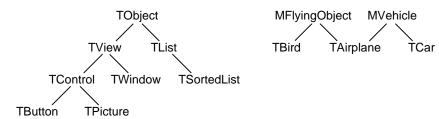

Use in a controlled fashion. With multiple inheritance, there is great potential for designing a confusing class hierarchy that resembles a spaghetti bowl. Here are some guidelines for use of multiple inheritance.

We start by artificially partitioning classes into two categories: base classes and mix-in classes. To distinguish the two, base class names begin with T (for example, TView), and mix-in class names begin with M (for example, MEditable). Base classes represent fundamental functional objects (like a car); mix-ins represent optional functionality (like power steering).

The first guideline is: A class can inherit from *zero or one* base classes, plus *zero or more* mix-in classes. If a class does not inherit from a base class, it probably should be a mix-in class (though not always, especially if it is at the root of a hierarchy).

The second guideline is: A class that inherits from a base class is itself a base class; it cannot be a mix-in class. Mix-in classes can only inherit from other mix-in classes.

The net effect of these two rules is that the base classes form a conventional, tree-structured inheritance hierarchy rather than an arbitrary acyclic graph. This makes the base class hierarchy much easier to understand. Mix-ins then become add-in "options" that do not fundamentally alter the inheritance hierarchy.

Like all guidelines, this one is not meant to be hard and fast. Multiple inheritance can and should be used in other ways as well if it makes sense. The fundamental thing to keep in mind is that people (including programmers) are better at understanding regular structures than arbitrary acyclic graphs.

As part of multiple inheritance, C++ contains a new feature called virtual base classes. The trouble is, if both B and C are subclasses of A, and D has both B and C as base classes, then D will have two A's if A is not virtual, but only one A if it is. This is a

very confusing situation, and no matter which alternative you choose, programmers will have a hard time understanding it. To avoid getting into a situation like this, follow the preceding guidelines for use of multiple inheritance. And incidentally, using virtual bases presents another problem: once you have a pointer to a virtual base, there's no way to convert it back into a pointer to its enclosing class.

It's OK to have multiple occurrences of a base. Sometimes the same base class (it should be a mix-in) will occur more than once as an ancestor of a class. It doesn't hurt to have a base class twice (aside from wasting space because of multiple pointers to the virtual function table) and if you need to cast back from the base class pointer to something else you may not have a choice, but it's really only useful to have a base class twice if data members are associated with it.

Part 3: Design Issues

In this part you'll find a discussion of general problems of programming in C++.

Working in a Value-Based Language

C++ has a different object model from Object Pascal or Smalltalk. The most fundamental difference is that whereas Object Pascal and Smalltalk are reference based (that is, like Lisp, assignment means copying a pointer), C++ is value based. By this we mean that classes in C++ are treated just like primitive types, whereas in Object Pascal objects are treated very differently from primitive types. This is actually a benefit, since all types in a C++ program are handled in the same style, as opposed to the multiple styles in Object Pascal. (Smalltalk, like C++, is also self-consistent.) There are some implications for your C++ programming style, however.

Don't use pointers unless you mean it. Pointers should be used in C++ in the same way you would use them in plain C or plain Pascal; that is, when you really want multiple references to the

same object, or a dynamic data structure. If you really just want to pass something by reference to avoid copying, then you can use a reference rather than a pointer (see below). In fact, you can even pass a class by value if the copying overhead isn't too high and you don't care about polymorphism (for example, the class has no virtual functions).

Don't allocate storage unless you must. In a reference-based language like Object Pascal or Smalltalk, all objects must be heap allocated. In C++, it's better to treat values the same way you would in C. For example, instead of defining a Clone operator, overload the assignment operator; instead of allocating and returning an object, have the caller pass one in by reference and set it. This allows your classes to be treated just like primitive types, and in the same style. In general, leave storage allocation up to the class client.

By doing so, you can make use of one of C++'s unique features: the ability to have automatic and static objects, and objects as members of classes. No matter how clever or efficient a storage allocator we have, it can never be as fast as allocating an object on the stack, or as part of another object. If an object can be local to a function, there is no storage allocation overhead. Many objects have very localized scope and do not need to be allocated on the heap.

There is one exception to the rule about allocating an object and returning a pointer: you must do this when the type of the returned object may vary. Anytime a function must choose what type of object to return, the function must allocate the object, not the caller.

It's still all right for the caller to allocate storage even when the type of object being passed in may vary, since references, like pointers, can be used polymorphically (that is, you can specify a TSubFoo& to an argument of type TFoo&). The key question is whether the caller or the function must determine the type. In the former case, leave allocation to the client; in the latter, the function must allocate the object on the heap and return it.

Summary: pretend everything is a primitive. In summary, you should design your classes so that using them is just like using a primitive type in C. This will let the client use them in a style that is "natural" for C. In cases where you wish to avoid copying, pass

arguments by reference. Use pointers only when you want a truly dynamic data structure, or when polymorphism demands it (note that references allow for polymorphism also, since they are really just a different kind of pointer).

Pointers Versus References

C++ provides two very similar mechanisms for passing references to entities. One is the familiar pointer from classic C; the other is a new concept, the reference. Pointers are declared as follows:

TFoo *fooPtr;

But references are declared like this:

TFoo &fooRef;

A pointer must be dereferenced to access what it points to, but a reference can be used as is, and acts as a synonym for the object it refers to, both for fetching and storing. This makes it similar to other highly refined mechanisms, such as FORTRAN's equivalence statement (or VAR parameters in Pascal). The entity to which a reference refers may only be set when the reference is created; in this respect it is somewhat like a const pointer that gets a virtual * put in front of it wherever it is used, and puts a virtual & in front of the expression from which it is initialized. Here are two illustrative examples:

```
void Bump(int *ip)
{
    *ip += 1;
}
Bump(&j);

void BumpR(int &i)
{
    i += 1;
}
BumpR(j);
```

There are certain circumstances where references are mandatory, for example, overloading the assignment operator. In other cases, either a pointer or a reference can be used. The question is, which should be used when?

References should be used when a parameter is to be passed "by reference," as in Pascal. This means that the called function is going to forget about the argument as soon as it returns. A regular reference should be used if you are going to modify the argument (TFoo &), and a const reference should be used if you are not going to modify it but don't want the overhead of call by value (const TFoo &).

Pointers should be used when the function you are calling is going to retain a reference (an alias) to the object you are passing in, such as when you are constructing a dynamic data structure. An example is putting an object into a MacApp TList: the TList retains a pointer to your copy of the object. The explicit use of pointers lets the reader know that aliasing is occurring.

By using pointers and references appropriately, you can increase the readability of your code by giving the reader hints as to what is going on.

Portability

Don't make assumptions. The Macintosh is the best personal computer in the world, but there are times when you'll want to run your code on a different machine. For example, you might have access to a CRAY or a VAX. Don't make assumptions that are only valid for the 680x0 family of processors. For example:

- Don't assume that int and long are the same size.
- Don't assume that longs, floats, doubles, or long doubles can be at any even address.
- Don't assume you know the memory layout of a data type.
- Especially don't assume you know how structs or classes are laid out in memory, or that they can be written to a data file as is.
- Don't assume pointers and integers are interchangeable.
 Use void * if you want an untyped pointer, not char *.

 Don't assume you know how the calling conventions are implemented, or indeed any detail of the language implementation or run time.

ANSI specifies the following about C's built-in types. This is all you can safely assume:

- unsigned chars can hold at least 0 to 255. They may hold more.
- signed chars can hold –127 to +127. They may hold more.
- chars may be either unsigned chars or signed chars. You can't assume either. Therefore, don't use char unless you don't care about sign extension.
- shorts can hold at least –32,767 to 32,767 (signed) or 0 to 65,535 (unsigned).
- longs can hold at least -2,147,483,647 to 2,147,483,647 (signed) or 0 to 4,294,967,295 (unsigned).
- ints can hold at least –32,767 to 32,767 (signed) or 0 to 65,535 (unsigned). In other words, ints cannot be counted on to hold any more than a short. int is an appropriate type to use if a short would be big enough but you would like to use the processor's "natural" word size to improve efficiency (on some machines, a 32-bit operation is more efficient than a 16-bit operation because there is no need to do masking). If you need something larger than a short can hold, you must specify long.

If you need exact information, you can use the symbols defined in limits.h. or float.h. Remember, though, that the values of these symbols can change from processor to processor or compiler to compiler, within the limits just defined (for more information, see the ANSI C specification).

It's very easy to write nonportable code, and it takes some vigilance to avoid it. It's well worth the effort, however, the first time you port to a different processor, or try to use a different compiler.

Pick a canonical format for messages and data files. Remember that AppleTalk networks connect to non-Apple computers such as the Intel-8x86 based MS-DOS machines. Thus, if you write or

read any data in a context where it might go to or come from a different CPU, you have to worry about formats. Such situations include reading or writing disk files, or sending data over a network (or even over NuBus). The other CPU might even have a different byte order! The only solution to this problem is to pick a canonical format for your messages or data files.

Just because you have a canonical format doesn't mean you must pay a big overhead every time you access your data. An alternative is to perform the translation to or from canonical format at a predetermined time. For example, outline fonts might have a certain canonical format, which may not be convenient for a particular processor to deal with. However, they can certainly be converted to a convenient local format when the font is installed.

Don't use (gasp!) naked C types. Another way to make your life miserable is to use primitive C data types in your declarations. This is a bad idea, since if the implementation ever changes you have to do a lot of editing by hand. It's much better to declare a type (via class definition or typedef) that represents the abstract concept you want to represent, then phrase your declarations that way. This lets you change your implementation by simply editing the original type definition. Think of these types as giving your data physical units, like kilograms or meters/second. This prevents you from accidentally assigning a length to a variable with type Kilogram, catching more errors at compile time.

So instead of

```
long time;
short mouseX;
char *menuName;

use (for example)

typedef long TimeStamp;
typedef short Coordinate;
class TString { ... };
.
.
.
.
TimeStamp time;
```

Coordinate mouseX; TString menuName;

It's OK to use a raw C type under certain circumstances, such as when the quantity is machine dependent, or when it can be characterized as (for example) a small integer. Otherwise, though, it's best to give yourself flexibility down the road.

Two ANSI C header files, StdDef.h and Limits.h, contain useful definitions. Here are two of the more useful ones:

size_t

The type returned by the built-in C sizeof function. This is useful for representing the sizes of things.

ptrdiff_t

A type that can represent the difference between any two pointers. The astute reader has noticed that these names do not conform to our guidelines. In the interest of clarity, however, we deem it better to use the names as defined by the ANSI C

committee.

Another item worthy of note: if a data type is unsigned, declare it unsigned; this helps avoid nasty bugs down the road.

Error Reporting

Returned error codes are (ironically) a very error-prone technique. MacApp's standard is to use exceptions: a structured technique for reporting exceptions back to a function's callers.

Unfortunately, the exception scheme does not handle an important case: an exception that occurs in a constructor. Handling this properly requires compiler support, since any base class and/or member constructors that have already been called must have their corresponding destructors called; only the compiler can know this. Until we get an official C++ exception scheme, you must handle this problem on a case-by-case basis.

Signaling an exception in a destructor is not a good idea, since any destructive behavior that has already taken place probably cannot be reversed. Don't do it.

Conclusion

We've covered a lot of ground in this article. Don't feel bad if you didn't understand every point we tried to make. It took us years of working with objects before we figured out what virtual base classes were good for! As you use C++ in your own work, think about the rules we've laid down and see if they aren't applicable to your own situation. Come back and read these guidelines every so often, just to refresh your memory. And finally, don't be shy about formulating some guidelines of your own!

David Goldsmith has been at Apple for four years, and now focuses his energies on future system software. He has also worked on MacApp and the Macintosh Toolbox (during the inception of System 6.0). He received an MA in physics from Harvard in 1980, and since has worked for Wang, Mosaic Technologies, and as a contractor for Lotus. For him, the thrill of the job is "making computers available to people whose lives don't revolve around computers." His main interest outside the office is his family, with its new member, eight-month-old Jane. He also enjoys reading and listening to classical music.

"Hackerjack" Palevich is our local meerkat handler (look that one up in *National Geographic!*). He has a degree in computer science from MIT, where his "Thesis of Terror" was a prelude to his video game days at Atari. Two years at Apple have landed him in video conferencing and screen sharing. As the son of an American diplomat, he's lived in some pretty interesting places (Berlin, Poland, Laos, Greece, Maryland, and Cupertino). He didn't buy an Apple II in the eleventh grade, and has regretted it since. His interests include filmmaking, animation, and aerobics. He claims to be halfway a nerd, but only his wife knows for sure. He also likes to tell stories, so we're not sure that any of this is really true.

Appendix H

The Complete Symantec C++ Development Environment

NOW THAT YOU'VE WORKED WITH A SCALED-DOWN version of Symantec C++, you'll want to upgrade to the full version. The complete Symantec C++ development environment lets you take advantage of the powerful features and capabilities that have made Symantec's THINK Languages the leading development tools for the Macintosh. This chapter will describe some of those features, including:

- The Project
- The Editor
- Libraries
- Fast turnaround

- Source-level debugging
- Inline assembler
- Object-oriented programming
- The THINK Class Library
- Scripting and Apple Event support

You're familiar with some features of the Symantec C++ environment from working with the special version of the product included with this book. In the full version of the product, however, you can take advantage of many additional features, such as an enhanced project window, full source-level debugging capabilities, and an inline assembler. The THINK Class Library provides object-oriented building blocks for writing Macintosh applications. Other powerful new features include an optimizer for even tighter code, a class browser for object-oriented programming, full ANSI compatibility, and Apple Event support for customization. In addition, with the complete version of Symantec C++, you can build your own double-clickable applications.

Special Upgrade Offer

Symantec will upgrade owners of *Learn C++ on the Macintosh* to the complete Symantec C++ development environment for a special price. See the back page for further details and an upgrade coupon.

Overview of the Symantec C++ Environment

Symantec C++ is a unique development environment for the Macintosh. It features very fast C and C++ compilers, a resource compiler, a faster linker, an integrated text editor, an auto-make facility, and a project manager that holds all the pieces together. Because the editor, the compilers, and the linker are all components of the same application, the THINK Project Manager knows when edited source files need to be recompiled.

Symantec C++ is a complete, integrated environment, not just a C++ compiler for the Macintosh. Traditional development environments consist of three separate applications: the editor, the

compiler, and the linker. It is up to you to create your source files with a text editor, run each file through the compiler, and finally, link all your object files. In Symantec C++, the project manager oversees the operation of the compilers, the linker, and the editor. They all work in concert as part of the same application. This way, the project manager knows when you've edited a file. The appropriate compiler produces object code that the linker can put together in an instant. Then the project manager can launch your program. And because Symantec C++ is still running, it can launch the source level debugger, so you can debug your program.

You can run your program from Symantec C++ as you work on it. Your program runs exactly as if you had launched it from the Finder, not under a simulated environment. If you use MultiFinder or System 7, your program runs in its own partition while Symantec C++ remains active, so you can examine and edit your source files as you watch your program run.

With Symantec C++ you can build Macintosh applications, desk accessories, device drivers, and any kind of code resource. The standard C libraries include all the functions specified in the ANSI C standard, as well as some additional UNIX operating system functions. The C++ libraries include IOStreams, a flexible expandable class library for doing input and output, and complex, a library that enables you to do mathematic operations with complex numbers.

Writing a program in Symantec C++ is like writing a program in any other development environment. You create your source files, compile them, then link the object code to create an executable file. The difference is that in Symantec C++, you use the same application to do all of this.

The Project

The project is at the heart of the Symantec C++ development environment. It takes over the functions of several other files in traditional development environments. The project holds the object code of all your compiled source files and maintains the dependencies and connections among them. It keeps track of files that need to be recompiled or that depend on an edited #include file. The project also lets you assign different compilers to different

files. This means that you can have C, C++, and even resource files in the same project. If you're using the source level debugger, the project keeps track of the information that the debugger needs.

Figure H.1 shows a sample project window. It contains a list of all the files that comprise your program. To the right of each file name is the size of that file's object code. To the left of each file name is the "bug" column that Symantec C++ adds to the project window when you choose the Use Debugger command. Symantec C++ generates debugging information for files that have gray diamonds next to them.

FIGURE H.1

bullseye++ 1	n' ===	
Ж Name	Code	
▽Segment 2	9640	수
 bullMenus.cp 	632	П
* bullseye.cp	456	
 bullWindow.cp 	178	
CPlusLib	1690	
MacTraps	6680	
▽Segment 3	28192	
ANSI++	28188	
Totals	38410	1
		다

Rather than producing a separate binary object code file, Symantec C++ keeps all object code in the project document in ready-to-link form. Because the project document knows all the files that make up your program (including header files), it can keep track of changes. When you edit a source file, the project manager marks it for recompilation. When you edit an #include file, the project manager marks all the files that use it.

The Editor

Once you've created a project document, the next step is to add your source files. Symantec C++ source files are standard text files, so you'll be able to use existing source files. The Symantec C++ editor uses standard Macintosh editing techniques, so you're familiar with its basic operation. It also provides some features that help you edit source code. Its search facilities include a pattern-matching option based on Grep, and a multi-file search that looks for strings in any file in your project.

Figure H.2 shows a sample search dialog from Symantec C++.

FIGURE H.2

Search for:	myWindow
Replace	
□ Entire Wor □ Wrap Arou □ Ignore Cas □ Grep	nd 🔲 Batch Search
Cancel	Don't Find Find

You can open as many files as the memory in your Macintosh will allow, and each file appears in its own edit window. Although you usually create and open source or header files, you can also use the Symantec C++ editor to open any text file.

Holding down the Option key as you click in the title bar of the project window brings up a pop-up menu containing the names of all the #include files used in the project. (See Figure H.3.)

FIGURE H.3



Libraries

Along with your source files, you must add your libraries to the project document. Virtually every program you write will need to access the Macintosh Toolbox. You can call any Macintosh Toolbox routine exactly as it's described in *Inside Macintosh*. The code for Toolbox routines marked:

[Not In ROM]

as well as the glue code needed to call some of the other Toolbox routines is in the MacTraps and MacTraps2 libraries.

Your Symantec C++ package also includes several other libraries you can use in your programs. The ANSI library contains the standard ANSI functions defined in the ANSI standard. The UNIX library contains UNIX system functions, including memory calls. The IOStreams library contains flexible expandable C++ classes for doing input and output. The complex library contains C++ classes for manipulating complex numbers. You can use these libraries when you port code from other systems. You can also create your own libraries in Symantec C++.

Fast Turnaround

Symantec C++ lets you run your program directly from the environment. With the single command Run, the project manager automatically recompiles the source files that are new or have changed, and loads any unloaded libraries. Then the Symantec C++ linker links all your code together instantly. In this one step you accomplish in seconds what used to take several minutes or longer.

The project manager launches your program as if you had double-clicked on it from the Finder. This way, you know exactly how your program will behave in actual conditions. If you're running under MultiFinder or System 7, the project manager launches your program in its own partition. Since Symantec C++ is still running, you can look at your source files while your program is running.


Source-level Debugging

To help get your program working correctly, you can use Symantec C++'s source level debugger. The Symantec C++ debugger lets you debug your code the way you wrote it: in C or C++. You can set breakpoints, step through your code, debug objects, examine variables, and change their values while your program is running. You can set conditional breakpoints that stop execution only when certain conditions are true. You can debug inline functions and templates. And because the debugger runs under MultiFinder, you can edit your source files while you're debugging.

The debugger windows show you the source of your program and the values of your variables. The Source window (see Figure H.4) contains the source text of your program, the debugger's status panel, statement markers, the current statement arrow, and the current function indicator. The title of the Source window is the name of the source file.

The Source window shows the source text of your program. When you start the debugger, this window shows the file that contains the main() routine of your application. The top of the Source window has a six-button status panel. These buttons control the execution of your program. The column of diamonds running along the left side of the source text are **statement markers**. Every line of your program that generates code gets a statement

FIGURE H.4

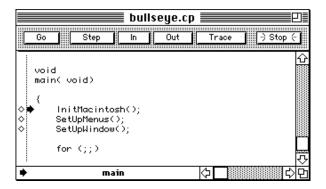


marker. You can set breakpoints at these statement markers. When your program is running, the debugger stops execution just before a breakpoint. You can set three kinds of breakpoints: simple breakpoints, conditional breakpoints, and temporary breakpoints.

The black arrow to the right of the statement markers is the **current statement arrow**. This indicator shows you the **current statement**, the one the debugger is about to execute. When you start your program, the current statement arrow is at the first executable line of your program.

The source debugger uses the space at the lower left of the Source window for the name of the **current function**. When you click here and hold the mouse button down, the debugger displays a pop-up menu that shows the call chain—the names of the functions that were called to get to the current function.

The other debugger window is the Data window. (See Figure H.5.) In this window you can examine and set the values of your

FIGURE H.5



variables. The Data window is modeled after a spreadsheet. You can type variable names into the entry field (left column), then press the Return or Enter key. When your program is running, the variable value will appear in the right column.

Inline Assembler

Symantec C++ lets you use assembly language in your C and C++ programs. You can use the built-in inline assembler for assembly language in your source files, or you can use object files generated by other assemblers. Symantec C++ works within the compilers to produce object code. You can use instructions for the Motorola MC68000 and MC68020/030/040 processors and for the MC68881 floating-point coprocessor. You can refer to variables and functions within assembly language routines. Your C and C++ routines can go to labels in the assembly routines and vice versa.

Object-Oriented Programming (OOP)

Symantec C++ provides a selection of tools for object-oriented programming. The very fast C++ compiler lets you write object-oriented programs using the powerful C++ language. The C compiler includes object-oriented extensions that allow you to write object-oriented programs using extensions to standard C. The THINK Class library allow you to write object-oriented Macintosh programs very quickly by providing a set of classes that implement a standard Macintosh application. The THINK Class library is included in both C and C++ versions. The integrated class browser allows you to navigate your object-oriented programs quickly.

Object-oriented programming is a compelling choice for many programmers today and the built-in OOP capabilities of Symantec C++ make it accessible to you whether you're a novice or more advanced professional.

The THINK Class Library

Macintosh programming is not hard to learn, but it requires mastering some new concepts and many operating system routines. To make learning Macintosh programming easier, Symantec C++ comes with the THINK Class Library.

The THINK Class Library (TCL) is a collection of classes that implement a standard Macintosh application. The TCL takes care of things like handling menu commands, updating windows, dispatching events, dealing with MultiFinder, maintaining the Clipboard, and so on. The TCL takes care of the common Macintosh interface, so you can concentrate instead on your program's functionalism.

Scripting and Apple Event Support

The Symantec C++ project manager provides scripting support. This means that you can automate complex or repetitive tasks performed in Symantec C++ using scripts written or recorded using third-party products like Frontier (Userland) or AppleScript (Apple).

The project manager also links with Symantec's THINK Reference, an online hypertext guide to the Macintosh Toolbox. Extensive information on any Toolbox routine can be brought up with just a double-click.

Symantec C++'s interface to Apple's SourceServer source control system makes team programming and version control easy and reliable. The ToolServer interface allows you to use a rich set of MPW programmer utilities from the Symantec C++ environment.

The project manager's third-party editor support means that you can use your favorite programmer's editor instead of the one that comes with Symantec C++, without giving up the benefits of an integrated environment. The project manager and the third-party editor communicate through apple events, so the project manager can still keep track of which source files have been edited.

Why Upgrade?

As you can see, the full version of Symantec C++ offers a host of features not included in this special book-version of the product: the project document, libraries, full source-level debugging, inline assembler, object-oriented programming, the THINK Class Library, and more. As you develop your skills as a Macintosh programmer, you'll want the power and flexibility the Symantec C++ development environment offers. Plus, you can upgrade to the complete version for a special price. See the coupon at the back of the book for details.

Appendix I

Bibliography

- 1. "Unoffical C++ Style Guide," David Goldsmith and Jack Palevich, in *develop*, *The Apple Technical Journal*, Issue 2, April 1990, Apple Computer, Inc., Cupertino, CA.
- 2. *The C++ Programming Language*, 2nd ed., Bjarne Stroustrup, 1991, Addison-Wesley Publishing Company, Reading MA.
- 3. *C++ Primer*, 2nd ed., Stanley B. Lippman, 1991, Addison-Wesley Publishing Company, Reading MA.
- 4. Advanced C++: Programming Styles and Idioms, James Coplien, 1992, Addison-Wesley Publishing Company, Reading MA.
- 5. *Elements of C++ Macintosh Programming*, Dan Weston, 1990, Addison-Wesley Publishing Company, Reading MA.
- 6. *C++ Programming with MacApp*, David A. Wilson, Larry S. Rosenstein, and Dan Shafer, 1990, Addison-Wesley Publishing Company, Reading MA.
- 7. *Inside Macintosh*, Volumes I–V, Apple Computer, Inc., 1991, Addison-Wesley Publishing Company, Reading MA.
- 8. *Inside Macintosh*, Volume VI, Apple Computer, Inc., 1991, Addison-Wesley Publishing Company, Reading MA.
- 9. *New Inside Macintosh,* Apple Computer, Inc., 1992–1993, Addison-Wesley Publishing Company, Reading MA.

- 10. *Macintosh Human Interface Guidelines*, 1992, Addison-Wesley Publishing Company, Reading MA.
- 11. *Macintosh C Programming Primer*, Volume I, 2nd ed., Dave Mark and Cartwright Reed, 1992, Addison-Wesley Publishing Company, Reading MA.
- 12. *Macintosh C Programming Primer*, Volume II, Dave Mark, 1990, Addison-Wesley Publishing Company, Reading MA.
- 13. *Macintosh Pascal Programming Primer*, Volume I, Dave Mark and Cartwright Reed, 1991, Addison-Wesley Publishing Company, Reading MA.
- 14. *Learn C on the Macintosh*, Dave Mark, 1991, Addison-Wesley Publishing Company, Reading MA.
- 15. *The C Programming Language*, 2nd ed., Brian Kernighan and Dennis M. Ritchie, 1988, Prentice-Hall, Englewood Cliffs, NJ.
- 16. *Macintosh Programming Secrets*, 2nd ed., Scott Knaster, 1992 Addison-Wesley Publishing Company, Reading MA.
- 17. How to Write Macintosh Software, 3rd ed., Scott Knaster, 1992, Addison-Wesley Publishing Company, Reading MA.
- 18. *The Annotated C++ Reference Mamual*, Margaret Ellis and Bjarne Stroustrup, 1990, Addison-Wesley Publishing Company, Reading MA.

Index

!, 39, 41, 168 !=, 39, 41, 168 #, 43 #define, 43, 89 #elif, 43 #else, 43 #endif, 43 #if, 43 #ifdef, 43 #ifndef, 43 #include, 43, 64, 118, 138 #line, 43 #pragma, 43 #undef, 43 %, 36, 41, 168 %=, 37, 41, 168 &, 34, 37, 41, 68-69, 72, 164, 168 &=, 37, 41, 168 (), 168, 179-180, 183 ()(), 184-186 *, 33-36, 41, 158, 168 */, 43, 52 *=, 37, 41, 161, 168 +, 32, 35-36, 41, 158-159, 161, 168 ++, 35-36, 38, 41, 168 +=, 37, 41, 168 , (comma), 40, 168	-=, 37, 41, 168 ->, 30, 35, 41, 168, 179-180, 191 ->*, 168 ., 30, 35, 41, 97, 113, 168 .*, 168 /, 36, 41, 168 /*, 43, 52 //, 52 /=, 37, 41, 168 .; 108 .;, 84-86, 168 ;, 41 <, 39, 41, 168 <<, 37, 41, 53, 168 <<, 37, 41, 168 =, 36, 41, 168, 179-180, 195 ==, 39, 41, 168 >, 39, 41, 168 >, 39, 41, 168 >, 39, 41, 168 >=, 39, 41, 168 >=, 39, 41, 168 >=, 39, 41, 168 >=, 39, 41, 168 >=, 39, 41, 168 [], 168, 179-180, 187-190 26-27 \', 27 \', 27 27 27 27 27 27 27 27 27 27 27 27 27 27 27 27 27 27 27
++, 35-36, 38, 41, 168	\", 27
, (comma), 40, 168	\?, 27
~, 37, 41, 104, 168 ^, 37, 168	\a, 26-27 \b, 27
^=, 37, 41, 168	\f, 27
-, 35-36, 41, 168 , 35, 38, 41, 168	\n, 26-27 \r, 27

\t, 27 \v, 27 27 37, 41, 168 37, 41, 168 39, 41, 168 39, 41, 168 42-43 \textbf{A} \text{Abbreviations, 390} \text{Abstract class, 301} \text{Abstract base classes, 406-407} \text{Access and inheritance, 130-136} \text{Access function, 301} \text{Access priveleges, 106-109} \text{Access specifier, 106-108, 301} \text{Addition, 36} \text{adjustfield, 233} \text{Advanced C++: Programming Styles and Idioms, 431} \text{Ambiguities, 264} \text{multiple-root example, 265-268} \text{virtual base class, 268-274} \text{AND, 37, 39, 41} \text{Annotated C++ Reference Manual, The, (ARM), 59, 432} \text{ANSI C} \text{keywords, 41} \text{operators, 36-41} \text{Apple Computer, ix, 4, 385, 420, 431} \text{Apple event support, 430} \text{Apple Programmers and Developers Association (APDA), 385} \text{Apple Technical Journal, The, 385} \text{Apple Technical Journal, The, 385} \text{Apple Technical Journal, 793, 301} \text{argc, 42} \text{Argument(s), 40-43, 246-247} \text{command line, 42} \text{initializers, 63}	Arithmetic operators, 36, 41 arrayPtr, 244-246, 251-252 Array(s), 29 class, 244 definitions, 29 initialization, 30 multidimensional, 29 pointers, 34-36, 413-414 range checking for, 187 templates, 245-246, 251 Assignment, initialization versus, 274-278 Assignment, memberwise, 195, 303 Assignment operator, 36-37 Assignment statement, 84, 187-189, 276 Augmented assignment operators, 37 auto, 34, 41 Automatic type conversion, 32-33, 49 B Backslash, 26-27 Backspace, 27 Backup copy, THIN C++, 12 badbit, 216-218 Base class, 127, 301, 413 and constructors with parameters, 143-149 inheritance, 128-136 virtual, 149-153 basefield, 237 Basic, ix Bedrock, ix, 4, 295 Bell, 27 Binary operator, 36, 160 Bit, 37, 216-218, 304 Bit shift, 37 Bitwise logical operators, 37-38 Boolean logic, 39 Bounds checking, 244, 251 Brackets, 78 break, 41 Buffer, 238-240
argv, +2	built-iii operators, 156, 166

С	cin source code, 60-62, 308
C code, running under C++, 48	class, 108, 130, 246, 301
automatic type conversion, 49	Class declaration, 128
function prototypes, 48	See also Base class; Derived class
scope differences, 49-51	Class derivation, 127-136, 301
C programming, ix, 24	Class functions, 116
comments, 43-44	Class libraries, 293-296, 301
functions, 42-43	Classes, 204-211
literal constants, 24-28	clear(), 217
operators, 36-41	clog, 205
preprocessor directives, 43	close(), 223
statements, 41	Close Project, 18
variables, 28-36	Colon, 108
C Programming Language, The, 44, 432	Comma operator, 40, 168
C++ Primer, 299, 431	Command key, 14
C++ programming, ix, 4, 48	Command-line arguments, 42
comment marker //, 52	Comments, 43
default argument initializers, 63-66	markers, 52
function name overloading, 73-77	Compilers, 4
inline functions, 87-89	CompuServe, ix
input and output, 53-62	Conditional operator, 38
new and delete operators, 77-84	const, 41, 118, 392, 394-396
new features, 52	qualifier, 33
reference variables, 66-73	and reference types, 275-276
scope resolution operator, 84-86	Constant names, 389
structure, 94-95	Constructor function, 101-102, 302
C++ Programming Language, The, 299, 431	Constructors
C++ Programming with MacApp, 431	adding parameters to, 103-104
Call operator, 183-185	and destructors, 104-106, 136-142
call source code, 184-186, 307-308	with parameters, 143-149
Call-by-reference, 70-72	virtual, 410
Carriage return, 237	continue, 41
case, 41	Control character, 212-213
Case	Control Manager, 292
functions, 212-213	Coplien, James, 431
global variables, 84-85	Copy constructor, 280, 302
scientific notation, 235-236	Copyright notice, 386
cerr, 53, 205	CopyString, 35-36
char, 28, 32, 41	cout, 53-57, 205, 236
Character constants, 26-27	cout source code, 57-59, 308-309
Character-based interface, 204	Curly braces, 41
cin, 53	Current function, 427

Current object, 98-99, 302	E
Current statement, 427	Edit menu, 17
Current statement arrow, 427	Editor, 425-426
	Elements of C++ Macintosh Programming, 431
D	Ellipsis, 42-43
Data members, 95, 244, 302	Ellis, Margaret, 432
Data-hiding, 404-409	else, 41
Debugging, 427-429	employee source code, 110-114, 310-311
dec(), 232, 237	Encapsulation, 94-96, 404
Decimal, 70	End-of-file, 224, 237, 239
Decimal constants, 24	ends(), 237
Declaration, 51, 302	enum, 27, 41, 392-393
class, 128	Enumerations, 27-28, 50, 390-391
static, 34, 41	Enumerations constants, 27-28, 50-51
template instantiation, 248-249, 305	eofbit, 216-218
union, 30-31	equals operator, 36, 41, 168, 179-180, 195
Decrement operator, 38-39	equals source code, 196-200, 311-313
default, 41	Errors, 205, 419
Default argument initializers, 63-66, 302	EXCLUSIVE OR, 37
Default arguments, 399	Explicit typecasting, 49
Definition, 51, 302	Exponent, 25
delete, 77-84, 100, 105, 168, 179-180, 198	extern, 34, 41
Derivation chain, 137-142, 302	Extract, 12-13
Derived class, 125, 302	Extraction operator, 53, 302
base classes, 143-149	Extraction operator, 55, 562
constructors and destructors, 136-142	F
inheritance, 128-136	failbit, 216-218
overriding member functions, 149-153	False, 81
parameters, 143-149	Fields, 29
summary, 154	File extensions, 20
derived source code, 132-136, 309-310	File menu, 16-17
Desktop file, 14	File-opening, 213-215 File-reading, 215-216
Destroyed, 96 Destructor, 283	fill(), 233-234, 237
virtual, 410	Find Text dialog box, 18
Destructor function, 104-106, 136, 302	fixed, 236
develop, 7, 298, 385, 431	flag(), 232
Dimension, 29	float, 25-26, 28, 32, 41, 171, 177, 231
Division, 36	Floating-point constants, 25-26
do, 41	flush, 236
do, 41 double, 25-26, 28, 32, 41	Font, 17-18
Double quotes, 27	for, 41
DOS, 4	formatter source code, 233-235, 313
DOJ, 1	formatier source code, 255-255, 515

Formatting flags, 231-233, 302	Horizontal tab, 27
Formatting output, 231-236	How to Write Macintosh Software, 432
Formfeed, 27	, ,
fprintf(), 238	
Fractional, 24	Identifier, 29
free(), 77	if, 41
friend, 115-123, 407-408	ifstream, 214, 222
friends source code, 118-123, 313-316	ignore(), 209
fstream.h, 223, 345-352	Implementation, 106, 408
Function(s), 42	Increment operator, 38-39
access codes, 106-109	index, 189-190
argument names, 389	Inheritance, 128-136, 303
arguments, 63-65	class derivation example, 131
case, 212-213	protected, 107, 142, 145, 262, 404-409
ellipsis, 42-43	See also Multiple inheritance
memberwise initialization, 278-280	init source code, 277-278, 318
overload matching rules, 76	Initialization, 29-30
prototypes, 42, 48, 65	Initialization, memberwise, 278-286
signature, 172	Initialization versus assignment, 274
Function call operator, 183-187	const and reference types, 275-276
Function name overloading, 73-77, 302, 400	init source code, 277-278, 318
Function templates, 247-249	member initialization list example, 276-278
	inline, 87-89
G	inline assembler, 429
get(), 206-208	inline functions, 87-89, 303, 393-394, 397-398
getline(), 209	inline source code, 88-89, 318-319
Global names, 389	Input and output, 53-55
Global variables, 84-85, 396-397	iostream and objects, 62
Goldsmith, David, 298, 385, 420, 431	iostream input, 59-62
goodbit, 216-218	iostream output, 55-59, 178
goto, 41	Insertion operator, 53, 303
gramps source code, 138-142, 316-317	Inside Macintosh, 290, 296-297, 431
Graphical user interface, 290	Installation, THIN C++, 12-13
	Instantiation, 248-249
Н	int, 24, 28, 32, 41
Header files, 43	Integer, 25
hello++ source code, 13-16, 317	Integer division, 36
hex(), 232, 237	Integral constants, 24-25
Hex numbers, 235-236	Integral type, 28
Hexadecimal, 70	Interface guidelines, 290, 303
Hexadecimal constants, 24	Interface routines, 106
Hierarchical File System (HFS), 296	Interface vocabulary, 290, 303

internal, 233	K
iomanip.h, 237, 353	Kernighan, Brian, 44
ios, 204	Keywords, ANSI C, 41
ios::, 214	Knaster, Scott, 285, 298, 432
iostream, 53, 202	, , ,
character-based interface, 204	L
classes, 204-211	Learn C on the Macintosh, 4, 44, 432
close(), 223	Learn C++ on the Macintosh, ix, 3
customizing, 224-230	Left bit shift, 37
formatting output, 231-236	Left-justify, 234
ifstream, 214, 222	Libraries, 293-296, 426
input, 59-60	Lippman, Stanley, 299, 431
istream, 205-211	Literal constants, 24
istrstream, 238-240	character, 26-27
manipulators, 236-238	enumerations, 27-28
and objects, 62	floating-point, 25-26
ofstream, 214, 222	integral, 24-25
ostream, 205-211	string, 27
ostrstream, 238-240	Local variables, 84, 389
output, 178	Logical operators, 39
reading data from a file, 213-216	long, 24, 28, 31, 32, 34, 41
state bits, 216-21	long double, 25-26, 28, 32
strstream, 238-240	Lowercase, 235
utilities, 211-212	
write(), 224	M
iostream.h, 54, 81, 162, 223, 240, 355-378	Mac Primer, 297
isalnum(), 212-113	MacApp, ix, 293-294
isalpha(), 212-113	Macintosh, ix, 4, 295
iscntrl(), 212-113	Macintosh C Programming Primer, 297-298, 432
isdigit(), 212-113	Macintosh Hierarchical File System (HFS), 296
isgraph(), 212-113	Macintosh Human Interface Guidelines, 290, 432
islower(), 212-113	Macintosh Pascal Programming Primer, , 432
isprint(), 212-113	Macintosh Programmer's Workshop (MPW), 294
ispunct(), 212-113	Macintosh Programming Secrets, 298, 432
isspace(), 212-113	Macintosh system software, 4
istream, 205-211	Macintosh Toolbox, 291-293, 296, 303
istrstream, 238-240	MacTraps library, 293
isupper(), 212-113	main(), 42, 48, 133, 135, 141-142, 166, 177
isxdigit(), 212-113	malloc(), 77-78
Iterator function, 186	Manipulators, 236-238, 303
	Mark, Dave, 297, 432

Matching rules, 76 Member access operator, 190-194 Member functions, 95, 303 constructor function, 101-102 destructor, 104-106	nonVirtual source code, 266-268, 326-327 NOT, 39 Null terminator, 27, 36, 103, 239 Null-terminated string, 196, 239
operator overloading, 160-161	0
overriding, 149-153	Object, 62, 303
parameters, 103-104	Object code, 19
Member initialization list, 263, 275-278, 303	Object programming, 93
Member names, 389	access priveleges, 106-109
Memberwise assignment, 195, 303	creating an object, 96-97
Memberwise initialization, 278, 303	data members, 97-100
copy constructor, 280	deleting an object, 100
example, 280-286	encapsulating data and functions, 95-96
memberWise source code, 281-286, 319-321	example, 109-114
memberWise source code, 281-286, 319-321	friends, 115-123
Memory allocation, 77-84, 305	member functions, 101-106
Menu Manager, 291-292	pointer, 97-99
menu source code, 173-179, 321-322	struct, 94-95
Microsoft, 4	Object-Oriented Programming (OOP), 429
Multidimensional arrays, 29	oct(), 232, 237
multInherit source code, 258-261, 322-324	Octal constants, 24
Multiple inheritance, 256-257, 303, 411-413	ofstream, 214, 222
example, 258-261	Open Project, 18
multiinh, 262-264	Operands, 32-34, 36
static members, 261-262	Operator(s), 36
Multiple overloading functions, 161	arithmetic, 36, 41
Multiple-root example, 265-268	assignment, 36-37
Multiplication, 36	bitwise logical, 37-38
N	built-in, 158, 168
	comma, 40
Naming conventions, 389-391	conditional, 38
Nesting, C comments, 44	decrement, 38-39
new, 77-84, 100, 105, 168, 179-180 new handler, 81	delete, 77-84, 100, 105, 168, 179-180, 198
New Inside Macintosh, 431	equals, 195-200 extraction, 53, 203
new source code, 181-183, 324-325	function call, 183
Newline, 26-27	increment, 38-39
newTester source code, 81-84, 325-326	insertion, 53, 203
nonprivate, 257	logical, 39
nonstatic member function, 98-99, 178, 183-184	new, 77-84, 100, 105, 168, 179-180
nonstatic variable, 34	precedence of, 40-41
nonomic variable, or	precedence of, to 11

relational, 39	Parentheses, 168, 179-180, 183
scope resolution, 84-86	Passed by reference, 42, 68-73, 280
sizeof(), 40, 168	Passed by value, 42, 66-68
subscript, 187-190	peek(), 210
Operator overloading, 157-158, 304, 402-403	Pointers, 34-36, 413-414
equals, 195-200	memberwise initialization and, 279
example, 161-168	smart, 191, 304
function call, 183-187	versus references, 415-416
member access, 190-194	Postfix notation, 39, 169
member function, 160-161	Pound sign, 43
memberwise assignment, 195-196	Portability, 416-417
multiple overloading functions, 161	Precedence of operators, 40-41
new and delete, 168, 179-180	precision(), 236-237
nonoverloadable, 168	Prefix notation, 39, 169
overloadable, 168	Preprocessor, 43, 391-394
overloader overloading example, 173-179	Preprocessor directives, 43
overloading an overloading function, 172	Preprocessor pass, 43
restrictions, 168-170	Printable ASCII character, 212
smart pointer, 191	printf(), 43, 53, 238
specified, 159	private, 107, 130-136, 142, 162, 227, 262, 404-409
subscript, 187	Program, 14
using a member function, 160-161	Project, 13-14, 304, 423-424
versions, 172-173	Project file, 13, 304
OR, 37, 39, 232	Project Manager, 14
ostream, 205-211	Project menu, 16-18
ostrstream, 238-240	Project window, 15, 304
Out of bounds, 253-254	Projector, 388
Output, 55-59, 278	protected, 107, 131, 142, 145, 262, 404-409
overload source code, 75-76, 226-230, 327-330	protoTester source code, 65-66, 330
Overloading	public, 107, 130-136, 145, 162, 227, 262, 270,
functions, 73-77, 172, 302, 400	404-409
new and delete, 180-183	Punctuation characters, 212-213
specified operator, 159	Pure virtual function, 406
See also Operator overloading	Push button, 292
Overriding function, 149-153	put(), 210, 239
5	putback(), 210
P	
Palevich, Jack, 298, 385, 420, 431	Q
Pascal, ix, 4	Qualifier, 28, 33-34, 61
Parameters	Question mark, 27
adding to constructor, 103-104	Quotation mark, 27
constructors with, 143-149	

R	setiosflags, 237
Radio buttons, 292	setprecision, 237
Radix flags, 232	setw, 237
Range checking, 187	Shafer, Dan, 431
Read only memory (ROM), 291, 304	short, 28, 32, 41
read(), 224	showbase, 235
readMe source code, 215-216, 330	showpoint, 235
Rebuild desktop file, 14	showpos, 235
Reed, Cartwright, 297, 432	signature, 74, 172, 304
reference, 68-73	signed, 28, 41
Reference source code, 70-73, 331	Single quotes, 26-27
Reference variables, 66-73, 304	Single-byte backslash characters, 26
register, 34, 41	sizeof, 41, 50
Relational operators, 39	sizeof(), 40-41, 168
Remove Objects, 18-19	Smart pointer, 191, 304
resetiosflags, 237	smartPtr, 190
return, 27, 41	smartPtr source code, 191-194, 332-333
Revert, 17	Snyder, Alan, 409
Right bit shift, 37	Source code comments, 43-44
Right-justify, 233-235	Source-level debugging, 427-429
Ritchie, Dennis, M., 44	Space, 212
Root, 265	Specifiers, storage class, 34
Root base class, 256, 304	sprintf(), 238
Rosenstein, Larry, S., 431	square source code, 145-148, 333-334
Run, 19	State bits, 216-218, 304
_	stateBits source code, 219-222, 334-335
S	Statement(s), 41
scanf(), 53	assignment, 84, 187-189, 276
scientific, 235-236	friend, 115-123, 407-408
Scope, 49-51, 73, 304	sizeof, 41, 50
Scope resolution operator, 84-86, 304	typedef, 31, 41, 43
scopeTester source code, 85-86, 331-332	Statement markers, 427
Scripting, 430	static, 34, 41
Scroll bar, 292	Static initialization, 397
seekg(), 211	static members, 261-262, 305, 396-397
seekp(), 211	Storage-class specifiers, 34
Self-extracting archive, 12	strcpy(), 174-175, 196, 282
Semicolon, 41	stream.h, 223
Set Tabs & Font dialog box, 18	streams, 223
setbase, 237	strncpy(), 103-104, 111
setf(), 231, 237	string, 195-197
setfill, 237	String constants, 27

String copying, 35-36	projects, 13
Stroustrup, Bjarne, 299, 405, 431-432	testing, 13-16
strstrea.h, 379-383	THINK C, 293-294
strstream, 238-240	THINK class library (TCL), 293, 429-430
strstream source code, 238-240, 335-336	THINK Reference, 297
struct, 29, 31, 41, 94-95, 130	this, 99-100, 199
structures, 29-30	tilde ~, 37, 41, 104, 168
Subscript operator, 187-190	time source code, 162-168, 339-341
subscript source code, 188-190, 336-337	tolower(), 212-213
Subtraction, 36	toupper(), 212-213
Sun, 4	Translator, 20
switch, 41	True, 81
Symantec, ix, 4, 11, 293-294	Two-stage construction, 305
Symantec C++ development environment, 421	Type, 29
Apple event support, 430	Type checking, 42
editor, 425-426	Type coercion, 403-404
inline assembler, 429	Type names, 389
libraries, 426	Typecast, 41
Object-Oriented Programming (OOP), 429	Typecasting, 33
overview, 422	explicit, 49
project, 423-424	Typedefs, 31, 41, 43
scripting, 430	
	I I
source-level debugging, 427-429	U
source-level debugging, 427-429 THINK class library, 429-430	UL, 25
THINK class library, 429-430	UL, 25
THINK class library, 429-430 upgrade offer, switch, 422, 430 System 7, 5	UL, 25 Unary operator, 34, 37, 39, 41, 160
THINK class library, 429-430 upgrade offer, switch, 422, 430	UL, 25 Unary operator, 34, 37, 39, 41, 160 Unbuffered, 205
THINK class library, 429-430 upgrade offer, switch, 422, 430 System 7, 5	UL, 25 Unary operator, 34, 37, 39, 41, 160 Unbuffered, 205 union, 30, 41
THINK class library, 429-430 upgrade offer, switch, 422, 430 System 7, 5	UL, 25 Unary operator, 34, 37, 39, 41, 160 Unbuffered, 205 union, 30, 41 Unions, 30-31
THINK class library, 429-430 upgrade offer, switch, 422, 430 System 7, 5 T Tabs, 17-18, 27	UL, 25 Unary operator, 34, 37, 39, 41, 160 Unbuffered, 205 union, 30, 41 Unions, 30-31 Unix, 4
THINK class library, 429-430 upgrade offer, switch, 422, 430 System 7, 5 T Tabs, 17-18, 27 Templates, 244-246, 305	UL, 25 Unary operator, 34, 37, 39, 41, 160 Unbuffered, 205 union, 30, 41 Unions, 30-31 Unix, 4 Unofficial C++ Style Guide, 7, 298, 385, 431
THINK class library, 429-430 upgrade offer, switch, 422, 430 System 7, 5 T Tabs, 17-18, 27 Templates, 244-246, 305 declaring an object using, 246	UL, 25 Unary operator, 34, 37, 39, 41, 160 Unbuffered, 205 union, 30, 41 Unions, 30-31 Unix, 4 Unofficial C++ Style Guide, 7, 298, 385, 431 unsetf(), 231, 237
THINK class library, 429-430 upgrade offer, switch, 422, 430 System 7, 5 T Tabs, 17-18, 27 Templates, 244-246, 305 declaring an object using, 246 example, 250	UL, 25 Unary operator, 34, 37, 39, 41, 160 Unbuffered, 205 union, 30, 41 Unions, 30-31 Unix, 4 Unofficial C++ Style Guide, 7, 298, 385, 431 unsetf(), 231, 237 unsigned, 28, 32, 41
THINK class library, 429-430 upgrade offer, switch, 422, 430 System 7, 5 T Tabs, 17-18, 27 Templates, 244-246, 305 declaring an object using, 246 example, 250 function, 247-248	UL, 25 Unary operator, 34, 37, 39, 41, 160 Unbuffered, 205 union, 30, 41 Unions, 30-31 Unix, 4 Unofficial C++ Style Guide, 7, 298, 385, 431 unsetf(), 231, 237 unsigned, 28, 32, 41 unsigned int, 24
THINK class library, 429-430 upgrade offer, switch, 422, 430 System 7, 5 T Tabs, 17-18, 27 Templates, 244-246, 305 declaring an object using, 246 example, 250 function, 247-248 instantiation, 248-249, 305	UL, 25 Unary operator, 34, 37, 39, 41, 160 Unbuffered, 205 union, 30, 41 Unions, 30-31 Unix, 4 Unofficial C++ Style Guide, 7, 298, 385, 431 unsetf(), 231, 237 unsigned, 28, 32, 41 unsigned int, 24 unsigned long, 25, 32
THINK class library, 429-430 upgrade offer, switch, 422, 430 System 7, 5 T Tabs, 17-18, 27 Templates, 244-246, 305 declaring an object using, 246 example, 250 function, 247-248 instantiation, 248-249, 305 template argument list, 246-247, 305	UL, 25 Unary operator, 34, 37, 39, 41, 160 Unbuffered, 205 union, 30, 41 Unions, 30-31 Unix, 4 Unofficial C++ Style Guide, 7, 298, 385, 431 unsetf(), 231, 237 unsigned, 28, 32, 41 unsigned int, 24 unsigned long, 25, 32 Upgrade offer, 422, 430 Uppercase, 235 User Interface, 289-291
THINK class library, 429-430 upgrade offer, switch, 422, 430 System 7, 5 T Tabs, 17-18, 27 Templates, 244-246, 305 declaring an object using, 246 example, 250 function, 247-248 instantiation, 248-249, 305 template argument list, 246-247, 305 template source code, 251-256, 337-339 Terminator, 26, 103 Ternary operator, 38	UL, 25 Unary operator, 34, 37, 39, 41, 160 Unbuffered, 205 union, 30, 41 Unions, 30-31 Unix, 4 Unofficial C++ Style Guide, 7, 298, 385, 431 unsetf(), 231, 237 unsigned, 28, 32, 41 unsigned int, 24 unsigned long, 25, 32 Upgrade offer, 422, 430 Uppercase, 235
THINK class library, 429-430 upgrade offer, switch, 422, 430 System 7, 5 T Tabs, 17-18, 27 Templates, 244-246, 305 declaring an object using, 246 example, 250 function, 247-248 instantiation, 248-249, 305 template argument list, 246-247, 305 template source code, 251-256, 337-339 Terminator, 26, 103 Ternary operator, 38 THIN C++, 3, 5	UL, 25 Unary operator, 34, 37, 39, 41, 160 Unbuffered, 205 union, 30, 41 Unions, 30-31 Unix, 4 Unofficial C++ Style Guide, 7, 298, 385, 431 unsetf(), 231, 237 unsigned, 28, 32, 41 unsigned int, 24 unsigned long, 25, 32 Upgrade offer, 422, 430 Uppercase, 235 User Interface, 289-291 Utilities, input and output, 211-212
THINK class library, 429-430 upgrade offer, switch, 422, 430 System 7, 5 T Tabs, 17-18, 27 Templates, 244-246, 305 declaring an object using, 246 example, 250 function, 247-248 instantiation, 248-249, 305 template argument list, 246-247, 305 template source code, 251-256, 337-339 Terminator, 26, 103 Ternary operator, 38 THIN C++, 3, 5 features, 16-19	UL, 25 Unary operator, 34, 37, 39, 41, 160 Unbuffered, 205 union, 30, 41 Unions, 30-31 Unix, 4 Unofficial C++ Style Guide, 7, 298, 385, 431 unsetf(), 231, 237 unsigned, 28, 32, 41 unsigned int, 24 unsigned long, 25, 32 Upgrade offer, 422, 430 Uppercase, 235 User Interface, 289-291 Utilities, input and output, 211-212
THINK class library, 429-430 upgrade offer, switch, 422, 430 System 7, 5 T Tabs, 17-18, 27 Templates, 244-246, 305 declaring an object using, 246 example, 250 function, 247-248 instantiation, 248-249, 305 template argument list, 246-247, 305 template source code, 251-256, 337-339 Terminator, 26, 103 Ternary operator, 38 THIN C++, 3, 5 features, 16-19 installing, 12-13	UL, 25 Unary operator, 34, 37, 39, 41, 160 Unbuffered, 205 union, 30, 41 Unions, 30-31 Unix, 4 Unofficial C++ Style Guide, 7, 298, 385, 431 unsetf(), 231, 237 unsigned, 28, 32, 41 unsigned int, 24 unsigned long, 25, 32 Upgrade offer, 422, 430 Uppercase, 235 User Interface, 289-291 Utilities, input and output, 211-212 V Variables, 28
THINK class library, 429-430 upgrade offer, switch, 422, 430 System 7, 5 T Tabs, 17-18, 27 Templates, 244-246, 305 declaring an object using, 246 example, 250 function, 247-248 instantiation, 248-249, 305 template argument list, 246-247, 305 template source code, 251-256, 337-339 Terminator, 26, 103 Ternary operator, 38 THIN C++, 3, 5 features, 16-19 installing, 12-13 Project Manager, 14	UL, 25 Unary operator, 34, 37, 39, 41, 160 Unbuffered, 205 union, 30, 41 Unions, 30-31 Unix, 4 Unofficial C++ Style Guide, 7, 298, 385, 431 unsetf(), 231, 237 unsigned, 28, 32, 41 unsigned int, 24 unsigned long, 25, 32 Upgrade offer, 422, 430 Uppercase, 235 User Interface, 289-291 Utilities, input and output, 211-212 V Variables, 28 arrays, 29
THINK class library, 429-430 upgrade offer, switch, 422, 430 System 7, 5 T Tabs, 17-18, 27 Templates, 244-246, 305 declaring an object using, 246 example, 250 function, 247-248 instantiation, 248-249, 305 template argument list, 246-247, 305 template source code, 251-256, 337-339 Terminator, 26, 103 Ternary operator, 38 THIN C++, 3, 5 features, 16-19 installing, 12-13	UL, 25 Unary operator, 34, 37, 39, 41, 160 Unbuffered, 205 union, 30, 41 Unions, 30-31 Unix, 4 Unofficial C++ Style Guide, 7, 298, 385, 431 unsetf(), 231, 237 unsigned, 28, 32, 41 unsigned int, 24 unsigned long, 25, 32 Upgrade offer, 422, 430 Uppercase, 235 User Interface, 289-291 Utilities, input and output, 211-212 V Variables, 28

const qualifier, 33 global and local, 84-85, 389, 396-397 initialization, 29 pointers, 34-36 reference, 66-73, 304 storage-class specifiers, 34 structures, 29-30 this, 99, 199 typecasting, 33 typedefs, 31 unions, 30-31 Vertical tab, 27 virtual, 149-153, 182, 270 Virtual base class, 268-274, 305 virtual destructor, 409 Virtual functions, 149-153, 409-411 virtual source code, 271-274, 341-342

void, 33, 41 void pointer, 33, 49 volatile, 34, 41

W

Weston, Dan, 431 whatAmI source code, 150-153, 343-344 while, 41 while clause, 36 while loop, 216, 218, 230, 239 White space, 68-69, 232, 237 width(), 233-235, 237 Wilson, David, A., 431 Window Manager, 292 Windows, 4 write(), 224 ws(), 237