
Radio & Scanner Checkout

Standard Operating Procedure
Procedimiento Operativo Estándar

Scope	Checking warehouse two-way radios and handheld scanners out at the start of a shift and back in, on the charger, at the end.
Applies to	Operators, Supervisors, and Admins.
Everyday use	The **kiosk** on the shared iPad (landscape). No sign-in required.
Management	Fleet board, Reports, and Admin panel — **supervisors and admins**.
Records	Every action writes an immutable audit entry (who, what, when).

Why this matters

Radios and scanners walk off, go missing between shifts, and come back with dead batteries. The kiosk records who has every device, flags anything not back by the end of the shift, and makes sure each one is returned to its charger.

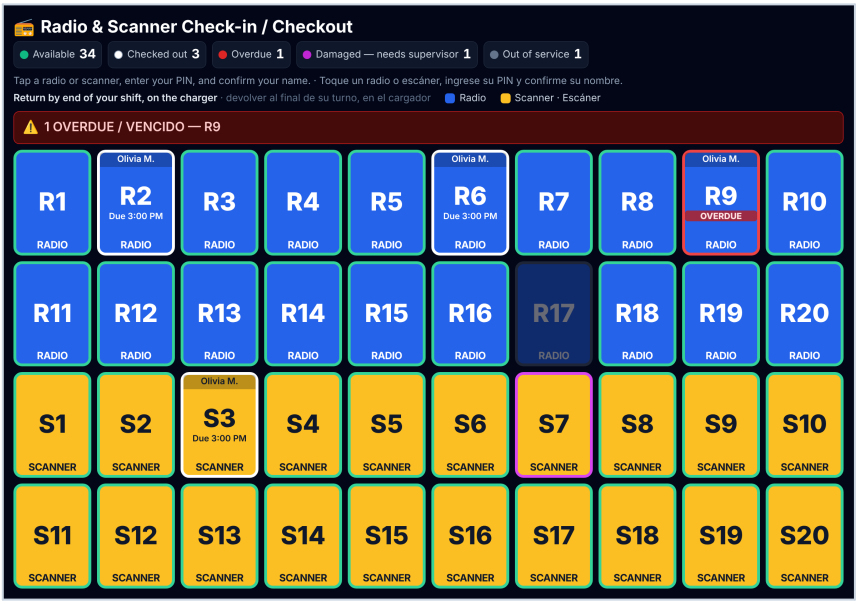

The kiosk on the shared iPad — what the floor sees all day.

Contents

1	The device lifecycle at a glance
2	Roles and PINs
3	Return policy — end of shift
4	Using the kiosk (everyday floor use)
5	Reading the kiosk board
6	The return checklist
7	Damaged devices — supervisor review
8	Supervisor tasks on the fleet board
9	Reports
10	Admin settings and what they do
11	Troubleshooting

1. The device lifecycle at a glance

Each radio and scanner moves through a short, fixed sequence. The system blocks any step taken out of order.

Stage	Who	What happens
Available	—	On the charger and ready to use.
Checked out	Operator	In use. The tile shows who has it and when it is due back.
Available (again)	Operator returns it	Placed on the charger, condition Good → ready for the next person.
Damaged	Operator reports it	Held out of use with a reason (and optional photo) until a **supervisor** reviews it.
Out of service	Supervisor retires it	Removed from rotation (lost, broken, sent for repair).

Overdue is not a separate stage — any checked-out device past the end of its shift is flagged overdue automatically, gets a red ring, and appears in the banner at the top of the kiosk.

2. Roles and PINs

Every employee has a short PIN (4–8 digits) that identifies them. The PIN determines what they are allowed to do.

Role	Can do
Operator	Check out an available device; check in the device **they** checked out.
Supervisor	Everything an operator does, plus: check in a device someone else left out, return **damaged** devices to service, retire and restore devices, use the fleet board and reports, and manage devices, shift times, and the kiosk logo in Admin.
Admin	Everything, including managing **employees** and the **Teams notification** settings.

> **Change the default PINs before going live**
>
> A new installation ships with sample accounts — Admin **0000**, Operator **1111**, Supervisor **2222**. Set real PINs in Admin → Workers on day one, and remove the samples. PINs are stored encrypted and cannot be read back — if one is forgotten, an admin sets a new one.

3. Return policy — end of shift

Every radio and scanner is due back **at the end of the shift** it was checked out on, on its charger. The due time is set automatically at checkout.

Device	Kiosk color	Labels	Must be returned
Radio	Blue tile	R1–R20	End of shift, on the charger.
Scanner	Amber tile	S1–S20	End of shift, on the charger.


Shift end times are set by a supervisor in Admin (default **07:00, 15:00, 23:00**). If you check a device out **within an hour** of a shift end — for example, arriving early for the next shift — it is due at the **following** shift end instead. The confirmation screen always shows the exact due time, and that time then appears on the device's tile.

4. Using the kiosk (everyday floor use)


The kiosk is the shared iPad on the floor. It needs no sign-in — every action is confirmed with the employee's own PIN, which is what records who did it.

Checking a device out

1. Take a radio or scanner off the charger and tap its tile. It must have a **green ring** (Available).
2. Enter your PIN and tap **Next / Siguiente**.
3. Your name appears. Confirm it is you — tap **Yes, that's me / Sí**. (If it is not your name, tap **Not me** and try again.)
4. The screen shows when the device is **due back**. The tile now shows your name at the top and a white ring.

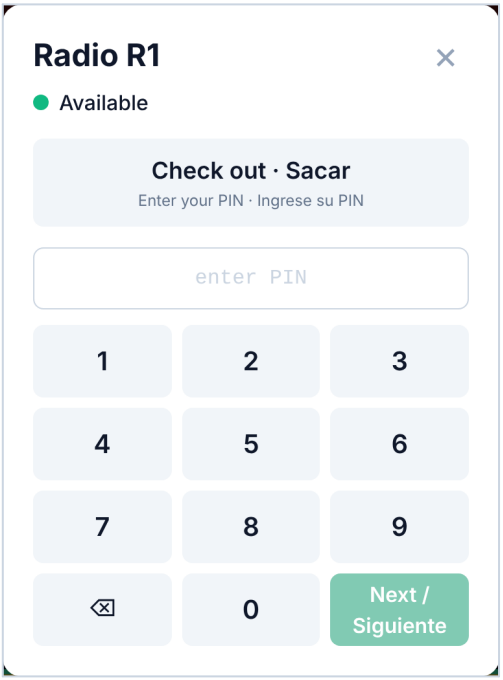

Step 2 — enter your PIN.

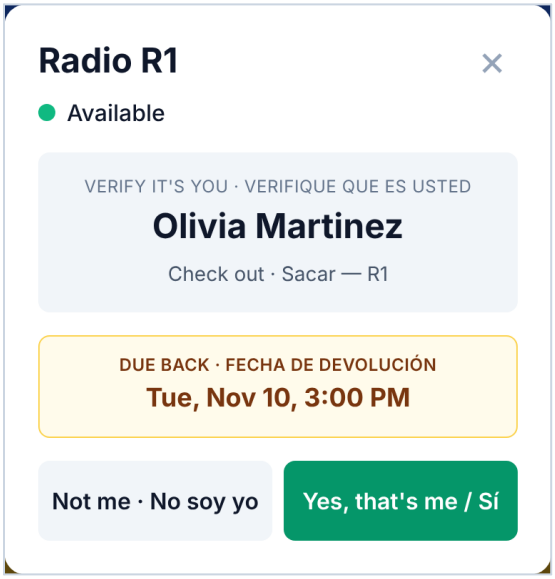

Step 3 — confirm your name, and see the due-back time.

Checking a device in

1. Put the device **on its charger**.
2. Tap its tile (white ring, your name on it).
3. Enter your PIN, tap **Next**, confirm your name, and tap **Yes — continue / Sí**.
4. Answer the return checklist (section 6) and tap **Submit / Enviar**.


Only the person who checked a device out (or a supervisor) can check it back in. If you find a device someone else left behind, put it on the charger and tell a supervisor.

5. Reading the kiosk board

Every device is a tile. The **fill color** tells you the device type (blue radio, amber scanner); the **ring around the tile** tells you its status. Radios fill the top rows and scanners the rows below.

Ring color	Status	What to do
Green	Available	On the charger, ready to check out.
White	Checked out	In use — the holder's name is at the top of the tile, with the due-back time.
Red + “OVERDUE”	Overdue	Past the end of its shift. Track it down and return it now.

Ring color	Status	What to do
Magenta	Damaged — needs supervisor	Out of use until a supervisor reviews it.
Dimmed tile	Out of service	Retired from the fleet.

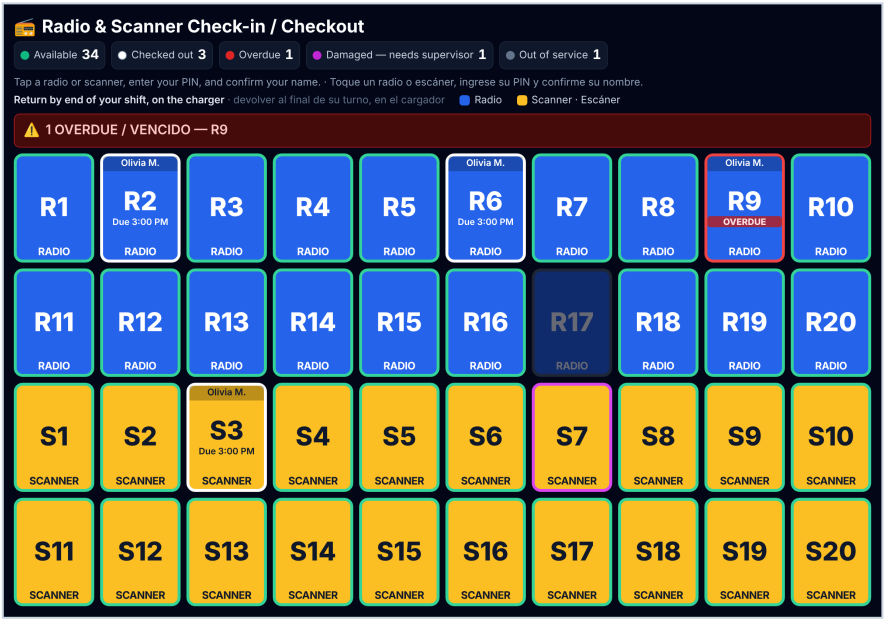


R2, R6, and S3 are checked out (white ring, due at end of shift), R9 is overdue, S7 is damaged, and R17 is out of service.

The counts along the top show how many devices are in each state. If anything is overdue, a red banner lists those labels.


6. The return checklist

Every check-in asks a few quick questions, in English and Spanish.

#	Question	Notes
1	**Placed on the charger?** / ¿Lo puso en el cargador?	Must be **Yes**. If No, put it on the charger first.
2	**Condition** / Condición	Good / Bueno — or — Damaged / Dañado.
3	**If damaged, what's wrong?** / ¿Qué tiene?	Required when Damaged. A **photo** can be attached with the iPad camera (optional but recommended).

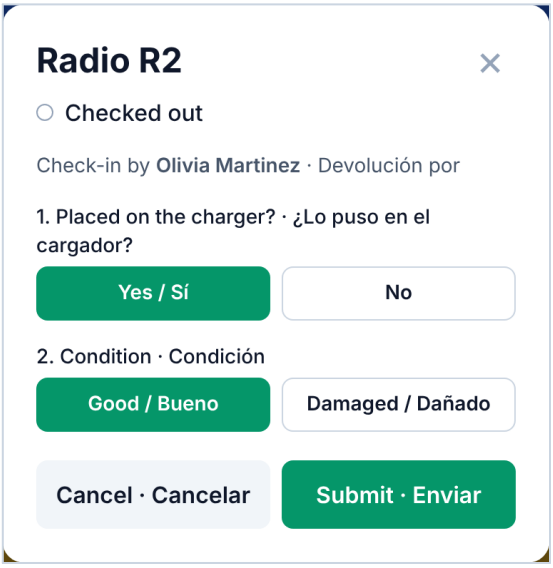

The return checklist.

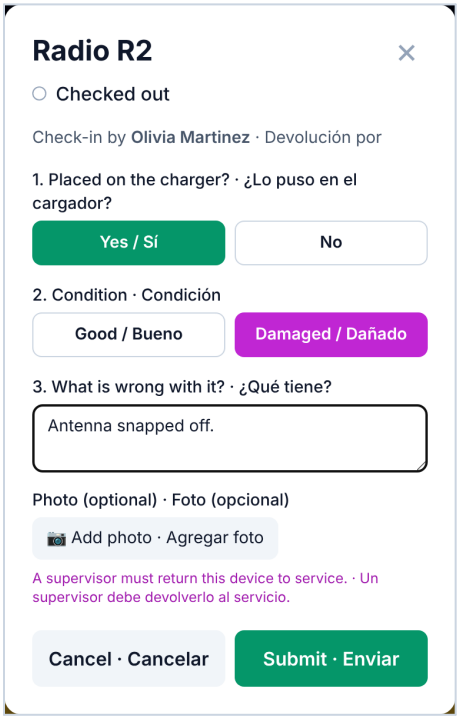


Damaged reveals the reason box and photo button.

> **The rule the system enforces**
>
> A device cannot be checked in until it is on the charger. A Good device goes straight back to Available; a Damaged one is held for a supervisor.

7. Damaged devices — supervisor review

When a device is returned **Damaged**, it is immediately held out of use. It cannot be checked out until a supervisor reviews it.

- The reported reason (and photo, if taken) is saved to the device.
- If Teams alerts are switched on, a message is posted to the channel right away.
- A **supervisor** reviews it on the fleet board: tap the device, read **Reported damage**, view the photo, then either **Return to service (supervisor)** or **Retire (out of service)**.

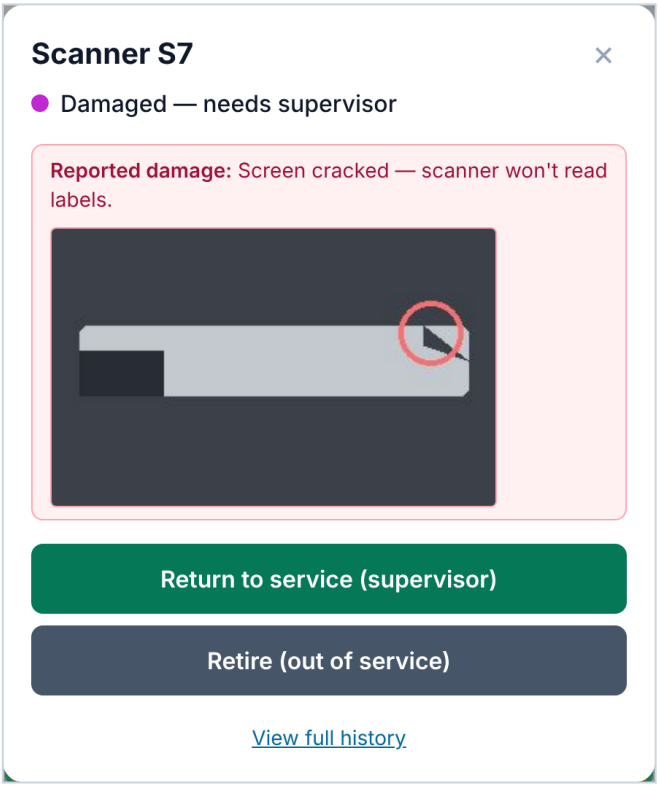


What the supervisor sees: the reported reason, the photo, and the decisions available.

8. Supervisor tasks on the fleet board

The fleet board at **/** is for supervisors and admins. Sign in with your PIN and tap any device to open its action panel.

Action	When it appears
Check out / Check in (return)	Same actions as the kiosk; check-in runs the same checklist. A supervisor can check in a device someone else left out.
Return to service (supervisor)	Device is Damaged — clears the damage note and photo.
Retire (out of service)	Any device not already retired. Use for lost, broken, or out-for-repair devices.
Restore to fleet	Device is out of service.
View full history	Opens that device's complete record.

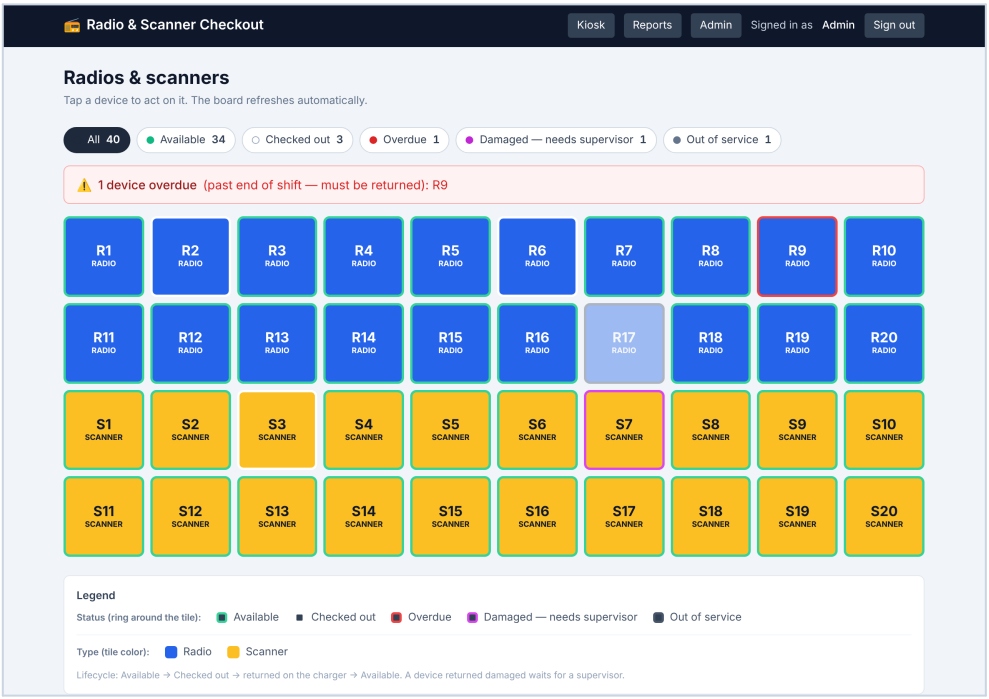


The fleet board. Filter chips across the top; tap any device to act on it.

9. Reports

/reports answers the end-of-shift questions.

Panel	What it tells you
Still checked out	How many devices are out right now, and how many are overdue.
Total checkouts	Lifetime usage count.
Avg time out	Average time from checkout to check-in.
Damage reports	How many returns were marked Damaged.
End-of-shift sweep	Every device still out — who has it, since when, when it is due, and whether it is overdue. **Work this list before shift close.**
Most-used devices	Highest-use units — useful for spotting worn batteries.

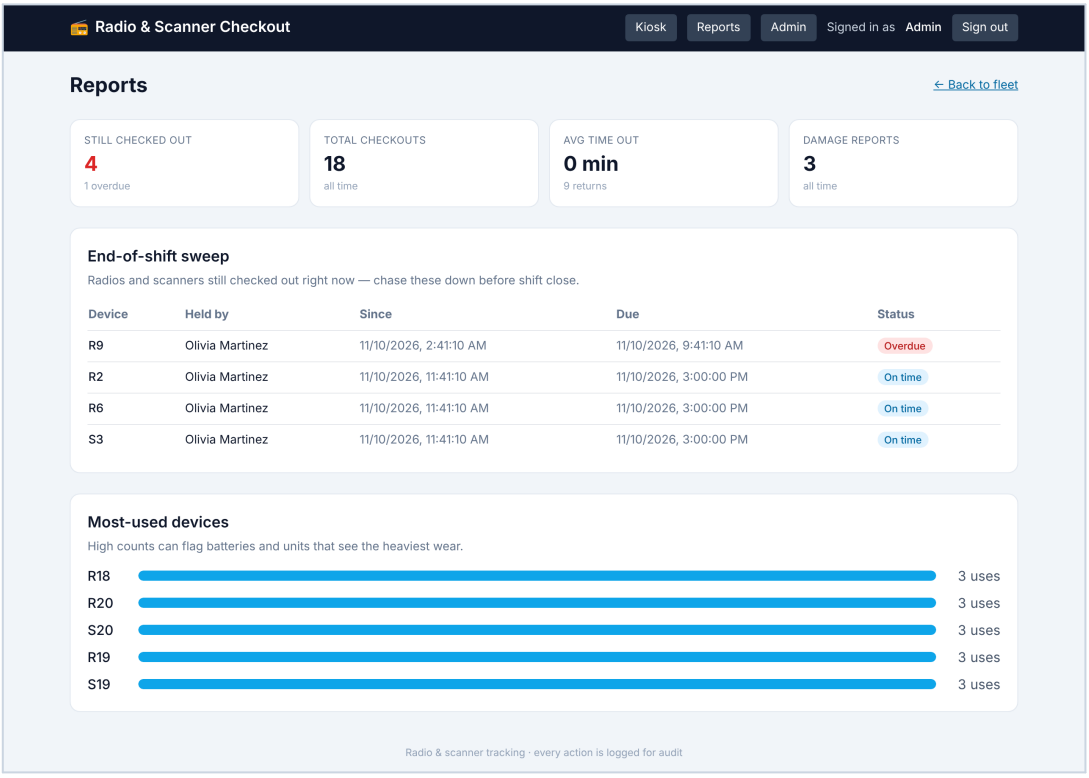

The Reports page, including the end-of-shift sweep.


10. Admin settings and what they do

The Admin panel is at **/admin**, open to supervisors and admins. If you are already signed in on the fleet board, no second PIN is needed.

> **What a supervisor sees here**
>
> Supervisors manage **devices**, **shift end times**, the **kiosk logo**, and see the **audit log**. **Workers** and **Teams notifications** are hidden — those are admin only.

Radios & scanners


Setting	What it does
Add a device	Pick Radio or Scanner and type a label (R21, S21) or just a number — a bare number gets the type's letter. New devices enter as Available. Labels must be unique.
Device list	Every device with its type and current status. Search by label, type, or status.
Edit (per device)	Change a device's label or type. Logged to the audit trail.
Remove (per device)	**Permanently deletes** the device and its history. Intended for one added by mistake. To take a real device out of rotation and **keep** its history, use **Retire** on the board instead.

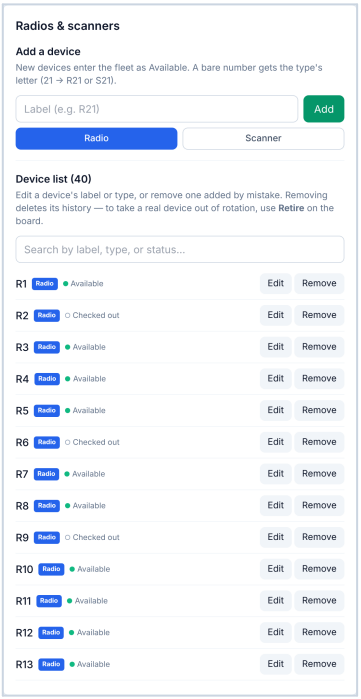

Admin - Radios & scanners.

Workers — admin only


Setting	What it does
Add a worker	Creates an employee: name, PIN (4–8 digits, must be unique), and role (Operator, Supervisor, Admin).
Bulk upload (CSV)	Adds many employees at once from a CSV with columns **name,pin,roles**. Rows with a duplicate or invalid PIN are skipped and reported.
Employees list	All employees, sorted by role. Edit name, roles, or PIN; **Deactivate** to revoke access while keeping history; **Remove** to delete entirely.
Export employees (CSV)	Downloads name, roles, and active status. PINs are encrypted and cannot be exported.

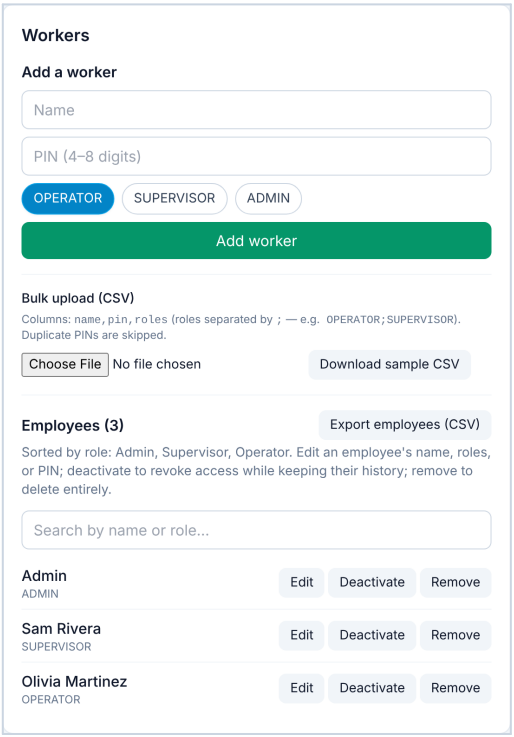

Admin - Workers.

Advanced section (collapsed by default)

Setting	What it does
Microsoft Teams notifications (admin only)	Paste a Teams Workflows webhook URL (channel → "..." → Workflows → "Post to a channel when a webhook request is received") and choose alerts: damaged returns (on by default), overdue sweep (needs a scheduled job), checkouts and check-ins (off by default). **Send test message** confirms the connection.
Shift end times	The times every checkout is due back by (24-hour clock, comma separated). Changing them affects new checkouts only.
Kiosk logo	Upload your company logo for the top-left corner of the kiosk (PNG, JPG, or SVG under 500 KB). **Remove logo** falls back to the radio icon.
System (read-only)	The server timezone and current time. All due times follow this clock — set the **TZ** environment variable if it is wrong.

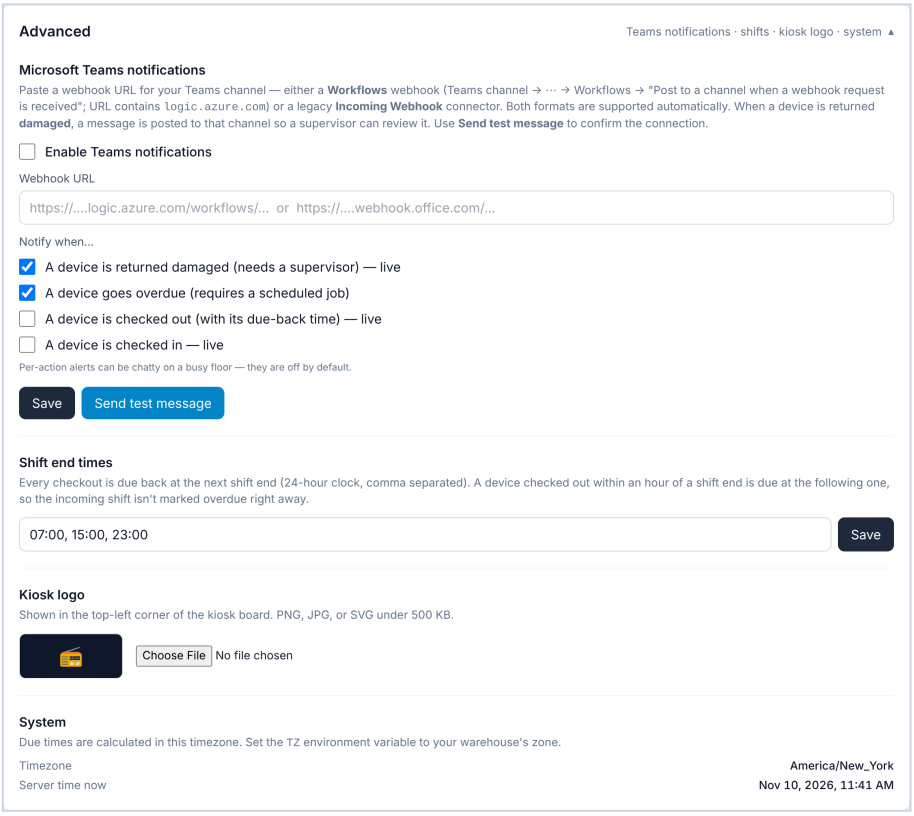

Admin - Advanced, expanded.

Recent activity (audit log)

The most recent actions — when, which device, what happened, who did it, and any note (including the return checklist answers). **Export full log (CSV)** downloads the complete history. Records are never edited or deleted.

11. Troubleshooting

Symptom	Cause and fix
“PIN not recognized.”	Wrong PIN, or the employee is deactivated. An admin can set a new PIN in Admin → Workers.
“…checked out by someone else”	Only the person holding a device (or a supervisor) can check it in. Put it on the charger and have a supervisor check it in.
Submit stays gray on check-in	Answer **Yes** to “Placed on the charger?” and choose a condition. Damaged also needs a reason.
A device cannot be checked out	It is not Available — it is checked out, damaged, or retired. Follow the ring color.

Symptom	Cause and fix
Due times look wrong	Check the shift end times and the timezone in Admin → Advanced, and set the **TZ** environment variable.
Teams test says HTTP 405	The URL pasted is not a webhook (usually a link to the channel). Create a Workflows webhook as described in section 10.
Kiosk shows old information	The board refreshes itself every few seconds; if it looks stuck, reload the page on the iPad.

Daily rhythm — the short version

Operators check radios and scanners out at the start of the shift and back in, on the charger, at the end. Before shift close, a supervisor opens **Reports** → **End-of-shift sweep** and chases down anything still out. Damaged devices wait for a supervisor.