



```
// Master zones
```

```
zone "netlab.eecs.ku.edu" {  
    type master;  
    file "master/netlab";  
};  
  
zone "106.168.192.in-addr.arpa" {  
    type master;  
    file "master/reverse106";  
};  
  
zone "116.168.192.in-addr.arpa" {  
    type master;  
    file "master/reverse116";  
};
```

```
// Slave zones
```

```
//  
//zone "otherzone.net" {  
//    type slave;  
//    file "slave/otherzone.net";
```

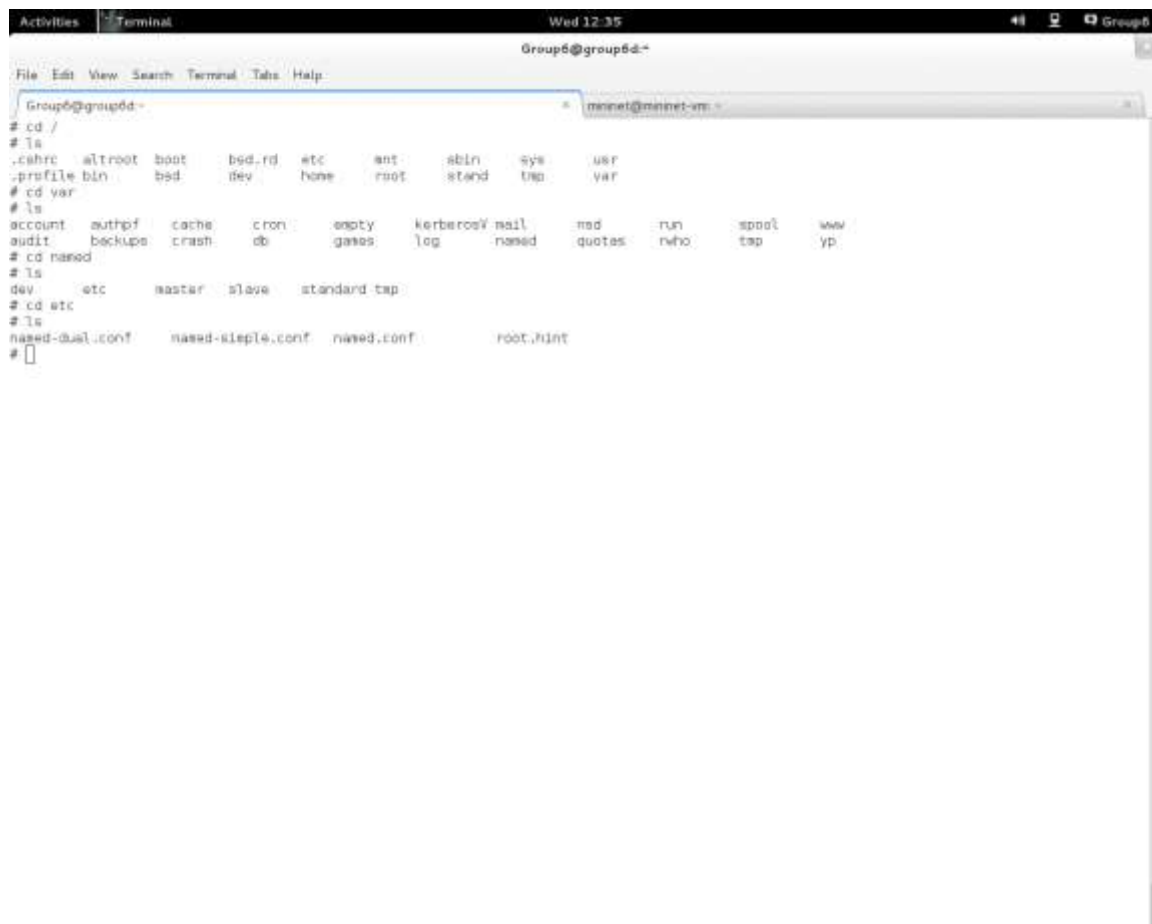

The screenshot shows a terminal window titled "Terminal" with a timestamp of "Wed 12:35". The window contains the following text:

```
Group6@group6d-  
File Edit View Search Terminal Tabs Help  
Group6@group6d- mininet@mininet-vm -  
# cd /  
# ls  
.. .cshrc .altroot boot .bed.rd etc .ant .sbin .sys .usr  
..profile bin .bsd .dev .home .root .stand .tmp .var  
# cd var  
# ls  
account authpf cache cron .empty kerberosV mail .msd .run .spool .www  
audit backups crash db .games log .named quotas .rwho .tap .yp  
# cd named  
# ls  
dev .etc .master .slave .standard .tap  
# cd etc  
# ls  
named-dual.conf named-sisple.conf named.conf .root.hint  
#
```

