

```
In [1]: # import python libraries

import numpy as np
import pandas as pd
import matplotlib.pyplot as plt # visualizing data
%matplotlib inline
import seaborn as sns
```

```
In [2]: # import csv file
df = pd.read_csv('Diwali Sales Data.csv', encoding= 'unicode_escape')
```

```
In [3]: df.shape
```

Out[3]: (11251, 15)

```
In [4]: df.head()
```

Out[4]:

	User_ID	Cust_name	Product_ID	Gender	Age Group	Age	Marital_Status	State	Zone	Occupation	Product_Category	Orders	Amount	Status	unnamed:0
0	1002903	Sanskriti	P00125942	F	26-35	28	0	Maharashtra	Western	Healthcare	Auto	1	23952.0	NaN	
1	1000732	Kartik	P00110942	F	26-35	35	1	Andhra Pradesh	Southern	Govt	Auto	3	23934.0	NaN	
2	1001990	Bindu	P00118542	F	26-35	35	1	Uttar Pradesh	Central	Automobile	Auto	3	23924.0	NaN	
3	1001425	Sudevi	P00237842	M	0-17	16	0	Karnataka	Southern	Construction	Auto	2	23912.0	NaN	
4	1000588	Joni	P00057942	M	26-35	28	1	Gujarat	Western	Food Processing	Auto	2	23877.0	NaN	

```
In [5]: df.info()

<class 'pandas.core.frame.DataFrame'>
RangeIndex: 11251 entries, 0 to 11250
Data columns (total 15 columns):
#   Column                Non-Null Count  Dtype
---  -
0   User_ID               11251 non-null  int64
1   Cust_name             11251 non-null  object
2   Product_ID            11251 non-null  object
3   Gender                11251 non-null  object
4   Age Group             11251 non-null  object
5   Age                   11251 non-null  int64
6   Marital_Status        11251 non-null  int64
7   State                 11251 non-null  object
8   Zone                  11251 non-null  object
```

```
9 Occupation      11251 non-null object
10 Product_Category 11251 non-null object
11 Orders          11251 non-null int64
12 Amount          11239 non-null float64
13 Status          0 non-null      float64
14 unnamed1        0 non-null      float64
dtypes: float64(3), int64(4), object(8)
memory usage: 1.3+ MB
```

```
In [6]: #drop unrelated/blank columns
df.drop(['Status', 'unnamed1'], axis=1, inplace=True)
```

```
In [7]: #check for null values
pd.isnull(df).sum()
```

```
Out[7]: User_ID          0
Cust_name          0
Product_ID         0
Gender             0
Age Group          0
Age               0
Marital_Status     0
State             0
Zone              0
Occupation         0
Product_Category   0
Orders            0
Amount            12
dtype: int64
```

```
In [8]: # drop null values
df.dropna(inplace=True)
```

```
In [9]: # change data type
df['Amount'] = df['Amount'].astype('int')
```

```
In [10]: df['Amount'].dtypes
```

```
Out[10]: dtype('int32')
```

```
In [11]: df.columns
```

```
Out[11]: Index(['User_ID', 'Cust_name', 'Product_ID', 'Gender', 'Age Group', 'Age',
               'Marital_Status', 'State', 'Zone', 'Occupation', 'Product_Category',
               'Orders', 'Amount'],
              dtype='object')
```

```
In [12]: #rename column
df.rename(columns= {'Marital_Status':'Shaadi'})
```

Out[12]:

	User_ID	Cust_name	Product_ID	Gender	Age Group	Age	Shaadi	State	Zone	Occupation	Product_Category	Orders	Amount
0	1002903	Sanskriti	P00125942	F	26-35	28	0	Maharashtra	Western	Healthcare	Auto	1	23952
1	1000732	Kartik	P00110942	F	26-35	35	1	Andhra Pradesh	Southern	Govt	Auto	3	23934
2	1001990	Bindu	P00118542	F	26-35	35	1	Uttar Pradesh	Central	Automobile	Auto	3	23924
3	1001425	Sudevi	P00237842	M	0-17	16	0	Karnataka	Southern	Construction	Auto	2	23912
4	1000588	Joni	P00057942	M	26-35	28	1	Gujarat	Western	Food Processing	Auto	2	23877
...	...	...	...	...	...	...	...	...	...	...	...	...	...
11246	1000695	Manning	P00296942	M	18-25	19	1	Maharashtra	Western	Chemical	Office	4	370
11247	1004089	Reichenbach	P00171342	M	26-35	33	0	Haryana	Northern	Healthcare	Veterinary	3	367
11248	1001209	Oshin	P00201342	F	36-45	40	0	Madhya Pradesh	Central	Textile	Office	4	213
11249	1004023	Noonan	P00059442	M	36-45	37	0	Karnataka	Southern	Agriculture	Office	3	206
11250	1002744	Brumley	P00281742	F	18-25	19	0	Maharashtra	Western	Healthcare	Office	3	188

11239 rows × 13 columns

```
In [13]: # describe() method returns description of the data in the DataFrame (i.e. count, mean, std, etc)
df.describe()
```

Out[13]:

	User_ID	Age	Marital_Status	Orders	Amount
count	1.123900e+04	11239.000000	11239.000000	11239.000000	11239.000000
mean	1.003004e+06	35.410357	0.420055	2.489634	9453.610553
std	1.716039e+03	12.753866	0.493589	1.114967	5222.355168
min	1.000001e+06	12.000000	0.000000	1.000000	188.000000
25%	1.001492e+06	27.000000	0.000000	2.000000	5443.000000
50%	1.003064e+06	33.000000	0.000000	2.000000	8109.000000
75%	1.004426e+06	43.000000	1.000000	3.000000	12675.000000
max	1.006040e+06	92.000000	1.000000	4.000000	23952.000000

```
In [14]: # use describe() for specific columns
df[['Age', 'Orders', 'Amount']].describe()
```

Out[14]:

	Age	Orders	Amount
count	11239.000000	11239.000000	11239.000000
mean	35.410357	2.489634	9453.610553
std	12.753866	1.114967	5222.355168
min	12.000000	1.000000	188.000000
25%	27.000000	2.000000	5443.000000
50%	33.000000	2.000000	8109.000000
75%	43.000000	3.000000	12675.000000
max	92.000000	4.000000	23952.000000


# Exploratory Data Analysis

## Gender

In [15]: *# plotting a bar chart for Gender and it's count*

```
ax = sns.countplot(x = 'Gender', data = df)
```


```
for bars in ax.containers:  
    ax.bar_label(bars)
```

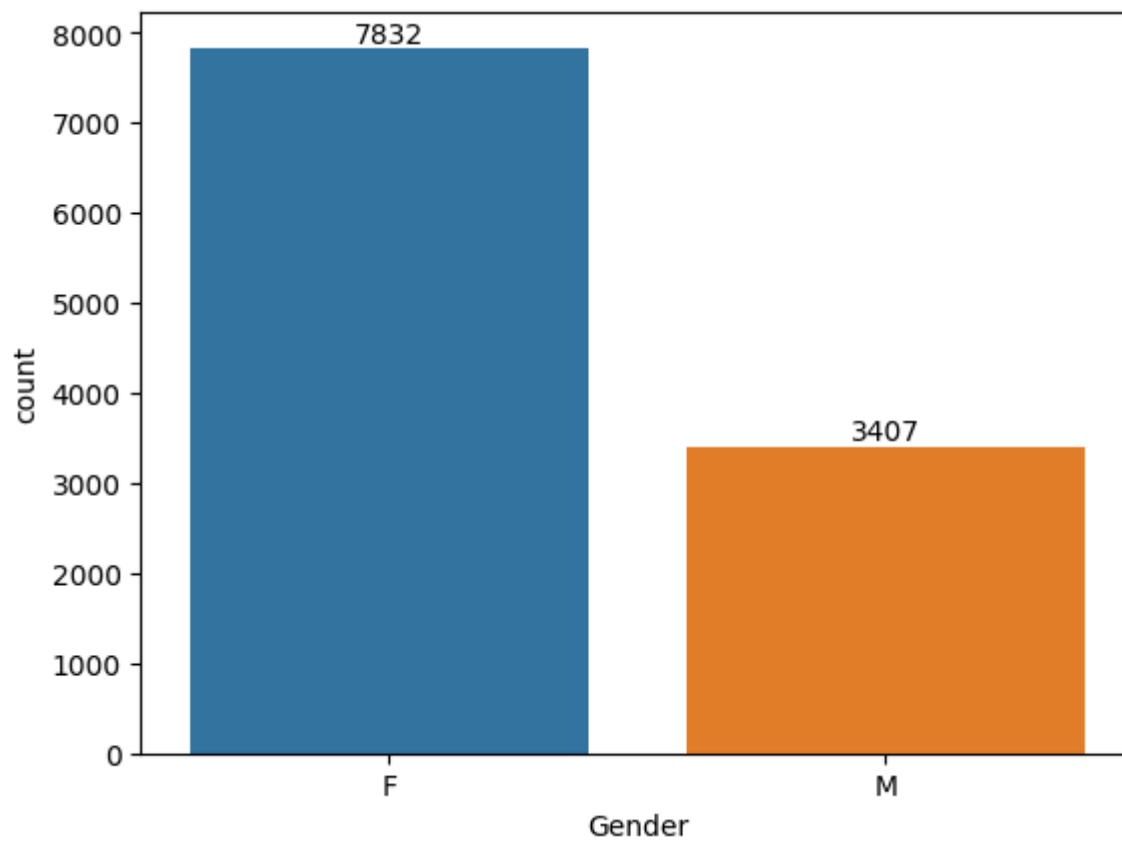

In [16]: *# plotting a bar chart for gender vs total amount*

```
sales_gen = df.groupby(['Gender'], as_index=False)['Amount'].sum().sort_values(by='Amount', ascending=False)
sns.barplot(x = 'Gender', y= 'Amount' ,data = sales_gen)
```


Out[16]: <Axes: xlabel='Gender', ylabel='Amount'>

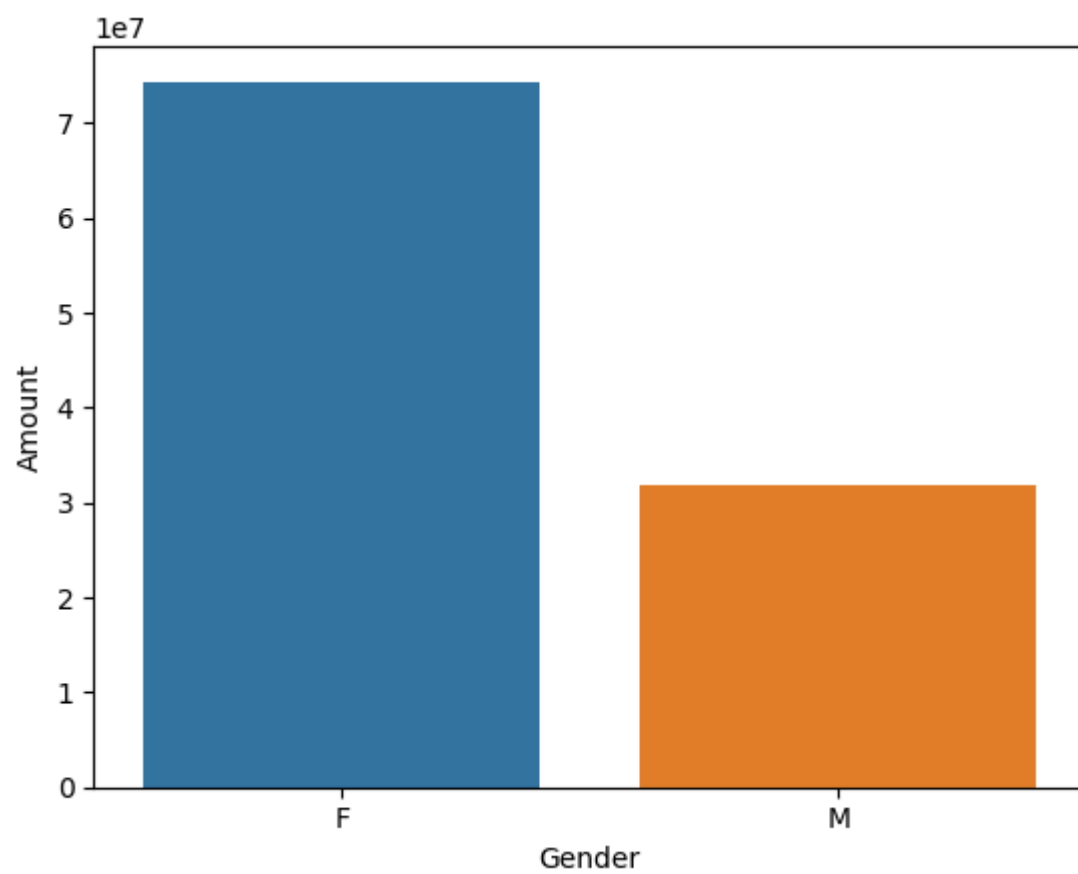

*From above graphs we can see that most of the buyers are females and even the purchasing power of females are greater than men*

## Age


```
In [17]: ax = sns.countplot(data = df, x = 'Age Group', hue = 'Gender')  
  
for bars in ax.containers:  
    ax.bar_label(bars)
```

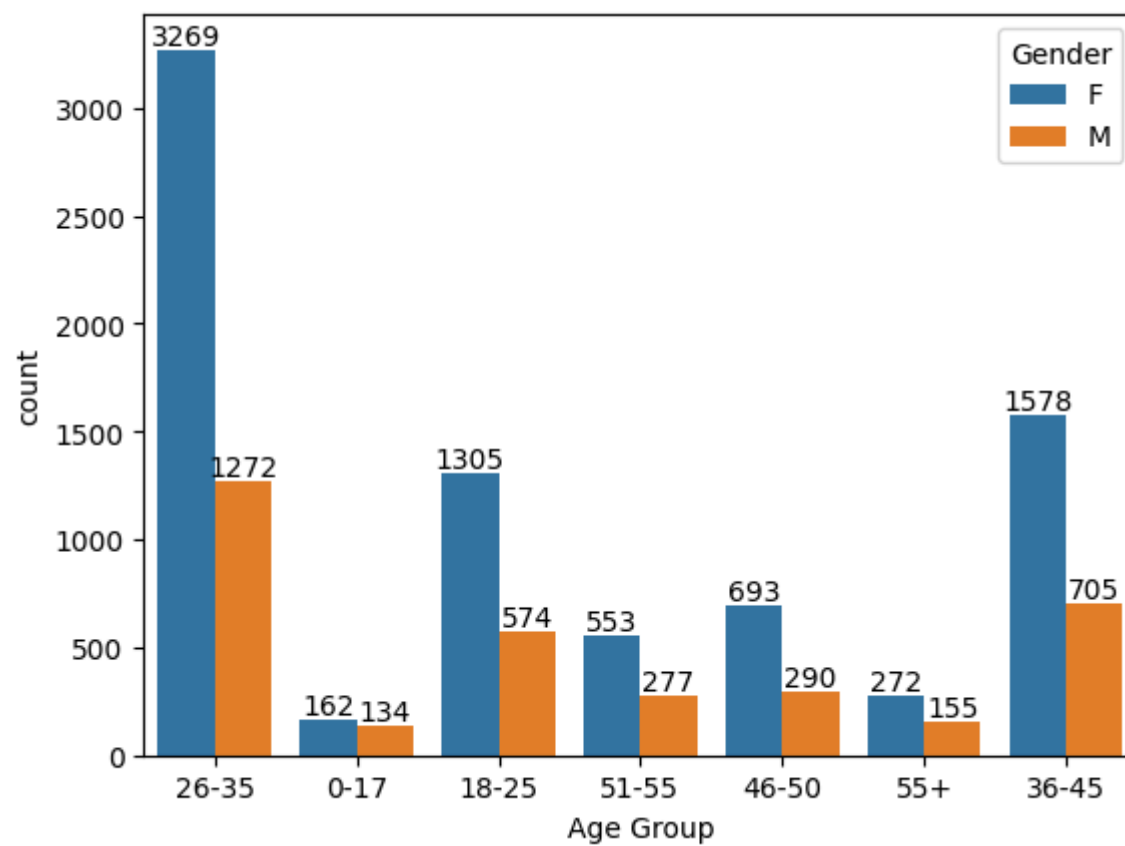

```
In [18]: # Total Amount vs Age Group
sales_age = df.groupby(['Age Group'], as_index=False)['Amount'].sum().sort_values(by='Amount', ascending=False)

sns.barplot(x = 'Age Group',y= 'Amount' ,data = sales_age)

Out[18]: <Axes: xlabel='Age Group', ylabel='Amount'>
```

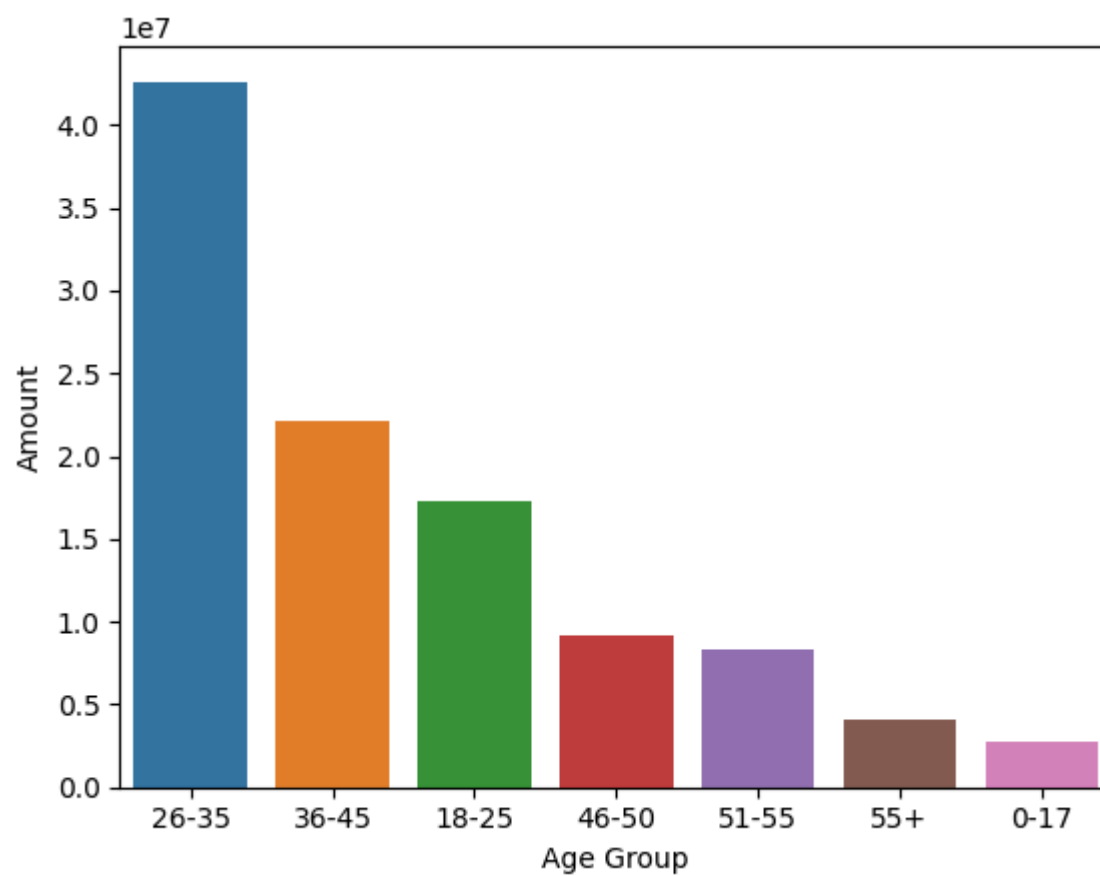

*From above graphs we can see that most of the buyers are of age group between 26-35 yrs female*

## State


```
In [19]: # total number of orders from top 10 states

sales_state = df.groupby(['State'], as_index=False)['Orders'].sum().sort_values(by='Orders', ascending=False).head(10)

sns.set(rc={'figure.figsize':(15,5)})
sns.barplot(data = sales_state, x = 'State', y= 'Orders')

Out[19]: <Axes: xlabel='State', ylabel='Orders'>
```



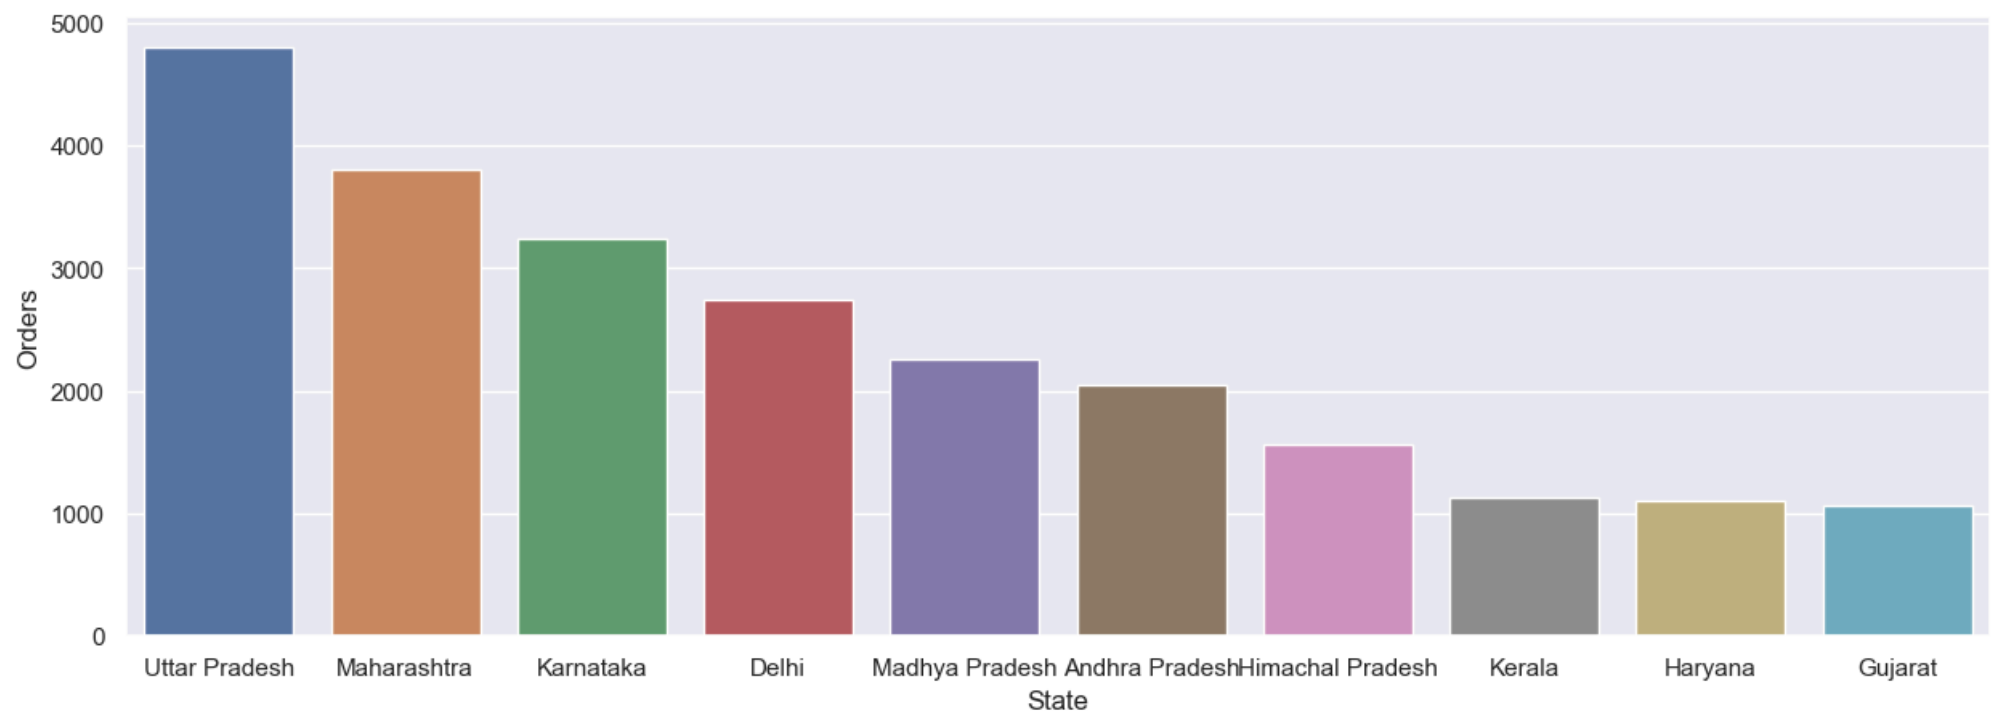


```
In [20]: # total amount/sales from top 10 states

sales_state = df.groupby(['State'], as_index=False)['Amount'].sum().sort_values(by='Amount', ascending=False).head(10)

sns.set(rc={'figure.figsize':(15,5)})
sns.barplot(data = sales_state, x = 'State',y= 'Amount')

Out[20]: <Axes: xlabel='State', ylabel='Amount'>
```

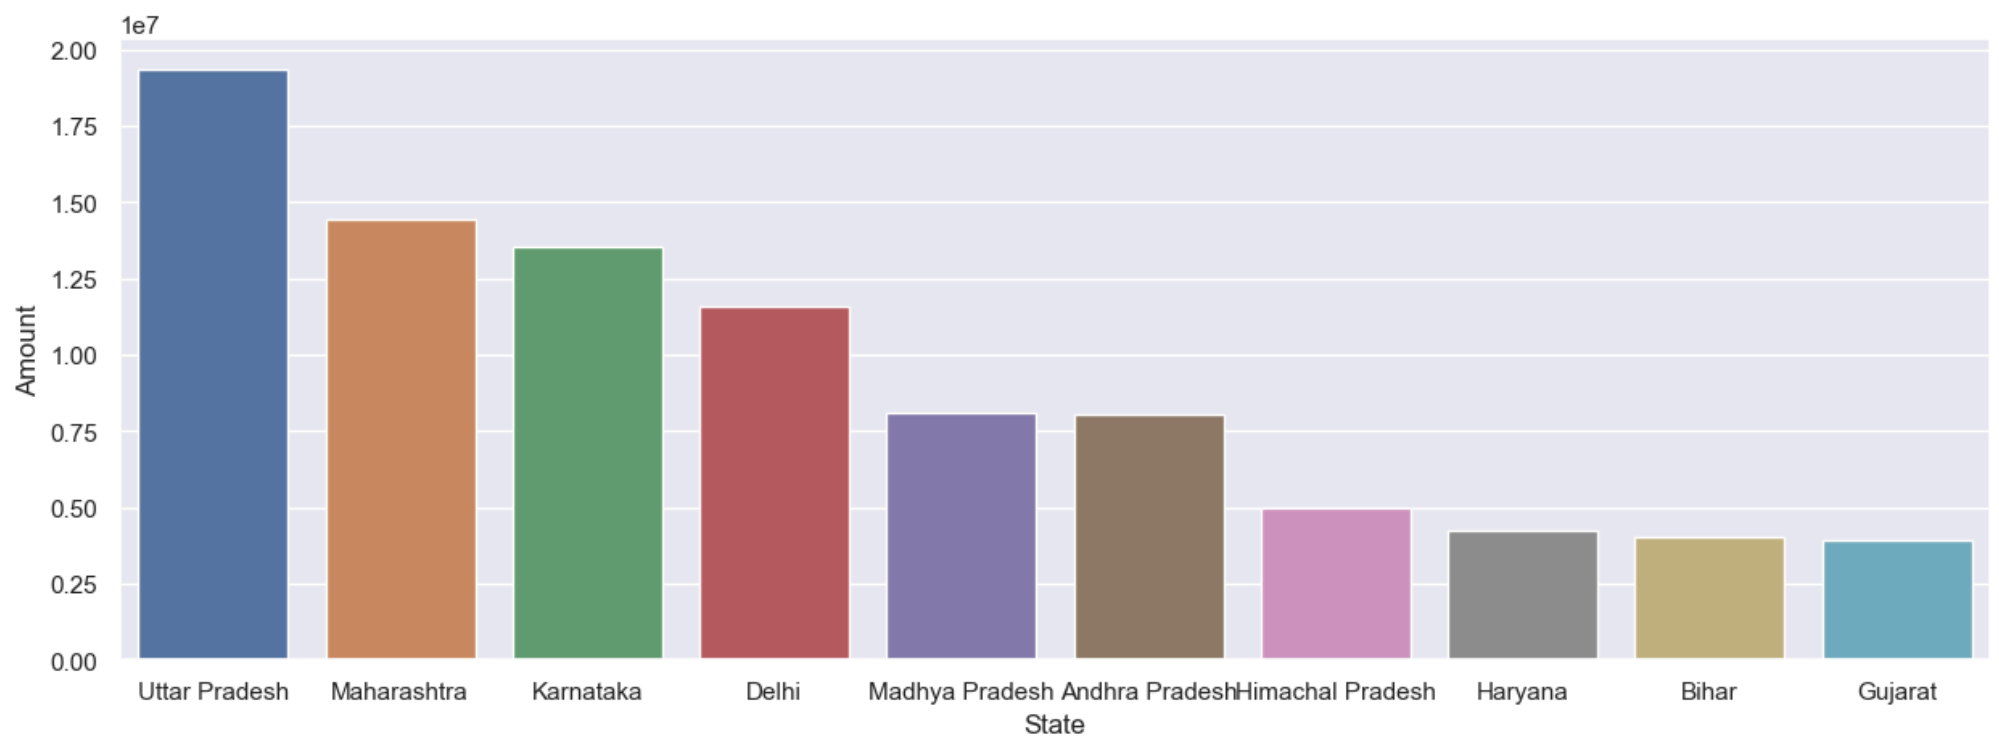


*From above graphs we can see that most of the orders & total sales/amount are from Uttar Pradesh, Maharashtra and Karnataka respectively*

## Marital Status

```
In [21]: ax = sns.countplot(data = df, x = 'Marital_Status')


sns.set(rc={'figure.figsize':(7,5)})
for bars in ax.containers:
    ax.bar_label(bars)
```

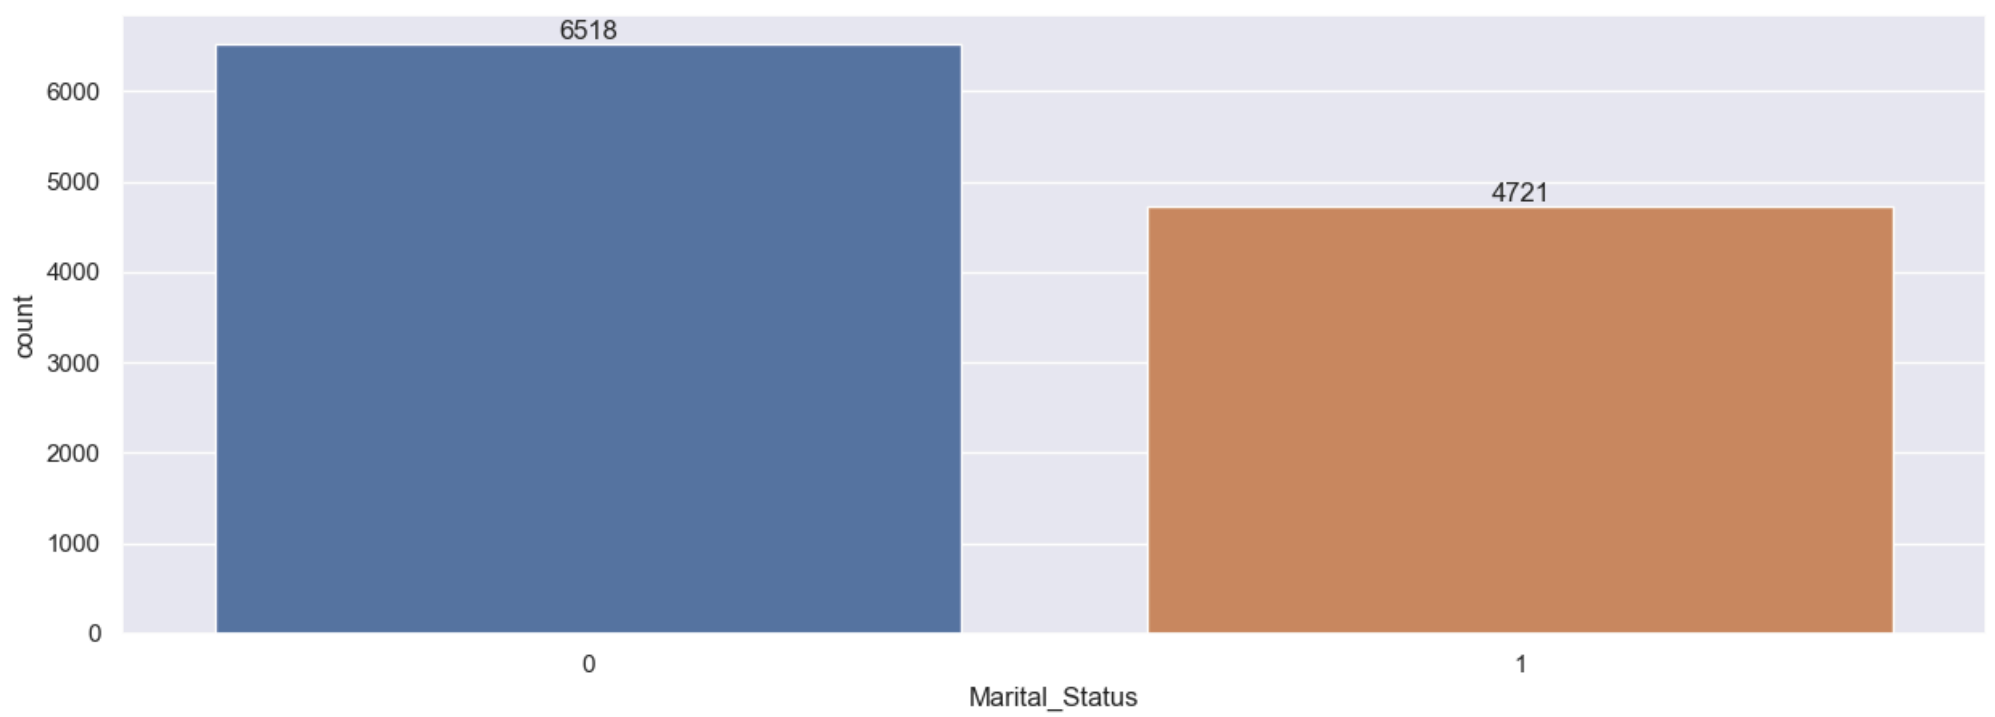

```
In [22]: sales_state = df.groupby(['Marital_Status', 'Gender'], as_index=False)['Amount'].sum().sort_values(by='Amount', ascending=False)

sns.set(rc={'figure.figsize':(6,5)})
sns.barplot(data = sales_state, x = 'Marital_Status', y= 'Amount', hue='Gender')
```

```
Out[22]: <Axes: xlabel='Marital_Status', ylabel='Amount'>
```

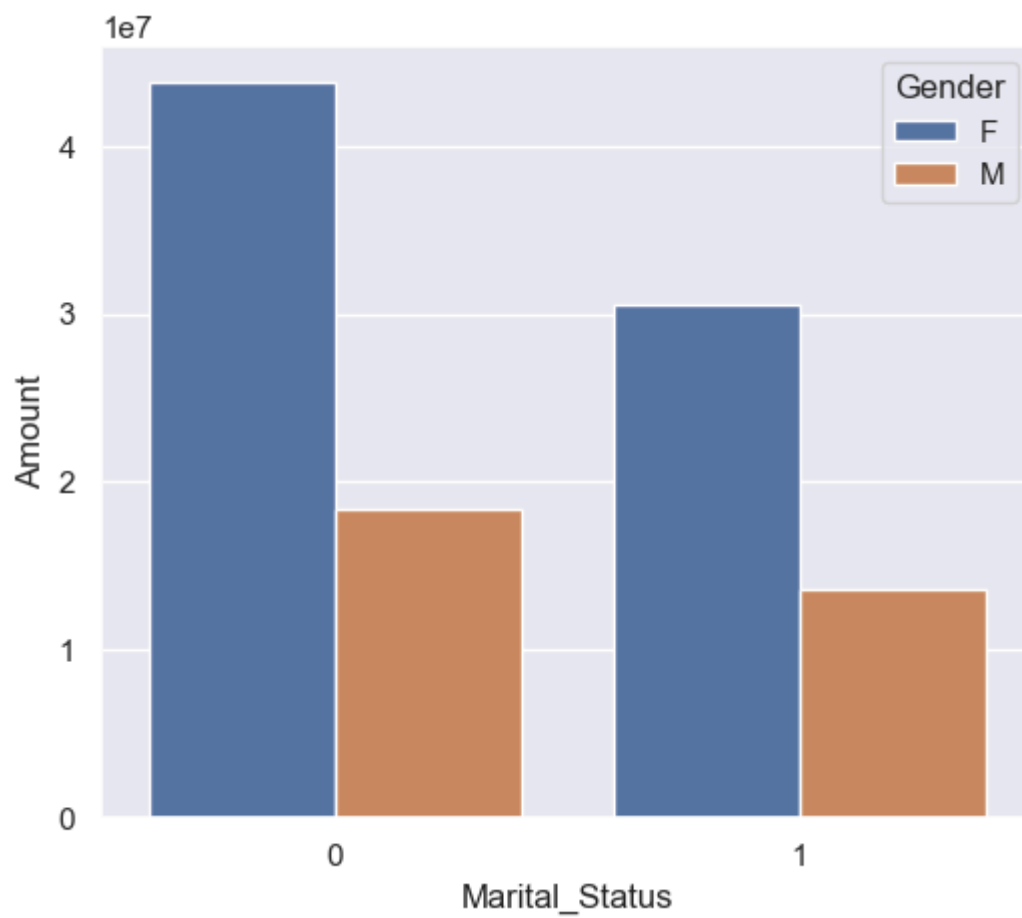


*From above graphs we can see that most of the buyers are married (women) and they have high purchasing power*

## Occupation

```
In [23]: sns.set(rc={'figure.figsize':(20,5)})
ax = sns.countplot(data = df, x = 'Occupation')


for bars in ax.containers:
    ax.bar_label(bars)
```

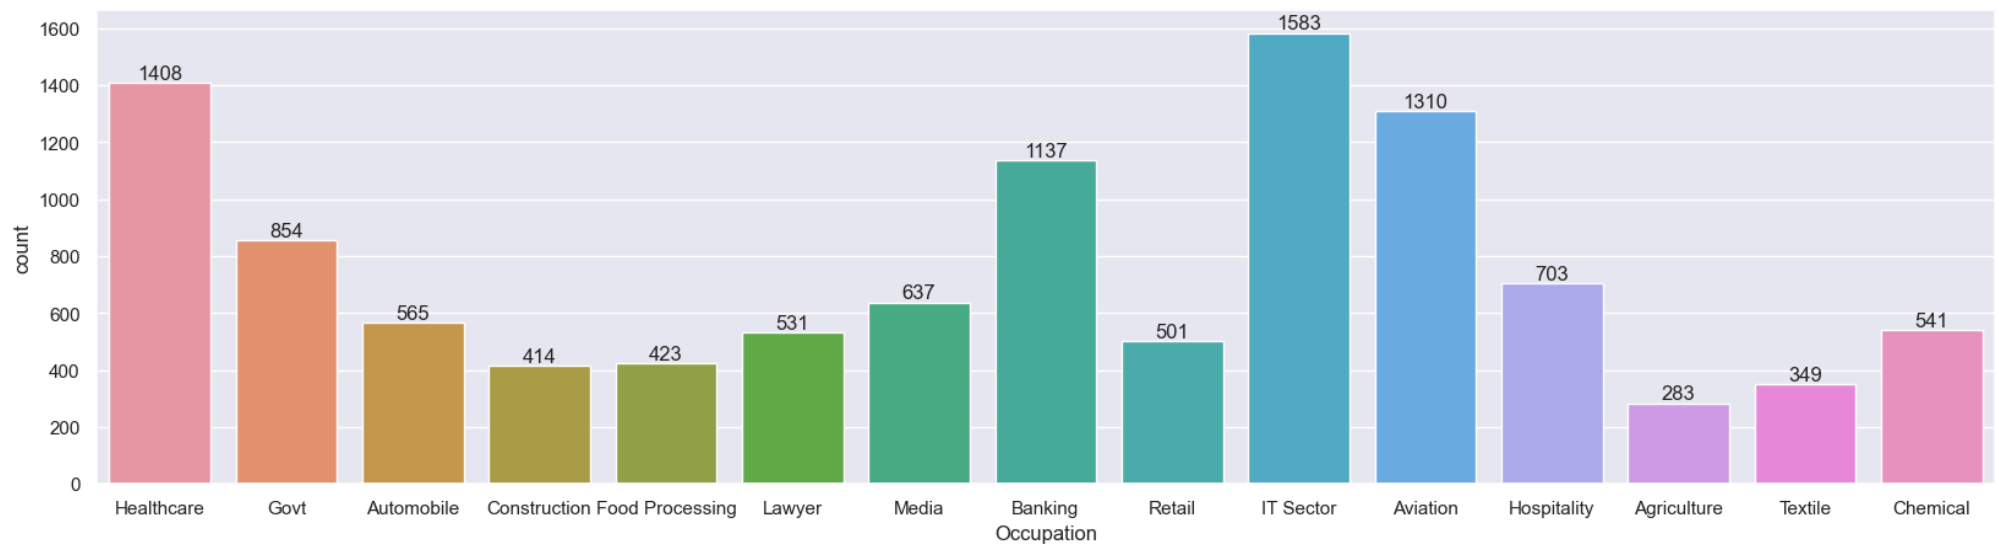

```
In [24]: sales_state = df.groupby(['Occupation'], as_index=False)['Amount'].sum().sort_values(by='Amount', ascending=False)

sns.set(rc={'figure.figsize':(20,5)})
sns.barplot(data = sales_state, x = 'Occupation',y= 'Amount')
```

Out[24]: <Axes: xlabel='Occupation', ylabel='Amount'>

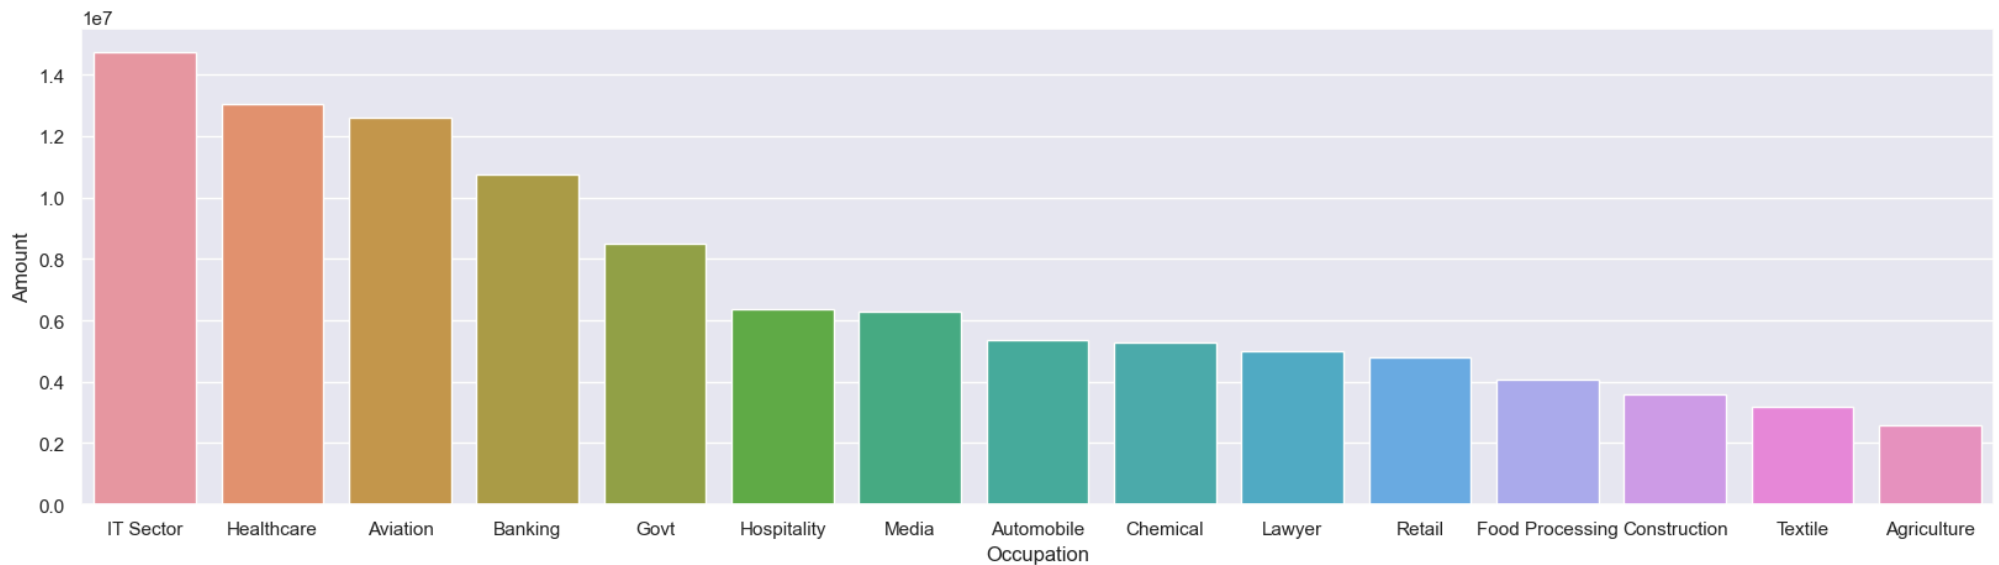


From above graphs we can see that most of the buyers are working in IT, Healthcare and Aviation sector

Product Category

```
In [25]: sns.set(rc={'figure.figsize':(20,5)})
ax = sns.countplot(data = df, x = 'Product_Category')


for bars in ax.containers:
    ax.bar_label(bars)
```

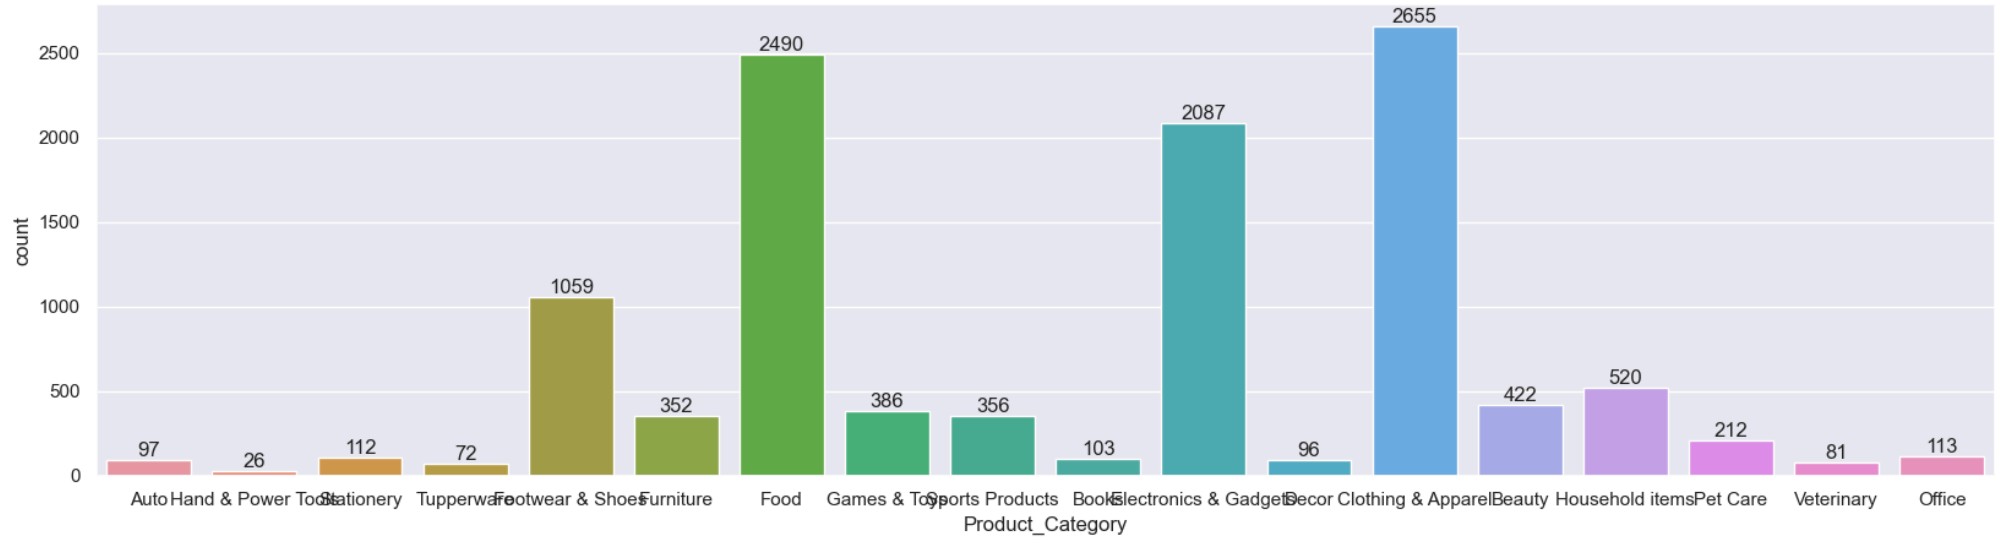

```
In [26]: sales_state = df.groupby(['Product_Category'], as_index=False)['Amount'].sum().sort_values(by='Amount', ascending=False).head(10)

sns.set(rc={'figure.figsize':(20,5)})
sns.barplot(data = sales_state, x = 'Product_Category',y= 'Amount')
```

```
Out[26]: <Axes: xlabel='Product_Category', ylabel='Amount'>
```

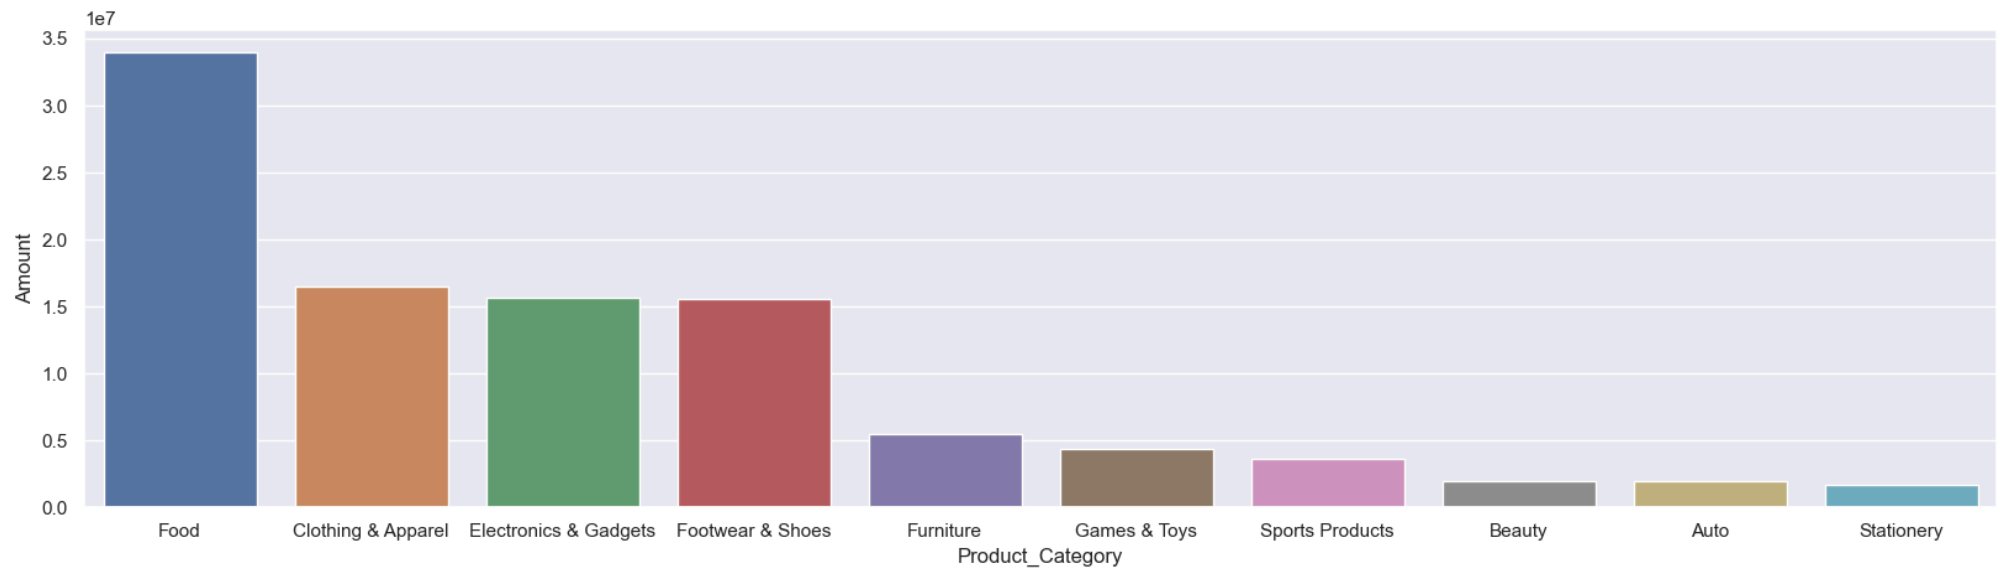


From above graphs we can see that most of the sold products are from Food, Clothing and Electronics category

```
In [27]: sales_state = df.groupby(['Product_ID'], as_index=False)['Orders'].sum().sort_values(by='Orders', ascending=False).head(10)

sns.set(rc={'figure.figsize':(20,5)})
sns.barplot(data = sales_state, x = 'Product_ID',y= 'Orders')
```


Out[27]: <Axes: xlabel='Product\_ID', ylabel='Orders'>

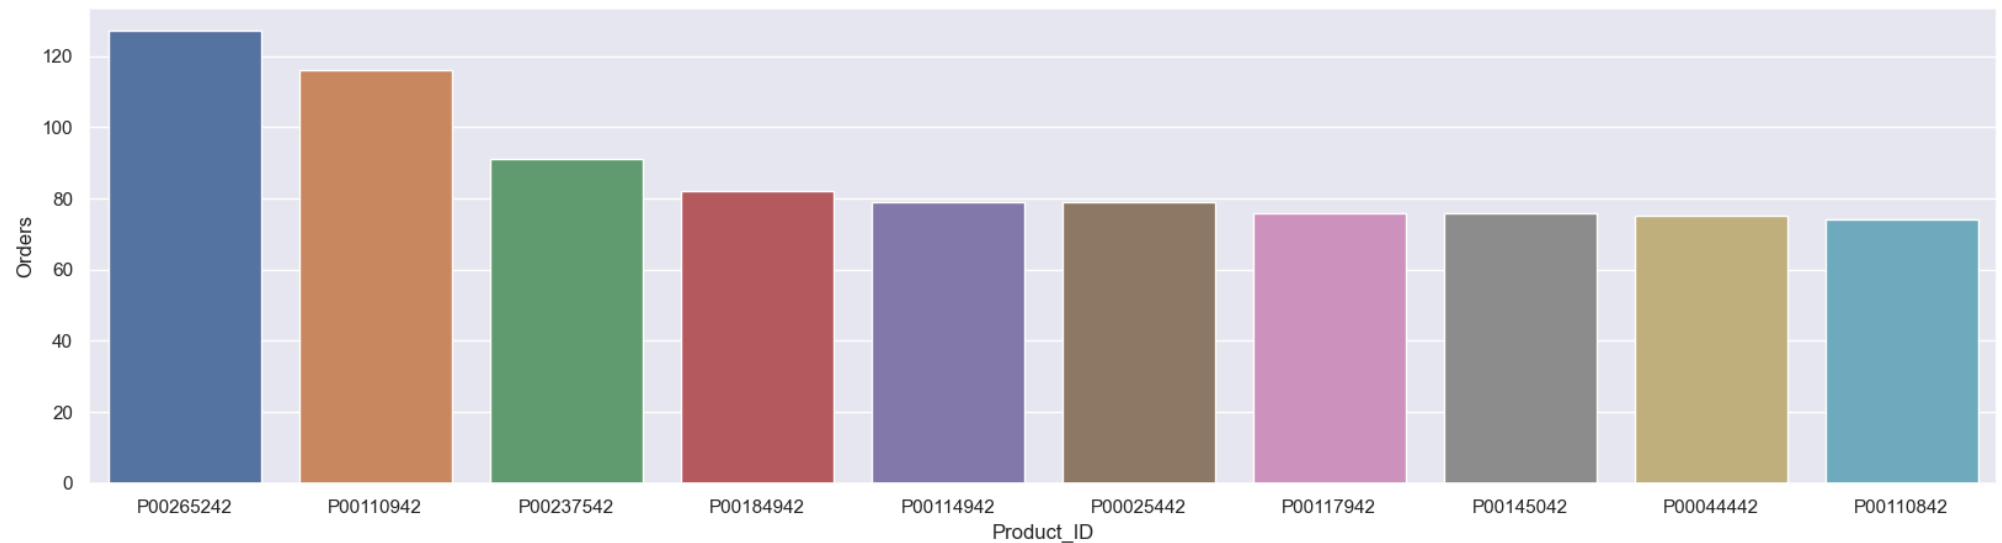

```
In [28]: # top 10 most sold products (same thing as above)
```

```
fig1, ax1 = plt.subplots(figsize=(12,7))  
df.groupby('Product_ID')['Orders'].sum().nlargest(10).sort_values(ascending=False).plot(kind='bar')
```

Out[28]: <Axes: xlabel='Product\_ID'>

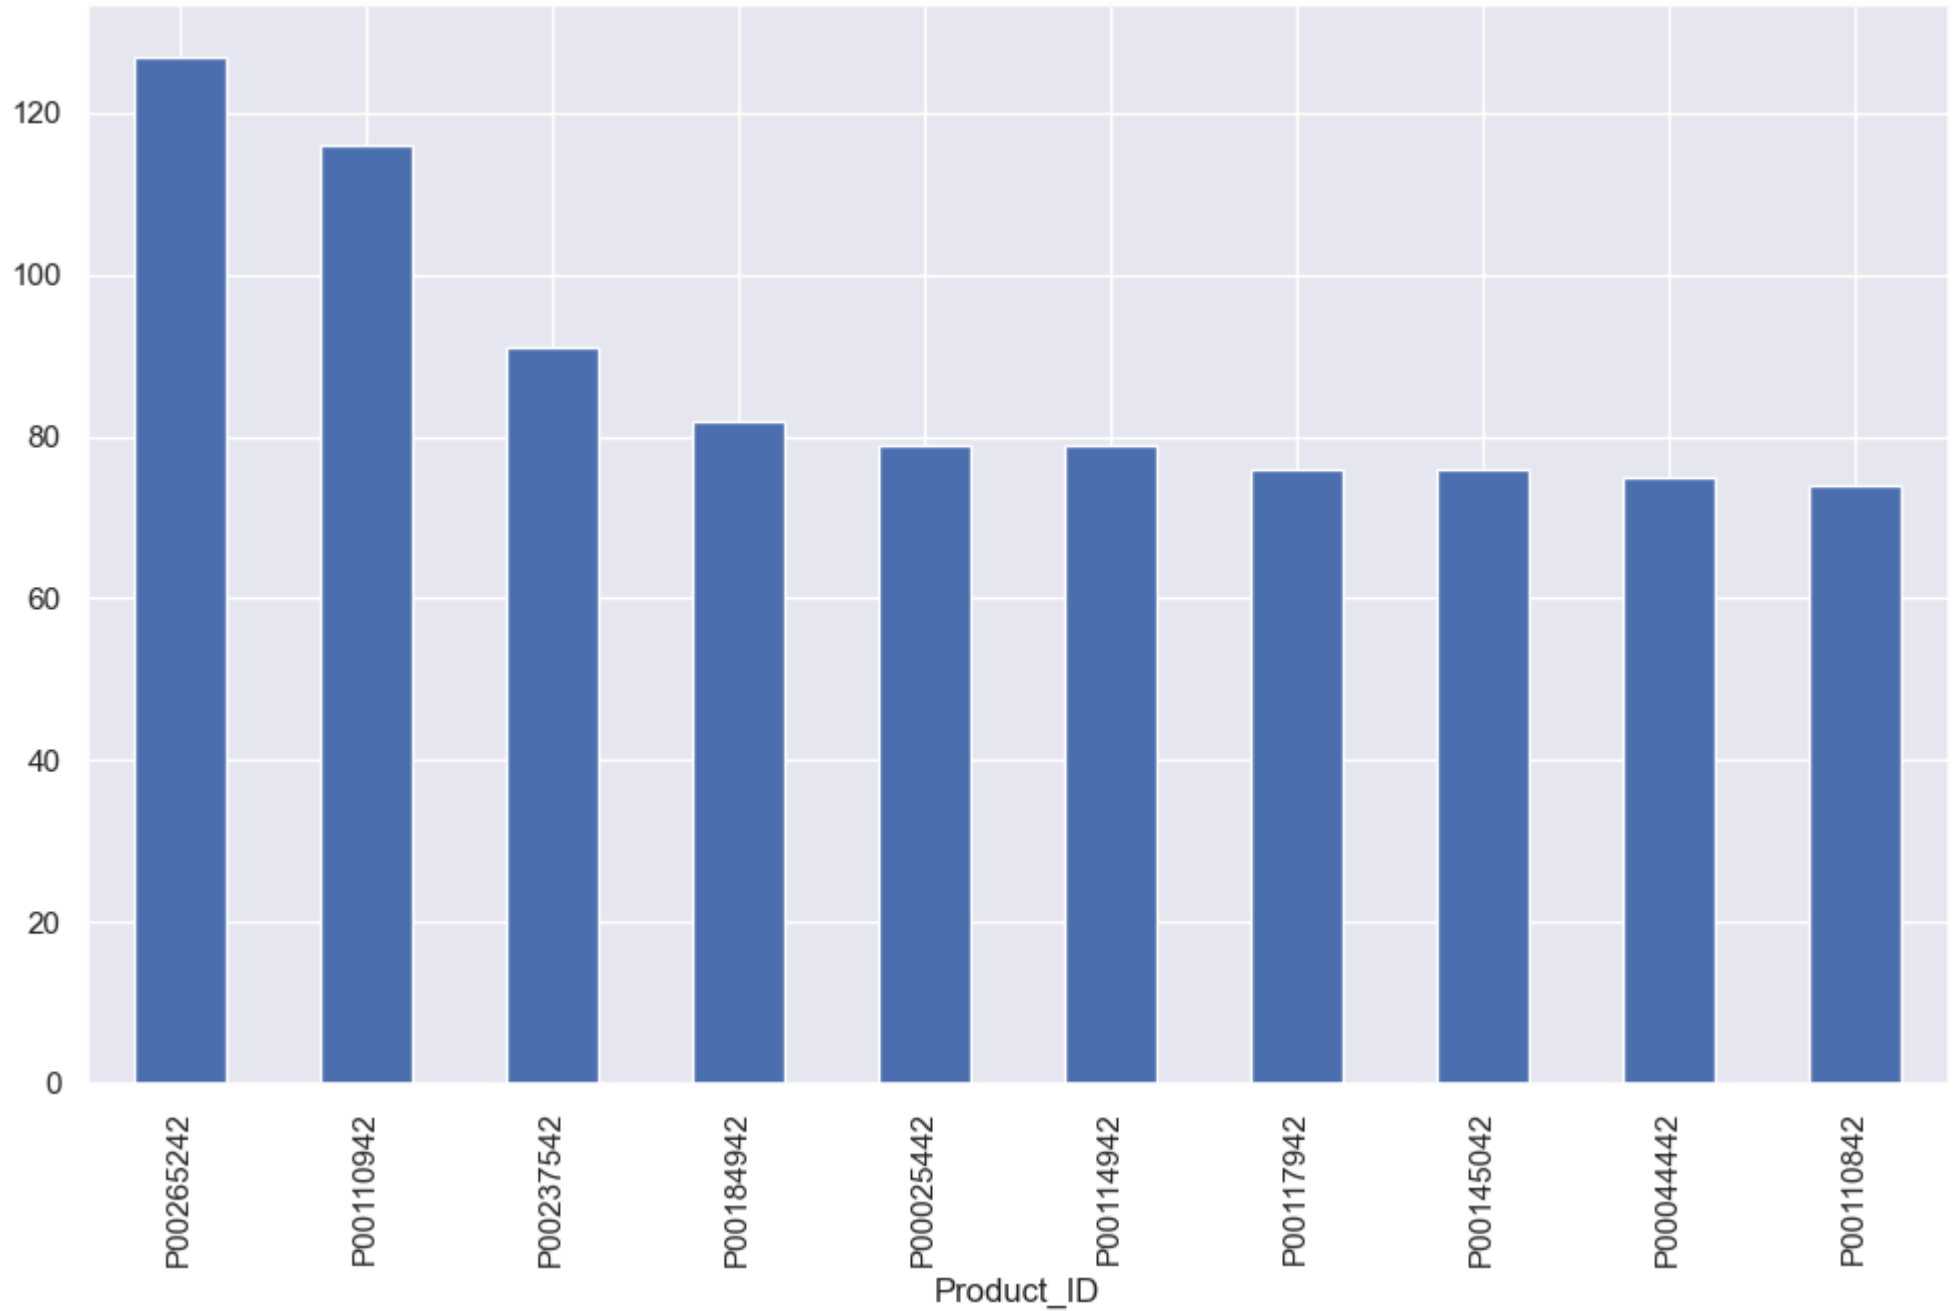



## Conclusion:

*Married women age group 26-35 yrs from UP, Maharastra and Karnataka working in IT, Healthcare and Aviation are more likely to buy products from Food, Clothing and Electronics category*

Thank you!