


Finding array size:


In C & C++ 16 bit compilers:

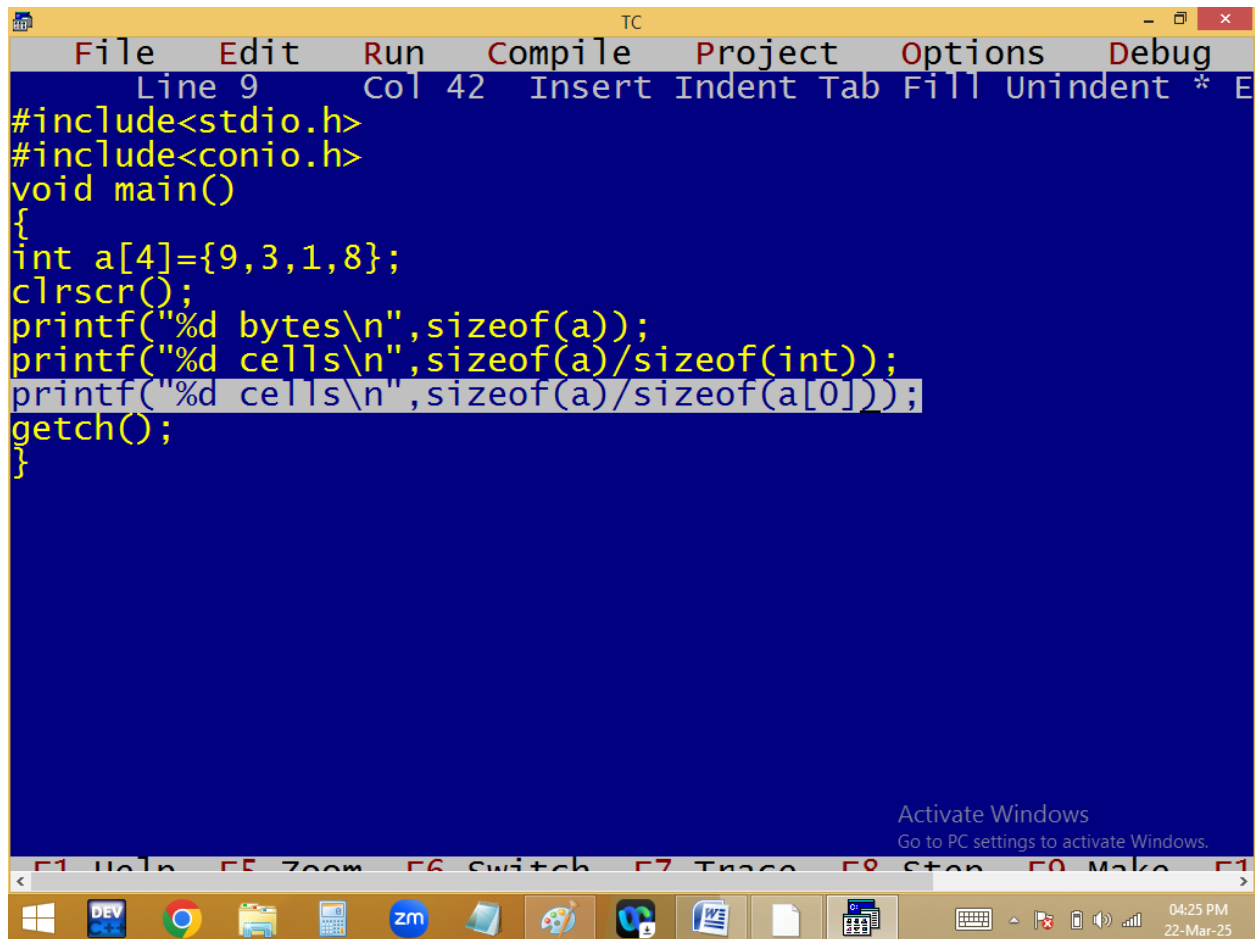


The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates "Line 9 Col 42". The code editor contains the following C program:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[4]={9,3,1,8};
clrscr();
printf("%d bytes\n",sizeof(a));
printf("%d cells\n",sizeof(a)/sizeof(int));
printf("%d cells\n",sizeof(a)/sizeof(a[0]));
getch();
}
```

The third line of the printf statement is highlighted. At the bottom of the window, there is an "Activate Windows" watermark with the text "Go to PC settings to activate Windows." The taskbar at the bottom shows various application icons including Windows, DEV, Chrome, File Explorer, Calculator, Zoom, and others. The system clock in the bottom right corner displays "04:25 PM 22-Mar-25".

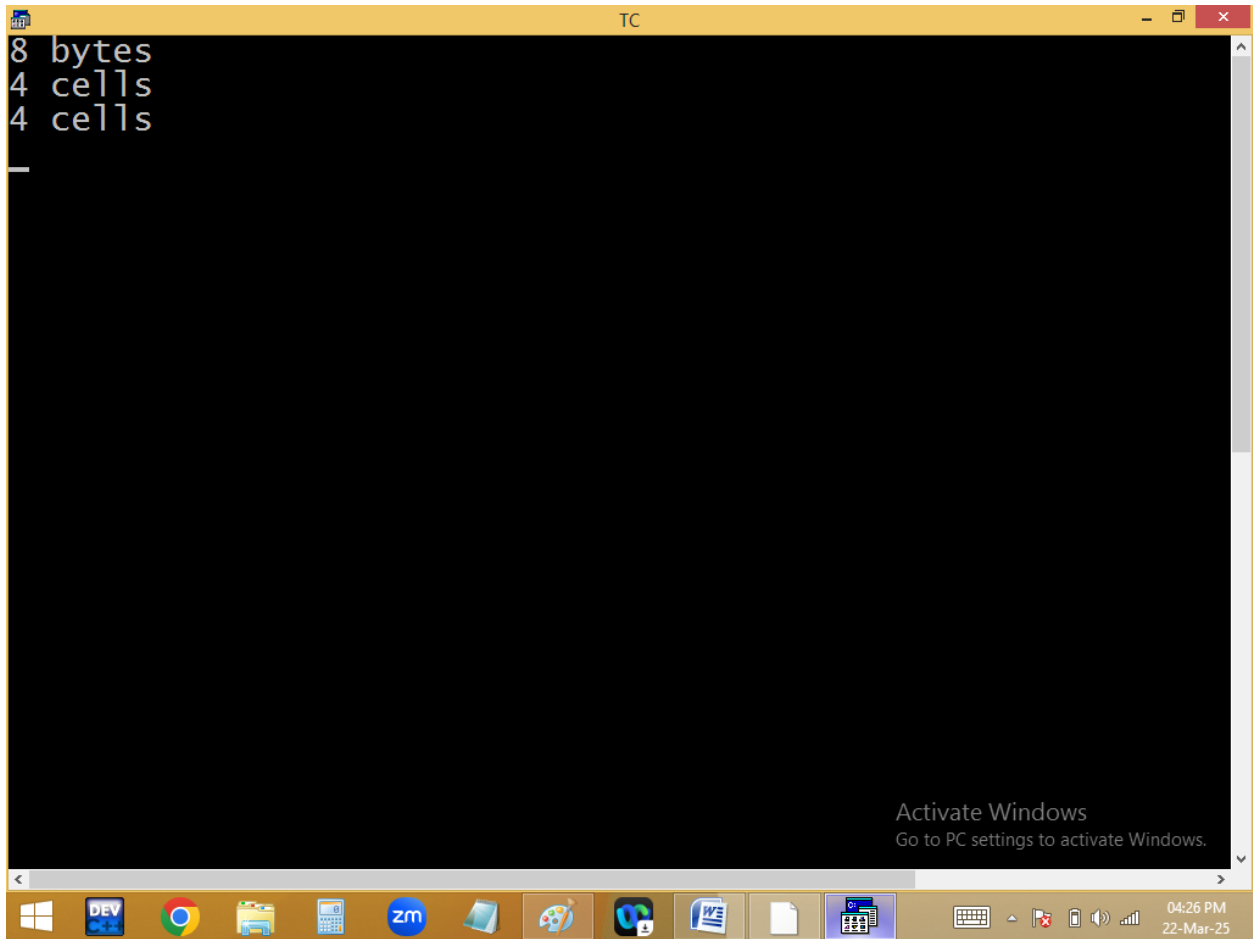


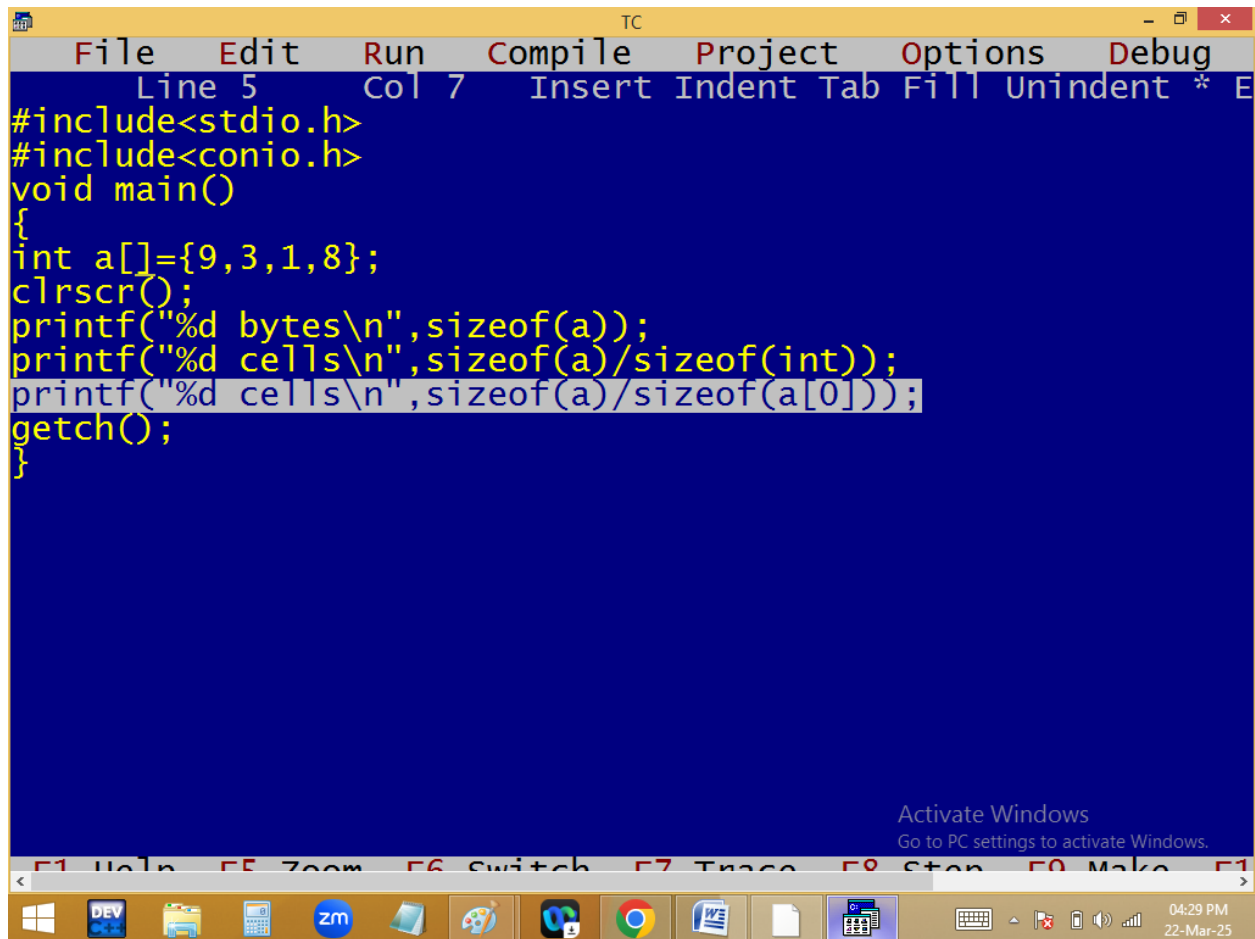

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 5", "Col 7", and "Insert Indent Tab Fill Unindent * E". The code editor contains the following C program:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[]={9,3,1,8};
clrscr();
printf("%d bytes\n",sizeof(a));
printf("%d cells\n",sizeof(a)/sizeof(int));
printf("%d cells\n",sizeof(a)/sizeof(a[0]));
getch();
}
```

The third line of the `printf` statement is highlighted. At the bottom of the window, there is an "Activate Windows" watermark with the text "Go to PC settings to activate Windows." The taskbar at the bottom shows various application icons including Windows, DEV, File Explorer, Calculator, Zoom, Paint, VS Code, Chrome, Word, and a folder icon. The system clock in the bottom right corner shows "04:29 PM" and "22-Mar-25".

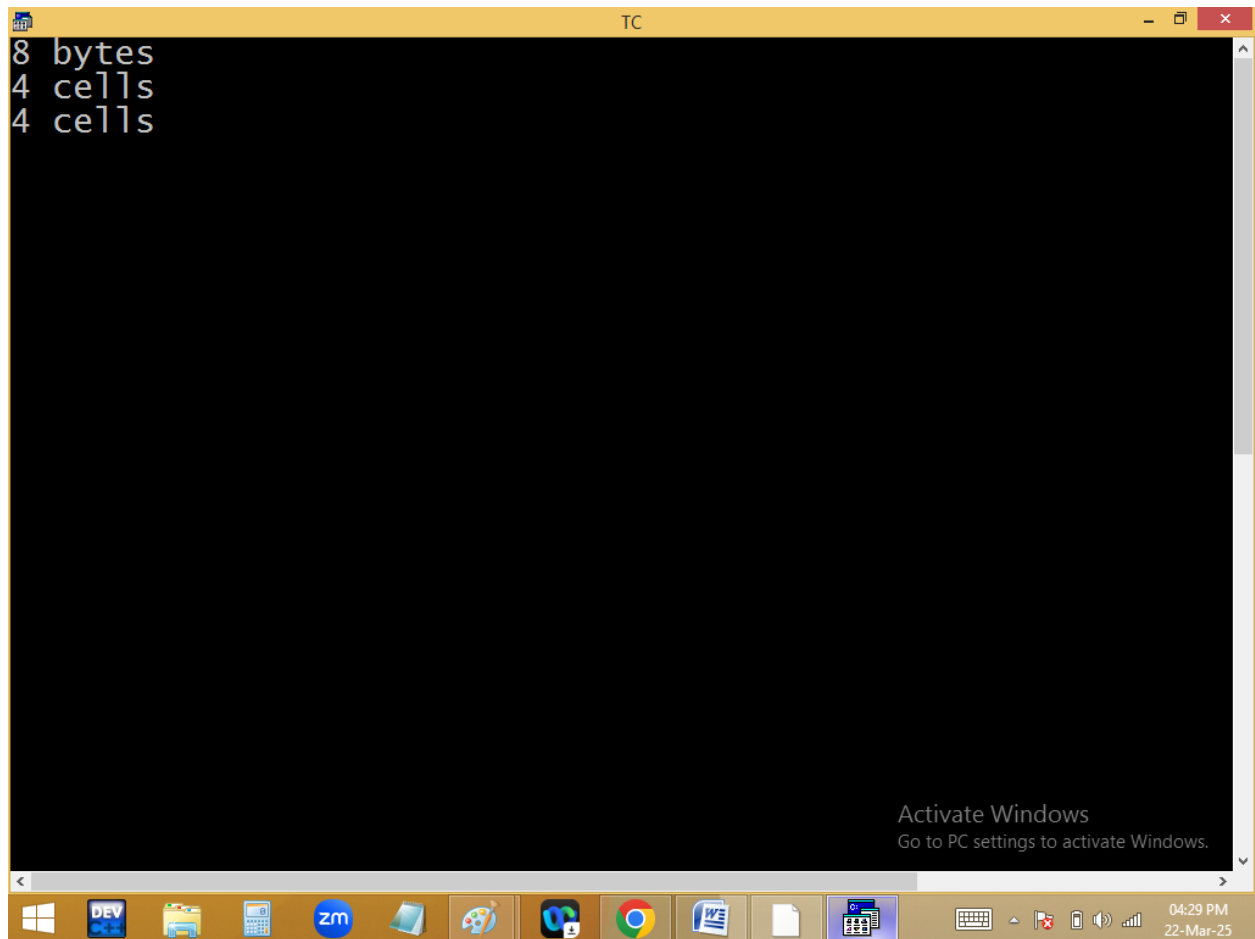

A screenshot of a Windows desktop environment. A terminal window titled "TC" is open, displaying the following text:


```
8 bytes
4 cells
4 cells
```

The terminal window has a yellow title bar and a black background. The Windows taskbar is visible at the bottom, showing various application icons including DEV, File Explorer, Calculator, Zoom, and several others. The system tray on the right shows the time as 04:29 PM on 22-Mar-25. An "Activate Windows" watermark is visible in the bottom right corner of the terminal window.

In online / vscode / dev c++ or 32 bit compilers:

1 // Online C compiler to run C program online	16 bytes
2 #include <stdio.h>	4 cells
3	4 cells
4 int main() {	
5 int a[4]={9,3,1,8};	
6	=== Code Execution Successful ===
7 printf("%d bytes\n",sizeof(a));	
8 printf("%d cells\n",sizeof(a)/sizeof(a[0]));	
9 printf("%d cells\n",sizeof(a)/sizeof(int));	
10	
11 return 0;	
12 }	

Finding base address of array:

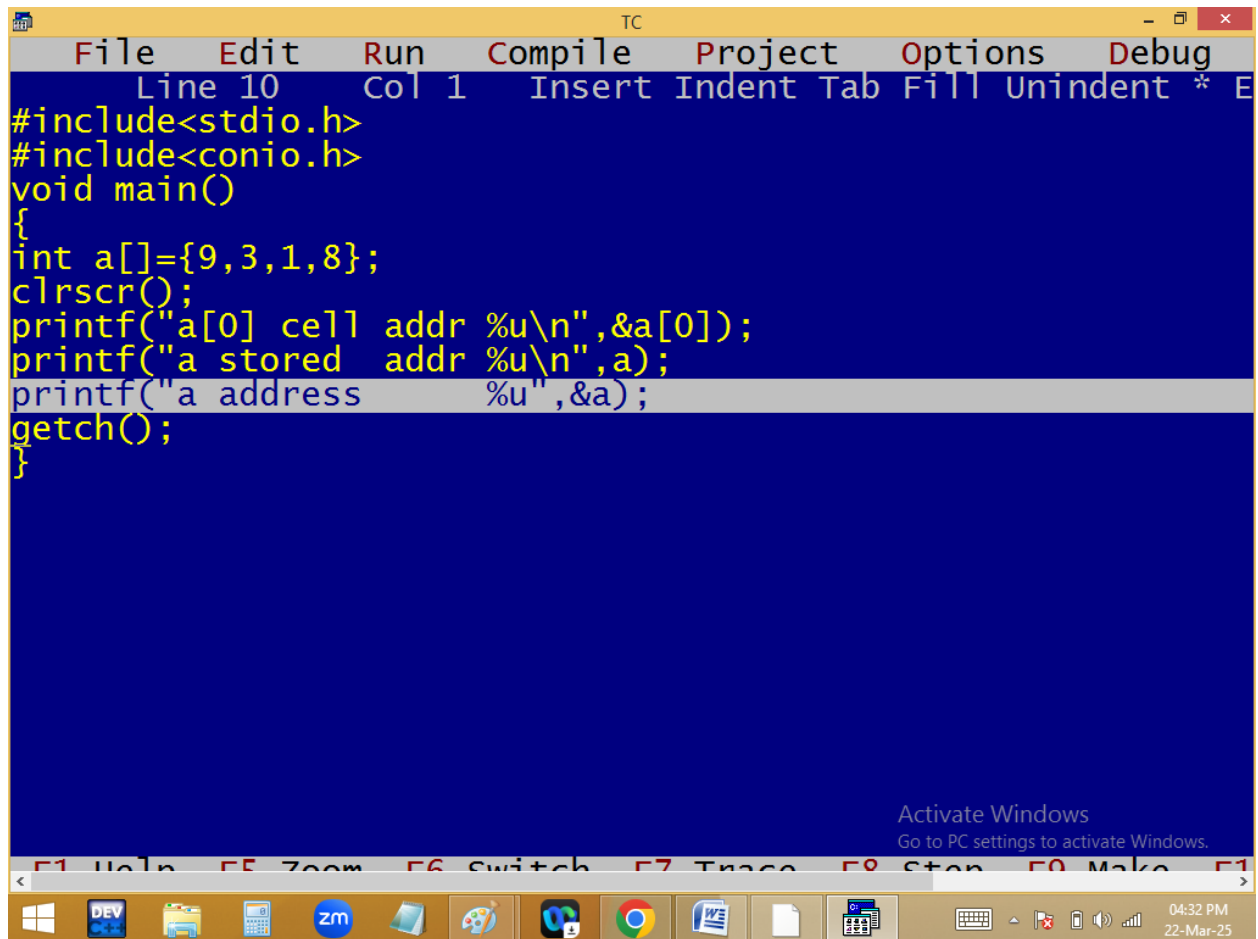

```
TC
File Edit Run Compile Project Options Debug
Line 10 Col 1 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a[]={9,3,1,8};
clrscr();
printf("a[0] cell addr %u\n",&a[0]);
printf("a stored addr %u\n",a);
printf("a address %u",&a);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10


04:32 PM
22-Mar-25

```
TC
a[0] cell addr 65496
a stored addr 65496
a address      65496_
```

Activate Windows
Go to PC settings to activate Windows.

04:32 PM
22-Mar-25

Finding array cell value, address and index no:

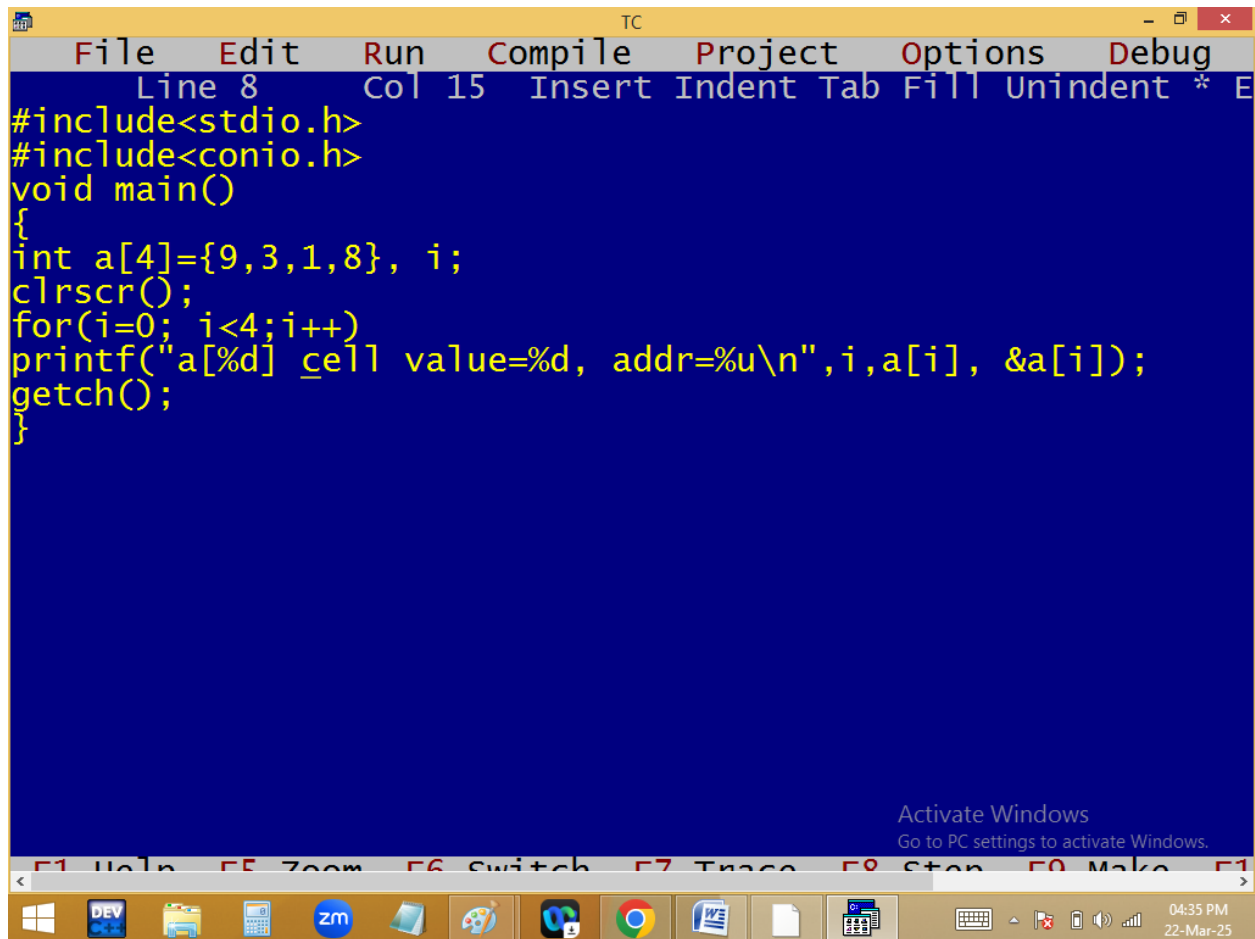

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 8", "Col 15", and provides shortcuts for "Insert", "Indent", "Tab", "Fill", "Unindent", and "E". The code editor contains the following C program:


```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[4]={9,3,1,8}, i;
clrscr();
for(i=0; i<4;i++)
printf("a[%d] cell value=%d, addr=%u\n",i,a[i], &a[i]);
getch();
}
```

At the bottom of the window, there is a taskbar with various application icons including Windows, DEV, File Explorer, Calculator, Zoom, Paint, VS Code, Chrome, Word, and a folder icon. The system tray on the right shows the time as 04:35 PM and the date as 22-Mar-25. An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.

```
TC
a[0] cell value=9, addr=65496
a[1] cell value=3, addr=65498
a[2] cell value=1, addr=65500
a[3] cell value=8, addr=65502
```

Activate Windows
Go to PC settings to activate Windows.

04:35 PM
22-Mar-25

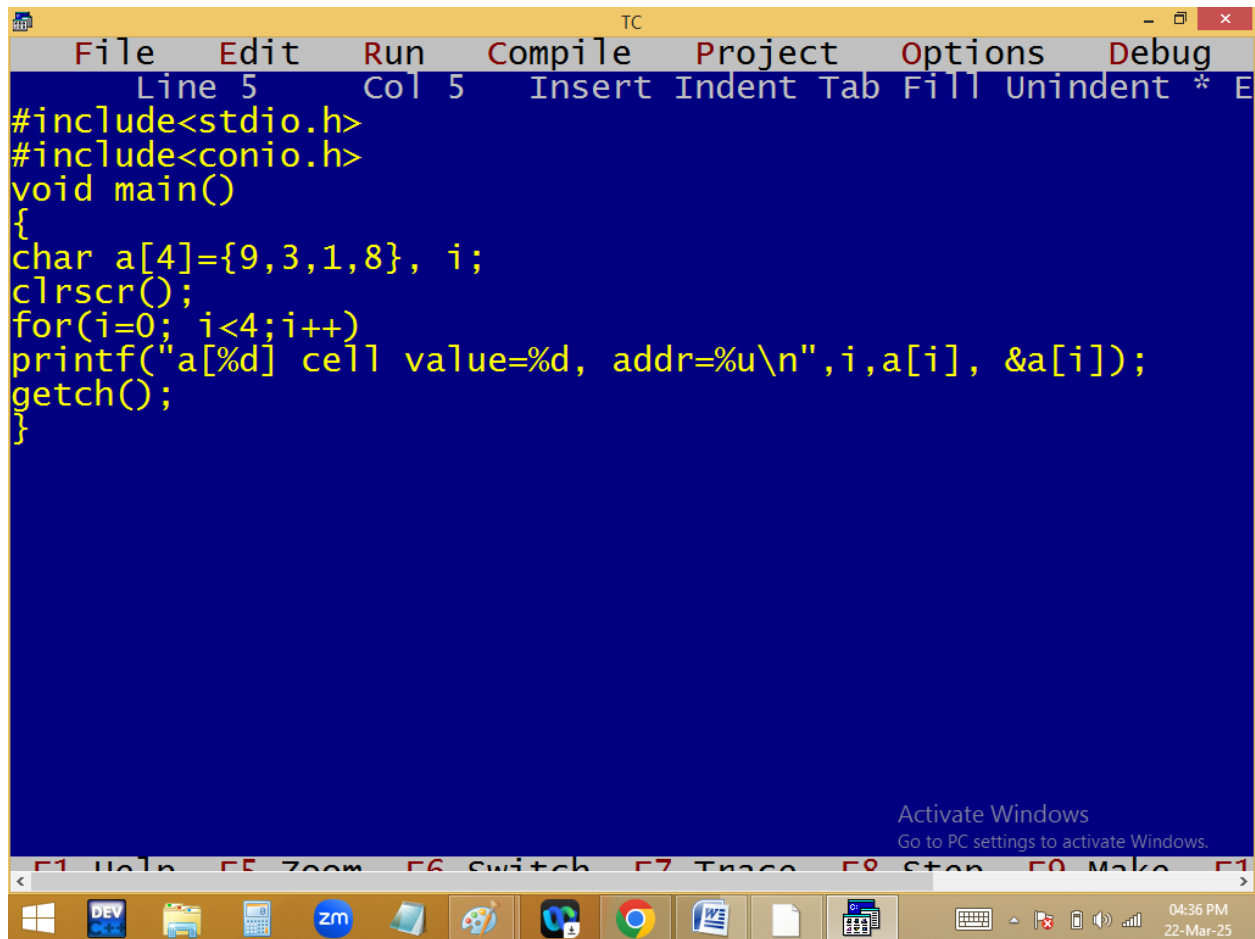

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates "Line 5" and "Col 5". The main editing area has a blue background and contains the following C code:


```
#include<stdio.h>
#include<conio.h>
void main()
{
char a[4]={9,3,1,8}, i;
clrscr();
for(i=0; i<4;i++)
printf("a[%d] cell value=%d, addr=%u\n",i,a[i], &a[i]);
getch();
}
```

At the bottom of the IDE window, there is a toolbar with icons for various functions, and a status bar showing the time "04:36 PM" and date "22-Mar-25". An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.

```
TC
a[0] cell value=9, addr=65498
a[1] cell value=3, addr=65499
a[2] cell value=1, addr=65500
a[3] cell value=8, addr=65501
```

Activate Windows
Go to PC settings to activate Windows.

04:36 PM
22-Mar-25

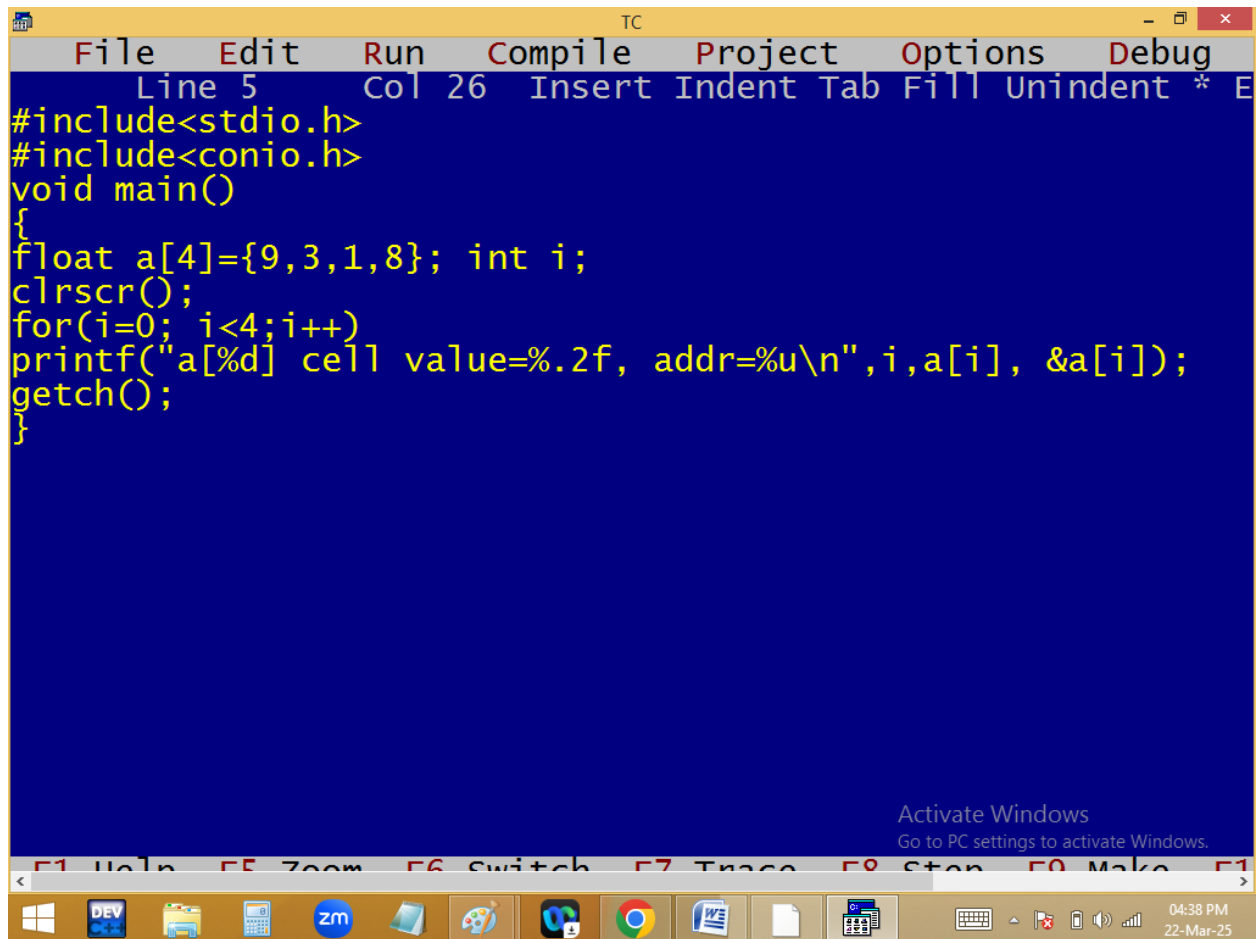


```
TC
File Edit Run Compile Project Options Debug
Line 5 Col 26 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
float a[4]={9,3,1,8}; int i;
clrscr();
for(i=0; i<4;i++)
printf("a[%d] cell value=%.2f, addr=%u\n",i,a[i], &a[i]);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F11

04:38 PM
22-Mar-25

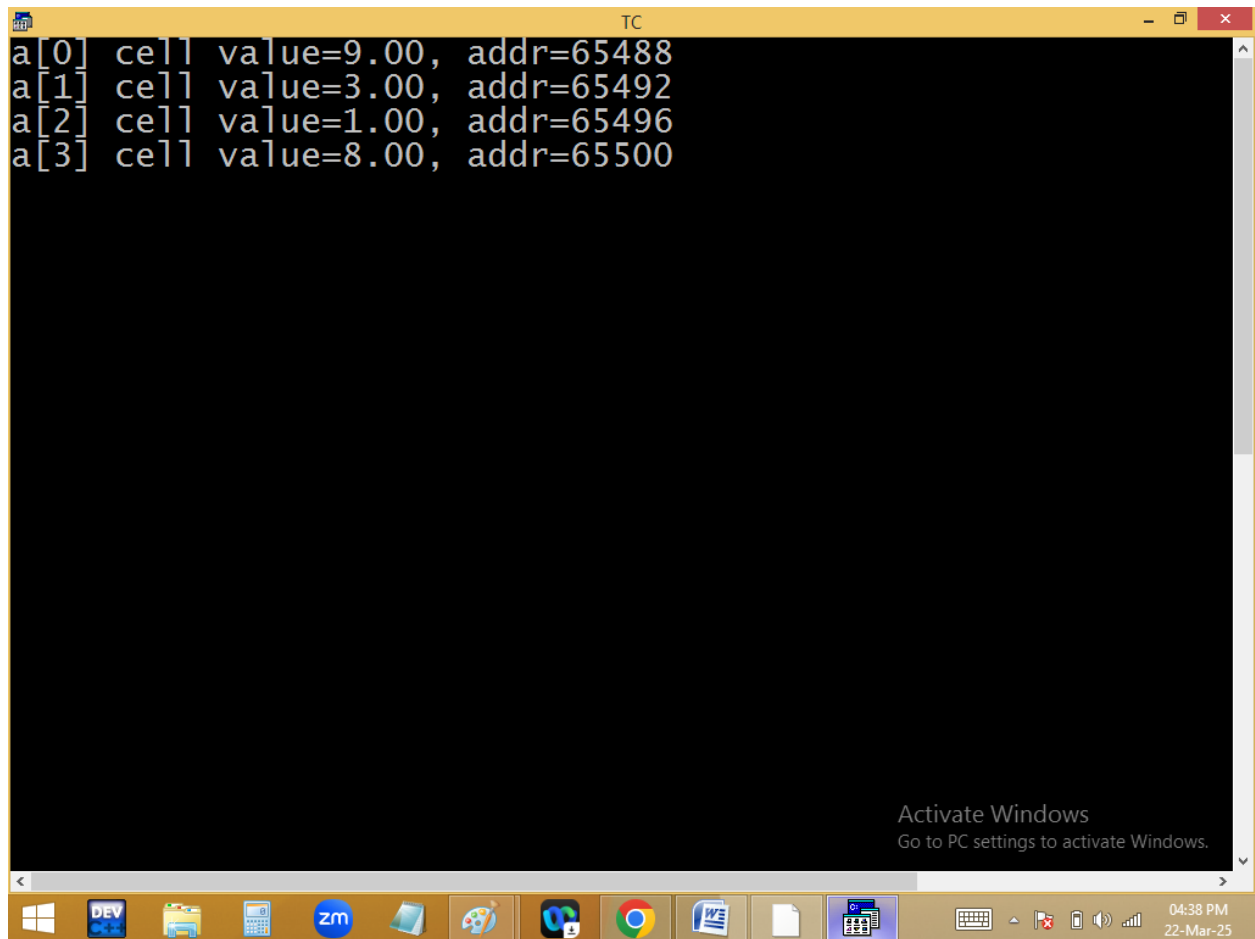


The image shows a screenshot of a Turbo C++ (TC) window. The window title bar is yellow and contains the text "TC". The main area is black with white text. The text displays the initialization of an array 'a' with four elements. Each element is shown with its index, a label 'cell', its value, and its memory address. The values are 9.00, 3.00, 1.00, and 8.00. The addresses are 65488, 65492, 65496, and 65500. In the bottom right corner of the window, there is a message: "Activate Windows Go to PC settings to activate Windows." The Windows taskbar is visible at the bottom, showing various icons including the Start button, DEV, File Explorer, Calculator, Zoom, and several other applications. The system clock in the bottom right corner shows "04:38 PM 22-Mar-25".

```
a[0] cell value=9.00, addr=65488  
a[1] cell value=3.00, addr=65492  
a[2] cell value=1.00, addr=65496  
a[3] cell value=8.00, addr=65500
```

Activate Windows
Go to PC settings to activate Windows.


Direct initialization of array:

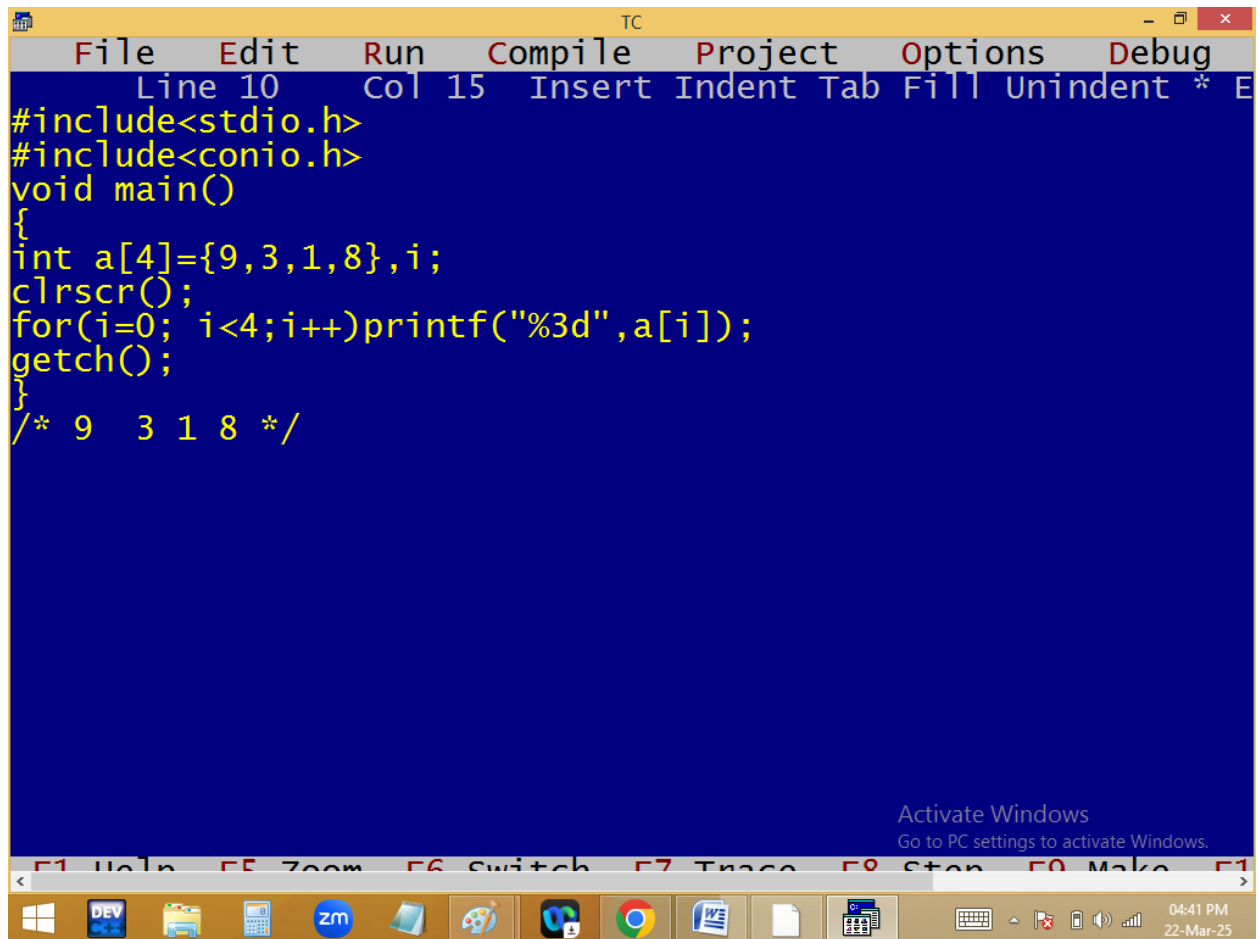

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status line indicates "Line 10 Col 15" and provides keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", and a list of function keys "F1 F2 F3 F4 F5 F6 F7 F8 F9 F10 F11 F12". The main editing area has a dark blue background with yellow text. The code is as follows:


```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[4]={9,3,1,8},i;
clrscr();
for(i=0; i<4;i++)printf("%3d",a[i]);
getch();
}
/* 9  3 1 8 */
```

At the bottom of the window, there is a taskbar with various application icons including Windows, DEV, File Explorer, Calculator, Zoom, Paint, VS Code, Chrome, Word, and a folder icon. The system tray on the right shows the date and time as "04:41 PM 22-Mar-25". An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.

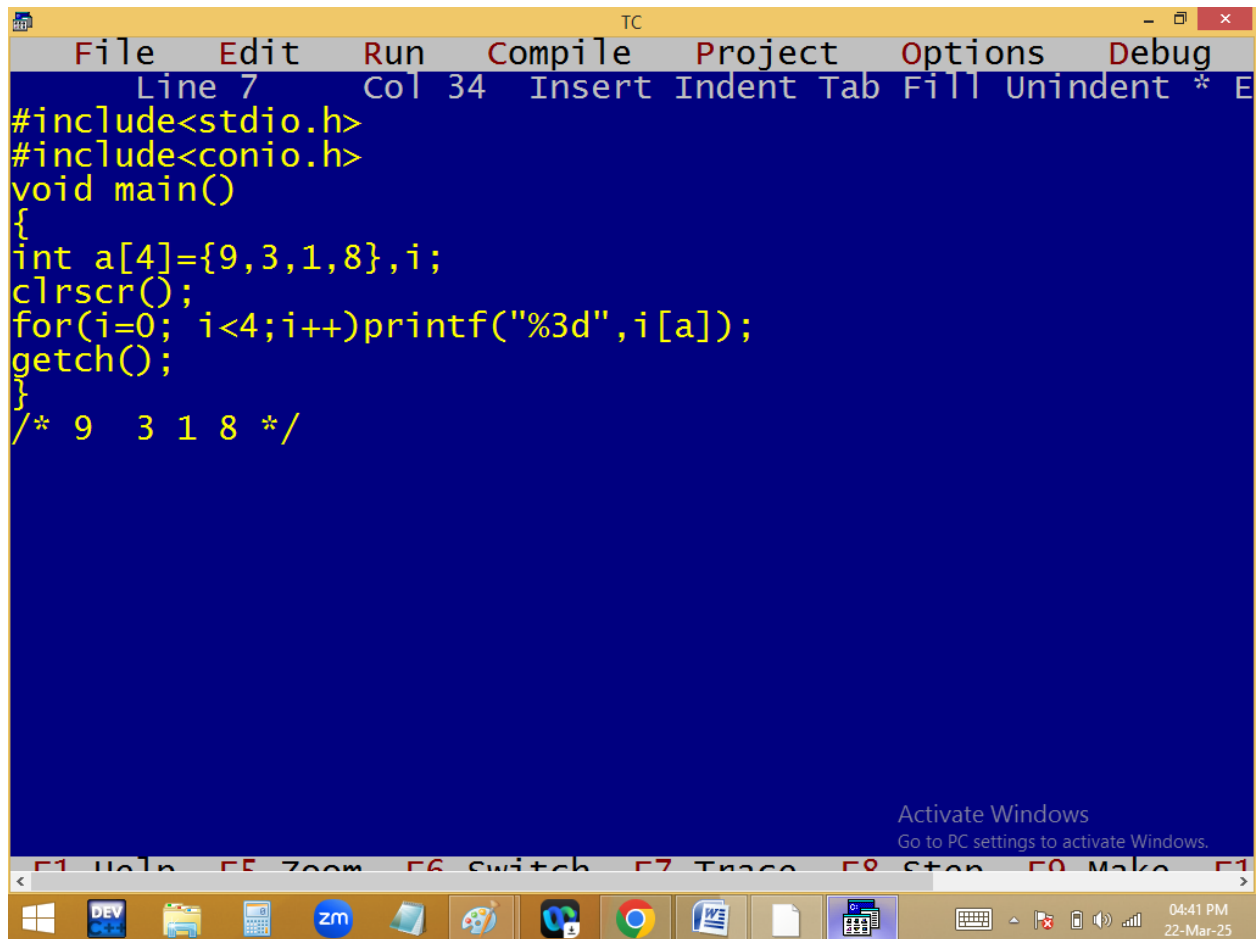

```
TC
File Edit Run Compile Project Options Debug
Line 7 Col 34 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a[4]={9,3,1,8},i;
clrscr();
for(i=0; i<4;i++)printf("%3d",i[a]);
getch();
}
/* 9  3 1 8 */


Activate Windows
Go to PC settings to activate Windows.
F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
```

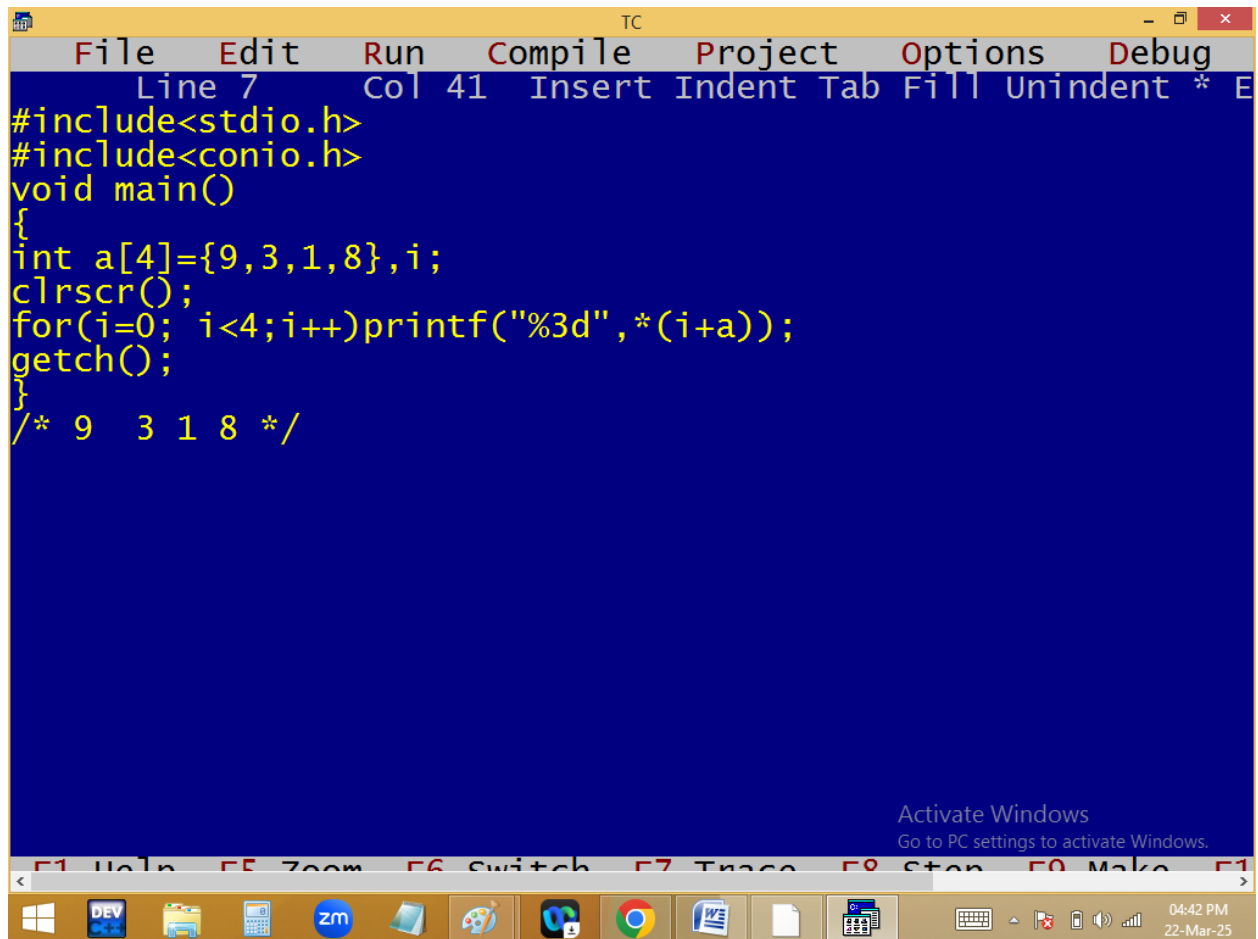The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar indicates "Line 7" and "Col 41". The main editing area has a blue background with yellow text. The code is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[4]={9,3,1,8},i;
clrscr();
for(i=0; i<4;i++)printf("%3d",*(i+a));
getch();
}
/* 9  3 1 8 */
```


At the bottom of the window, there is a taskbar with various application icons including Windows, DEV, File Explorer, Calculator, Zoom, Paint, VS Code, Chrome, Word, and a folder icon. The system tray on the right shows the time as 04:42 PM and the date as 22-Mar-25. An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.

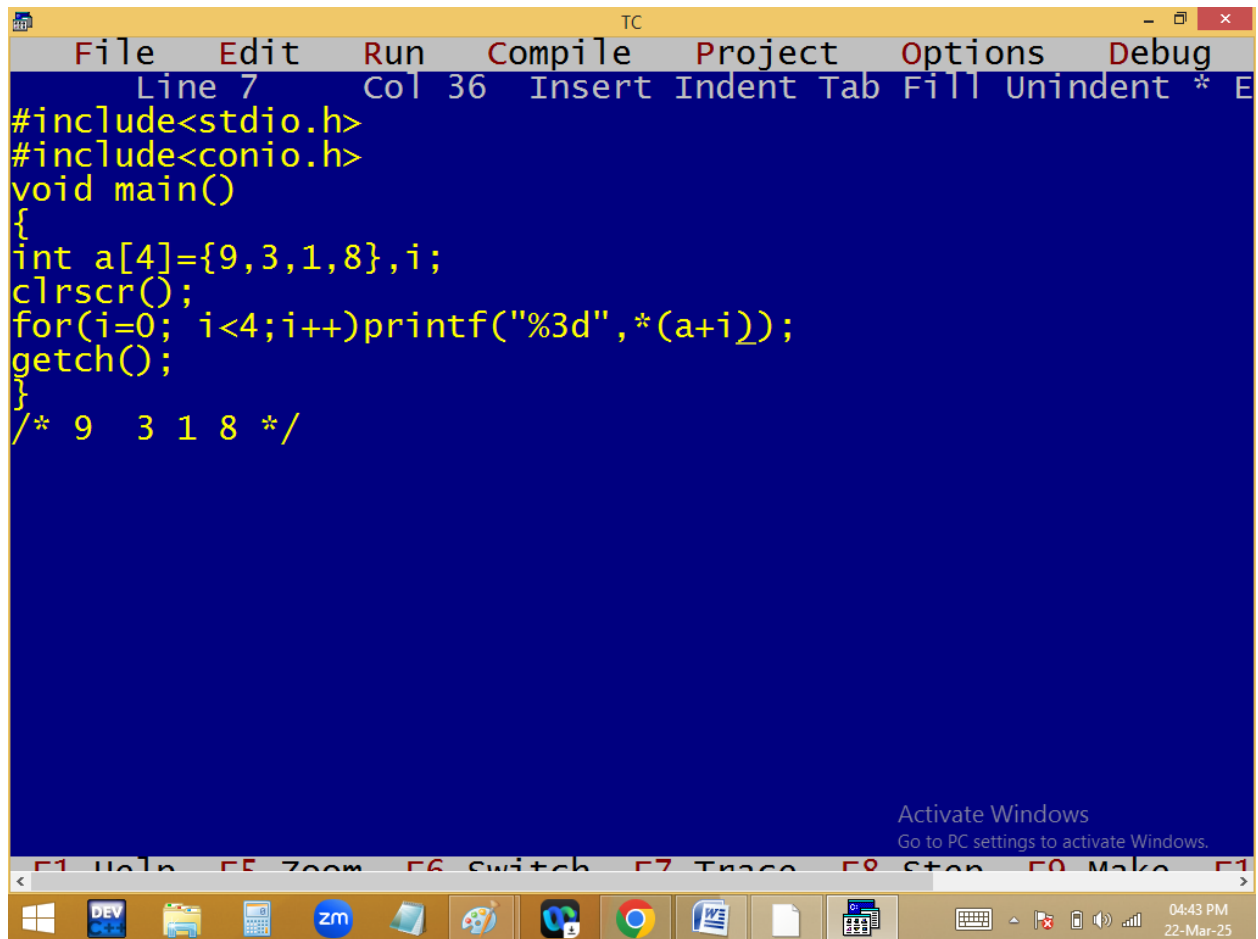

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status line indicates "Line 7", "Col 36", and lists keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", and a list of symbols: "*, E". The main editing area has a dark blue background with yellow text. The code is as follows:


```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[4]={9,3,1,8},i;
clrscr();
for(i=0; i<4;i++)printf("%3d",*(a+i));
getch();
}
/* 9  3 1 8 */
```

At the bottom of the window, there is a taskbar with various application icons including Windows, DEV, File Explorer, Calculator, Zoom, Paint, VS Code, Chrome, Word, and a folder icon. On the right side of the taskbar, the system clock shows "04:43 PM" and the date "22-Mar-25". An "Activate Windows" watermark is visible in the bottom right corner of the IDE window, with the text "Go to PC settings to activate Windows."

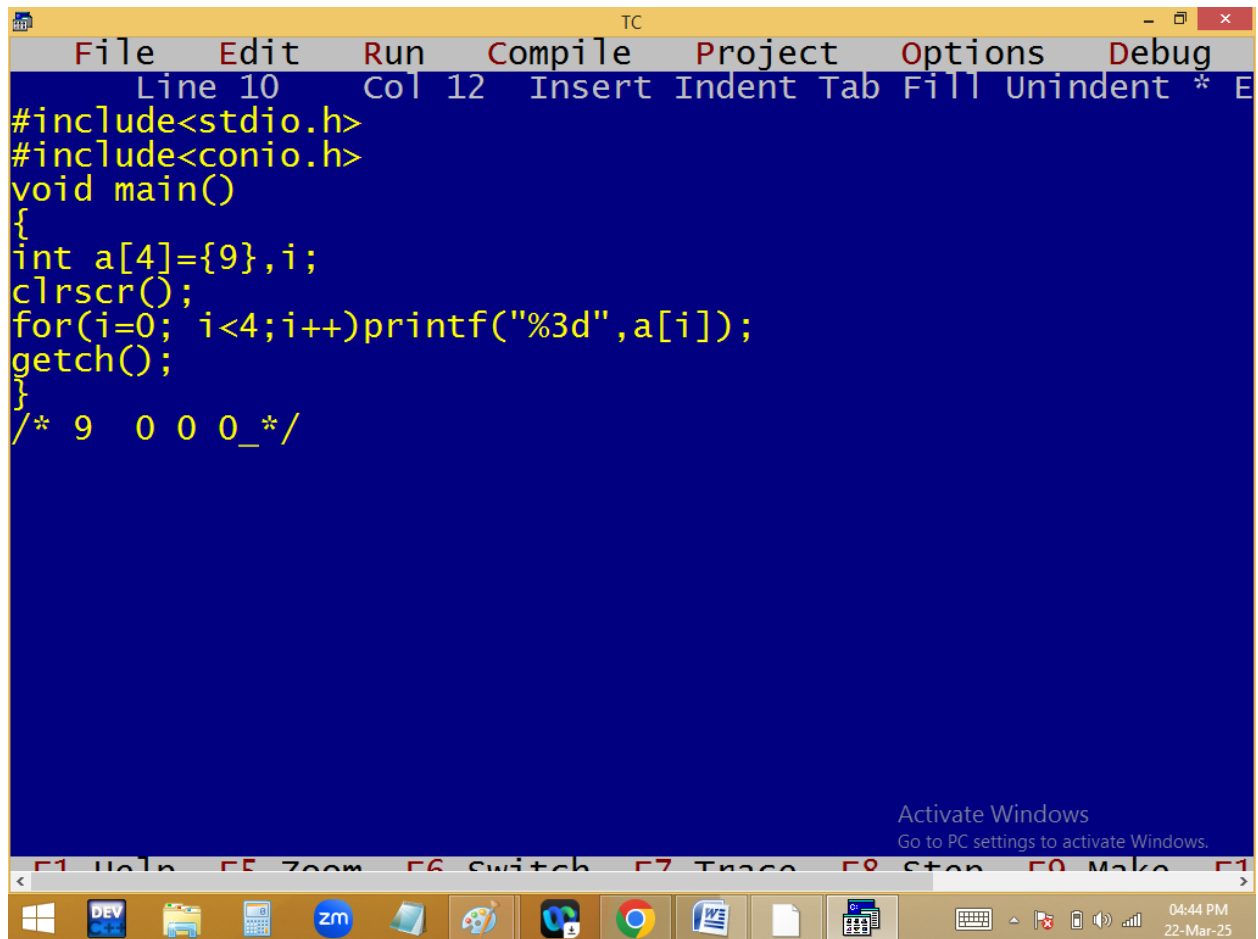


```
TC
File Edit Run Compile Project Options Debug
Line 10 Col 12 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a[4]={9},i;
clrscr();
for(i=0; i<4;i++)printf("%3d",a[i]);
getch();
}
/* 9  0 0 0_*/

Activate Windows
Go to PC settings to activate Windows.
F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
```

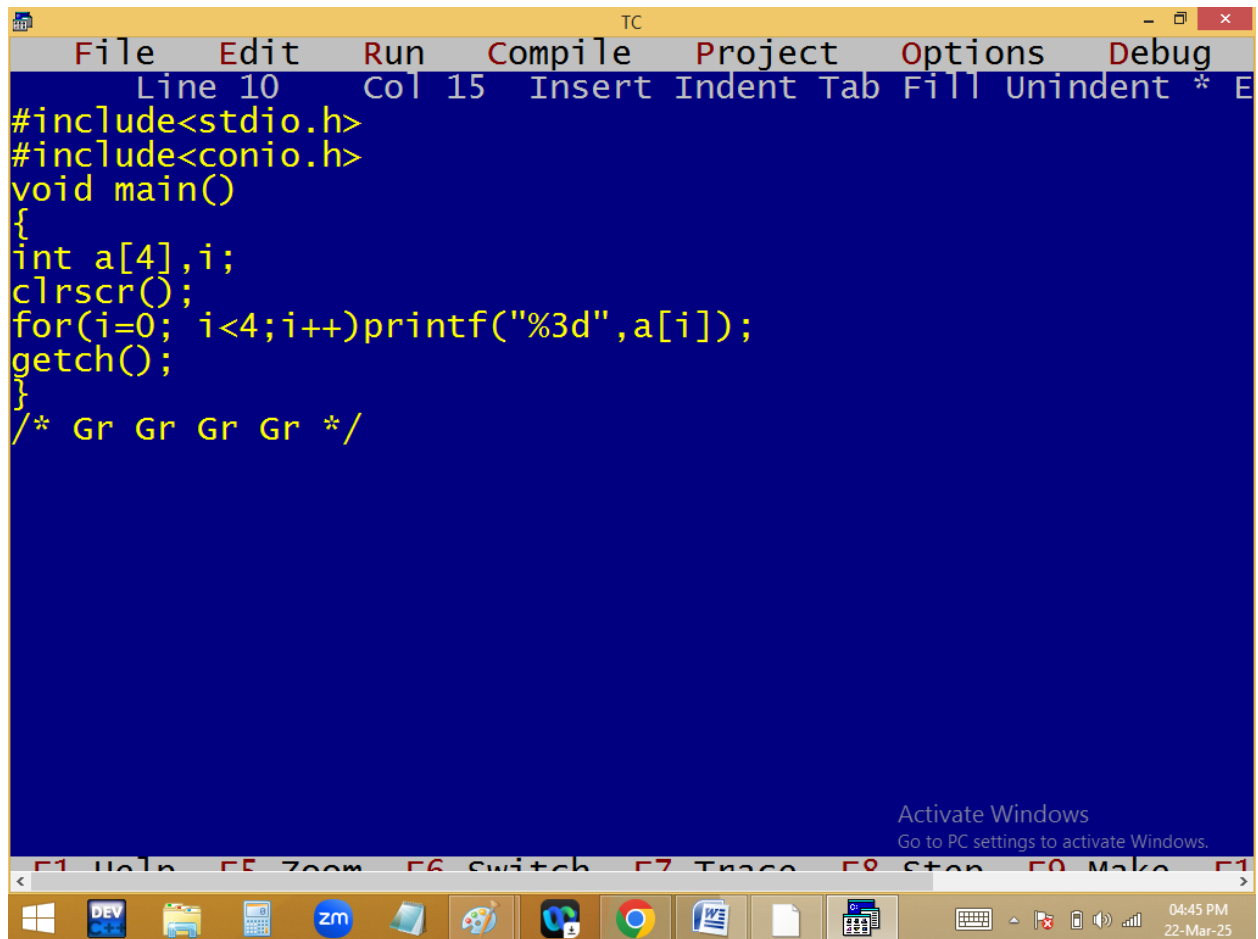

```
TC
File Edit Run Compile Project Options Debug
Line 10 Col 15 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a[4],i;
clrscr();
for(i=0; i<4;i++)printf("%3d",a[i]);
getch();
}
/* Gr Gr Gr Gr */


Activate Windows
Go to PC settings to activate Windows.
F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
```

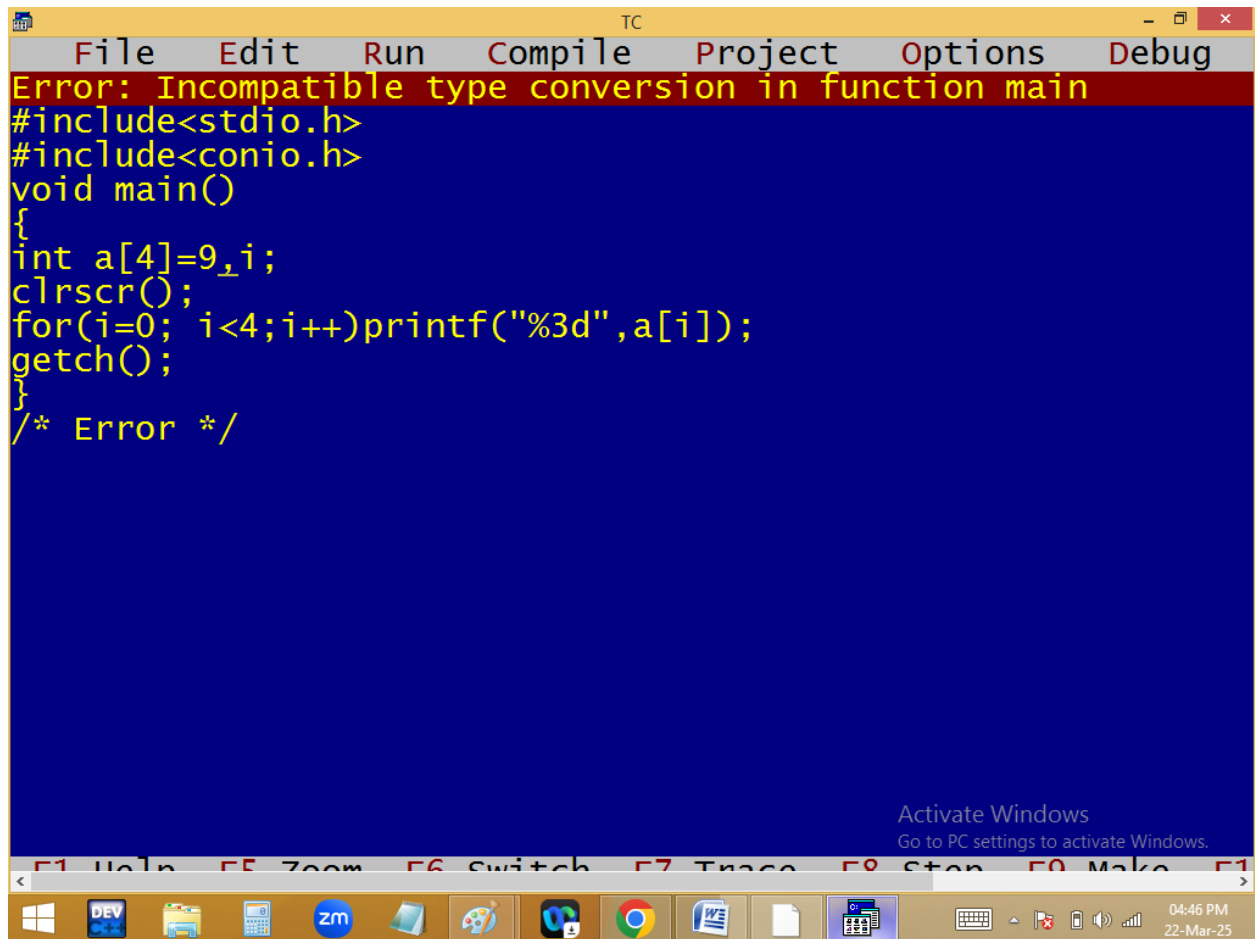

The image shows a screenshot of the Turbo C++ (TC) IDE. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error banner at the top of the editor window states "Error: Incompatible type conversion in function main". The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[4]=9,i;
clrscr();
for(i=0; i<4;i++)printf("%3d",a[i]);
getch();
}
/* Error */
```


At the bottom of the IDE, there is a status bar with function key shortcuts: F1 Help, F5 Zoom, F6 Switch, F7 Trace, F8 Stop, F9 Make, and F10. An "Activate Windows" watermark is visible in the bottom right corner of the IDE window, with the text "Go to PC settings to activate Windows." The Windows taskbar at the very bottom shows various application icons, including DEV, File Explorer, Calculator, Zoom, and others. The system clock in the bottom right corner of the taskbar shows "04:46 PM" and "22-Mar-25".

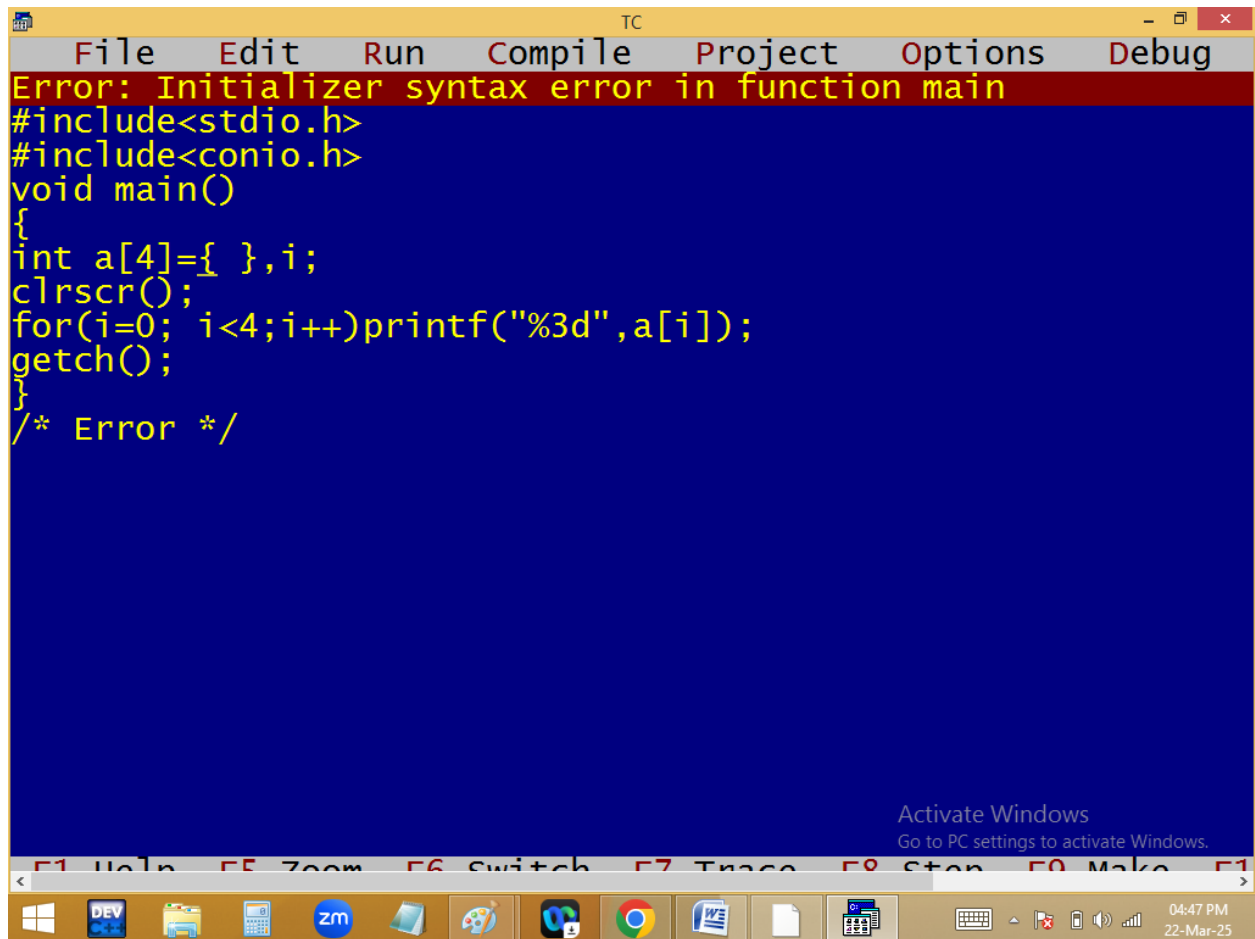

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error banner at the top reads "Error: Initializer syntax error in function main". The code in the editor is as follows:


```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[4]={ },i;
clrscr();
for(i=0; i<4;i++)printf("%3d",a[i]);
getch();
}
/* Error */
```

At the bottom right of the IDE, there is a message: "Activate Windows. Go to PC settings to activate Windows." The Windows taskbar is visible at the bottom, showing icons for Windows, DEV, File Explorer, Calculator, Zoom, Paint, VS Code, Chrome, Word, and a document icon. The system tray on the right shows the date and time: "04:47 PM 22-Mar-25".

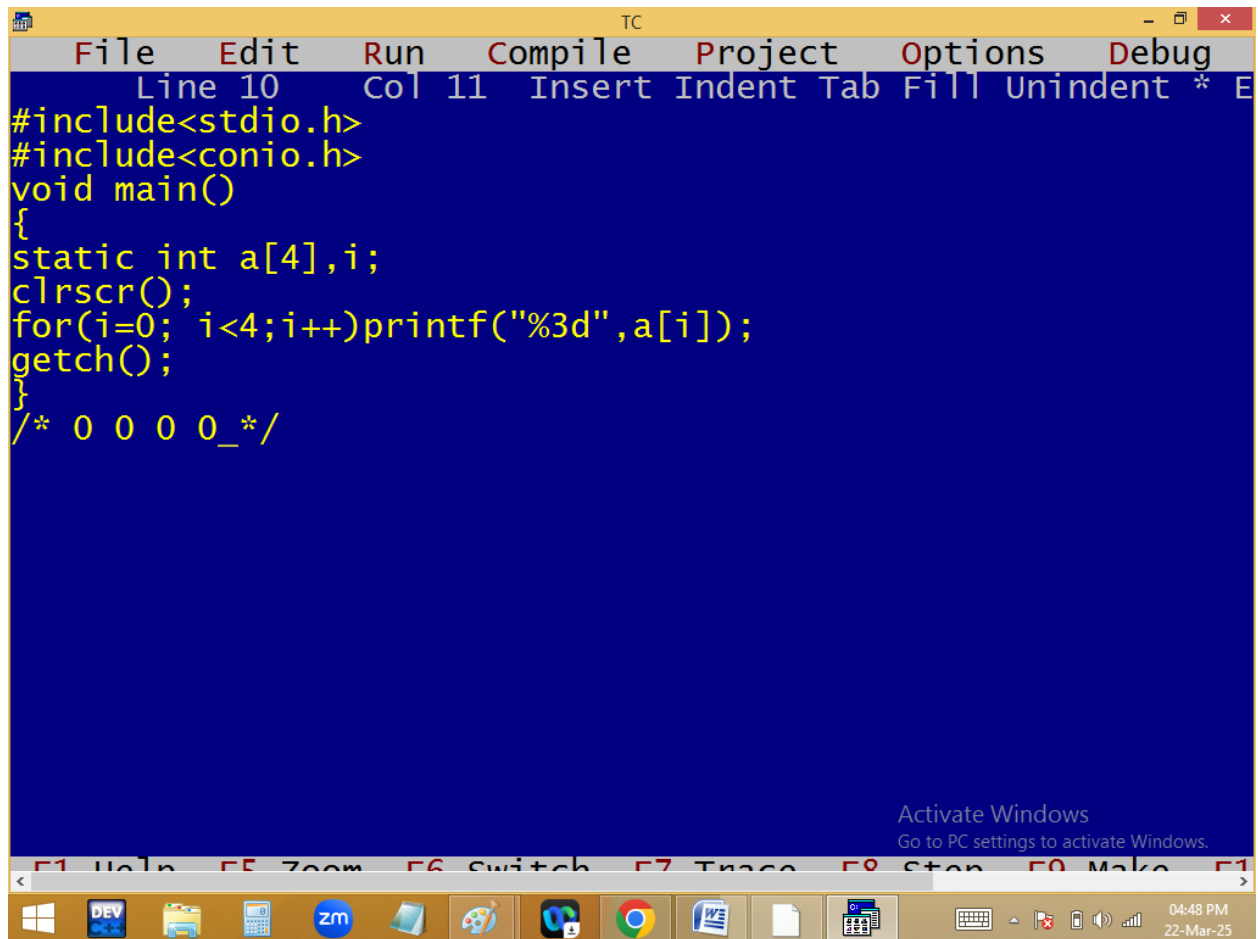


```
TC
File Edit Run Compile Project Options Debug
Line 10 Col 11 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
static int a[4],i;
clrscr();
for(i=0; i<4;i++)printf("%3d",a[i]);
getch();
}
/* 0 0 0 0 _*/

Activate Windows
Go to PC settings to activate Windows.
F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
```

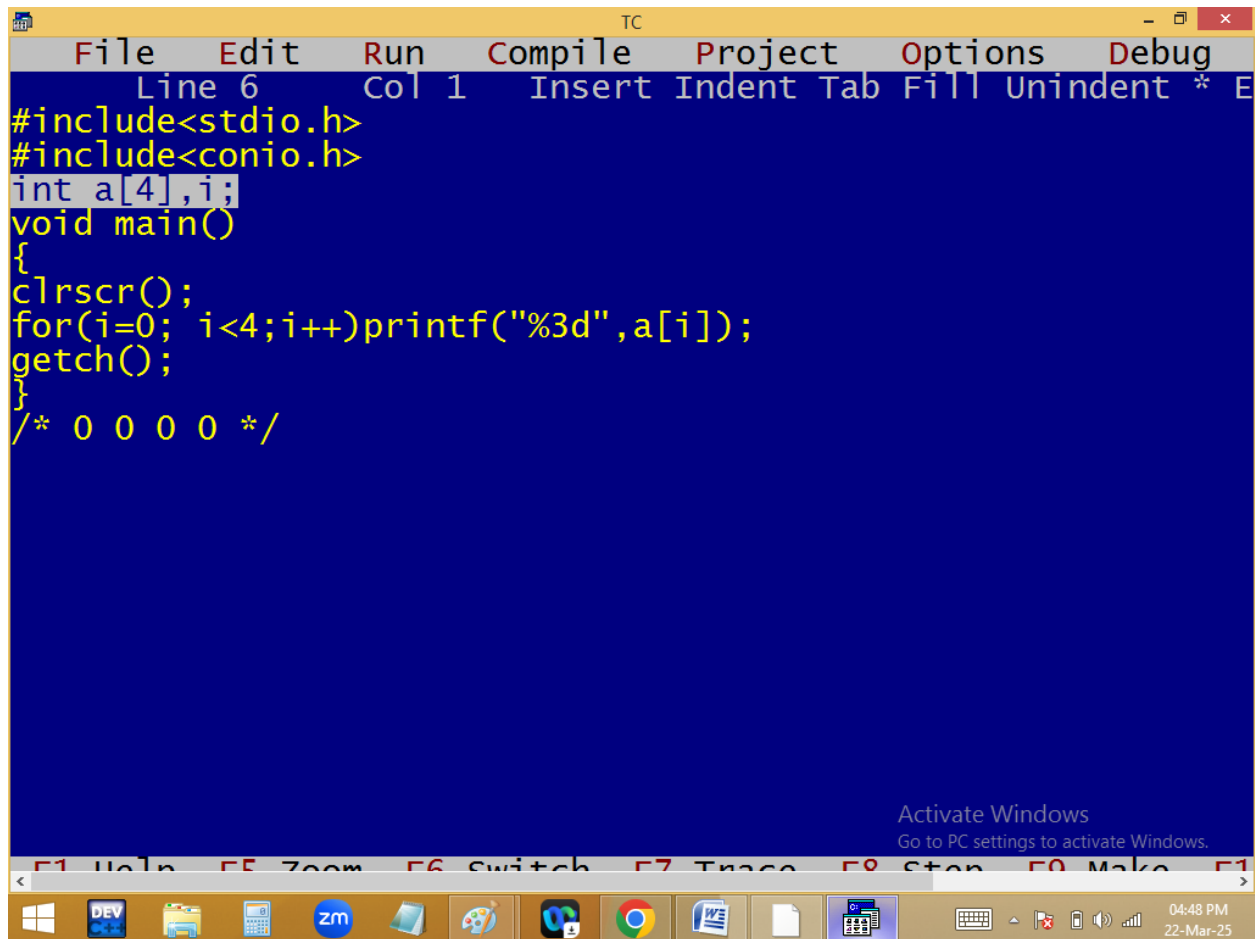

```
TC
File Edit Run Compile Project Options Debug
Line 6 Col 1 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
int a[4],i;
void main()
{
clrscr();
for(i=0; i<4;i++)printf("%3d",a[i]);
getch();
}
/* 0 0 0 0 */

Activate Windows
Go to PC settings to activate Windows.
F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
```

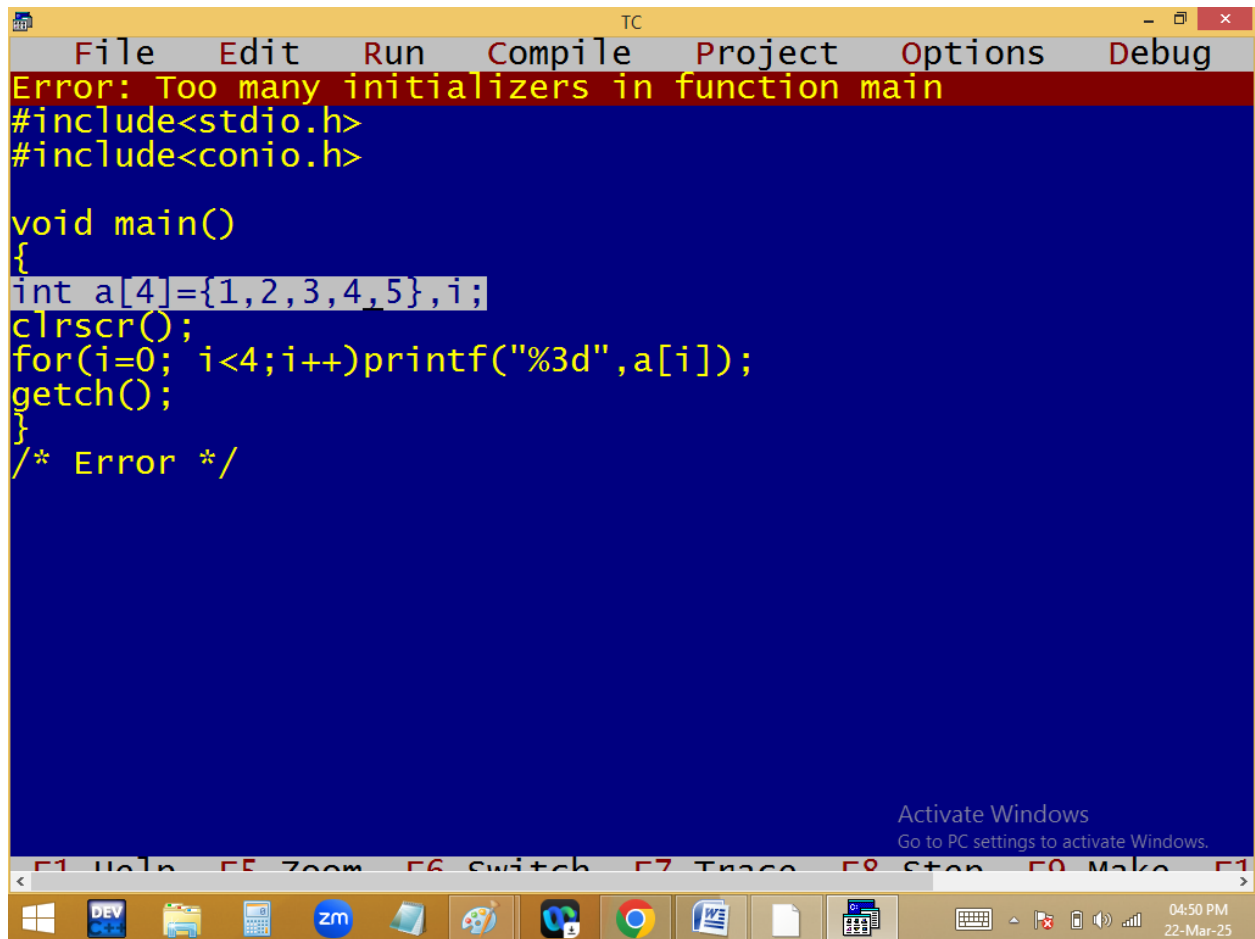



The image shows a screenshot of the Turbo C++ (TC) IDE. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error message banner at the top states "Error: Too many initializers in function main". The main text area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>

void main()
{
int a[4]={1,2,3,4,5},i;
clrscr();
for(i=0; i<4;i++)printf("%3d",a[i]);
getch();
}
/* Error */
```

The line `int a[4]={1,2,3,4,5},i;` is highlighted in light blue. At the bottom of the window, there is a status bar with function key shortcuts: F1 Help, F5 Zoom, F6 Switch, F7 Trace, F8 Stop, F9 Make, and F10. An "Activate Windows" watermark is visible in the bottom right corner of the text area, with the text "Go to PC settings to activate Windows." The Windows taskbar at the very bottom shows various application icons and the system clock indicating 04:50 PM on 22-Mar-25.

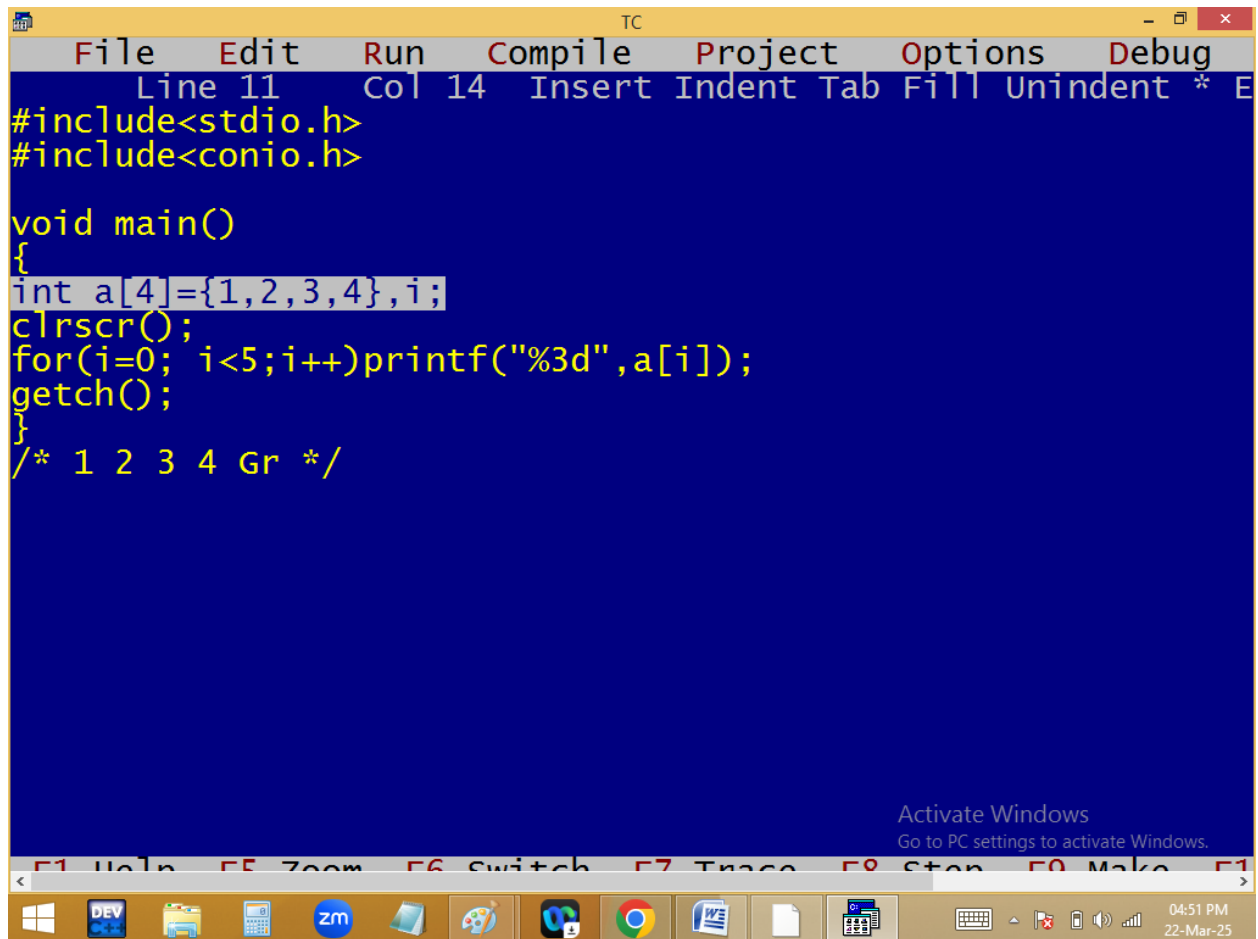


The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 11", "Col 14", and a list of editing actions: "Insert", "Indent", "Tab", "Fill", "Unindent", "*", and "E". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>

void main()
{
int a[4]={1,2,3,4},i;
clrscr();
for(i=0; i<5;i++)printf("%3d",a[i]);
getch();
}
/* 1 2 3 4 Gr */
```

At the bottom of the window, there is a taskbar with various application icons including Windows, DEV, a folder, a calculator, a Zoom icon (zm), a paint palette, a code editor icon, a Google Chrome icon, a Word document icon, and a file explorer icon. On the right side of the taskbar, the system clock shows "04:51 PM" and the date "22-Mar-25". An "Activate Windows" watermark is visible in the bottom right corner of the IDE window, with the text "Go to PC settings to activate Windows."

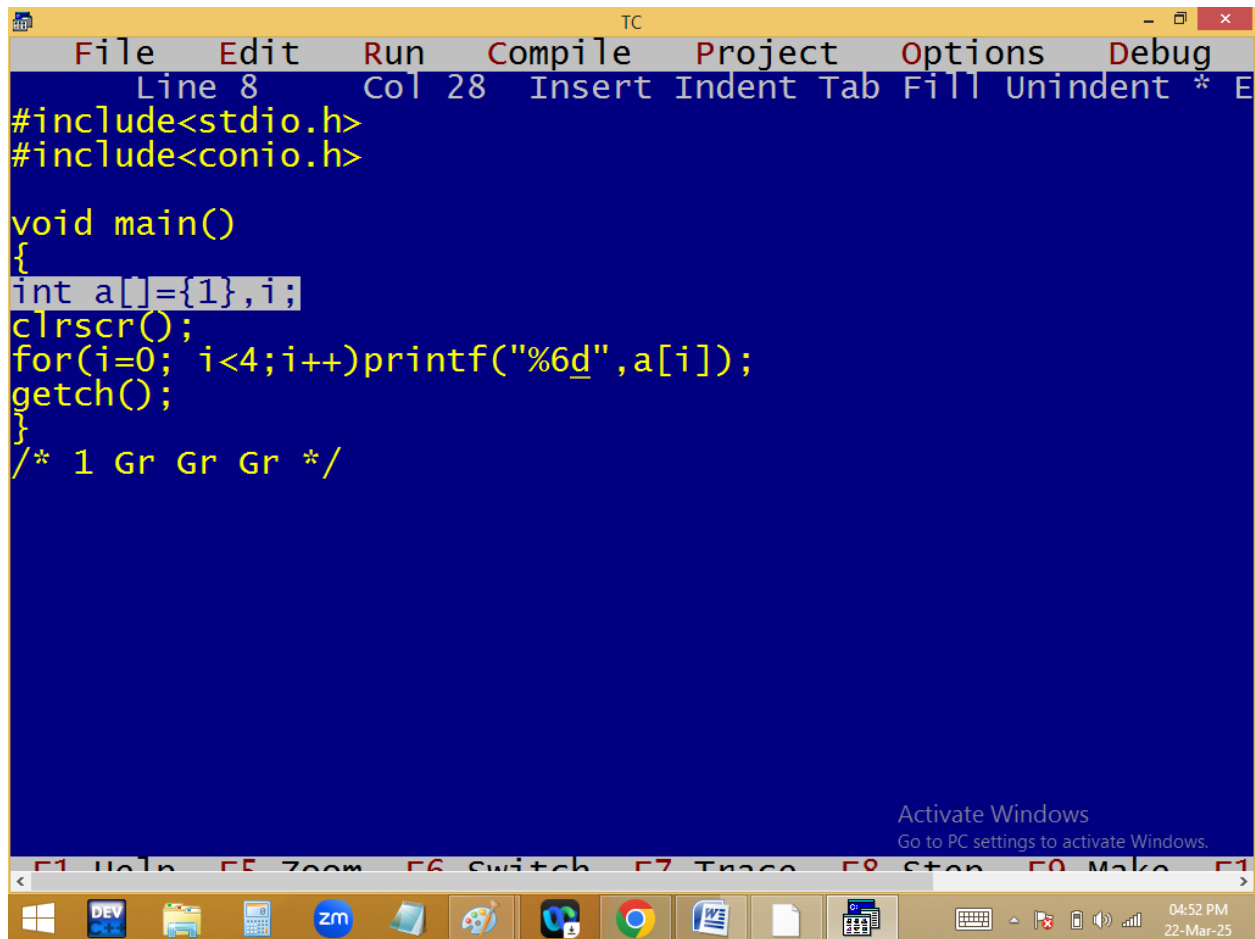


The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates "Line 8" and "Col 28". The code editor has a blue background with yellow text. The code is as follows:

```
#include<stdio.h>
#include<conio.h>

void main()
{
    int a[]={1},i;
    clrscr();
    for(i=0; i<4;i++)printf("%6d",a[i]);
    getch();
}
/* 1 Gr Gr Gr */
```


At the bottom of the IDE, there is a toolbar with icons for various functions. A watermark "Activate Windows" is visible in the bottom right corner of the IDE window. The Windows taskbar is visible at the very bottom, showing the Start button, taskbar icons for DEV, File Explorer, Calculator, Zoom, and others, and the system tray with the date and time "04:52 PM 22-Mar-25".

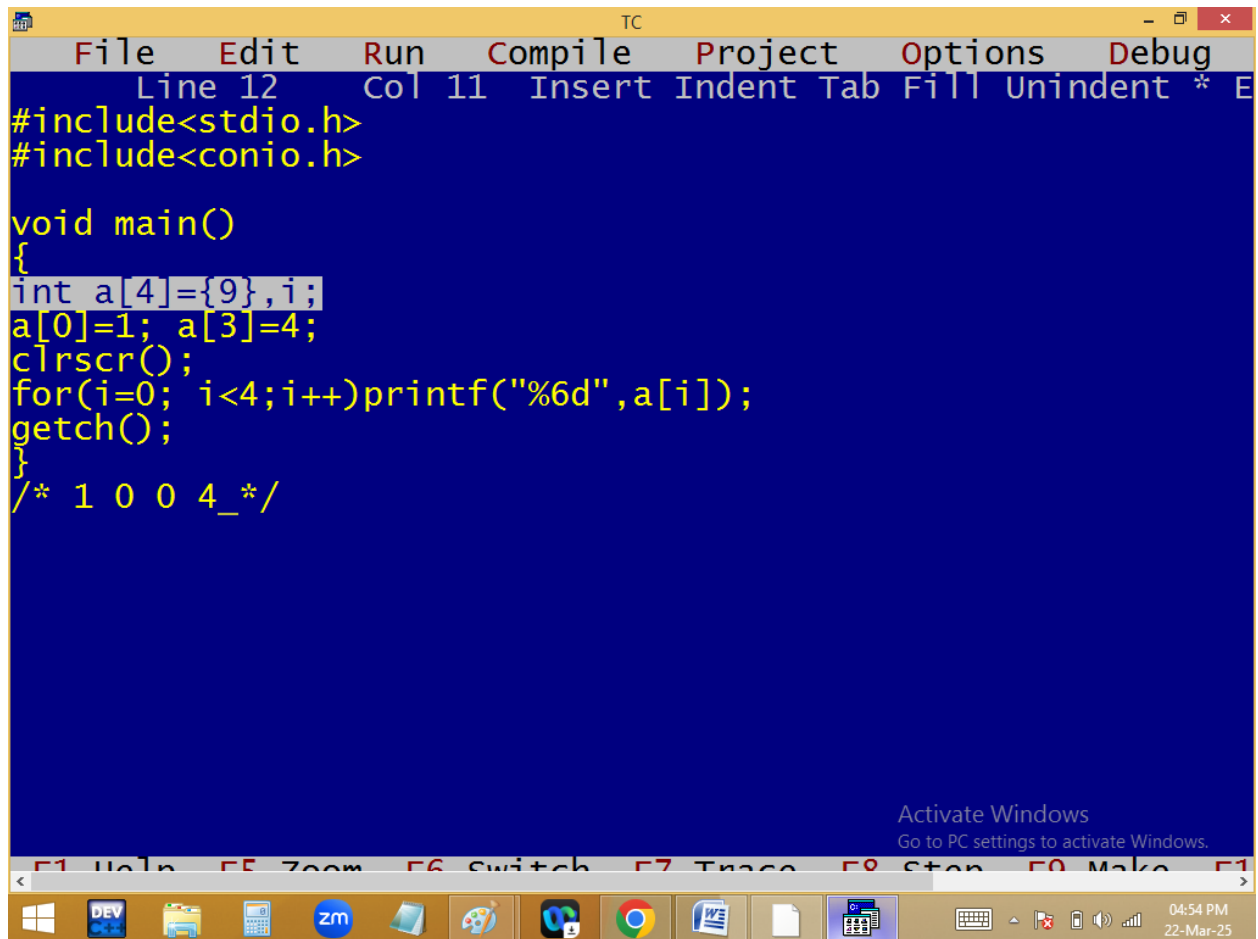


```
TC
File Edit Run Compile Project Options Debug
Line 12 Col 11 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>

void main()
{
int a[4]={9},i;
a[0]=1; a[3]=4;
clrscr();
for(i=0; i<4;i++)printf("%6d",a[i]);
getch();
}
/* 1 0 0 4_*/

Activate Windows
Go to PC settings to activate Windows.
F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
```

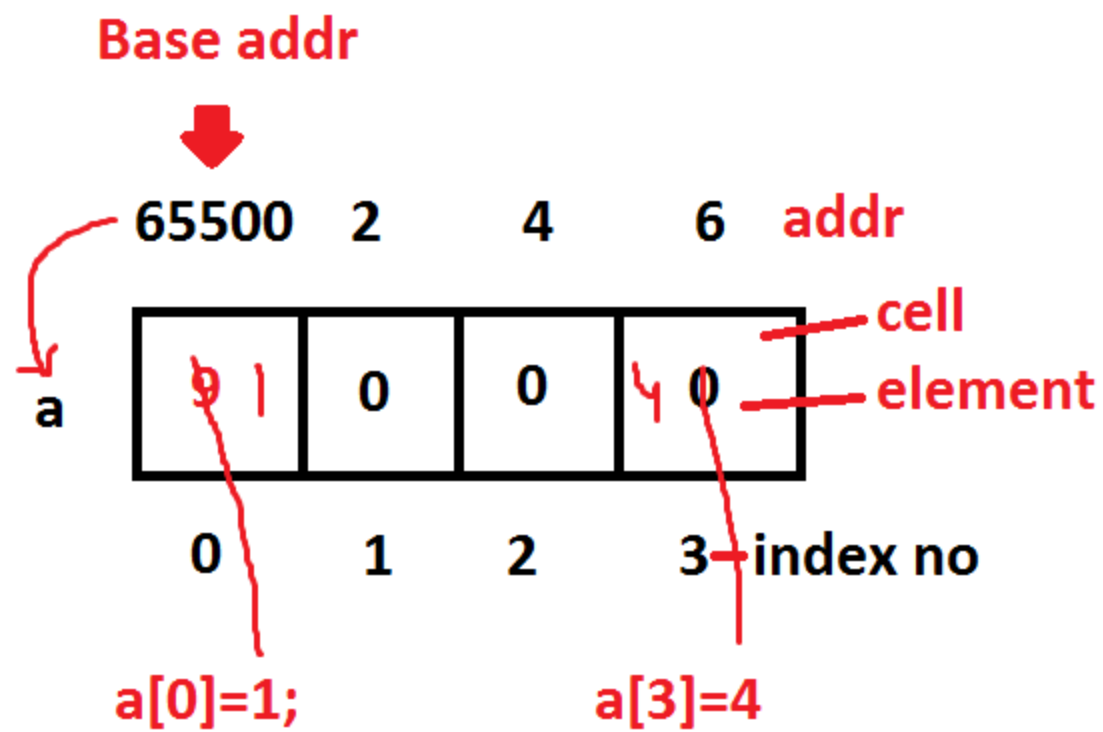

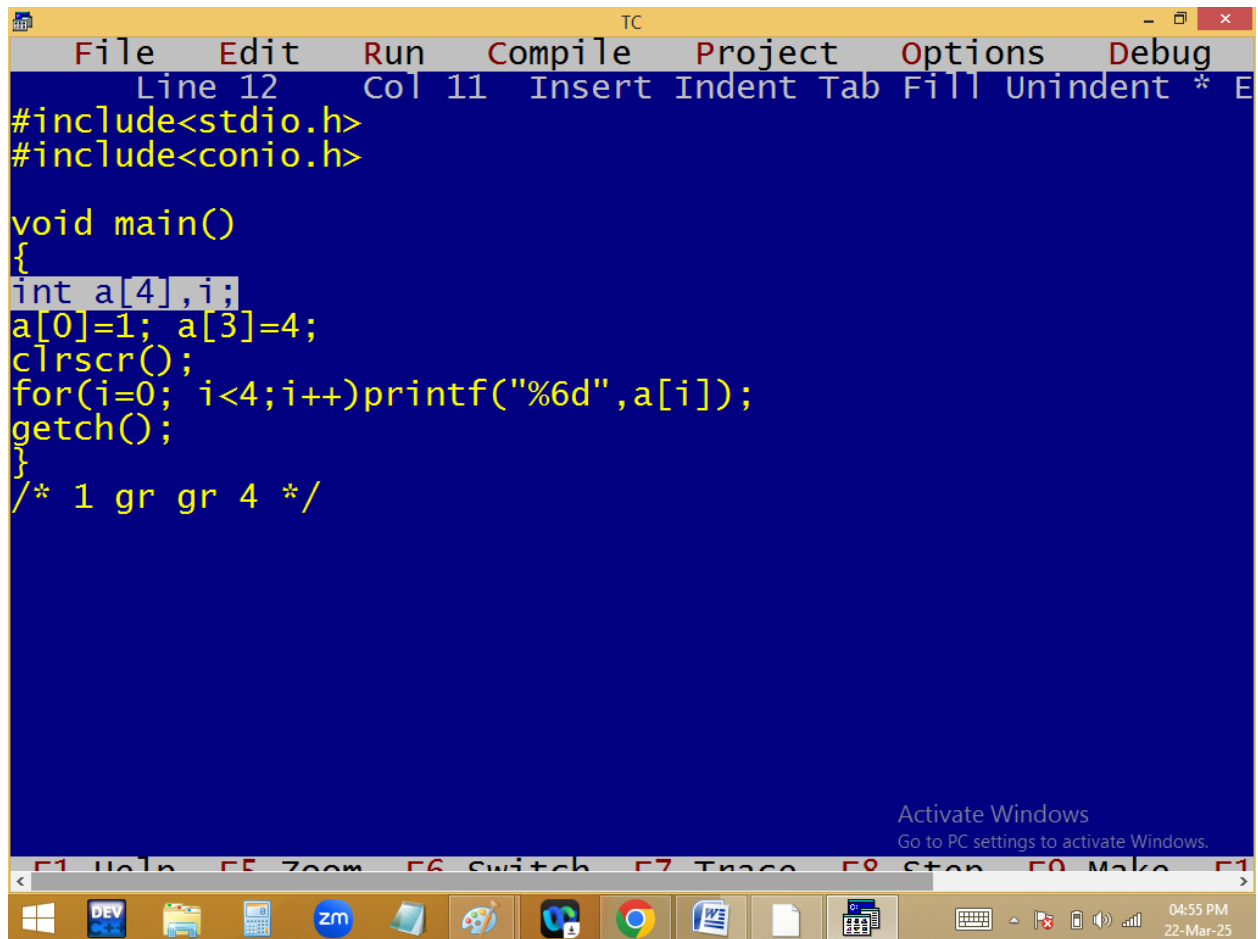

```
TC
File Edit Run Compile Project Options Debug
Line 12 Col 11 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>

void main()
{
int a[4],i;
a[0]=1; a[3]=4;
clrscr();
for(i=0; i<4;i++)printf("%6d",a[i]);
getch();
}
/* 1 gr gr 4 */

Activate Windows
Go to PC settings to activate Windows.
F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
```

Base addr



65500

2

4

6

addr



a

0

1


2

3

index no

a[0]=1;

a[3]=4

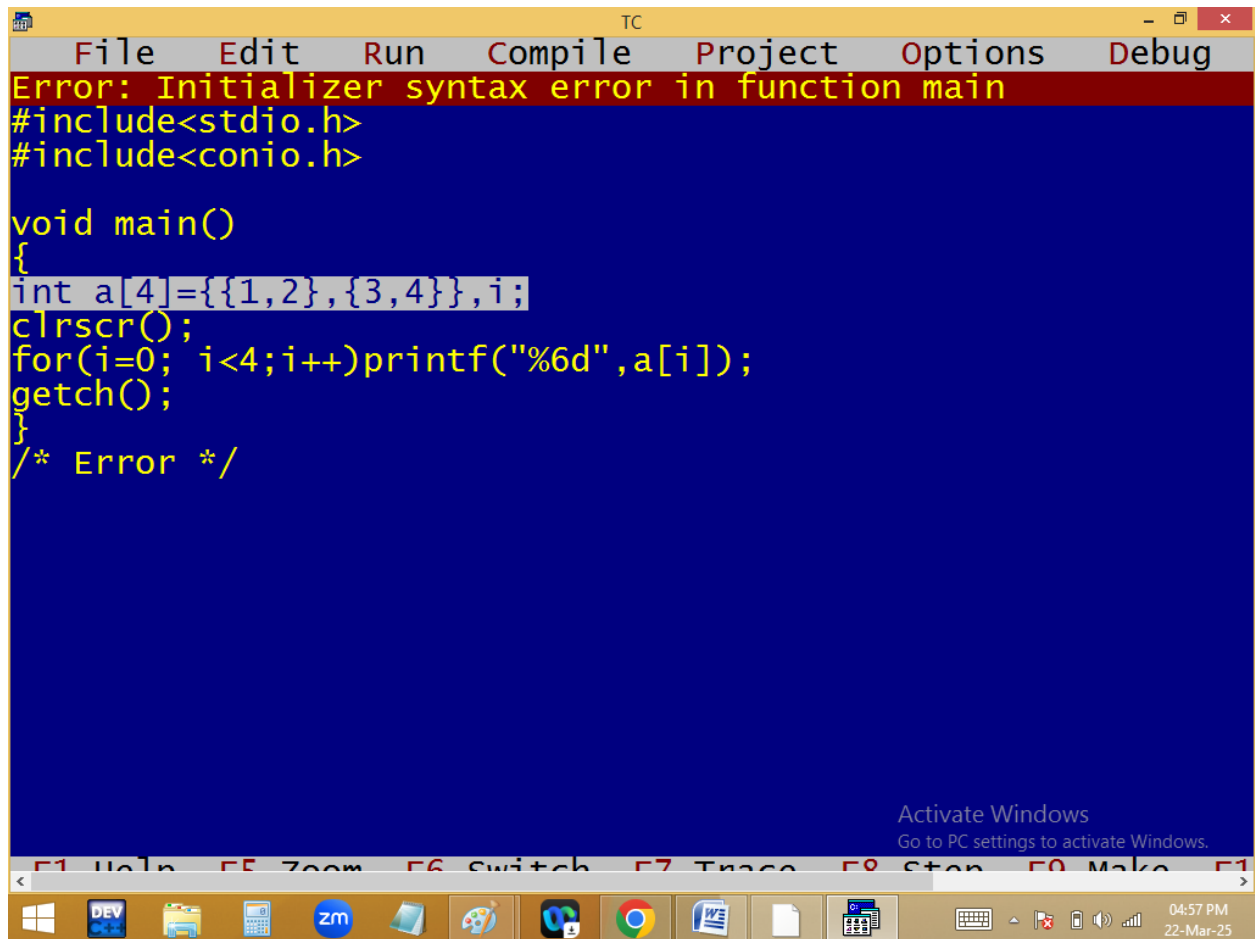


The image shows a screenshot of the Turbo C++ (TC) IDE. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error banner at the top of the code editor displays the message: "Error: Initializer syntax error in function main". The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>

void main()
{
int a[4]={{1,2},{3,4}},i;
clrscr();
for(i=0; i<4;i++)printf("%6d",a[i]);
getch();
}
/* Error */
```


At the bottom of the window, there is a taskbar with various application icons (Windows logo, DEV, folder, calculator, ZOOM, paint, VS Code, Chrome, Word, Notepad, and a calculator). The system tray on the right shows the date and time: "04:57 PM 22-Mar-25". An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.

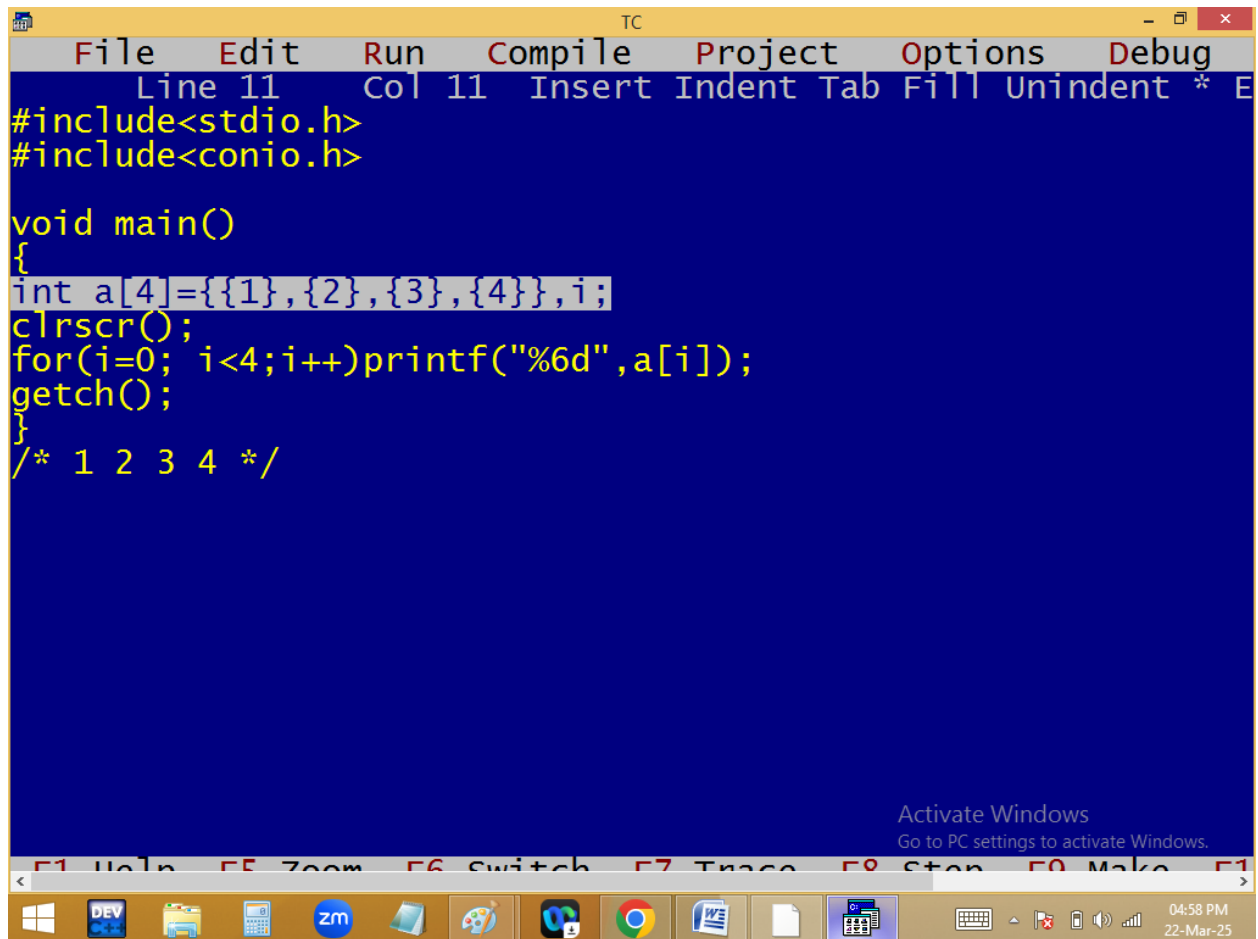

```
TC
File Edit Run Compile Project Options Debug
Line 11 Col 11 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>

void main()
{
int a[4]={1}, {2}, {3}, {4}, i;
clrscr();
for(i=0; i<4; i++)printf("%6d", a[i]);
getch();
}
/* 1 2 3 4 */

Activate Windows
Go to PC settings to activate Windows.
F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
```

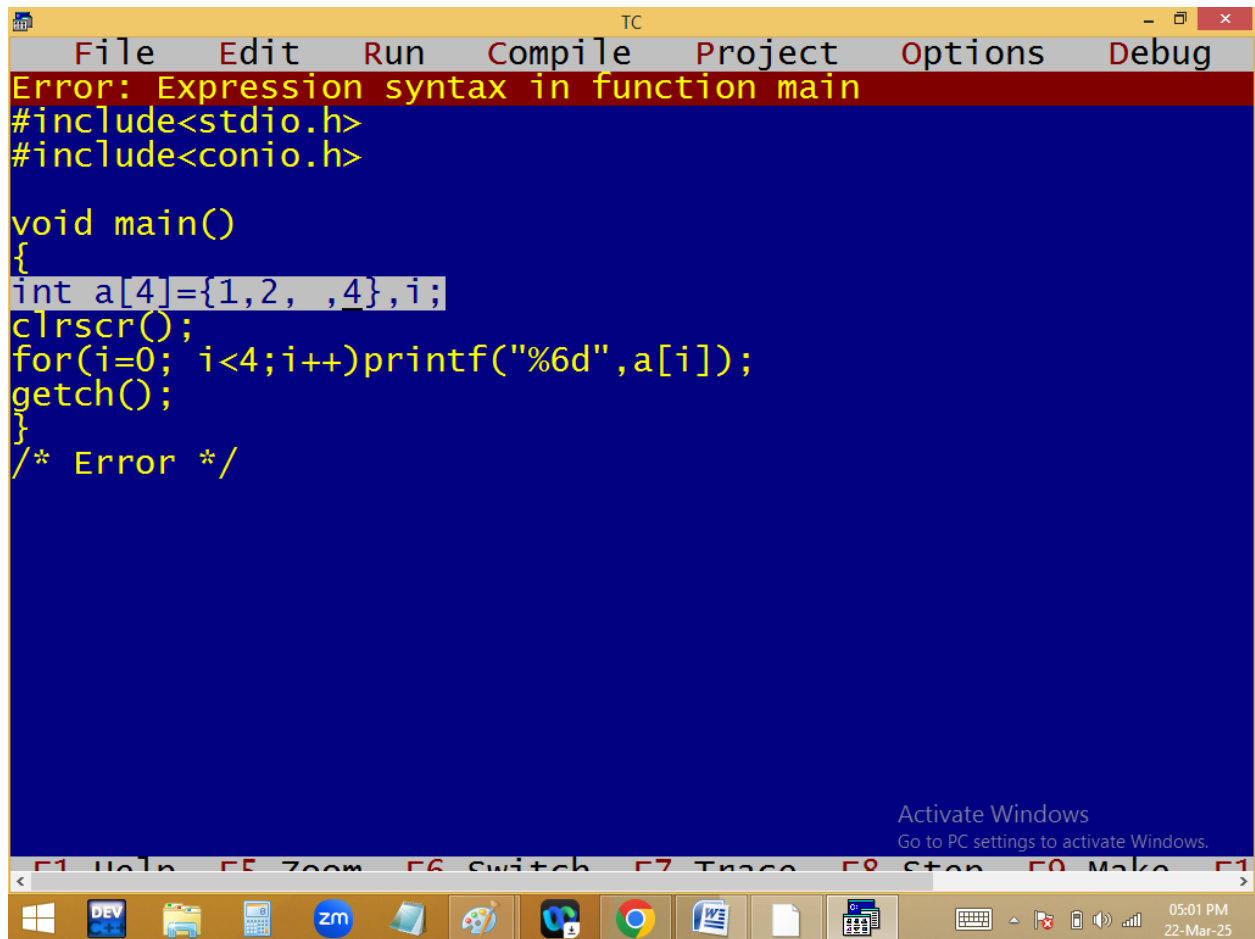


The image shows a screenshot of the Turbo C++ (TC) IDE. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error banner at the top of the code editor displays the message "Error: Expression syntax in function main". The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>

void main()
{
int a[4]={1,2, ,4},i;
clrscr();
for(i=0; i<4;i++)printf("%6d",a[i]);
getch();
}
/* Error */
```


The error is caused by an extra comma in the array initialization: `{1,2, ,4}`. The Windows taskbar at the bottom shows various application icons, including DEV, File Explorer, Calculator, Zoom, and others. The system clock in the bottom right corner indicates the time is 05:01 PM on 22-Mar-25. An "Activate Windows" watermark is visible in the bottom right corner of the window.

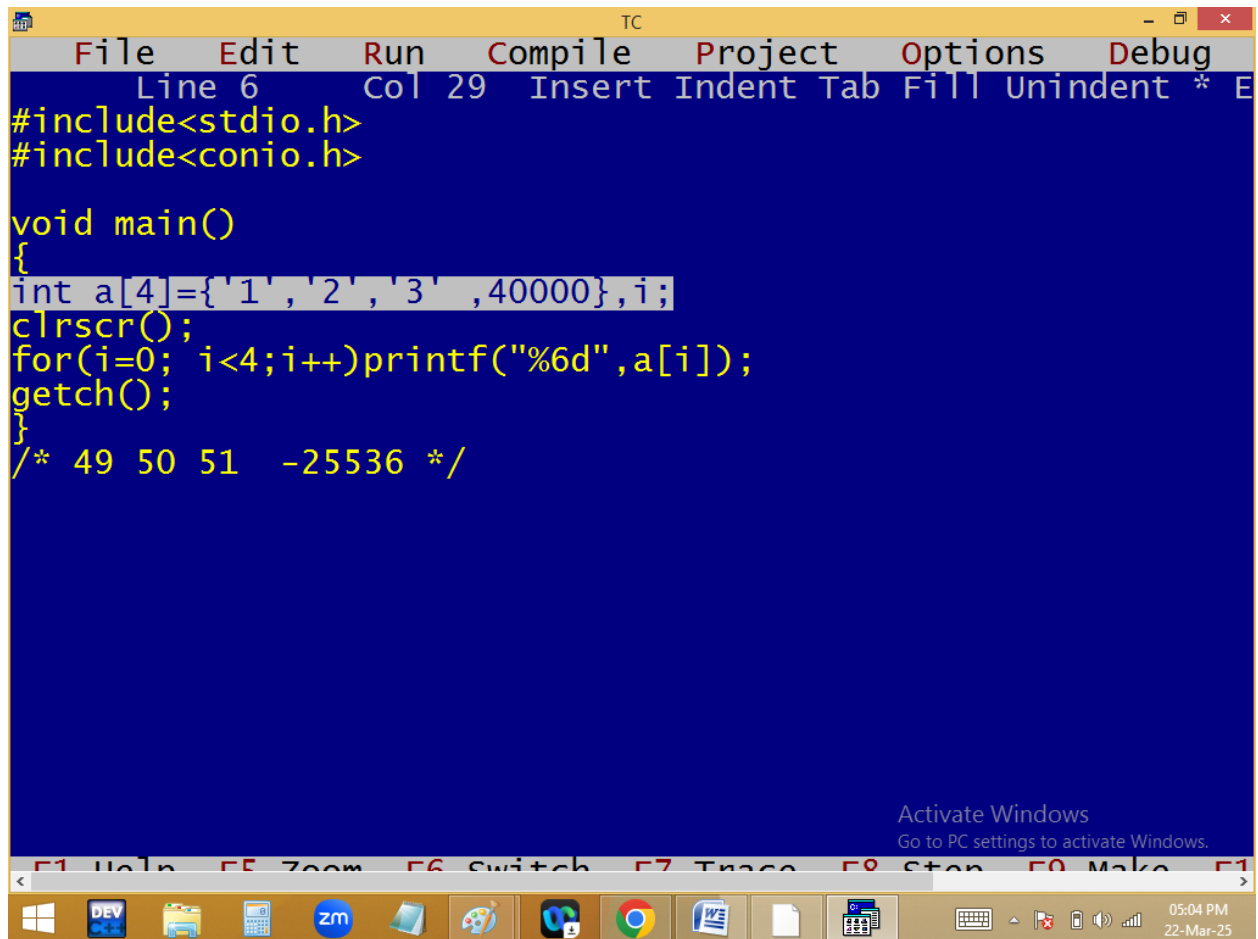

```
TC
File Edit Run Compile Project Options Debug
Line 6 Col 29 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>

void main()
{
int a[4]={'1','2','3',40000},i;
clrscr();
for(i=0; i<4;i++)printf("%6d",a[i]);
getch();
}
/* 49 50 51 -25536 */


Activate Windows
Go to PC settings to activate Windows.
F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
```

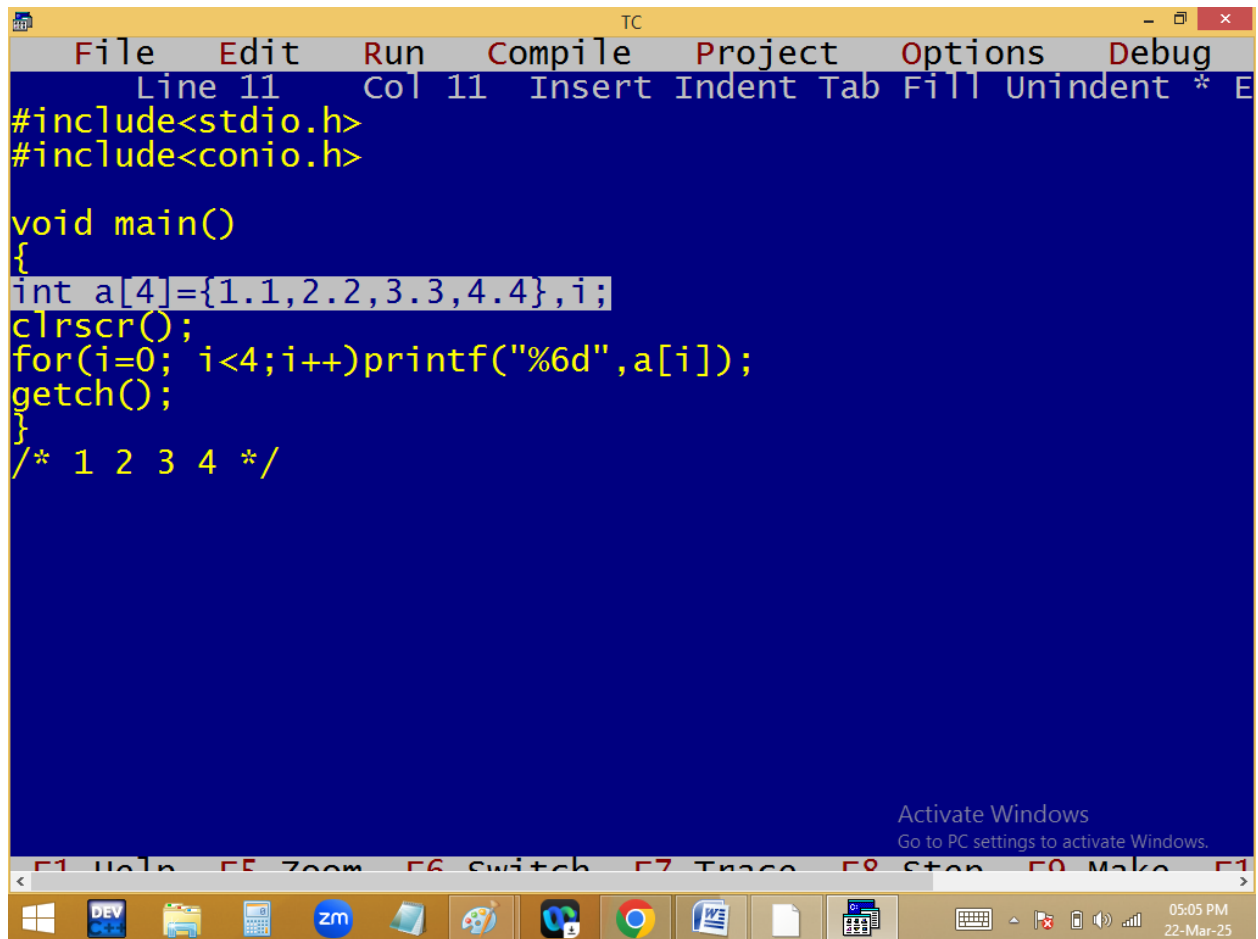

```
TC
File Edit Run Compile Project Options Debug
Line 11 Col 11 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>

void main()
{
int a[4]={1.1,2.2,3.3,4.4},i;
clrscr();
for(i=0; i<4;i++)printf("%6d",a[i]);
getch();
}
/* 1 2 3 4 */

Activate Windows
Go to PC settings to activate Windows.
F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
```

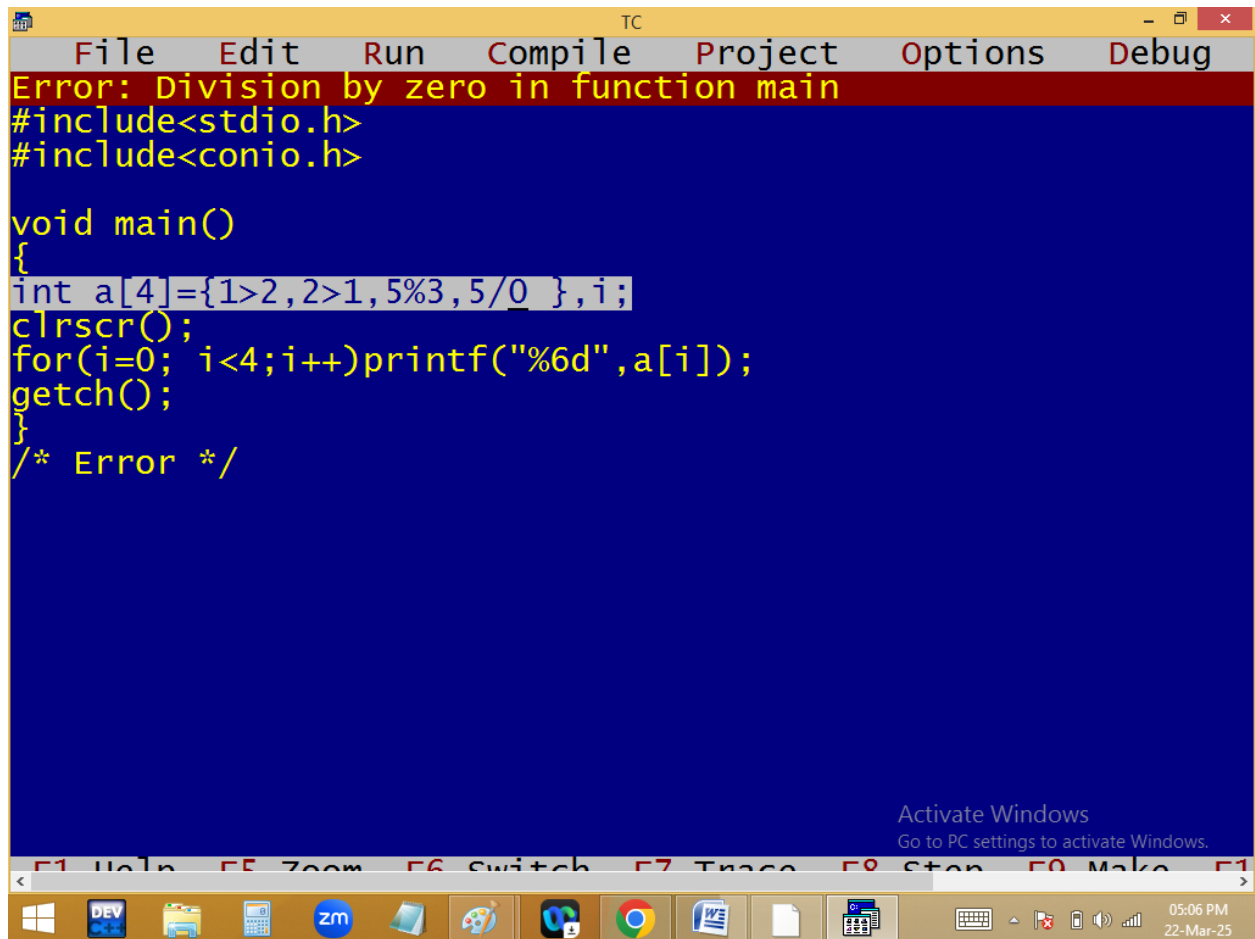

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error banner at the top of the code editor displays the message "Error: Division by zero in function main". The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>

void main()
{
int a[4]={1>2,2>1,5%3,5/0 },i;
clrscr();
for(i=0; i<4;i++)printf("%6d",a[i]);
getch();
}
/* Error */
```

The line `int a[4]={1>2,2>1,5%3,5/0 },i;` is highlighted in blue. The IDE interface includes a status bar at the bottom with function key shortcuts (F1 Help, F5 Zoom, F6 Switch, F7 Trace, F8 Stop, F9 Make, F10) and a Windows taskbar at the very bottom showing various application icons and the system clock (05:06 PM, 22-Mar-25). An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.

TC

File Edit Run Compile Project Options Debug

Error: Illegal use of floating point in function main


```
#include<stdio.h>
#include<conio.h>

void main()
{
int a[4]={1>2,2>1,5%3,5%2.0 },i;
clrscr();
for(i=0; i<4;i++)printf("%6d",a[i]);
getch();
}
/* Error */
```

Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10


05:07 PM
22-Mar-25

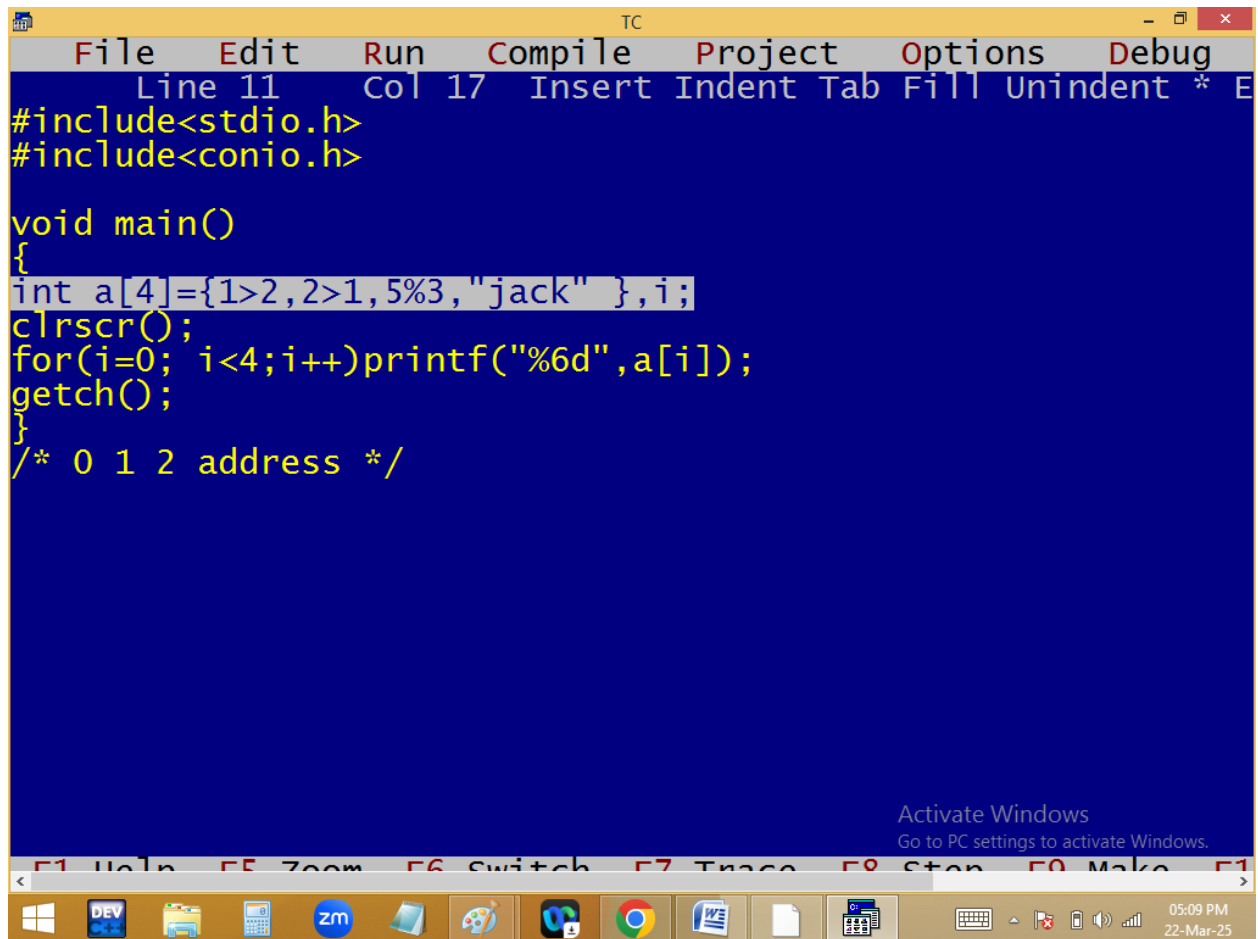

```
TC
File Edit Run Compile Project Options Debug
Line 11 Col 17 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>

void main()
{
int a[4]={1>2,2>1,5%3,"jack" },i;
clrscr();
for(i=0; i<4;i++)printf("%6d",a[i]);
getch();
}
/* 0 1 2 address */

Activate Windows
Go to PC settings to activate Windows.
F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
```

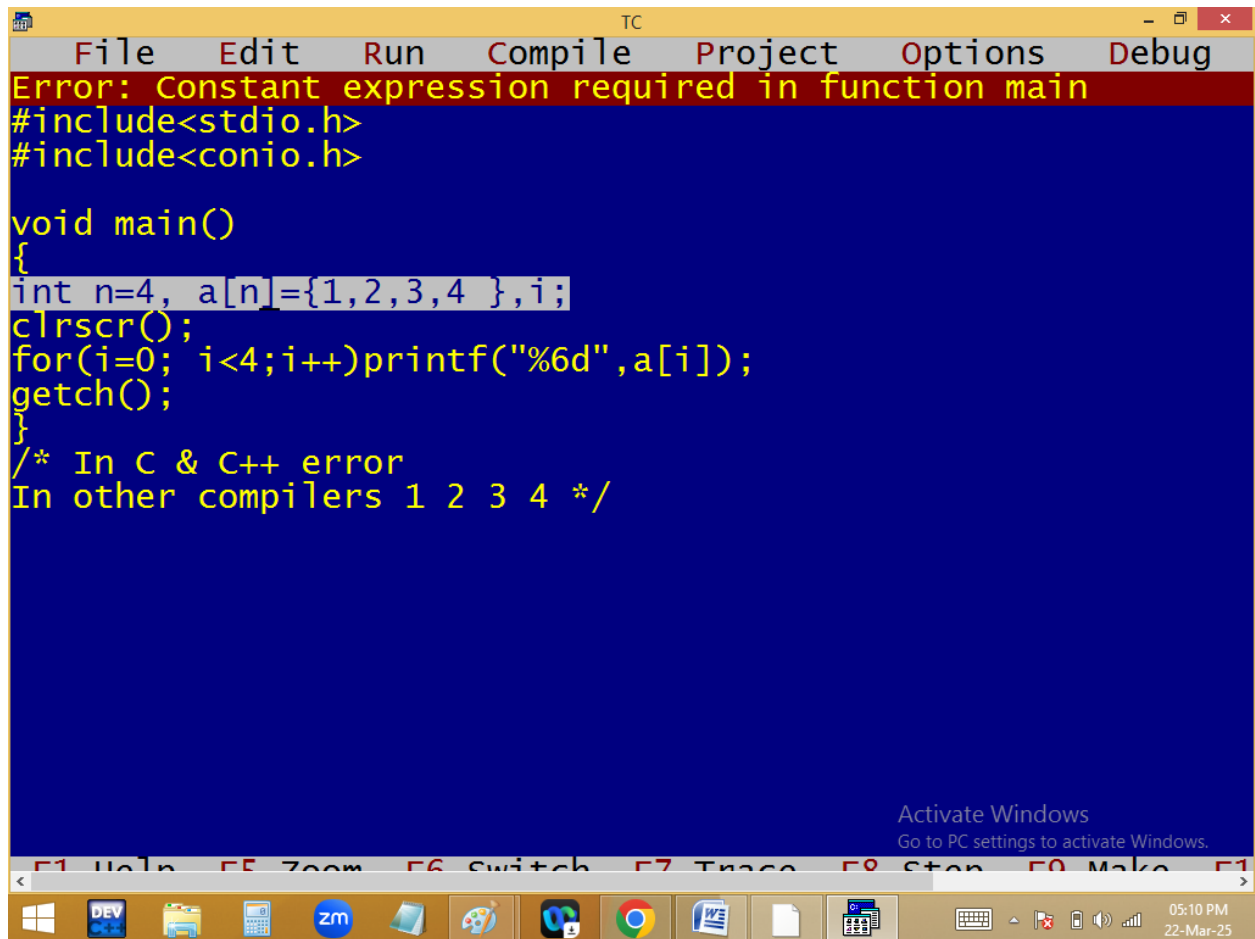


The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error message banner at the top states: "Error: Constant expression required in function main". The code editor has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>

void main()
{
    int n=4, a[n]={1,2,3,4 },i;
    clrscr();
    for(i=0; i<4;i++)printf("%6d",a[i]);
    getch();
}
/* In C & C++ error
In other compilers 1 2 3 4 */
```

At the bottom of the window, there is a status bar with function key shortcuts: F1 Help, F5 Zoom, F6 Switch, F7 Trace, F8 Stop, F9 Make, and F10. An "Activate Windows" watermark is visible in the bottom right corner of the IDE area, with the text "Go to PC settings to activate Windows." The Windows taskbar at the very bottom shows various application icons (including DEV, File Explorer, Calculator, Zoom, and others) and the system clock indicating 05:10 PM on 22-Mar-25.

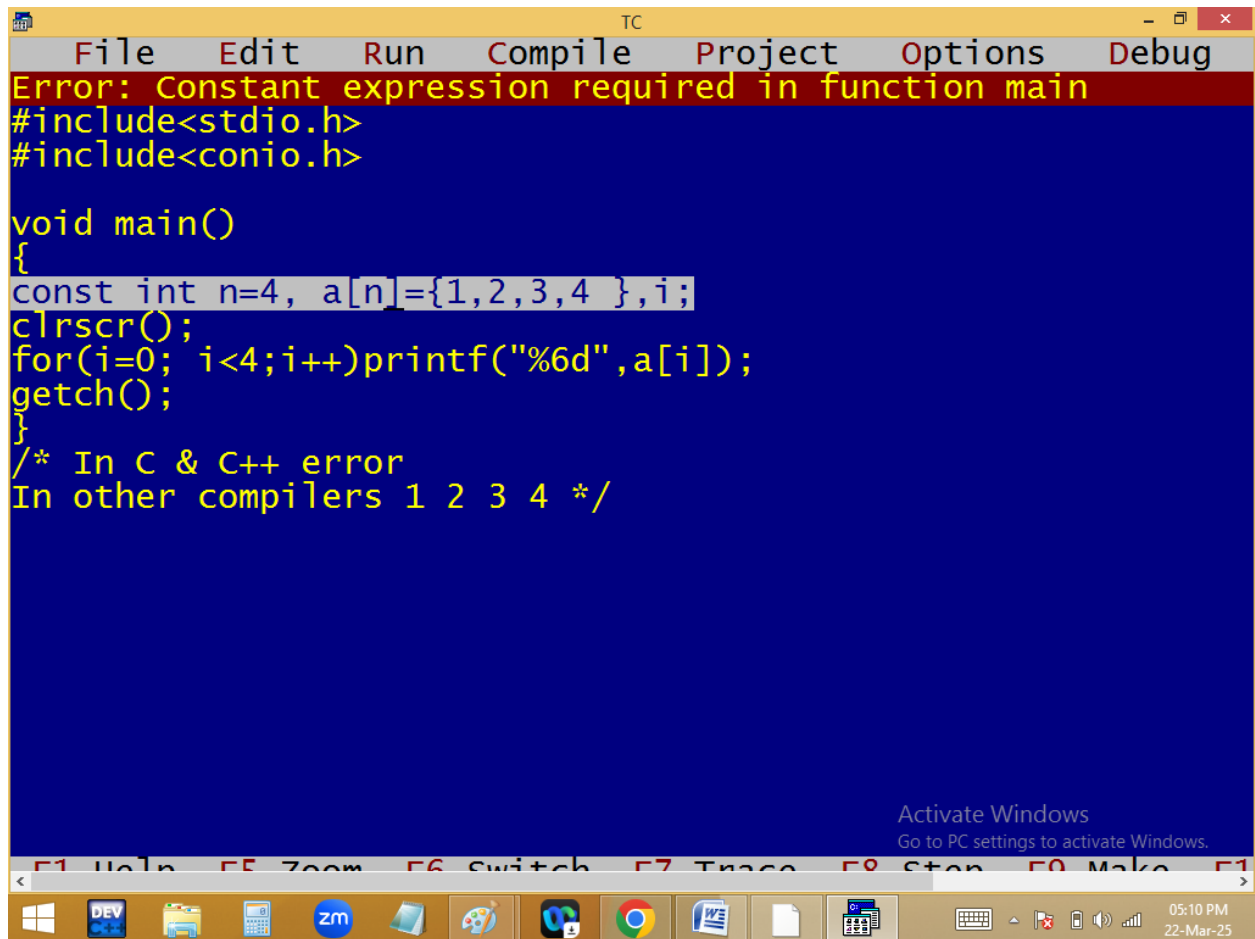


The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error message banner at the top states: "Error: Constant expression required in function main". The code editor has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>

void main()
{
const int n=4, a[n]={1,2,3,4 },i;
clrscr();
for(i=0; i<4;i++)printf("%6d",a[i]);
getch();
}
/* In C & C++ error
In other compilers 1 2 3 4 */
```

At the bottom of the IDE window, there is a status bar with function key shortcuts: F1 Help, F5 Zoom, F6 Switch, F7 Trace, F8 Stop, F9 Make, and F10. Below the IDE window is the Windows taskbar, which includes icons for Windows, DEV, File Explorer, Calculator, Zoom, Paint, VS Code, Chrome, Word, and a folder. The system tray on the right shows the date and time: 05:10 PM, 22-Mar-25. An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.

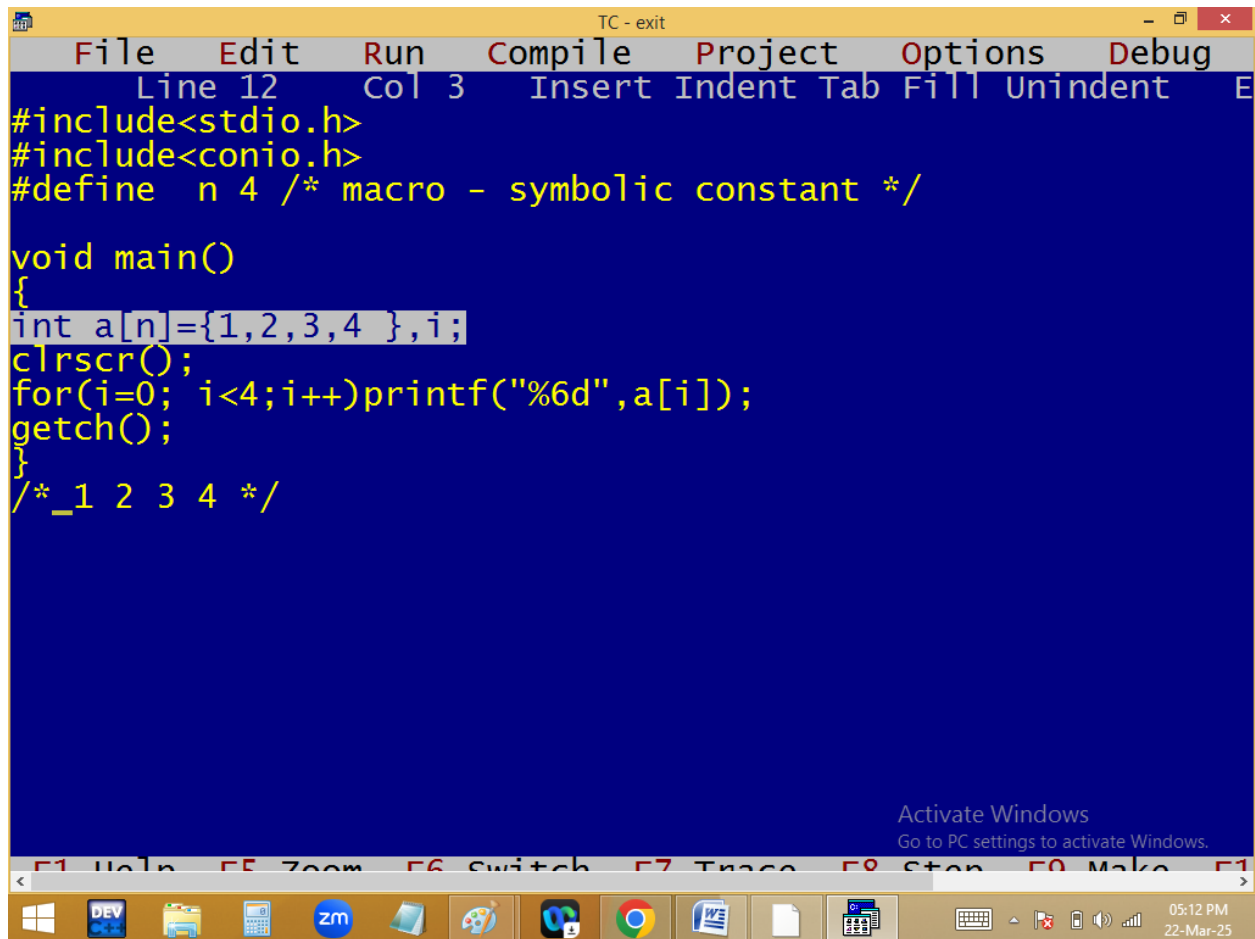


The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC - exit". The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates "Line 12 Col 3" and lists actions: Insert, Indent, Tab, Fill, Unindent, and E. The code editor has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
#define n 4 /* macro - symbolic constant */


void main()
{
int a[n]={1,2,3,4 },i;
clrscr();
for(i=0; i<4;i++)printf("%6d",a[i]);
getch();
}
/*_1 2 3 4 */
```

The line "int a[n]={1,2,3,4 },i;" is highlighted. At the bottom of the code editor, there is a message: "Activate Windows Go to PC settings to activate Windows." The bottom status bar shows function key shortcuts: F1 Help, F5 Zoom, F6 Switch, F7 Trace, F8 Stop, F9 Make, and F10. The Windows taskbar at the very bottom includes icons for Windows, DEV, File Explorer, Calculator, Zoom, Paint, VS Code, Chrome, Word, and a folder. The system clock shows "05:12 PM 22-Mar-25".

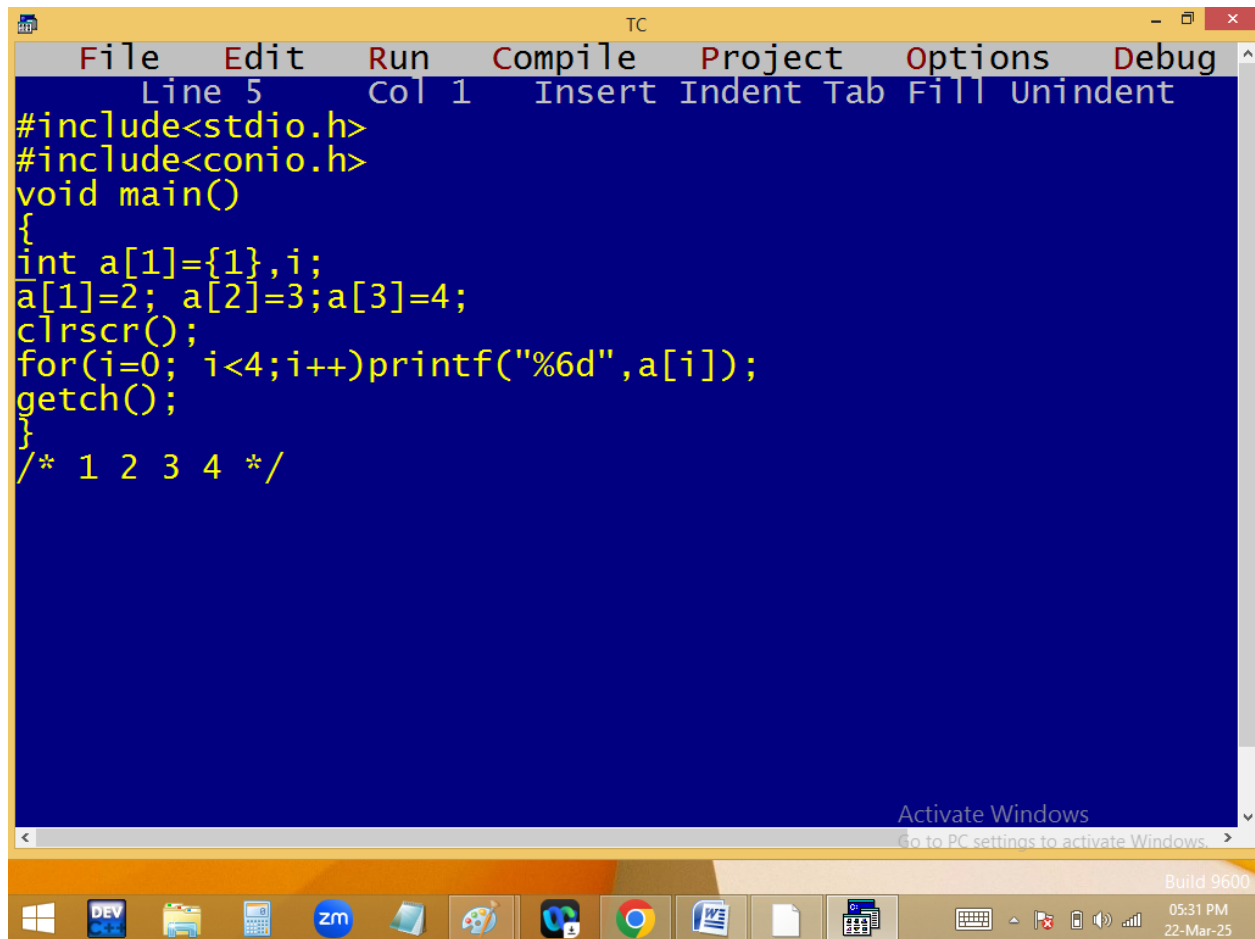

```
TC
File Edit Run Compile Project Options Debug
Line 5 Col 1 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
int a[5]={1},i;
a[1]=2; a[2]=3;a[3]=4;
clrscr();
for(i=0; i<5;i++)printf("%6d",a[i]);
getch();
}
/* 1 2 3 4 5 */


Activate Windows
Go to PC settings to activate Windows.
Build 9600
05:31 PM
22-Mar-25
```

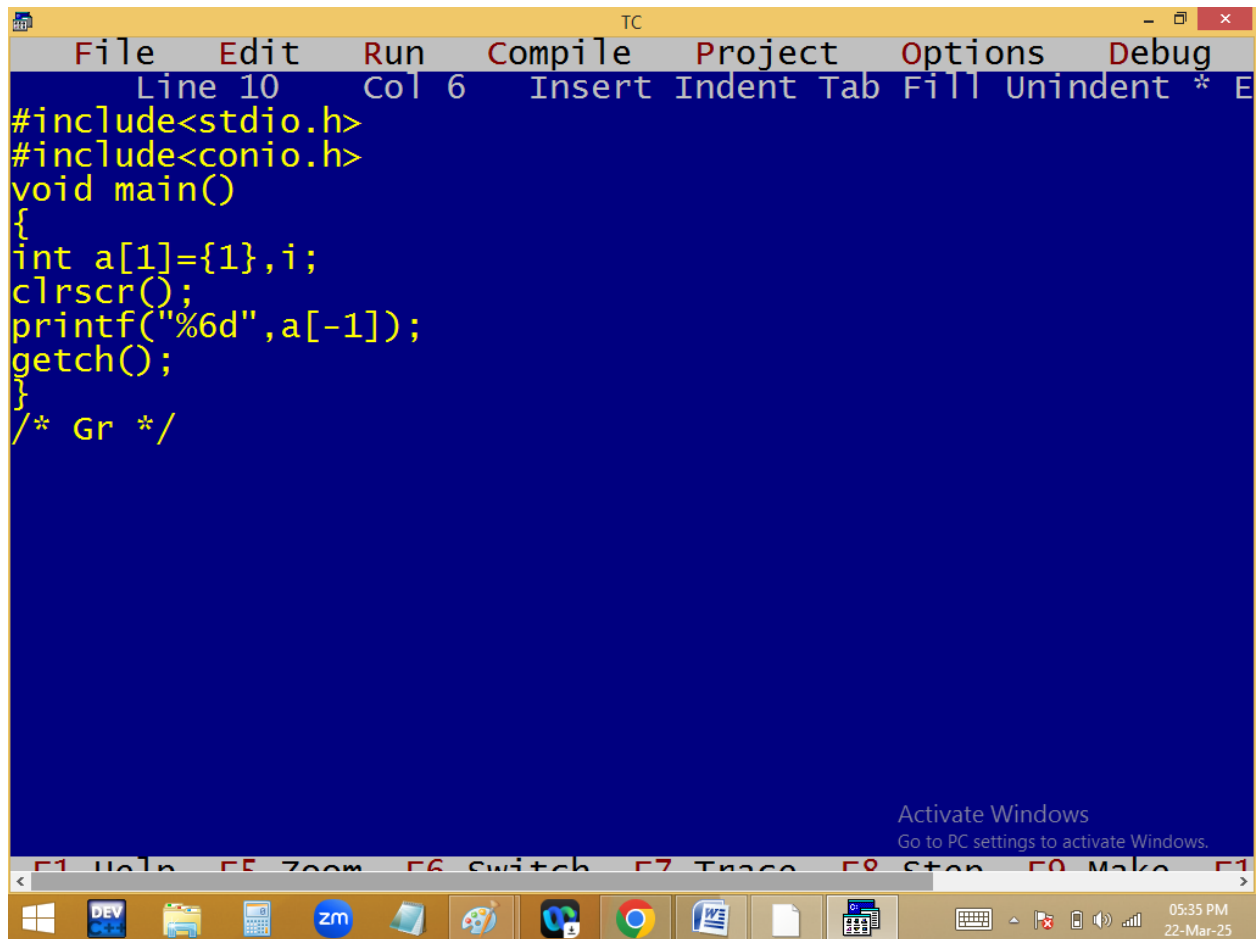

The image shows a screenshot of the Turbo C++ (TC) IDE. The main window has a dark blue background with yellow text. The menu bar at the top includes File, Edit, Run, Compile, Project, Options, and Debug. Below the menu bar, the status bar shows 'Line 10', 'Col 6', and 'Insert Indent Tab Fill Unindent * E'. The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[1]={1},i;
clrscr();
printf("%6d",a[-1]);
getch();
}
/* Gr */
```


At the bottom of the IDE window, there is a text box that says 'Activate Windows' and 'Go to PC settings to activate Windows.' Below the IDE window, the Windows taskbar is visible, showing various icons including the Start button, DEV, File Explorer, Calculator, Zoom, Paint, VS Code, Chrome, Word, and a folder icon. The system tray on the right shows the time as 05:35 PM and the date as 22-Mar-25.

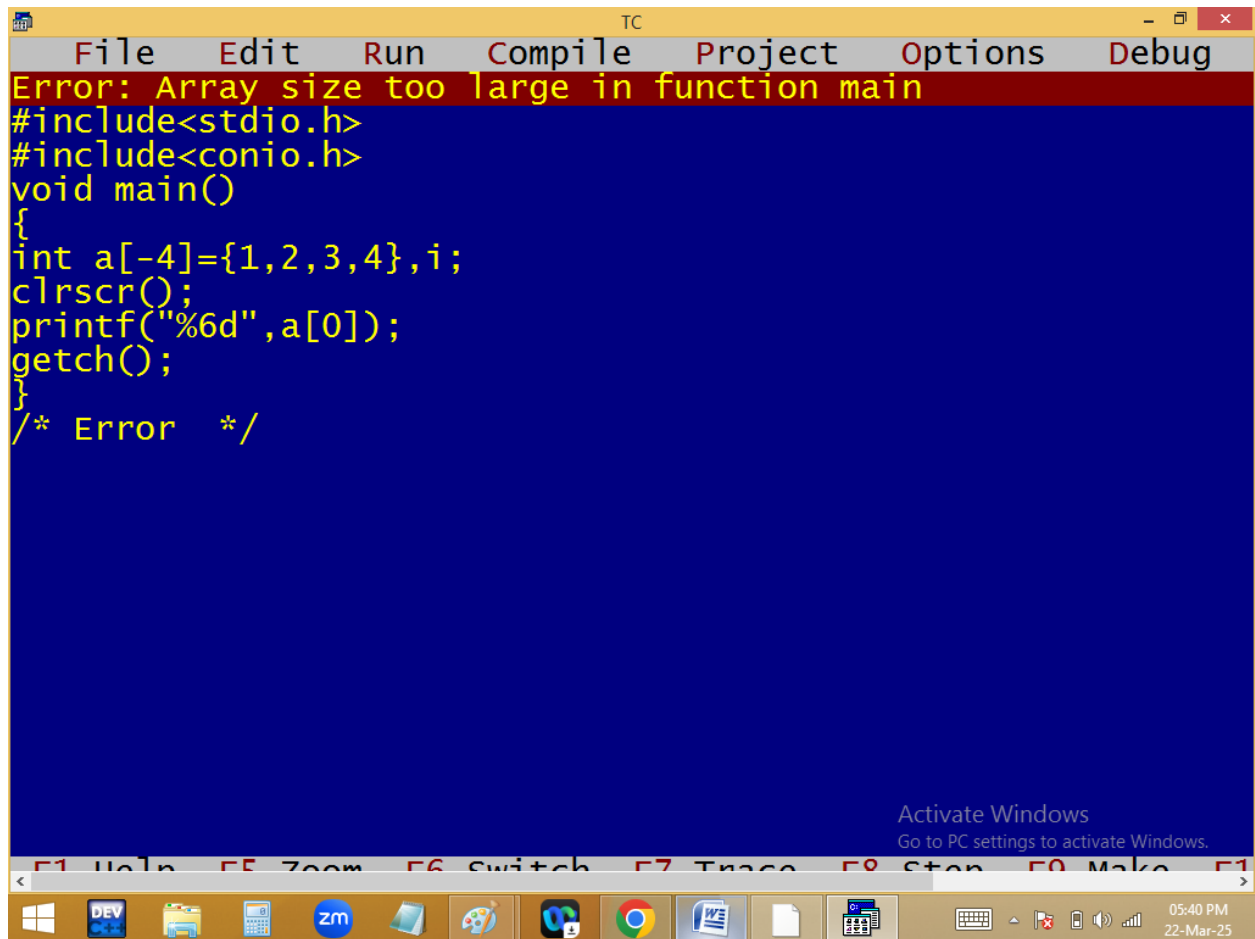

The image shows a screenshot of the Turbo C++ (TC) IDE. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error message banner at the top of the editor area states: "Error: Array size too large in function main". The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[-4]={1,2,3,4},i;
clrscr();
printf("%6d",a[0]);
getch();
}
/* Error */
```


At the bottom of the window, there is a taskbar with various application icons (Windows logo, DEV, folder, calculator, ZOOM, paint, VS Code, Chrome, Word, Notepad, and a calculator). The system tray on the right shows the date and time: "05:40 PM 22-Mar-25". An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.

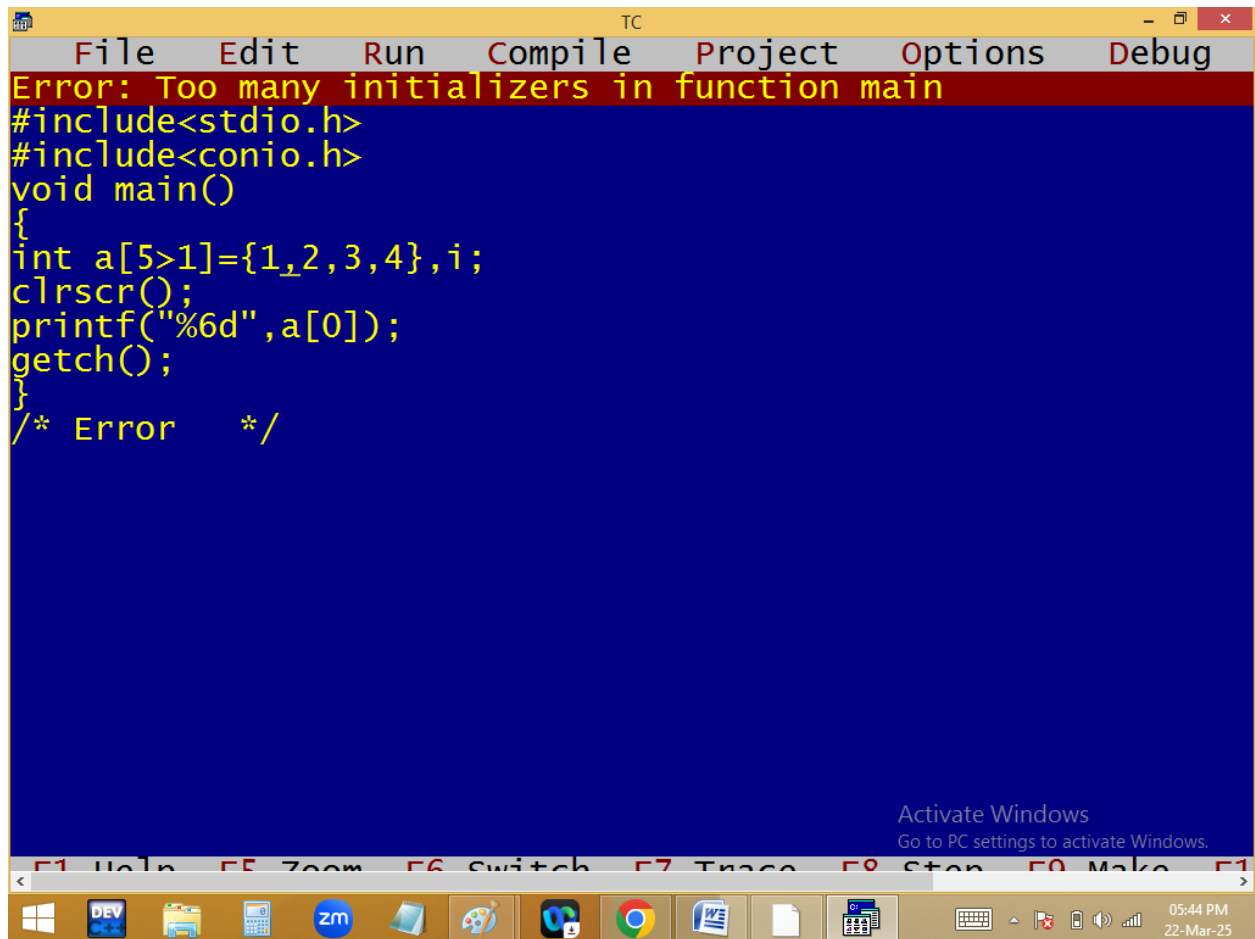

The image shows a screenshot of the Turbo C++ (TC) IDE. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error banner at the top of the editor window states "Error: Too many initializers in function main". The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a[5>1]={1,2,3,4},i;
clrscr();
printf("%6d",a[0]);
getch();
}
/* Error */
```

At the bottom of the IDE, there is a status bar with function key shortcuts: F1 Help, F5 Zoom, F6 Switch, F7 Trace, F8 Stop, F9 Make, and F10. Below the IDE window, the Windows taskbar is visible, showing icons for Windows, DEV, File Explorer, Calculator, Zoom, Paint, VS Code, Chrome, Word, and a folder. The system tray on the right shows the time as 05:44 PM and the date as 22-Mar-25. An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.

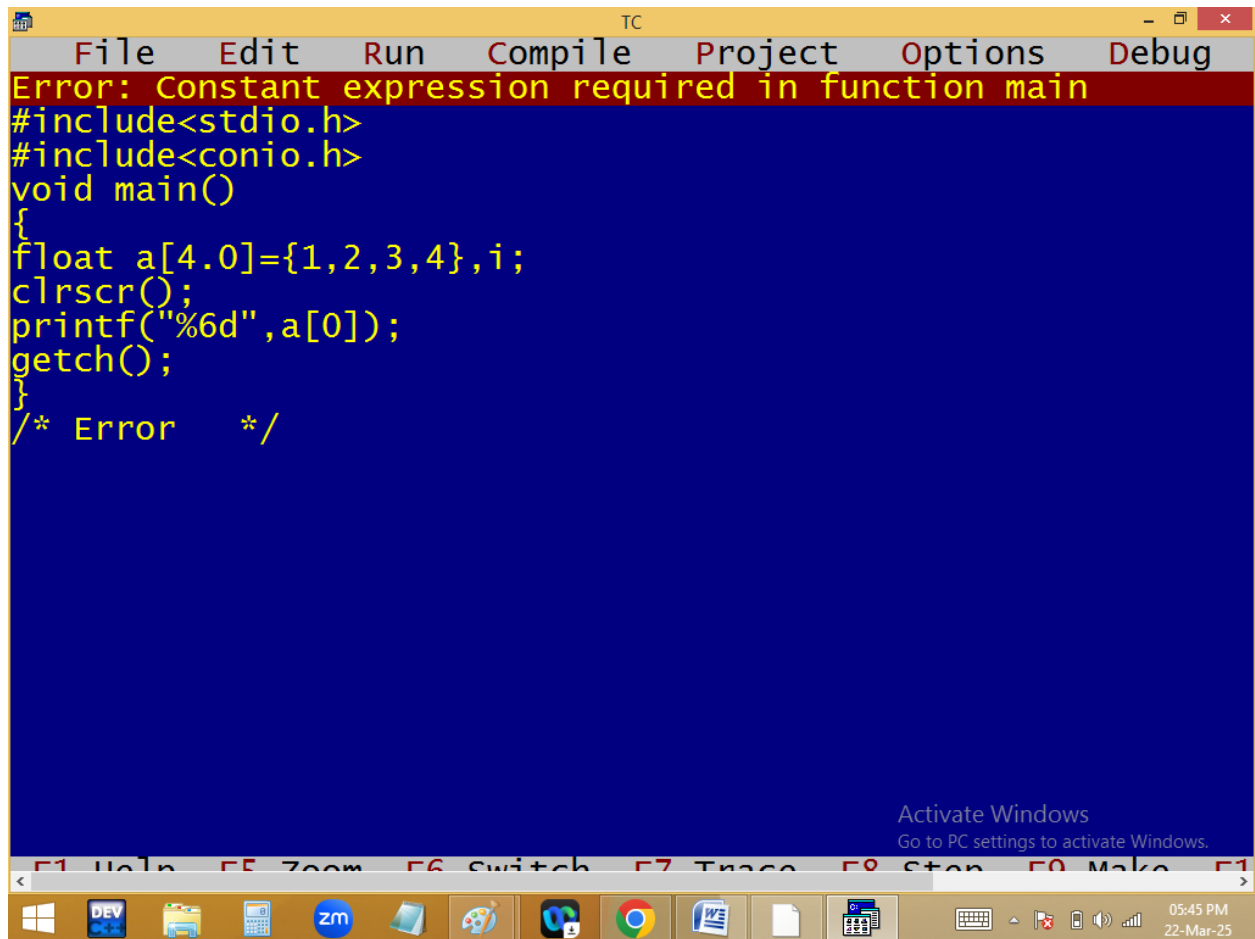

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error message banner at the top reads "Error: Constant expression required in function main". The code editor has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
float a[4.0]={1,2,3,4},i;
clrscr();
printf("%6d",a[0]);
getch();
}
/* Error */
```

At the bottom of the IDE, there is a status bar with function key shortcuts: F1 Help, F5 Zoom, F6 Switch, F7 Trace, F8 Stop, F9 Make, and F10. An "Activate Windows" watermark is visible in the bottom right corner of the IDE window, with the text "Go to PC settings to activate Windows." Below the IDE window is the Windows taskbar, which includes icons for Windows, DEV, File Explorer, Calculator, Zoom, Paint, VS Code, Chrome, Word, and a folder icon. The system tray on the right shows the date and time as "05:45 PM 22-Mar-25".