



```
TC
File Edit Run Compile Project Options Debug
Line 9 Col 31 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("%d\n", 5 && 5.5 );
printf("%d\n", 'a' && 0 );
printf("%d\n", 0 || '0' );
printf("%d\n", !0 && !0.1 ); _
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

11:25 AM
07-Feb-25

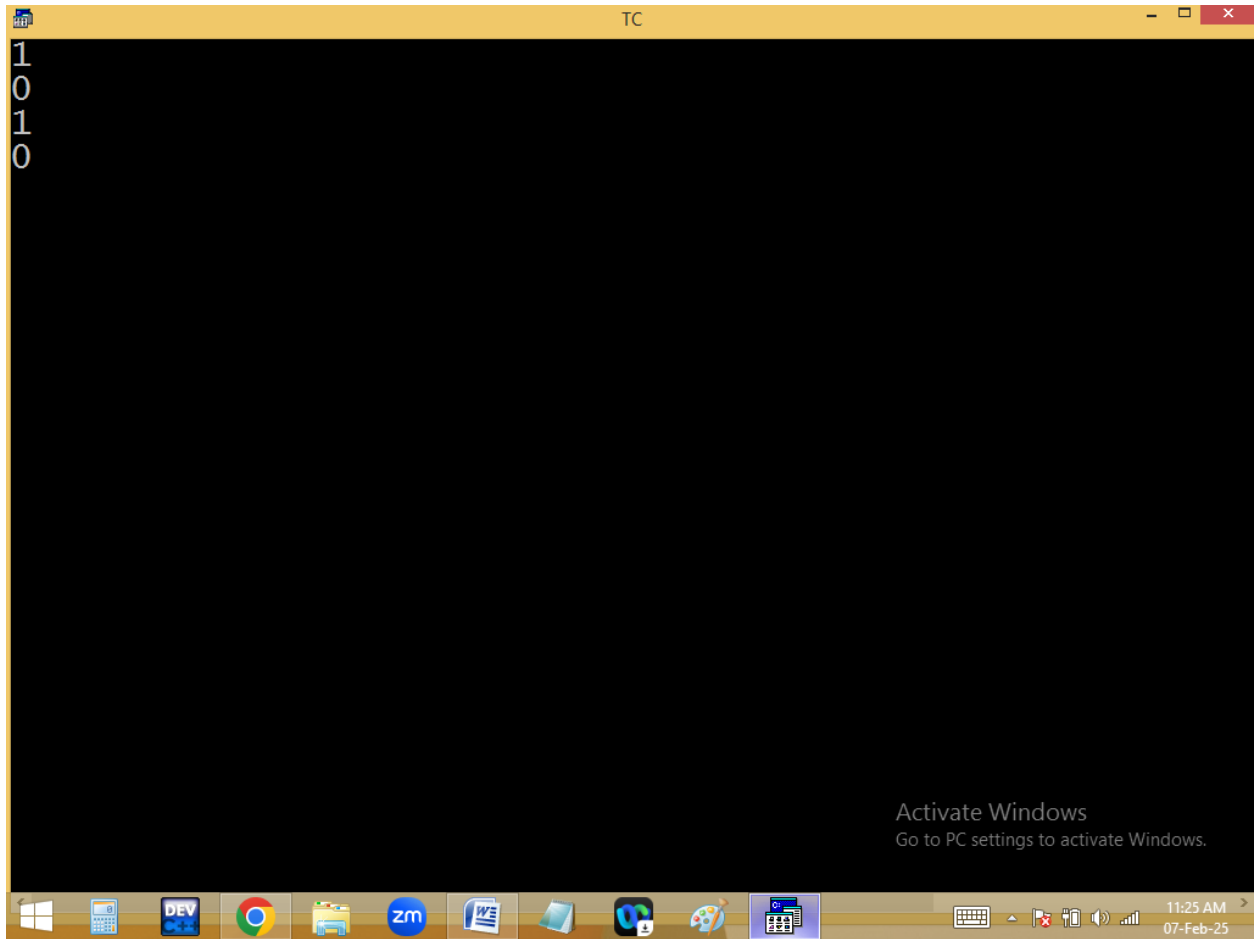

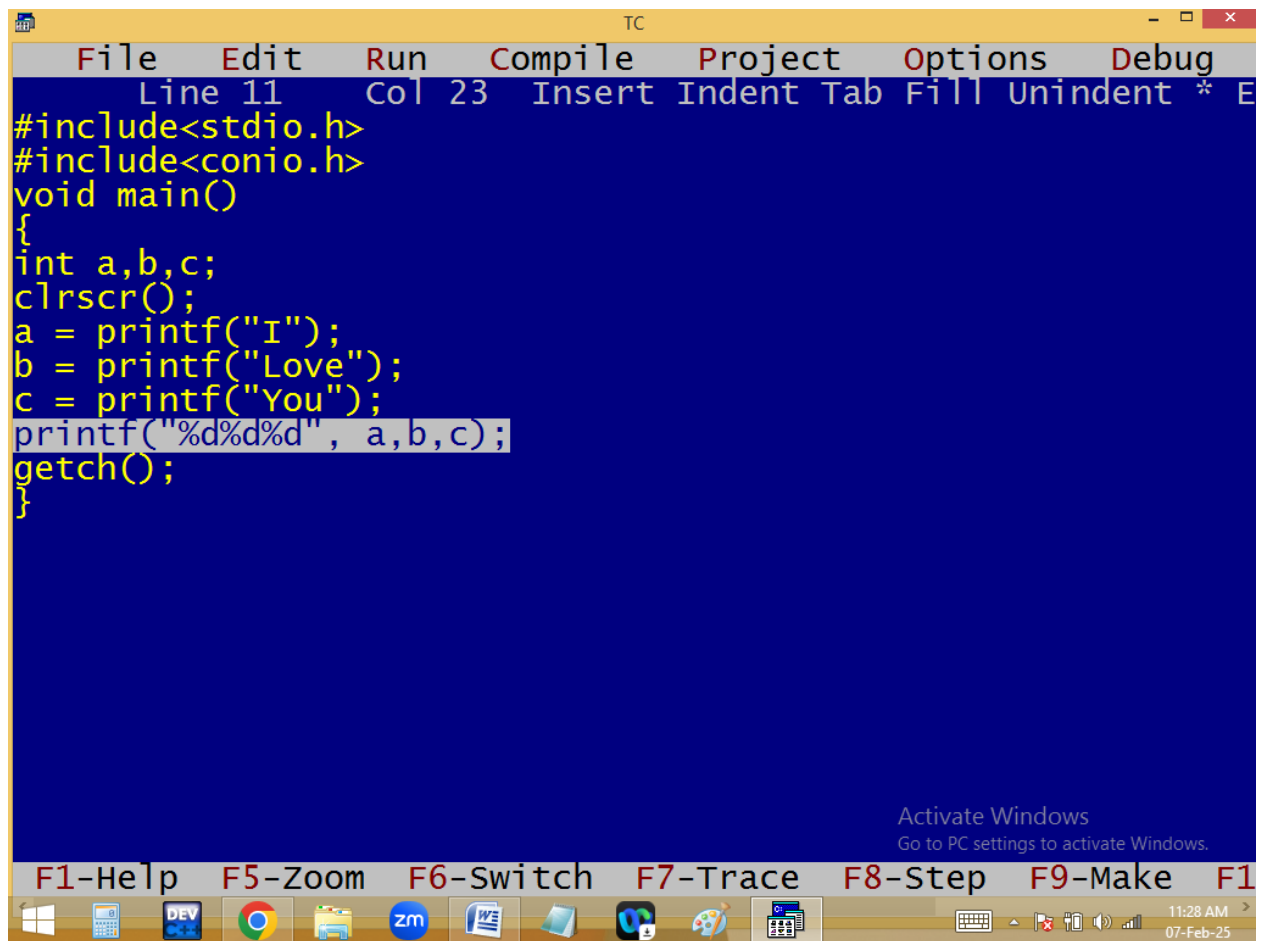



```
TC
File Edit Run Compile Project Options Debug
Line 11 Col 23 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a,b,c;
clrscr();
a = printf("I");
b = printf("Love");
c = printf("You");
printf("%d%d%d", a,b,c);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Exit

11:28 AM
07-Feb-25

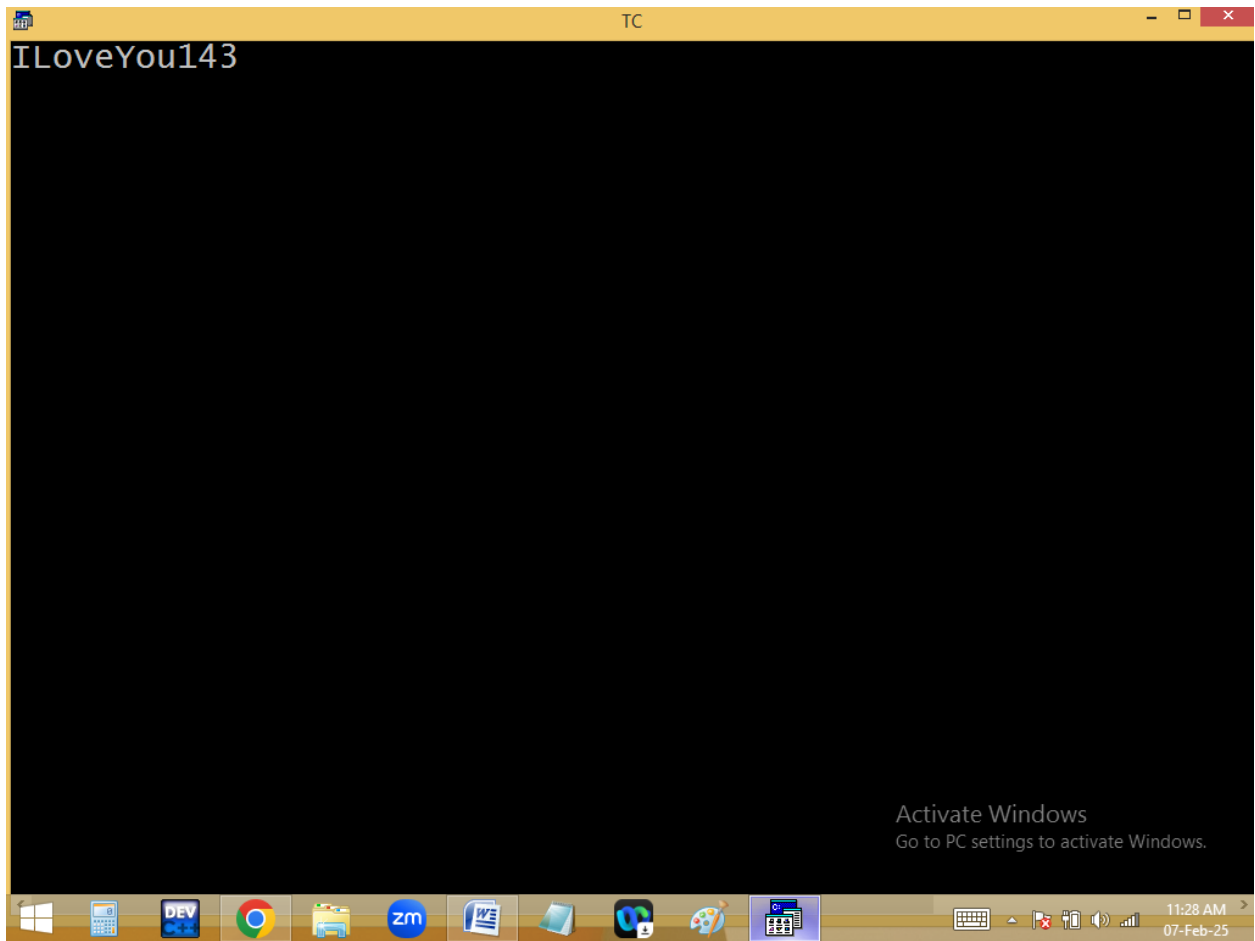

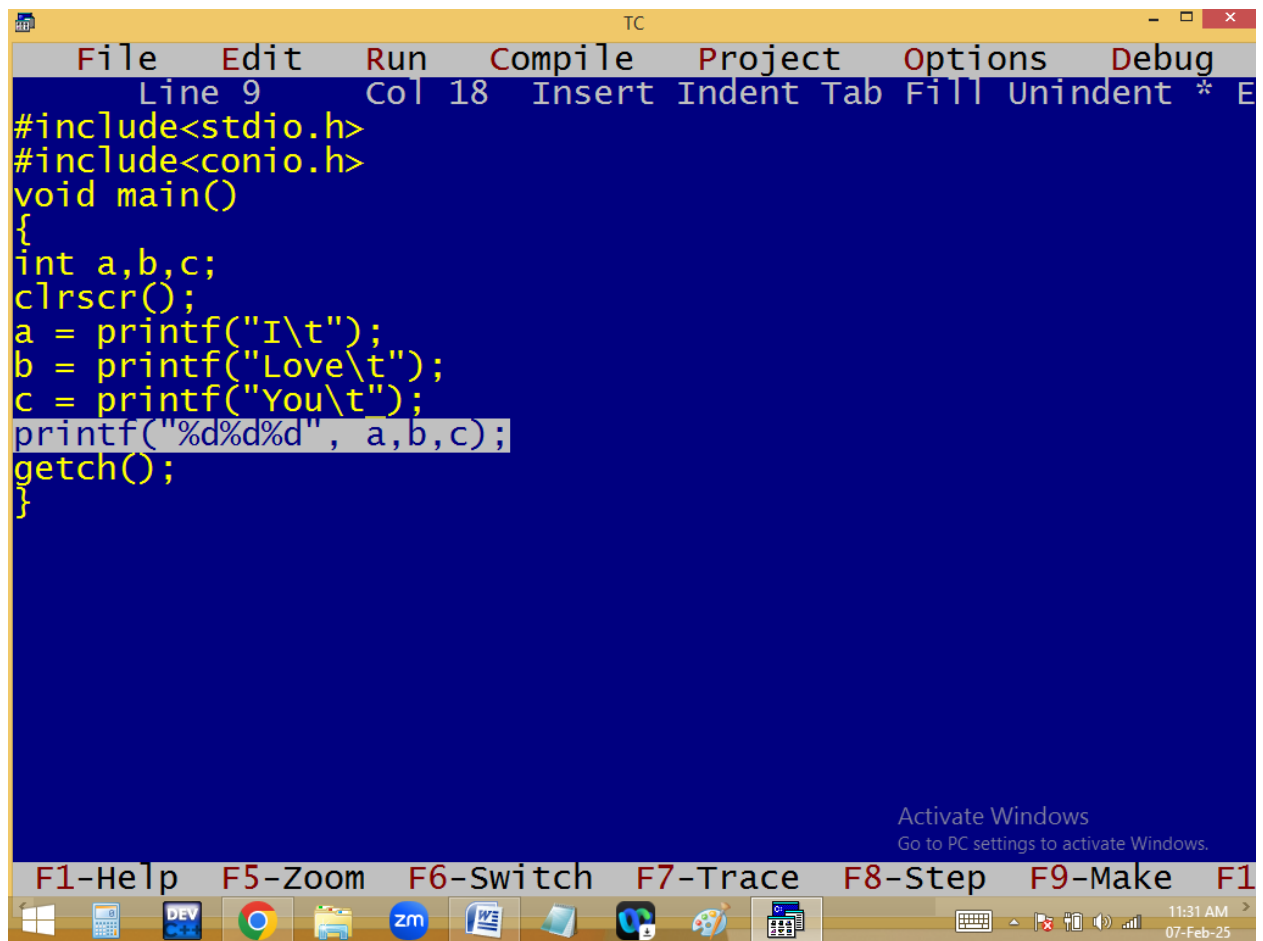


```
TC
File Edit Run Compile Project Options Debug
Line 9 Col 18 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a,b,c;
clrscr();
a = printf("I\t");
b = printf("Love\t");
c = printf("You\t");
printf("%d%d%d", a,b,c);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

11:31 AM
07-Feb-25



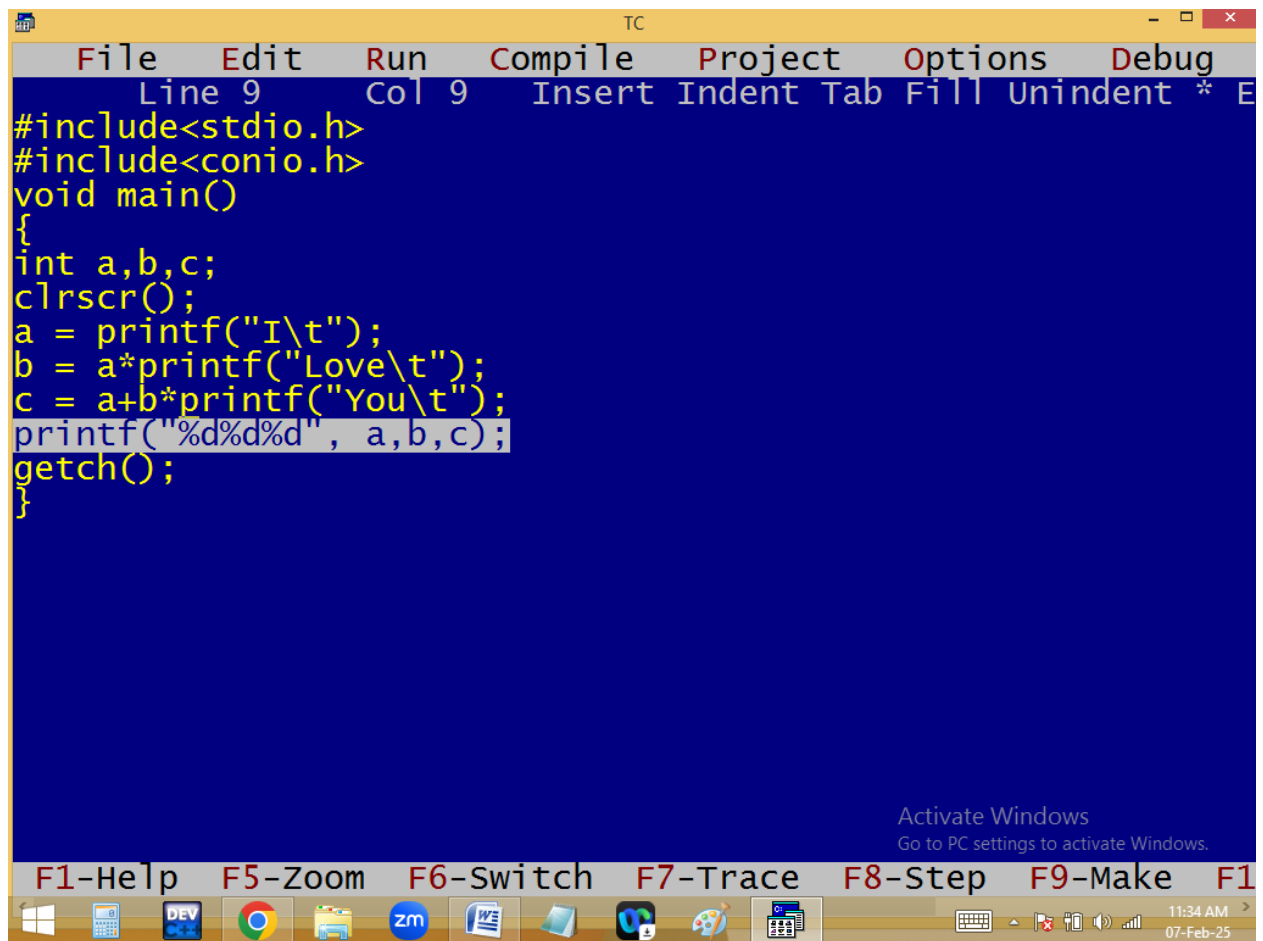



```
TC
File Edit Run Compile Project Options Debug
Line 9 Col 9 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a,b,c;
clrscr();
a = printf("I\t");
b = a*printf("Love\t");
c = a+b*printf("You\t");
printf("%d%d%d", a,b,c);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Exit

11:34 AM
07-Feb-25

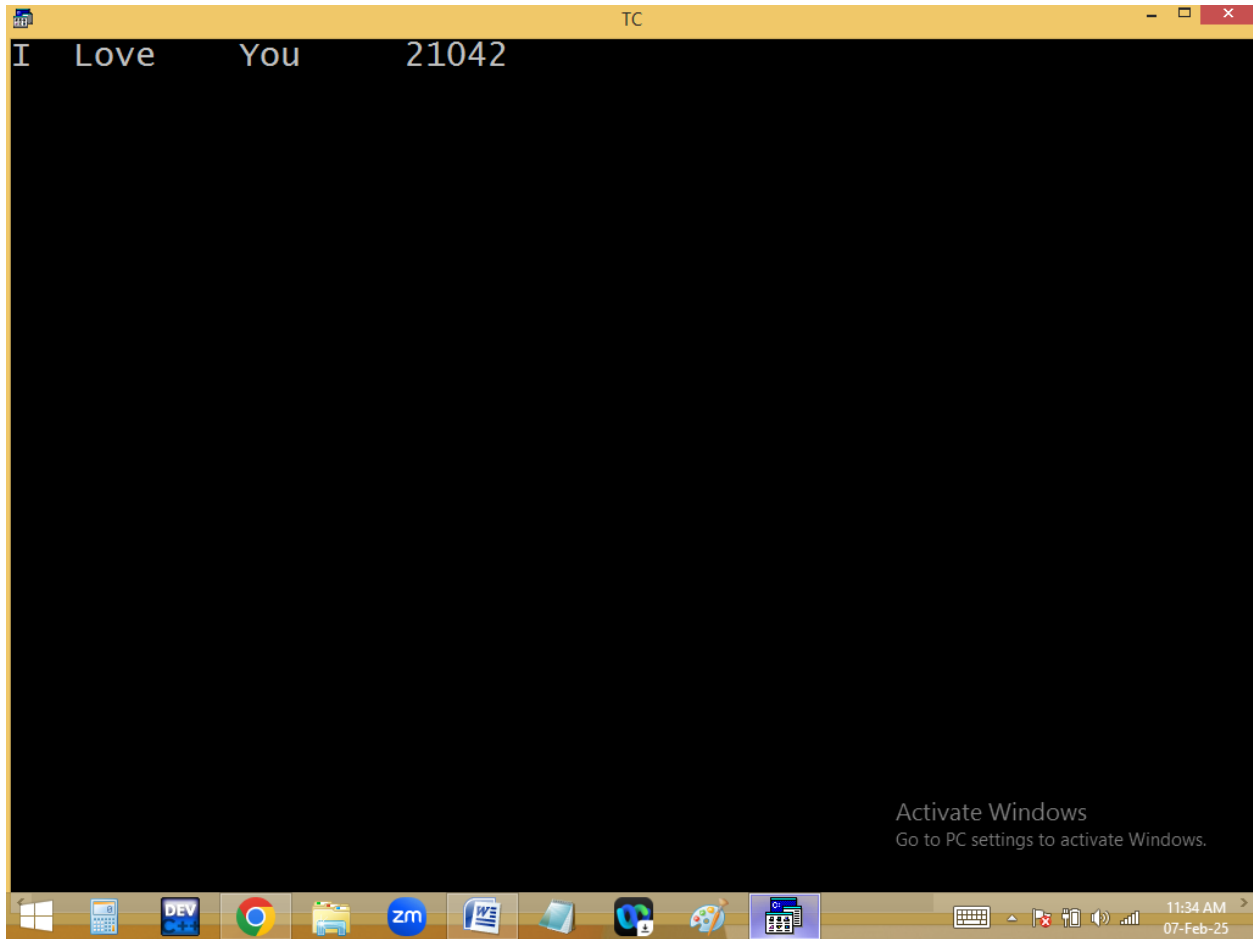


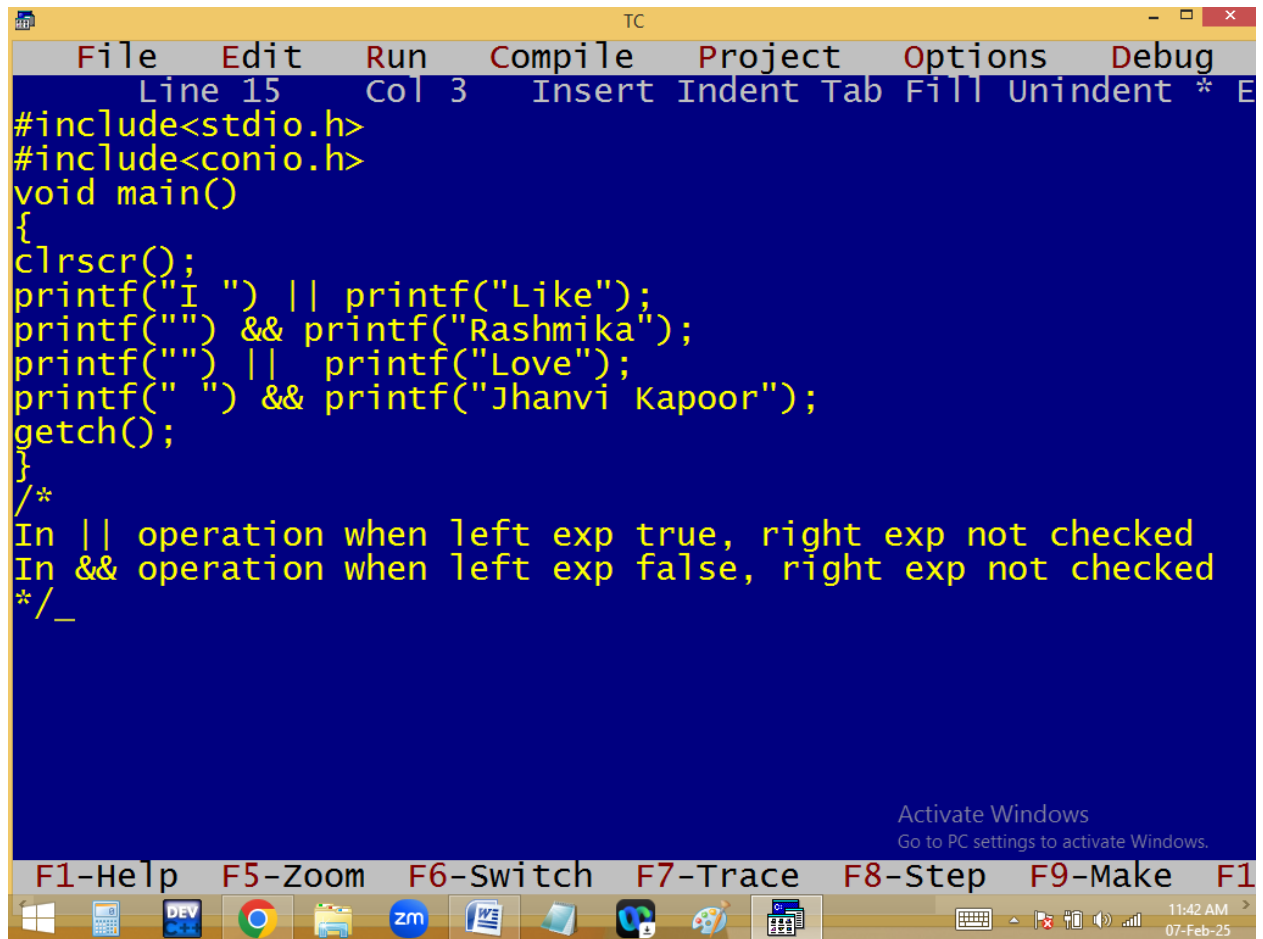


```
TC
File Edit Run Compile Project Options Debug
Line 15 Col 3 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("I ") || printf("Like");
printf("") && printf("Rashmika");
printf("") || printf("Love");
printf(" ") && printf("Jhanvi Kapoor");
getch();
}
/*
In || operation when left exp true, right exp not checked
In && operation when left exp false, right exp not checked
*/_

Activate Windows
Go to PC settings to activate Windows.


F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run
11:42 AM
07-Feb-25
```

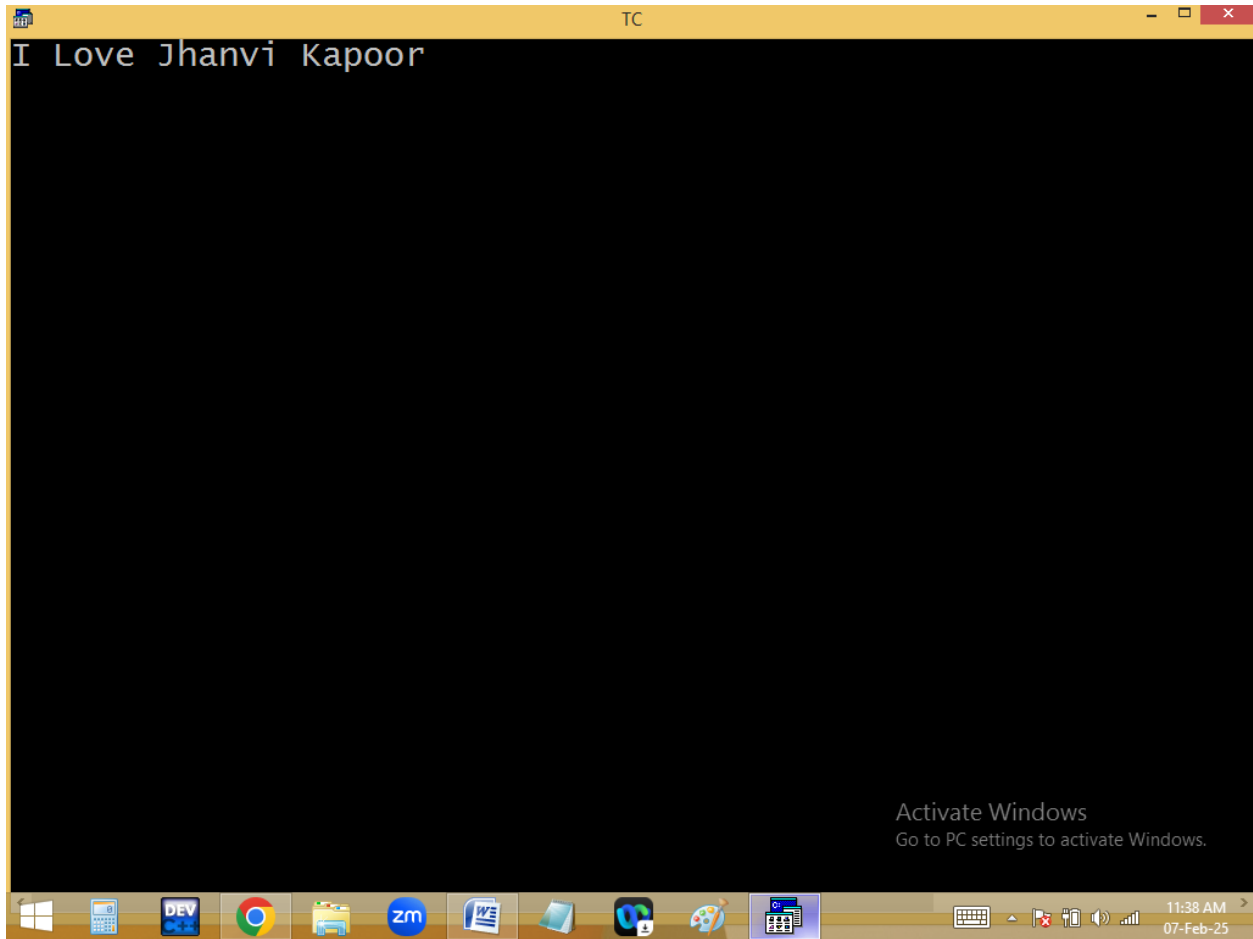


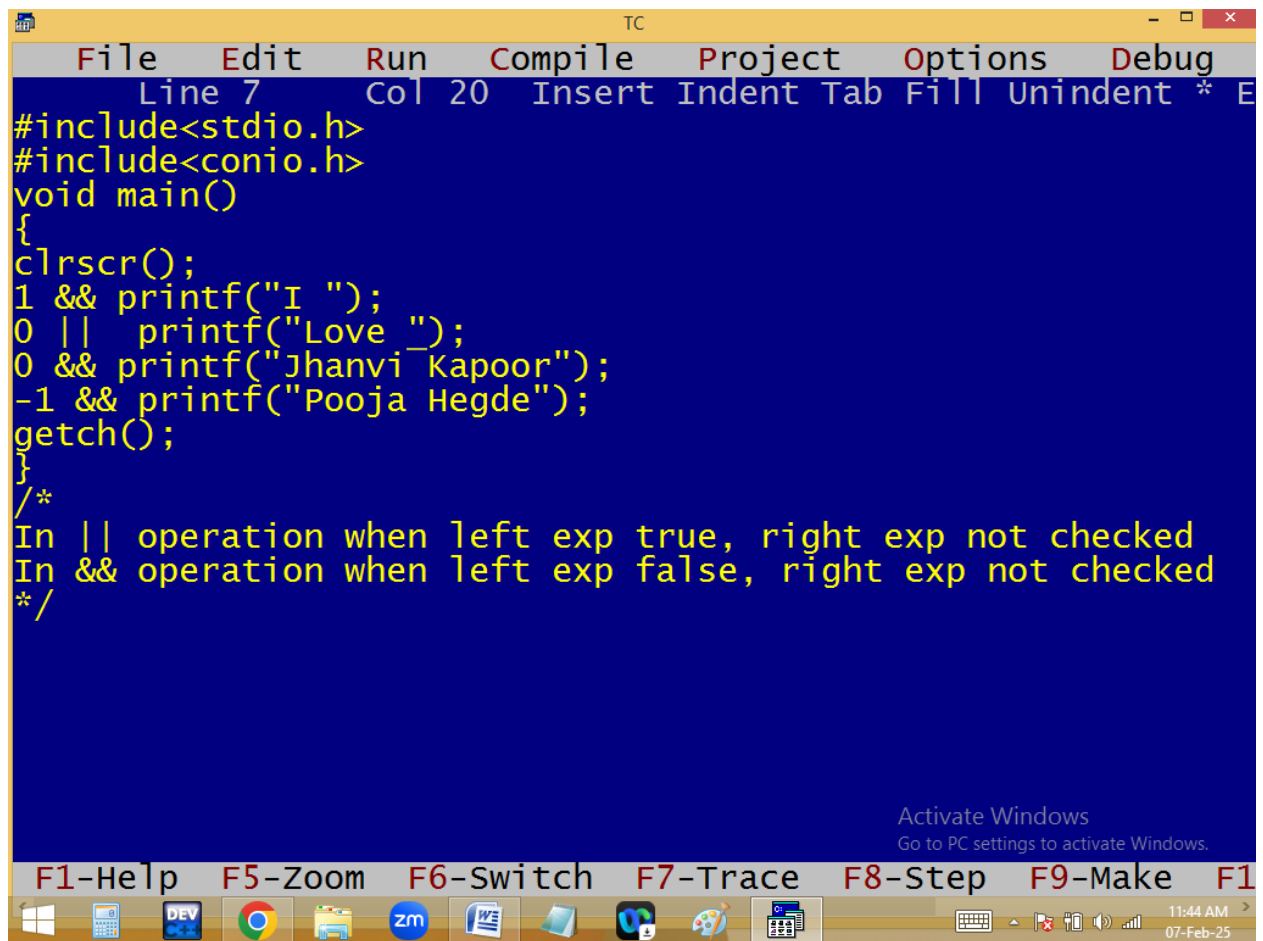

```
TC
File Edit Run Compile Project Options Debug
Line 7 Col 20 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
1 && printf("I ");
0 || printf("Love ");
0 && printf("Jhanvi Kapoor");
-1 && printf("Pooja Hegde");
getch();
}
/*
In || operation when left exp true, right exp not checked
In && operation when left exp false, right exp not checked
*/

Activate Windows
Go to PC settings to activate Windows.
F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Exit
```

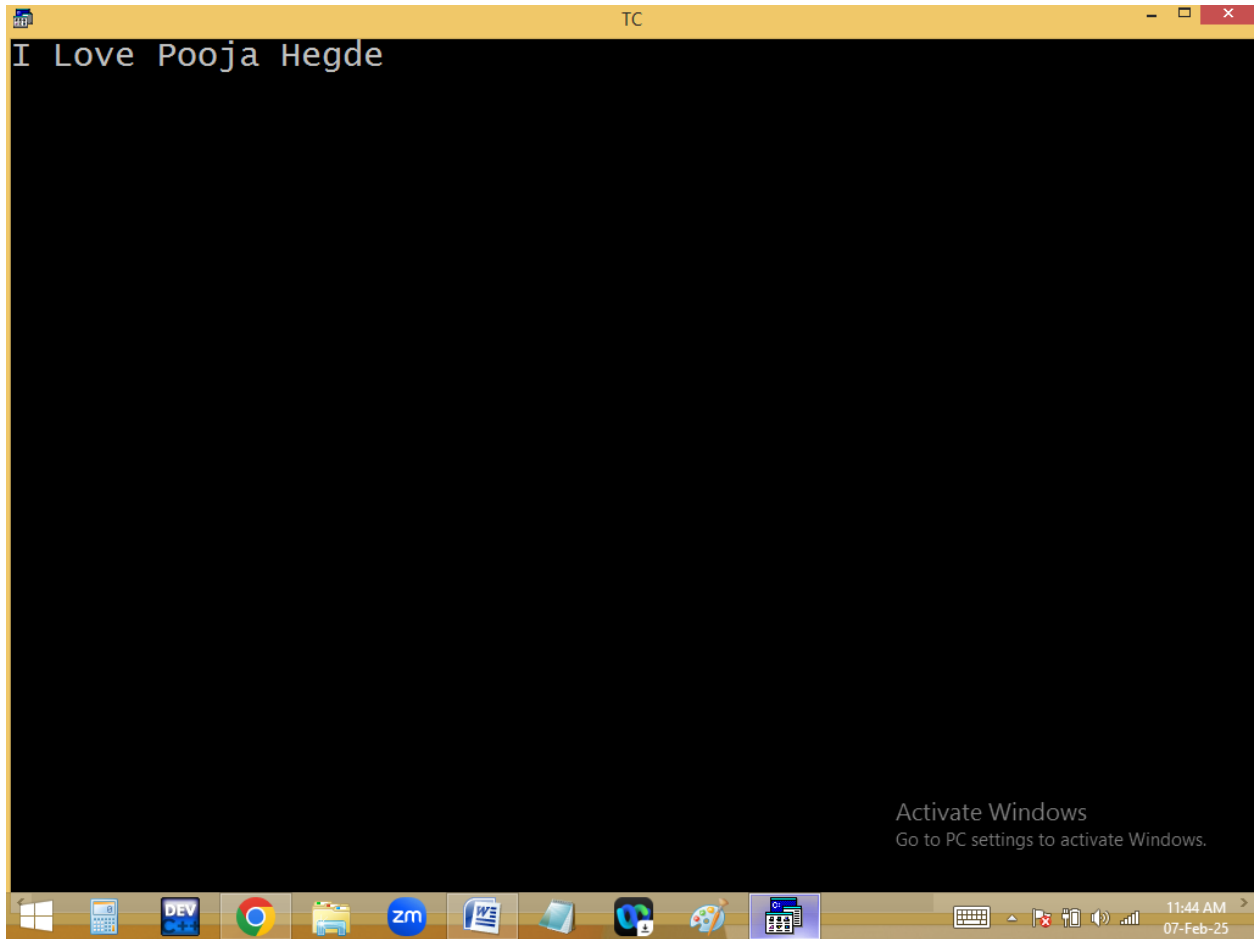


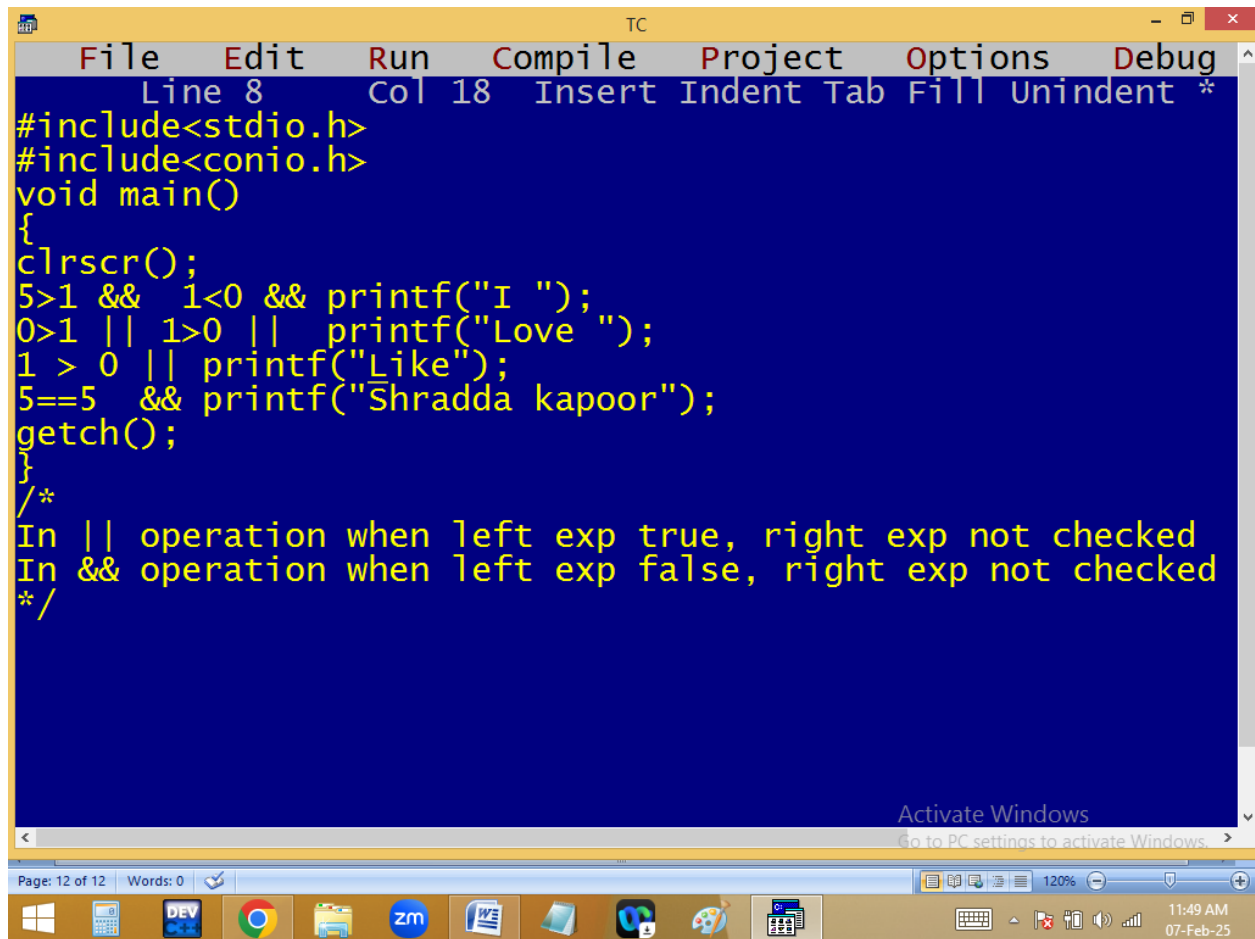

```
TC
File Edit Run Compile Project Options Debug
Line 8 Col 18 Insert Indent Tab Fill Unindent *
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
5>1 && 1<0 && printf("I ");
0>1 || 1>0 || printf("Love ");
1 > 0 || printf("Like");
5==5 && printf("Shradda kapoor");
getch();
}
/*
In || operation when left exp true, right exp not checked
In && operation when left exp false, right exp not checked
*/
```

Page: 12 of 12 Words: 0

11:49 AM 07-Feb-25

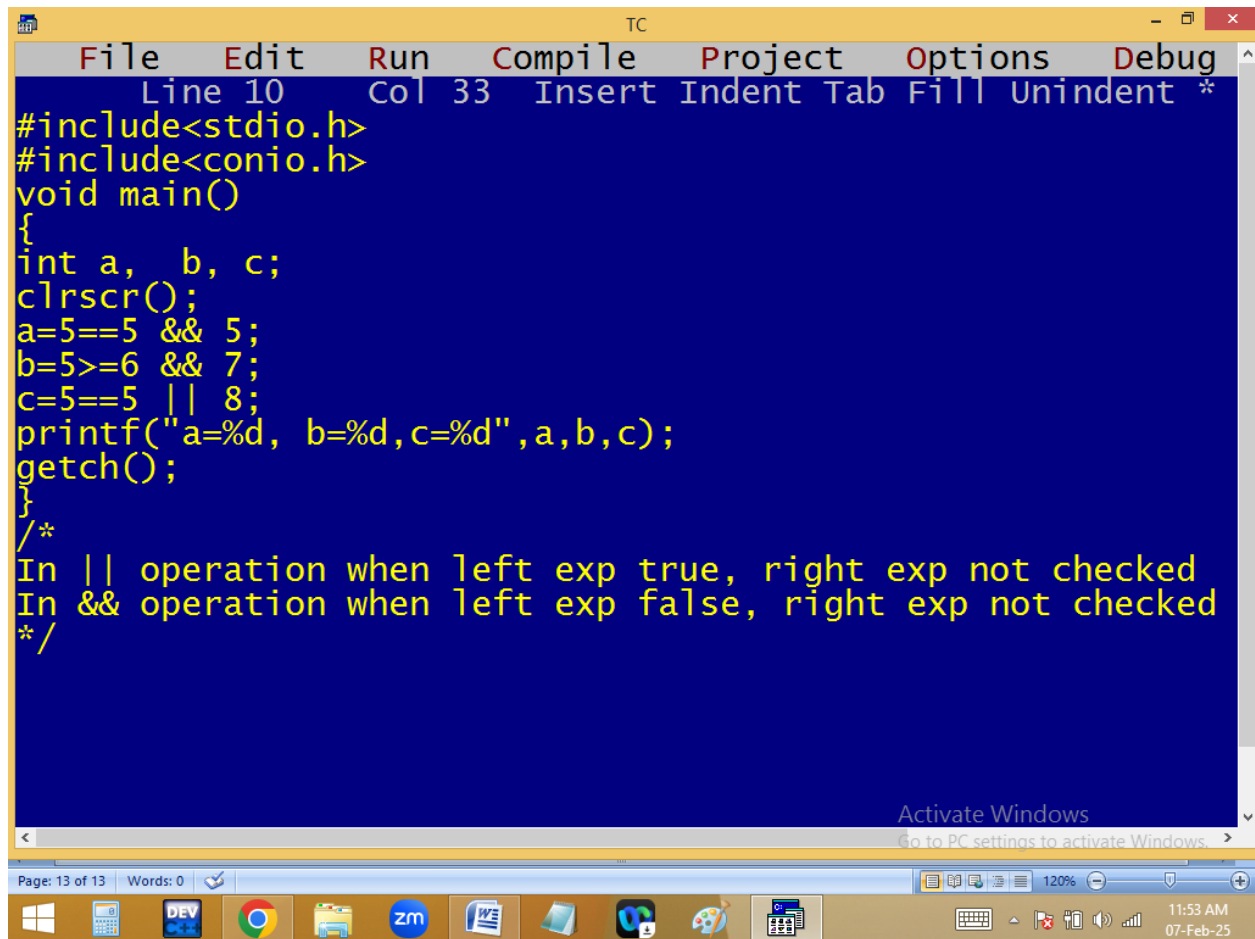



```
TC
File Edit Run Compile Project Options Debug
Line 10 Col 33 Insert Indent Tab Fill Unindent *
#include<stdio.h>
#include<conio.h>
void main()
{
int a, b, c;
clrscr();
a=5==5 && 5;
b=5>=6 && 7;
c=5==5 || 8;
printf("a=%d, b=%d,c=%d",a,b,c);
getch();
}
/*
In || operation when left exp true, right exp not checked
In && operation when left exp false, right exp not checked
*/
```

Activate Windows
Go to PC settings to activate Windows.

Page: 13 of 13 Words: 0

11:53 AM
07-Feb-25

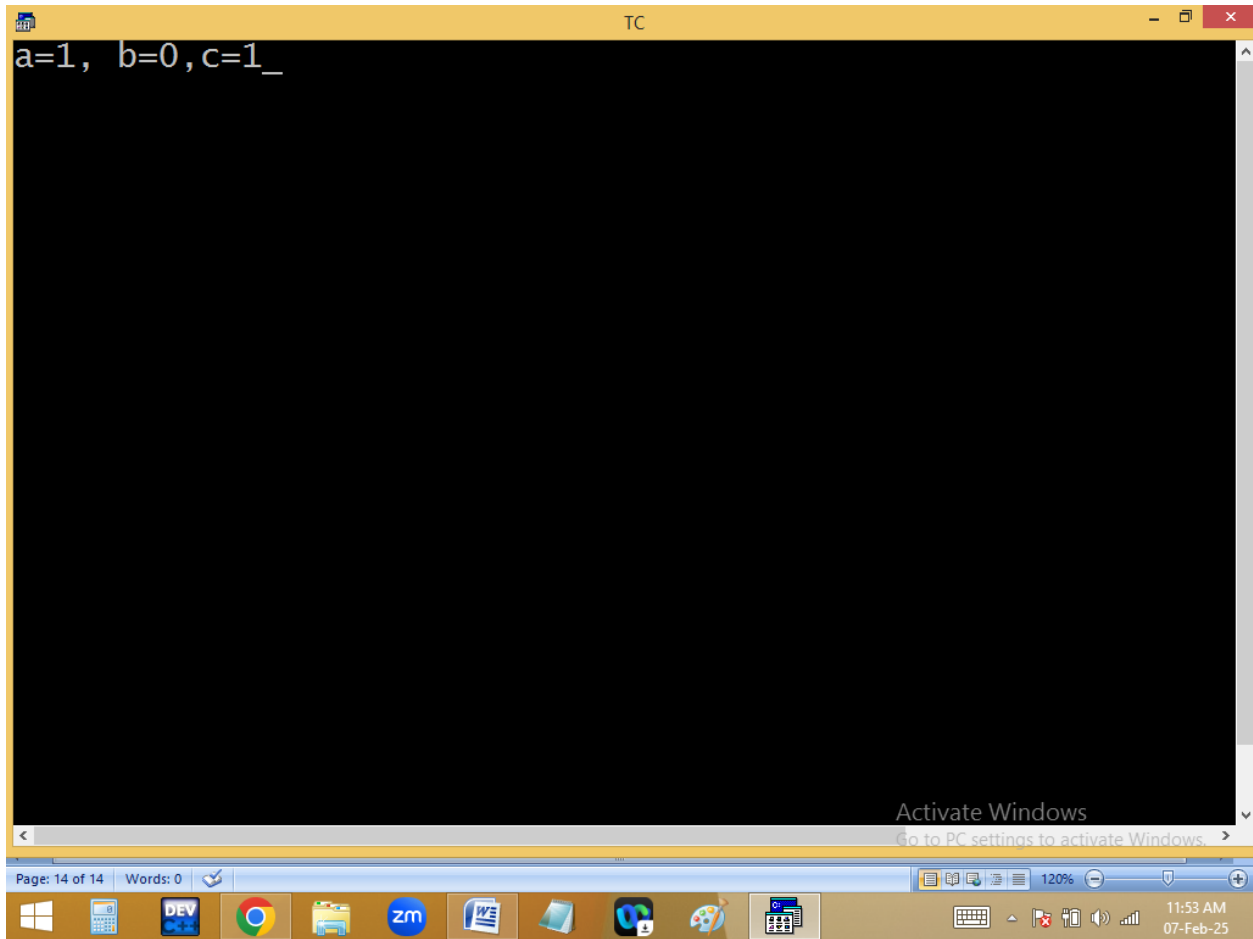


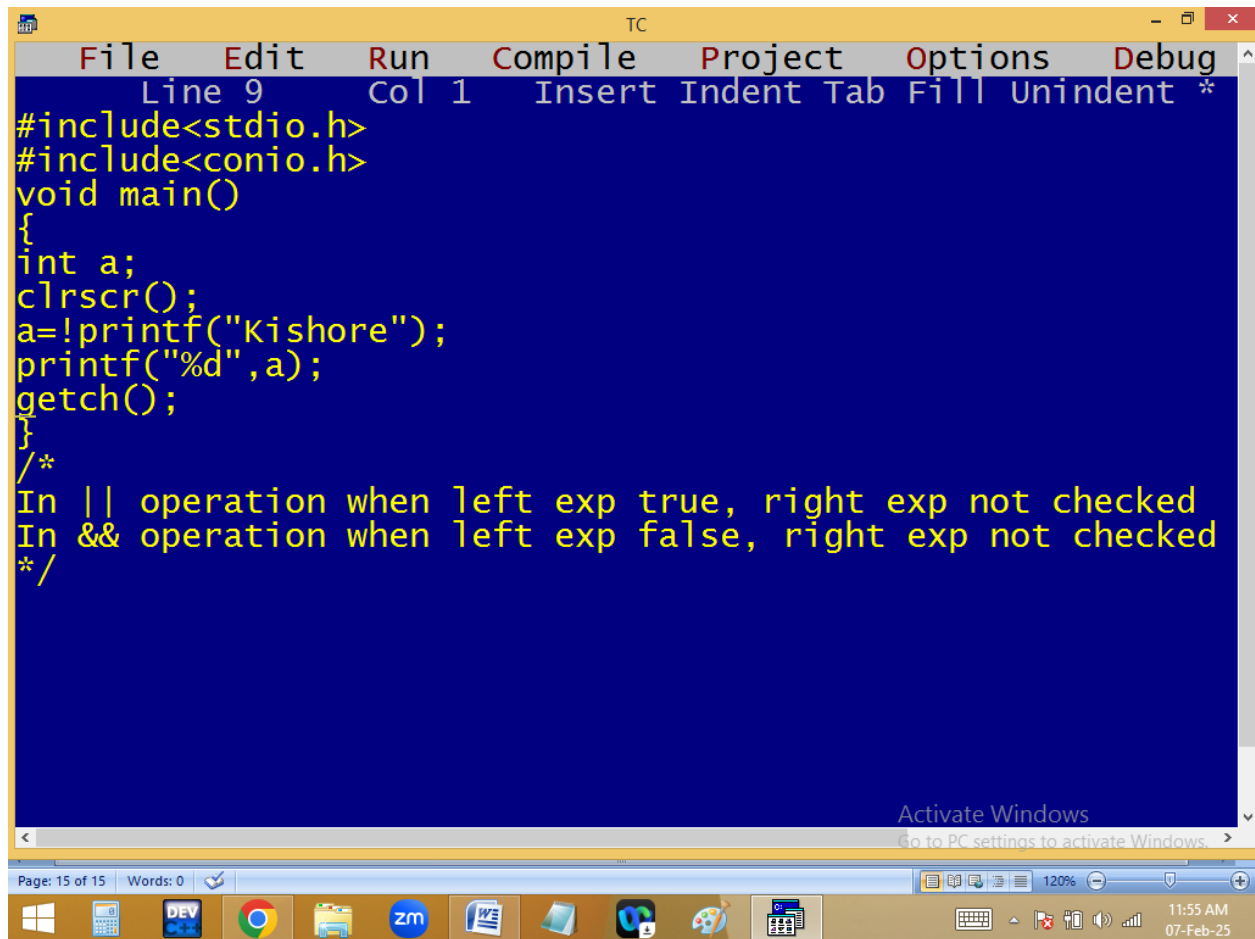

The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 9", "Col 1", and a list of editing actions: "Insert", "Indent", "Tab", "Fill", "Unindent", and "*". The main editing area has a dark blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a;
clrscr();
a=!printf("Kishore");
printf("%d",a);
getch();
}
/*
In || operation when left exp true, right exp not checked
In && operation when left exp false, right exp not checked
*/
```

At the bottom of the window, there is a status bar with "Page: 15 of 15" and "Words: 0". Below the IDE window is a Windows taskbar with various icons including Windows, Task View, DEV, Chrome, File Explorer, Zoom, Word, and others. The system tray on the right shows the time as "11:55 AM" and the date as "07-Feb-25". An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.

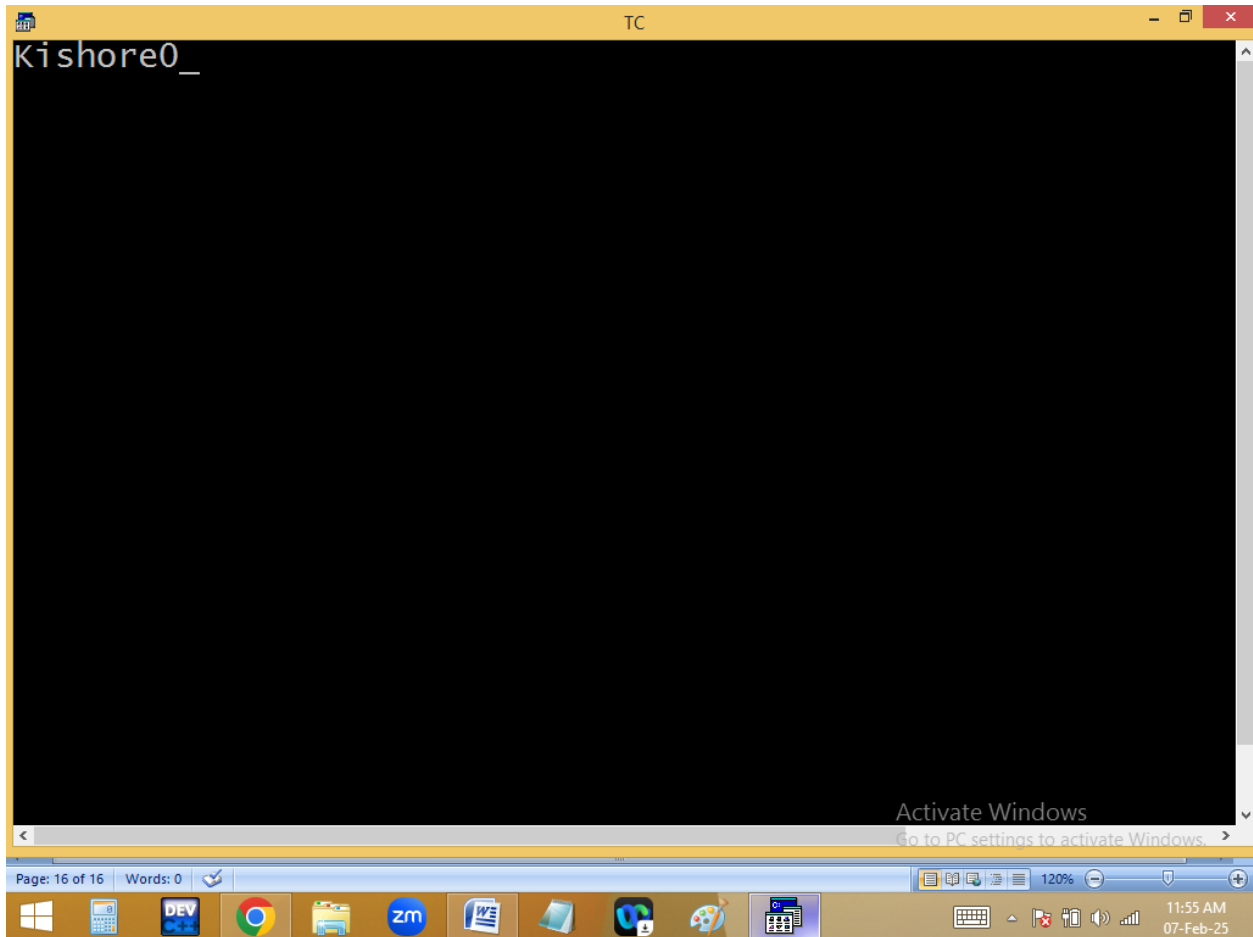


Increment / Decrement / Modify operators [++ / --]:

They are used to increment / decrement a variable value by 1.

`int a=3, b=5;`

`a++;` i.e. `a=a+1` → `a=4`

`b--;` i.e. `b=b-1` → `b=4`

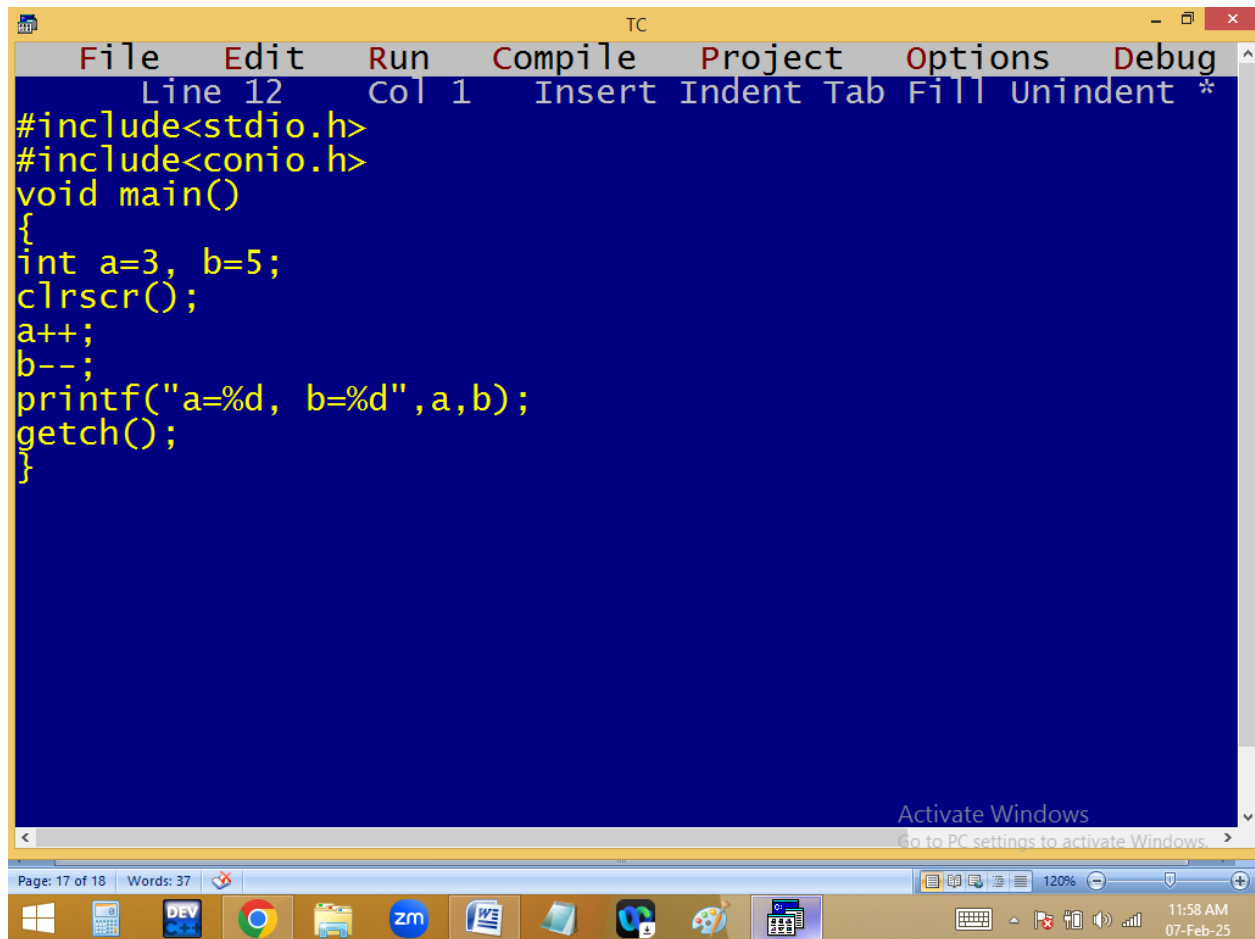



```
TC
File Edit Run Compile Project Options Debug
Line 12 Col 1 Insert Indent Tab Fill Unindent *
#include<stdio.h>
#include<conio.h>
void main()
{
int a=3, b=5;
clrscr();
a++;
b--;
printf("a=%d, b=%d",a,b);
getch();
}
```

Page: 17 of 18 Words: 37 120%

Activate Windows
Go to PC settings to activate Windows.

11:58 AM
07-Feb-25

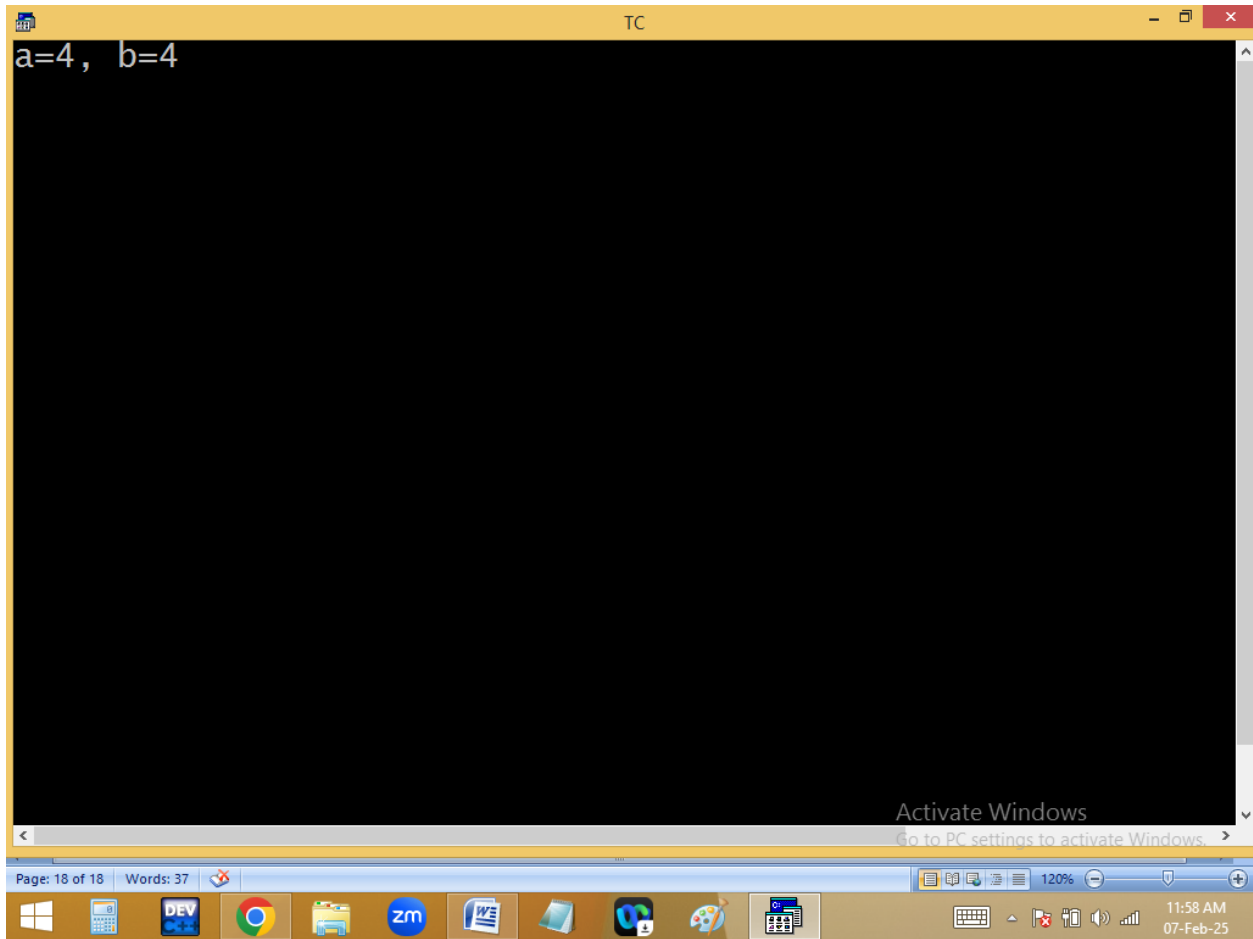

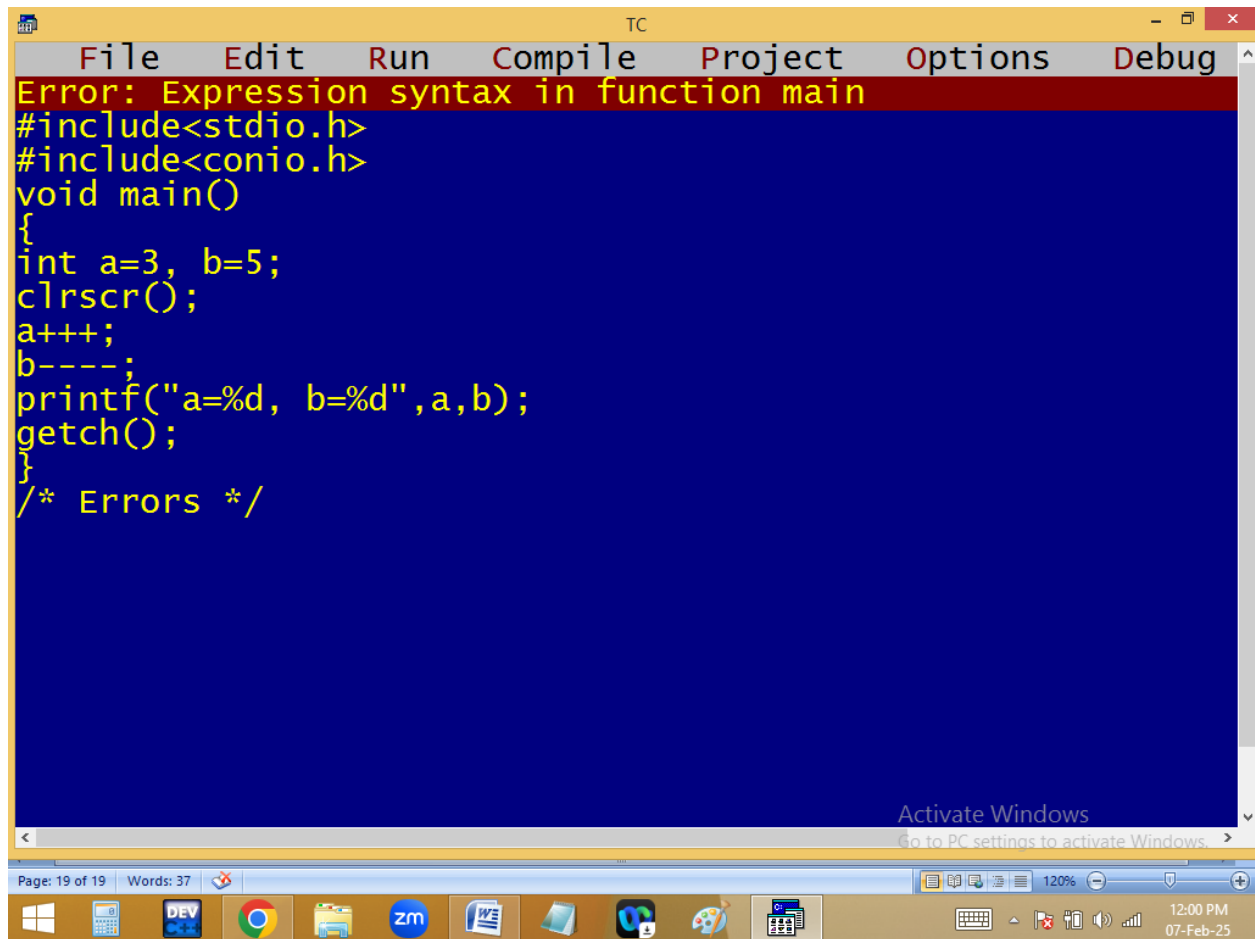

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error message banner at the top reads "Error: Expression syntax in function main". The code editor has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a=3, b=5;
clrscr();
a+++;
b----;
printf("a=%d, b=%d",a,b);
getch();
}
/* Errors */
```

At the bottom of the IDE, there is a status bar showing "Page: 19 of 19" and "Words: 37". Below the IDE window is the Windows taskbar, which includes icons for Windows, File Explorer, DEV C++, Google Chrome, File Explorer, Zoom, Word, a folder, OneDrive, a game controller, and a calculator. The system tray on the right shows the date and time as "12:00 PM 07-Feb-25".

TC

File Edit Run Compile Project Options Debug


Line 13 Col 23 Insert Indent Tab Fill Unindent *

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a=3, b=5;
clrscr();
a++; /* postfix incr */
b--; /* postfix decr */
printf("a=%d, b=%d\n",a,b);
a=3;
b=5;
++a; /* prefix incr */
--b; /* prefix decr */
printf("a=%d, b=%d\n",a,b);
getch();
}
```


Activate Windows
Go to PC settings to activate Windows.

Page: 17 of 20 Words: 3/37 120%

12:03 PM
07-Feb-25

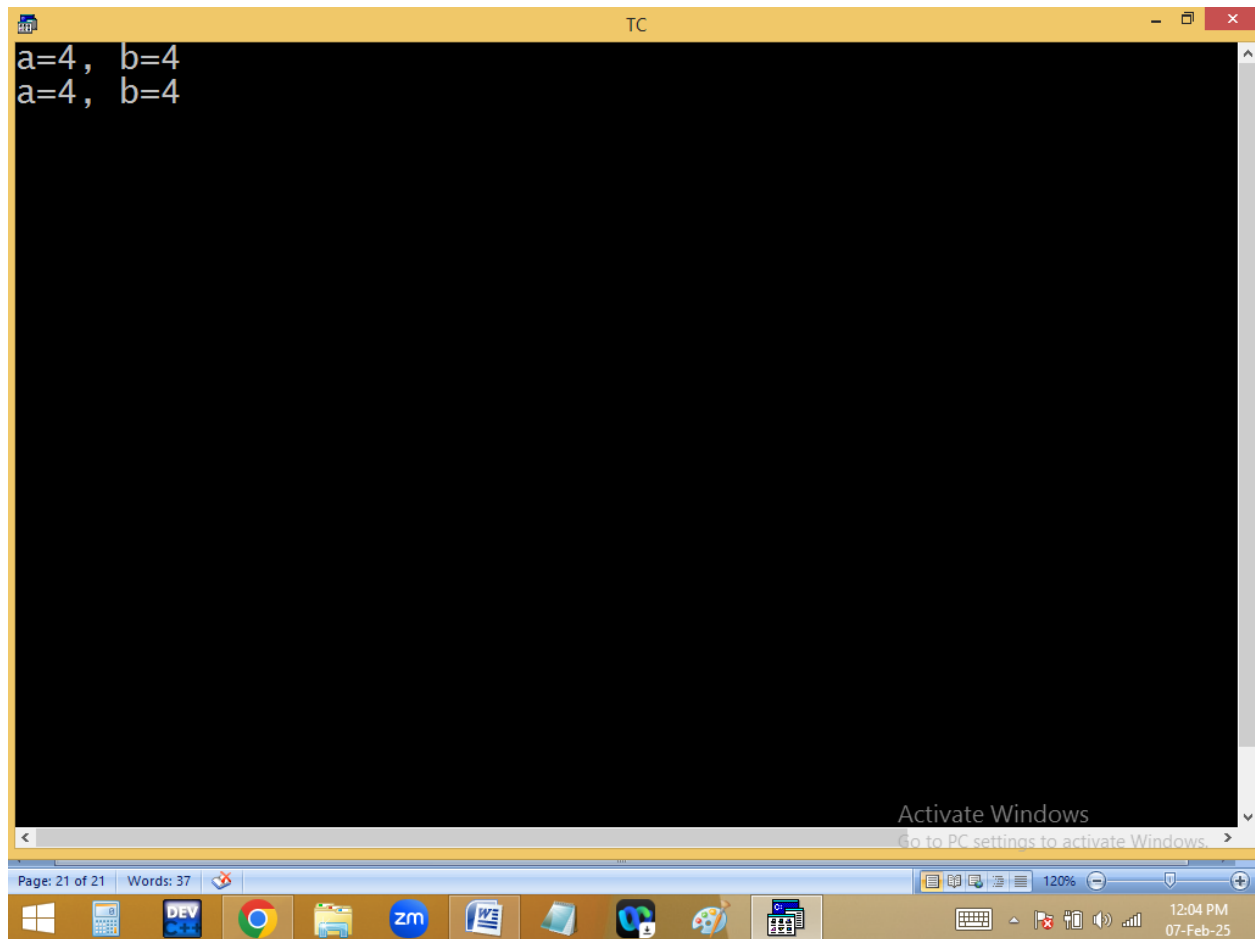

Note: When only one variable is used pre and post are same.

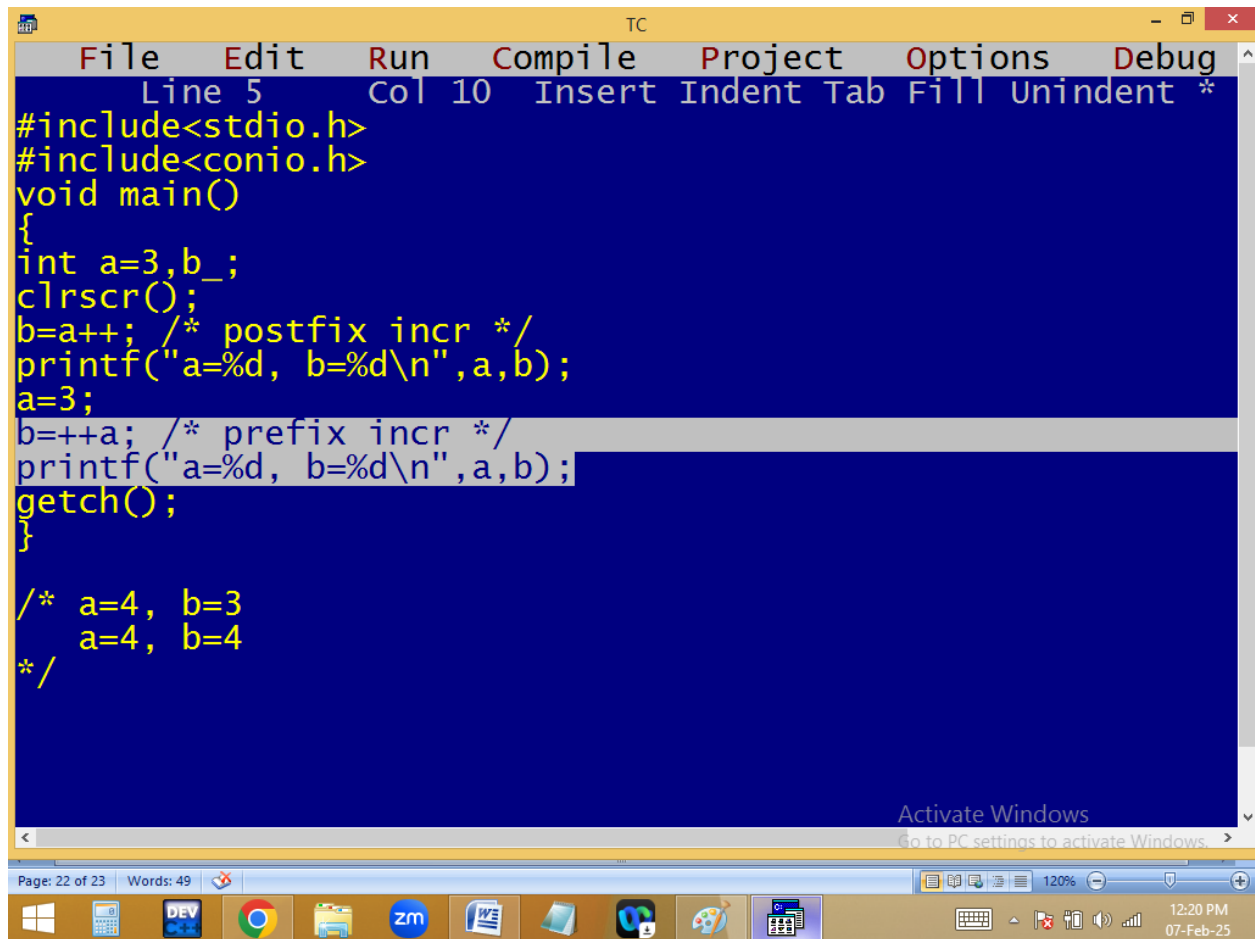

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 5", "Col 10", and "Insert" mode. The code editor has a blue background and contains the following C program:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a=3,b_;
clrscr();
b=a++; /* postfix incr */
printf("a=%d, b=%d\n",a,b);
a=3;
b=++a; /* prefix incr */
printf("a=%d, b=%d\n",a,b);
getch();
}

/* a=4, b=3
   a=4, b=4
*/
```

At the bottom of the IDE, there is a status bar showing "Page: 22 of 23" and "Words: 49". The Windows taskbar is visible at the bottom, showing icons for Windows, Task Manager, DEV, Google Chrome, File Explorer, Zoom, Word, and other applications. The system clock in the bottom right corner shows "12:20 PM" and "07-Feb-25".

postfix increment:

a=3

b=a++;

priority: =, a++

1. b=a ==> b=3

2. a++ ==> a=4

prefix increment:


a=3

b=++a;

priority: ++a, =

1. ++a ==> a=4

2. b=a ==> b=4

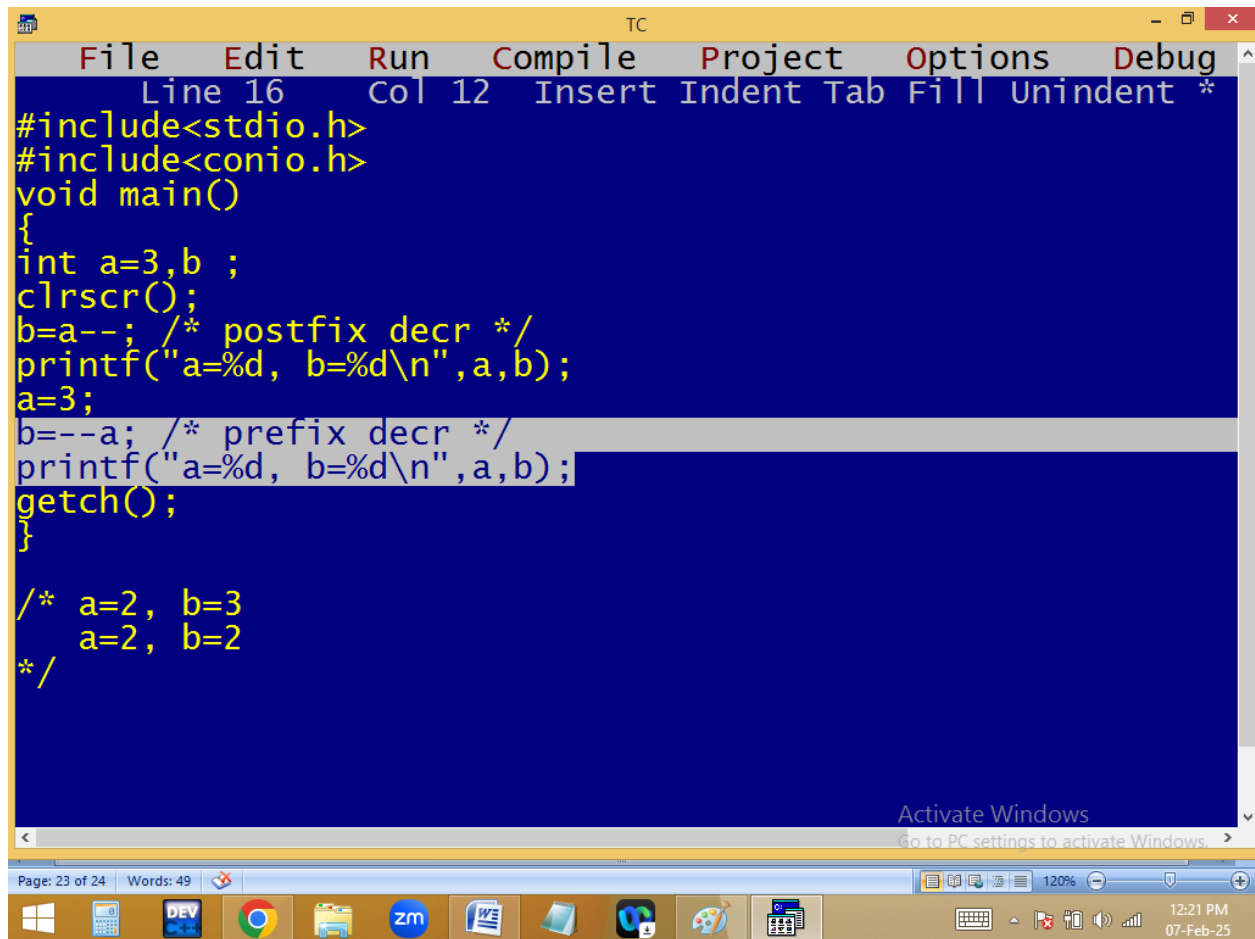

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 16", "Col 12", and "Insert" mode. The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a=3,b ;
clrscr();
b=a--; /* postfix decr */
printf("a=%d, b=%d\n",a,b);
a=3;
b=--a; /* prefix decr */
printf("a=%d, b=%d\n",a,b);
getch();
}

/* a=2, b=3
   a=2, b=2
*/
```

At the bottom of the IDE window, there is a status bar showing "Page: 23 of 24" and "Words: 49". Below the IDE window is the Windows taskbar, which includes icons for the Start menu, Task View, File Explorer, Google Chrome, Zoom, Word, and other applications. The system tray on the right shows the time as "12:21 PM" and the date as "07-Feb-25".

postfix decr:

a=3

b=a--;

priority: =, a--

1. b=a ==> b=3

2. a-- ==> a=2

prefix decr:


a=3

b=--a;

priority: --a, =

1. --a ==> a=2

2. b=a ==> b=2

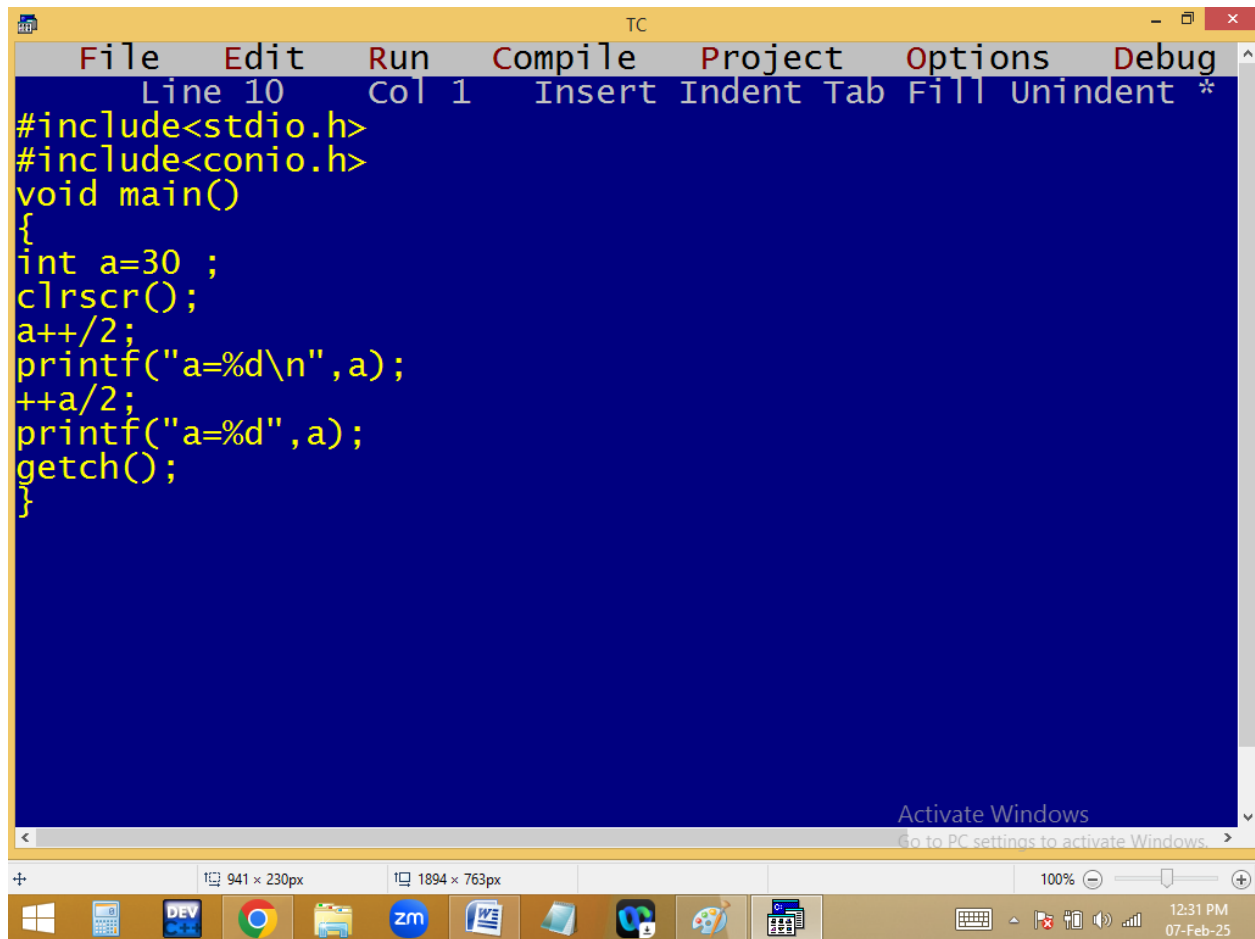


```
TC
File Edit Run Compile Project Options Debug
Line 10 Col 1 Insert Indent Tab Fill Unindent *
#include<stdio.h>
#include<conio.h>
void main()
{
int a=30 ;
clrscr();
a++/2;
printf("a=%d\n",a);
++a/2;
printf("a=%d",a);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

941 x 230px 1894 x 763px 100%

12:31 PM
07-Feb-25

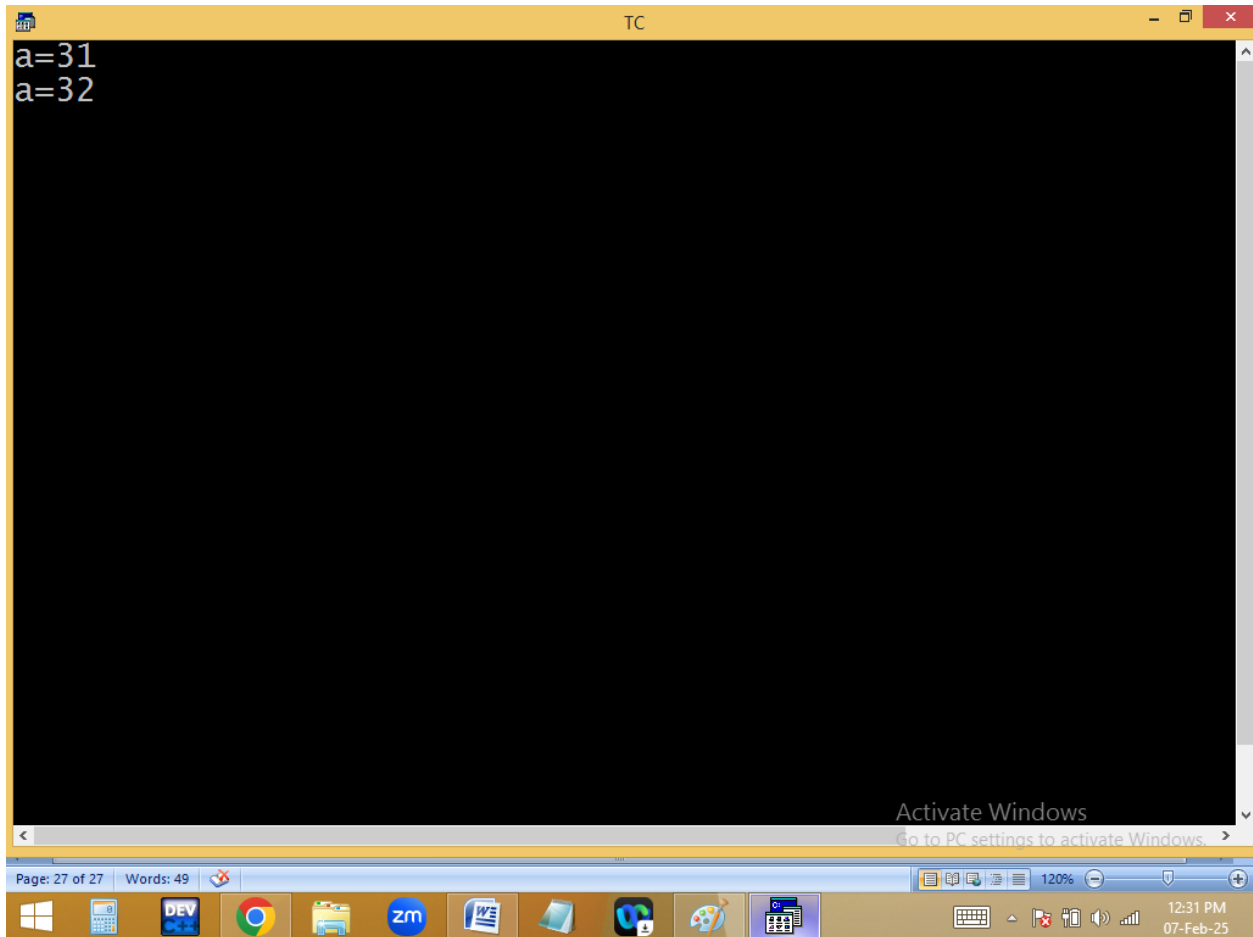

a++/2;

priority: /, a++

1. a/2==>30/2=15 [15 not stored in a because of = not used i.e. a = 30]

2. a++ ==> a=31

printf(a) ==> 31


++a/2;

priority: ++a, /

1. ++a ==> a=32

2. a/2 ==> 32/2=16 [16 not stored in a because of = not used i.e. a=32]


printf(a) ==> 32

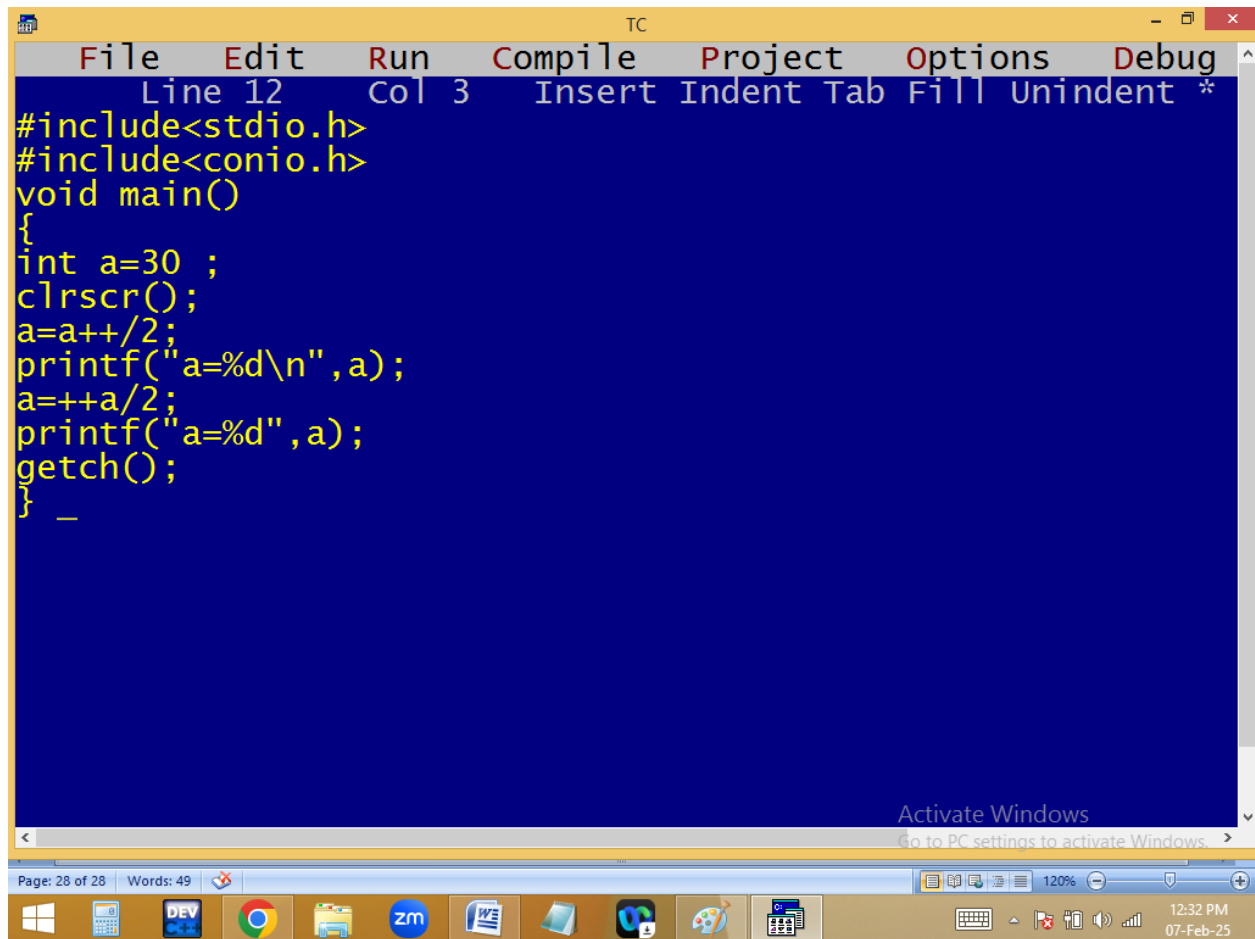

```
TC
File Edit Run Compile Project Options Debug
Line 12 Col 3 Insert Indent Tab Fill Unindent *
#include<stdio.h>
#include<conio.h>
void main()
{
int a=30 ;
clrscr();
a=a++/2;
printf("a=%d\n",a);
a=++a/2;
printf("a=%d",a);
getch();
} _
```

Page: 28 of 28 Words: 49

12:32 PM 07-Feb-25

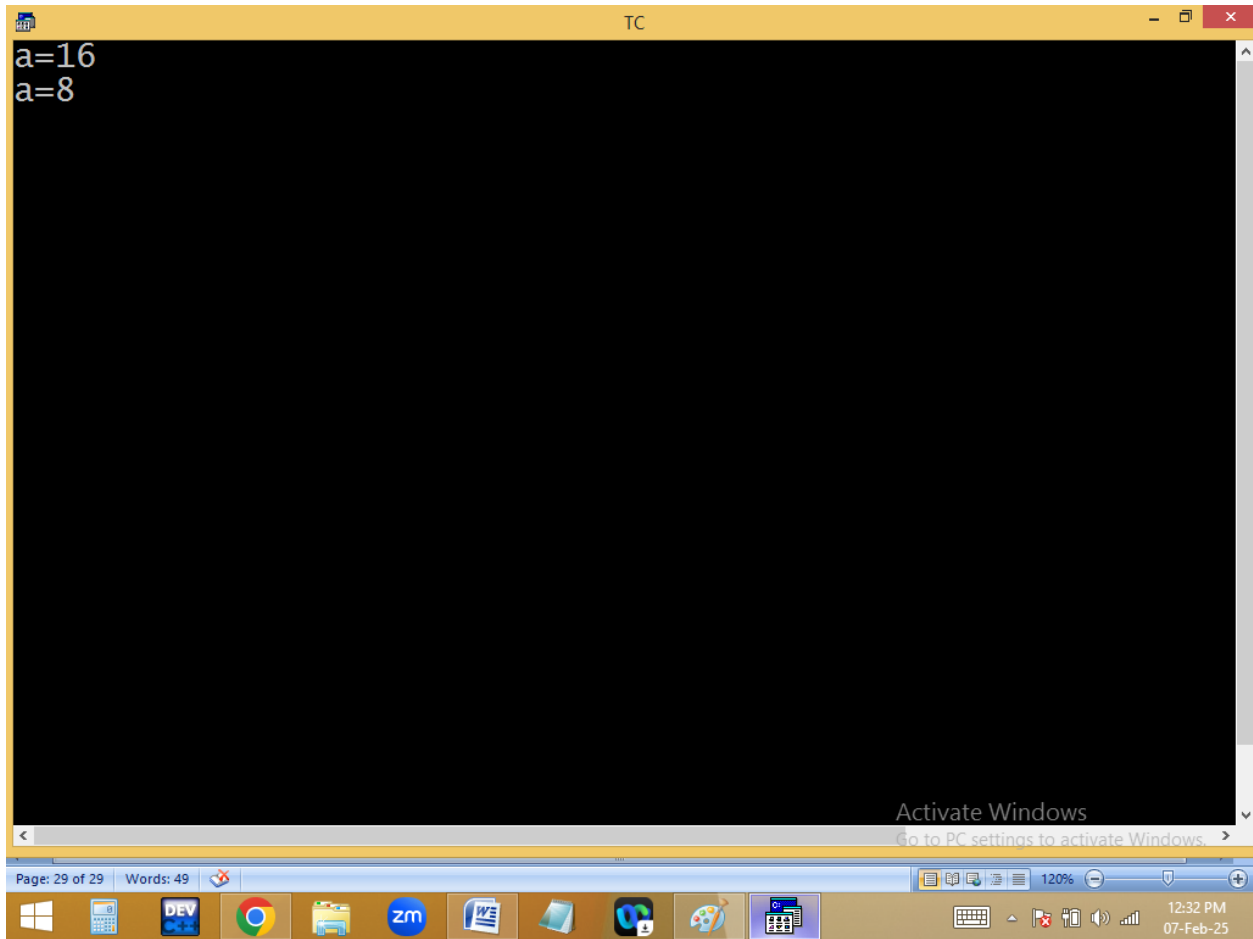

a=30

a=a++/2;

priority:

/, =, a++

1. a=a/2==>30/2=15

2. a=15

3. a++ ==> a=16

printf(a) ==> 16

a=++a/2;


priority: ++a, /, =

1. ++a ==> a=17

2. a=a/2==> 17/2=8

3. a=8

printf(a); ==> 8

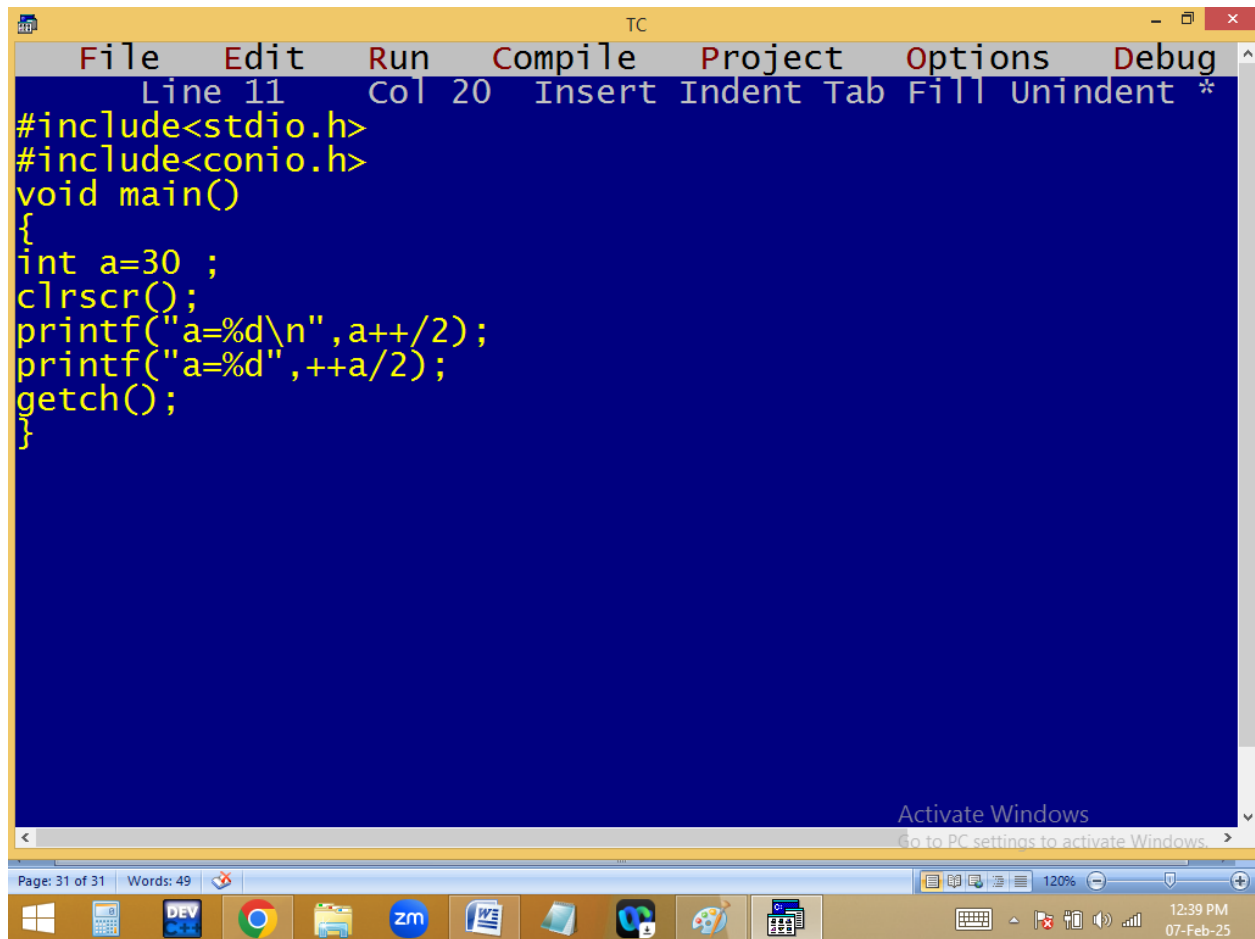



```
TC
File Edit Run Compile Project Options Debug
Line 11 Col 20 Insert Indent Tab Fill Unindent *
#include<stdio.h>
#include<conio.h>
void main()
{
int a=30 ;
clrscr();
printf("a=%d\n",a++/2);
printf("a=%d",++a/2);
getch();
}
```

Page: 31 of 31 Words: 49

120%

12:39 PM
07-Feb-25

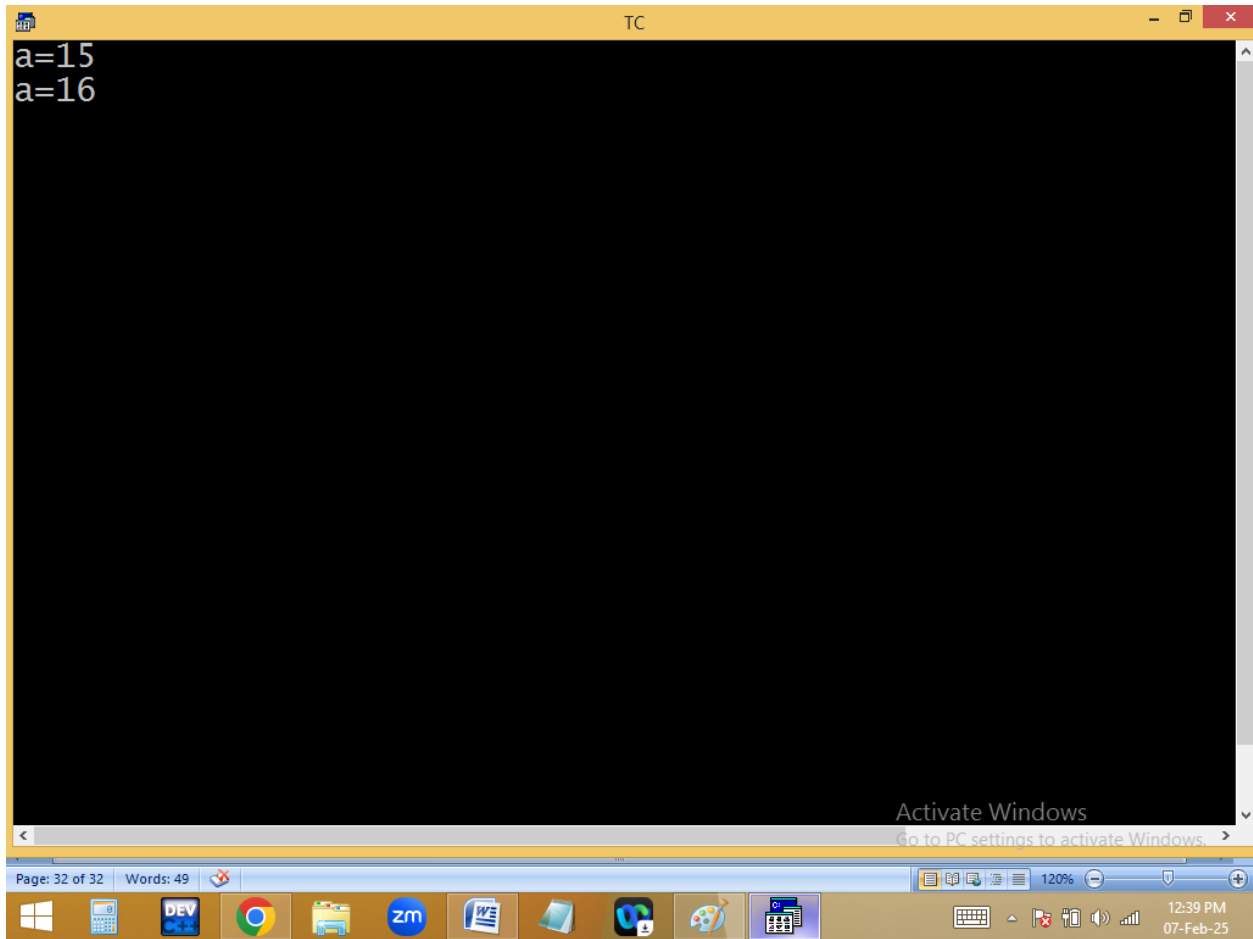

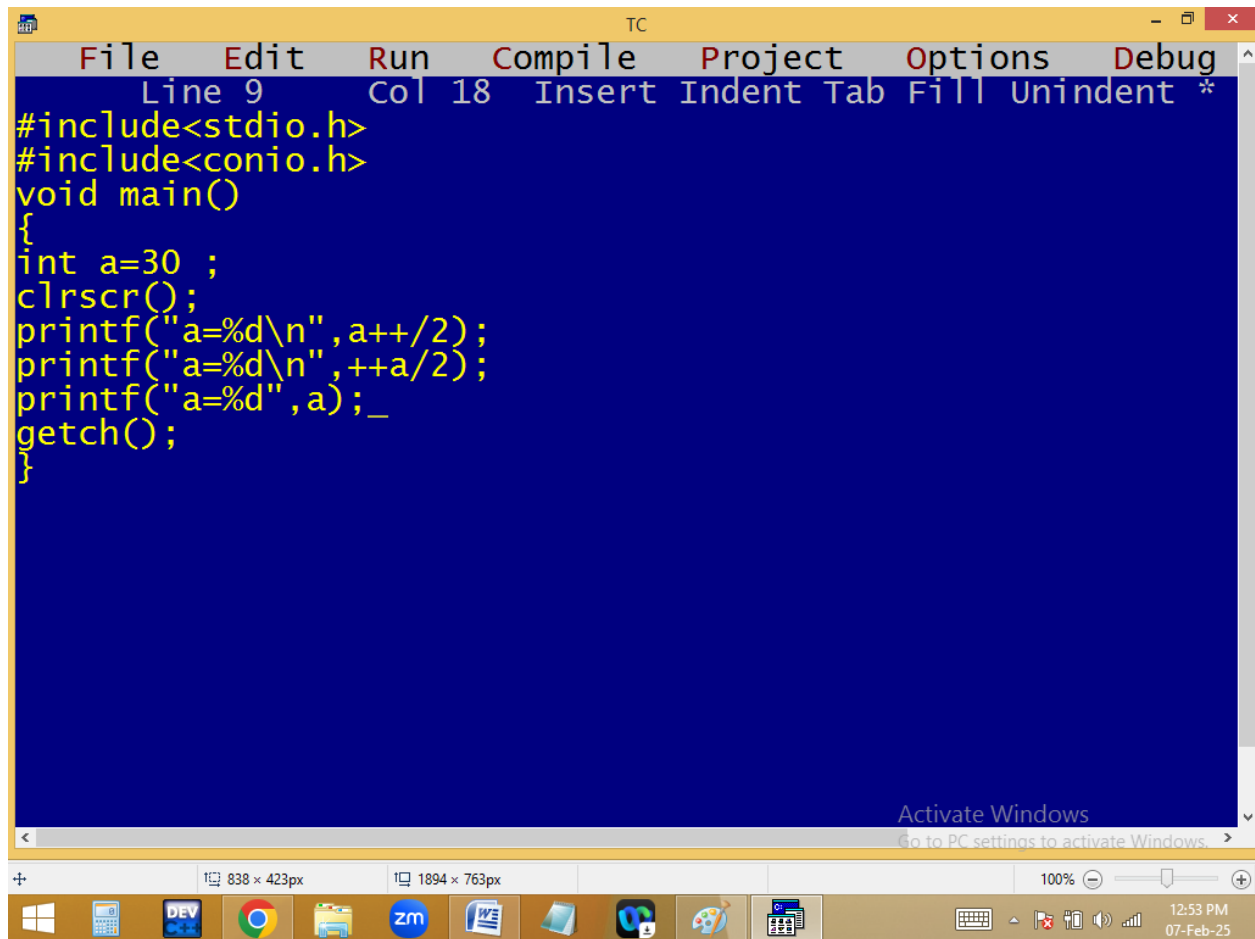


```
TC
File Edit Run Compile Project Options Debug
Line 9 Col 18 Insert Indent Tab Fill Unindent *
#include<stdio.h>
#include<conio.h>
void main()
{
int a=30 ;
clrscr();
printf("a=%d\n",a++/2);
printf("a=%d\n",++a/2);
printf("a=%d",a);_
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

838 x 423px 1894 x 763px 100%

12:53 PM
07-Feb-25

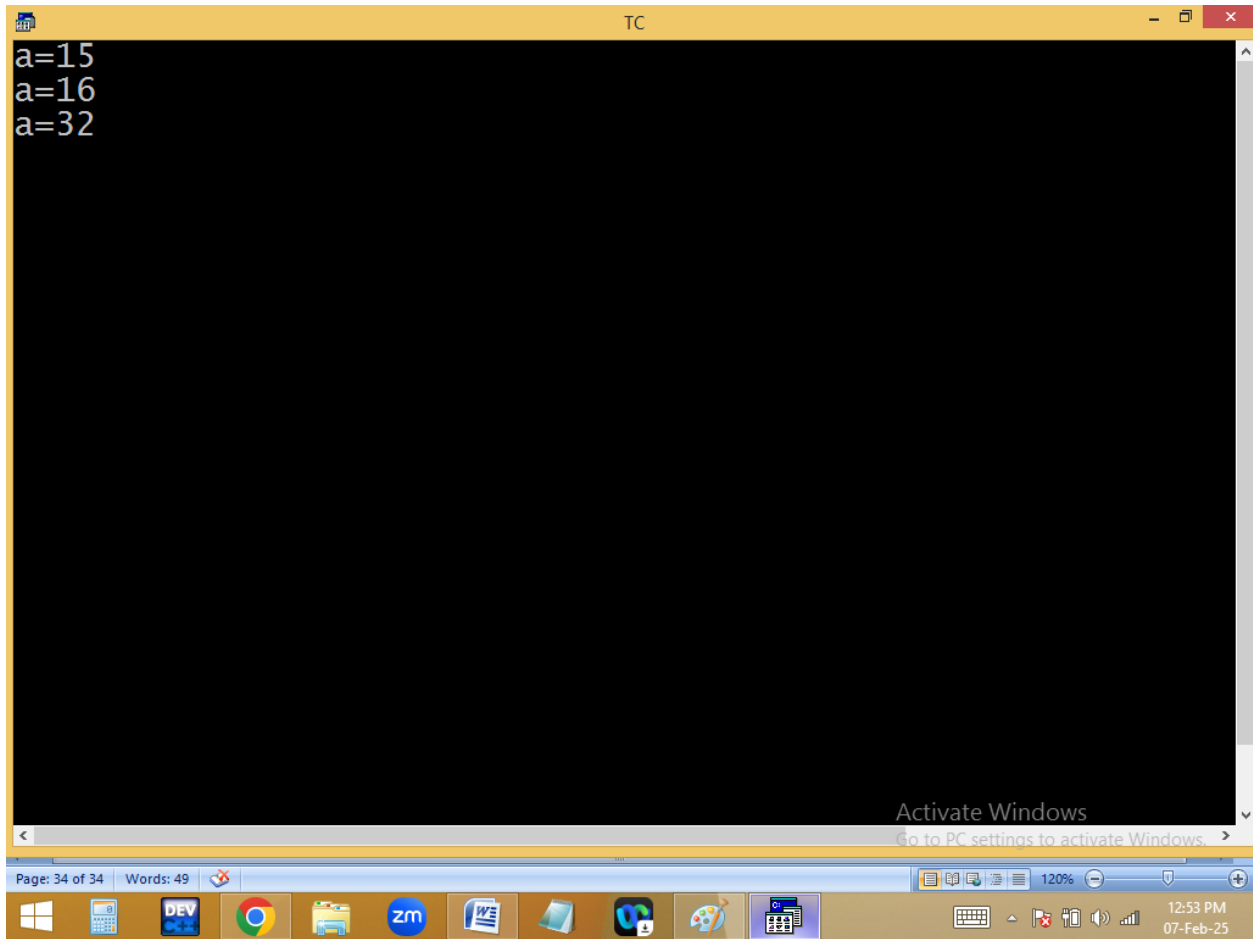

a=30

printf("%d", a++/2);

priority: /, printf, a++

1. a/2==>30/2=15

2. printf(15) ==> 15 [15 printed not stored because of = not used] i.e. a value still 30

3. a++ ==> 31

printf("%d",++a/2);

priority: ++a, /, printf

1. ++a ==> a=32

2. a/2 ==> 32/2=16

3. printf(16) ==> 16 [16 not stored in a i.e. a = 32]

printf(a) ==> a=32