


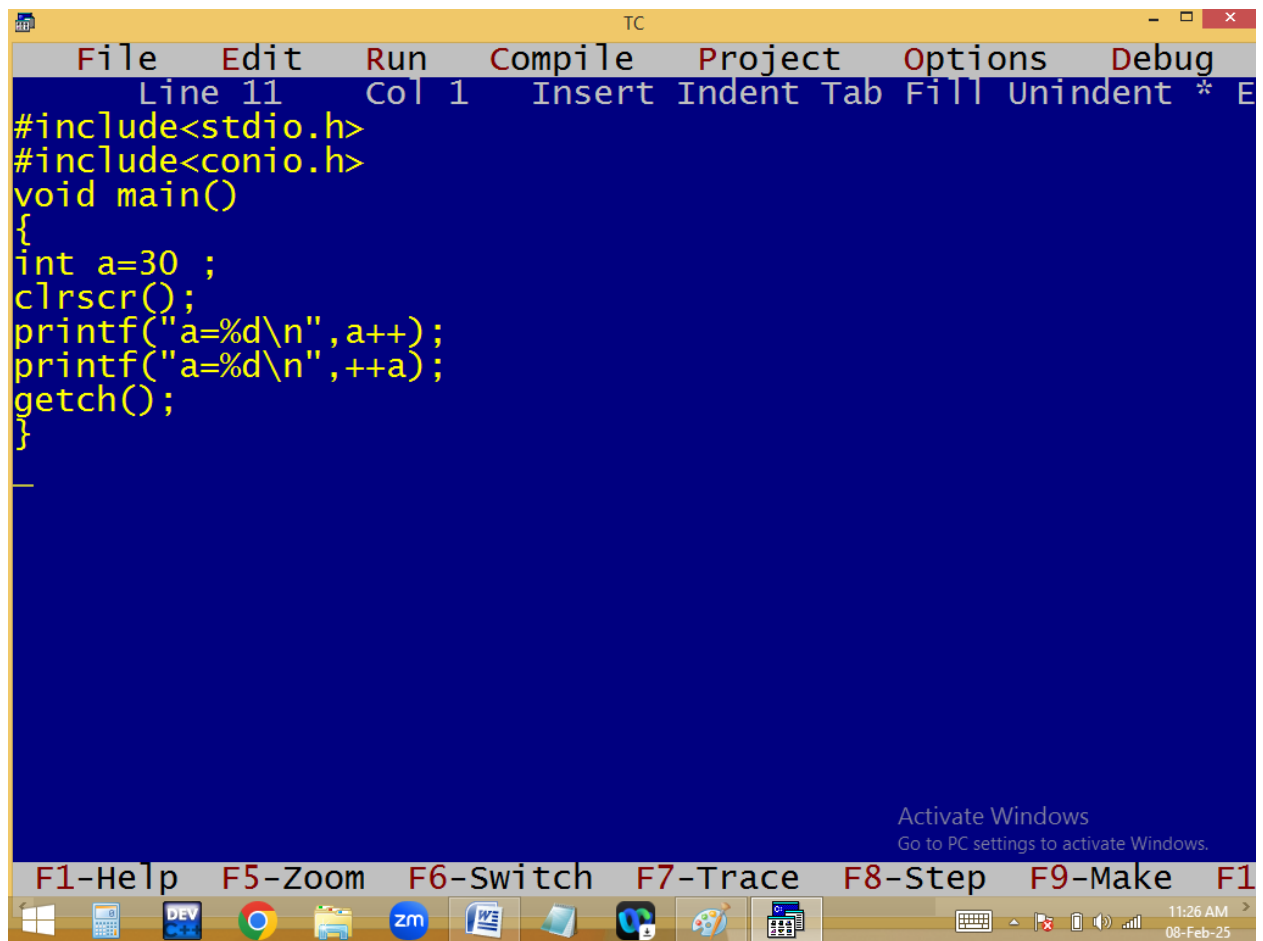



The image shows a screenshot of the Turbo C++ (TC) IDE. The main window has a blue background with yellow text. The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. Below the menu bar, a status bar shows 'Line 11 Col 1' and a list of editing actions: Insert, Indent, Tab, Fill, Unindent, and *. The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a=30 ;
clrscr();
printf("a=%d\n",a++);
printf("a=%d\n",++a);
getch();
}
```

At the bottom of the IDE window, there is a text prompt: 'Activate Windows Go to PC settings to activate Windows.' Below the IDE window is the Windows taskbar, which includes icons for the Start menu, Task View, File Explorer, Google Chrome, Dev C++, and other applications. The system tray on the right shows the time as 11:26 AM and the date as 08-Feb-25.

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

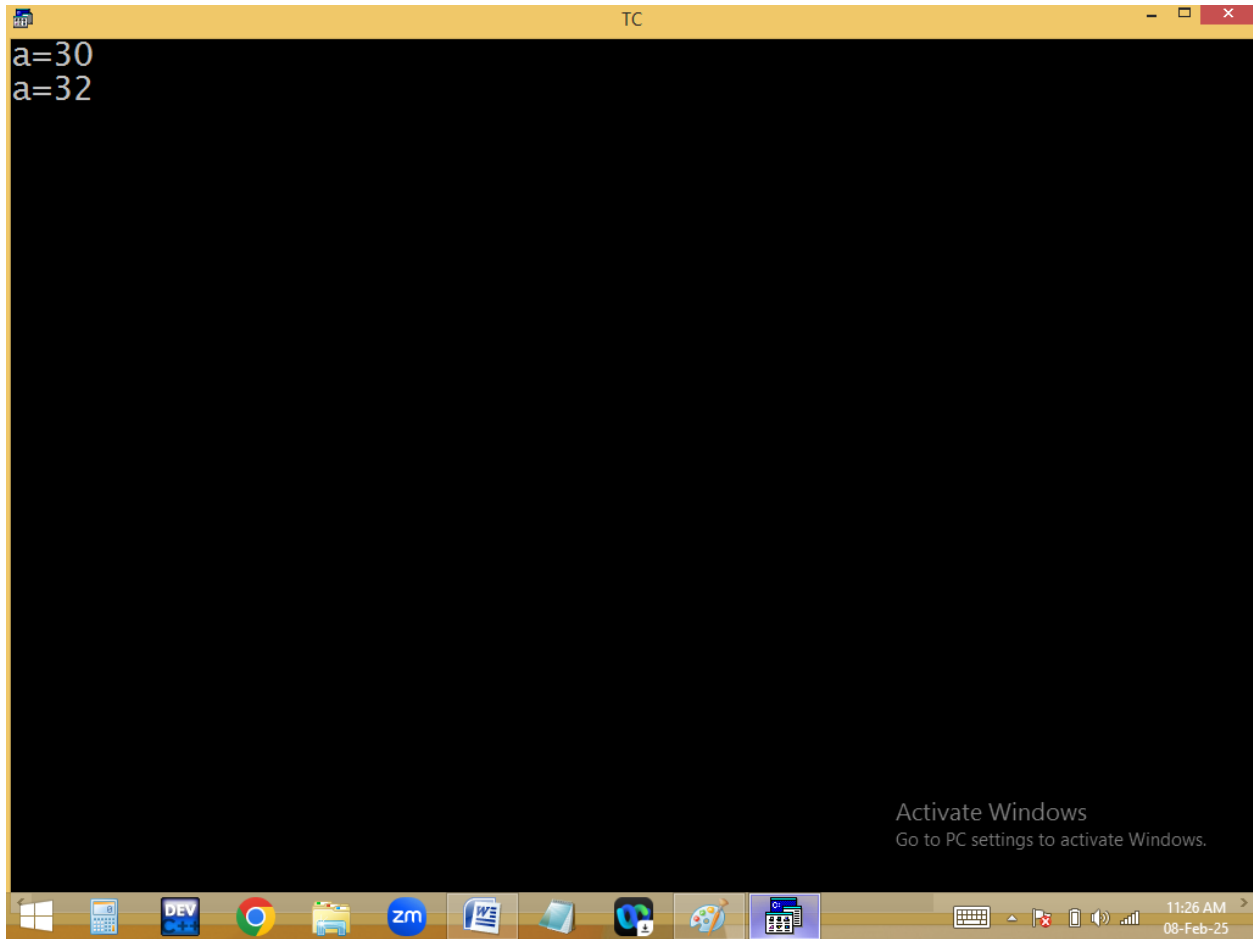

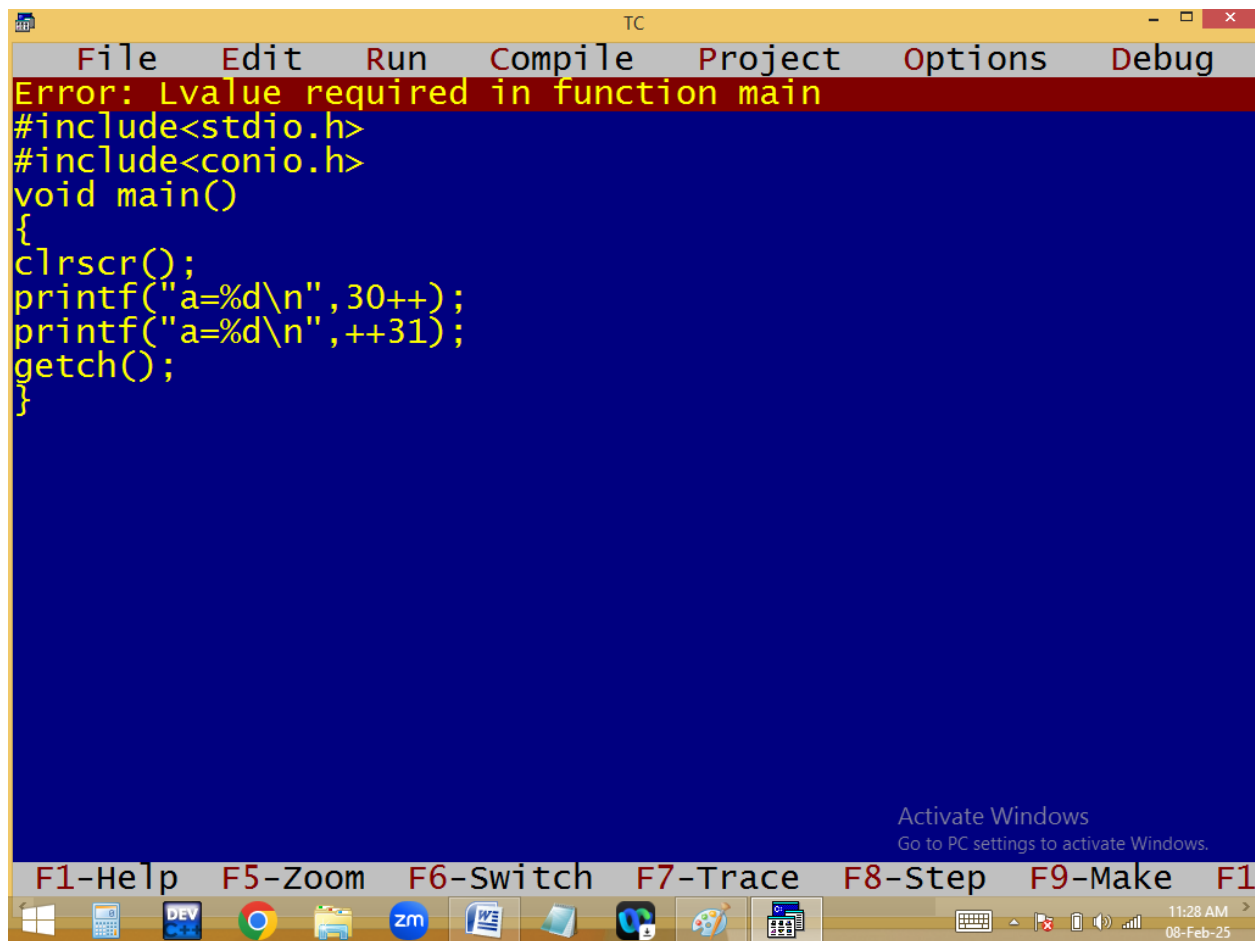

The screenshot shows the Turbo C++ (TC) IDE interface. The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. A red error banner at the top reads "Error: Lvalue required in function main". The code editor contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("a=%d\n",30++);
printf("a=%d\n",++31);
getch();
}
```

At the bottom, there is a toolbar with function key shortcuts: F1-Help, F5-Zoom, F6-Switch, F7-Trace, F8-Step, F9-Make, and F10-Run. The Windows taskbar at the very bottom shows the system clock as 11:28 AM on 08-Feb-25.

a++ means a=a+1

30++ means 30 = 30 + 1 ==> 30 = 31




constant

```
TC
File Edit Run Compile Project Options Debug
Line 11 Col 25 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a=1, b;
clrscr();
b = a++ + a++ + a++;
printf("a=%d, b=%d\n",a,b);
a=1;
b = ++a + ++a + ++a;
printf("a=%d, b=%d\n",a,b);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Go to

11:32 AM
08-Feb-25

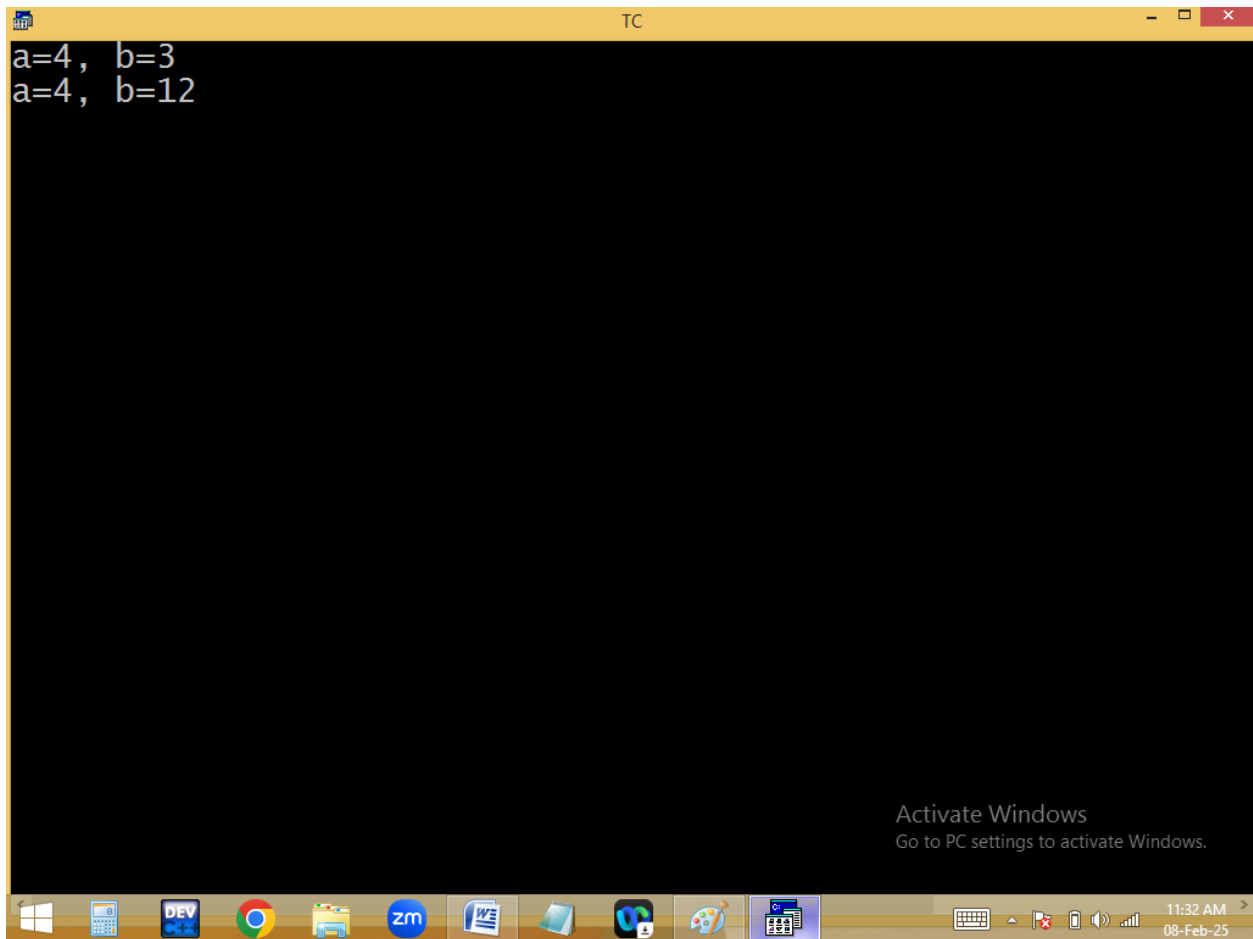

a=1


b = a++ + a++ + a++;
priority: +, =, a++

1. **b = a + a + a ==> 1 + 1 + 1**
2. **b = 3**
3. **a++==>a=2, a++==>a=3, a++==>a=4**

a=1

b = ++a + ++a + ++a;
priority: ++a, +, =


1. **++a==>a=2, ++a==>a=3, ++a==>a=4**
2. **b = a + a + a ==> 4+4+4**
3. **b = 12**

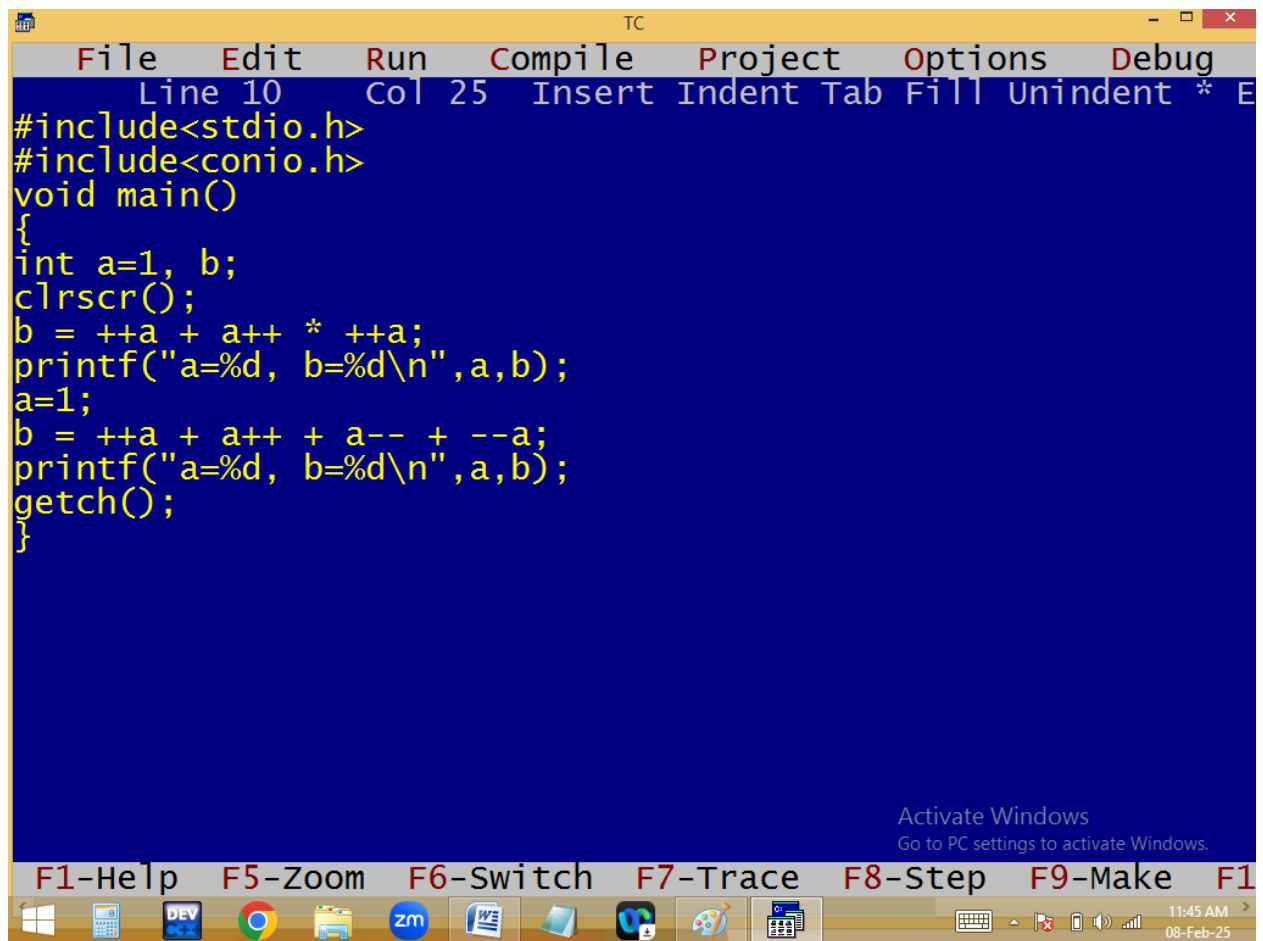

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, the status bar indicates "Line 10", "Col 25", and provides options like "Insert", "Indent", "Tab", "Fill", "Unindent", and a "Break" symbol. The main editing area has a dark blue background with yellow text. The code is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a=1, b;
clrscr();
b = ++a + a++ * ++a;
printf("a=%d, b=%d\n",a,b);
a=1;
b = ++a + a++ + a-- + --a;
printf("a=%d, b=%d\n",a,b);
getch();
}
```

At the bottom of the IDE window, there is a row of function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". Below this is the Windows taskbar, which includes icons for the Start menu, Task View, File Explorer, Google Chrome, Zoom, Word, and several other applications. The system tray on the right shows the time as "11:45 AM" and the date as "08-Feb-25". A watermark "Activate Windows" is visible in the bottom right corner of the IDE window.

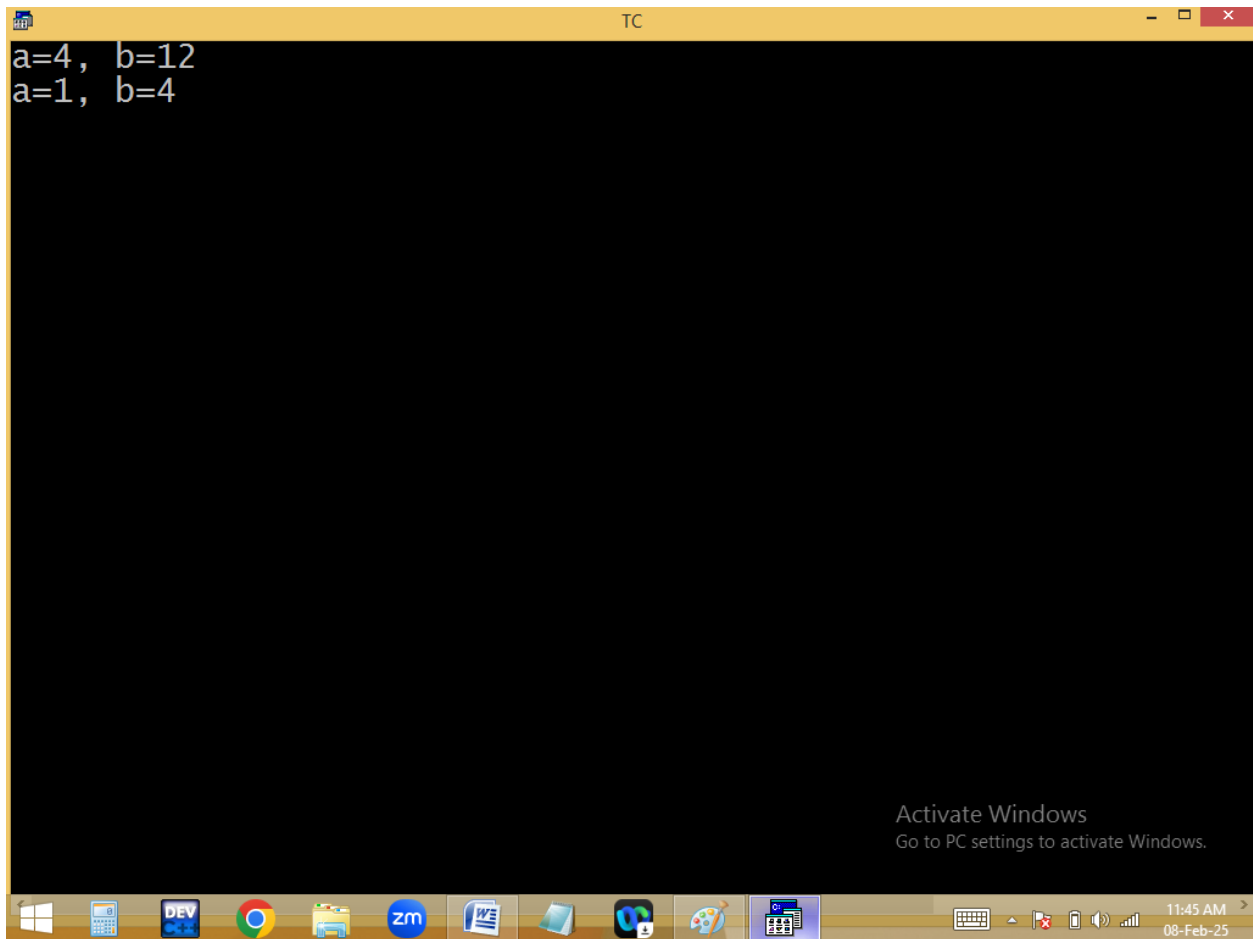

a=1

b = ++a + a++ * ++a;

priority: ++a, *, +, =, a++

1. ++a ==> a=2, ++a ==> a=3

2. **b = a+a * a**

3. **b = 3+3*3 ==> 3+9**

4. **b = 12**

5. a++ ==> **a=4**

a=1

b = ++a + a++ + a-- + --a;

priority: ++a, --a, +, =, a++, a--

1. ++a ==> a=2


2. --a ==> a=1

3. **b = a + a + a + a ==> 1+1+1+1**

4. **b = 4**

5. a++ ==> a=2

6. a-- ==> **a=1**

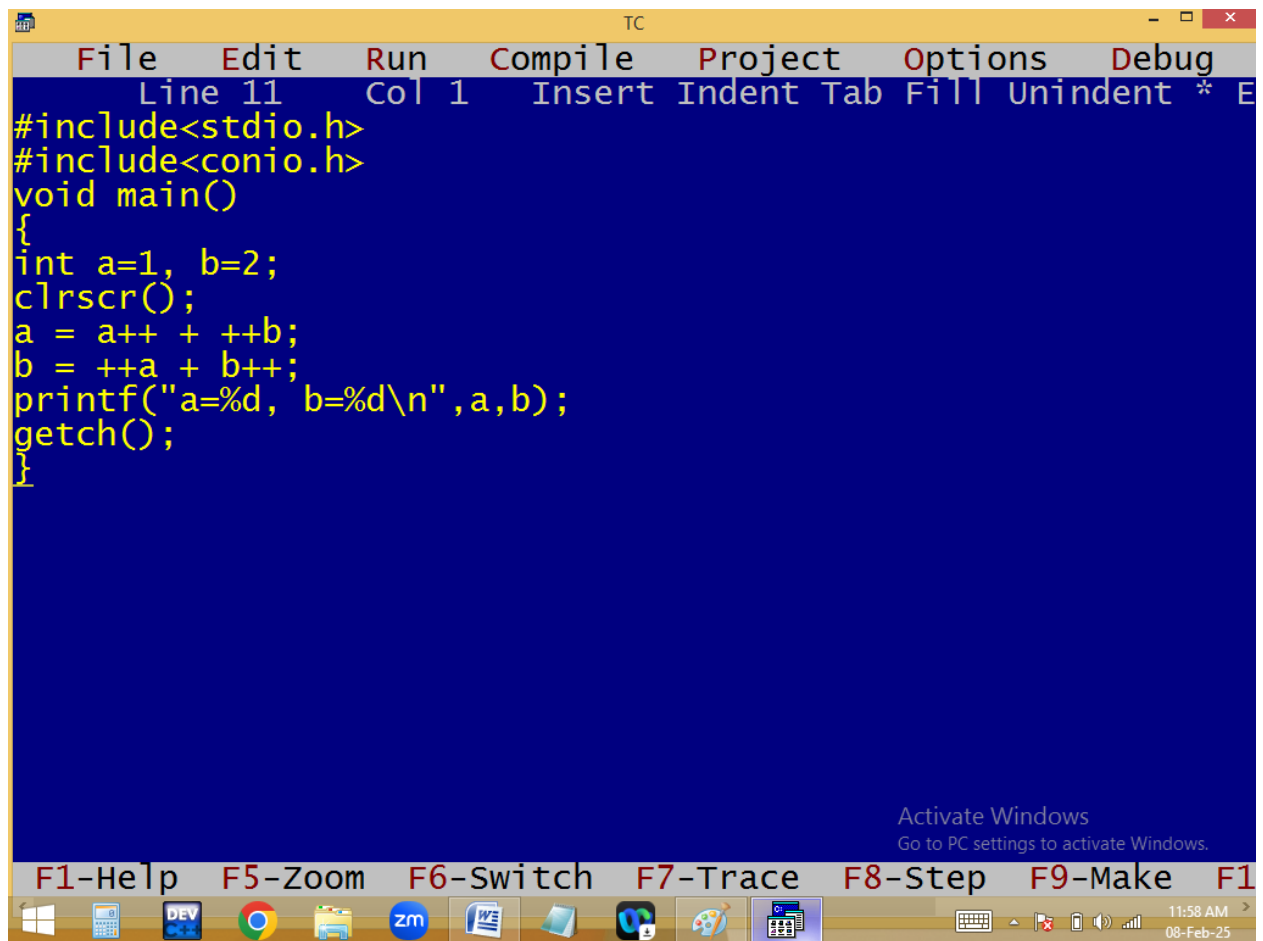


```
TC
File Edit Run Compile Project Options Debug
Line 11 Col 1 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a=1, b=2;
clrscr();
a = a++ + ++b;
b = ++a + b++;
printf("a=%d, b=%d\n",a,b);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

11:58 AM
08-Feb-25

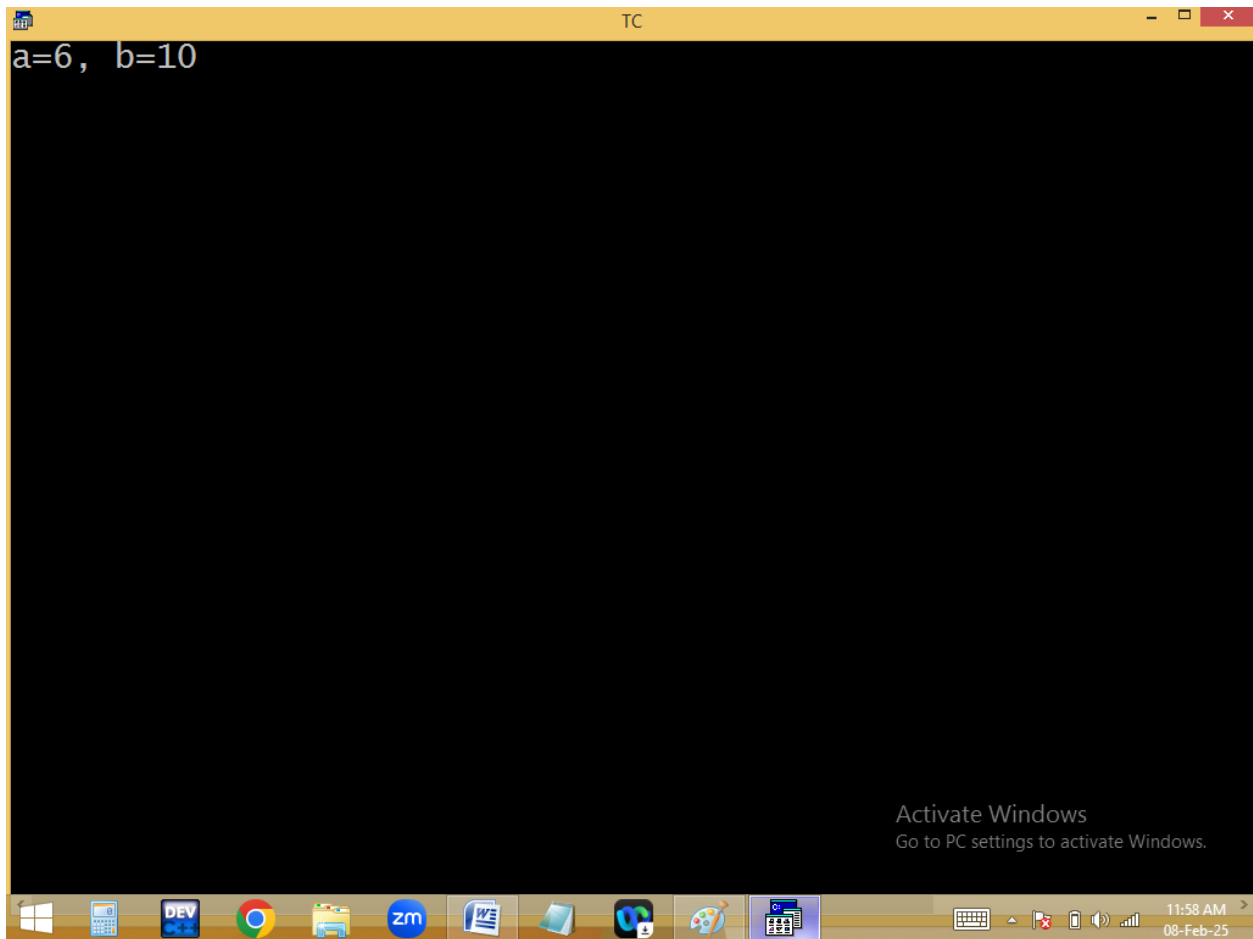

a=1 b=2

a = a++ + ++b;
priority: ++b, +, =, a++
1. ++b ==> **b=3**
2. a = a + b ==> 1 + 3
3. a = 4
4. a++ ==> **a=5**

a=5 b=3


b = ++a + b++;
priority: ++a, +, =, b++
1. ++a ==> **a=6** ✓
2. b = a + b ==> 6 + 3
3. b = 9
4. b++ ==> **b=10** ✓

```
TC
File Edit Run Compile Project Options Debug
Line 8 Col 32 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a=1, b=2,c=10;
clrscr();
c = a+++b;
printf("a=%d, b=%d, c=%d",a,b,c);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

12:00 PM
08-Feb-25

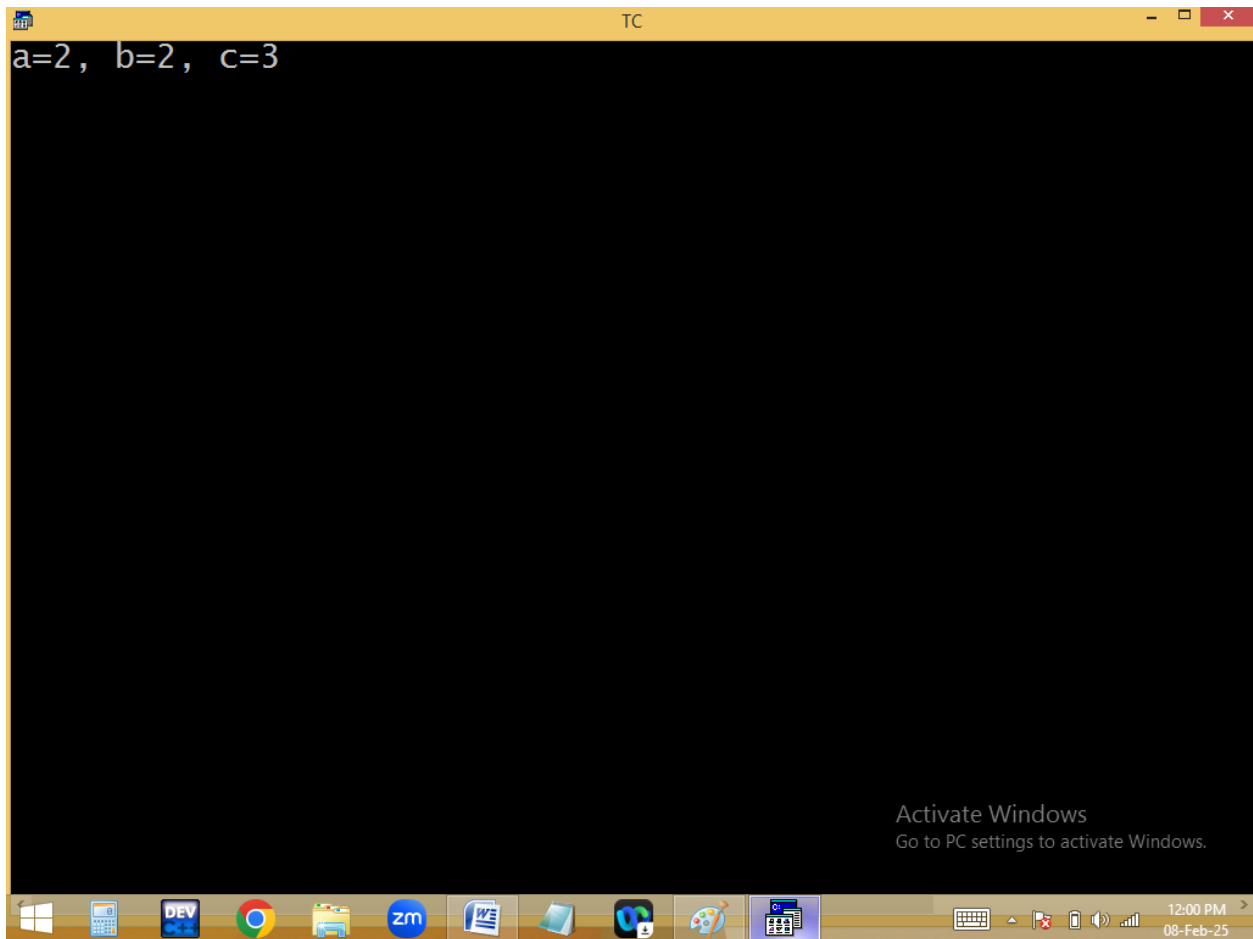

~~a=1~~ b=2 ✓ c=10
c = ~~a~~+++b;
1 + 2 = 3 ✓

a=1 **b=2** c=10


c = a+++b;

priority: +, =, a++

1. c = a + b ==> 1 + 2

2. **c = 3**

3. a++ ==> **a=2**

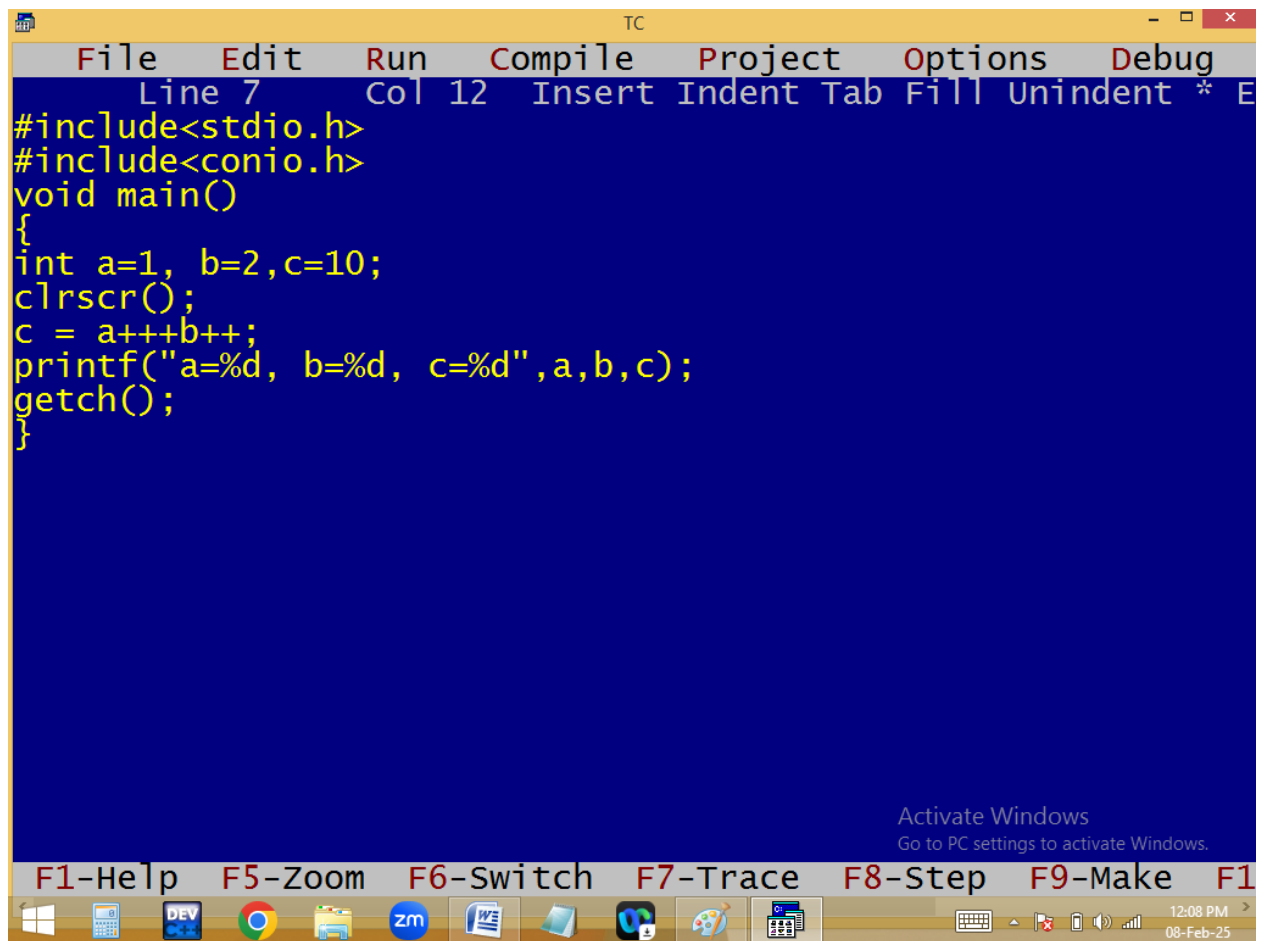

```
TC
File Edit Run Compile Project Options Debug
Line 7 Col 12 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a=1, b=2,c=10;
clrscr();
c = a+++b++;
printf("a=%d, b=%d, c=%d",a,b,c);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Exit

12:08 PM
08-Feb-25



TC

File Edit Run Compile Project Options Debug

Error: Lvalue required in function main

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a=1, b=2,c=10;
clrscr();
c = (a++ + b++)++;
printf("a=%d, b=%d, c=%d",a,b,c);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Exit

12:11 PM
08-Feb-25

c = (a++ + b++) ++ ;

↓ ↓
1 + 2
—
3 + +
↓
constant




Note: Always expression result is constant and constant value can't be change.


```
TC
File Edit Run Compile Project Options Debug
Line 9 Col 41 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a=1, b=2,c, d;
clrscr();
c = a++ == b--;
d = --a == b++;
printf("a=%d, b=%d, c=%d, d=%d",a,b,c, d);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

12:20 PM
08-Feb-25

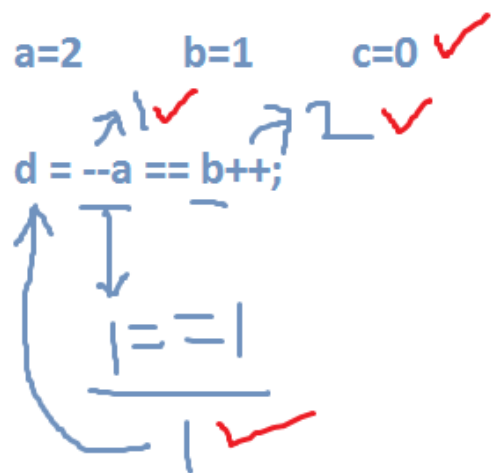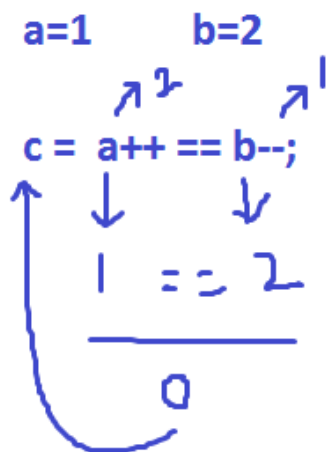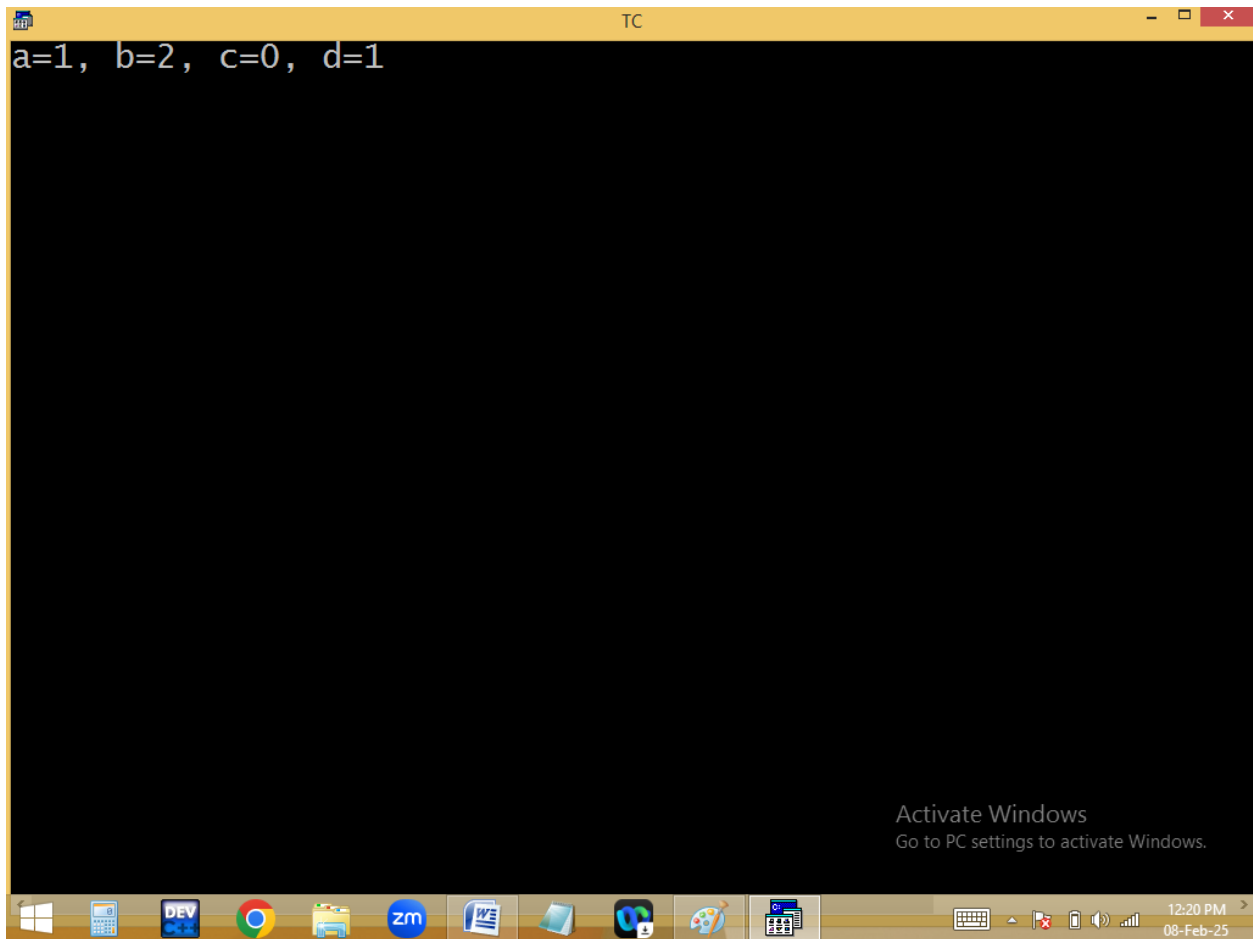

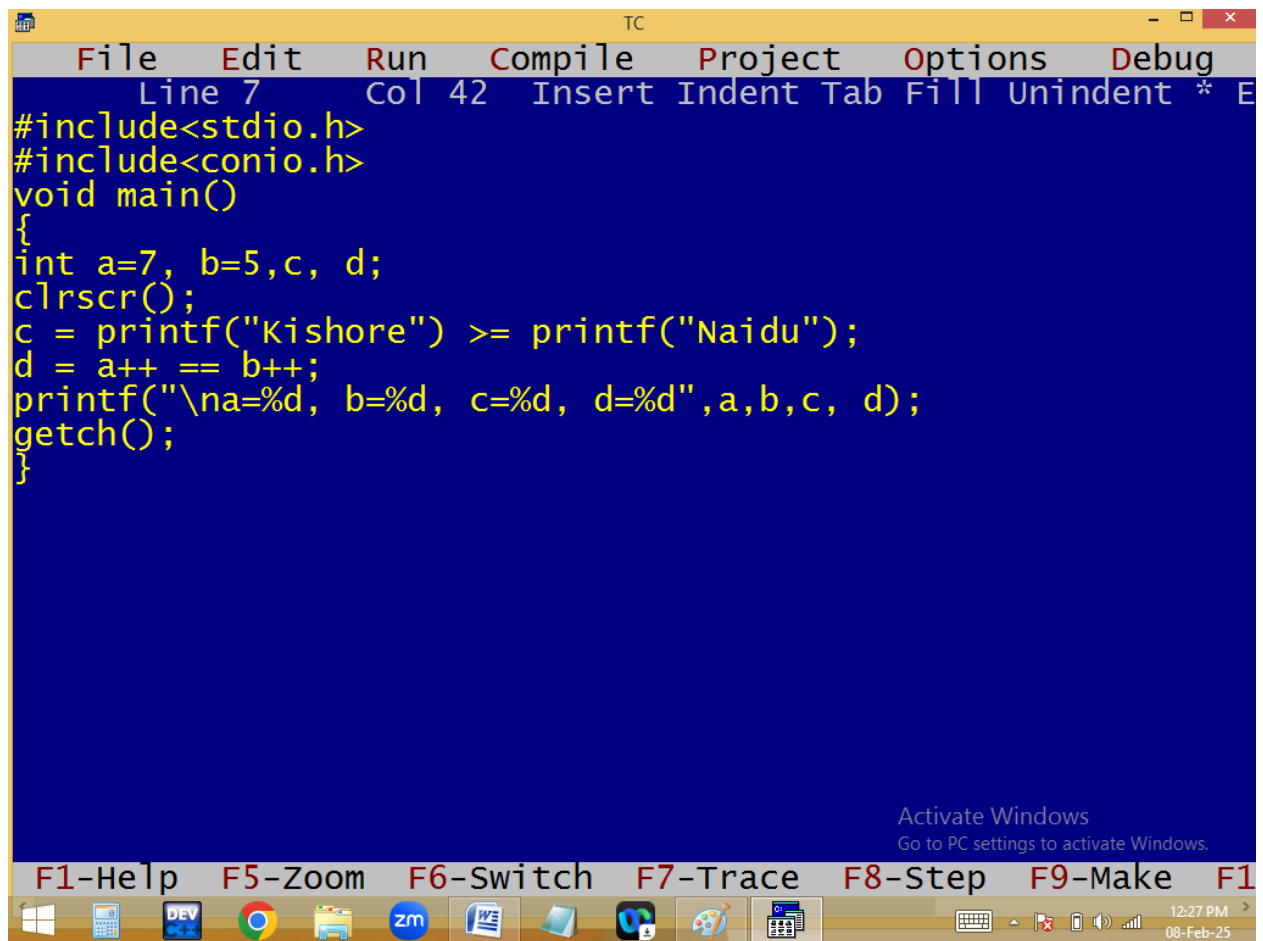


```
TC
File Edit Run Compile Project Options Debug
Line 7 Col 42 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a=7, b=5, c, d;
clrscr();
c = printf("Kishore") >= printf("Naidu");
d = a++ == b++;
printf("\na=%d, b=%d, c=%d, d=%d", a, b, c, d);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Exit

12:27 PM
08-Feb-25

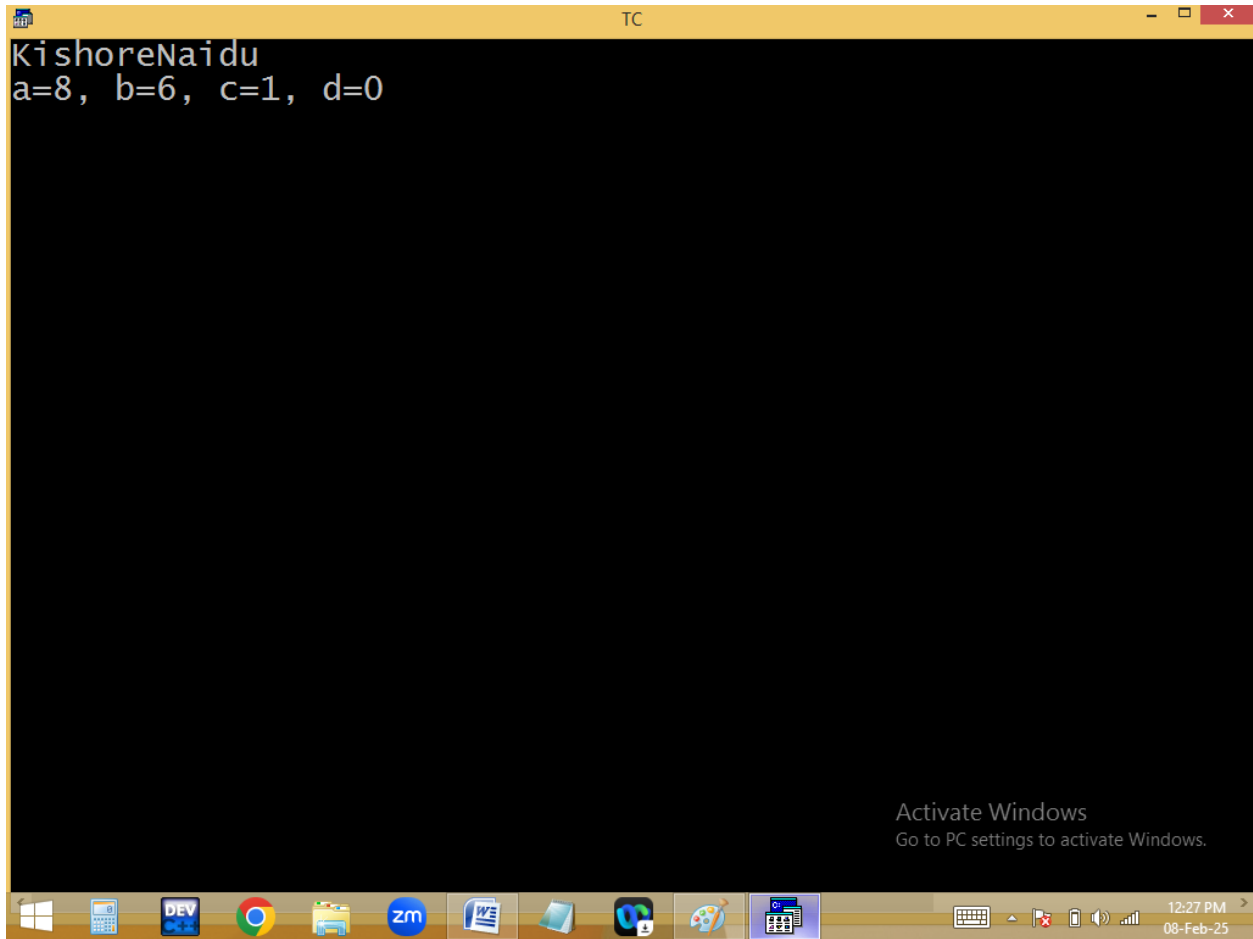

TC

File Edit Run Compile Project Options Debug


Line 9 Col 9 Insert Indent Tab Fill Unindent * E

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a=7, b=5,c, d;
clrscr();
c = a-- <= 6 && --b;
d = --a != 5 || b++;
printf("a=%d, b=%d, c=%d, d=%d",a,b,c, d);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

12:32 PM
08-Feb-25

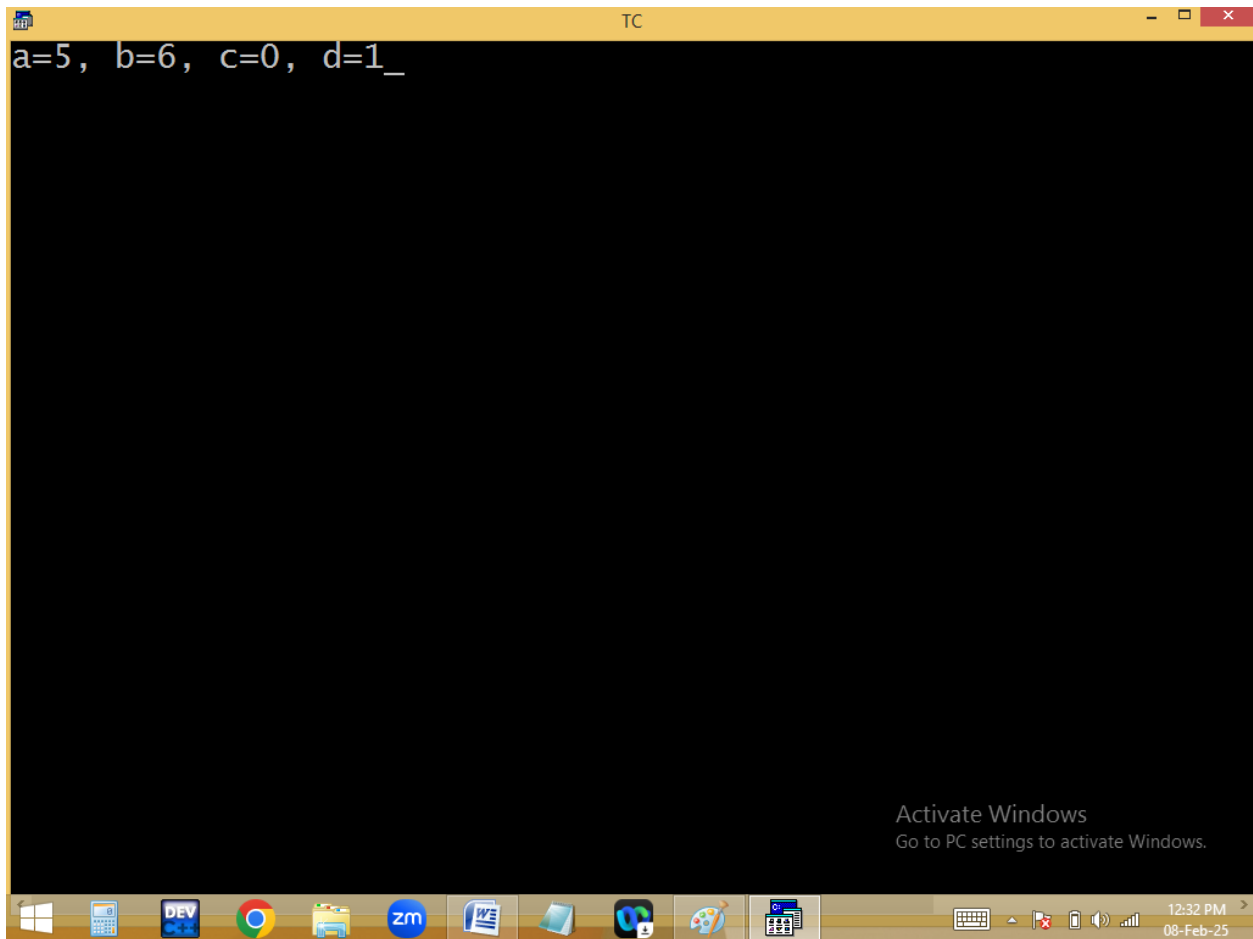

$a=7$ $b=5$ ✓

$c = a-- \leq 6 \ \&\& \ --b;$


$\begin{array}{r} 7 \leq 6 \\ \hline 0 \end{array}$ ✓

$a=6$ $b=5$ $c=0$ ✓

$d = --a \neq 5 \ || \ b++;$

$\begin{array}{r} 5 \neq 5 \\ \hline 0 \ || \ 1 \\ \hline 1 \end{array}$ ✓

Note: In $\&\&$ operation when left exp false, right exp not checked.
In $||$ operation when left exp true, right exp not checked.

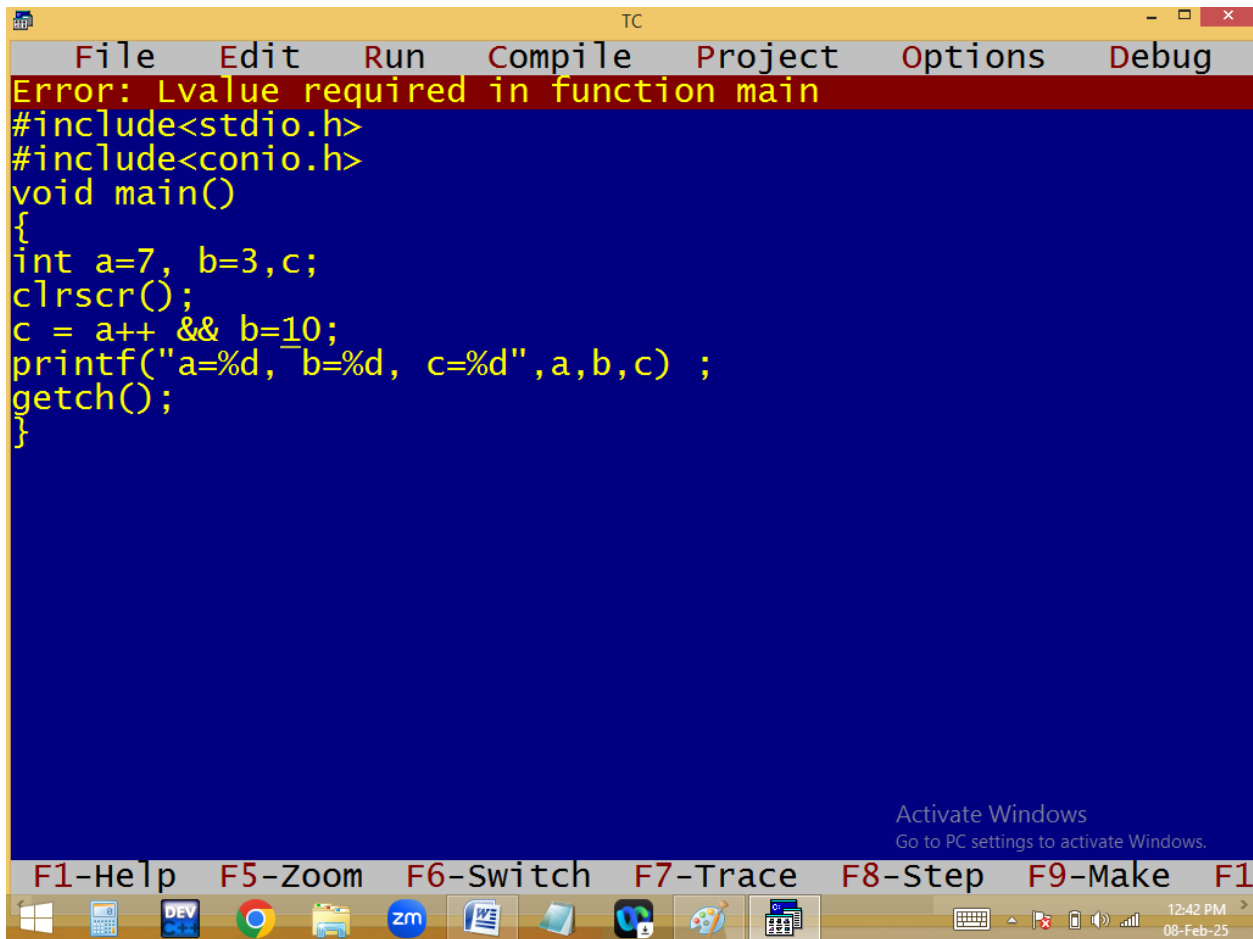

The image shows a screenshot of the Turbo C++ (TC) IDE. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error message banner at the top of the editor area states "Error: Lvalue required in function main". The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a=7, b=3,c;
clrscr();
c = a++ && b=10;
printf("a=%d, b=%d, c=%d",a,b,c) ;
getch();
}
```

At the bottom of the IDE, there is a status bar with function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". Below the IDE window is the Windows taskbar, which includes icons for the Start menu, Task View, File Explorer, Google Chrome, Zoom, Word, and other applications. The system tray on the right shows the time as 12:42 PM and the date as 08-Feb-25. A watermark "Activate Windows" is visible in the bottom right corner of the desktop area.

a=7

c = a++ && b = 10;

7 && 3
1 && 1

1 = 10



1 is a constant