

TC

File Edit Run Compile Project Options Debug


Line 12 Col 1 Insert Indent Tab Fill Unindent * E

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a=2, b;
clrscr();
b = a++ + a++ + a++;
printf("a=%d, b=%d\n",a,b) ;
a=2;
b = ++a + ++a + ++a;
printf("a=%d, b=%d\n",a,b) ;
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Exit

11:27 AM
10-Feb-25

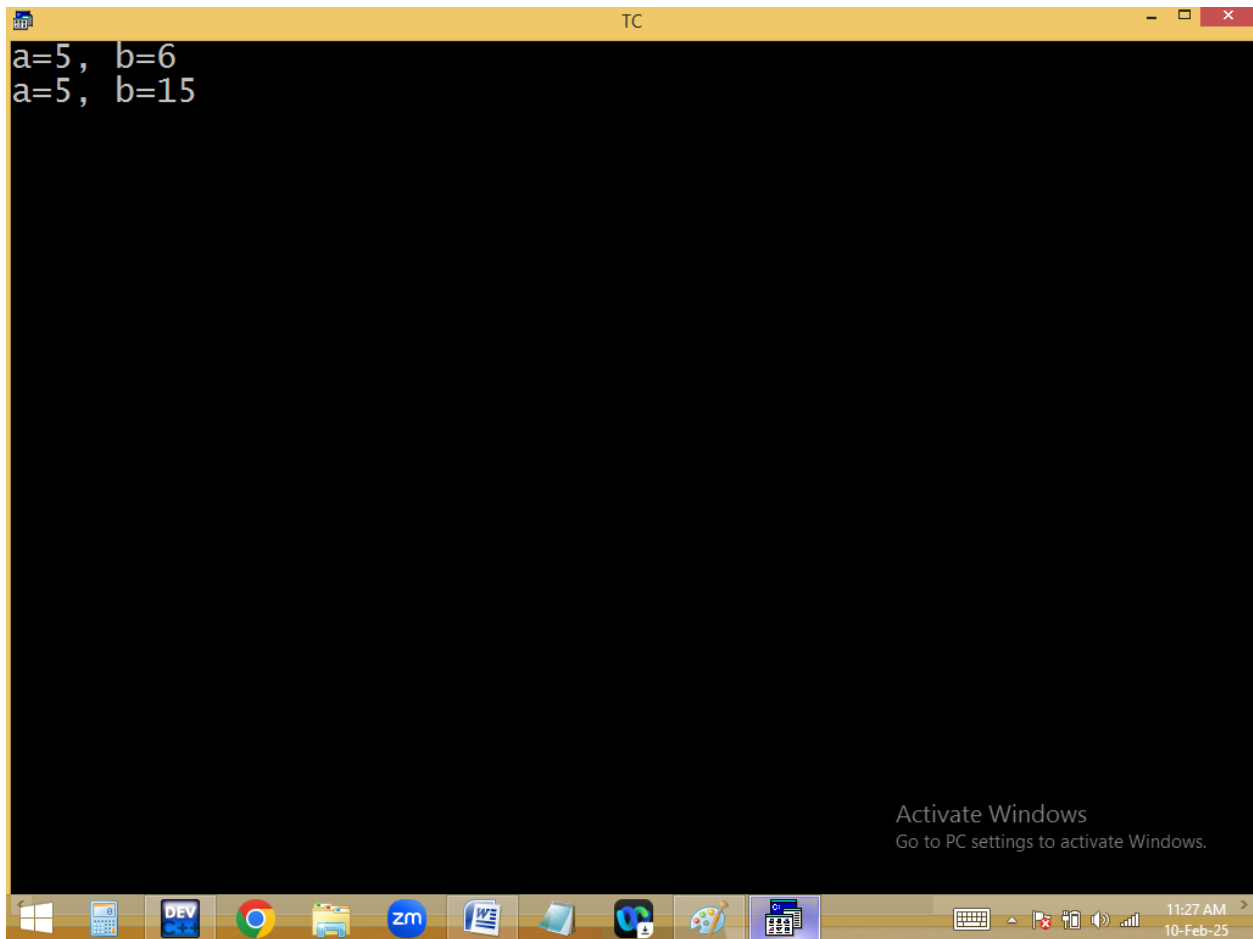

```
#include<stdio.h>
```

```
main()
```

```
{
```

```
    int a=2, b;
```

```
    b = a++ + a++ + a++;
```

```
    printf("a=%d, b=%d\n",a,b);
```

```
    a=2;
```

```
    b = ++a + ++a + ++a;
```

```
    printf("a=%d, b=%d",a,b);
```

```
}
```

```
C:\Users\kishore sir\Documents\testing.exe

a=5, b=9
a=5, b=13
-----
Process exited after 9.105 seconds with return value 0
Press any key to continue . . .

Activate Windows
Go to PC settings to activate Windows.
```

In dev c++ / vscode / online compilers

c++/c compiler: +, =, a++

b = 2 + 2 + 2 = 6

a++==>3, a++=4, a++==>5

++a ==> a=3, ++a==>a=4, ++a==> a=5

b = 5 + 5 + 5 = b=15

~~a=2~~ 5 ✓
a=2
3 4 5
b = a++ + a++ + a++
2 + 3 + 4 = 9 ✓

~~a=2~~ 5 ✓

b = ++a + ++a + ++a;
4 + 4
8 + 5 = 13 ✓

Turbo C++ IDE

File Edit Search Run Compile Debug Project Options

INC.CPP

```
#include<stdio.h>
#include<conio.h>
void main()
{
int x=3, y=2;
int z;//declaration
z=x++ * (x+y) - y--;// initialization
clrscr();
printf("x=%d, y=%d, z=%d",x,y,z);
getch();
}
```

8:17

Activate Windows
Go to PC settings to activate Windows

F1 Help Alt-F8 Next Msg Alt-F7 Prev Msg Alt-F9 Compile

11:31 AM
10-Feb-25

$x = 3, y = 2;$

$z = x++ * (x+y) - y--;$

Handwritten annotations:

- Red arrow from $x++$ to 4 ✓
- Red arrow from $(x+y)$ to 1 ✓
- Red arrow from $y--$ to 2 ✓

Calculation steps:

$$\begin{array}{r} \underline{3+2} \\ 5 \\ \underline{3 \times 5} \\ 15 \end{array}$$

$15 - 2 = 13$ ✓

A red curved arrow points from the final result 13 back to the variable z in the original expression.

Turbo C++ IDE

File Edit Search Run Compile Debug Project Options

INC.CPP

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int x=3, y=2;
    int z=x++ * (x+y) - y--; //declaration initialization
    clrscr();
    printf("x=%d, y=%d, z=%d",x,y,z);
    getch();
}
```

6:26

Activate Windows
Go to PC settings to activate Windows

F1 Help Alt-F8 Next Msg Alt-F7 Prev Msg Alt-F9 Compile

11:35 AM
10-Feb-25

x=3 y=2

int z = x++ * (x + y) - y--;

3 * (4 + 2) - 2

3 x 6

18 - 2 = 16 ✓

Turbo C++ IDE

File Edit Search Run Compile Debug Project Options

INC.CPP


```
#include<stdio.h>
#include<conio.h>
void main()
{
float x=3/2; // implicit type casting
clrscr();
printf("x=%f\n",x+7);
printf("x=%f\n",x++);
printf("x=%f",x);
getch();
}
```


9:18

Activate Windows
Go to PC settings to activate Windows

F1 Help F2 File Explorer F3 Open Alt-F9 Compile F9 Make F10 Men

11:44 AM
10-Feb-25

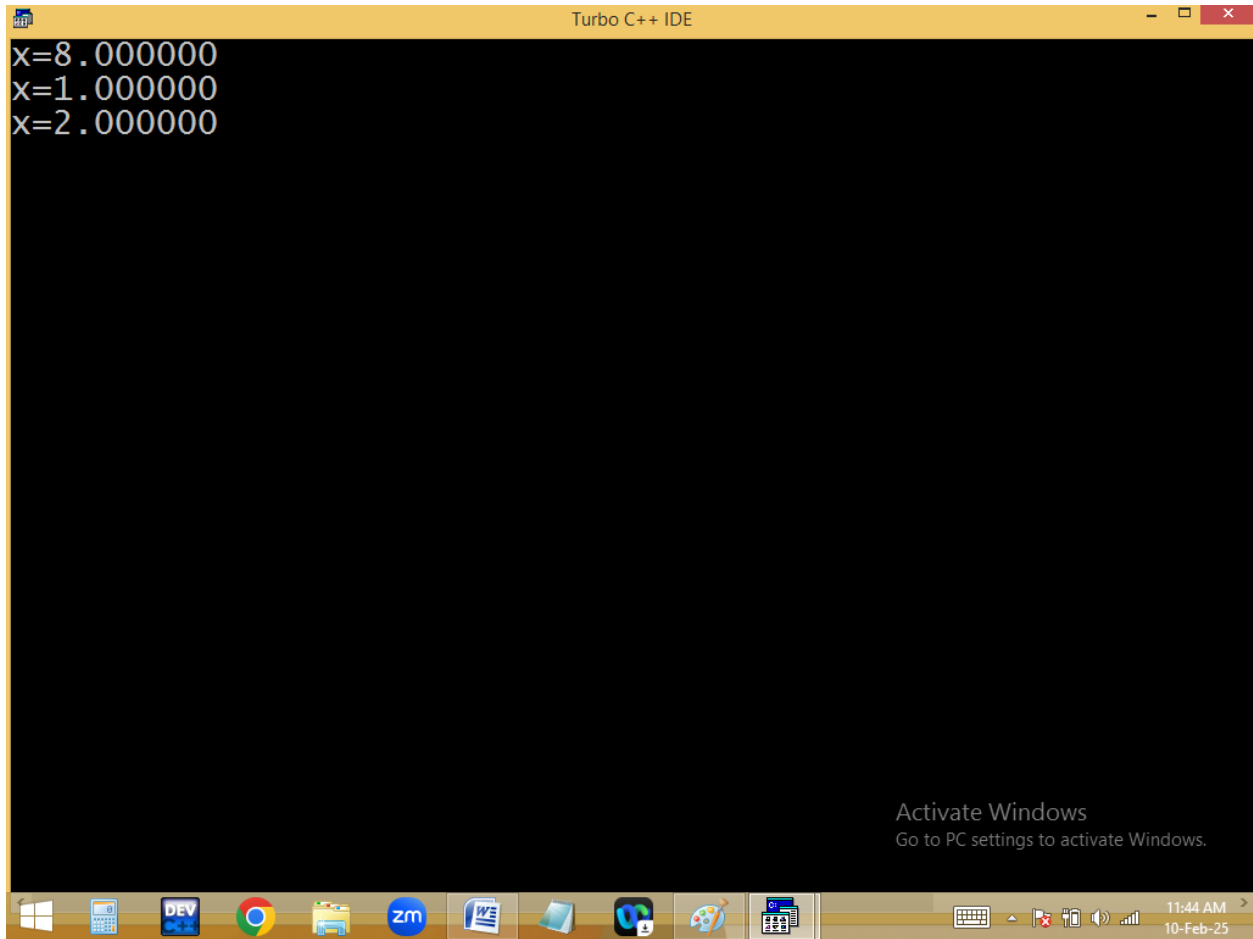

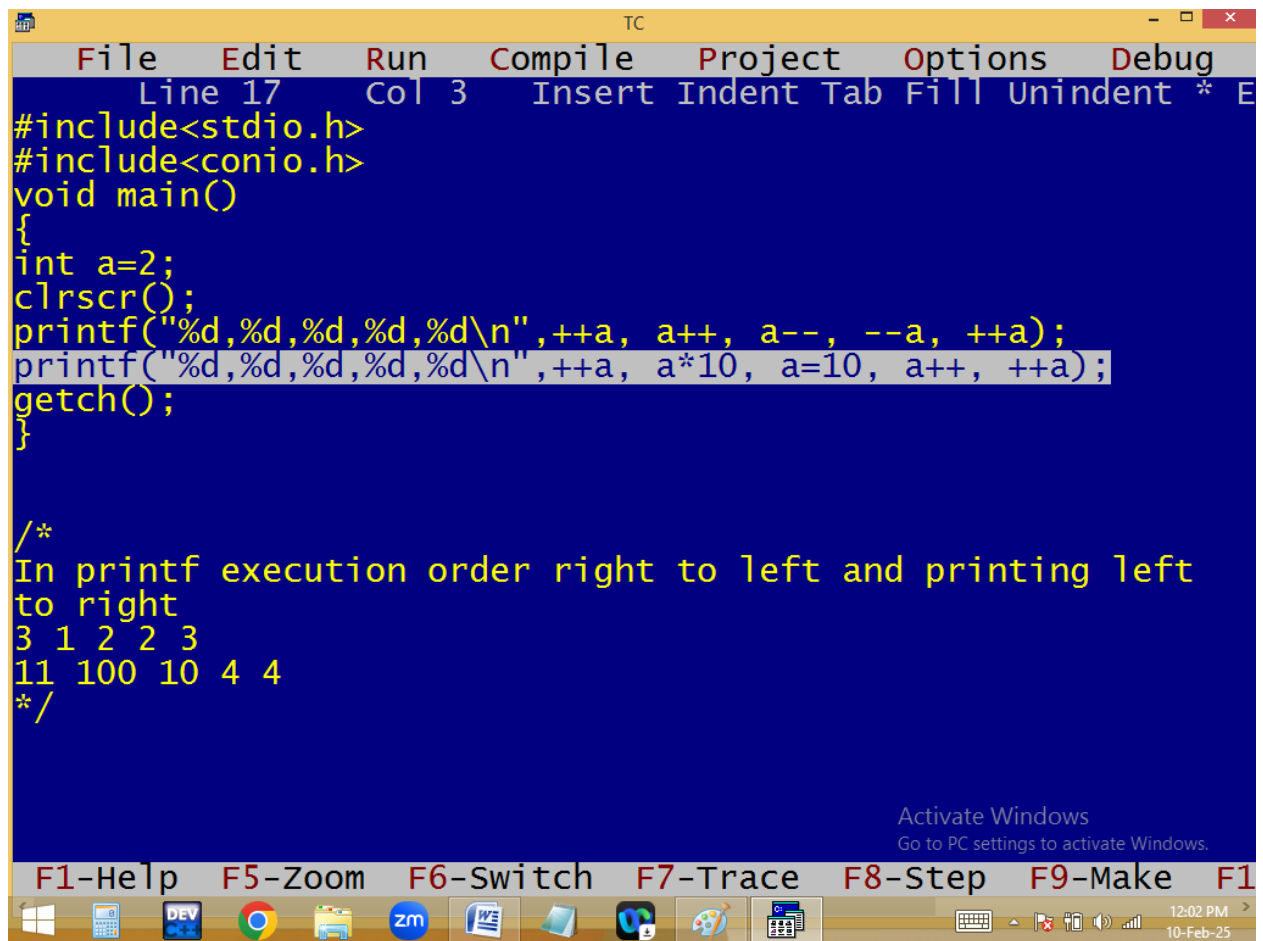


The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, the status bar shows "Line 17", "Col 3", and "Insert Indent Tab Fill Unindent * E". The main editing area has a dark blue background with yellow text. The code is as follows:



```
#include<stdio.h>
#include<conio.h>
void main()
{
int a=2;
clrscr();
printf("%d,%d,%d,%d,%d\n",++a, a++, a--, --a, ++a);
printf("%d,%d,%d,%d,%d\n",++a, a*10, a=10, a++, ++a);
getch();
}
```


Below the code, there is a comment block:

```
/*
In printf execution order right to left and printing left
to right
3 1 2 2 3
11 100 10 4 4
*/
```

At the bottom of the window, there is a toolbar with icons for various functions. Below the toolbar, the status bar displays "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". The system tray at the bottom right shows the time "12:02 PM" and the date "10-Feb-25".

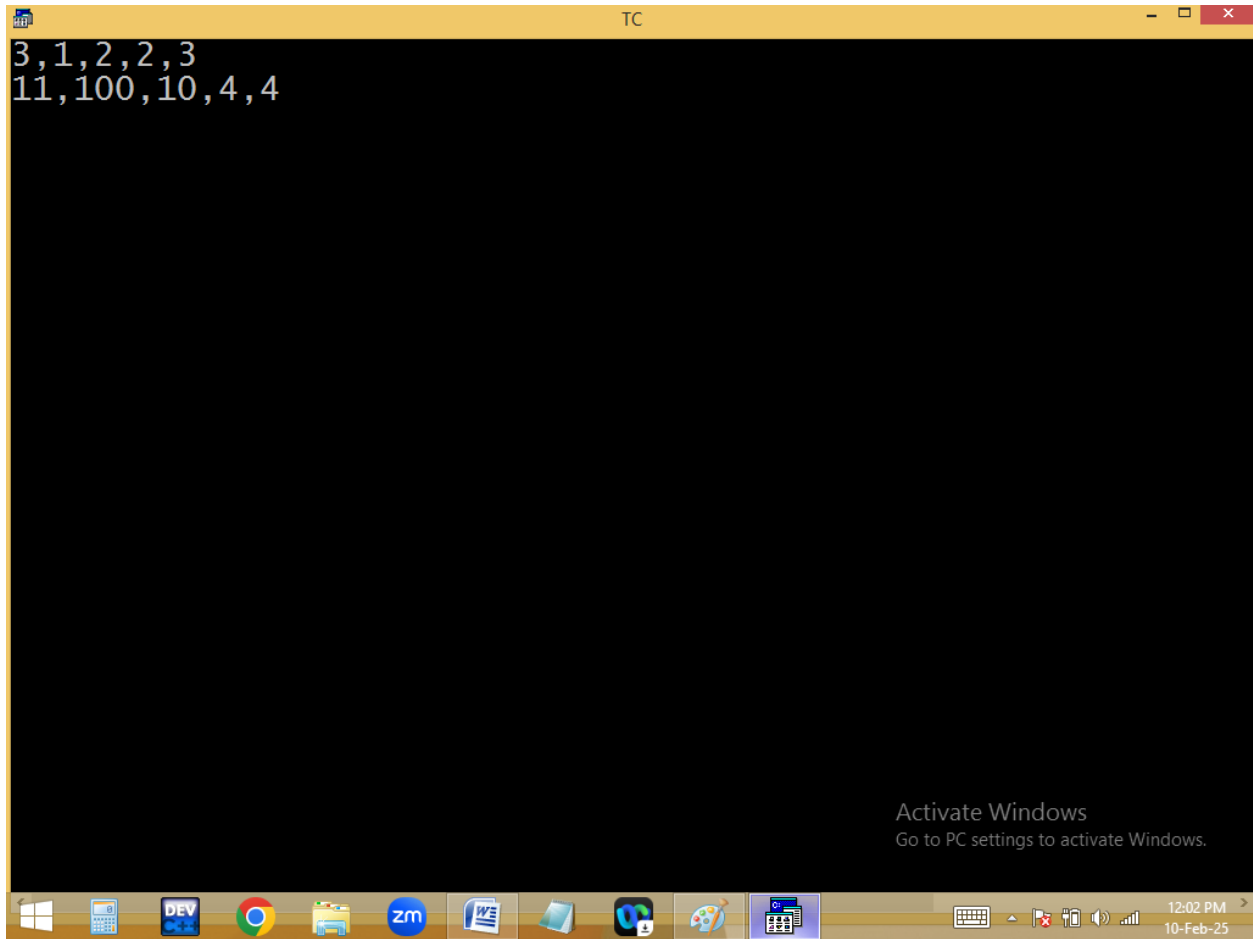

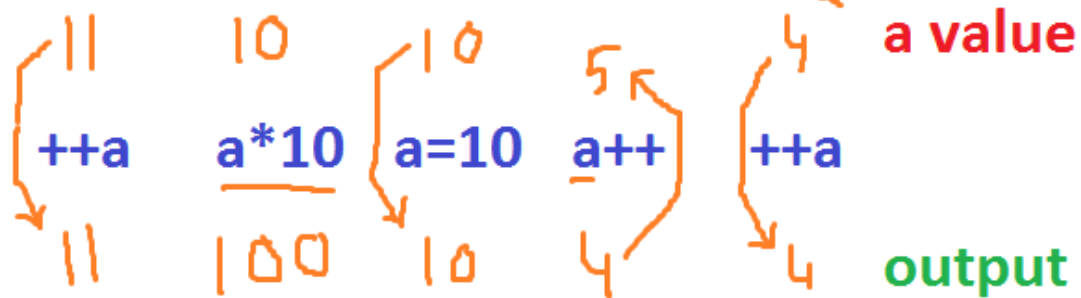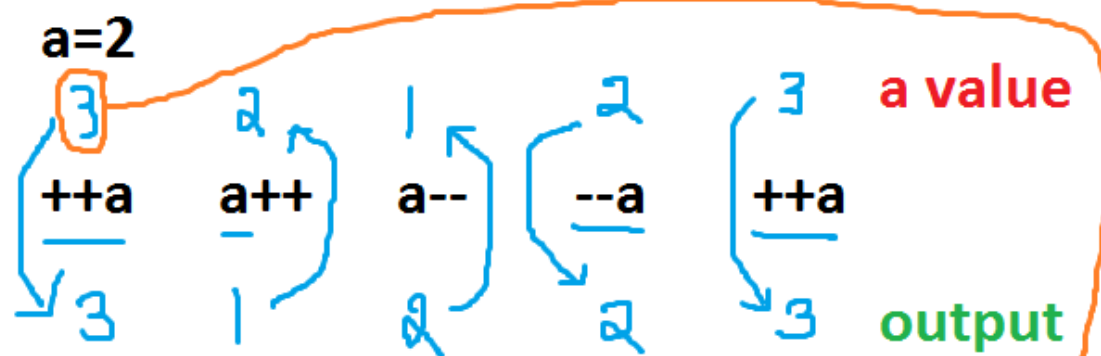

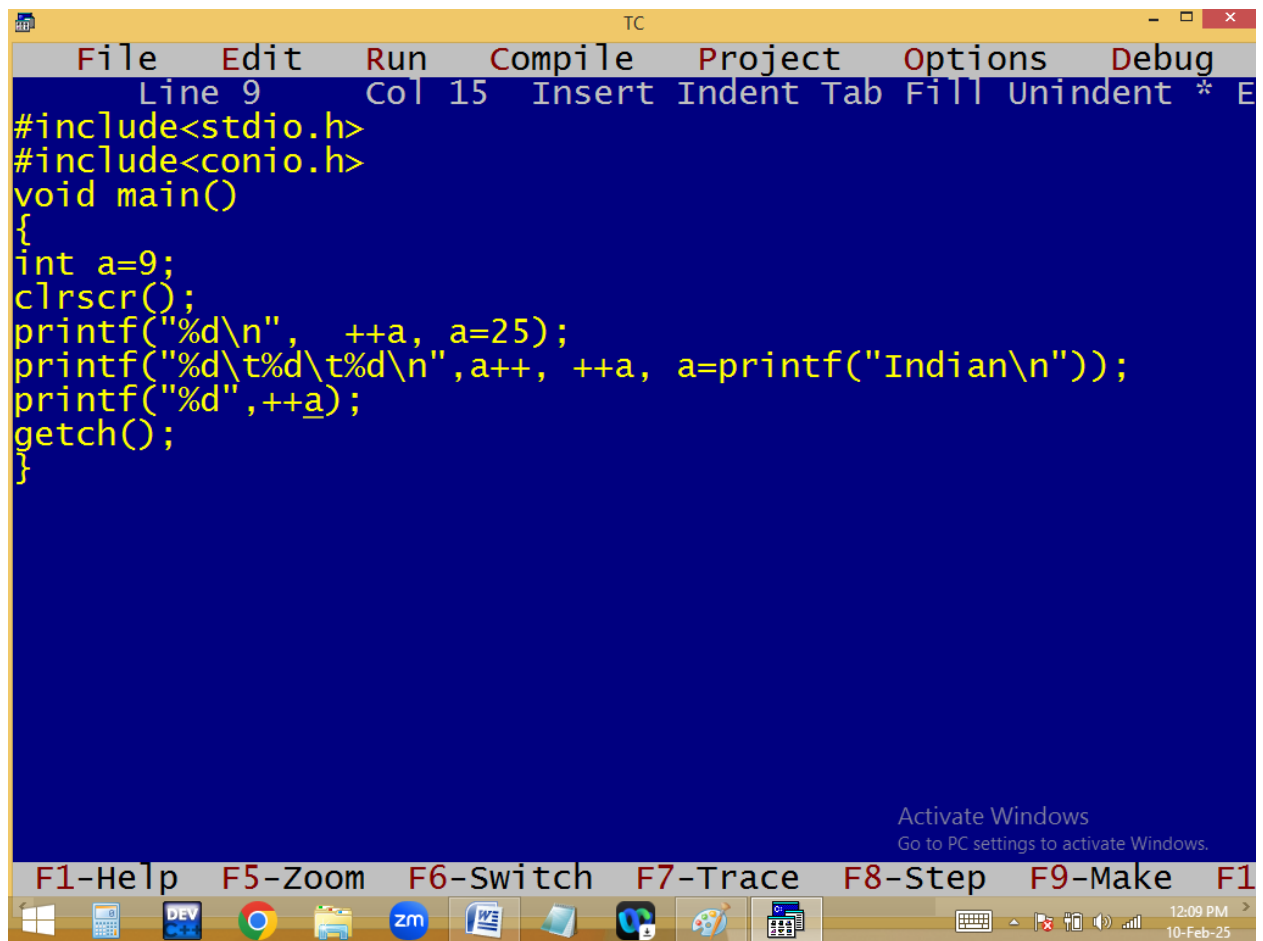



```
TC
File Edit Run Compile Project Options Debug
Line 9 Col 15 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a=9;
clrscr();
printf("%d\n", ++a, a=25);
printf("%d\t%d\t%d\n",a++, ++a, a=printf("Indian\n"));
printf("%d",++a);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

12:09 PM
10-Feb-25

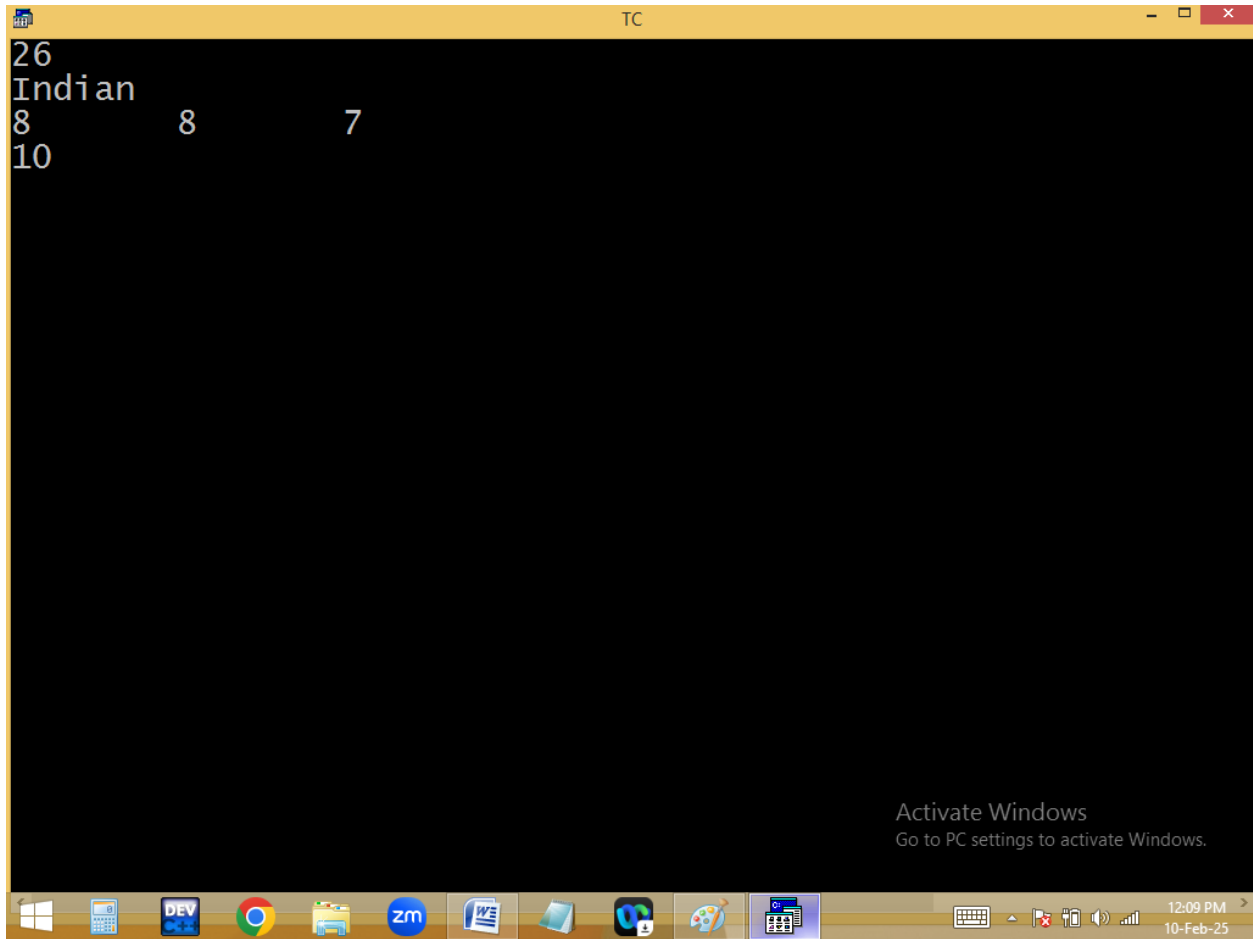

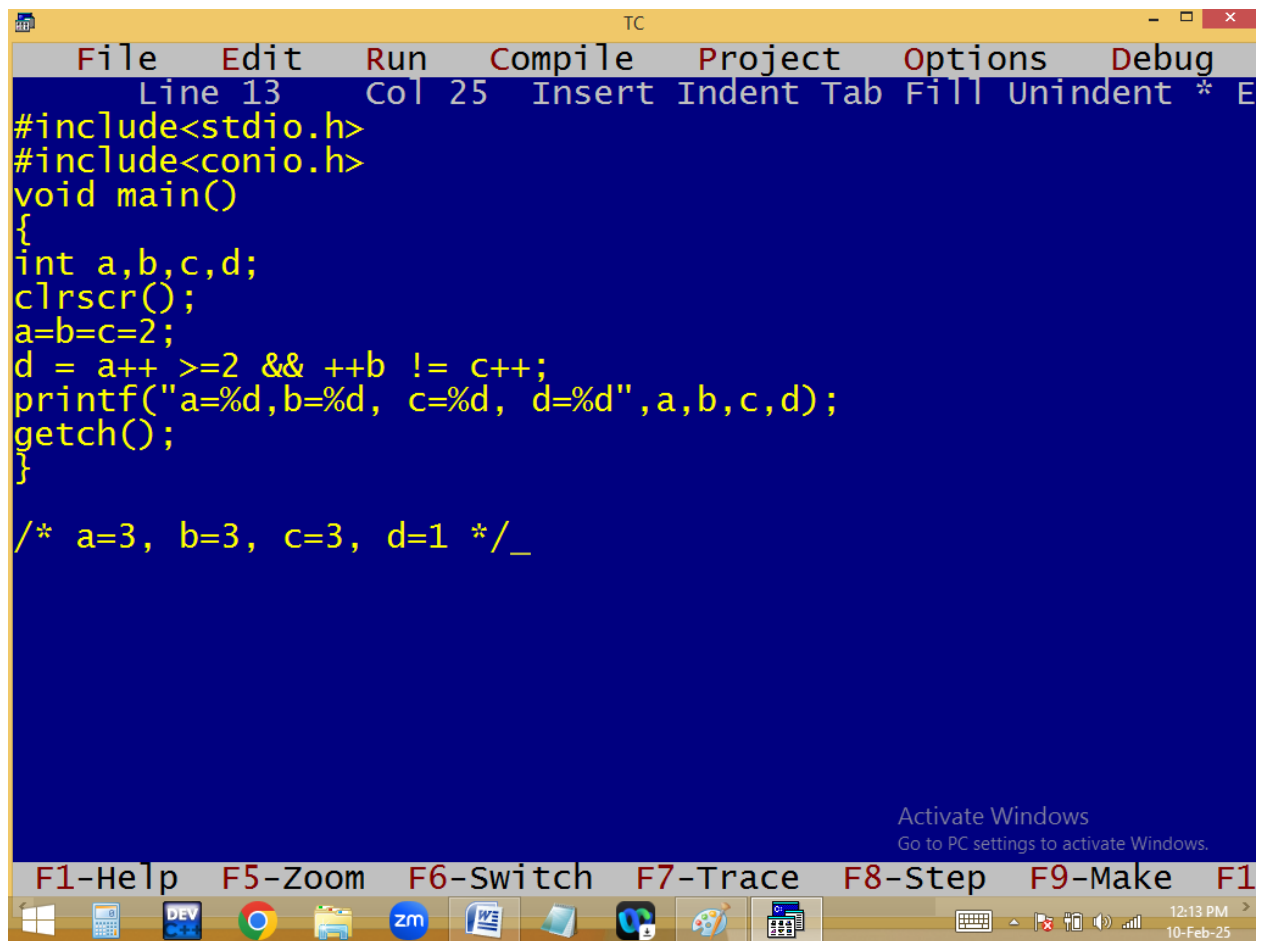

```
TC
File Edit Run Compile Project Options Debug
Line 13 Col 25 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a,b,c,d;
clrscr();
a=b=c=2;
d = a++ >=2 && ++b != c++;
printf("a=%d,b=%d, c=%d, d=%d",a,b,c,d);
getch();
}

/* a=3, b=3, c=3, d=1 */_

Activate Windows
Go to PC settings to activate Windows.
F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Exit
12:13 PM
10-Feb-25
```

a=2 b=2 c=2

d = a++ >= 2 && ++b != c++;

(Handwritten annotations: red arrows point from the underlined expressions to their values: a++ to 3, ++b to 3, c++ to 3. Green checkmarks are next to each value.)

2 >= 2 && 3 != 2

(Handwritten annotations: red lines connect the underlined expressions to their values. A red line connects the first and second sub-expressions, and another connects the third and fourth. A green checkmark is next to the final result.)

1 && 1

1 ✓


```

TC
File Edit Run Compile Project Options Debug
Line 13 Col 14 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a,b,c,d;
clrscr();
a=b=c=2;
d = a++ >= b++ && ++b != c++;
printf("a=%d,b=%d, c=%d, d=%d",a,b,c,d);
getch();
}

/* a=3, b=4, _c=3, d=1 */


```

Activate Windows
Go to PC settings to activate Windows.

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

12:16 PM 10-Feb-25

a=2 b=2 c=2

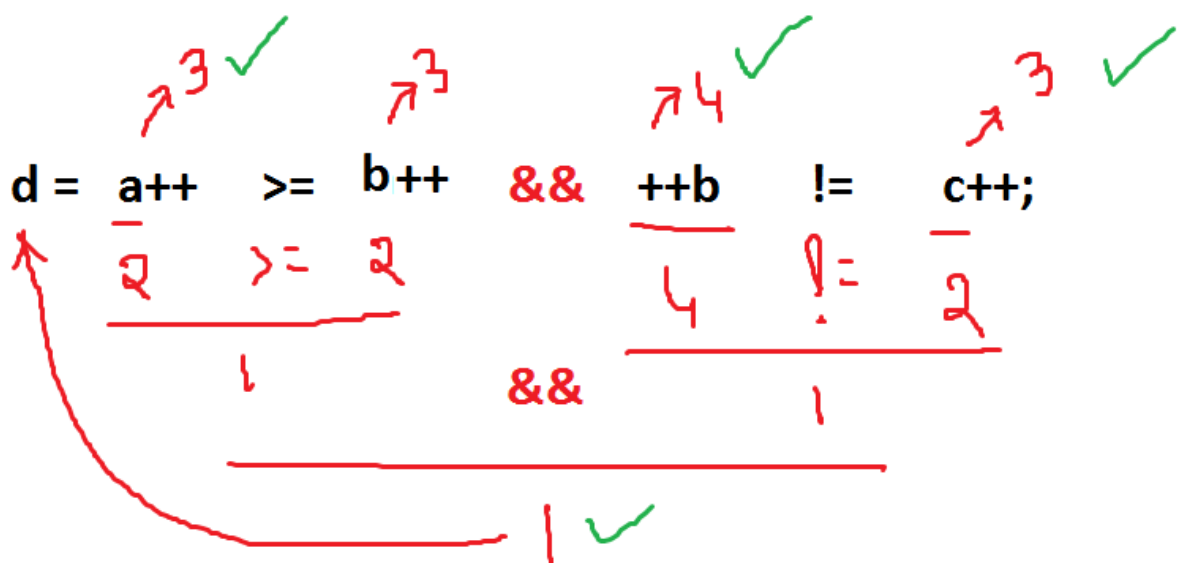

```
TC
File Edit Run Compile Project Options Debug
Line 13 Col 18 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a,b,c,d;
clrscr();
a=b=c=2;
d = a++ >= b++ || ++b != c++;
printf("a=%d,b=%d, c=%d, d=%d",a,b,c,d);
getch();
}

/* a=3, b=3, c=2, d=1 */

Activate Windows
Go to PC settings to activate Windows.
F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Exit
```

a=2 b=2 c=2 ✓

d = a++ >= b++ || ++b != c++;

Handwritten annotations: Red arrows point from 'a++' to '3' and from 'b++' to '3', both with green checkmarks. A red arrow points from '++b' to '3' with a green checkmark. A red arrow points from 'c++' to '2' with a green checkmark. A red arrow points from the first '2' (under 'a++') to the 'd' variable. The text 'Not checked' is written in red above the '||' operator.

Note: In || when left exp true, right exp not checked

```
TC
File Edit Run Compile Project Options Debug
Line 13 Col 23 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a,b,c,d;
clrscr();
a=b=c=2;
d = a++ != b++ && ++b != c++;
printf("a=%d,b=%d, c=%d, d=%d",a,b,c,d);
getch();
}

/* a=3, b=3, c=2, d=0 */
```

a=2 b=2 c=2 ✓

d = a++ != b++ && ++b != c++;

Handwritten annotations: Red arrows point from the underlined expressions to their values: a++ points to 3, b++ points to 3, ++b points to 2, and c++ points to 2. A red arrow points from the result of the first != operation to the value 0. Green checkmarks are placed next to the values 3, 3, 2, and 0. The text "Not checked" is written in red above the && operator.

Note: In && when left exp false, right exp not checked

```

TC
File Edit Run Compile Project Options Debug
Line 12 Col 23 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a=0,b=1,c=2,d;
clrscr();
d = a++ || ++b || --c;
printf("a=%d,b=%d, c=%d, d=%d",a,b,c,d);
getch();
}

/* a=1, b=2, c=2, d=1 */

```

Activate Windows
Go to PC settings to activate Windows.

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run


12:24 PM
10-Feb-25

a=0 b=1 c=2 ✓

d = a++ || ++b || --c;

0 1 1

1 ✓ X

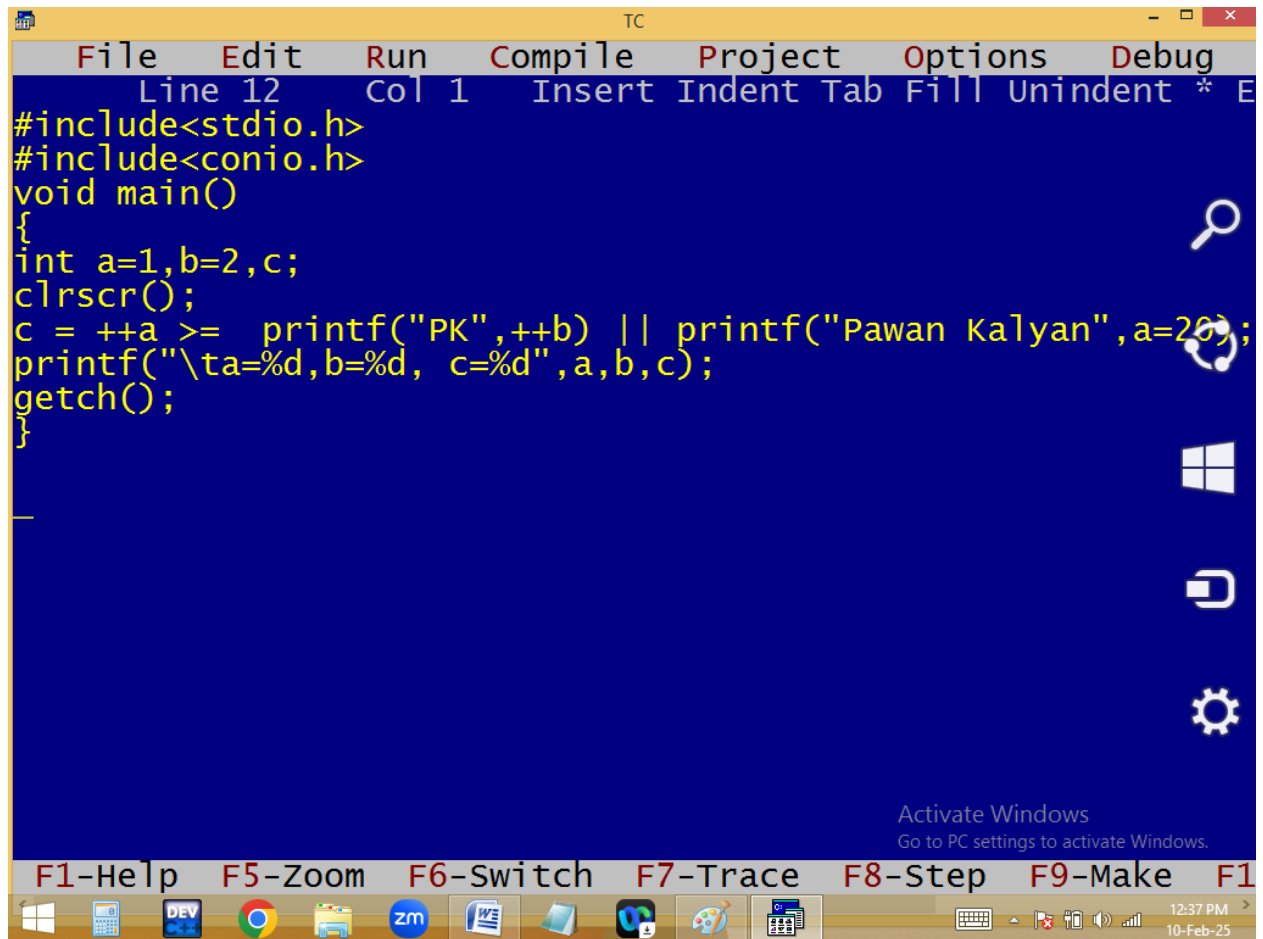



```
TC
File Edit Run Compile Project Options Debug
Line 12 Col 1 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a=1,b=2,c;
clrscr();
c = ++a >= printf("PK",++b) || printf("Pawan Kalyan",a=20);
printf("\ta=%d,b=%d, c=%d",a,b,c);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Exit

12:37 PM
10-Feb-25

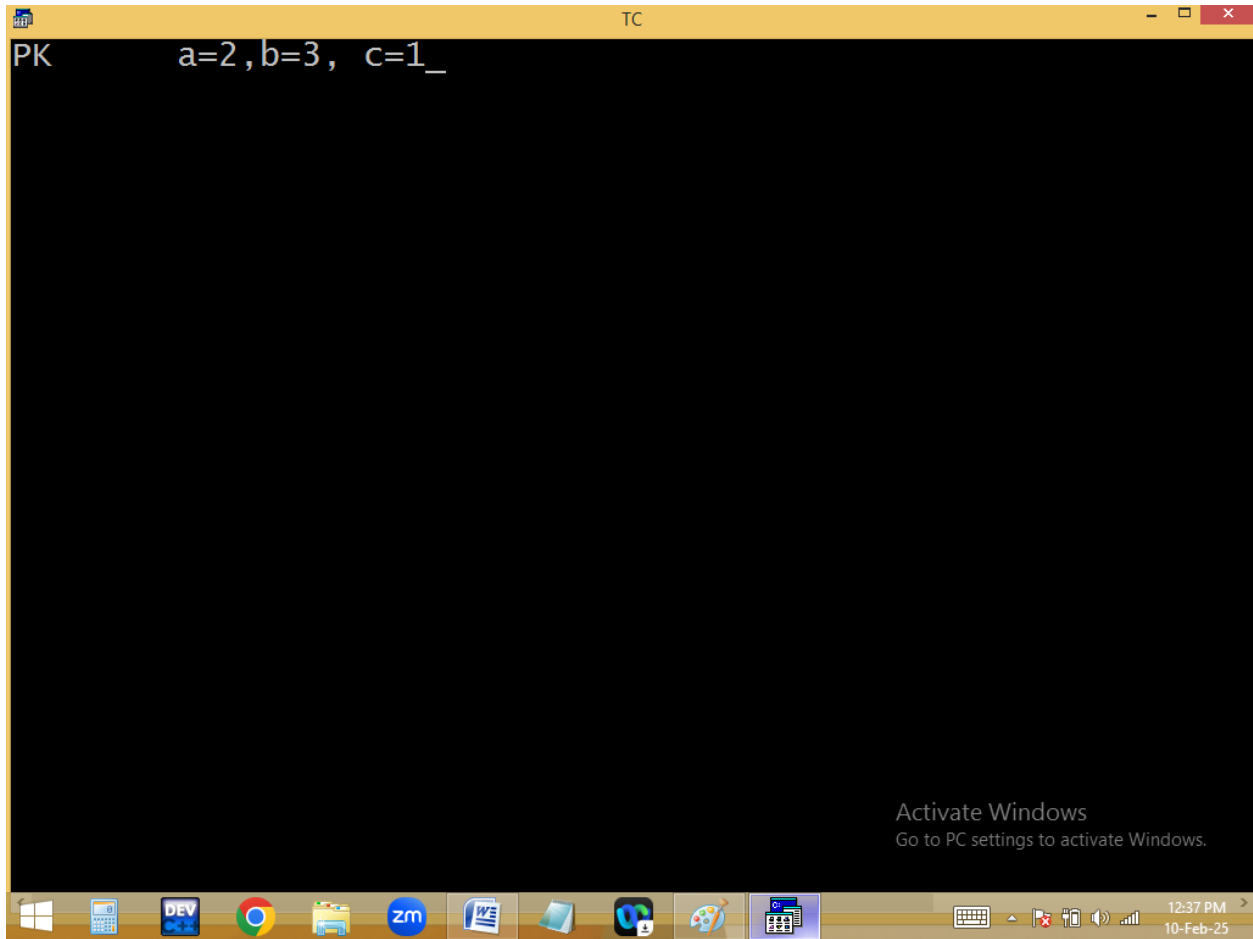

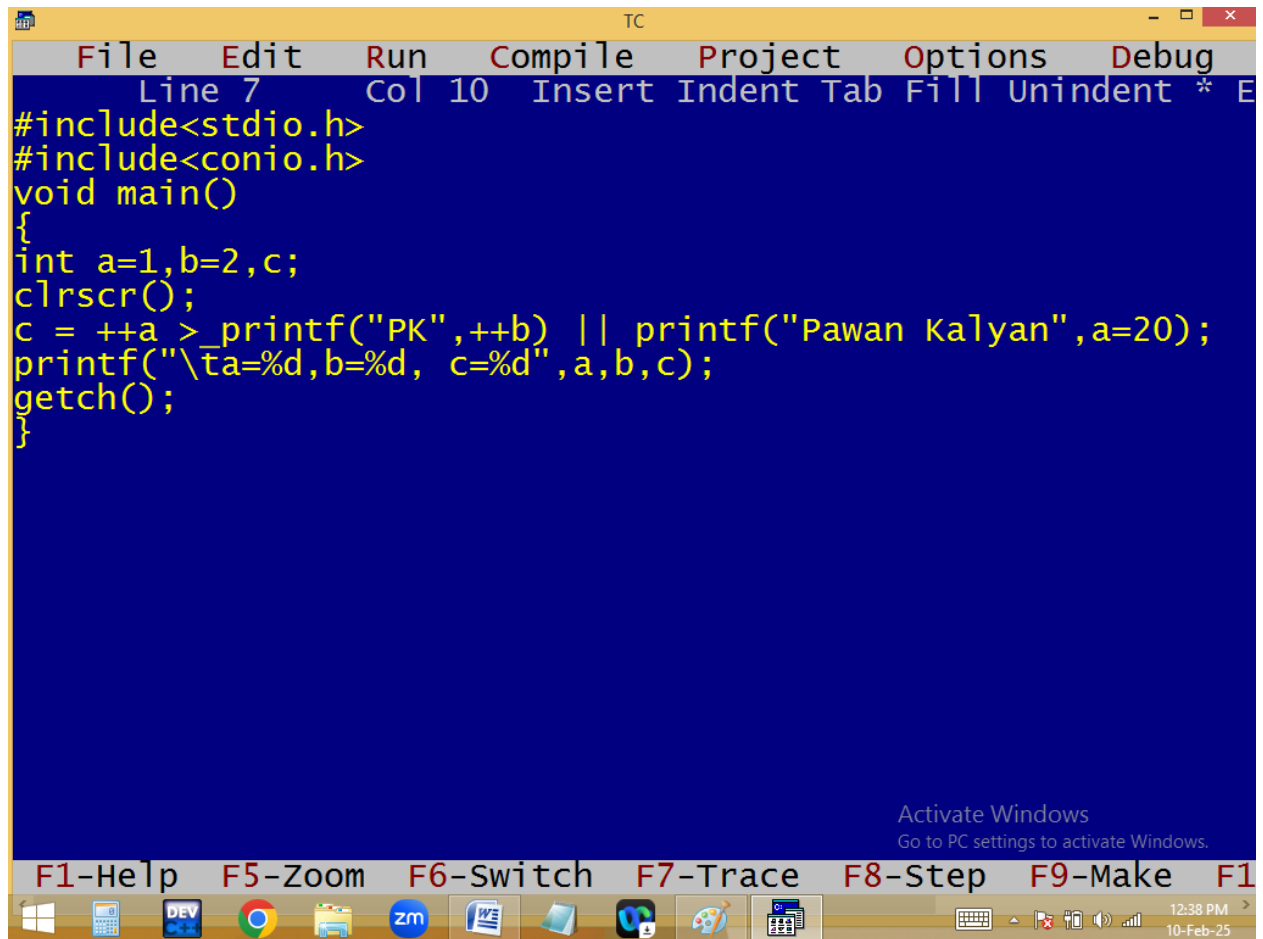

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a=1,b=2,c;
clrscr();
c = ++a > _printf("PK",++b) || printf("Pawan Kalyan",a=20);
printf("\ta=%d,b=%d, c=%d",a,b,c);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

12:38 PM
10-Feb-25

