



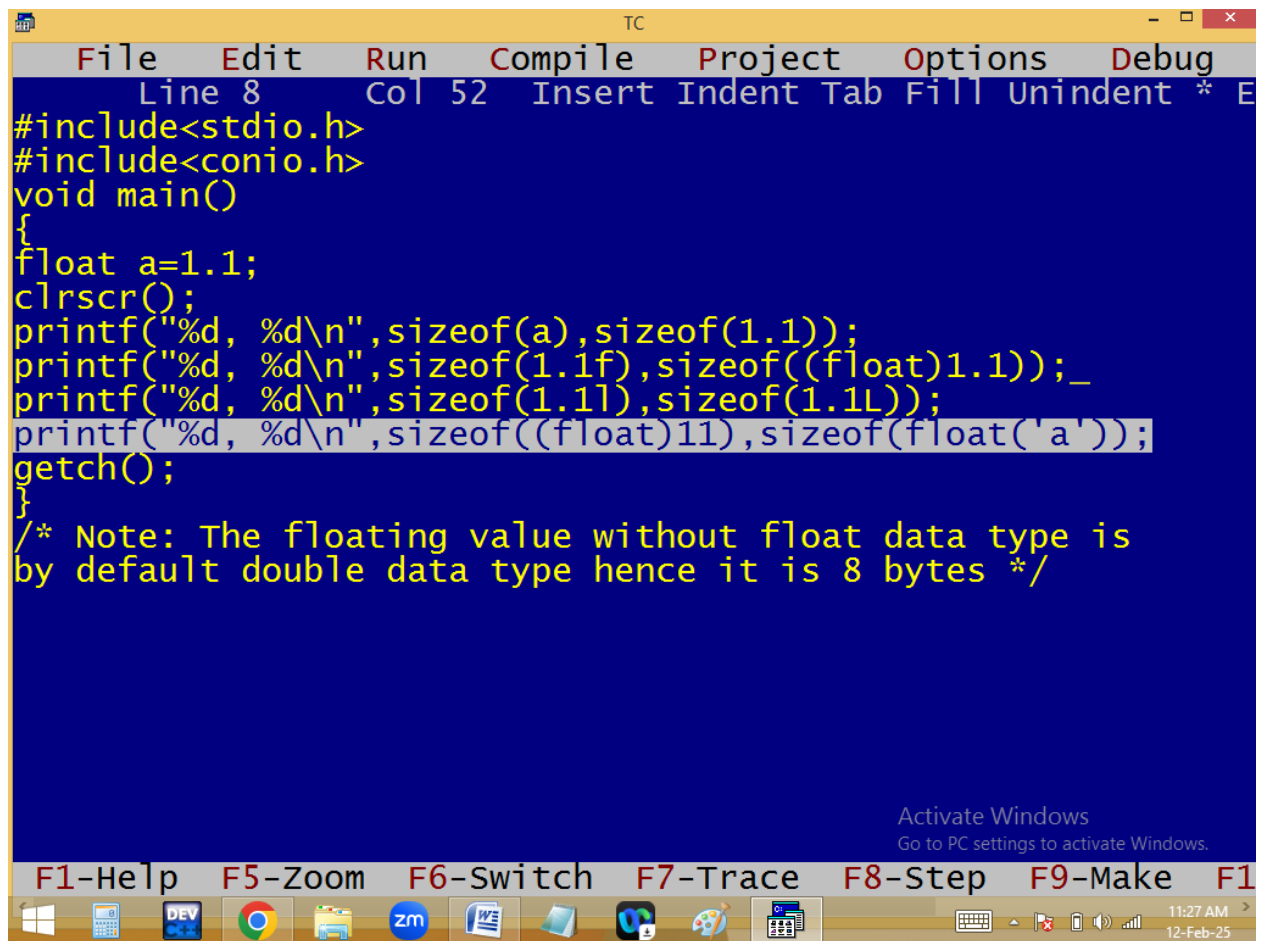

```
TC
File Edit Run Compile Project Options Debug
Line 8 Col 52 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
float a=1.1;
clrscr();
printf("%d, %d\n",sizeof(a),sizeof(1.1));
printf("%d, %d\n",sizeof(1.1f),sizeof((float)1.1));_
printf("%d, %d\n",sizeof(1.1l),sizeof(1.1L));
printf("%d, %d\n",sizeof((float)1l),sizeof(float('a')));
getch();
}
/* Note: The floating value without float data type is
by default double data type hence it is 8 bytes */

Activate Windows
Go to PC settings to activate Windows.
F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Exit
```

11:27 AM
12-Feb-25

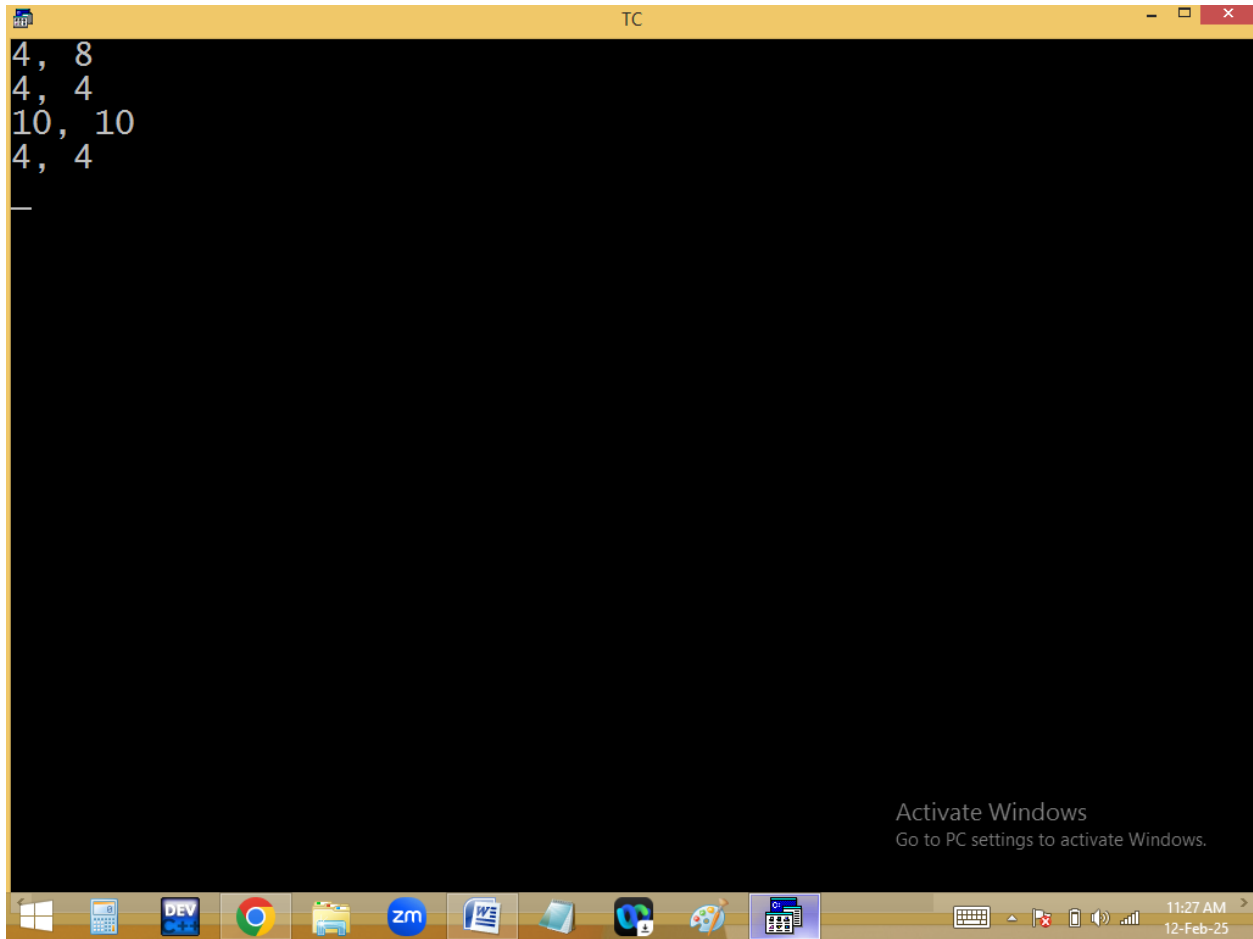


```
TC
File Edit Run Compile Project Options Debug
Line 12 Col 46 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
char s1[]="ab", s2[10]="ab";
clrscr();
printf("%d, %d\n",sizeof(s1), sizeof(s2));
printf("%d, %d\n",sizeof("ab"), sizeof("Kishore Naidu"));
printf("%d, %d\n",sizeof("ab\0"), sizeof(""));
printf("abc addr %u\n","abc");
printf("%d, %d\n",sizeof("abc")+1, sizeof("abc")+1);
printf("%d, %d\n",sizeof("1.23"), sizeof(" "));
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.


F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run


11:41 AM
12-Feb-25

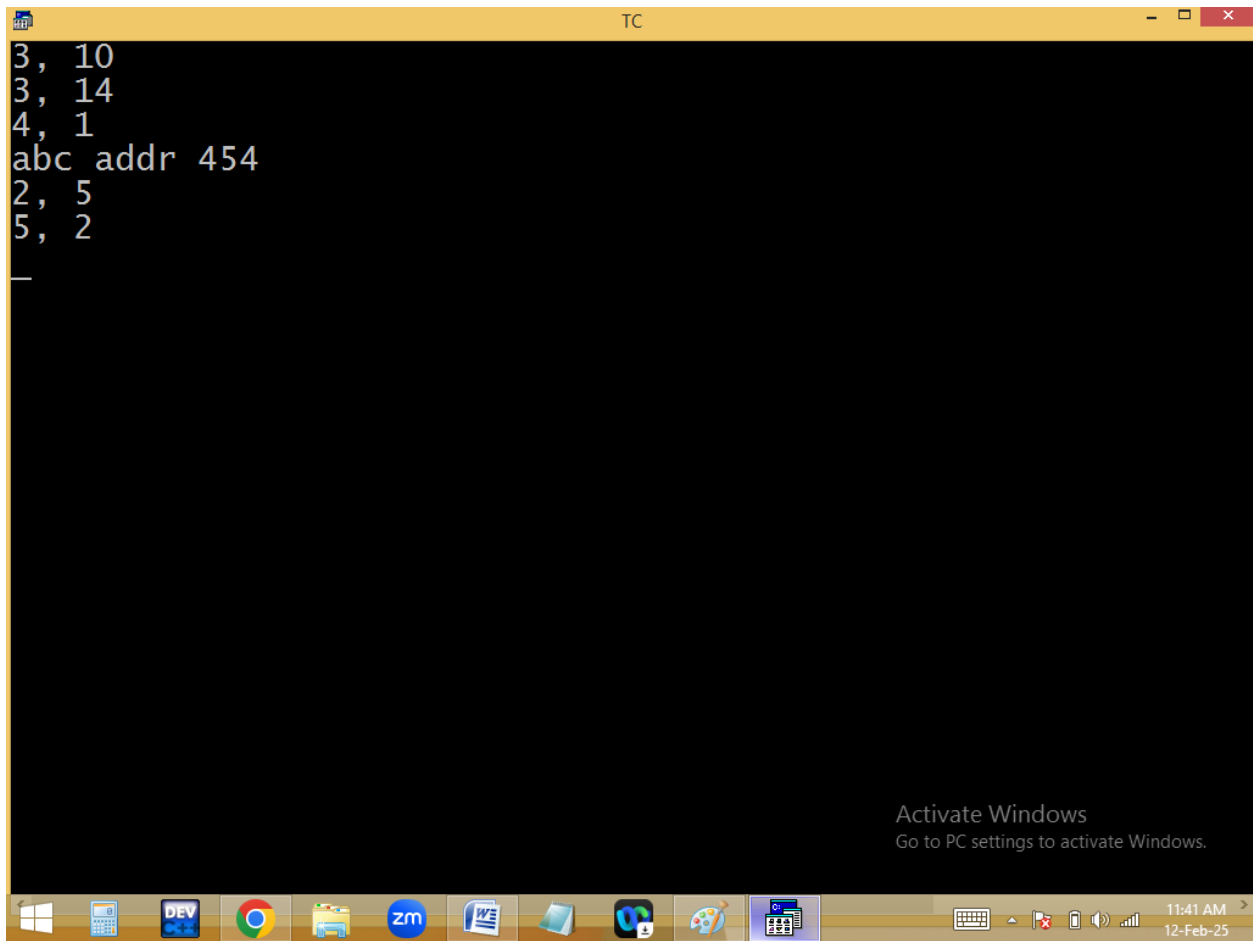

```
TC
File Edit Run Compile Project Options Debug
Line 13 Col 27 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
printf("%d, %d\n",printf("Kishore"), sizeof("Kishore"));
printf("%d, %d\n",sizeof("Kishore"), printf("Kishore"));
printf("%d\n",sizeof(printf("Kishore")));
printf("%d\n",printf("Kishore\0"));
printf("%d\n",printf(""));
printf("%d, %d\n",sizeof(100,1.2),sizeof(1.2,100));
printf("%d, %d\n",sizeof(100+1.2),sizeof(1.2+100));
printf("%d, %d\n",sizeof("abc")+ 'a',sizeof(sizeof("abc")));
getch();
}

Activate Windows
Go to PC settings to activate Windows.
F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run
```

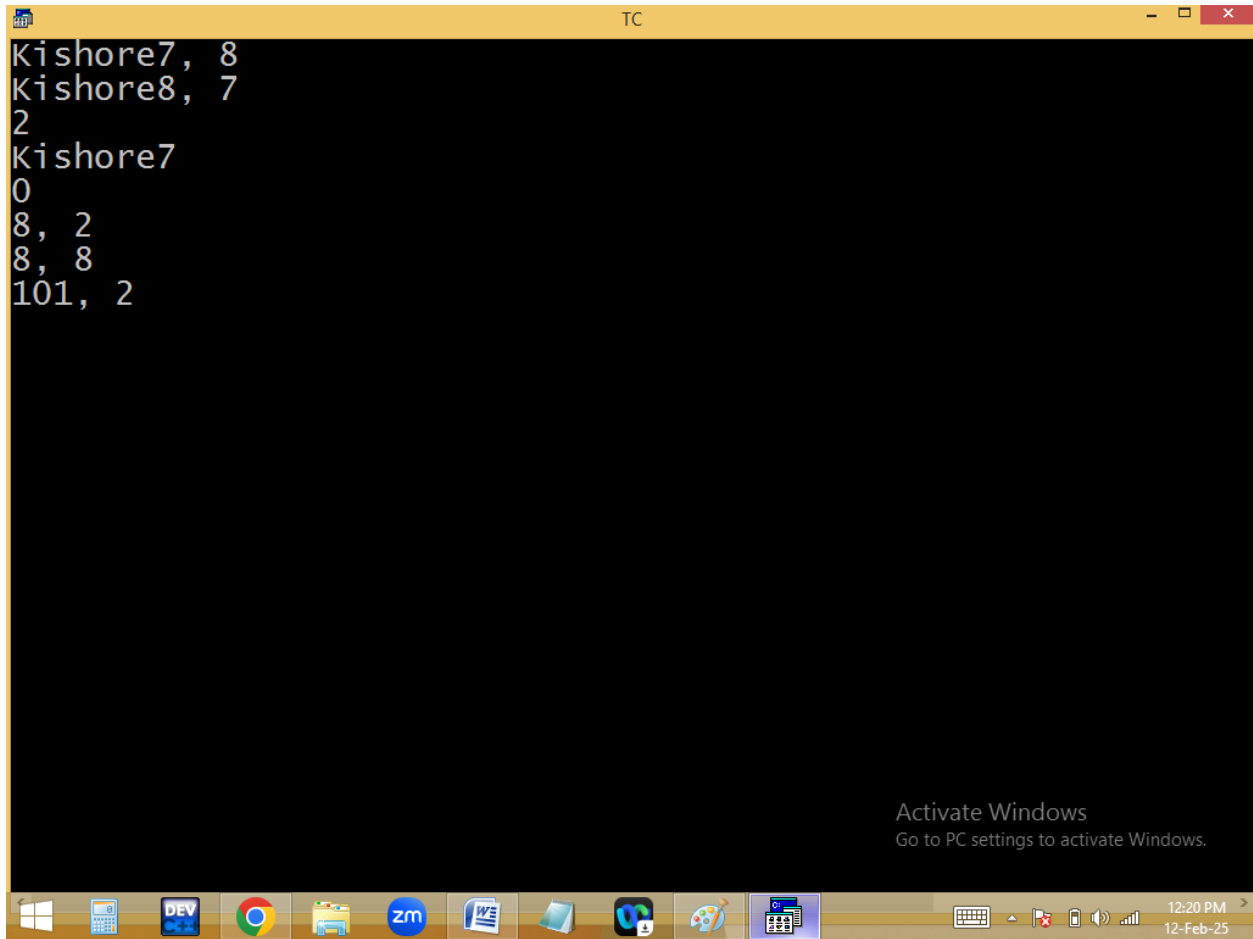


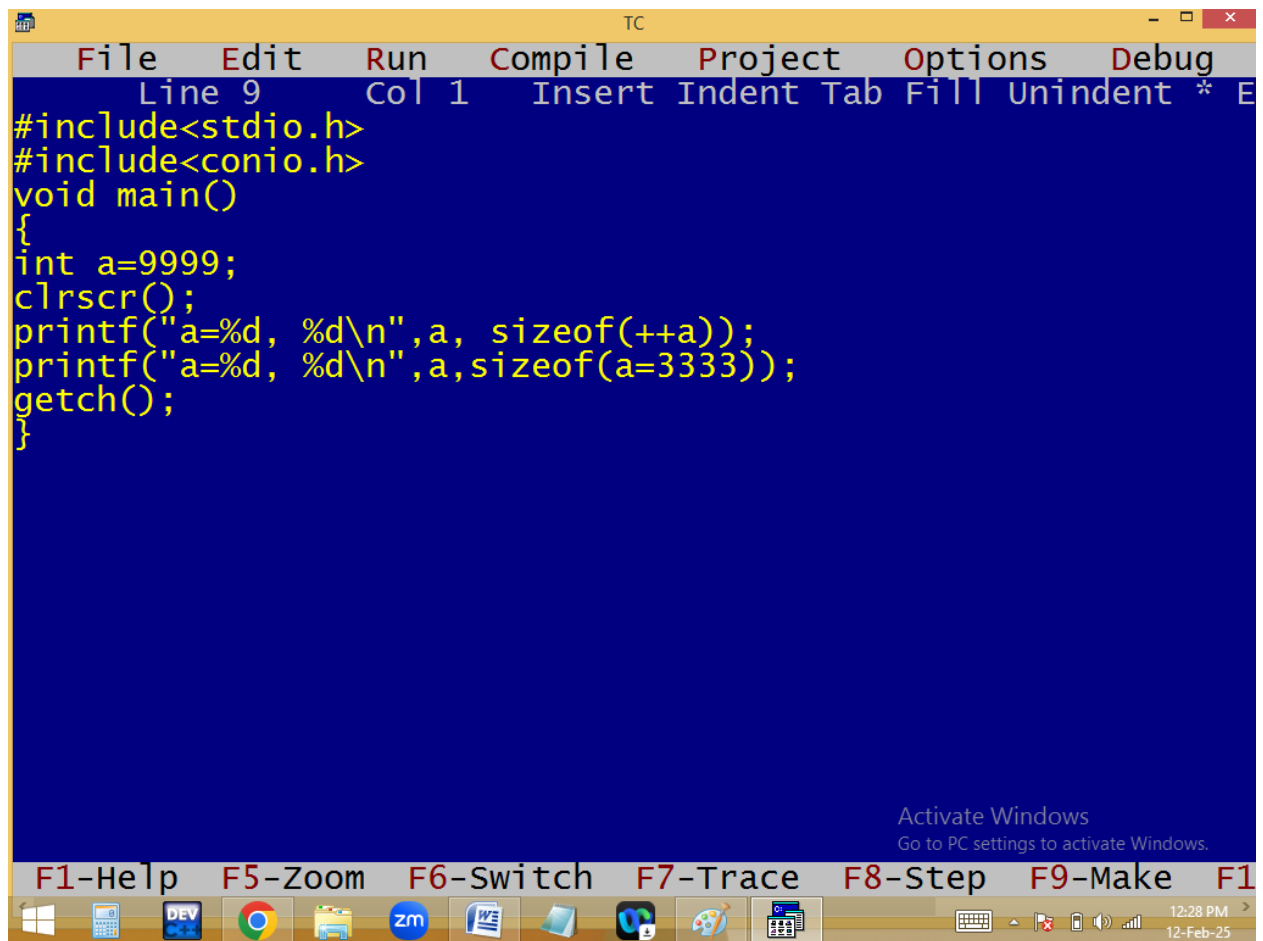

The image shows a screenshot of the Turbo C++ (TC) IDE. The main window has a blue background with yellow text. The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. Below the menu bar, the status bar shows "Line 9 Col 1" and "Insert Indent Tab Fill Unindent * E". The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a=9999;
clrscr();
printf("a=%d, %d\n",a, sizeof(++a));
printf("a=%d, %d\n",a,sizeof(a=3333));
getch();
}
```

At the bottom of the IDE window, there is a message that says "Activate Windows Go to PC settings to activate Windows." Below the IDE window, the Windows taskbar is visible, showing the Start button and several application icons including a calculator, a Dev C++ icon, Google Chrome, a folder, a Zoom icon, a Word document, a folder, a game controller, and a calculator. The system tray on the right shows the time as 12:28 PM and the date as 12-Feb-25.

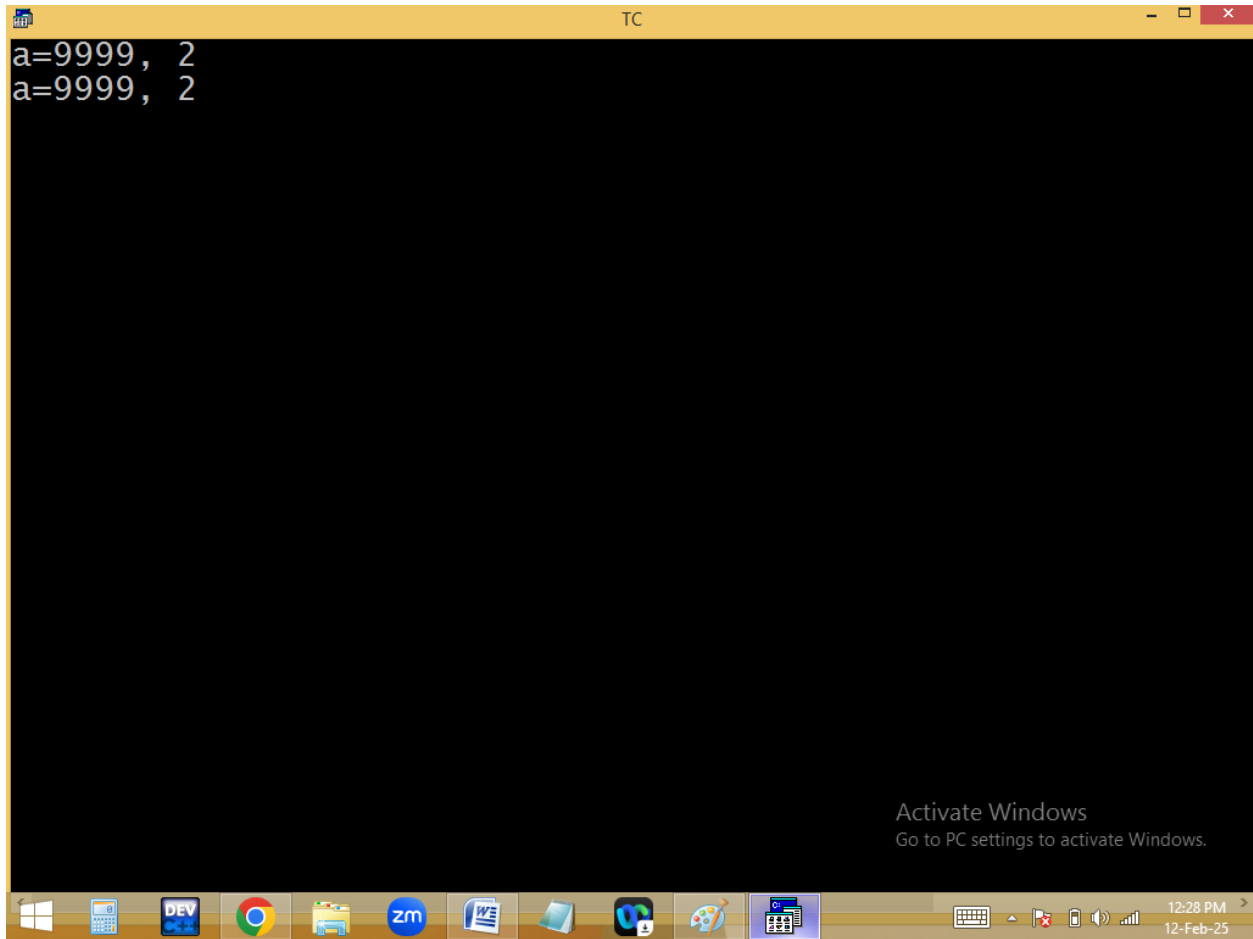

```
a=9999, 2
a=9999, 2
```

Ternary operator:


conditional part ? true part : false part ;

Find even/odd using ternary op?

5 % 2 == 0

printf(n % 2 == 0 ? " Even no" : "Odd no");

4 % 2 == 0

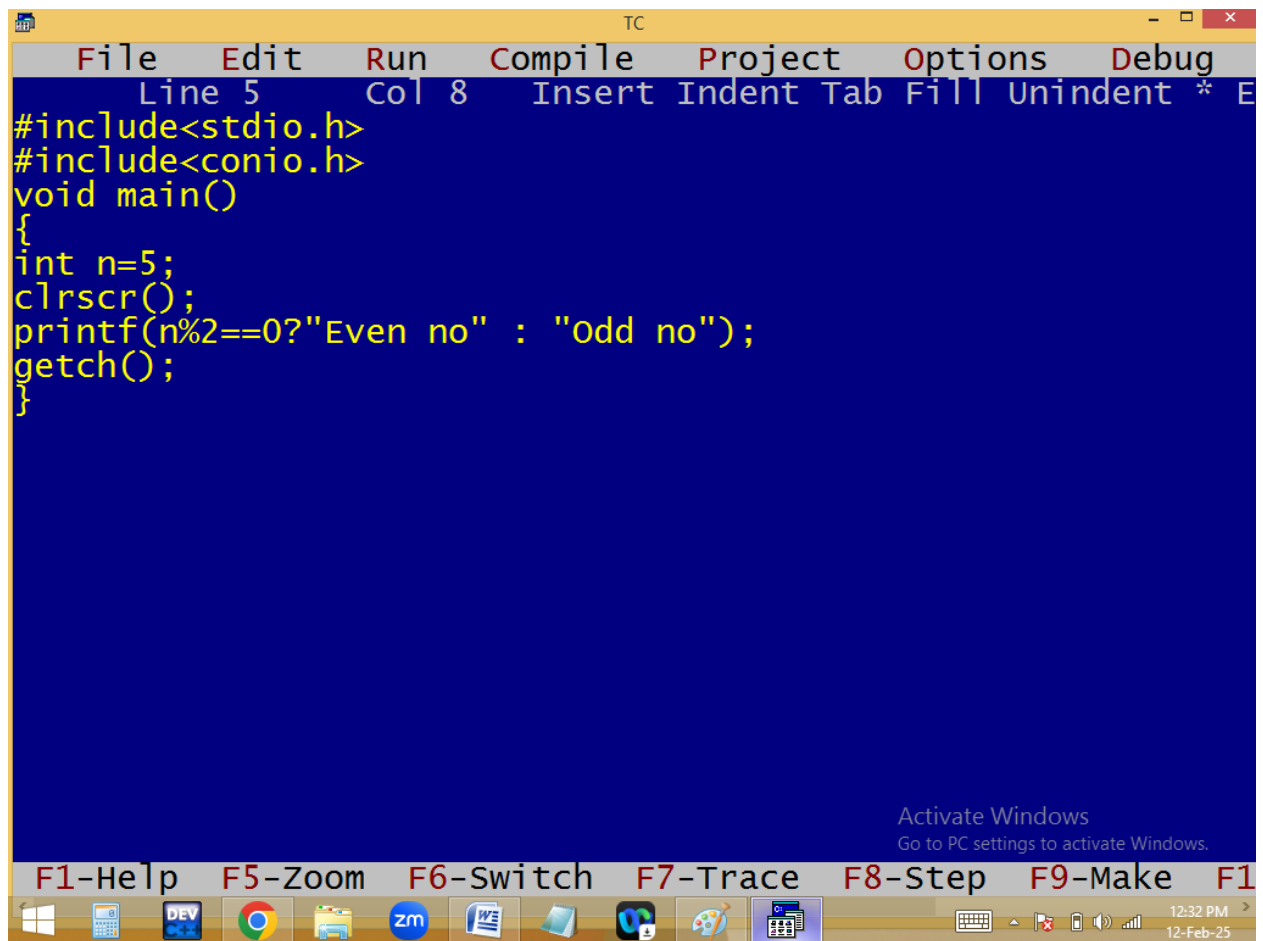



```
TC
File Edit Run Compile Project Options Debug
Line 5 Col 8 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int n=5;
clrscr();
printf(n%2==0?"Even no" : "Odd no");
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Exit

12:32 PM
12-Feb-25

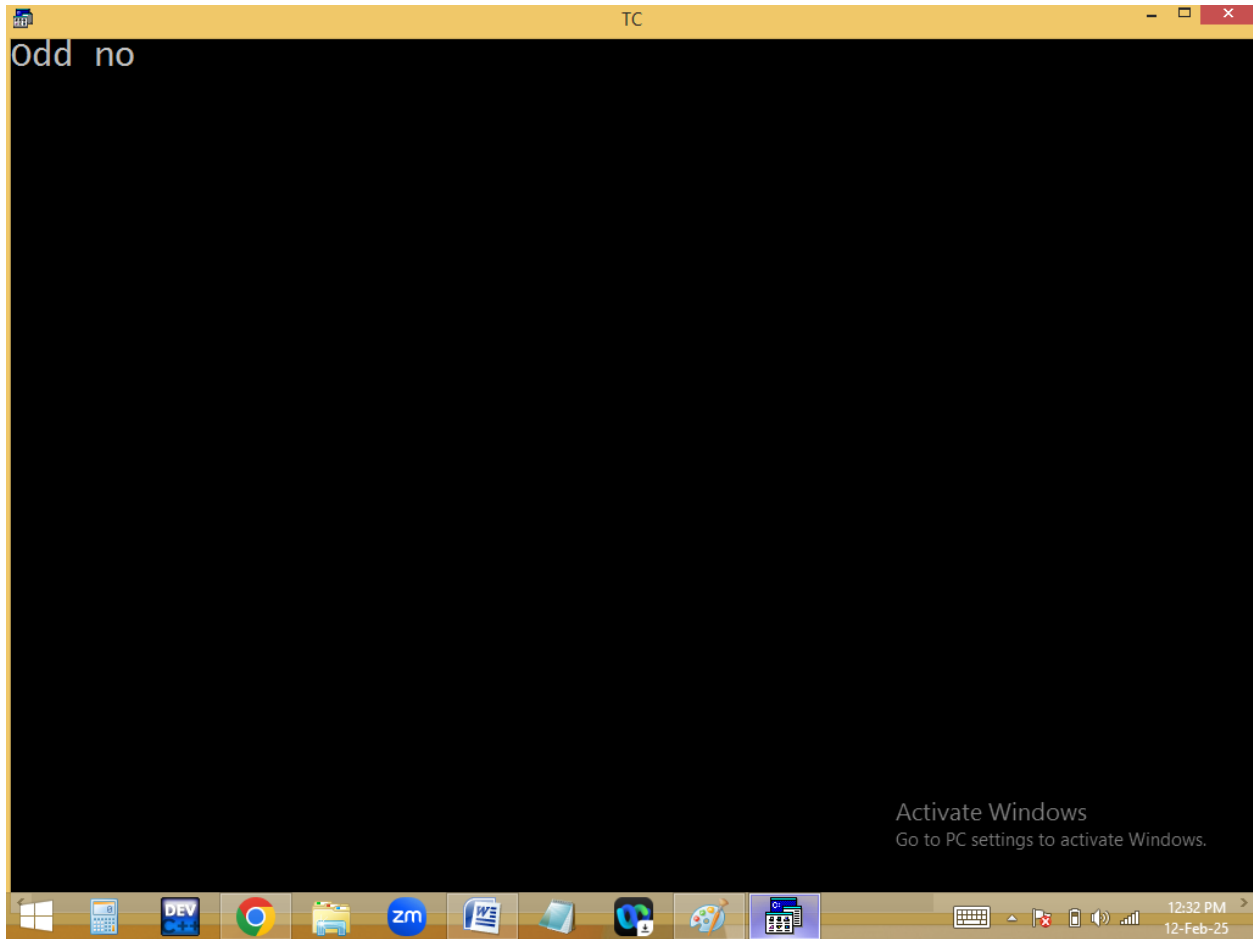

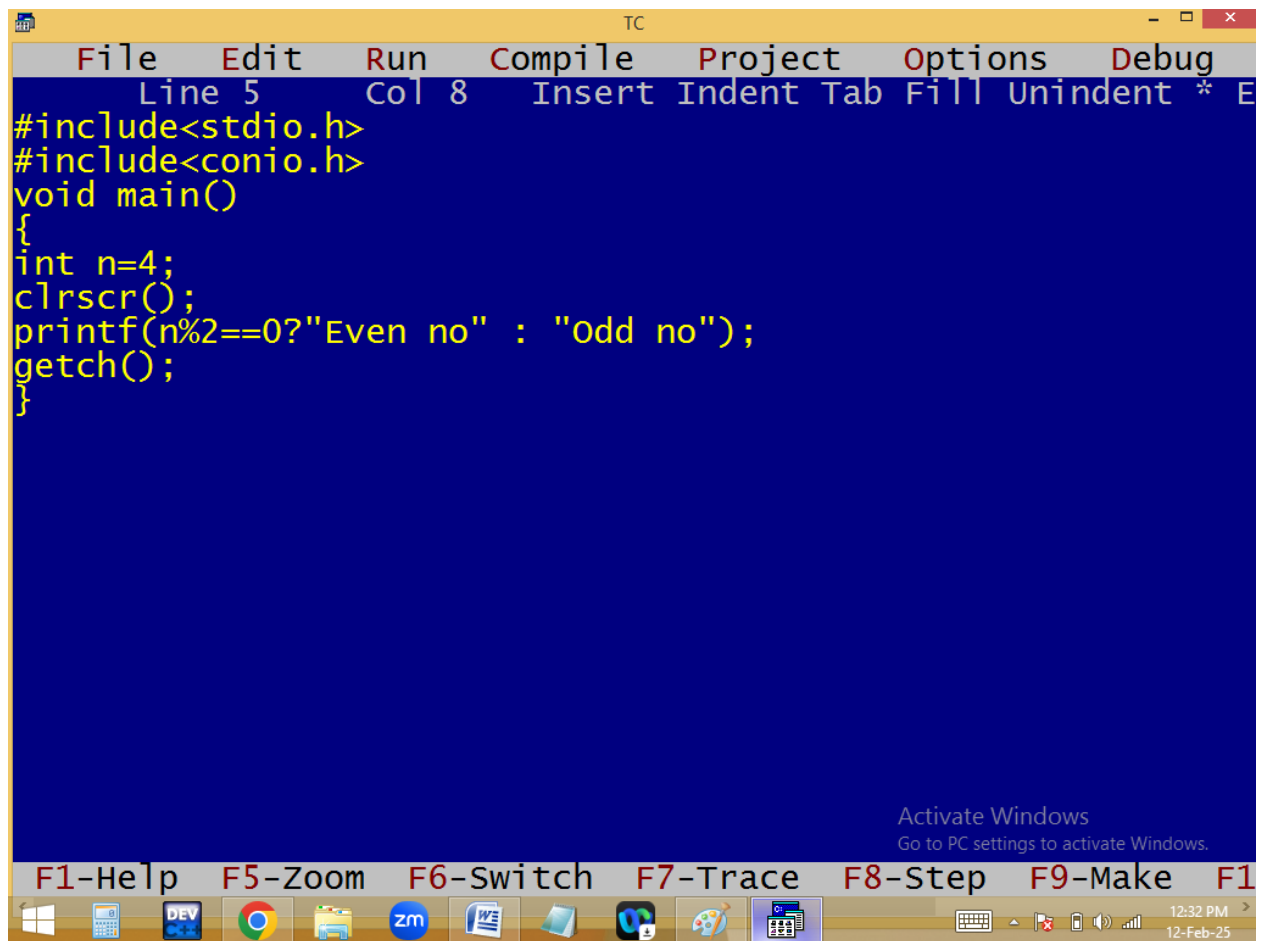


```
TC
File Edit Run Compile Project Options Debug
Line 5 Col 8 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int n=4;
clrscr();
printf(n%2==0?"Even no" : "Odd no");
getch();
}
```


Activate Windows
Go to PC settings to activate Windows.

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

12:32 PM
12-Feb-25

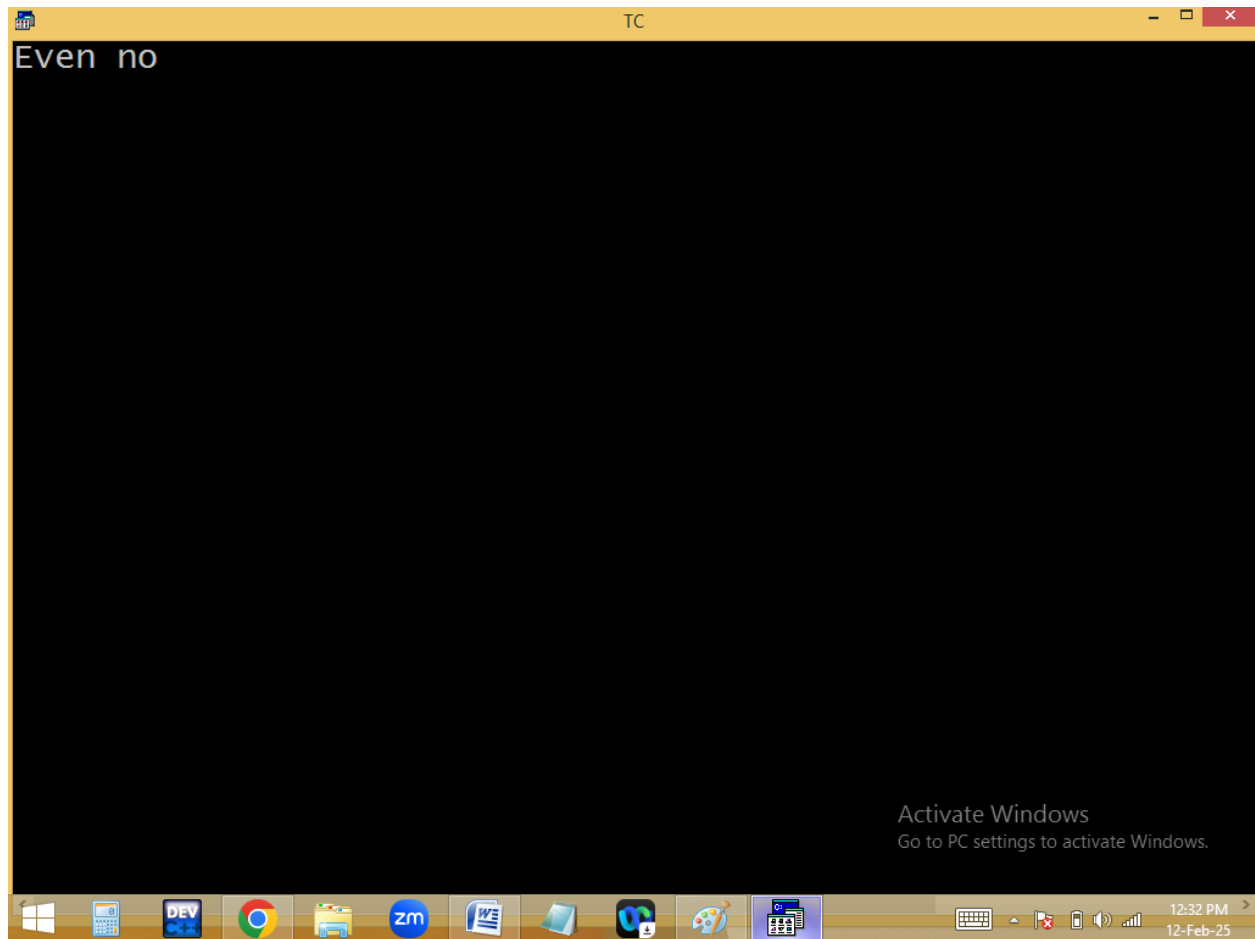

Finding max in 2no's using ternary operator?

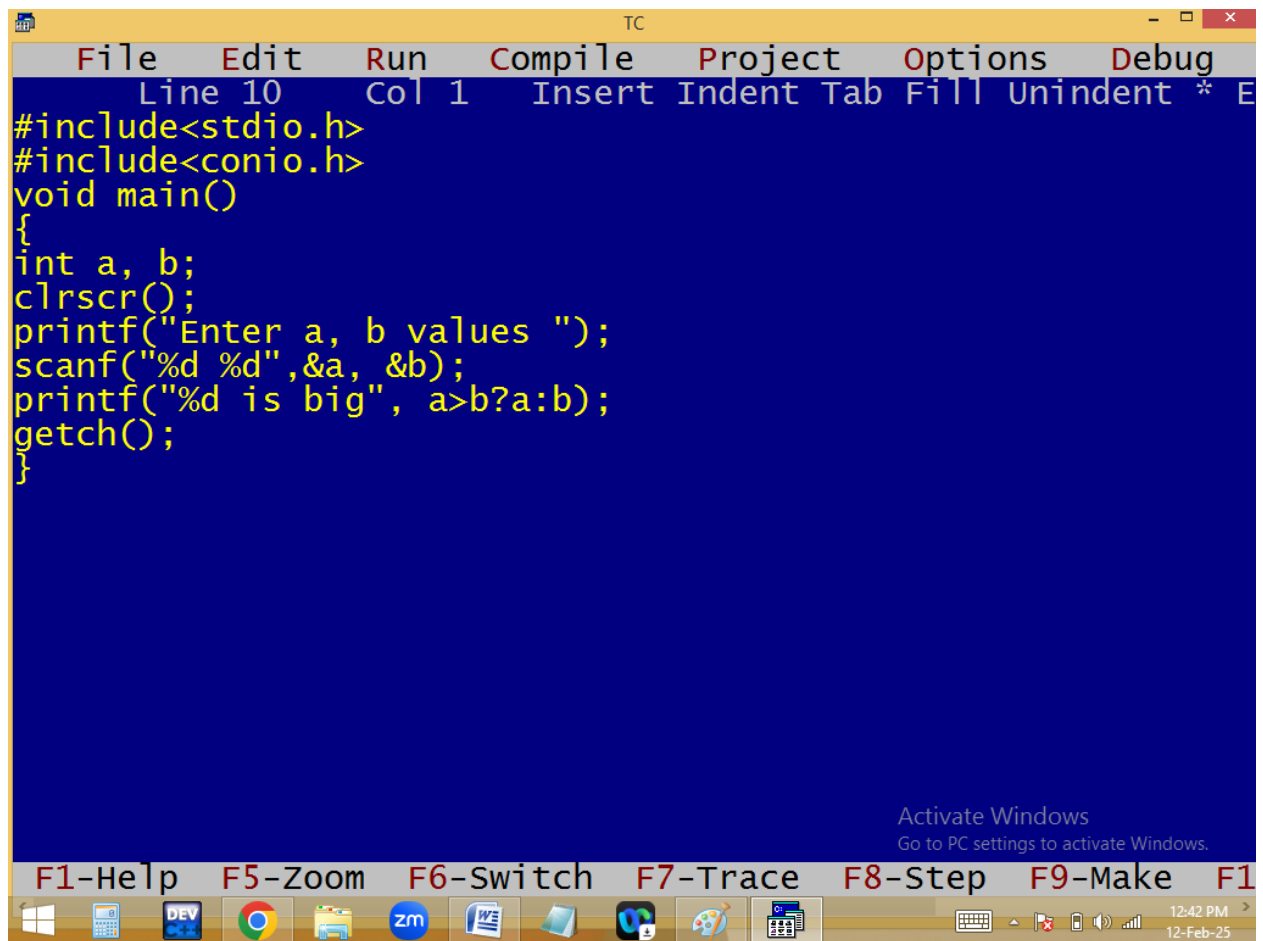



The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 10", "Col 1", and a list of editing actions: "Insert", "Indent", "Tab", "Fill", "Unindent", and a cursor icon. The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a, b;
clrscr();
printf("Enter a, b values ");
scanf("%d %d",&a, &b);
printf("%d is big", a>b?a:b);
getch();
}
```

At the bottom of the window, there is a taskbar with several icons: Windows Start, Task View, DEV C++, Google Chrome, File Explorer, Zoom, Word, a folder icon, a game controller icon, and a calculator icon. To the right of the taskbar, there is a system tray showing the time "12:42 PM" and the date "12-Feb-25". An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.

Below the IDE window, there is a row of function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Exit".

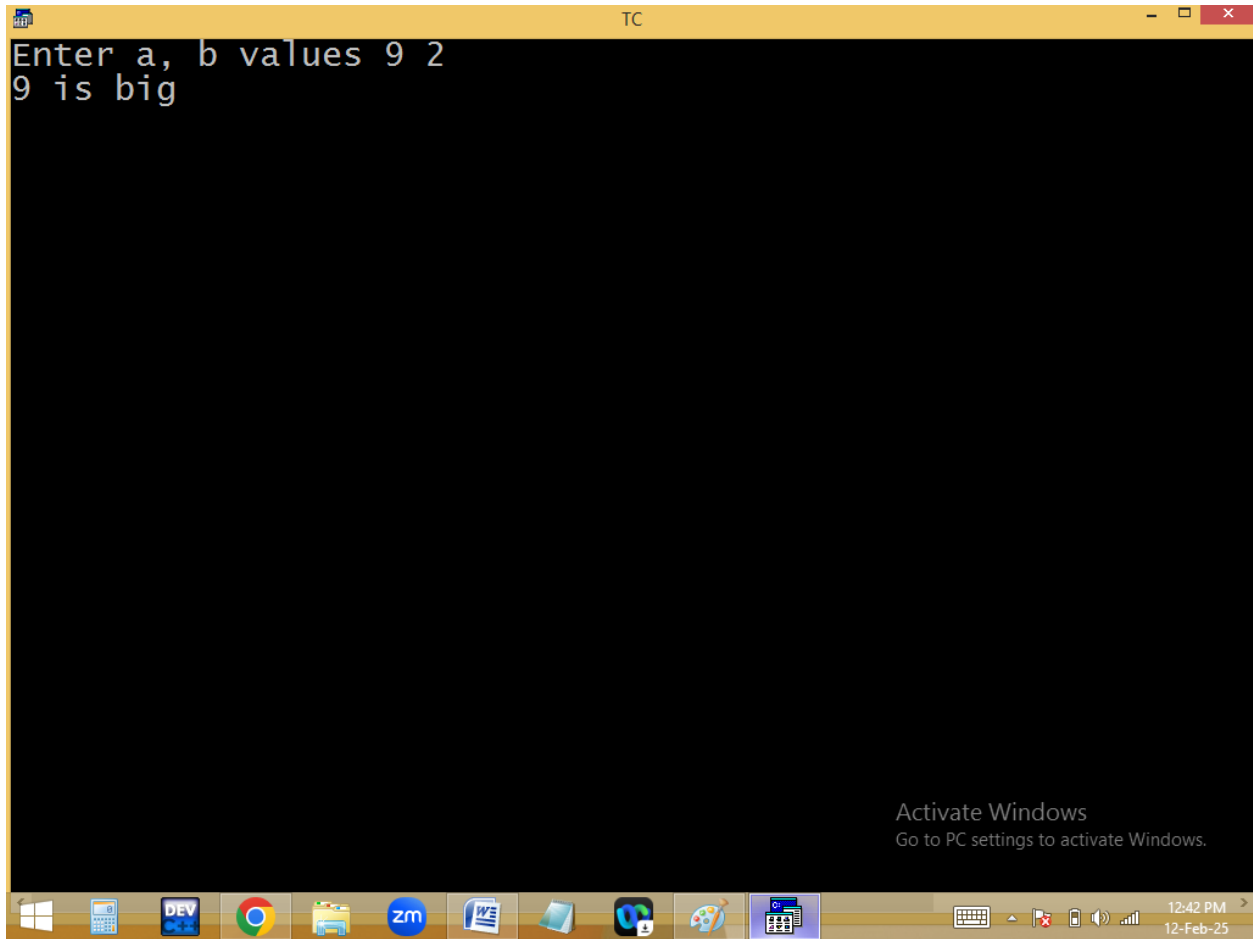

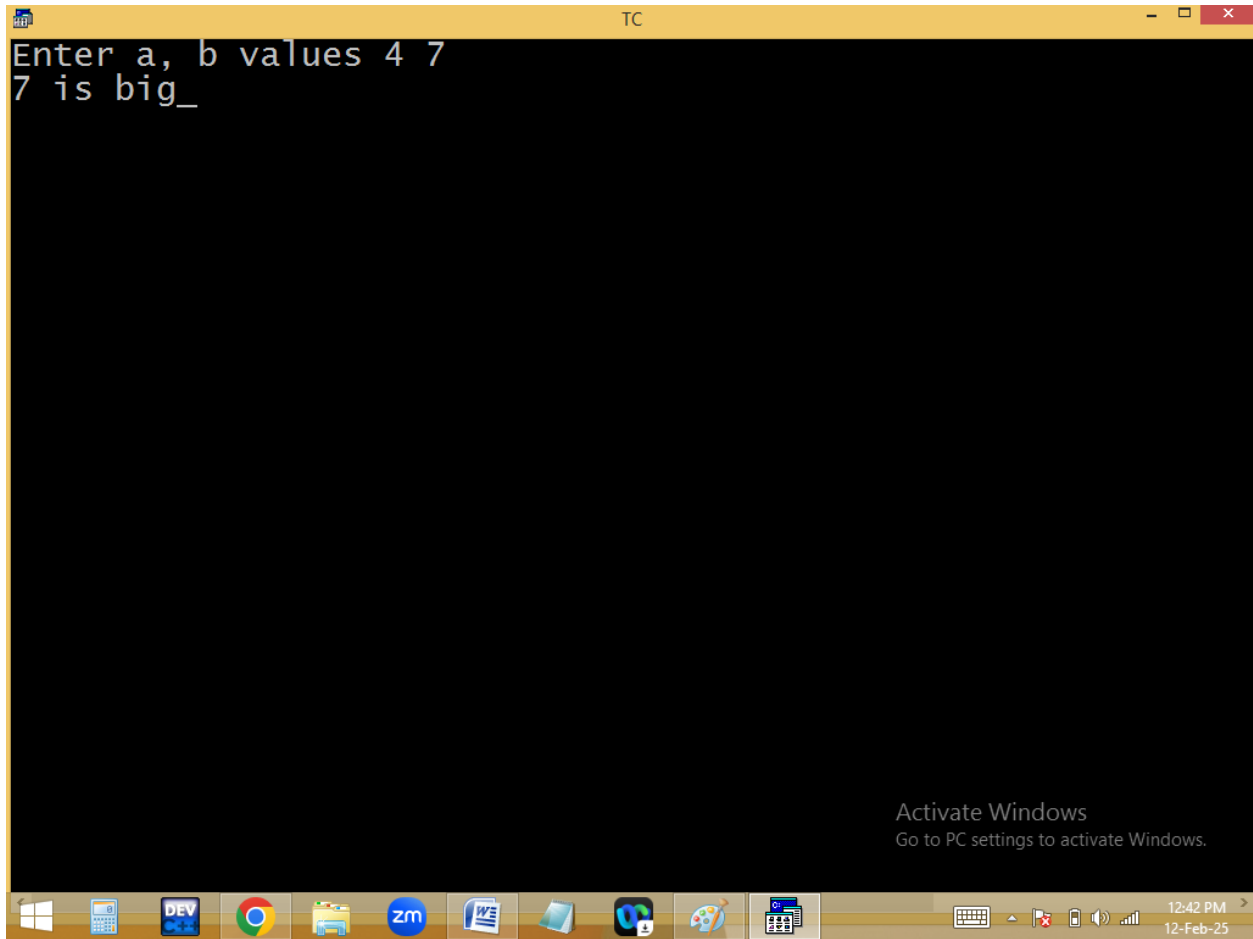


```
TC
Enter a, b values 3 3
3 is big_
```

Activate Windows
Go to PC settings to activate Windows.

12:44 PM
12-Feb-25

`printf( "%d is big" ,a>b ?a :b );`

Handwritten annotations:

- Red: $5 > 7$ with a red arrow pointing from the `a` in the ternary operator to the `5`.
- Blue: $4 > 3$ with a blue arrow pointing from the `b` in the ternary operator to the `4`.

```


File Edit Run Compile Project Options Debug
Line 9 Col 60 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a, b;
clrscr();
printf("Enter a, b values ");
scanf("%d %d",&a, &b);
printf("%s", a>b?"a is big":b>a?"b is big":"Both are equal");
getch();
}


```


Activate Windows
Go to PC settings to activate Windows.

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

12:49 PM
12-Feb-25

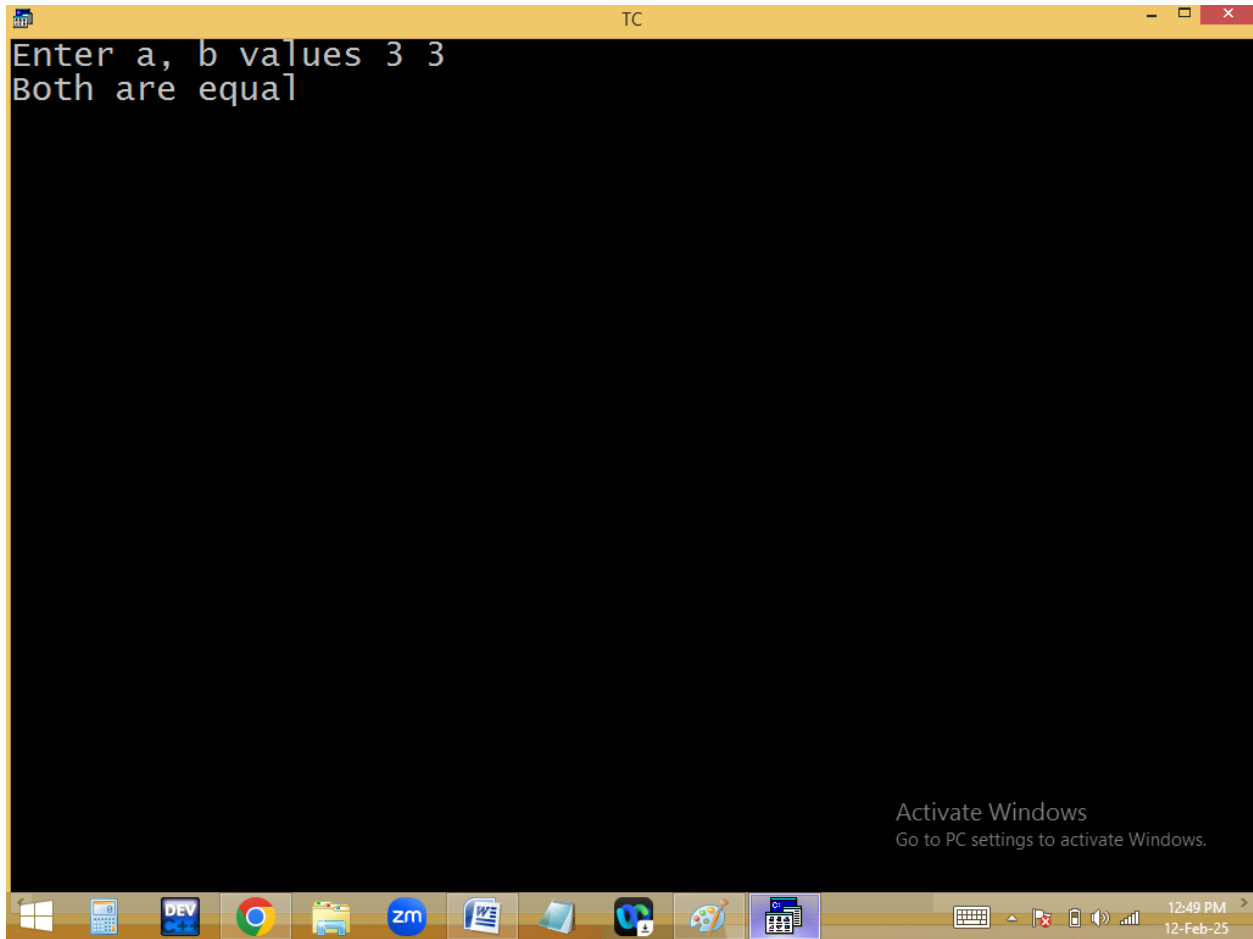

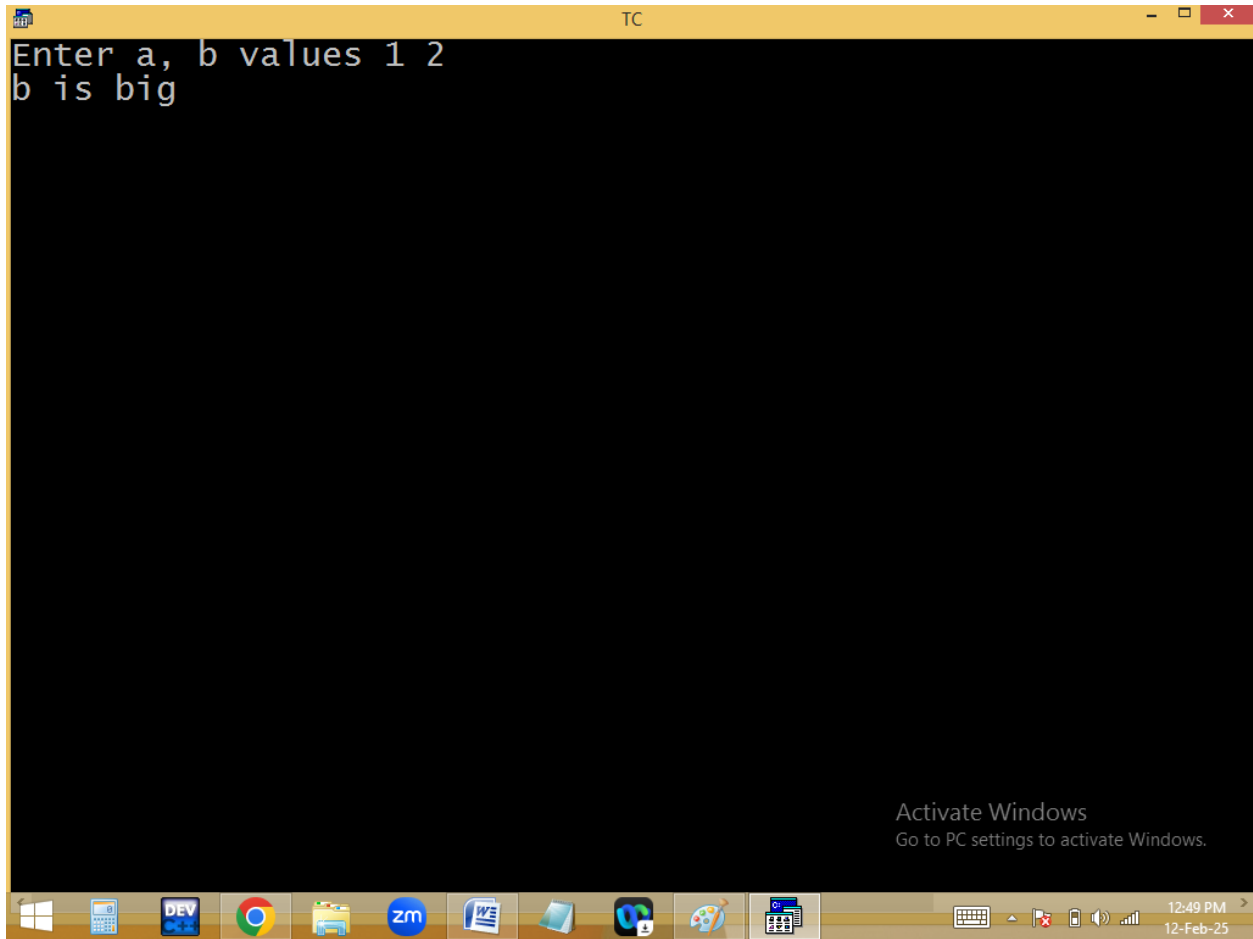

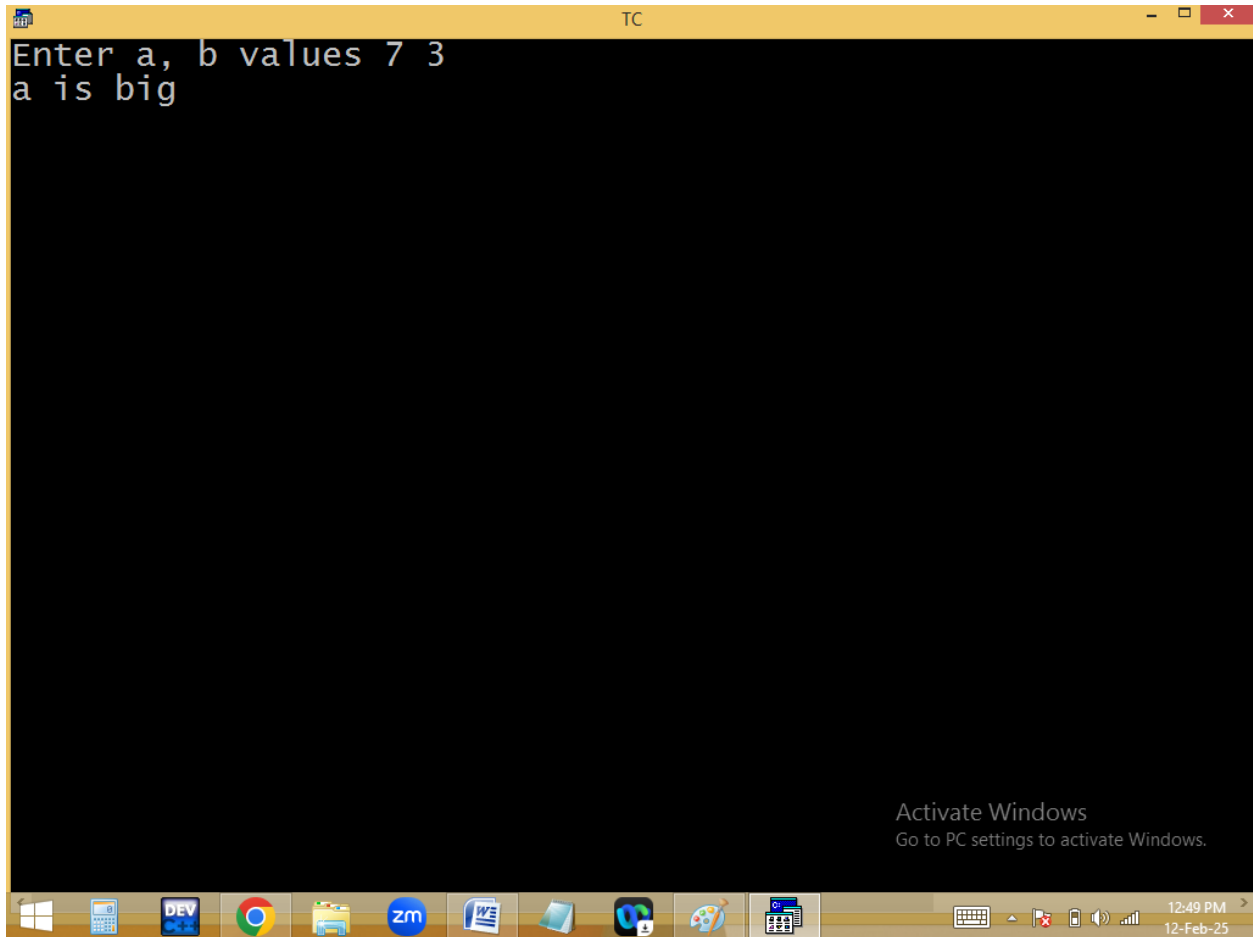

```
Enter a, b values 7 3
a is big
```

Home work:

1. Finding +Ve / -Ve / 0 using ternary operator?
2. Finding even/odd without using if..else or ternary operator.
3. Finding +Ve / -Ve / 0 without using if..else or ternary operator.
4. Finding max in 2no's without using ternary / if..else

