



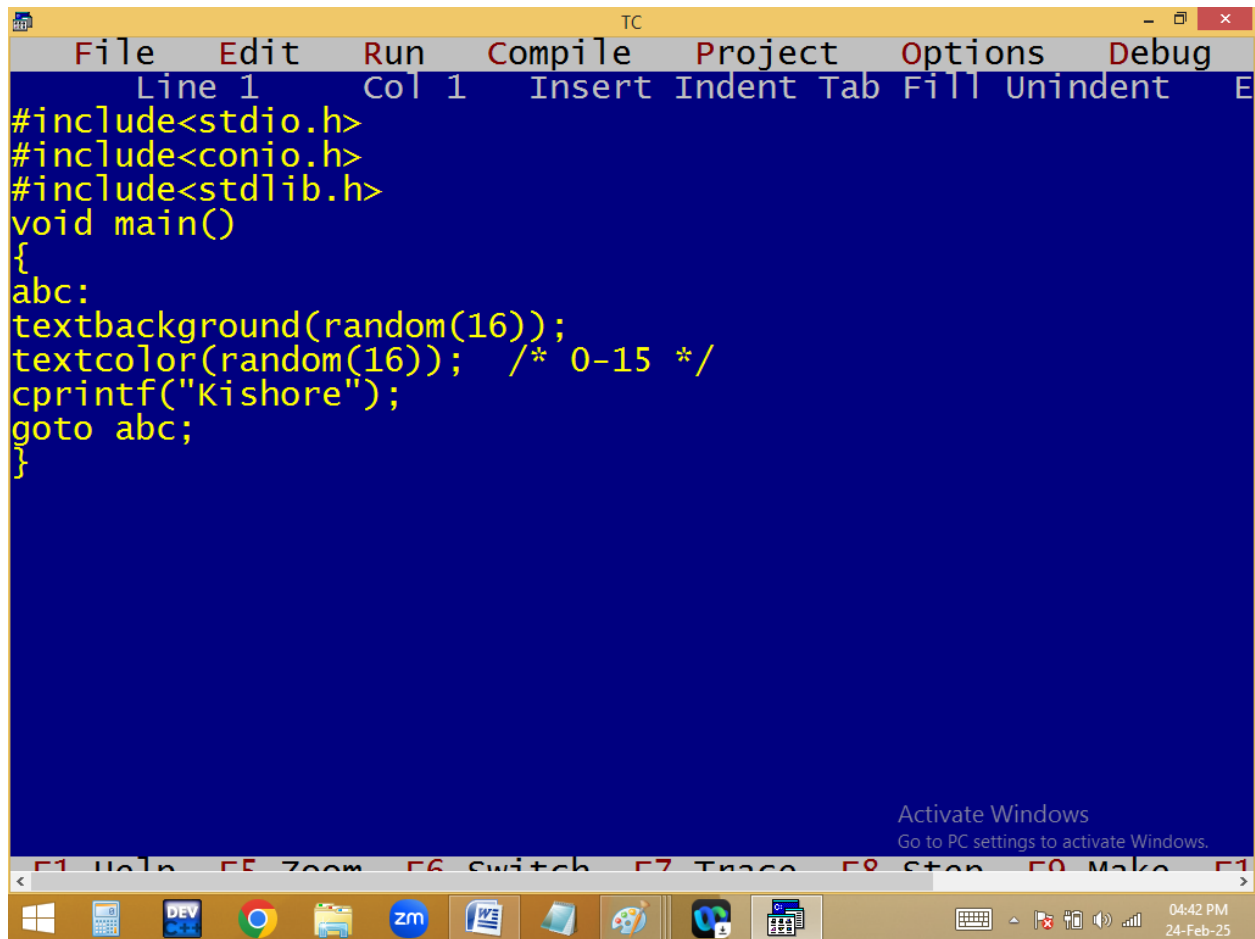

The image shows a screenshot of the Turbo C++ (TC) integrated development environment. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, there is a status bar showing "Line 1", "Col 1", and a list of keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", and "E". The main editing area has a dark blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
#include<stdlib.h>
void main()
{
    abc:
    textbackground(random(16));
    textcolor(random(16)); /* 0-15 */
    cprintf("Kishore");
    goto abc;
}
```

At the bottom of the window, there is a taskbar with various application icons, including Windows Explorer, Dev-C++, Google Chrome, and Zoom. The system tray on the right shows the time as "04:42 PM" and the date as "24-Feb-25". An "Activate Windows" watermark is visible in the bottom right corner of the window.

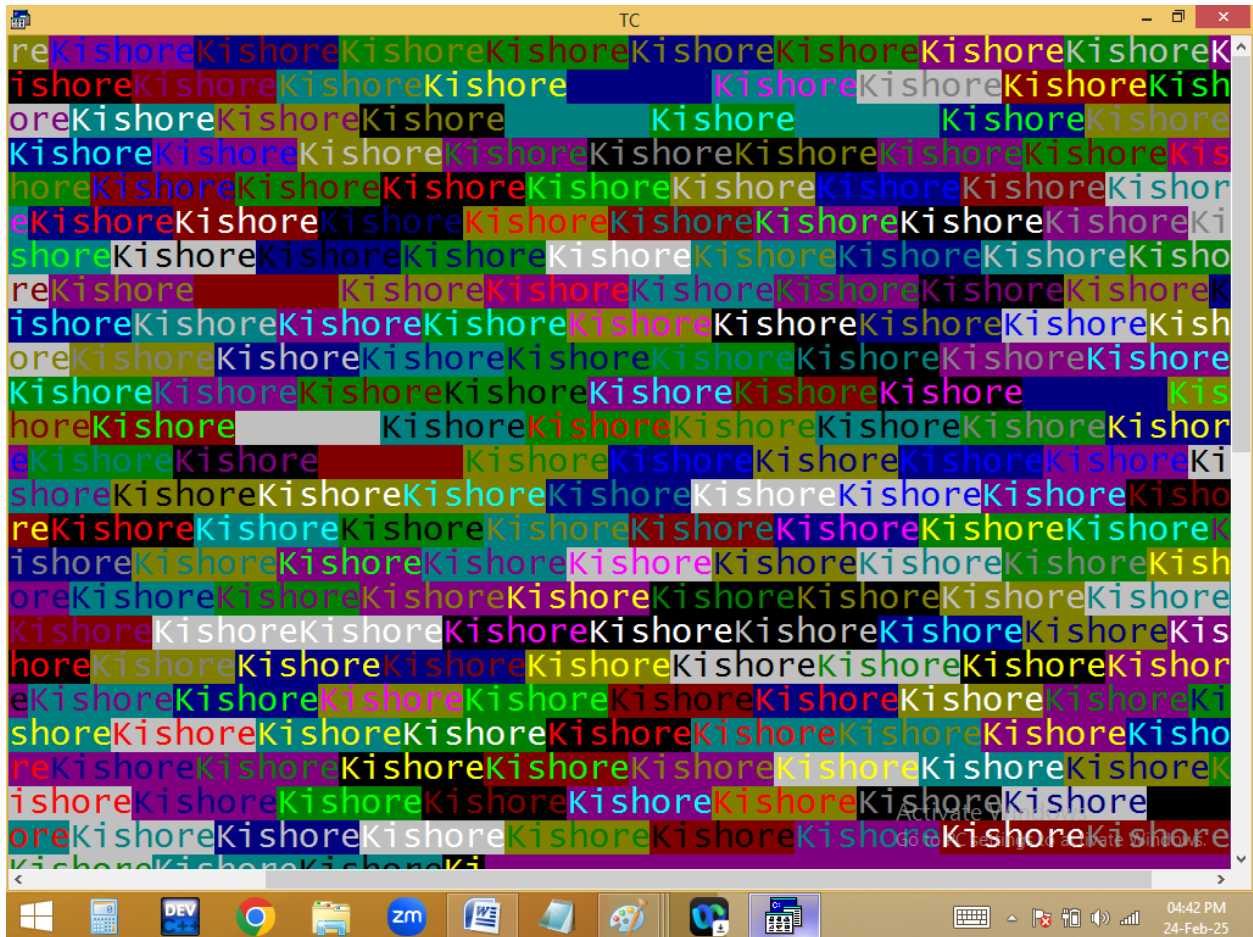

CONDITIONAL CONTROL STATEMENTS:

if: It is a decision making statement.

If is a keyword.

It is used to check the given condition or expression is true or false. Based on the expression result it is going to take the decision.

In c we are using 4 types of if conditions.


- 1.Simple if: one condition
- 2.If..else: two conditions
- 3.If..else if / ladder if: 3 or more
- 4.Nested if


Simple if:

When the program is having only one condition / option then go for simple if.

If condition true statements in if block { } are executed and later outside statements also executed.

If condition false only the outside statements are executed.

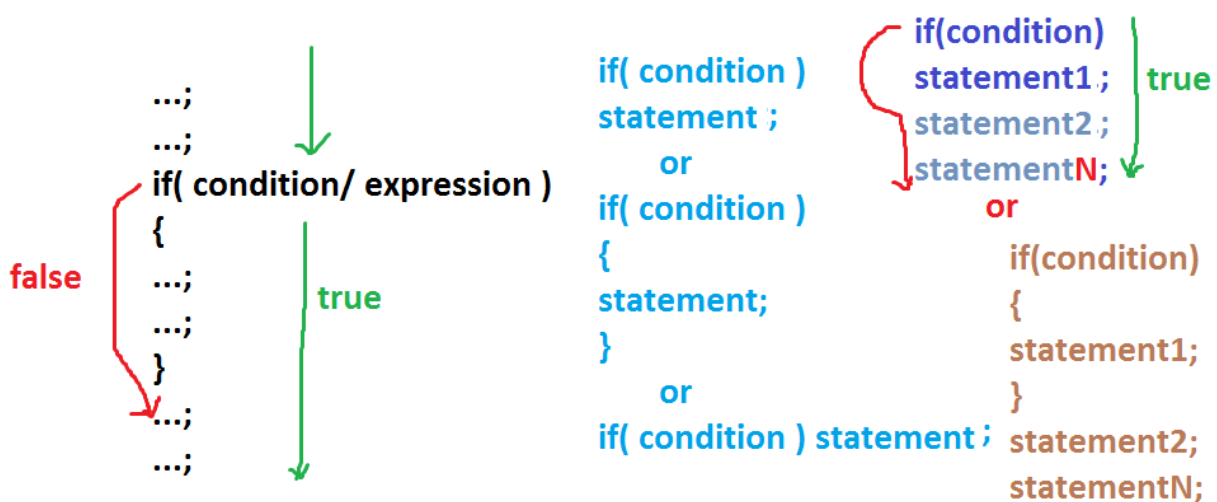


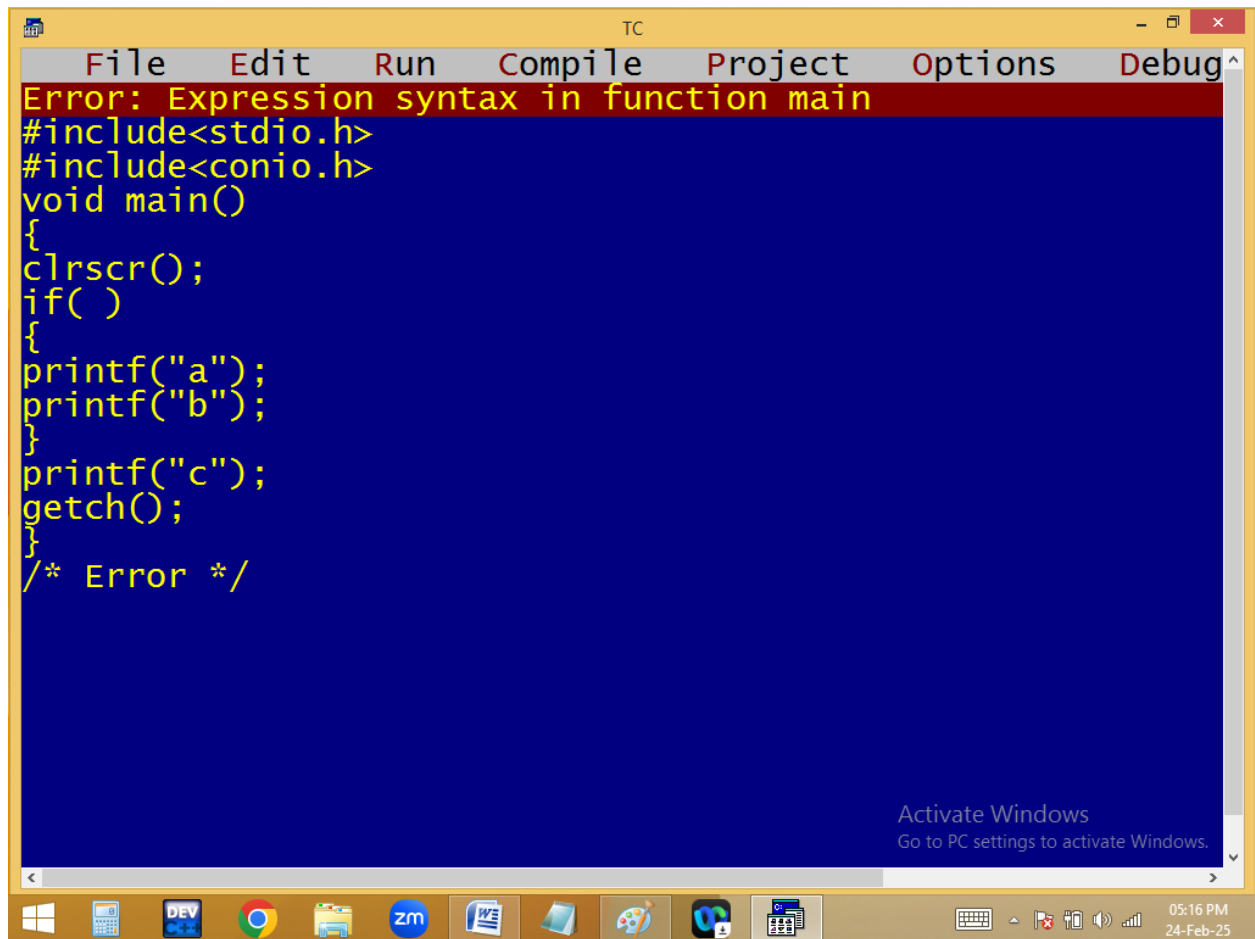

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error message banner at the top reads "Error: Expression syntax in function main". The code editor has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( )
{
printf("a");
printf("b");
}
printf("c");
getch();
}
/* Error */
```


An "Activate Windows" watermark is visible in the bottom right corner of the code editor area, with the text "Go to PC settings to activate Windows." The Windows taskbar at the bottom shows the Start button, task view button, and several application icons including Calculator, DEV C++, Google Chrome, File Explorer, Zoom, Word, and others. The system tray on the right shows the date and time as "05:16 PM 24-Feb-25".

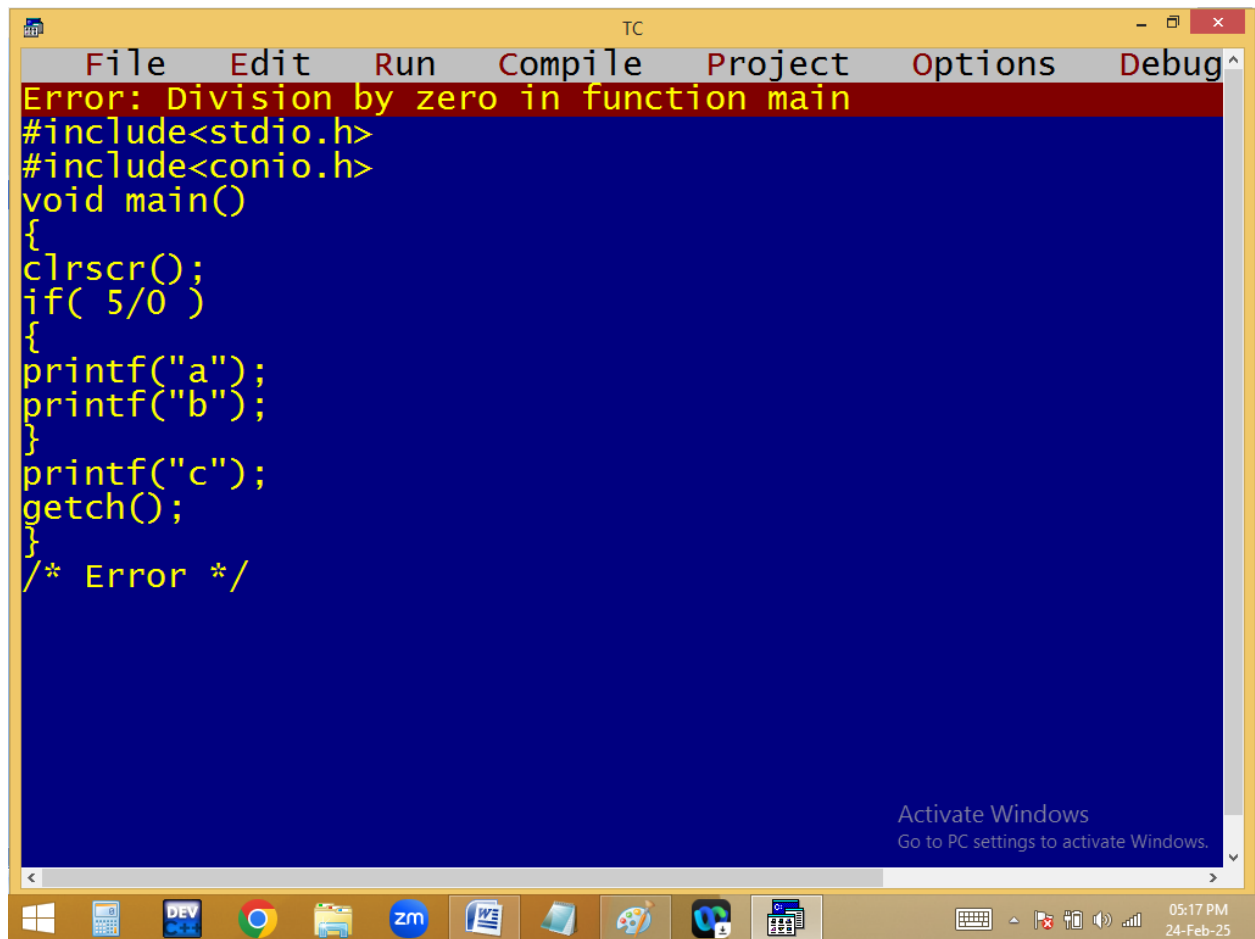

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error message banner at the top of the code editor states "Error: Division by zero in function main". The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( 5/0 )
{
printf("a");
printf("b");
}
printf("c");
getch();
}
/* Error */
```


At the bottom right of the code editor, there is a watermark that says "Activate Windows Go to PC settings to activate Windows." The Windows taskbar is visible at the bottom, showing icons for the Start menu, Task View, File Explorer, Microsoft Edge, Zoom, Word, and several other applications. The system clock in the bottom right corner shows "05:17 PM 24-Feb-25".

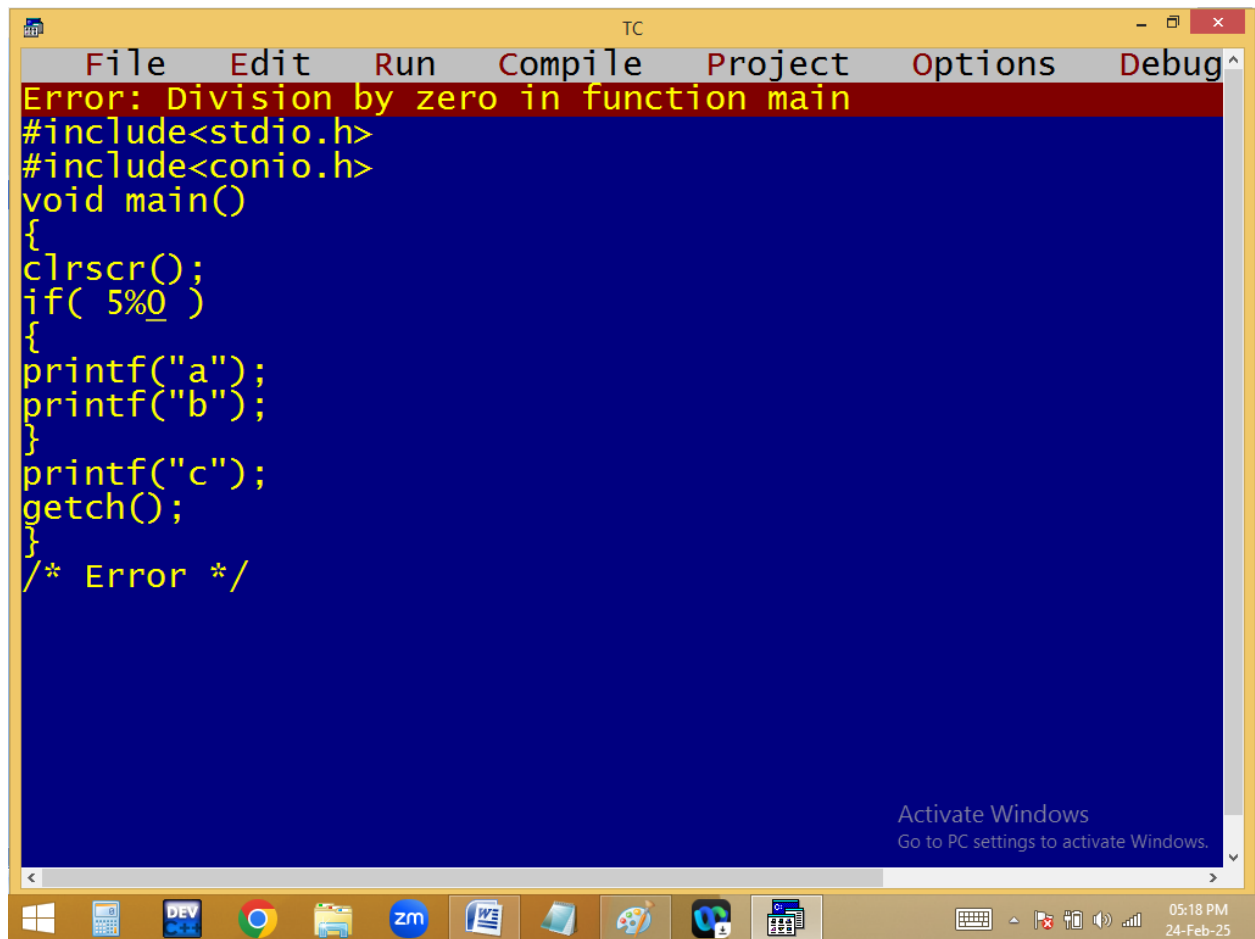

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error message banner at the top of the code editor states "Error: Division by zero in function main". The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( 5%0 )
{
printf("a");
printf("b");
}
printf("c");
getch();
}
/* Error */
```


An "Activate Windows" watermark is visible in the bottom right corner of the code editor area, with the text "Go to PC settings to activate Windows." Below the code editor is the Windows taskbar, which contains icons for the Start menu, Task View, File Explorer, Microsoft Edge, Zoom, Word, and several other applications. The system tray on the right shows the date and time as "05:18 PM 24-Feb-25".

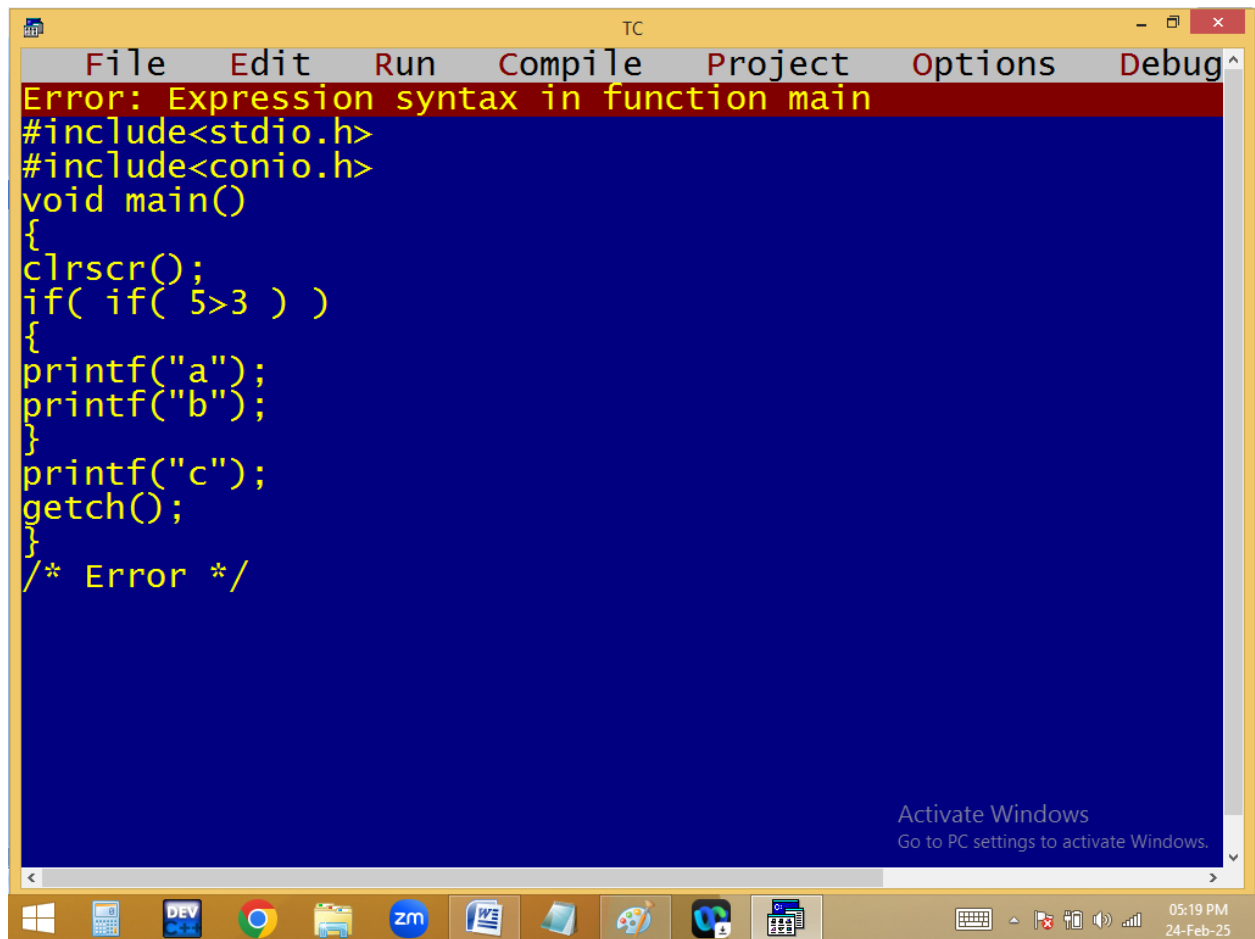

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error message banner at the top states "Error: Expression syntax in function main". The code editor has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( if( 5>3 ) )
{
printf("a");
printf("b");
}
printf("c");
getch();
}
/* Error */
```


An "Activate Windows" watermark is visible in the bottom right corner of the code editor area, with the text "Go to PC settings to activate Windows." Below the code editor is a Windows taskbar with various application icons (Windows Start button, calculator, DEV C++, Google Chrome, file explorer, Zoom, Word, and others). The system tray on the right shows the date and time as "05:19 PM 24-Feb-25".

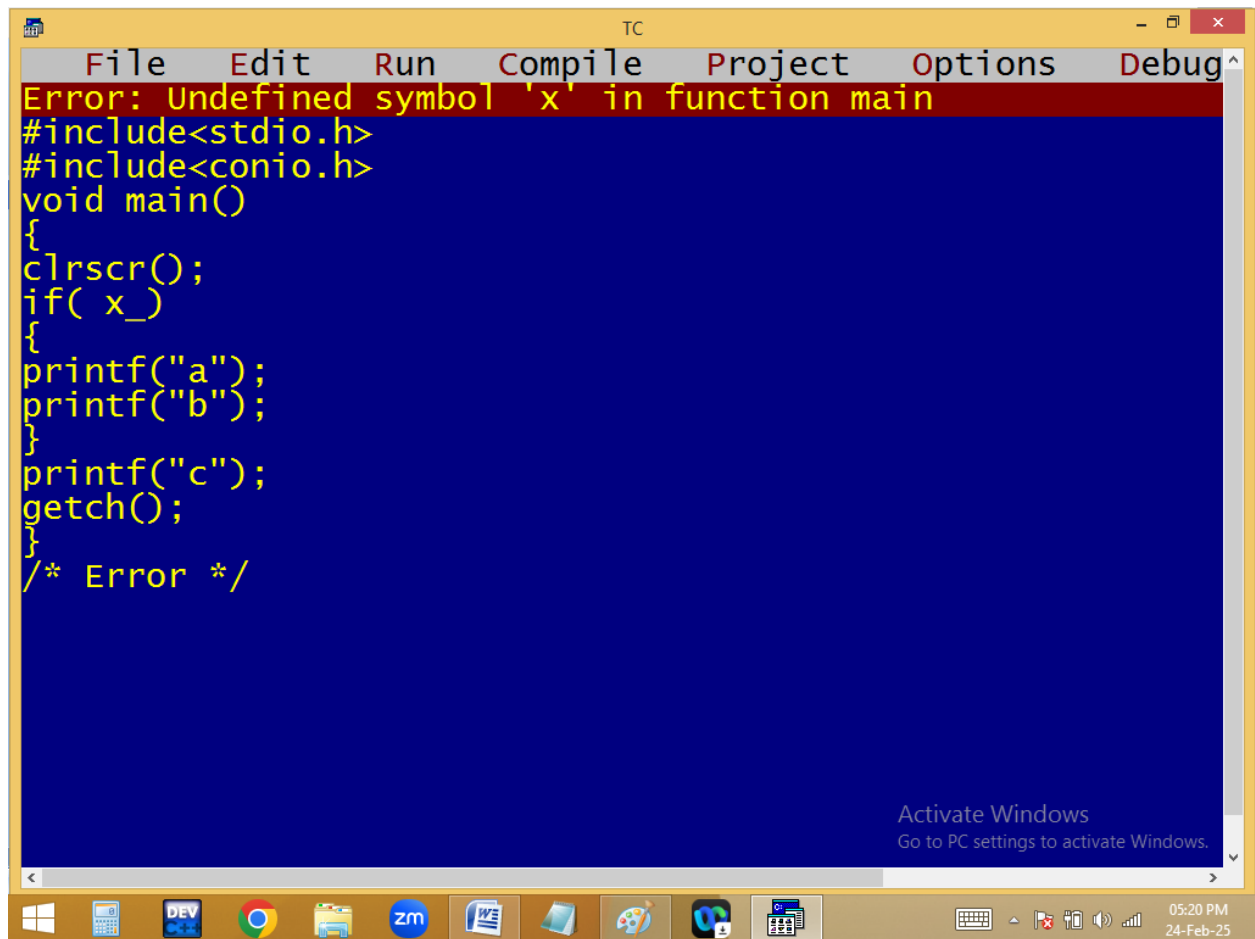

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error message banner at the top of the code editor states: "Error: Undefined symbol 'x' in function main". The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( x_)
{
printf("a");
printf("b");
}
printf("c");
getch();
}
/* Error */
```


At the bottom right of the code editor, there is a watermark that says "Activate Windows Go to PC settings to activate Windows." The Windows taskbar is visible at the bottom, showing icons for the Start menu, Task View, File Explorer, Zoho Mail, Word, a folder, Paint, VS Code, and a calculator. The system tray on the right shows the date and time as "05:20 PM 24-Feb-25".

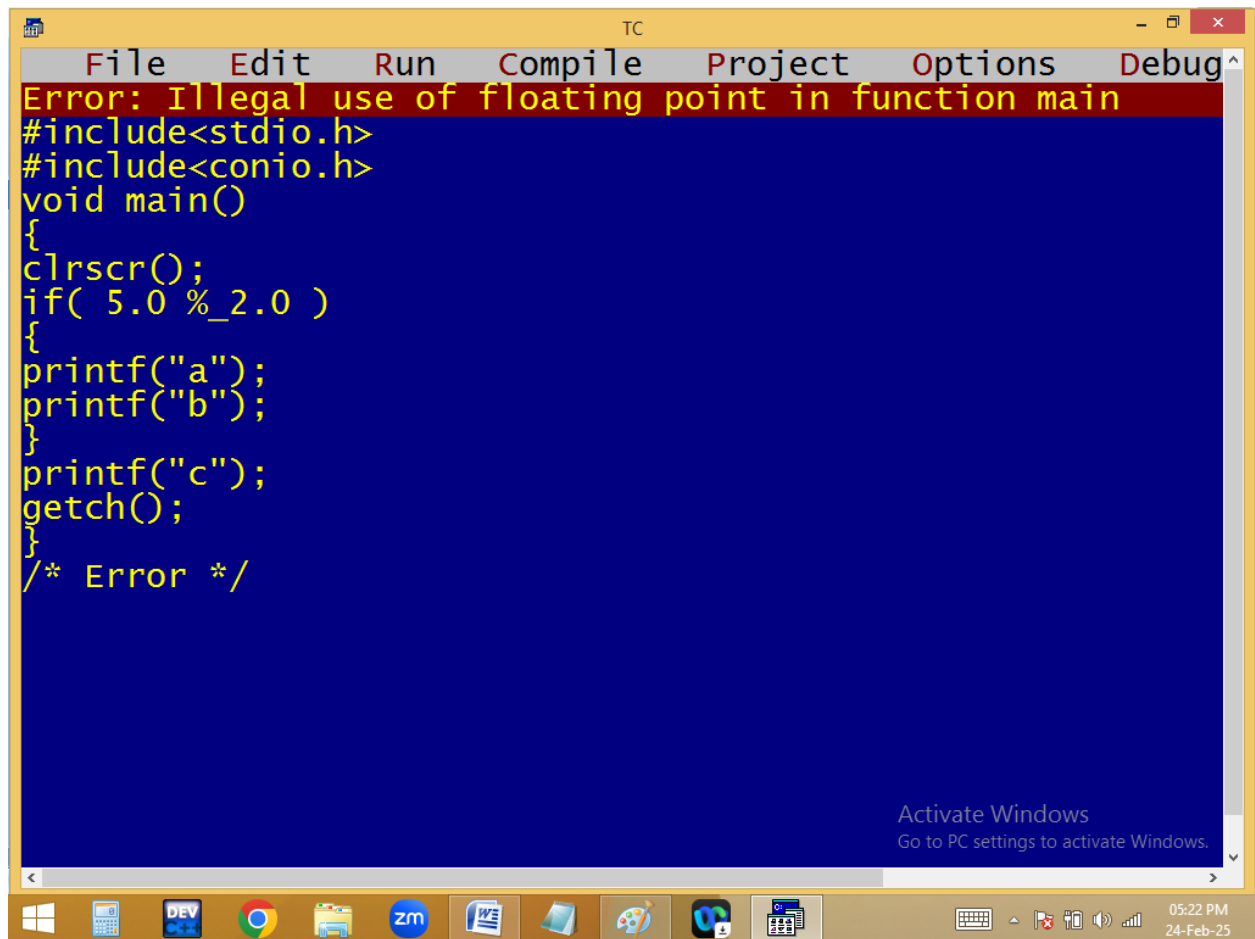

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error message banner at the top states: "Error: Illegal use of floating point in function main". The code editor has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( 5.0 %_2.0 )
{
printf("a");
printf("b");
}
printf("c");
getch();
}
/* Error */
```


An "Activate Windows" watermark is visible in the bottom right corner of the code editor area, with the text "Go to PC settings to activate Windows." Below the code editor is a Windows taskbar with various application icons (Windows Start button, calculator, DEV C++, Google Chrome, File Explorer, Zoom, Word, a folder, a game controller, a folder with a question mark, and a calendar). System tray icons on the right include keyboard, volume, and network. The system clock shows "05:22 PM" and "24-Feb-25".

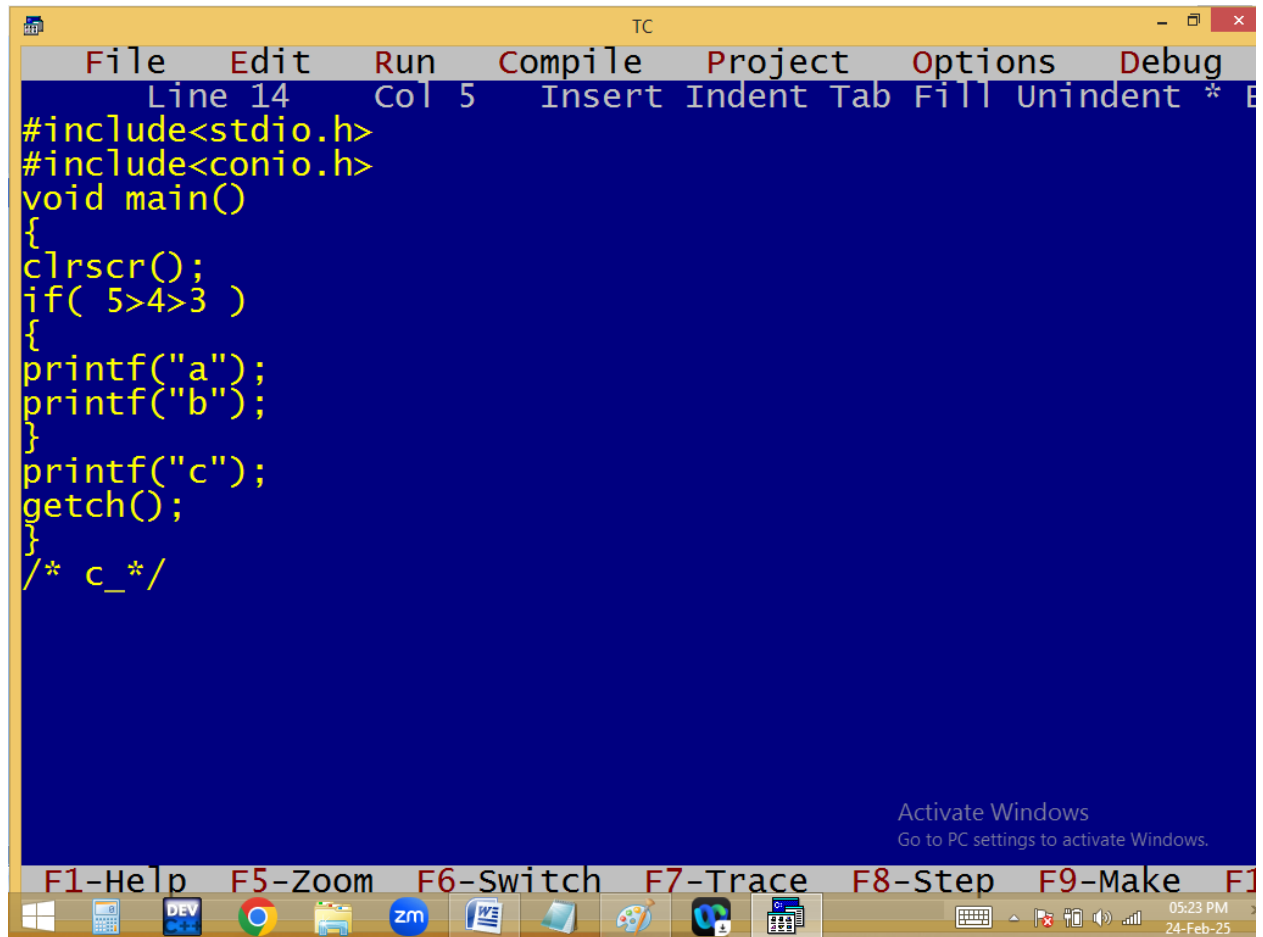

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates "Line 14 Col 5 Insert Indent Tab Fill Unindent * B". The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( 5>4>3 )
{
printf("a");
printf("b");
}
printf("c");
getch();
}
/* c_*/
```


An "Activate Windows" watermark is visible in the bottom right corner of the IDE window, stating "Go to PC settings to activate Windows." Below the IDE window, a secondary menu bar shows function key shortcuts: F1-Help, F5-Zoom, F6-Switch, F7-Trace, F8-Step, F9-Make, and F10-Run. The Windows taskbar at the bottom contains icons for the Start menu, Task View, File Explorer, Google Chrome, Zoom, Word, and other applications. The system clock in the bottom right corner shows "05:23 PM" and "24-Feb-25".

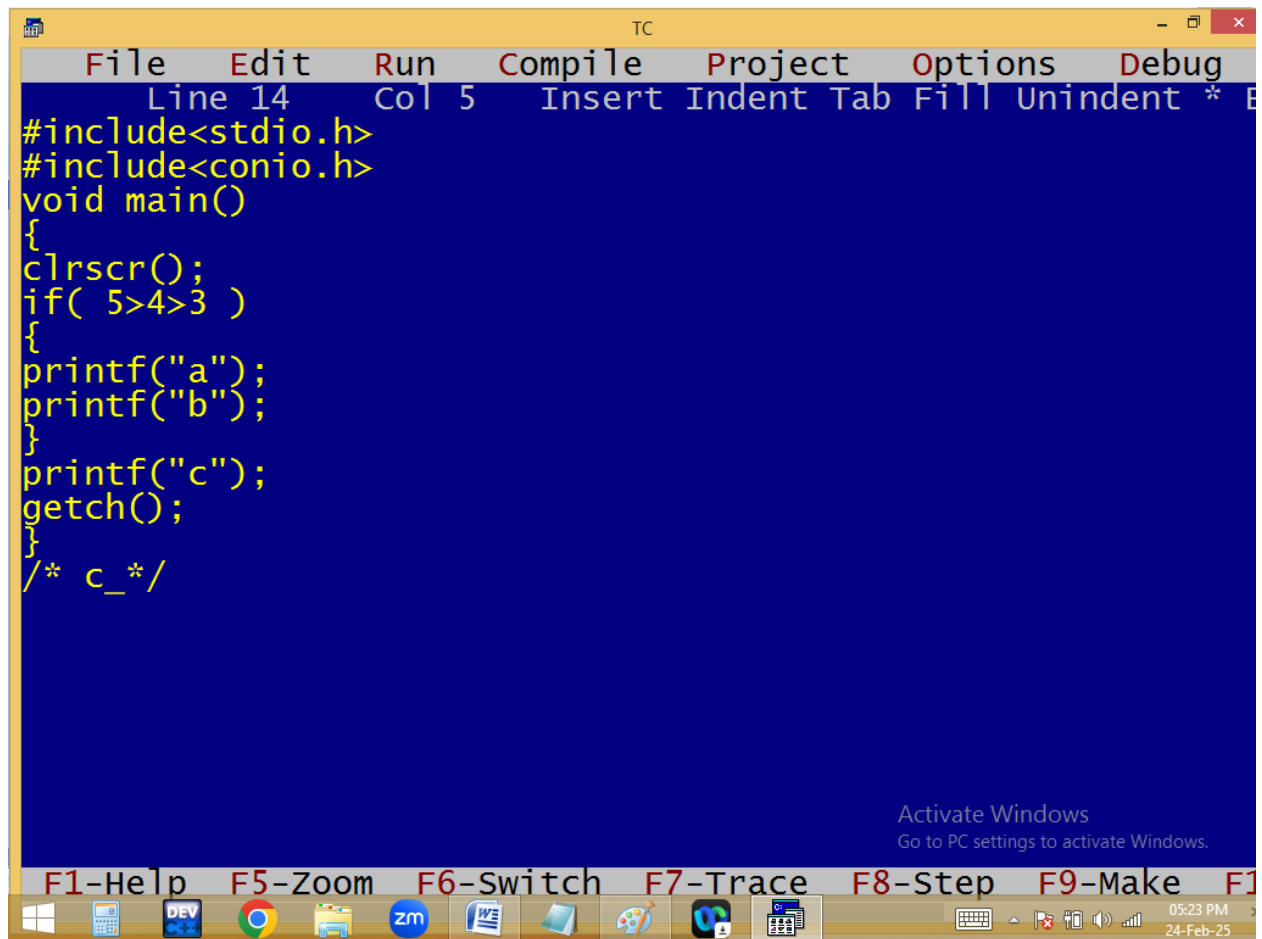

```
TC
File Edit Run Compile Project Options Debug
Line 14 Col 5 Insert Indent Tab Fill Unindent * B
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( 5>4>3 )
{
printf("a");
printf("b");
}
printf("c");
getch();
}
/* c_*/

Activate Windows
Go to PC settings to activate Windows.


F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run
05:23 PM
24-Feb-25
```

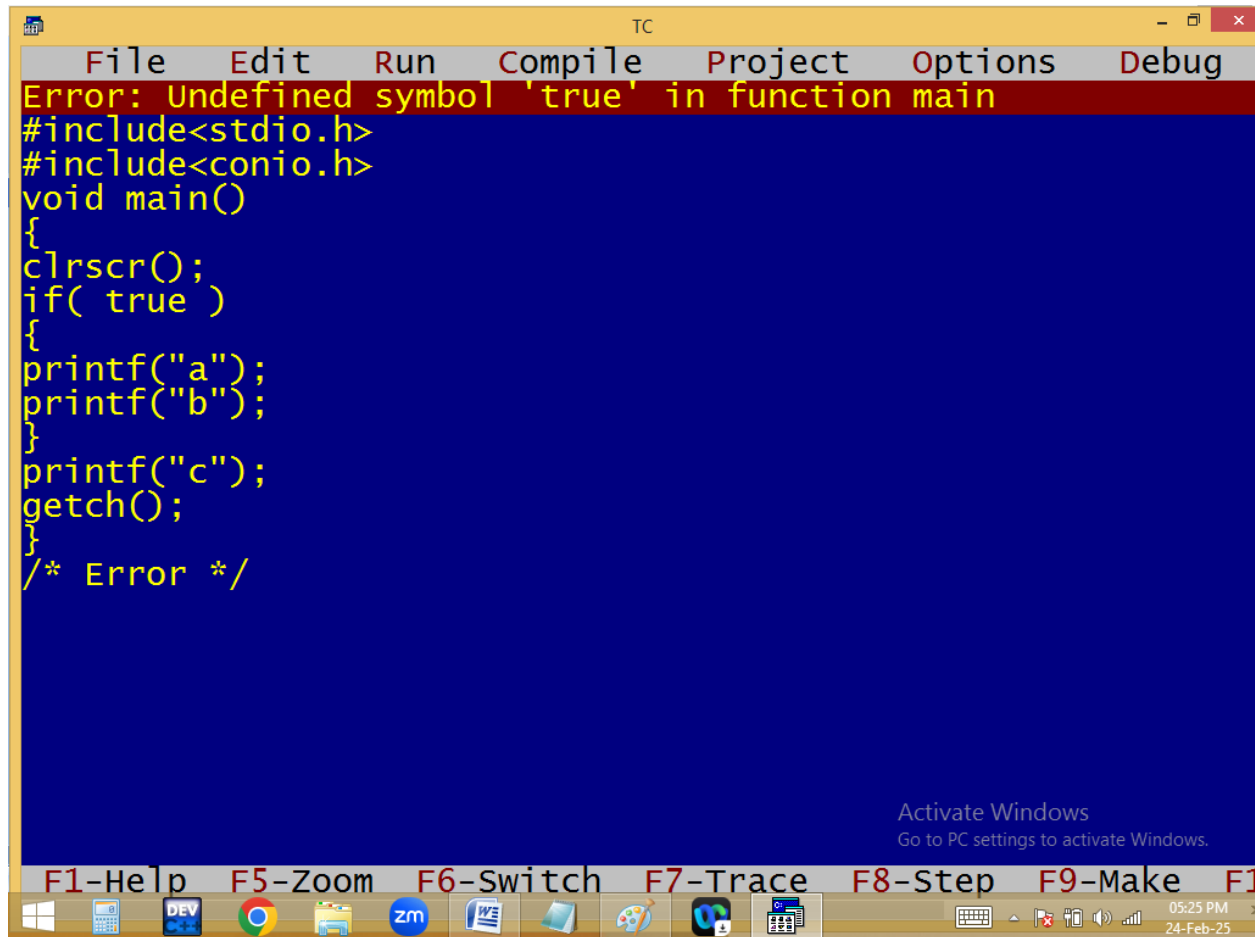

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error message banner at the top reads "Error: Undefined symbol 'true' in function main". The code editor has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( true )
{
printf("a");
printf("b");
}
printf("c");
getch();
}
/* Error */
```


At the bottom of the code editor, there is a text prompt: "Activate Windows Go to PC settings to activate Windows." Below the code editor is a toolbar with function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". The Windows taskbar is visible at the very bottom, showing icons for the Start menu, Task View, File Explorer, and several other applications. The system clock in the bottom right corner shows "05:25 PM" and "24-Feb-25".

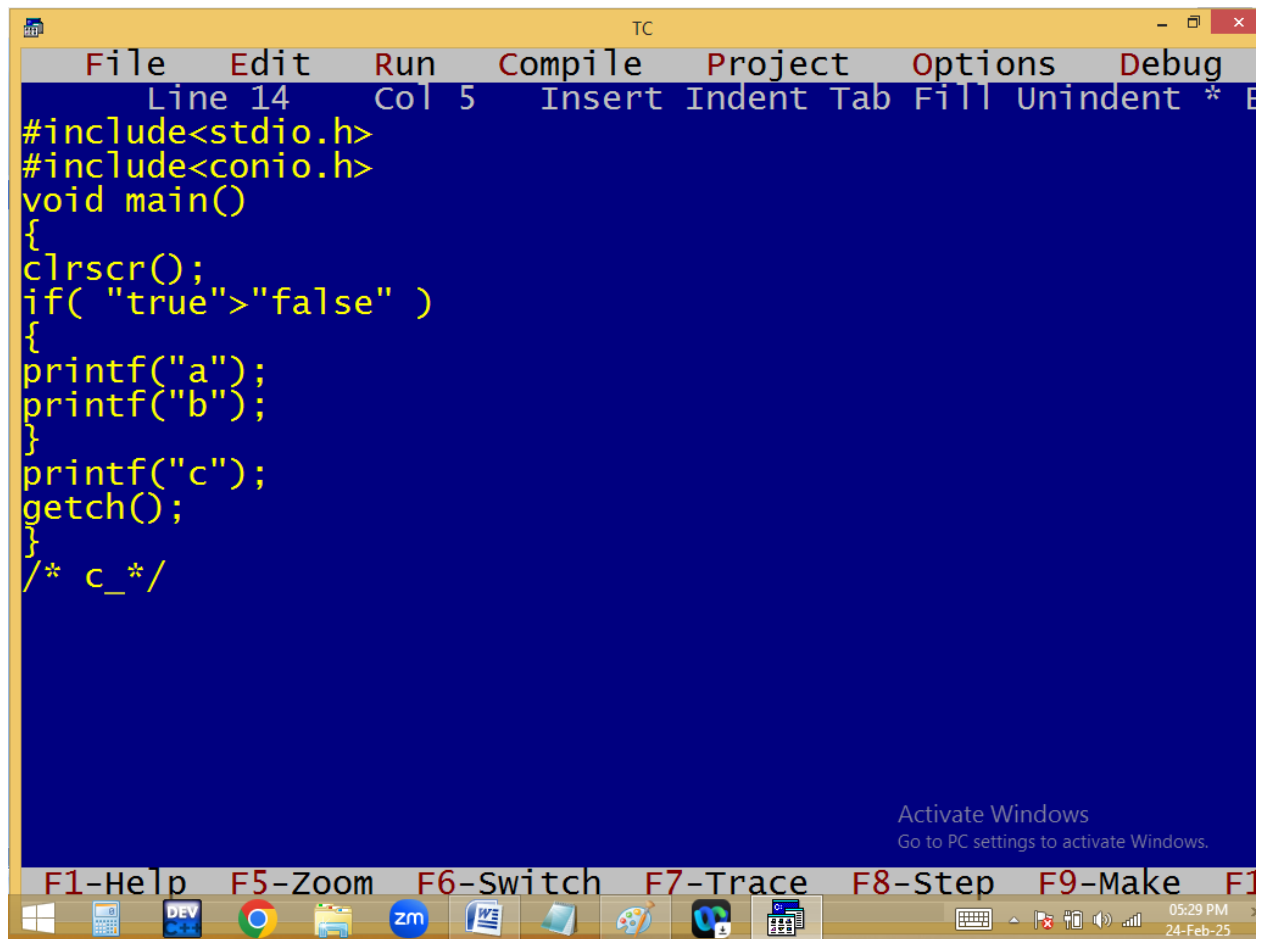

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates "Line 14 Col 5 Insert Indent Tab Fill Unindent *". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( "true">"false" )
{
printf("a");
printf("b");
}
printf("c");
getch();
}
/* c_*/
```


At the bottom of the IDE, there is a row of function key shortcuts: F1-Help, F5-Zoom, F6-Switch, F7-Trace, F8-Step, F9-Make, and F10-Run. Below this is the Windows taskbar with icons for Windows, File Explorer, DEV C++, Google Chrome, File Explorer, Zoom, Word, and other applications. The system tray on the right shows the time as 05:29 PM and the date as 24-Feb-25. An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.

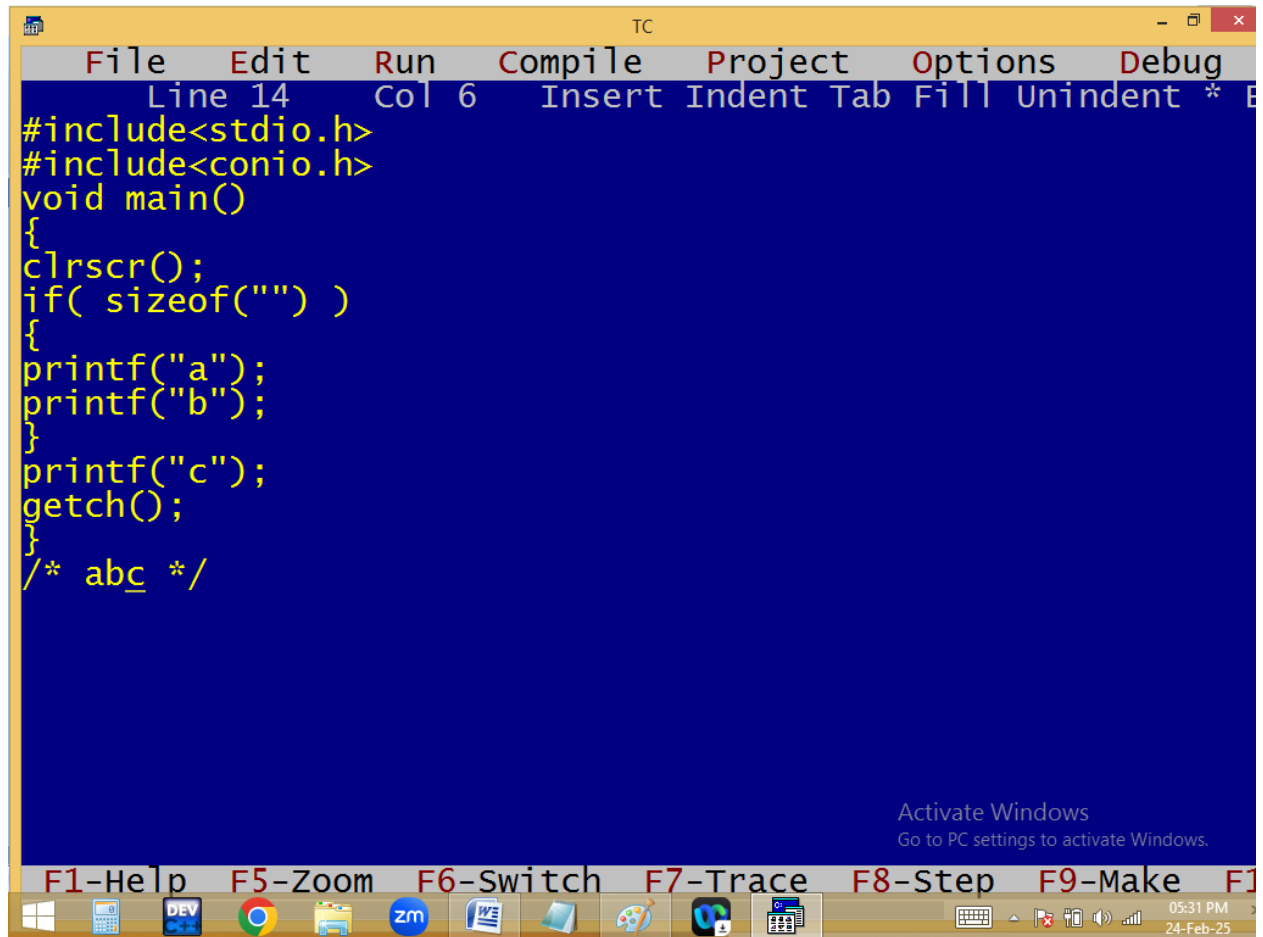

```
TC
File Edit Run Compile Project Options Debug
Line 14 Col 6 Insert Indent Tab Fill Unindent * B
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( sizeof("") )
{
printf("a");
printf("b");
}
printf("c");
getch();
}
/* abc */

Activate Windows
Go to PC settings to activate Windows.


F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run
05:31 PM
24-Feb-25
```

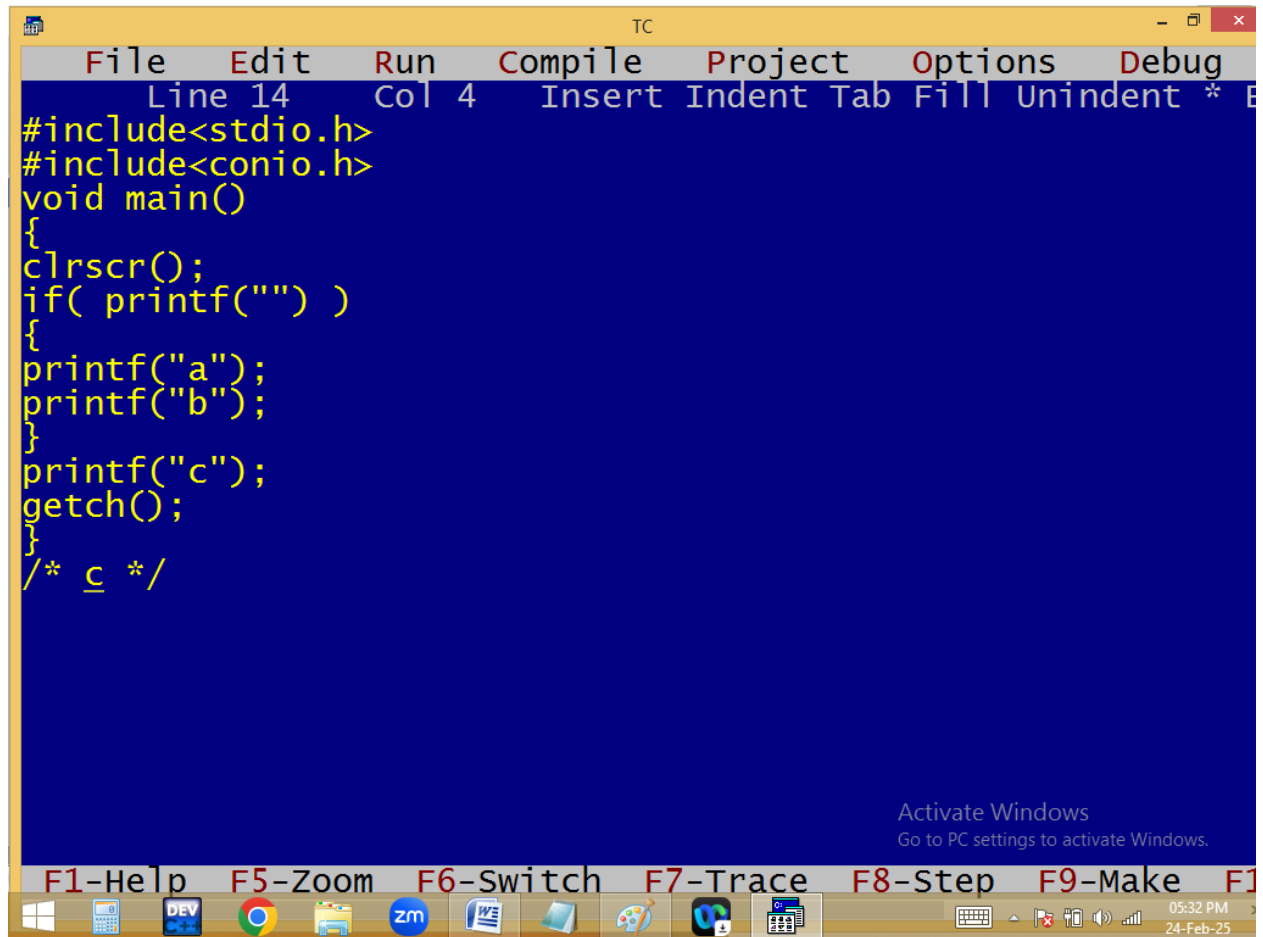

The image shows a screenshot of the Turbo C++ (TC) integrated development environment. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 14", "Col 4", and lists editing actions: "Insert", "Indent", "Tab", "Fill", "Unindent", and "* B". The main editing area has a dark blue background with yellow text. The code is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( printf("") )
{
printf("a");
printf("b");
}
printf("c");
getch();
}
/* c */
```


An "Activate Windows" watermark is visible in the bottom right corner of the IDE window, with the text "Go to PC settings to activate Windows." Below the IDE window is the Windows taskbar. It features a row of function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-?". The taskbar also contains icons for the Start menu, Task View, File Explorer, Google Chrome, Zoom, Word, and other applications. The system tray on the right shows the date and time as "05:32 PM 24-Feb-25".

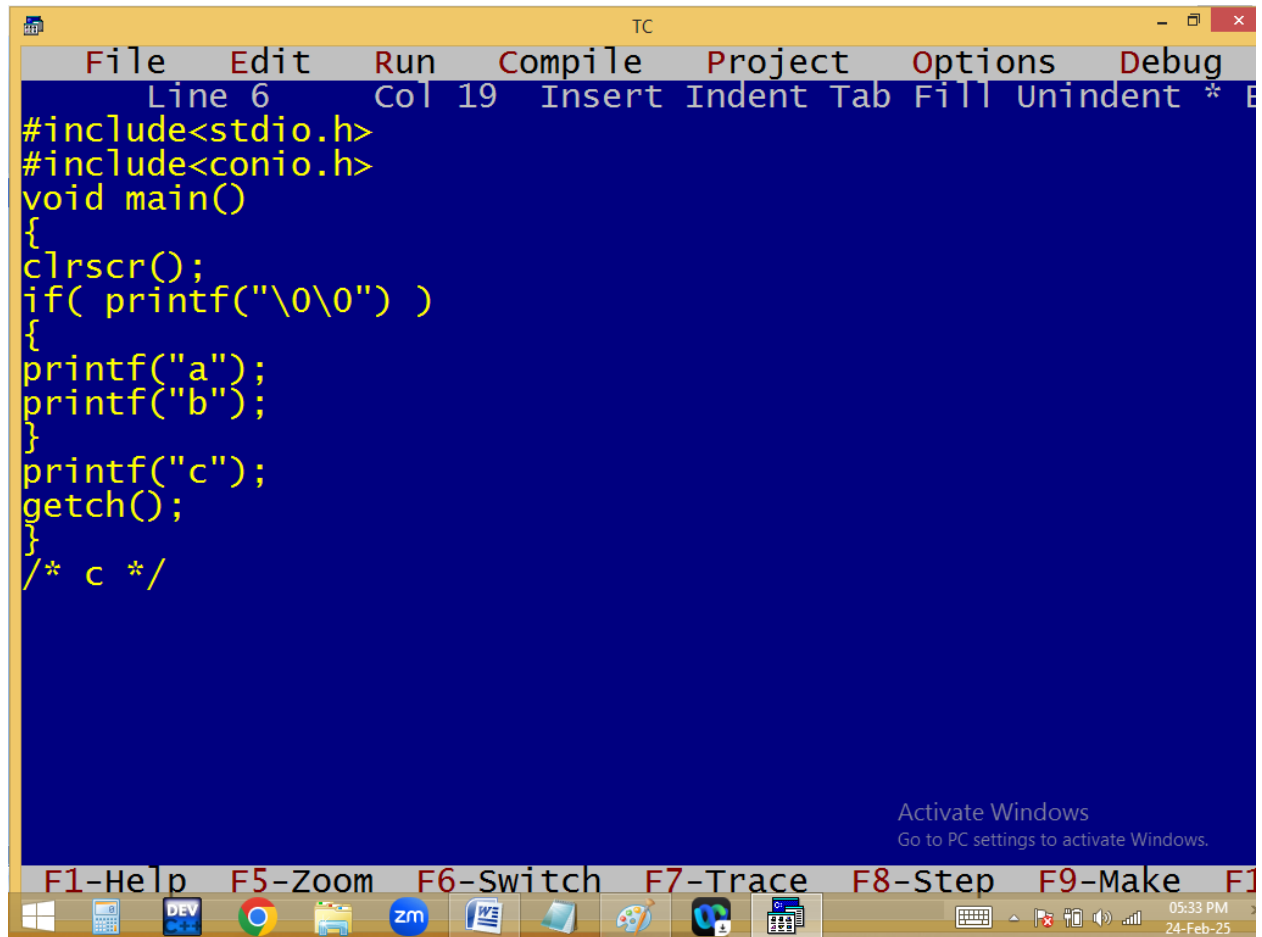

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates "Line 6 Col 19 Insert Indent Tab Fill Unindent *". The code editor contains the following C program:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( printf("\0\0") )
{
printf("a");
printf("b");
}
printf("c");
getch();
}
/* c */
```


At the bottom of the code editor, there is a message: "Activate Windows Go to PC settings to activate Windows." Below the code editor is a toolbar with function key shortcuts: F1-Help, F5-Zoom, F6-Switch, F7-Trace, F8-Step, F9-Make, and F10-Run. The Windows taskbar is visible at the bottom, showing icons for the Start menu, Task View, File Explorer, Google Chrome, Zoom, Word, and other applications. The system clock in the bottom right corner shows "05:33 PM 24-Feb-25".

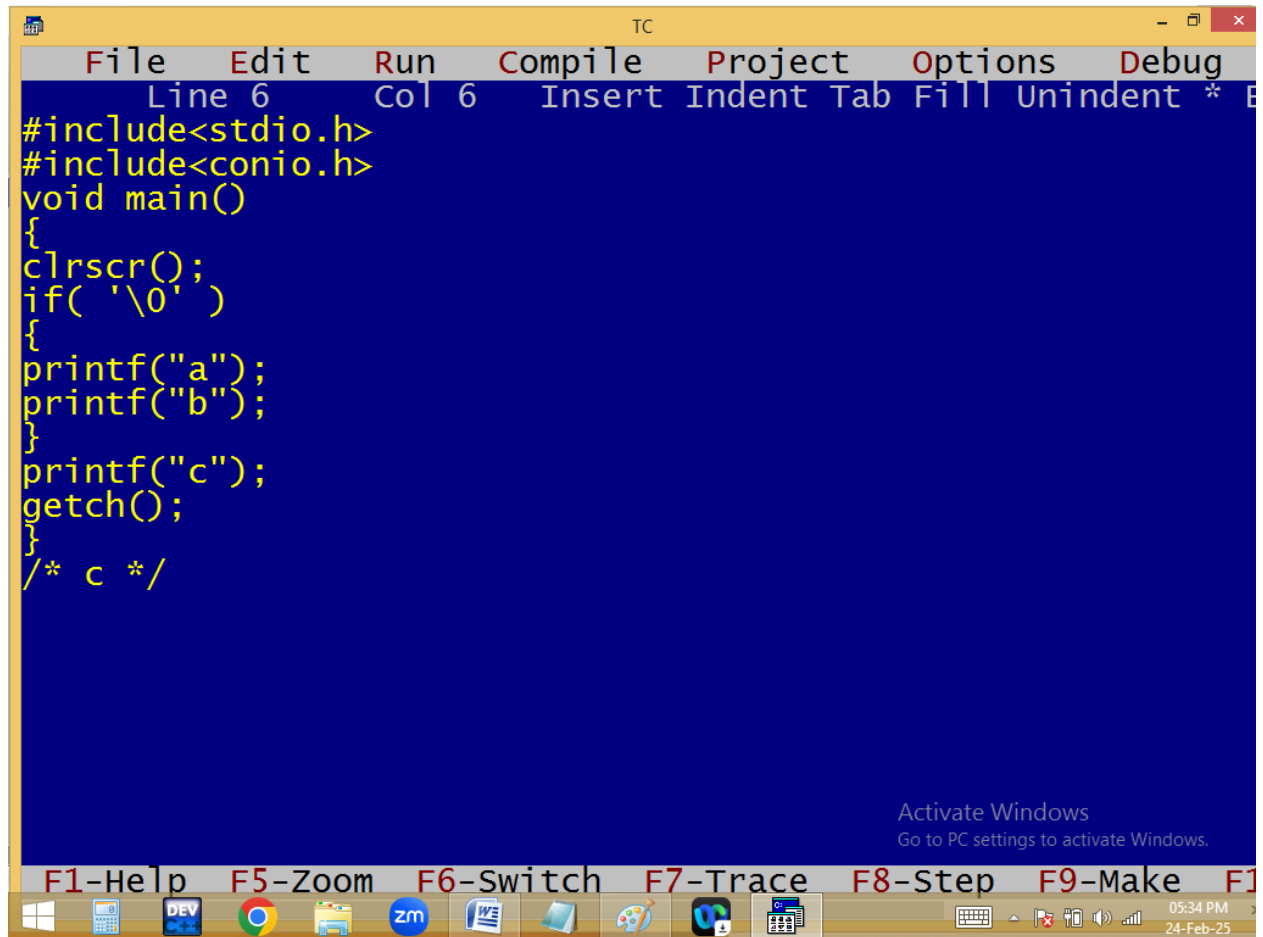

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates "Line 6", "Col 6", and "Insert Indent Tab Fill Unindent *". The code editor contains the following C program:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( '\0' )
{
printf("a");
printf("b");
}
printf("c");
getch();
}
/* c */
```

At the bottom of the code editor, there is a message: "Activate Windows Go to PC settings to activate Windows." Below the code editor, there is a toolbar with function key shortcuts: F1-Help, F5-Zoom, F6-Switch, F7-Trace, F8-Step, F9-Make, and F10-Run. The Windows taskbar is visible at the bottom, showing icons for the Start menu, Task View, File Explorer, Microsoft Edge, Zoom, Word, and several other applications. The system clock in the bottom right corner shows "05:34 PM" and "24-Feb-25".

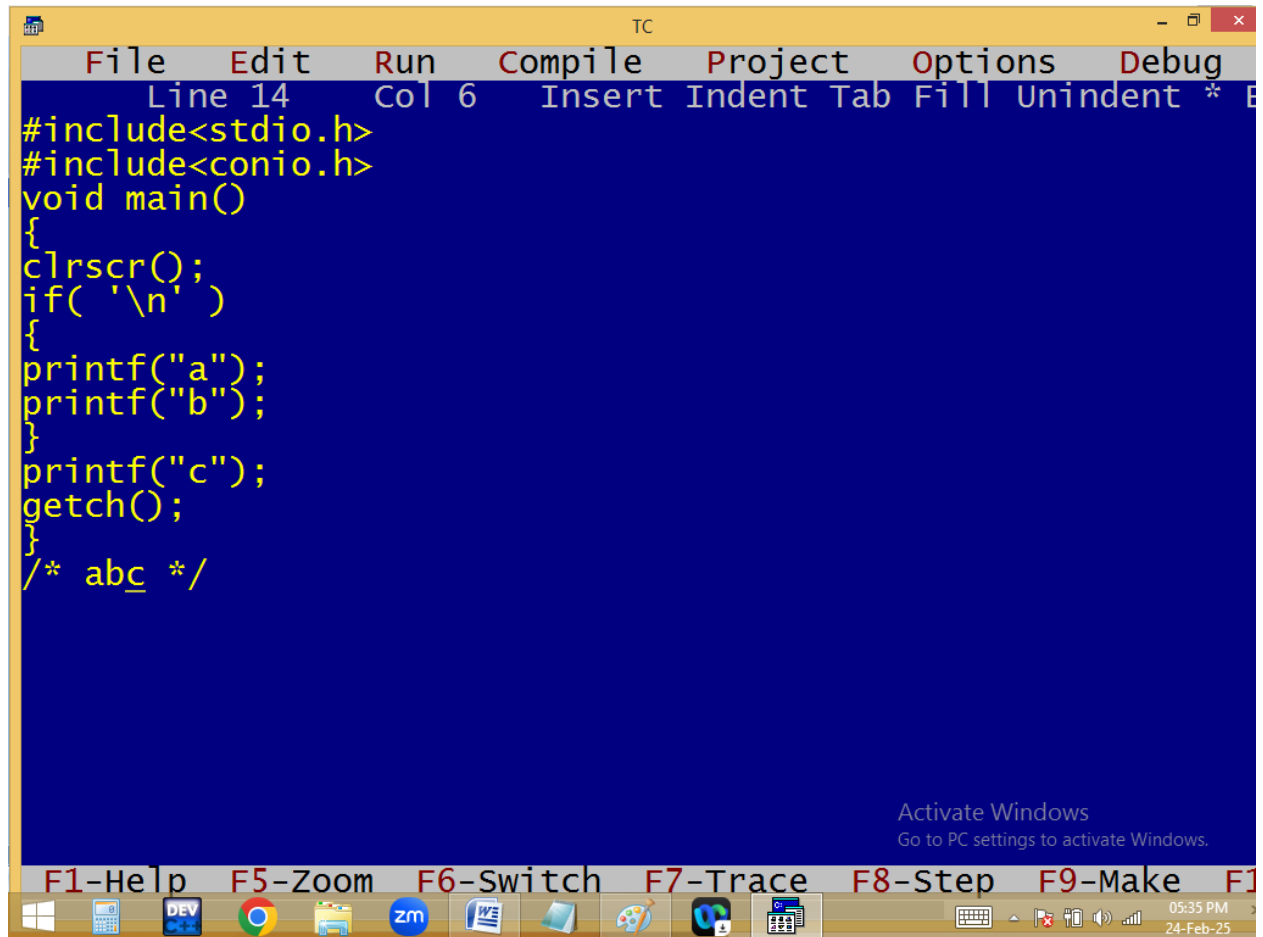


The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates "Line 14 Col 6 Insert Indent Tab Fill Unindent *". The code editor contains the following C program:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( '\n' )
{
printf("a");
printf("b");
}
printf("c");
getch();
}
/* abc */
```

At the bottom of the window, there is a taskbar with various application icons. A status bar at the very bottom shows the time "05:35 PM" and the date "24-Feb-25". A watermark "Activate Windows Go to PC settings to activate Windows." is visible in the bottom right corner of the IDE window.


F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

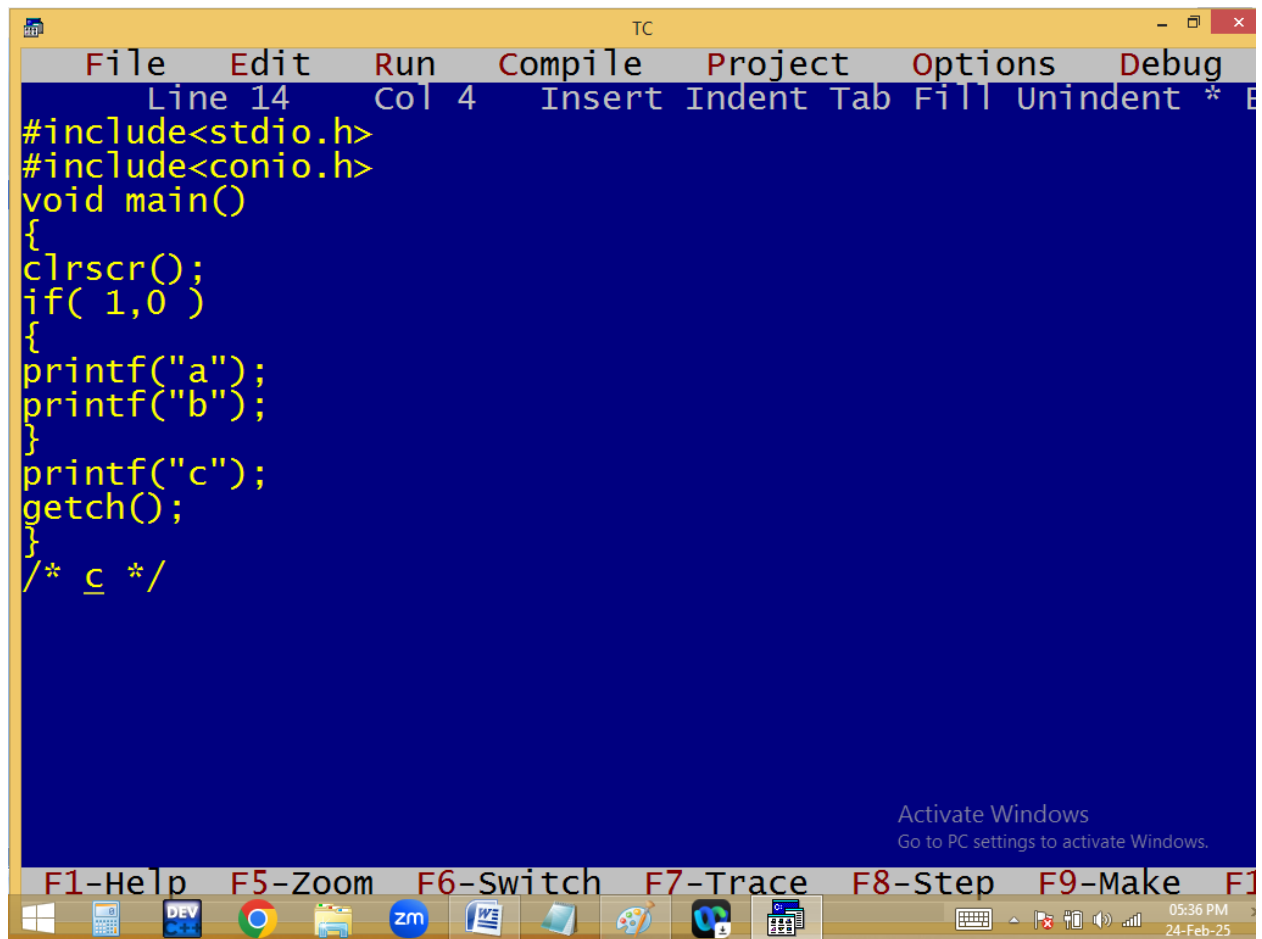

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 14", "Col 4", and lists actions: "Insert", "Indent", "Tab", "Fill", "Unindent", and "* B". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( 1,0 )
{
printf("a");
printf("b");
}
printf("c");
getch();
}
/* c */
```


At the bottom of the window, there is a text prompt: "Activate Windows. Go to PC settings to activate Windows." Below the code editor is a toolbar with function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". The Windows taskbar is visible at the very bottom, showing icons for the Start menu, Task View, File Explorer, and several other applications. The system clock in the bottom right corner shows "05:36 PM" and "24-Feb-25".

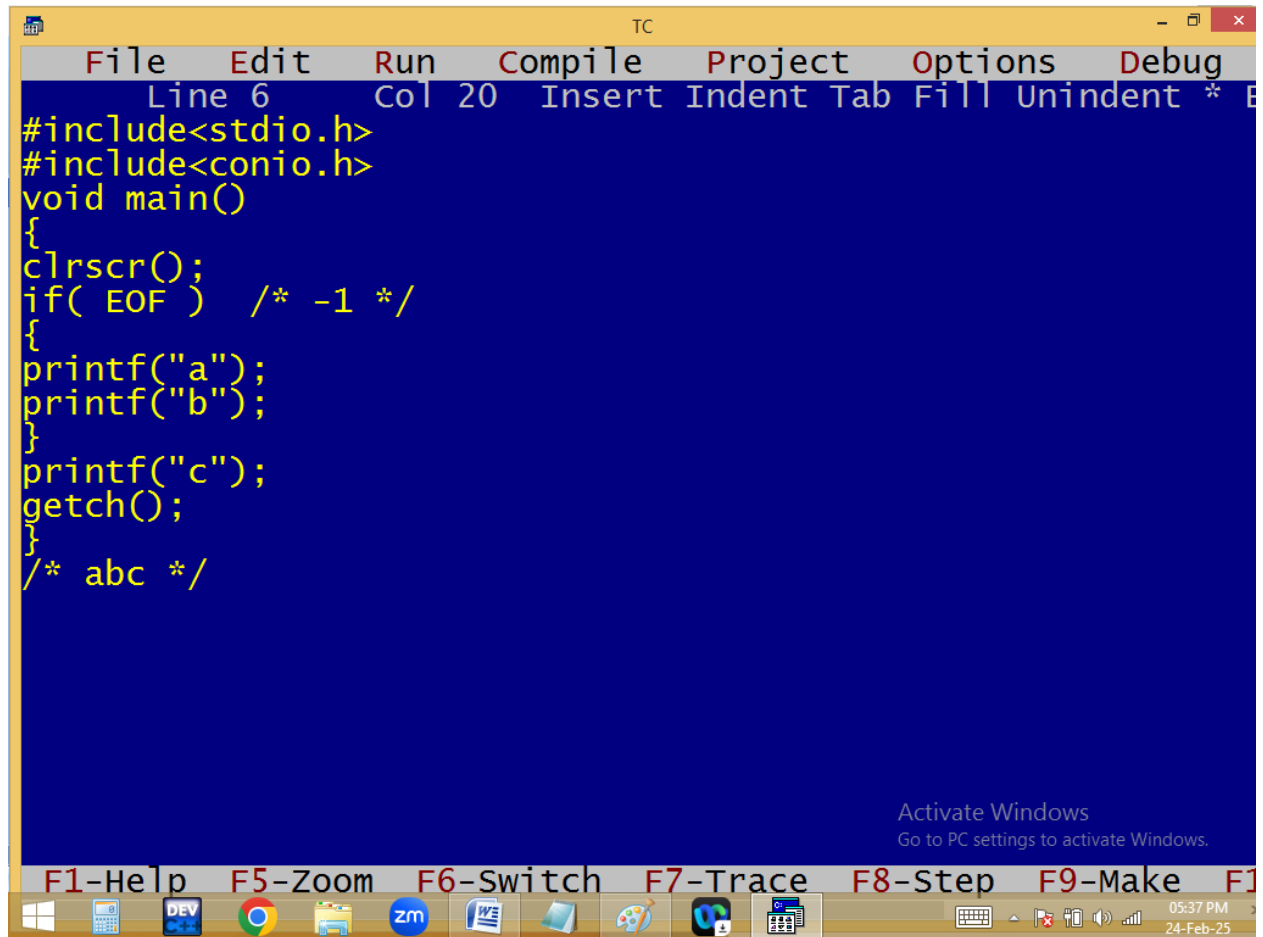

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates "Line 6", "Col 20", and "Insert" mode. The code editor has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( EOF ) /* -1 */
{
printf("a");
printf("b");
}
printf("c");
getch();
}
/* abc */
```


At the bottom of the code editor, there is a message: "Activate Windows Go to PC settings to activate Windows." Below the code editor is a toolbar with function key shortcuts: F1-Help, F5-Zoom, F6-Switch, F7-Trace, F8-Step, F9-Make, and F10-Run. The Windows taskbar is visible at the very bottom, showing icons for the Start menu, Task View, File Explorer, Google Chrome, Zoom, Word, and other applications. The system clock in the bottom right corner shows "05:37 PM" and "24-Feb-25".

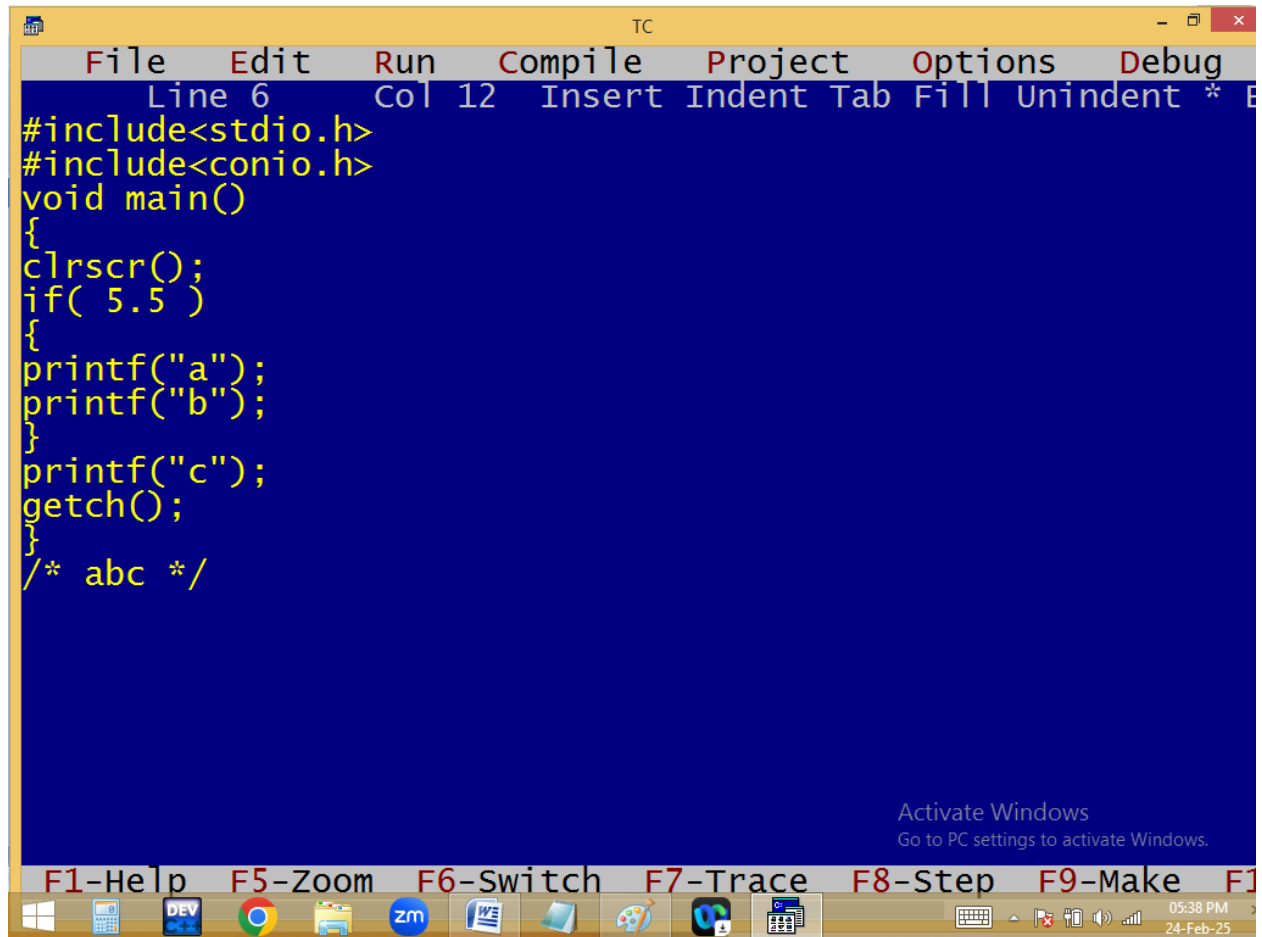

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates "Line 6" and "Col 12". The code editor has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( 5.5 )
{
printf("a");
printf("b");
}
printf("c");
getch();
}
/* abc */
```


At the bottom of the code editor, there is a message: "Activate Windows Go to PC settings to activate Windows." Below the code editor is a toolbar with function key shortcuts: F1-Help, F5-Zoom, F6-Switch, F7-Trace, F8-Step, F9-Make, and F10-Run. The Windows taskbar is visible at the very bottom, showing icons for the Start menu, Task View, File Explorer, and several other applications. The system clock in the bottom right corner shows "05:38 PM" and "24-Feb-25".

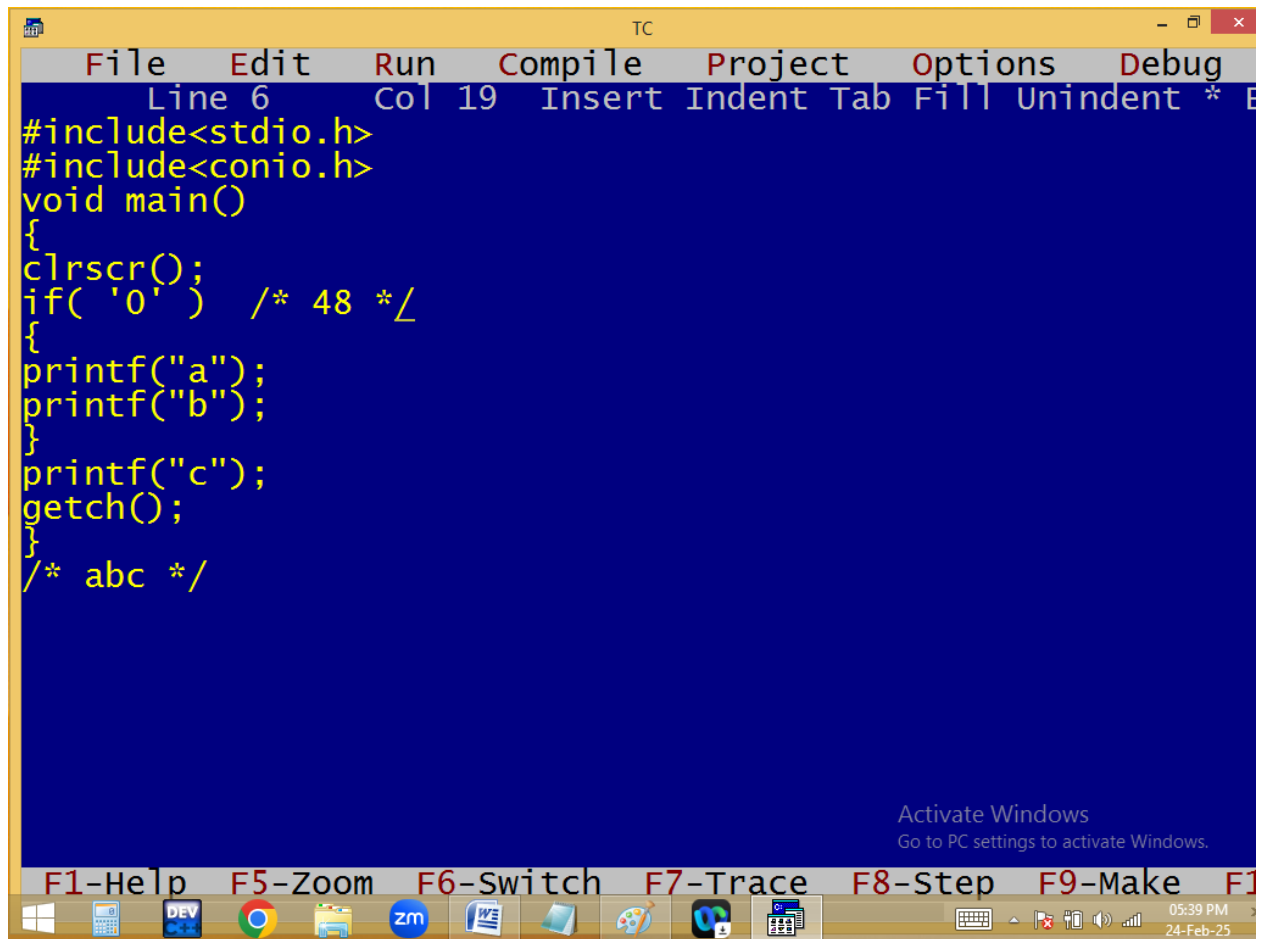

```
TC
File Edit Run Compile Project Options Debug
Line 6 Col 19 Insert Indent Tab Fill Unindent * B
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( '0' ) /* 48 */
{
printf("a");
printf("b");
}
printf("c");
getch();
}
/* abc */


Activate Windows
Go to PC settings to activate Windows.

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run
05:39 PM
24-Feb-25
```

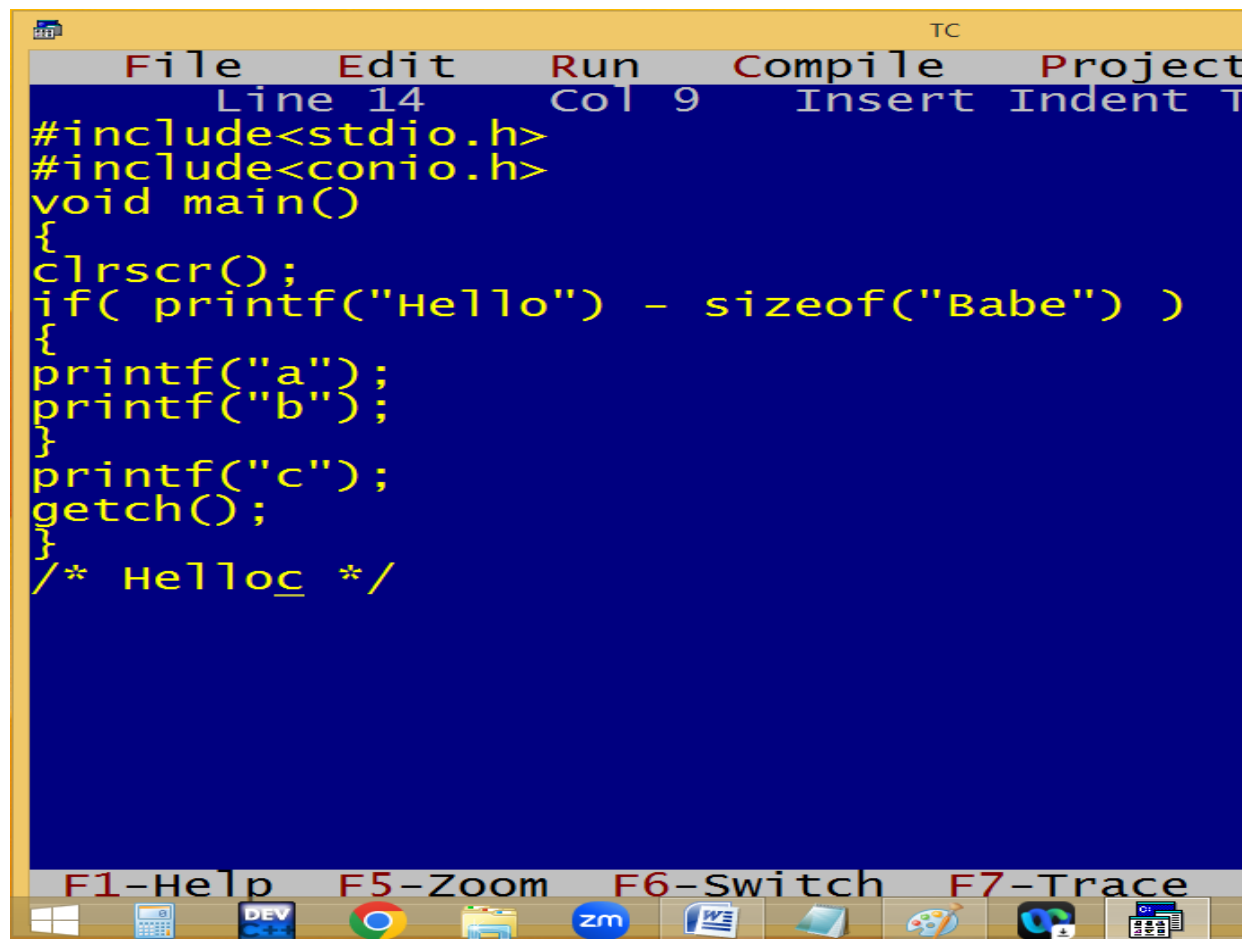

```
TC
File Edit Run Compile Project
Line 14 Col 9 Insert Indent T
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( printf("Hello") - sizeof("Babe") )
{
printf("a");
printf("b");
}
printf("c");
getch();
}
/* Helloc_ */


F1-Help F5-Zoom F6-Switch F7-Trace
Windows Taskbar Icons: Windows Start, Calculator, DEV, Google Chrome, File Explorer, Zoom, Word, Notepad, Paint, VS Code, Task Manager
```

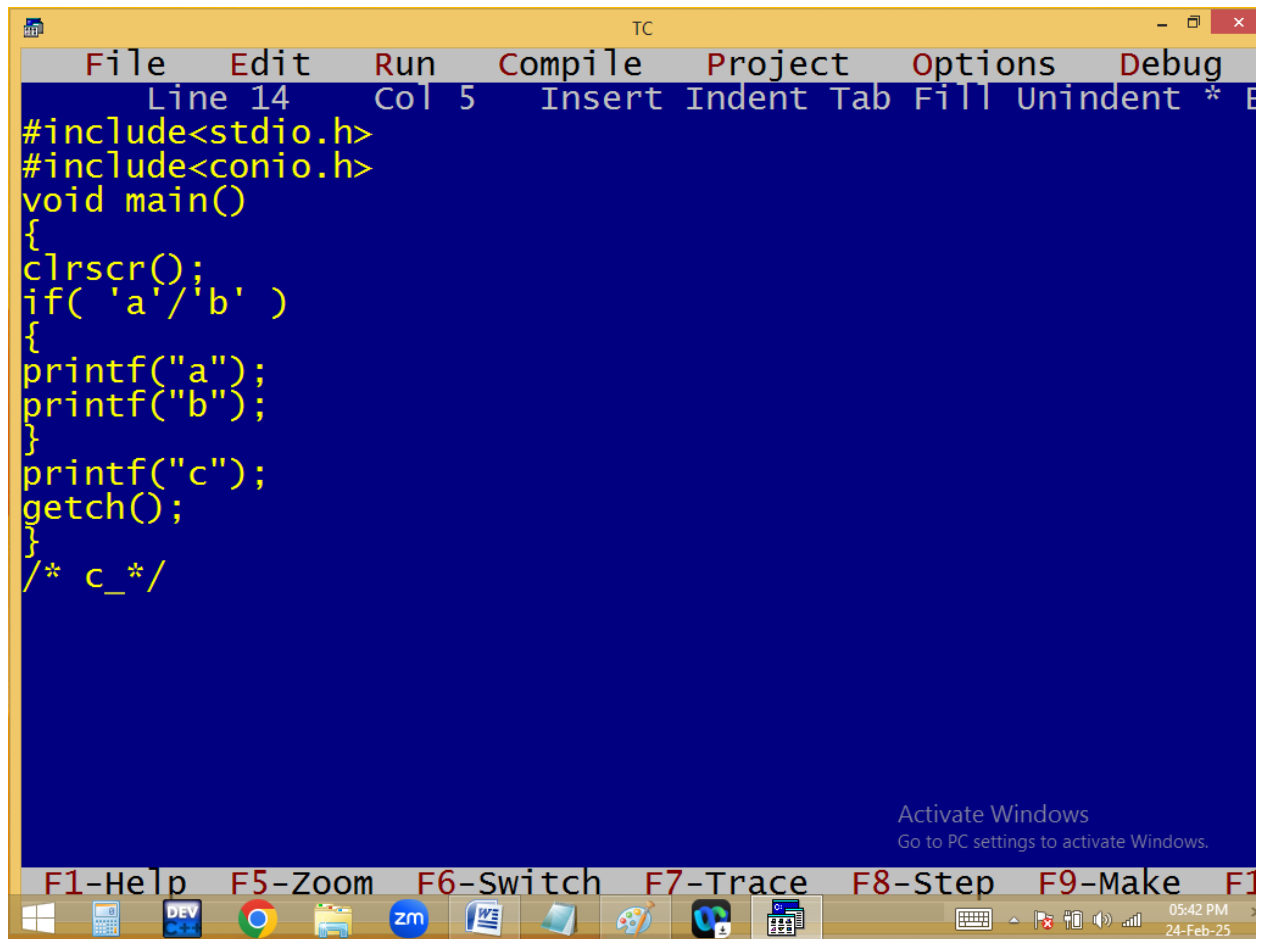

```
TC
File Edit Run Compile Project Options Debug
Line 14 Col 5 Insert Indent Tab Fill Unindent * B
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( 'a'/'b' )
{
printf("a");
printf("b");
}
printf("c");
getch();
}
/* c_*/

Activate Windows
Go to PC settings to activate Windows.

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run
05:42 PM
24-Feb-25
```
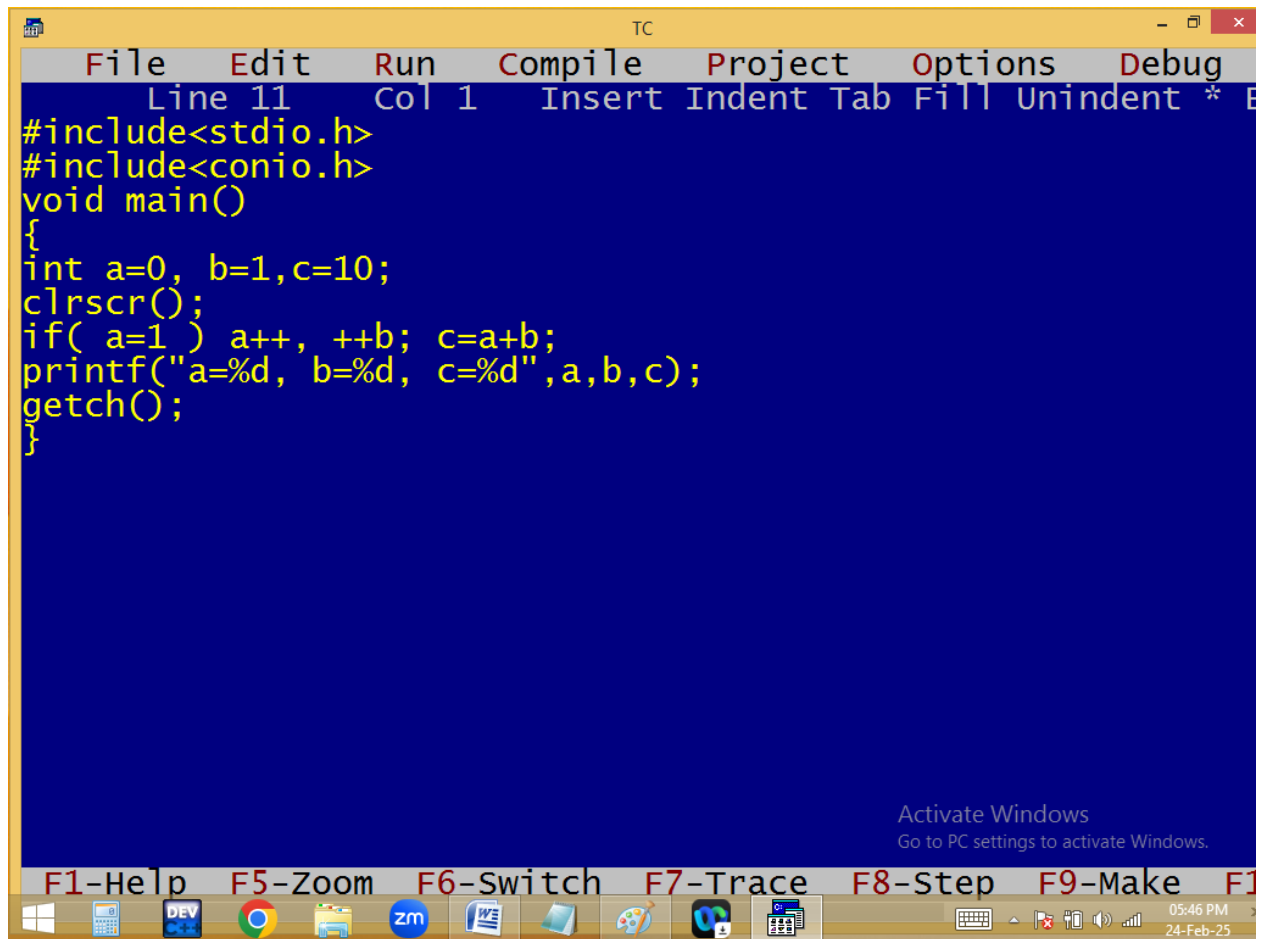
```
TC
File Edit Run Compile Project Options Debug
Line 11 Col 1 Insert Indent Tab Fill Unindent * B
#include<stdio.h>
#include<conio.h>
void main()
{
int a=0, b=1,c=10;
clrscr();
if( a=1 ) a++, ++b; c=a+b;
printf("a=%d, b=%d, c=%d",a,b,c);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F1

05:46 PM
24-Feb-25



TC




a=2, b=2, c=4

Activate Windows
Go to PC settings to activate Windows.



05:46 PM
24-Feb-25

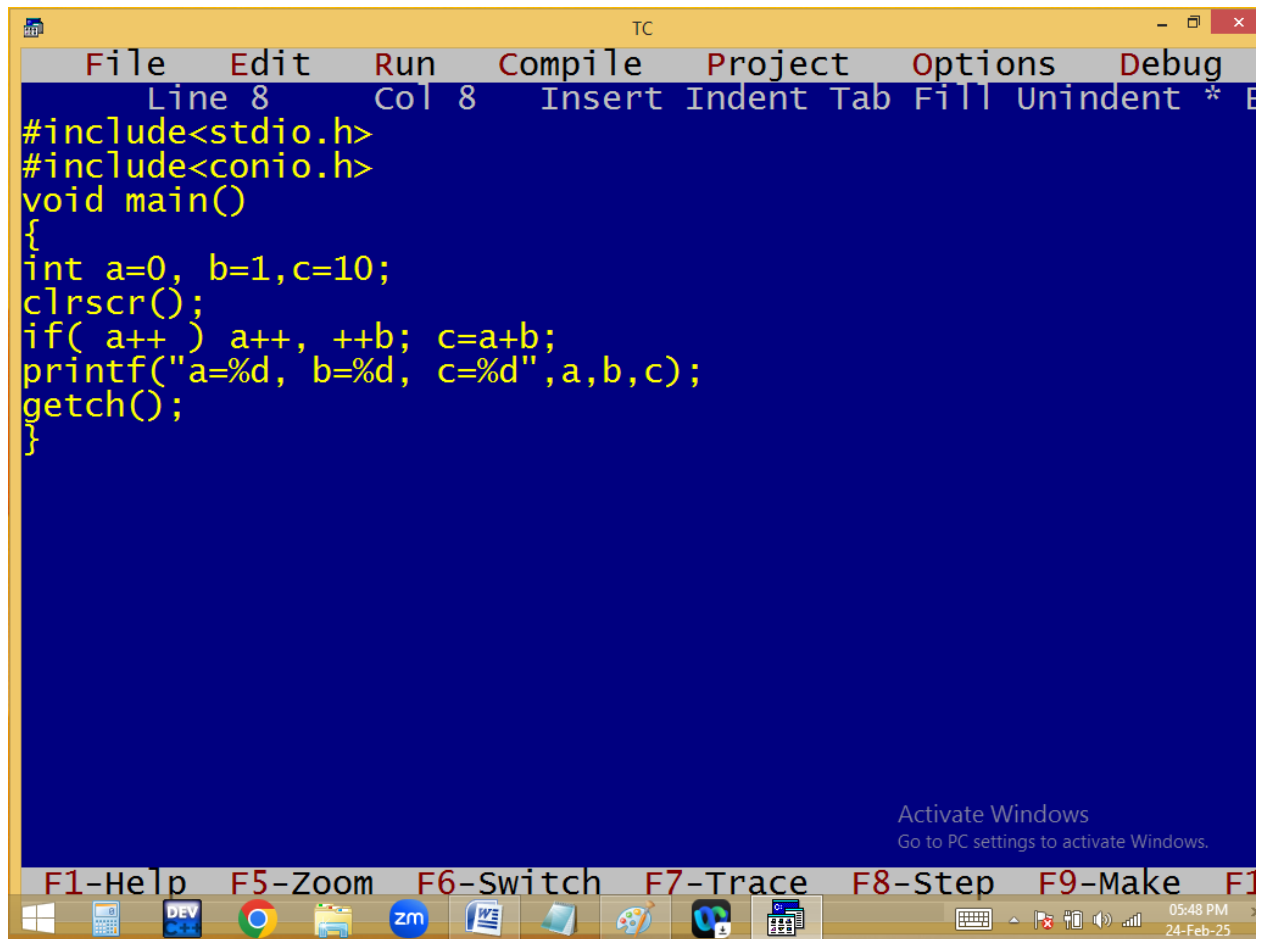

```
TC
File Edit Run Compile Project Options Debug
Line 8 Col 8 Insert Indent Tab Fill Unindent * B
#include<stdio.h>
#include<conio.h>
void main()
{
int a=0, b=1,c=10;
clrscr();
if( a++ ) a++, ++b; c=a+b;
printf("a=%d, b=%d, c=%d",a,b,c);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F1

05:48 PM
24-Feb-25




TC



```
a=1, b=1, c=2_
```

Activate Windows
Go to PC settings to activate Windows.



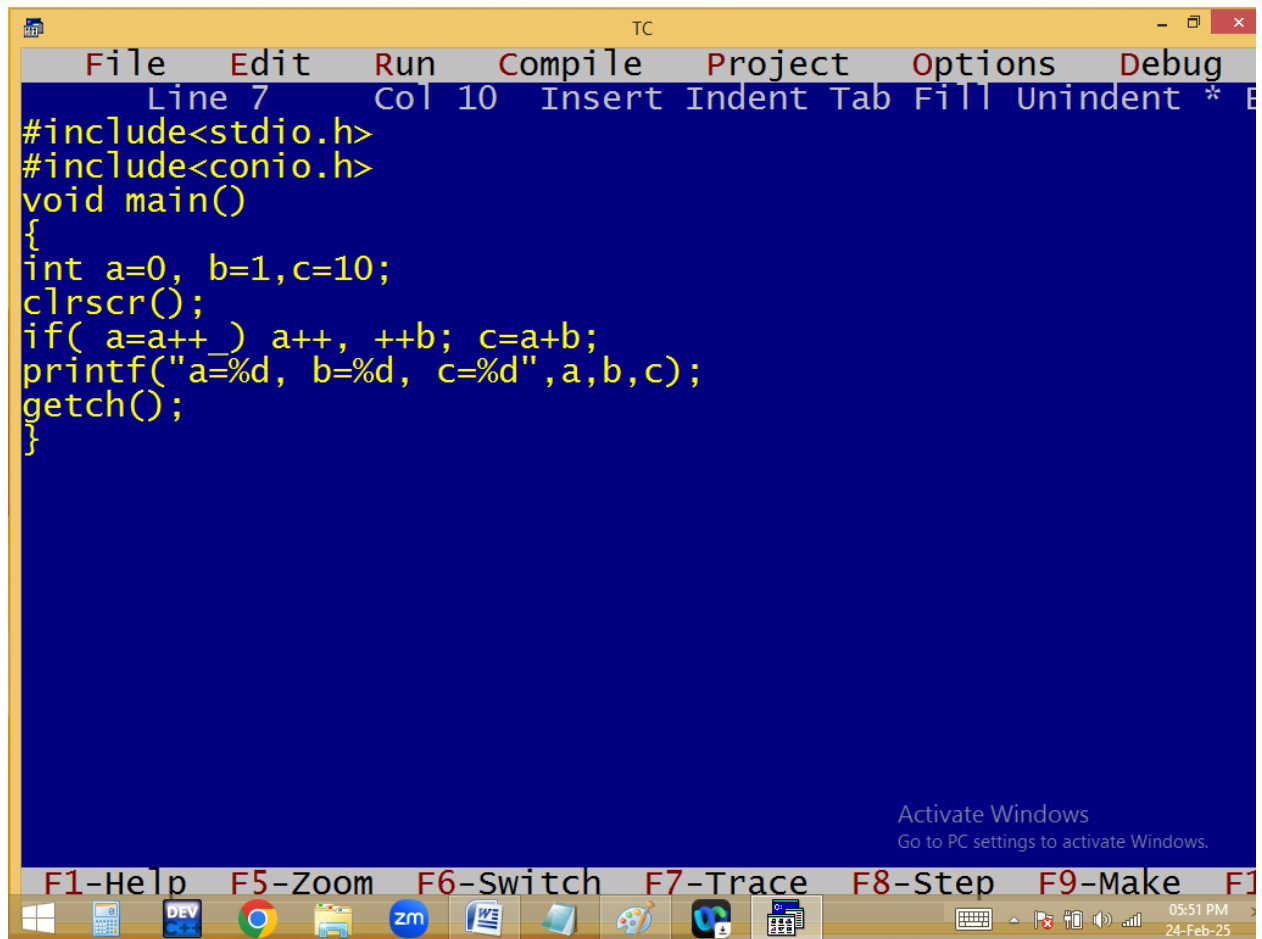



```
TC
File Edit Run Compile Project Options Debug
Line 7 Col 10 Insert Indent Tab Fill Unindent * B
#include<stdio.h>
#include<conio.h>
void main()
{
int a=0, b=1,c=10;
clrscr();
if( a=a++_) a++, ++b; c=a+b;
printf("a=%d, b=%d, c=%d",a,b,c);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F1

05:51 PM
24-Feb-25

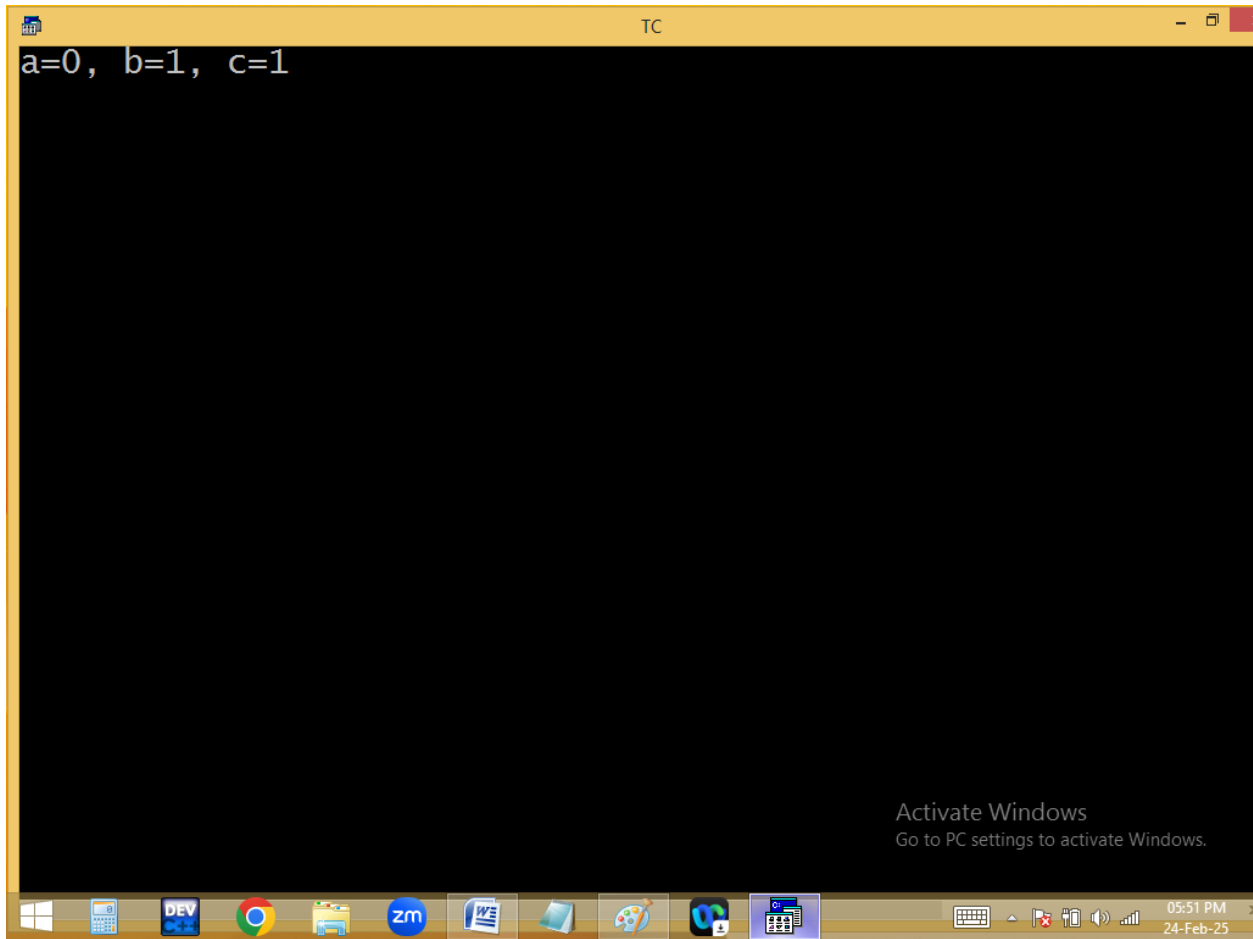

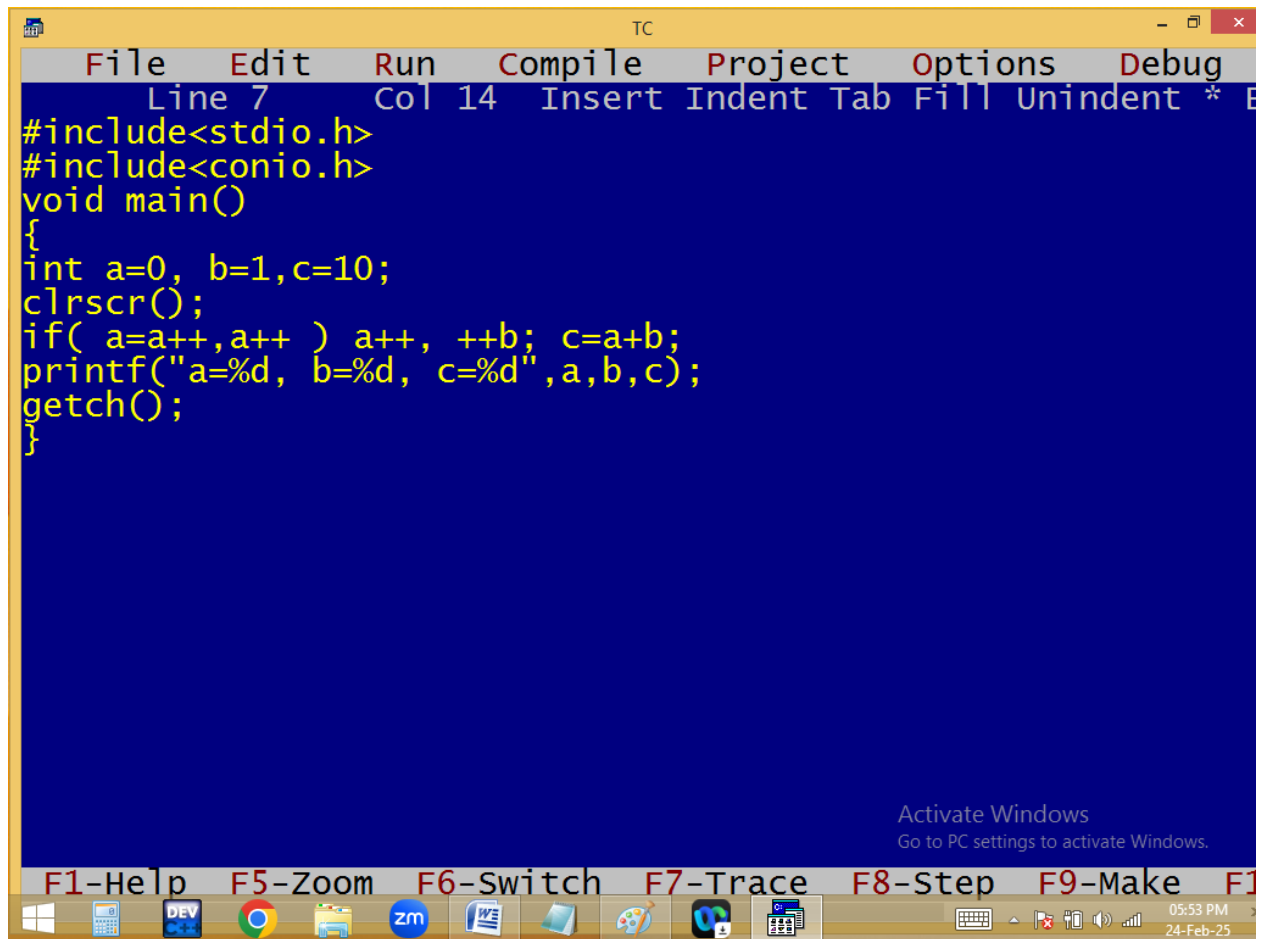

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates "Line 7 Col 14" and provides shortcuts: Insert, Indent, Tab, Fill, Unindent, and *. The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a=0, b=1,c=10;
clrscr();
if( a=a++,a++ ) a++, ++b; c=a+b;
printf("a=%d, b=%d, c=%d",a,b,c);
getch();
}
```

At the bottom of the IDE window, there is a row of function key shortcuts: F1-Help, F5-Zoom, F6-Switch, F7-Trace, F8-Step, F9-Make, and F10-Run. Below the IDE window is the Windows taskbar, which includes icons for the Start menu, Task View, File Explorer, Google Chrome, Zoom, Word, and other applications. The system tray on the right shows the time as 05:53 PM and the date as 24-Feb-25. An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.



TC




a=1, b=1, c=2

Activate Windows
Go to PC settings to activate Windows.



05:54 PM
24-Feb-25

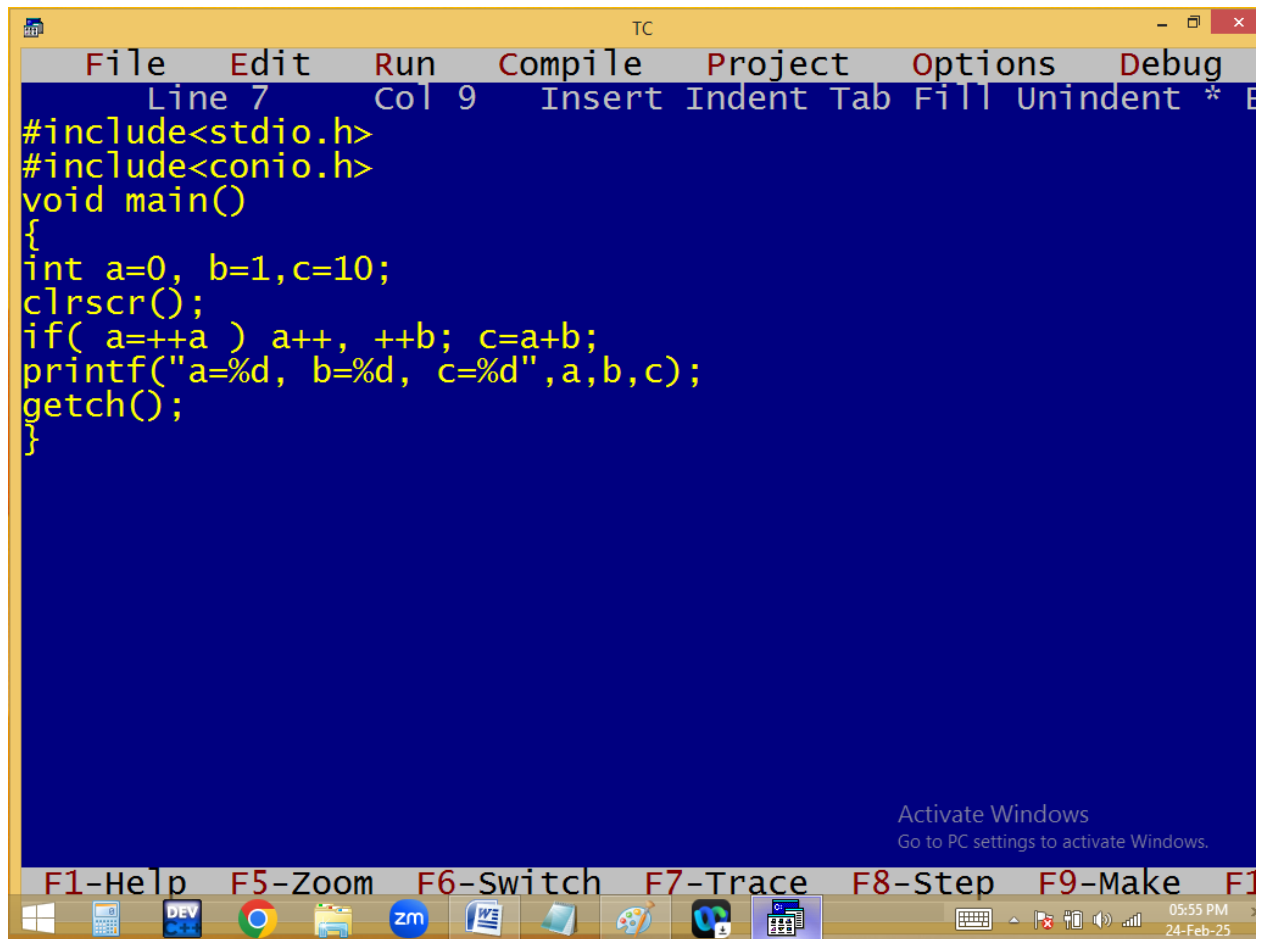

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates "Line 7", "Col 9", and "Insert Indent Tab Fill Unindent *". The code editor contains the following C program:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a=0, b=1,c=10;
clrscr();
if( a==a ) a++, ++b; c=a+b;
printf("a=%d, b=%d, c=%d",a,b,c);
getch();
}
```

At the bottom of the IDE window, there is a row of function key shortcuts: F1-Help, F5-Zoom, F6-Switch, F7-Trace, F8-Step, F9-Make, and F10-Run. Below the IDE window is the Windows taskbar, which includes icons for the Start menu, Task View, File Explorer, Google Chrome, Zoom, Word, and several other applications. The system tray on the right shows the time as 05:55 PM and the date as 24-Feb-25. An "Activate Windows" watermark is visible in the bottom right corner of the desktop area.




TC



a=2, b=2, c=4

Activate Windows
Go to PC settings to activate Windows.



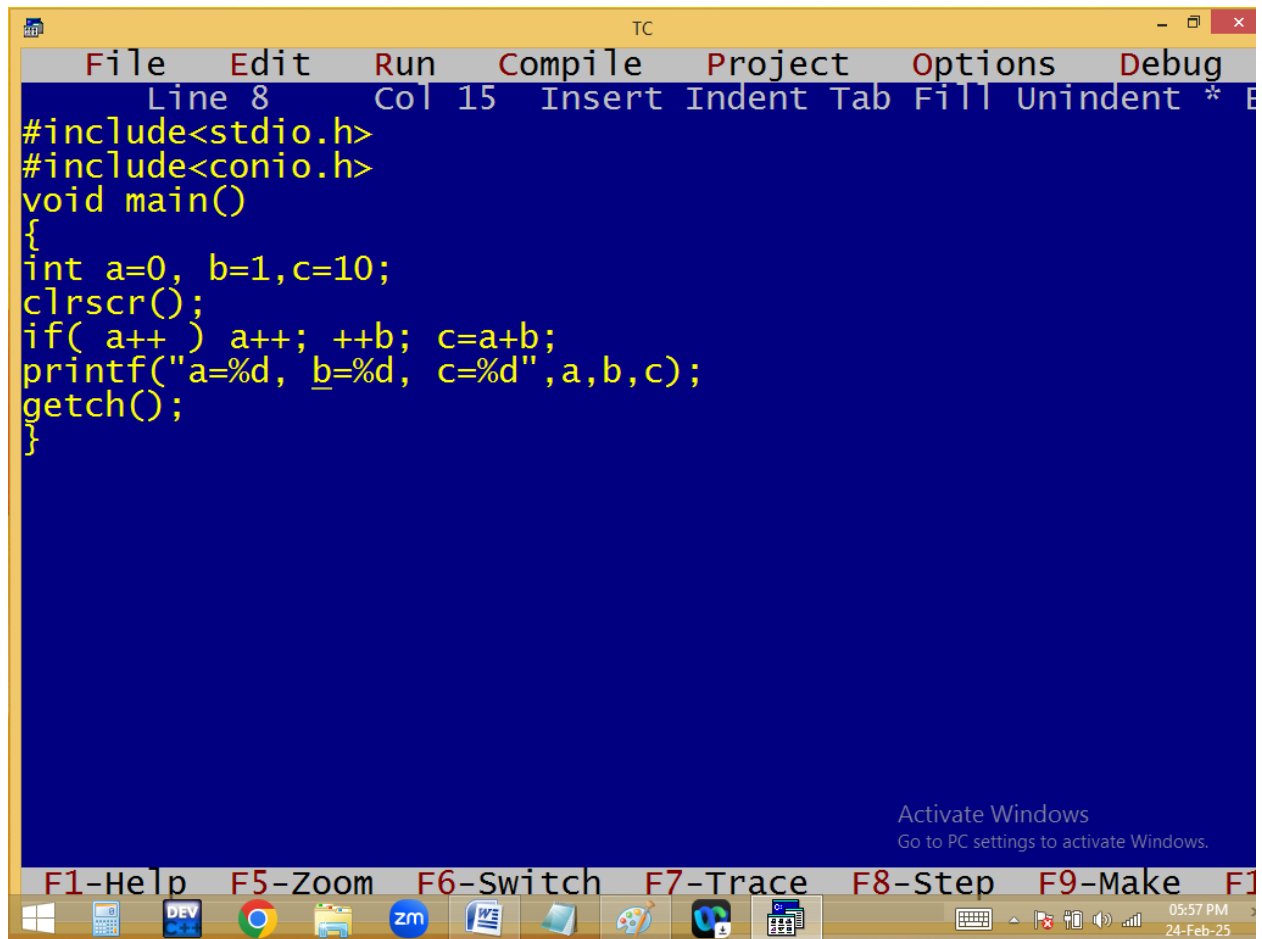

TC

File Edit Run Compile Project Options Debug

Line 8 Col 15 Insert Indent Tab Fill Unindent * B

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a=0, b=1,c=10;
clrscr();
if( a++ ) a++; ++b; c=a+b;
printf("a=%d, b=%d, c=%d",a,b,c);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

05:57 PM
24-Feb-25



TC




a=1, b=2, c=3

Activate Windows
Go to PC settings to activate Windows.



05:59 PM
24-Feb-25

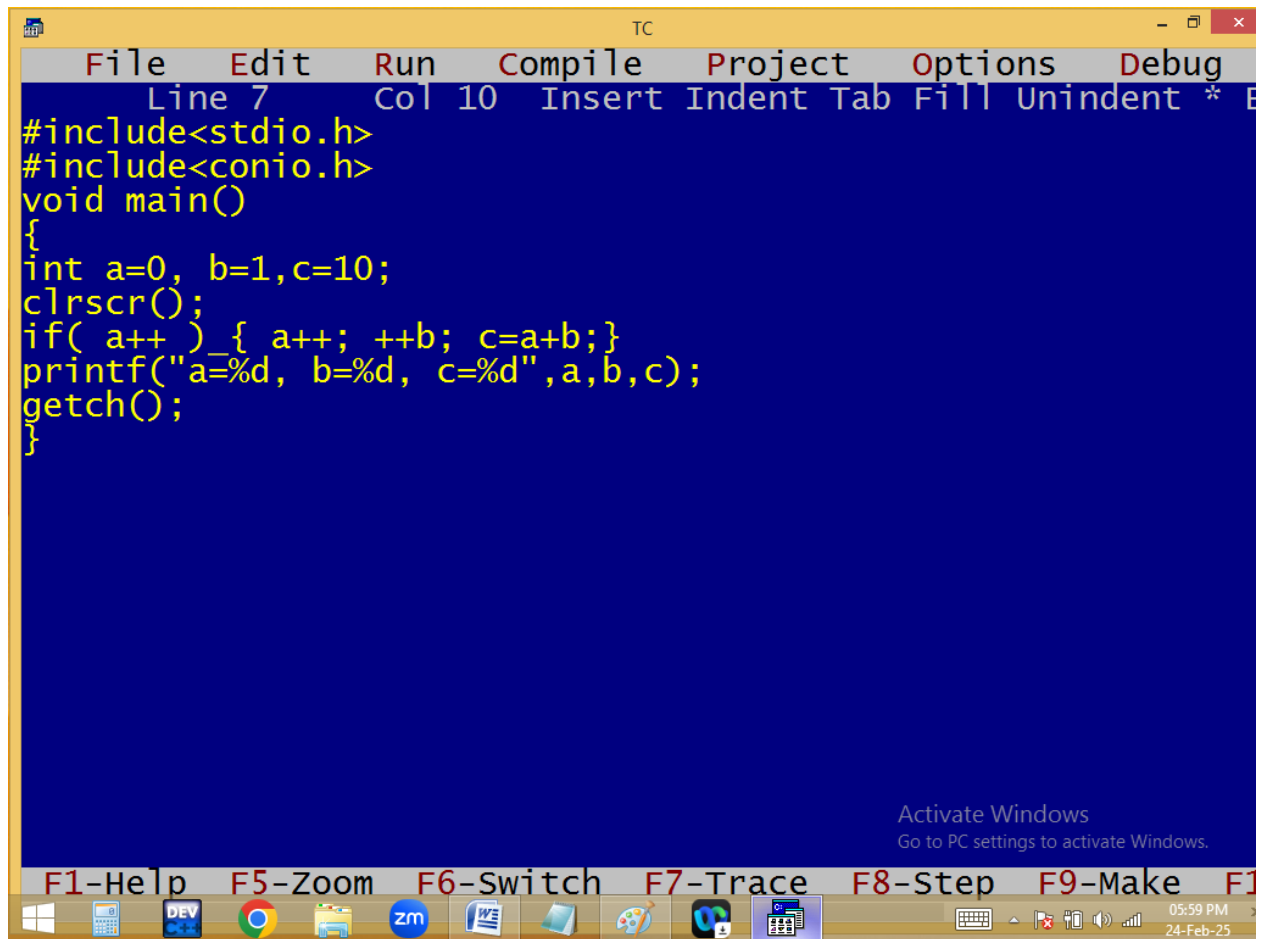

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates "Line 7", "Col 10", and lists editing actions: Insert, Indent, Tab, Fill, Unindent, and *. The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a=0, b=1,c=10;
clrscr();
if( a++ )_ { a++; ++b; c=a+b;}
printf("a=%d, b=%d, c=%d",a,b,c);
getch();
}
```

At the bottom of the IDE window, there is a text prompt: "Activate Windows. Go to PC settings to activate Windows." Below the IDE window is the Windows taskbar, which includes icons for the Start menu, Task View, File Explorer, Google Chrome, Zoom, Word, and other applications. The system tray on the right shows the time as 05:59 PM and the date as 24-Feb-25. A secondary status bar at the very bottom of the taskbar lists keyboard shortcuts: F1-Help, F5-Zoom, F6-Switch, F7-Trace, F8-Step, F9-Make, and F10-Run.




TC

```
a=1, b=1, c=10_
```

Activate Windows
Go to PC settings to activate Windows.



05:59 PM
24-Feb-25

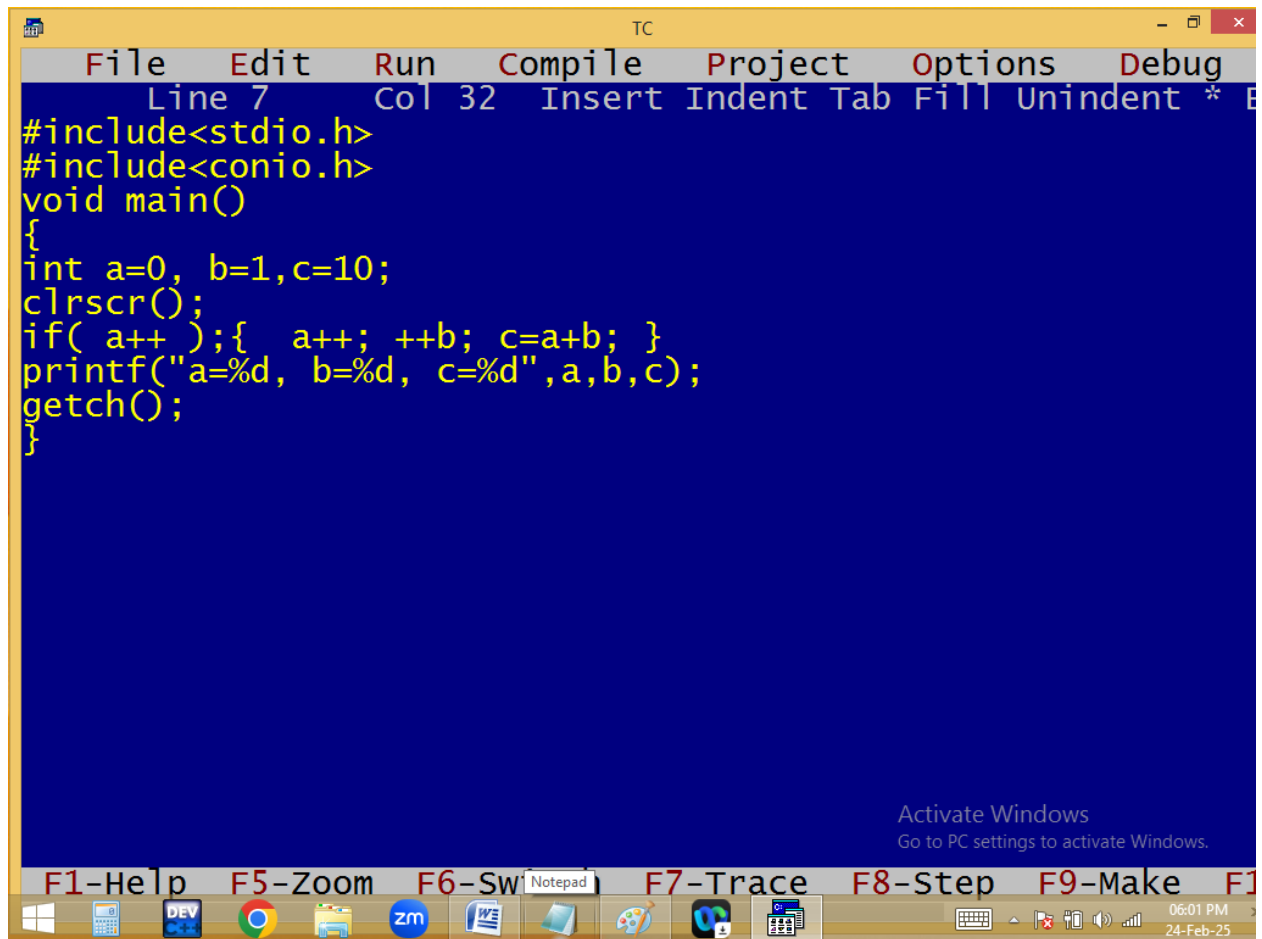

The image shows a screenshot of the Turbo C++ (TC) IDE. The main window has a blue background with yellow text. The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates 'Line 7' and 'Col 32'. The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a=0, b=1,c=10;
clrscr();
if( a++ );{ a++; ++b; c=a+b; }
printf("a=%d, b=%d, c=%d",a,b,c);
getch();
}
```

At the bottom of the IDE window, there is a text prompt: 'Activate Windows Go to PC settings to activate Windows.' Below the IDE window is the Windows taskbar, which includes icons for the Start menu, File Explorer, Notepad, and several other applications. The taskbar also displays the system clock as '06:01 PM' and the date '24-Feb-25'. Additionally, there are function key shortcuts displayed above the taskbar: F1-Help, F5-Zoom, F6-Sw, F7-Trace, F8-Step, F9-Make, and F10-Exit.



TC




a=2, b=2, c=4_

Activate Windows
Go to PC settings to activate Windows.



06:01 PM
24-Feb-25

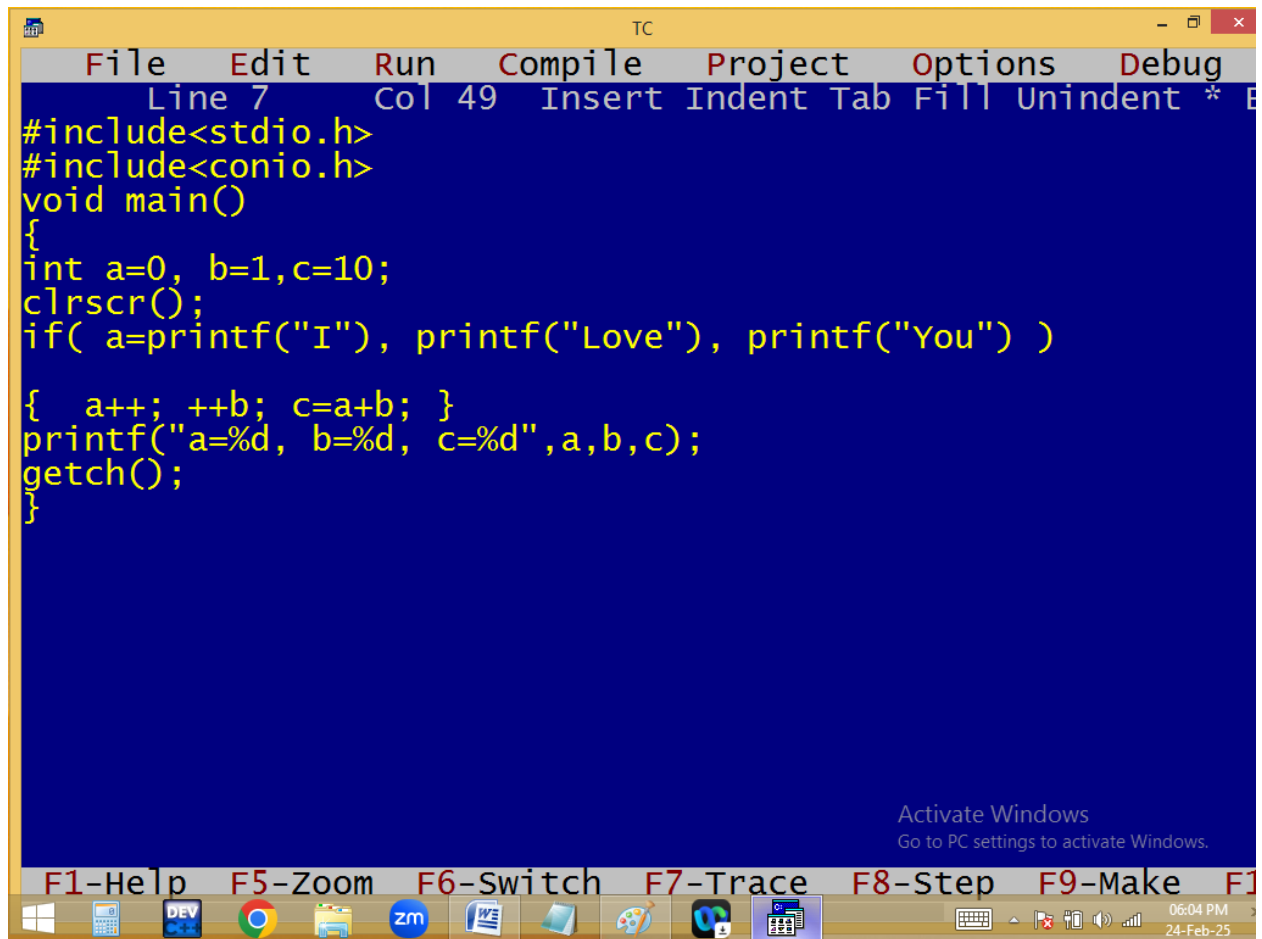


```
TC
File Edit Run Compile Project Options Debug
Line 7 Col 49 Insert Indent Tab Fill Unindent * B
#include<stdio.h>
#include<conio.h>
void main()
{
int a=0, b=1,c=10;
clrscr();
if( a=printf("I"), printf("Love"), printf("You") )
{ a++; ++b; c=a+b; }
printf("a=%d, b=%d, c=%d",a,b,c);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

06:04 PM
24-Feb-25

Output: I Love You a=2, b=2 ,c=4

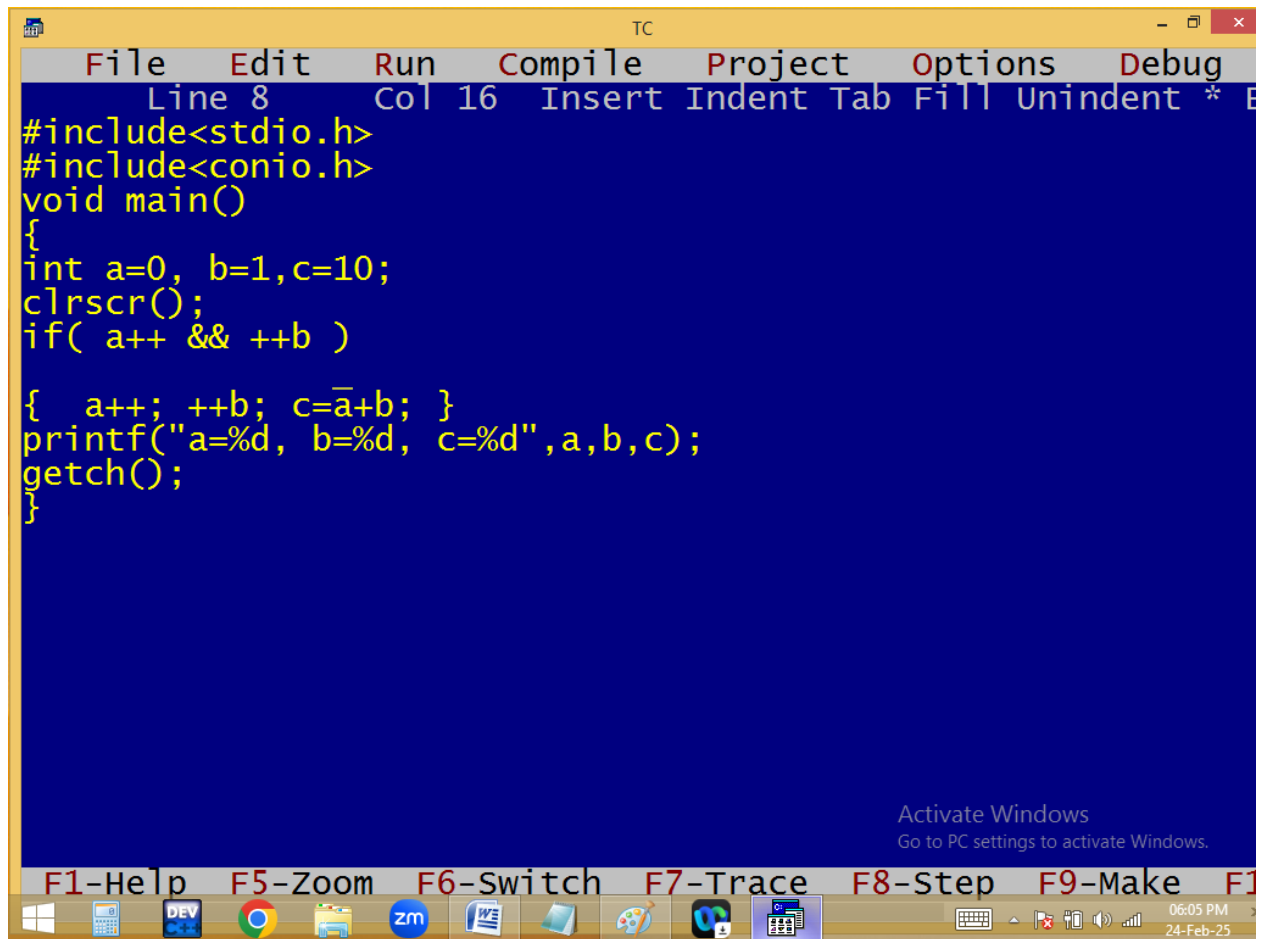

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates "Line 8 Col 16" and lists editing actions: Insert, Indent, Tab, Fill, Unindent, and *. The code is written in yellow text on a blue background. It includes `<stdio.h>` and `<conio.h>`, defines a `main` function, initializes variables `a=0`, `b=1`, and `c=10`, clears the screen with `clrscr()`, and enters a loop `if( a++ && ++b )`. Inside the loop, it increments `a` and `b`, updates `c` to `a+b`, prints the values of `a`, `b`, and `c` using `printf`, and waits for a key press with `getch()`. The Windows taskbar at the bottom shows the Start button, taskbar icons for Calculator, DEV C++, Google Chrome, File Explorer, Zoom, Word, and Paint, and a system tray with keyboard, volume, and network icons. The system clock shows 06:05 PM on 24-Feb-25. An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a=0, b=1,c=10;
clrscr();
if( a++ && ++b )

{ a++; ++b; c=a+b; }
printf("a=%d, b=%d, c=%d",a,b,c);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run



TC




a=1, b=1, c=10

Activate Windows
Go to PC settings to activate Windows.



06:06 PM
24-Feb-25

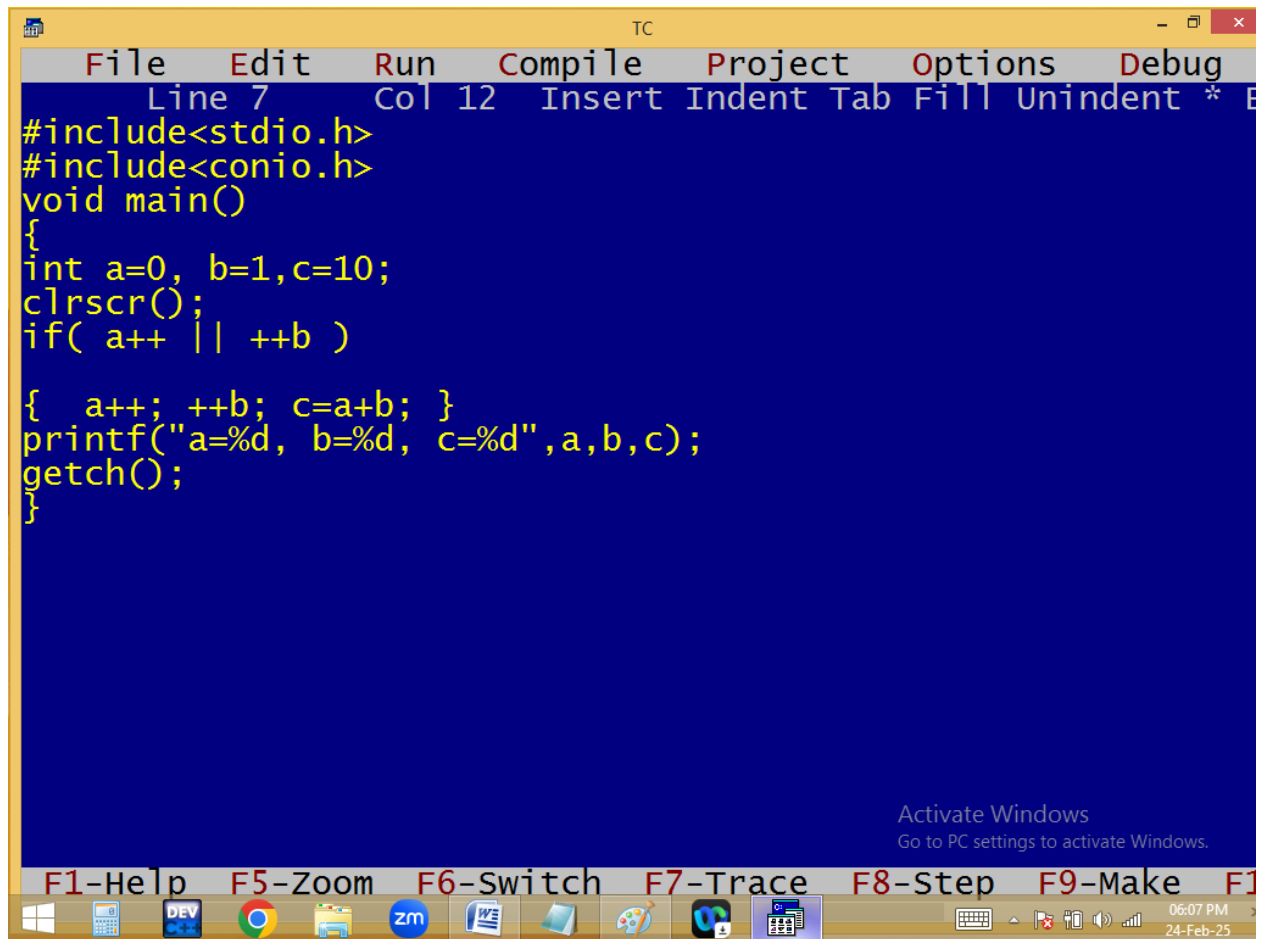

The screenshot shows the Turbo C++ (TC) IDE interface. The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates 'Line 7 Col 12' and lists editing actions: Insert, Indent, Tab, Fill, Unindent, and a comment symbol. The code editor contains the following C program:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a=0, b=1,c=10;
clrscr();
if( a++ || ++b )

{ a++; ++b; c=a+b; }
printf("a=%d, b=%d, c=%d",a,b,c);
getch();
}
```

The program has a syntax error in the if-statement condition. The variable 'b' is incremented before being used in the logical OR operation. The Windows taskbar at the bottom shows various application icons, including a calculator, DEV C++, Google Chrome, File Explorer, Zoom, Word, and Paint. A keyboard icon is also present. The system clock in the bottom right corner shows the time as 06:07 PM on 24-Feb-25. An 'Activate Windows' watermark is visible in the bottom right corner of the IDE window.



TC



a=2, b=3, c=5

Activate Windows
Go to PC settings to activate Windows.



06:07 PM
24-Feb-25