


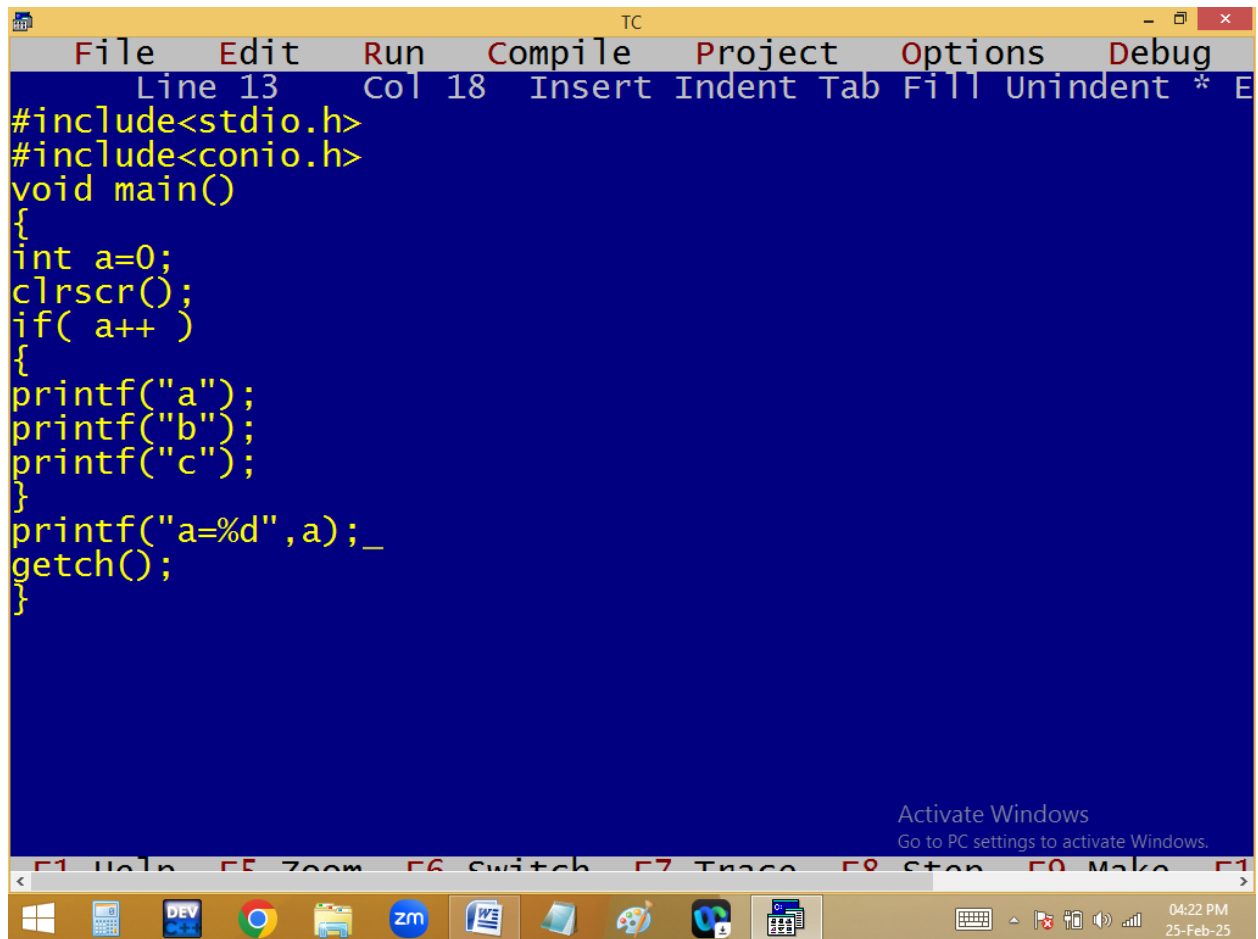



```
TC
File Edit Run Compile Project Options Debug
Line 13 Col 18 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a=0;
clrscr();
if( a++ )
{
printf("a");
printf("b");
printf("c");
}
printf("a=%d",a);_
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

04:22 PM
25-Feb-25

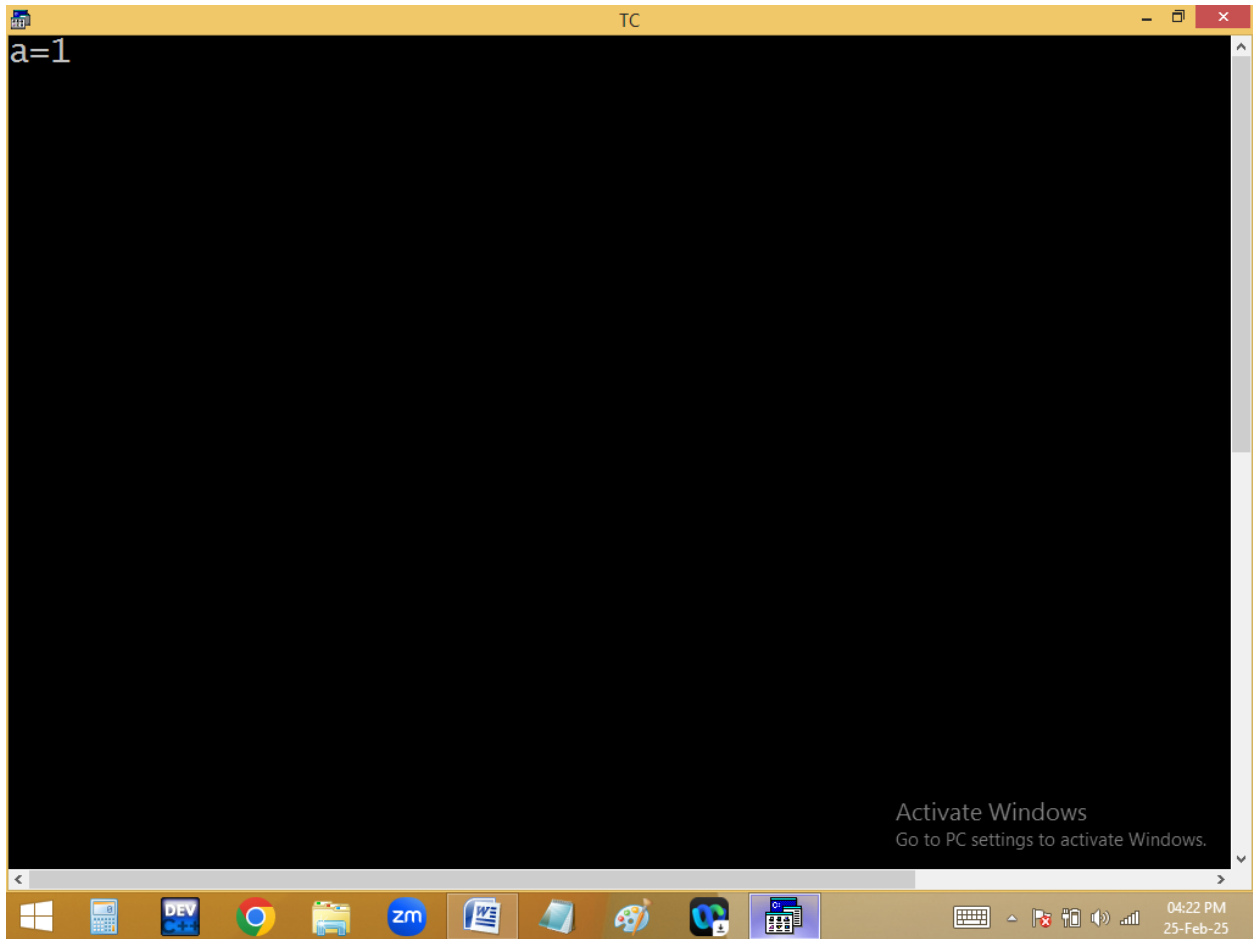


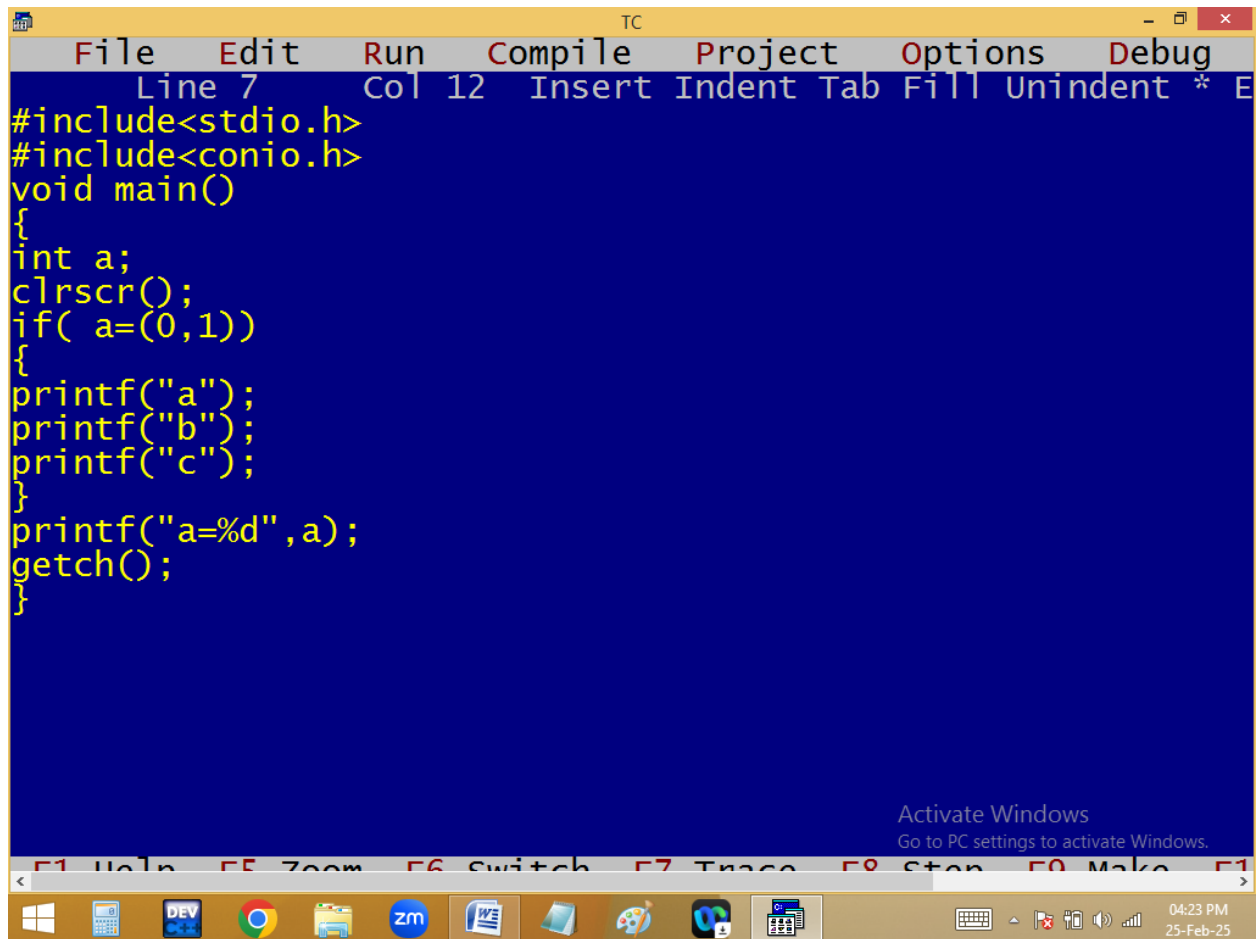


The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 7" and "Col 12". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int a;
clrscr();
if( a=(0,1))
{
printf("a");
printf("b");
printf("c");
}
printf("a=%d",a);
getch();
}
```

At the bottom of the window, there is a taskbar with various application icons (Windows, calculator, DEV, Chrome, File Explorer, Zoom, Word, etc.). A system tray on the right shows the time as "04:23 PM" and the date as "25-Feb-25". An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.

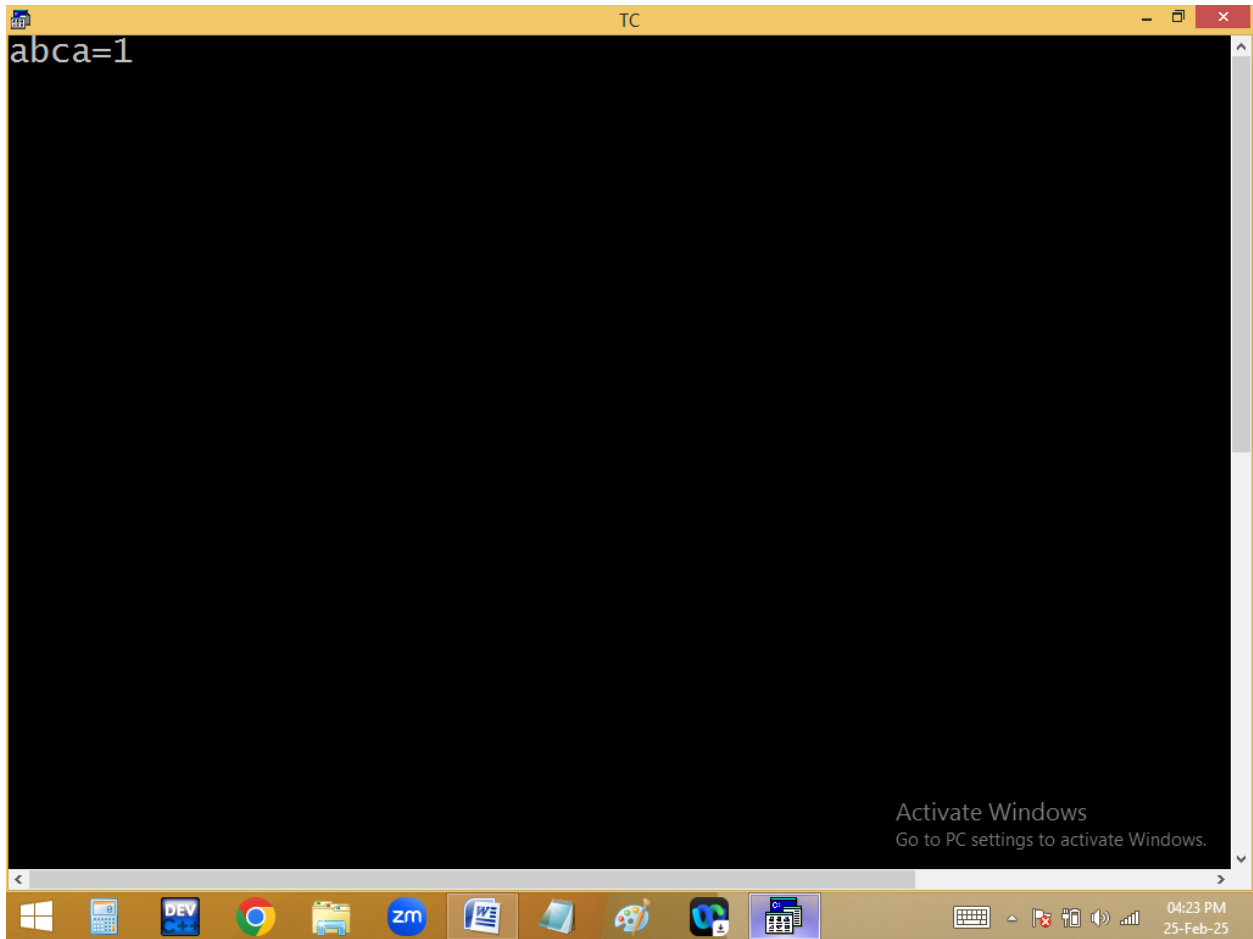

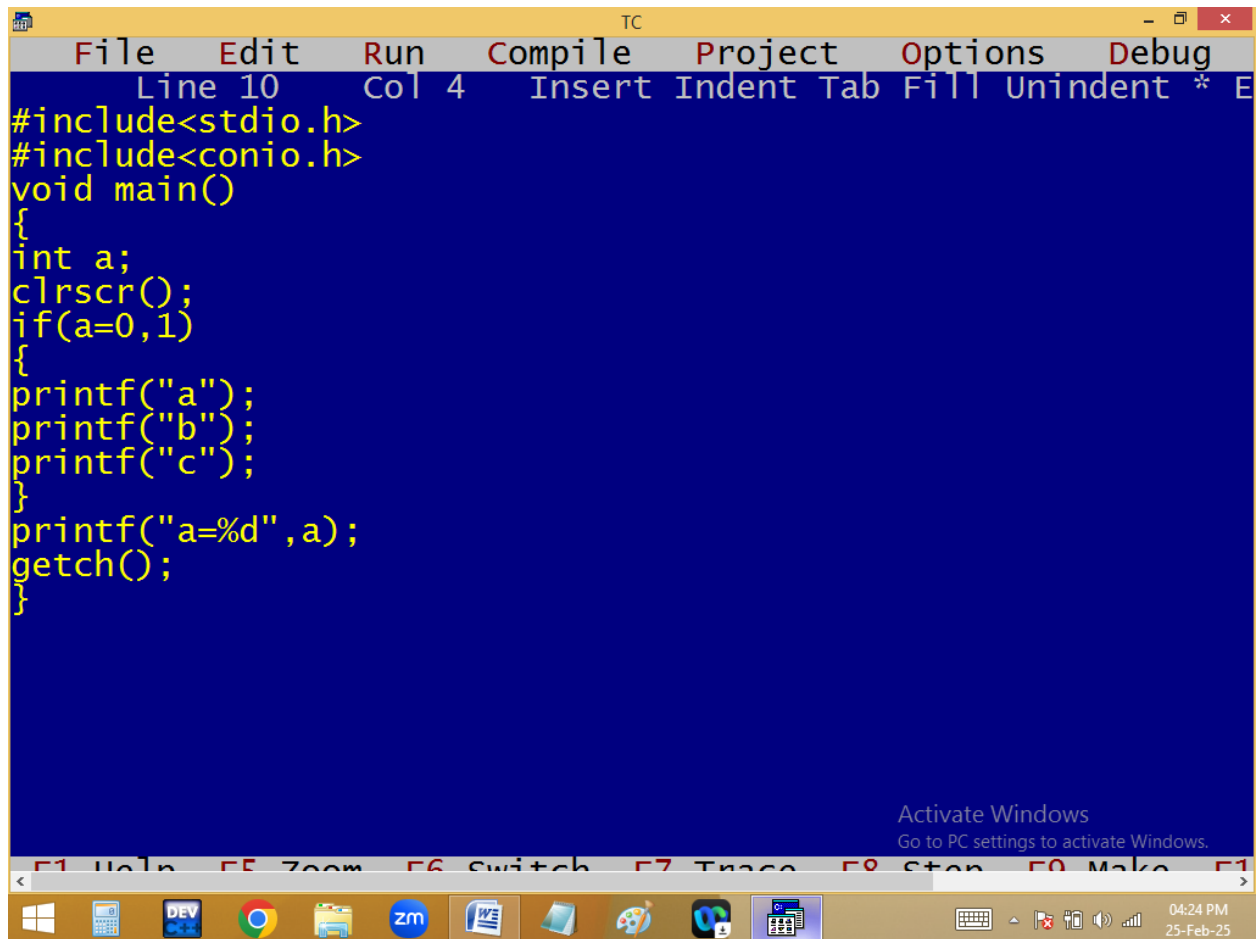


```
TC
File Edit Run Compile Project Options Debug
Line 10 Col 4 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a;
clrscr();
if(a=0,1)
{
printf("a");
printf("b");
printf("c");
}
printf("a=%d",a);
getch();
}
```


Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

04:24 PM
25-Feb-25

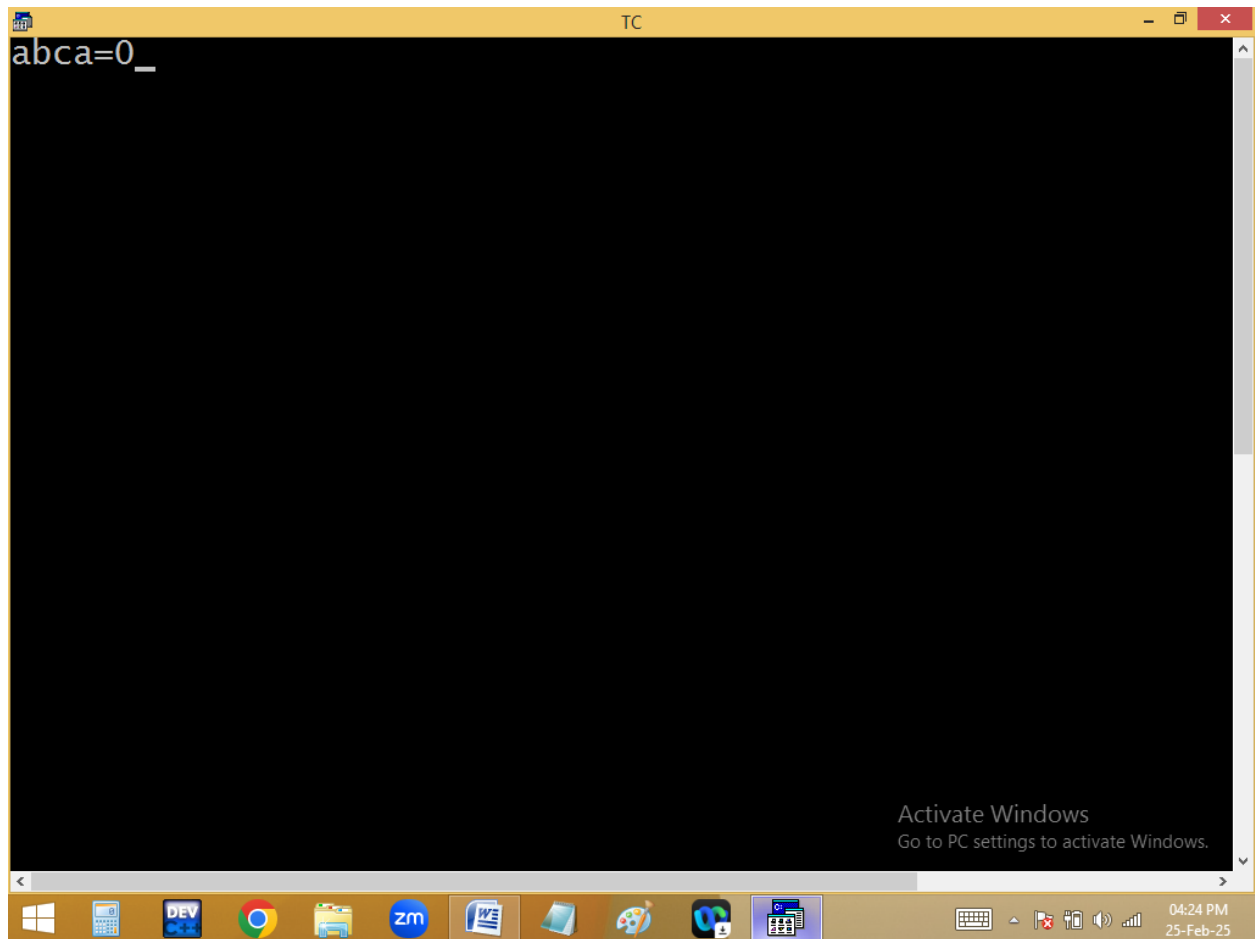

if(a=0, 1)

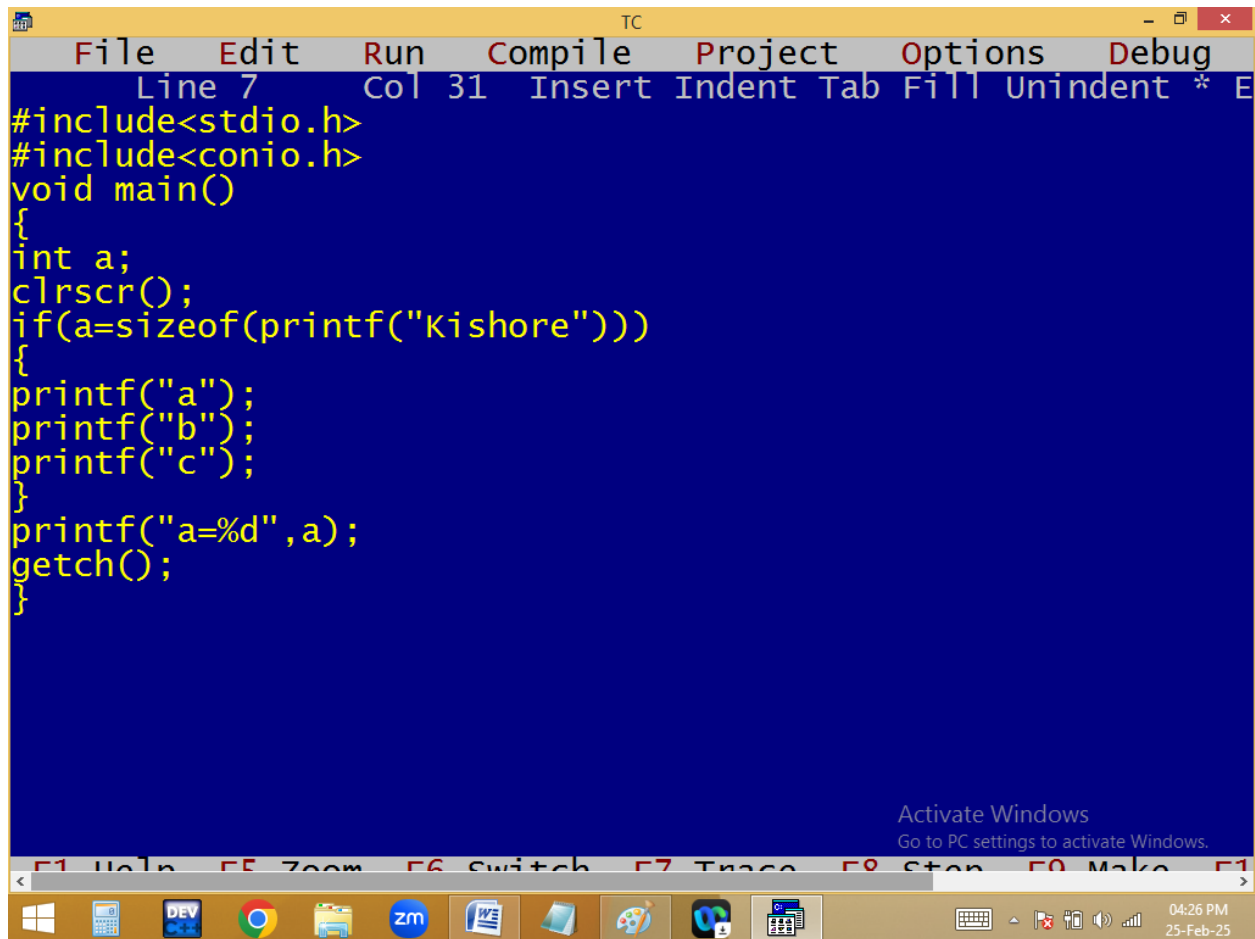


```
TC
File Edit Run Compile Project Options Debug
Line 7 Col 31 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int a;
clrscr();
if(a=sizeof(printf("Kishore")))
{
printf("a");
printf("b");
printf("c");
}
printf("a=%d",a);
getch();
}
```


Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10


04:26 PM
25-Feb-25

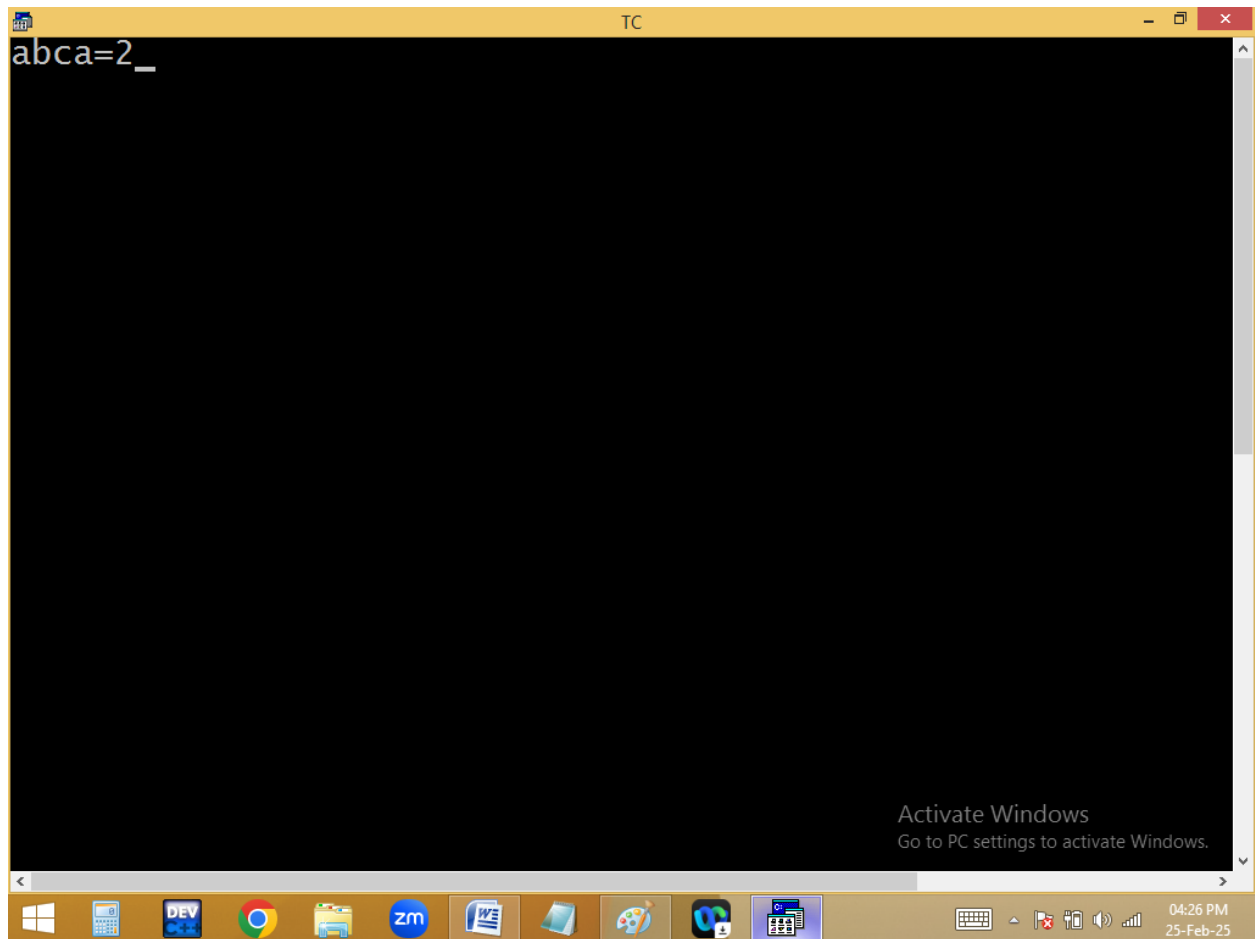

if(a = sizeof(printf("Kishore")))

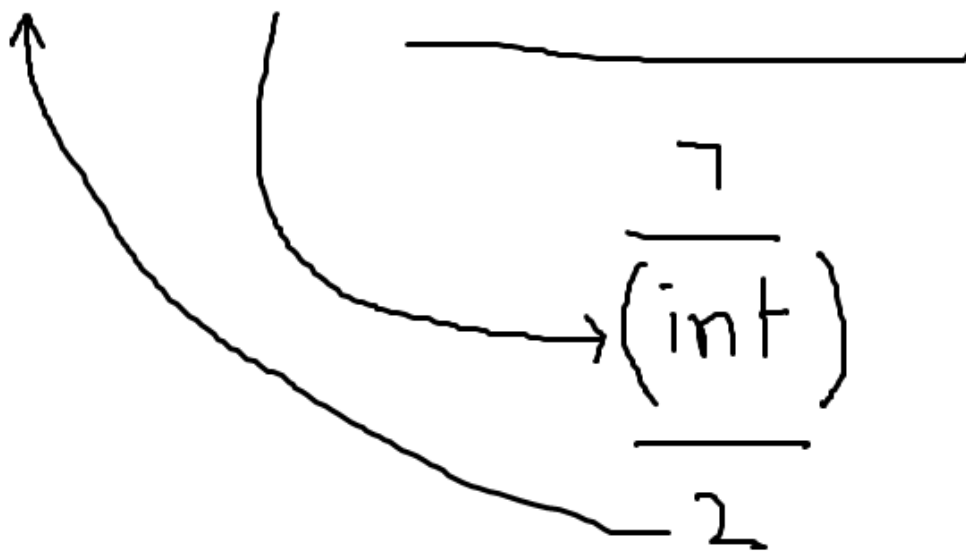


Printing Kishore without using semicolon?

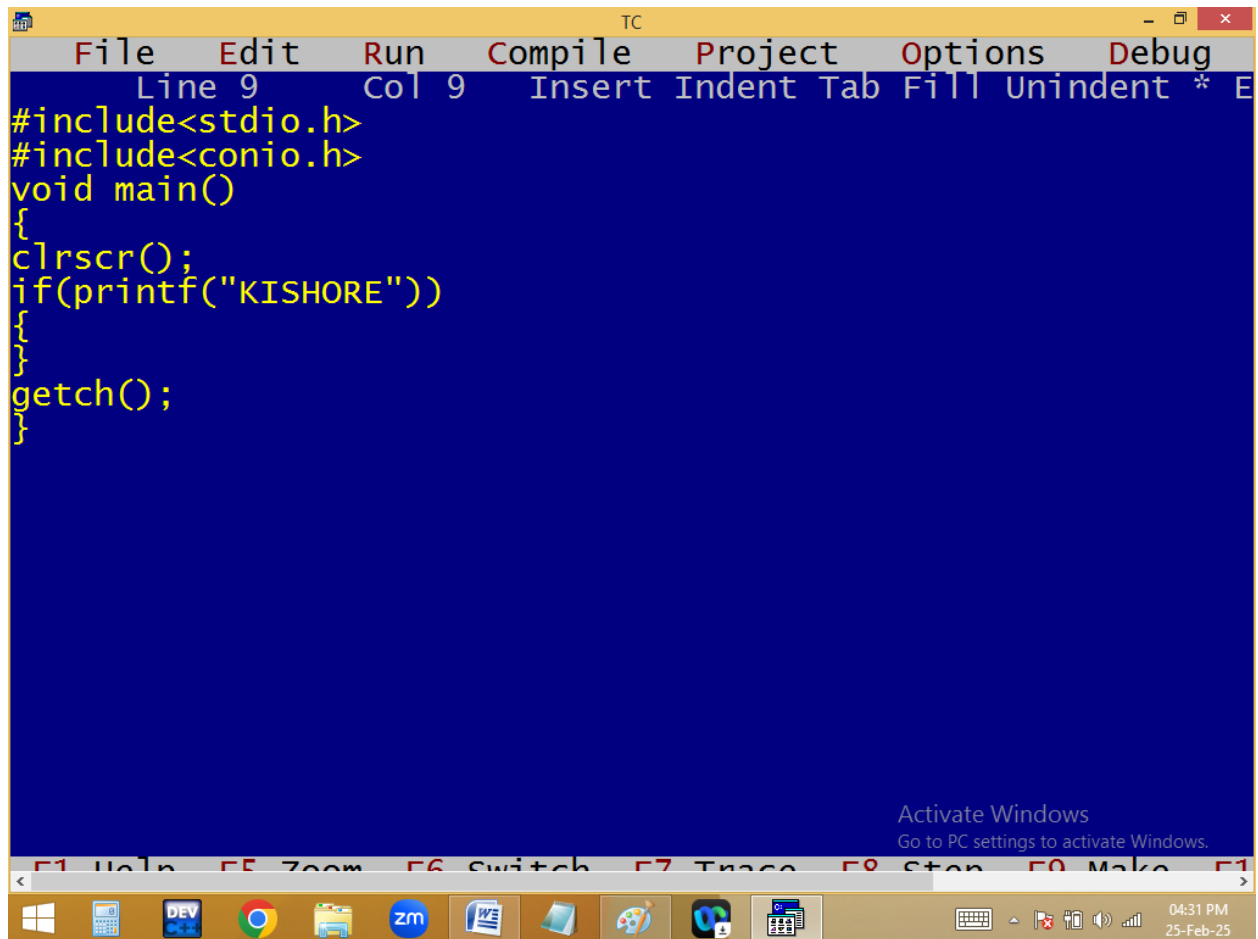


The image shows a screenshot of the Turbo C++ (TC) Integrated Development Environment (IDE). The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 9", "Col 9", and "Insert Indent Tab Fill Unindent * E". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if(printf("KISHORE"))
{
}
getch();
}
```

At the bottom of the IDE window, there is a message: "Activate Windows Go to PC settings to activate Windows." Below the IDE window is the Windows taskbar, which includes icons for Windows, Task View, DEV, Google Chrome, File Explorer, Zoom, Word, and several other applications. The system tray on the right shows the date and time: "04:31 PM 25-Feb-25".

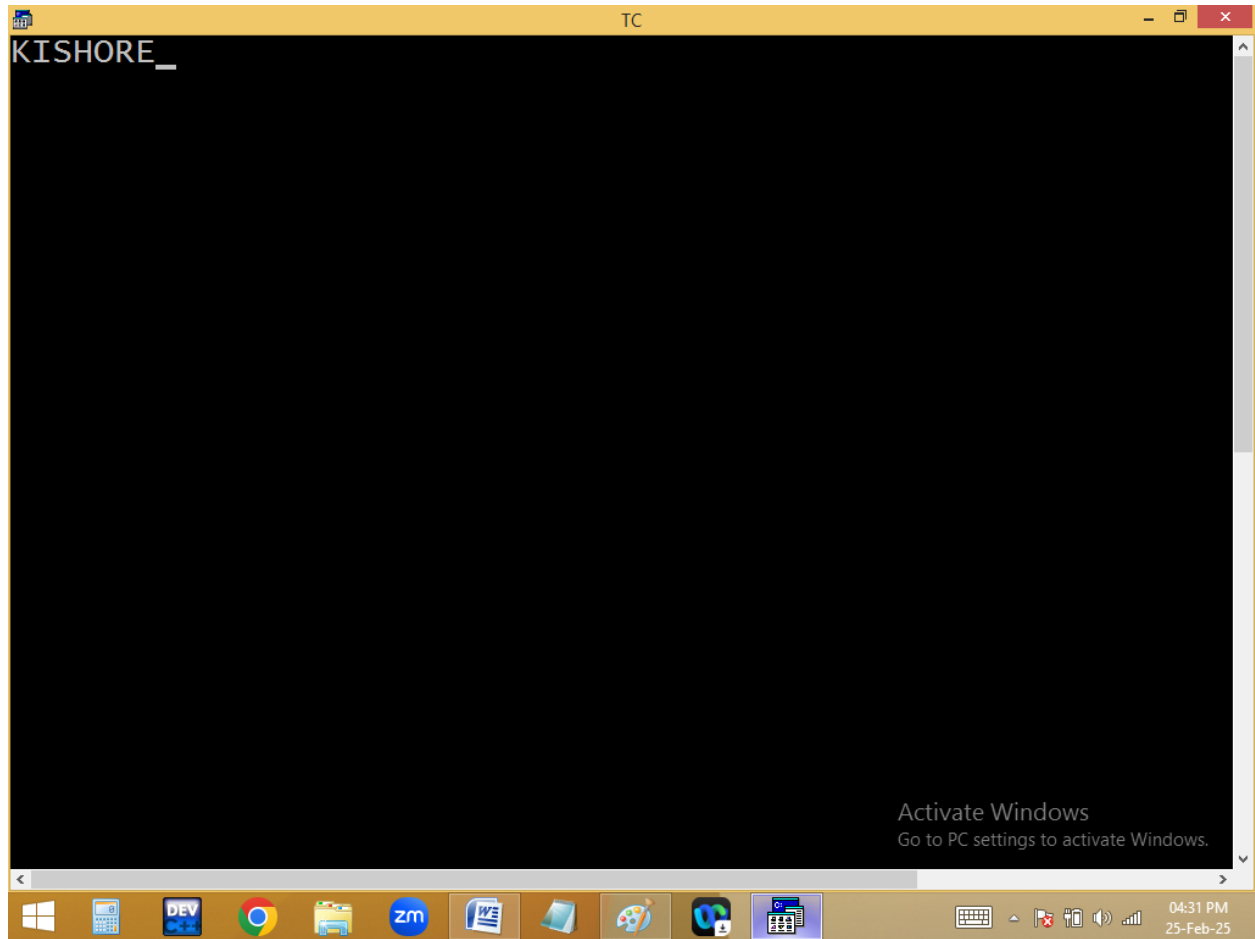

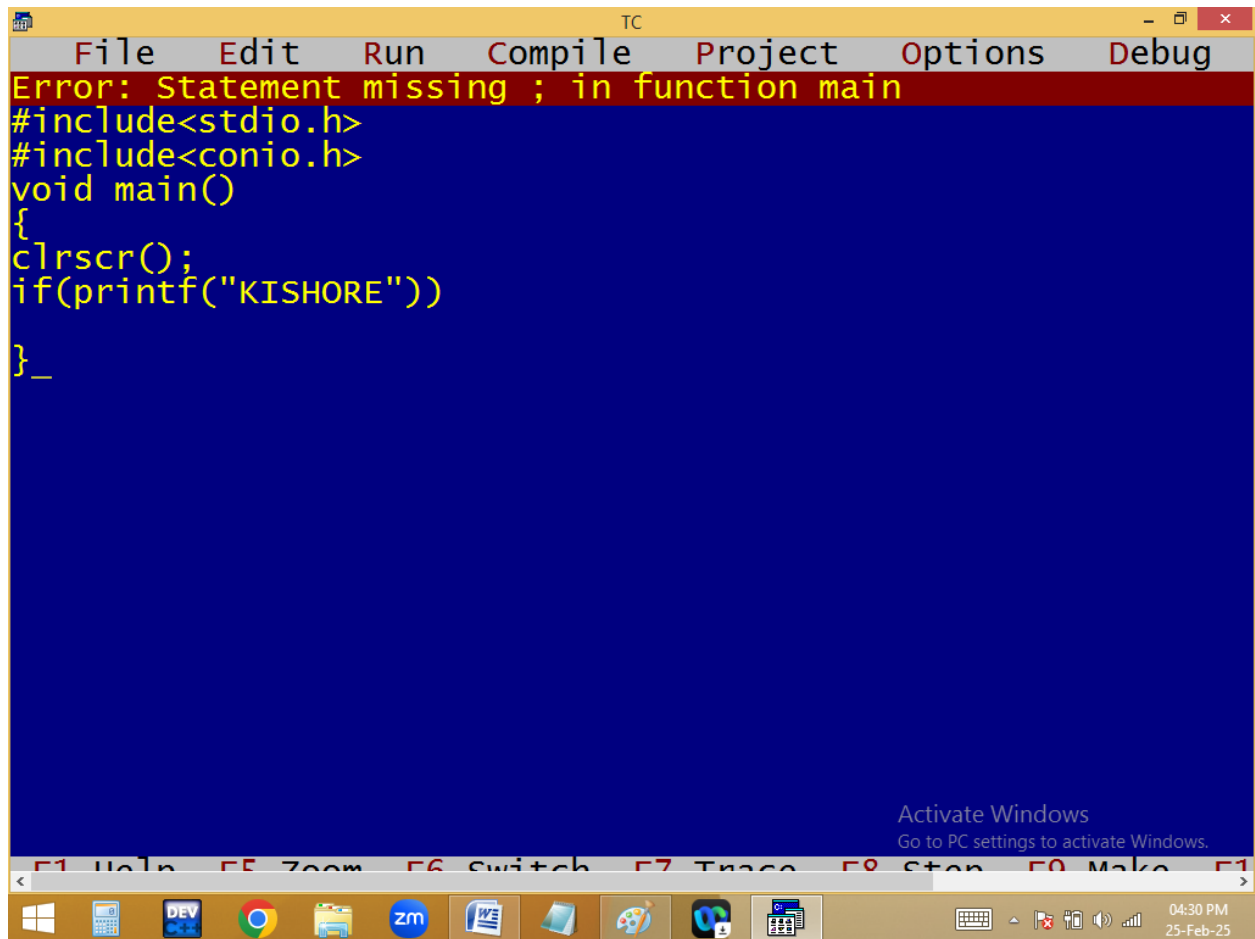


The image shows a screenshot of the Turbo C++ (TC) IDE. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error message banner at the top states: "Error: Statement missing ; in function main". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if(printf("KISHORE"))
}_
```


At the bottom of the IDE window, there is a status bar with function key shortcuts: F1 Help, F5 Zoom, F6 Switch, F7 Trace, F8 Stop, F9 Make, and F10. Below the IDE window is the Windows taskbar, which includes icons for Windows, Calculator, DEV C++, Google Chrome, File Explorer, Zoom, Word, and other applications. The system tray on the right shows the time as 04:30 PM and the date as 25-Feb-25. An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.


Finding absolute value of given no [always +Ve]?

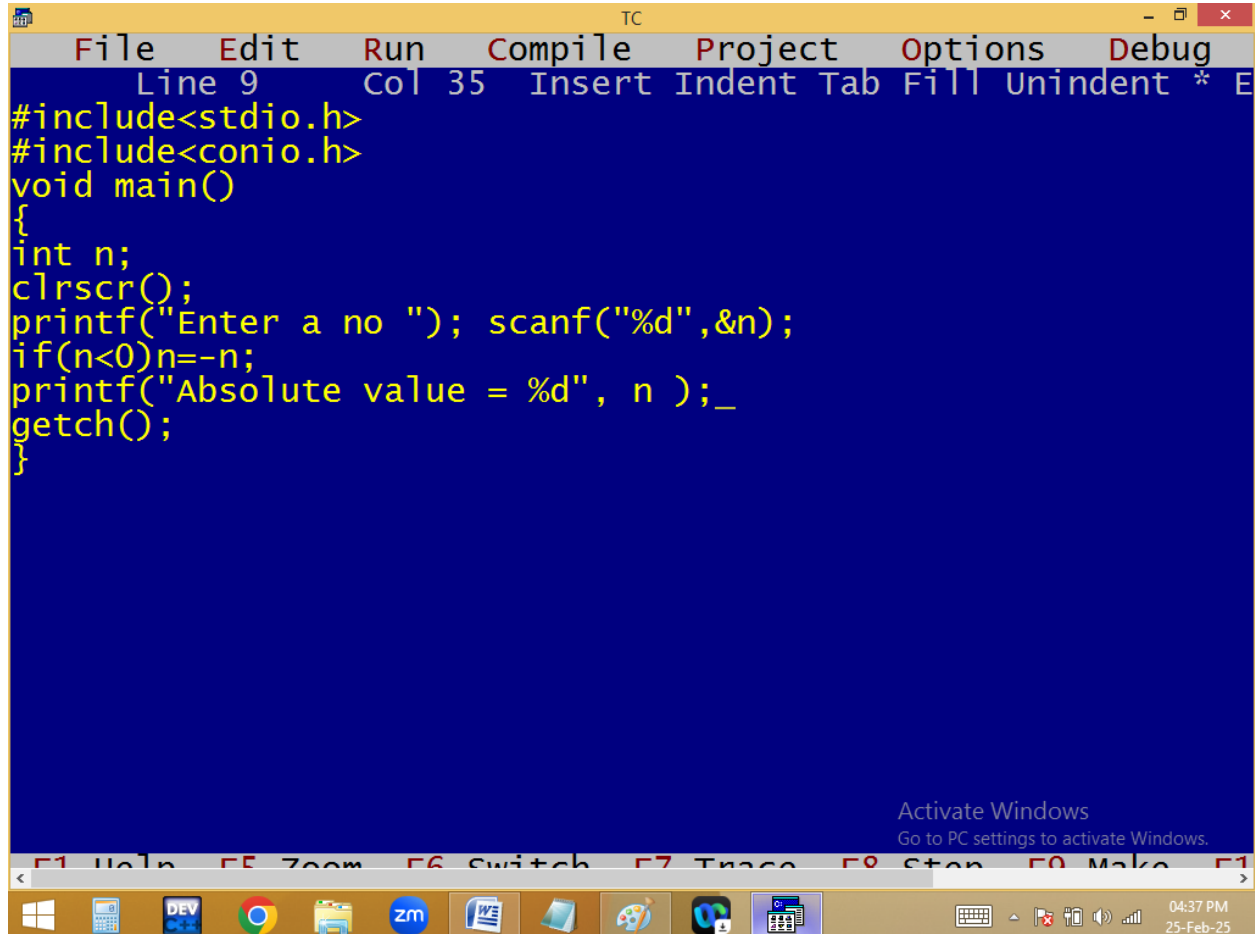


The screenshot shows a Turbo C++ (TC) IDE window. The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates 'Line 9 Col 35' and lists keyboard shortcuts: Insert, Indent, Tab, Fill, Unindent, and *. The code is written in yellow text on a dark blue background. It includes headers for stdio.h and conio.h, defines a main function, declares an integer n, clears the screen, prompts the user for a number, reads it with scanf, checks if it's negative and negates it, prints the absolute value, and waits for a key press with getch(). The Windows taskbar at the bottom shows various application icons and the system clock indicating 04:37 PM on 25-Feb-25.

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int n;
    clrscr();
    printf("Enter a no "); scanf("%d",&n);
    if(n<0)n=-n;
    printf("Absolute value = %d", n );_
    getch();
}
```

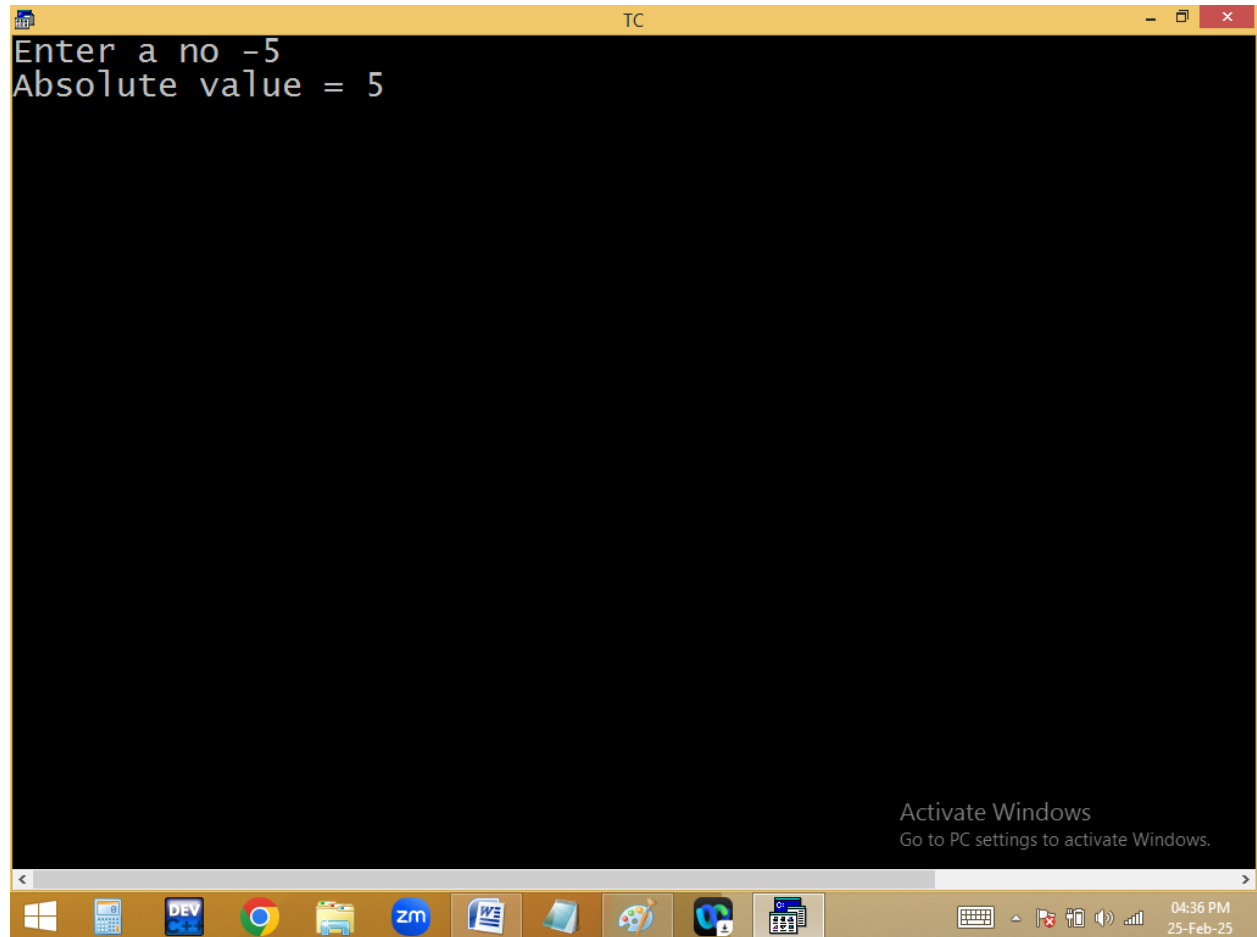

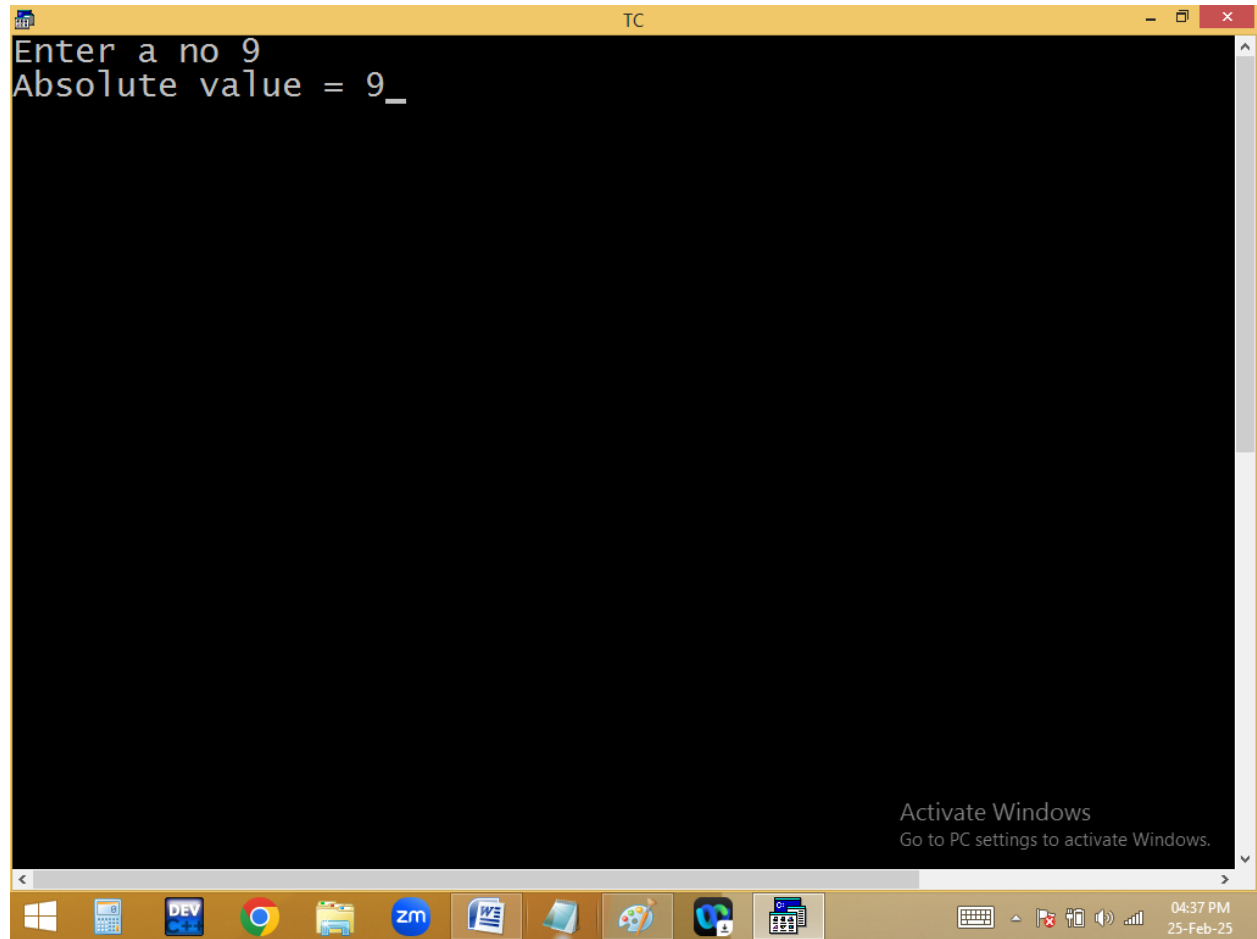


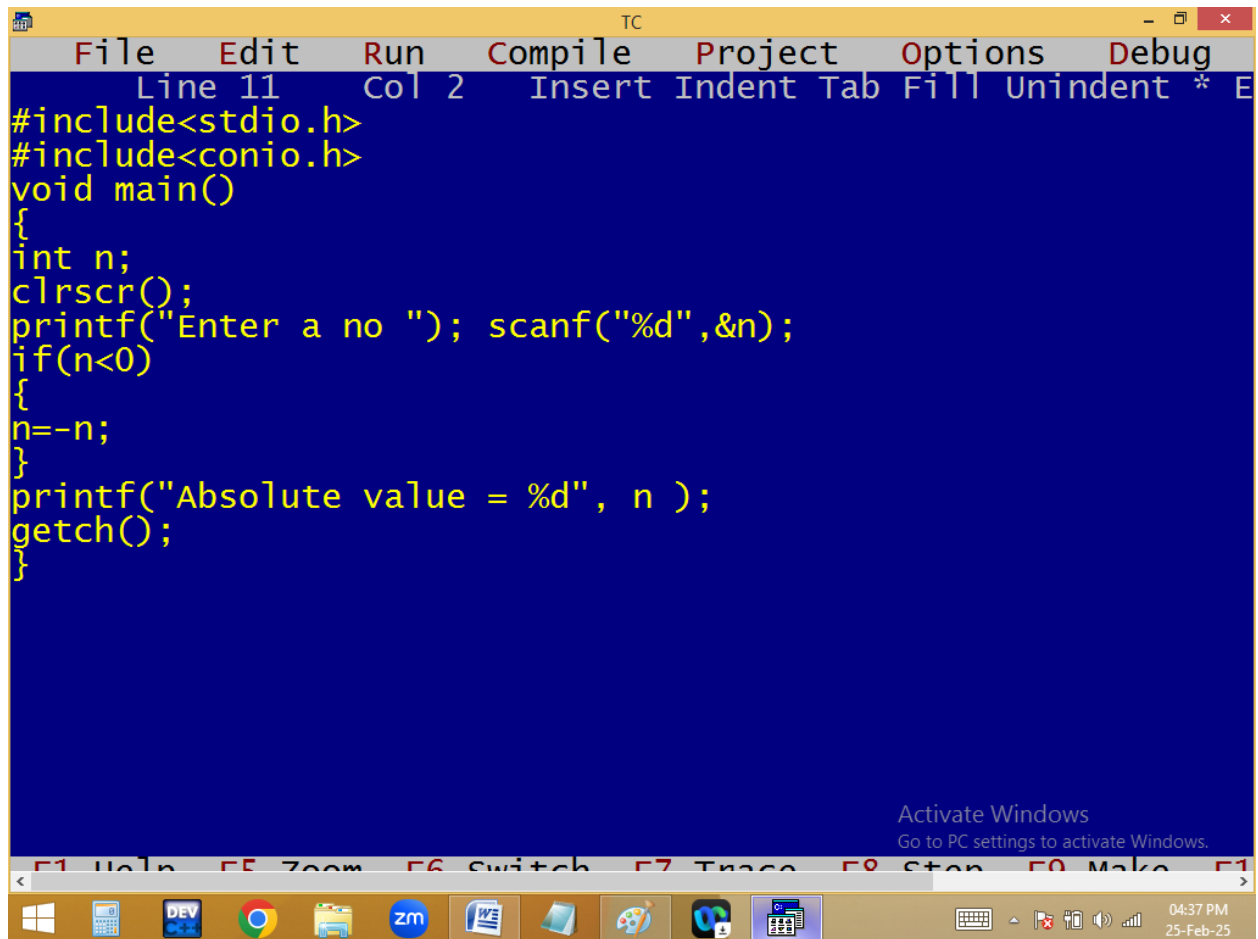

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar displays "Line 11", "Col 2", and a list of keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", "*", and "E". The main editing area has a dark blue background with yellow text. The code is as follows:


```
#include<stdio.h>
#include<conio.h>
void main()
{
int n;
clrscr();
printf("Enter a no "); scanf("%d",&n);
if(n<0)
{
n=-n;
}
printf("Absolute value = %d", n );
getch();
}
```

At the bottom of the window, there is a taskbar with various application icons including Windows, a calculator, a code editor, Google Chrome, a file explorer, a Zoom icon, a Word document, a folder, a paint application, a game controller, and a calculator. On the right side of the taskbar, the system clock shows "04:37 PM" and the date "25-Feb-25". An "Activate Windows" watermark is visible in the bottom right corner of the IDE window, with the text "Go to PC settings to activate Windows."

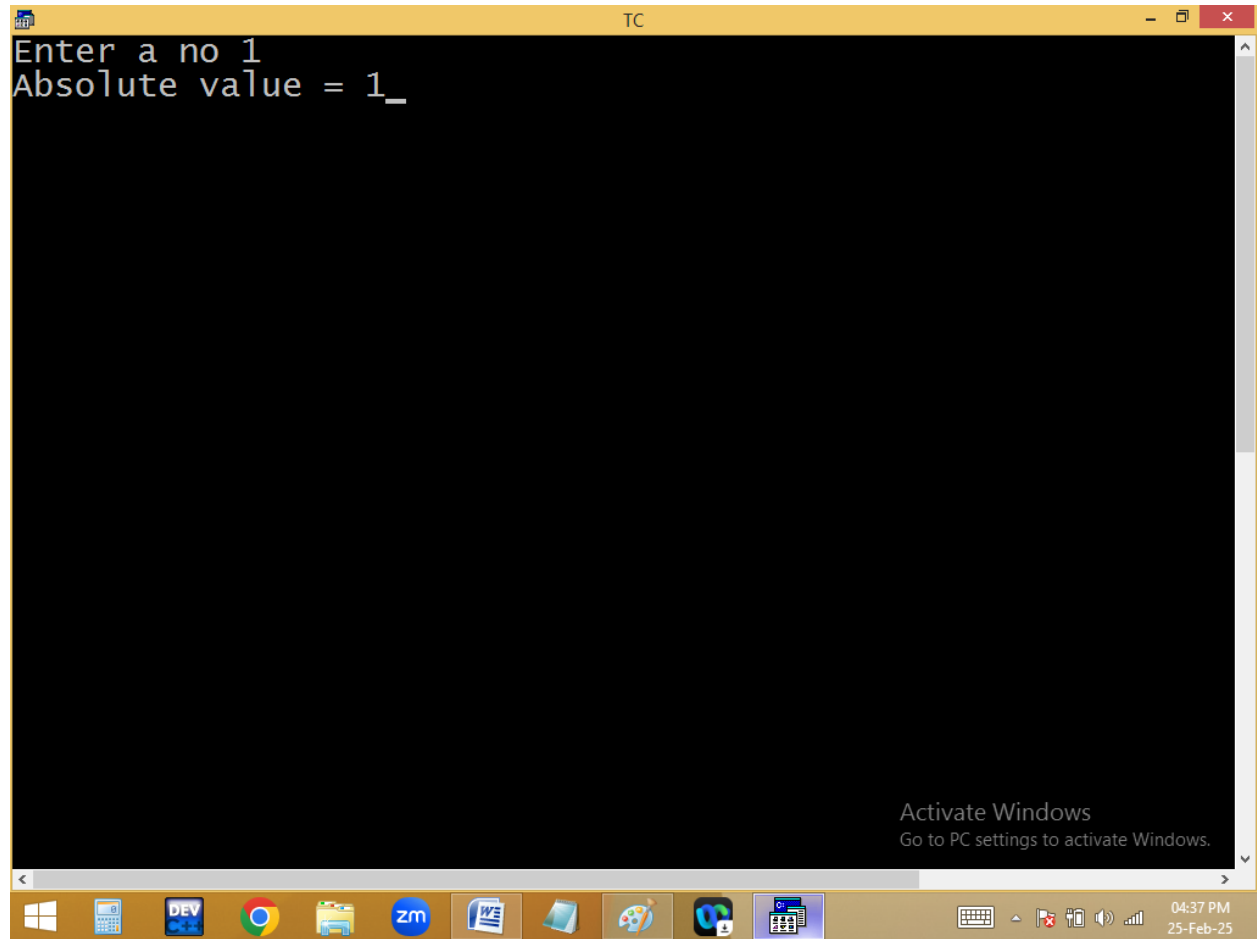


```
TC
Enter a no -2
Absolute value = 2
```

Activate Windows
Go to PC settings to activate Windows.

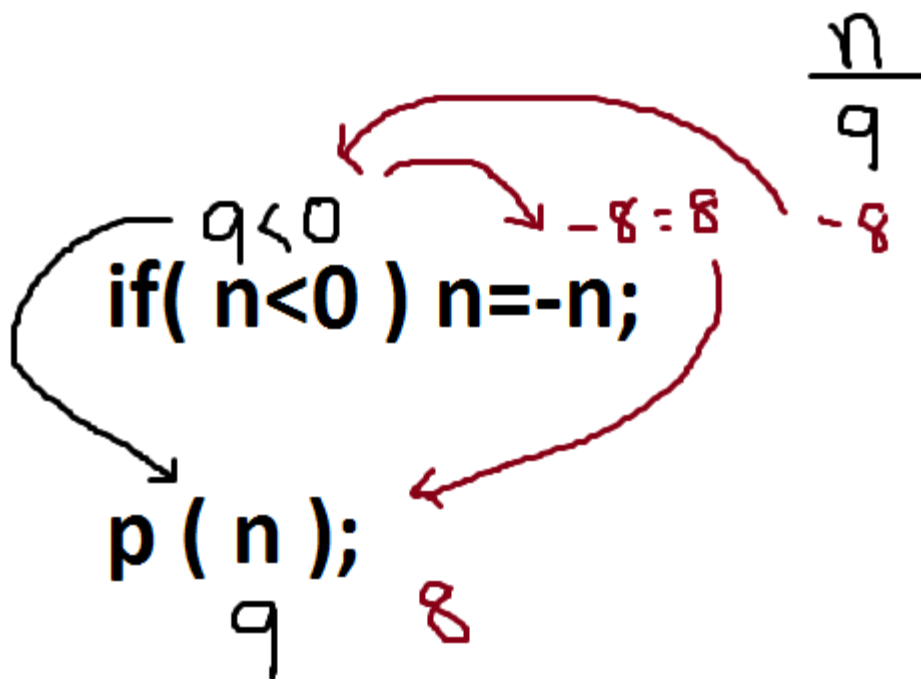


Using abs():

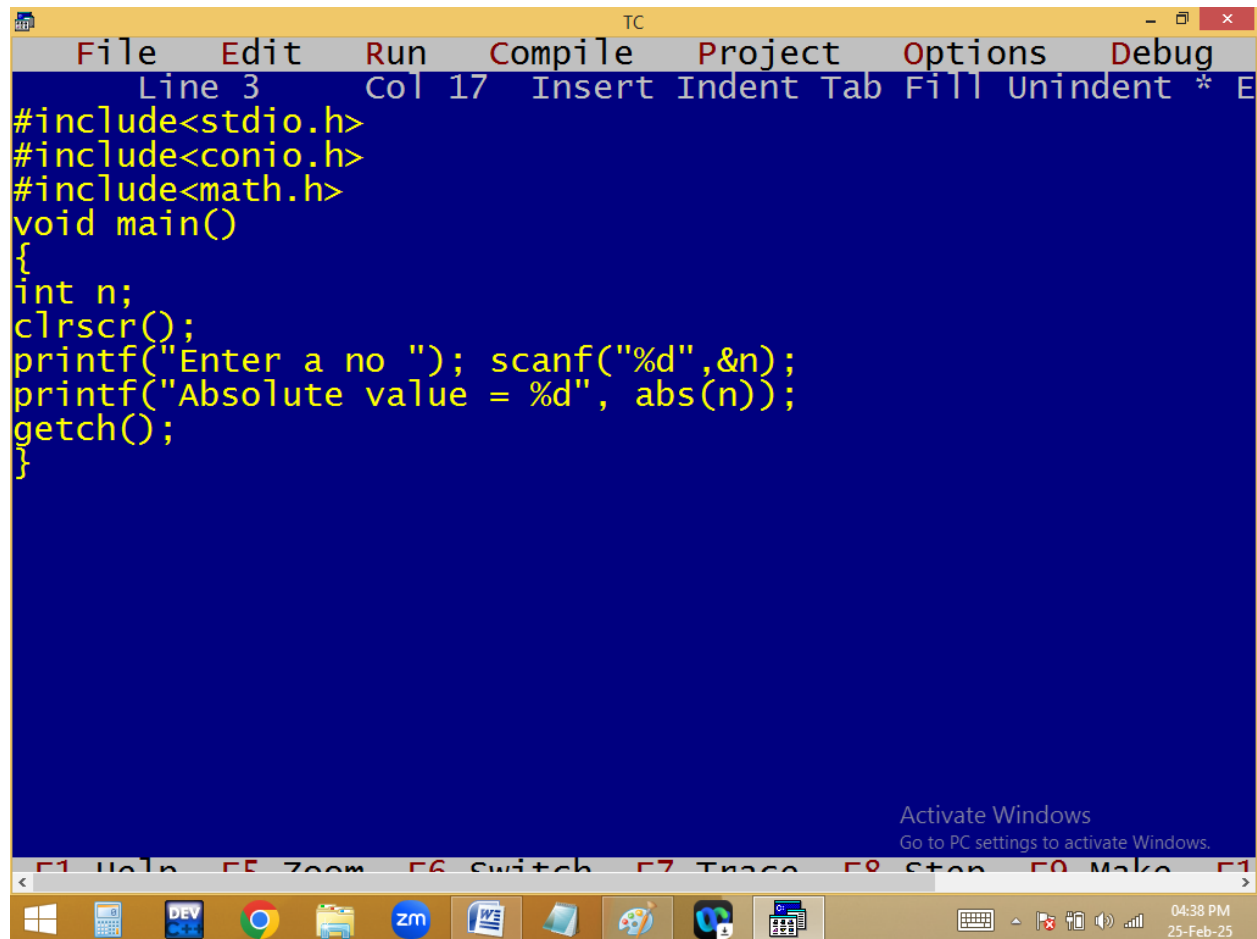


The screenshot shows the Turbo C++ (TC) IDE interface. The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates 'Line 3 Col 17' and provides options like Insert, Indent, Tab, Fill, Unindent, and *. The main editing area has a blue background with yellow text containing the following C code:

```
#include<stdio.h>
#include<conio.h>
#include<math.h>
void main()
{
int n;
clrscr();
printf("Enter a no "); scanf("%d",&n);
printf("Absolute value = %d", abs(n));
getch();
}
```

At the bottom, there is a keyboard shortcut bar with functions like F1 Help, F5 Zoom, F6 Switch, F7 Trace, F9 Stop, F10 Make, and F11. The Windows taskbar at the very bottom shows various application icons and the system clock indicating 04:38 PM on 25-Feb-25.

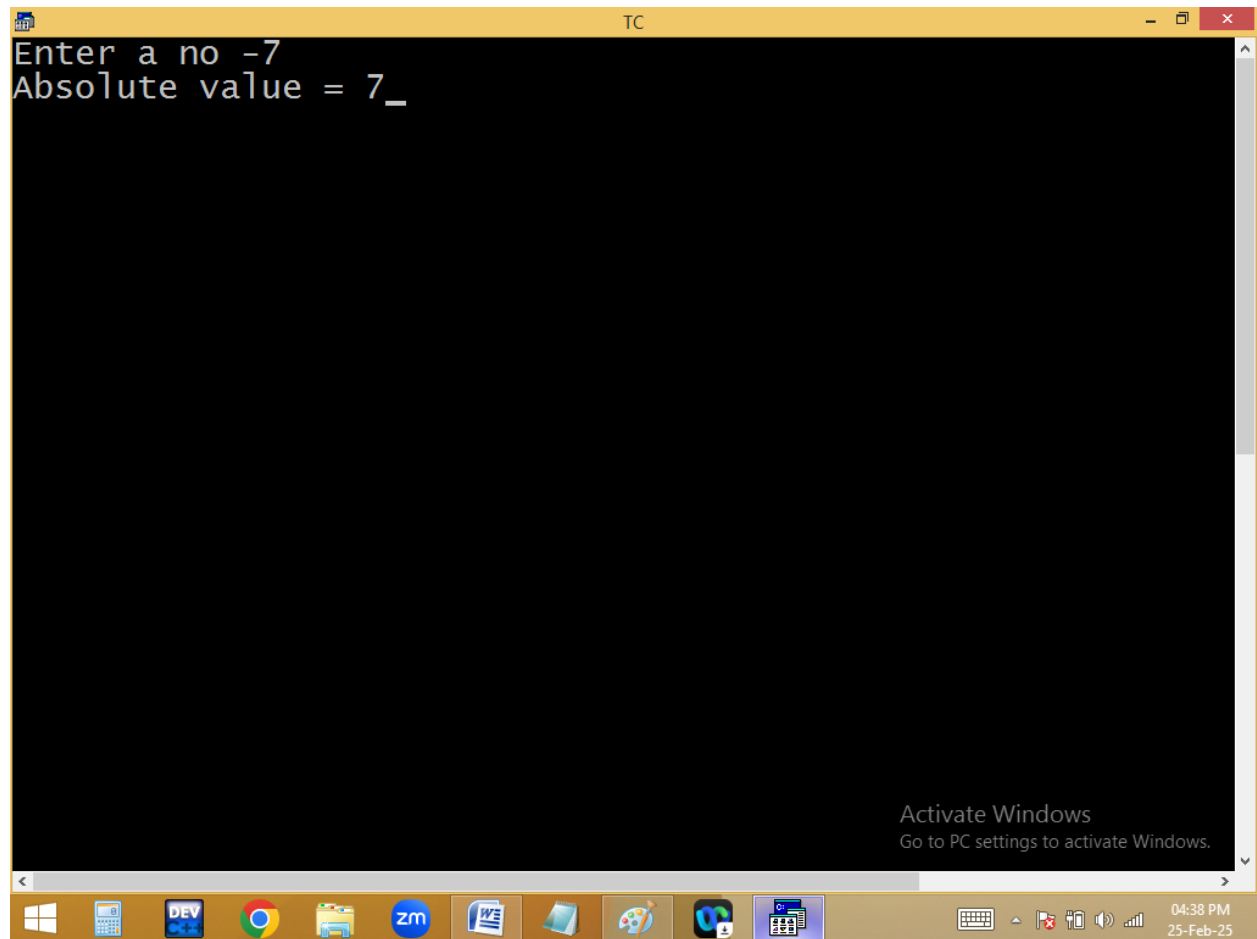


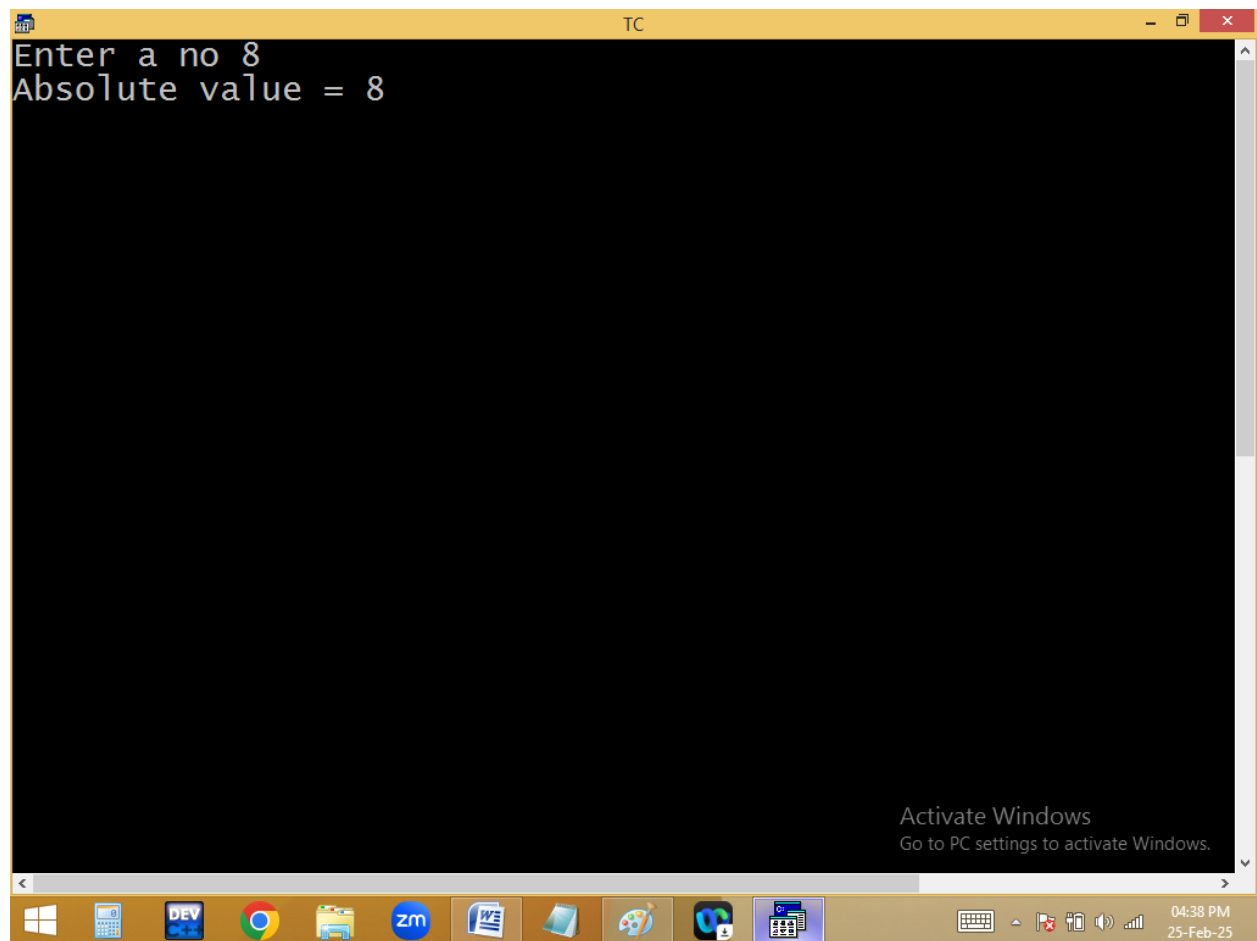

The image shows a screenshot of a Turbo C++ (TC) window. The window title bar is yellow and contains the text 'TC'. The main area of the window is black and displays the following text in white: 'Enter a no 8' and 'Absolute value = 8'. At the bottom of the window, there is a taskbar with various icons including Windows, Calculator, DEV, Chrome, File Explorer, Zoom, Word, and others. The system tray on the right shows the time '04:38 PM' and the date '25-Feb-25'. A watermark 'Activate Windows' is visible in the bottom right corner of the window.

```
Enter a no 8
Absolute value = 8
```


Print 1..10 no's without using loop:

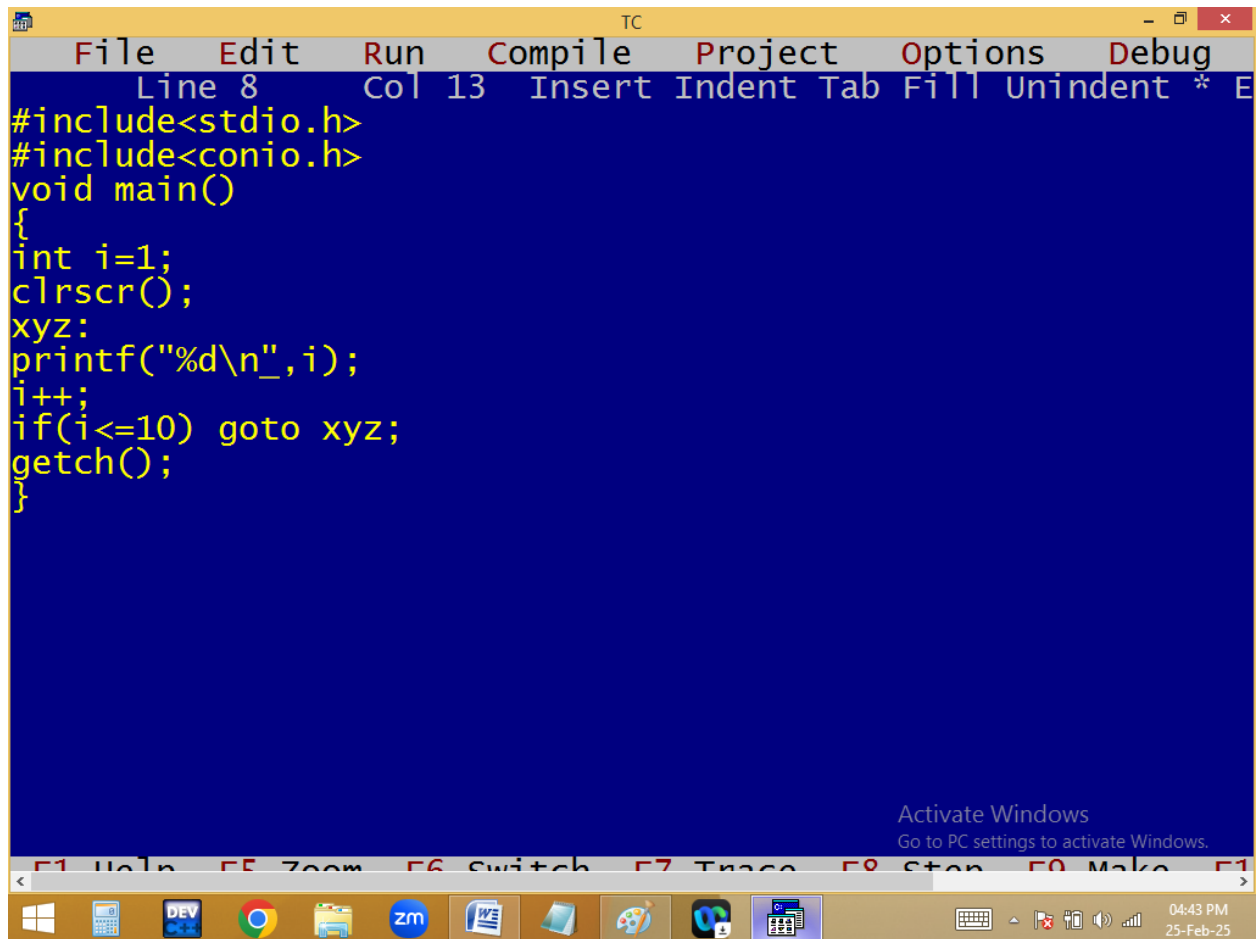


The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates "Line 8" and "Col 13". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i=1;
clrscr();
xyz:
printf("%d\n",i);
i++;
if(i<=10) goto xyz;
getch();
}
```

At the bottom of the IDE window, there is a text prompt: "Activate Windows. Go to PC settings to activate Windows." Below the IDE window is the Windows taskbar, which includes icons for Windows, Task View, DEV, Google Chrome, File Explorer, Zoom, Word, and several other applications. The system tray on the right shows the date and time as "04:43 PM 25-Feb-25".

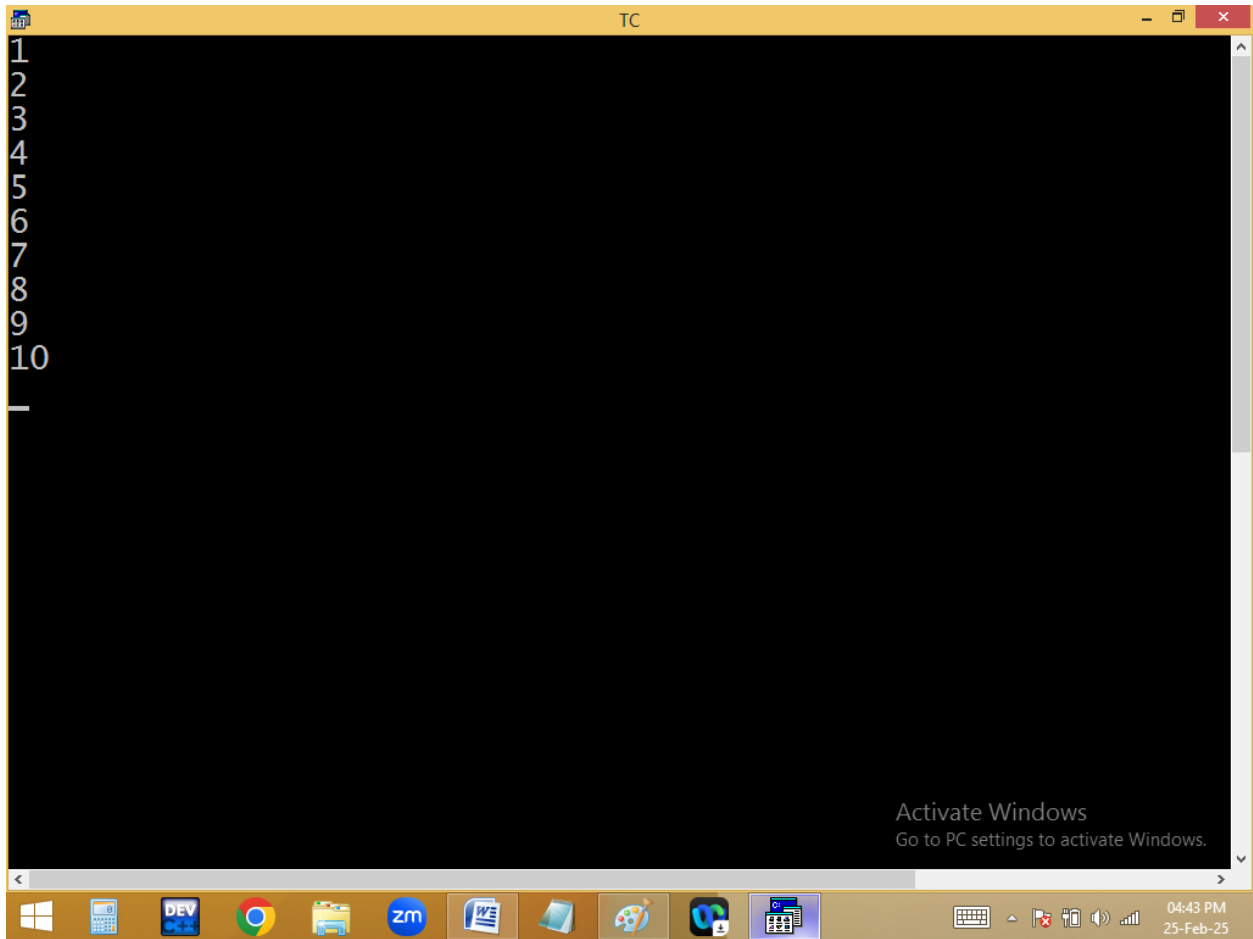


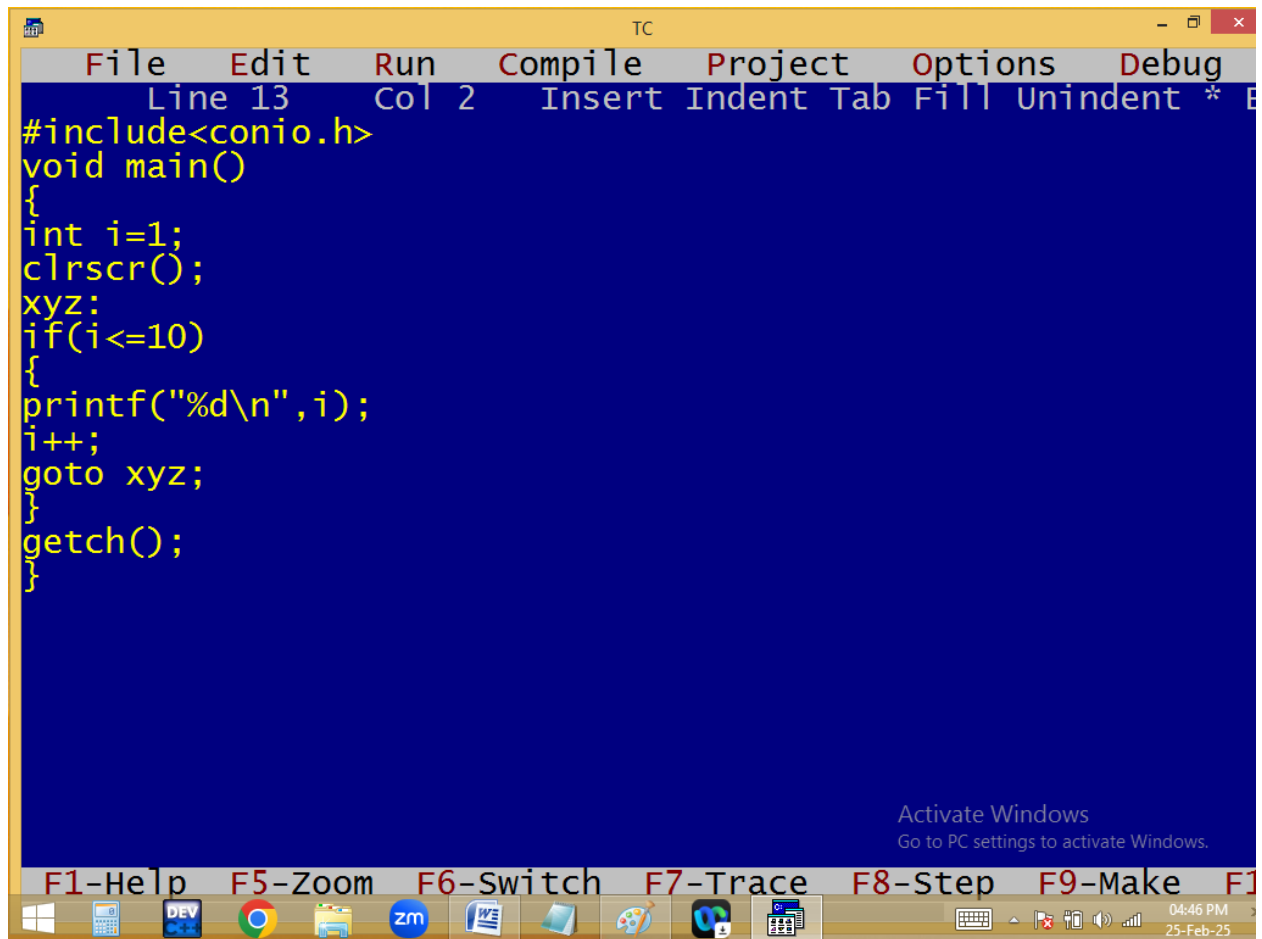


The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates "Line 13 Col 2 Insert Indent Tab Fill Unindent *". The code editor contains the following C program:

```
#include<conio.h>
void main()
{
    int i=1;
    clrscr();
xyz:
    if(i<=10)
    {
        printf("%d\n",i);
        i++;
        goto xyz;
    }
    getch();
}
```

At the bottom of the IDE, there is a row of function key shortcuts: F1-Help, F5-Zoom, F6-Switch, F7-Trace, F8-Step, F9-Make, and F10-Run. The Windows taskbar is visible at the very bottom, showing icons for Windows, File Explorer, Dev-C++, Google Chrome, and other applications. The system clock in the bottom right corner shows "04:46 PM 25-Feb-25".

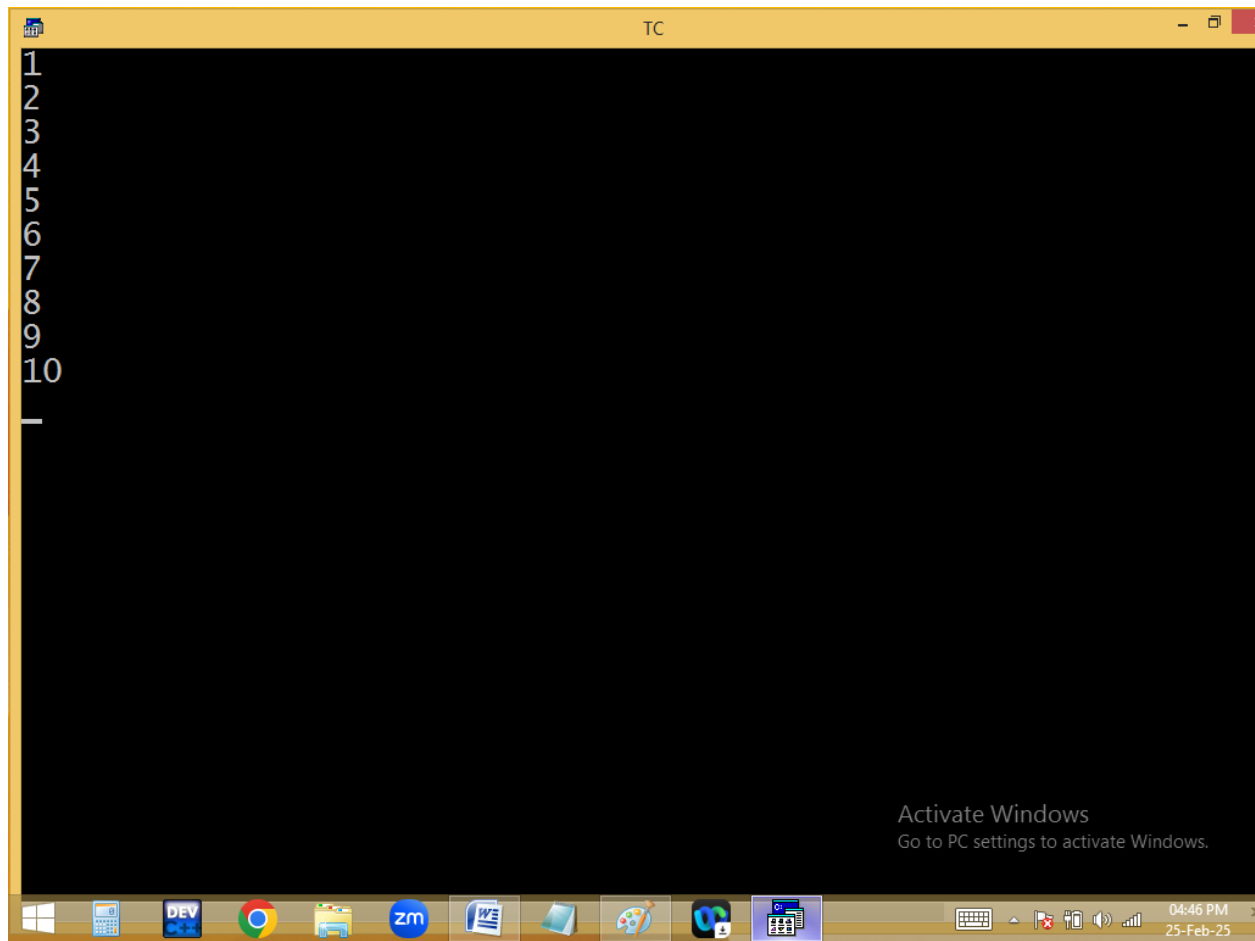


Finding lower case char or not?

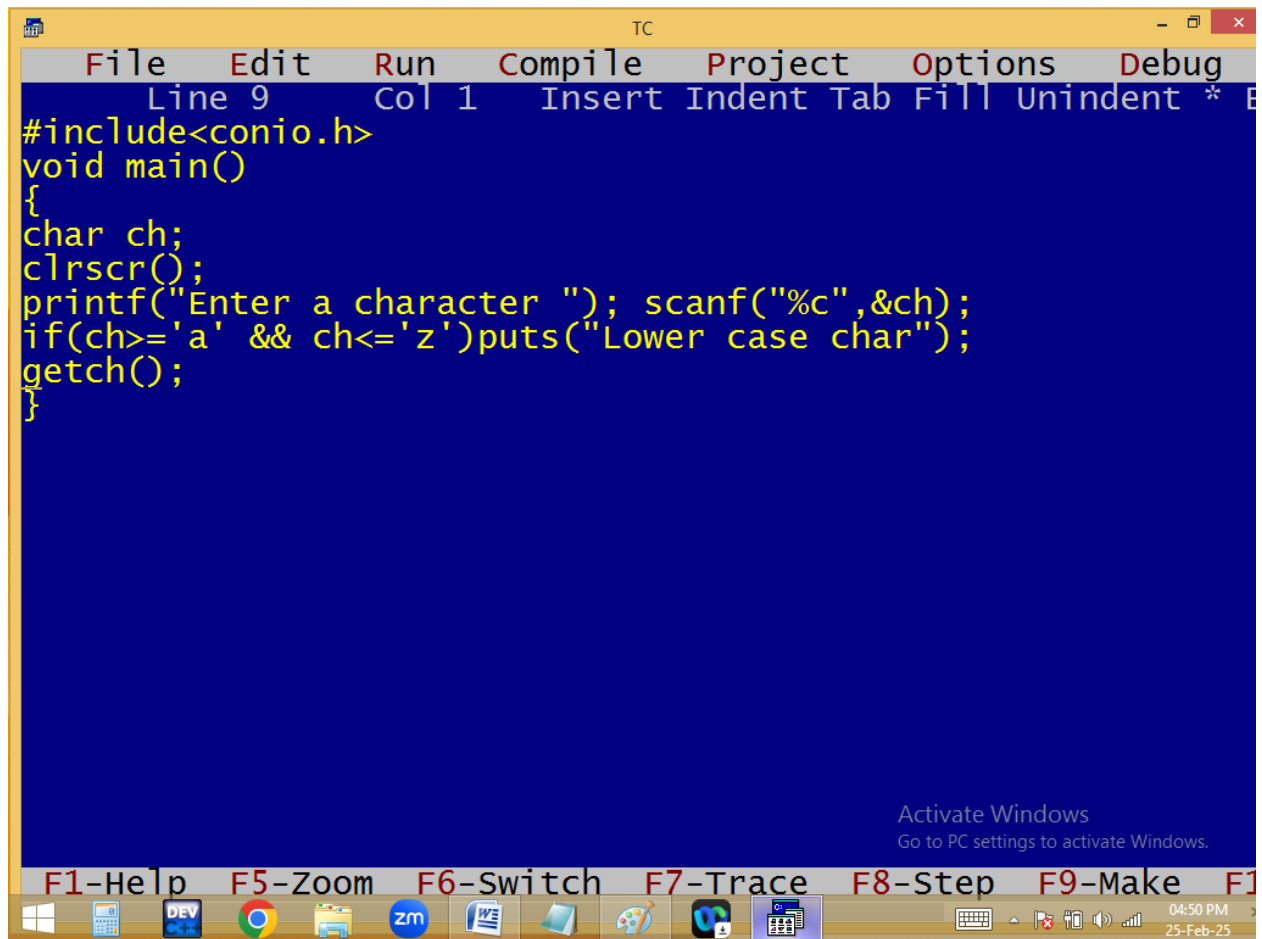



The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 9", "Col 1", and "Insert Indent Tab Fill Unindent *". The main editing area has a blue background and contains the following C code:


```
#include<conio.h>
void main()
{
char ch;
clrscr();
printf("Enter a character "); scanf("%c",&ch);
if(ch>='a' && ch<='z')puts("Lower case char");
getch();
}
```


An "Activate Windows" watermark is visible in the bottom right corner of the IDE window, stating "Go to PC settings to activate Windows." Below the IDE window is the Windows taskbar, which includes icons for the Start menu, Task View, File Explorer, Google Chrome, Zoom, Word, and other applications. The system tray on the right shows the date and time as "04:50 PM 25-Feb-25". A row of function key shortcuts is displayed above the taskbar: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Exit".

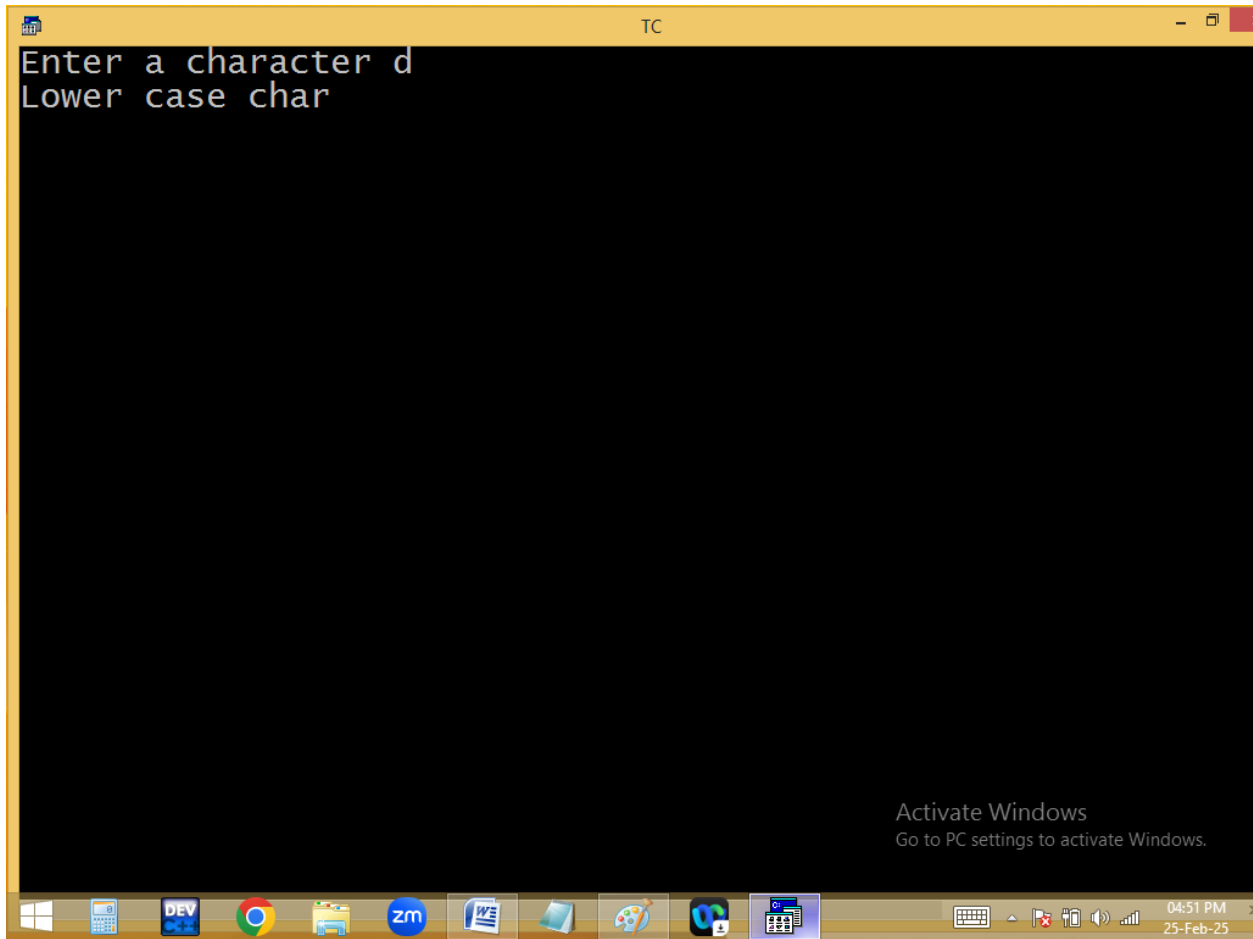


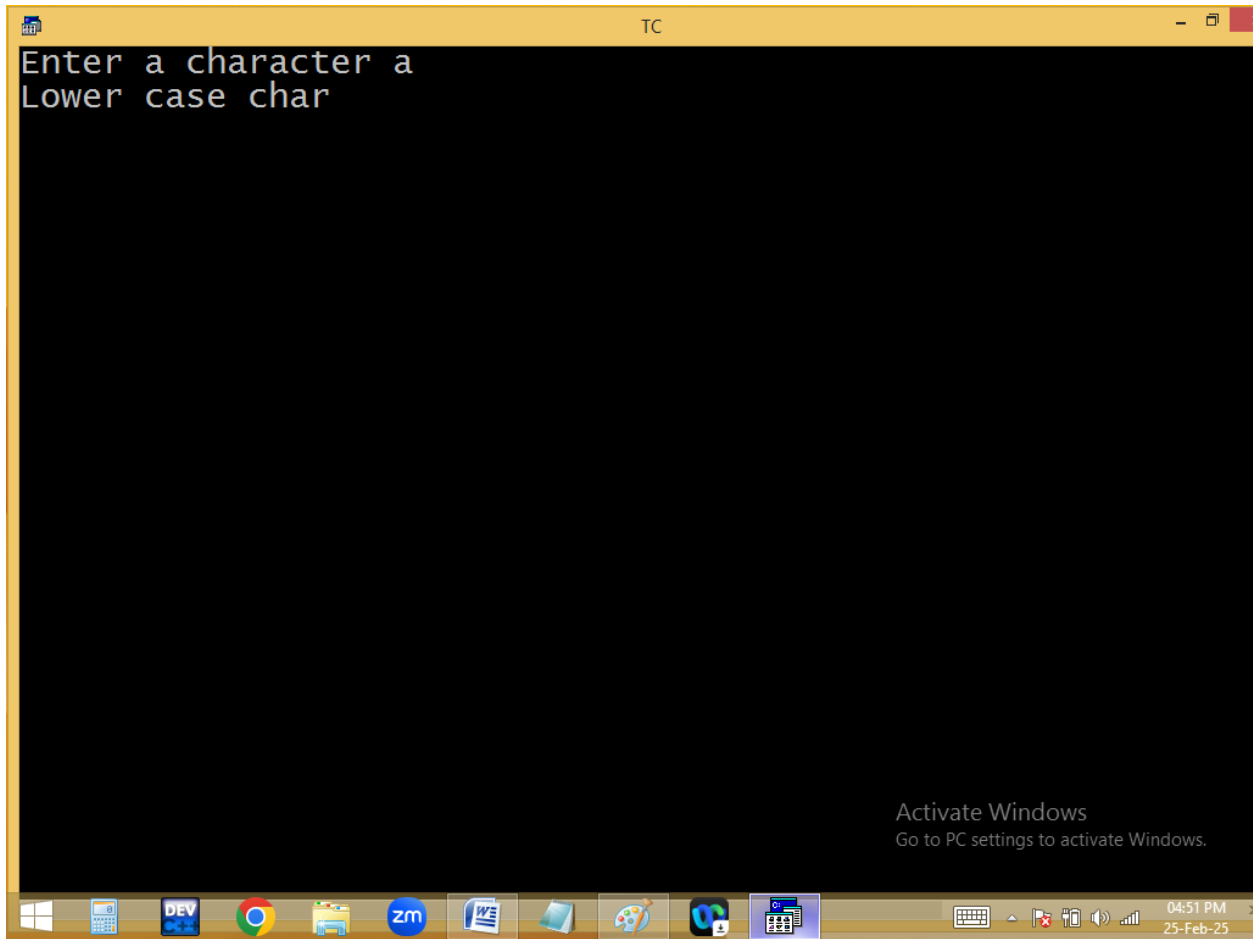

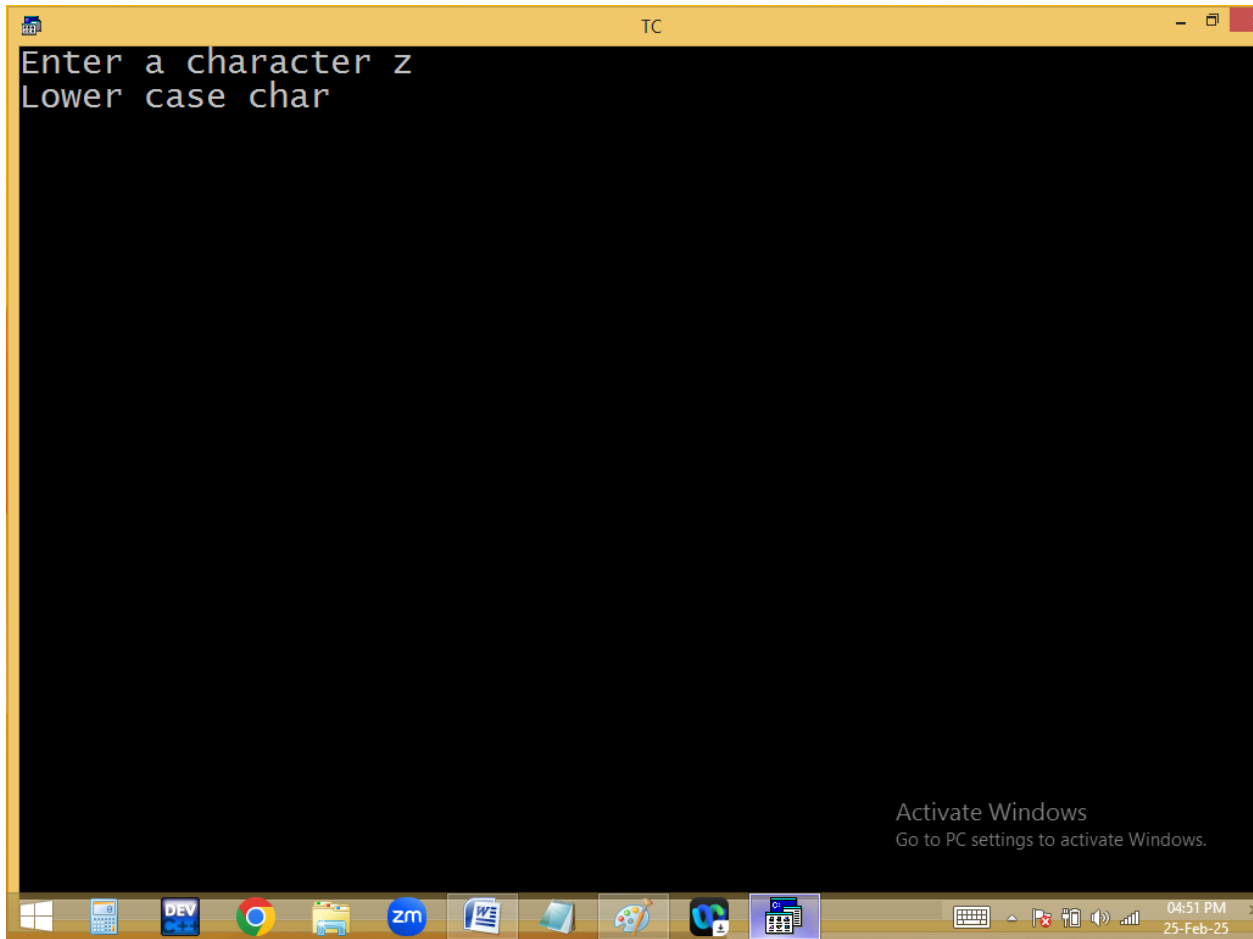

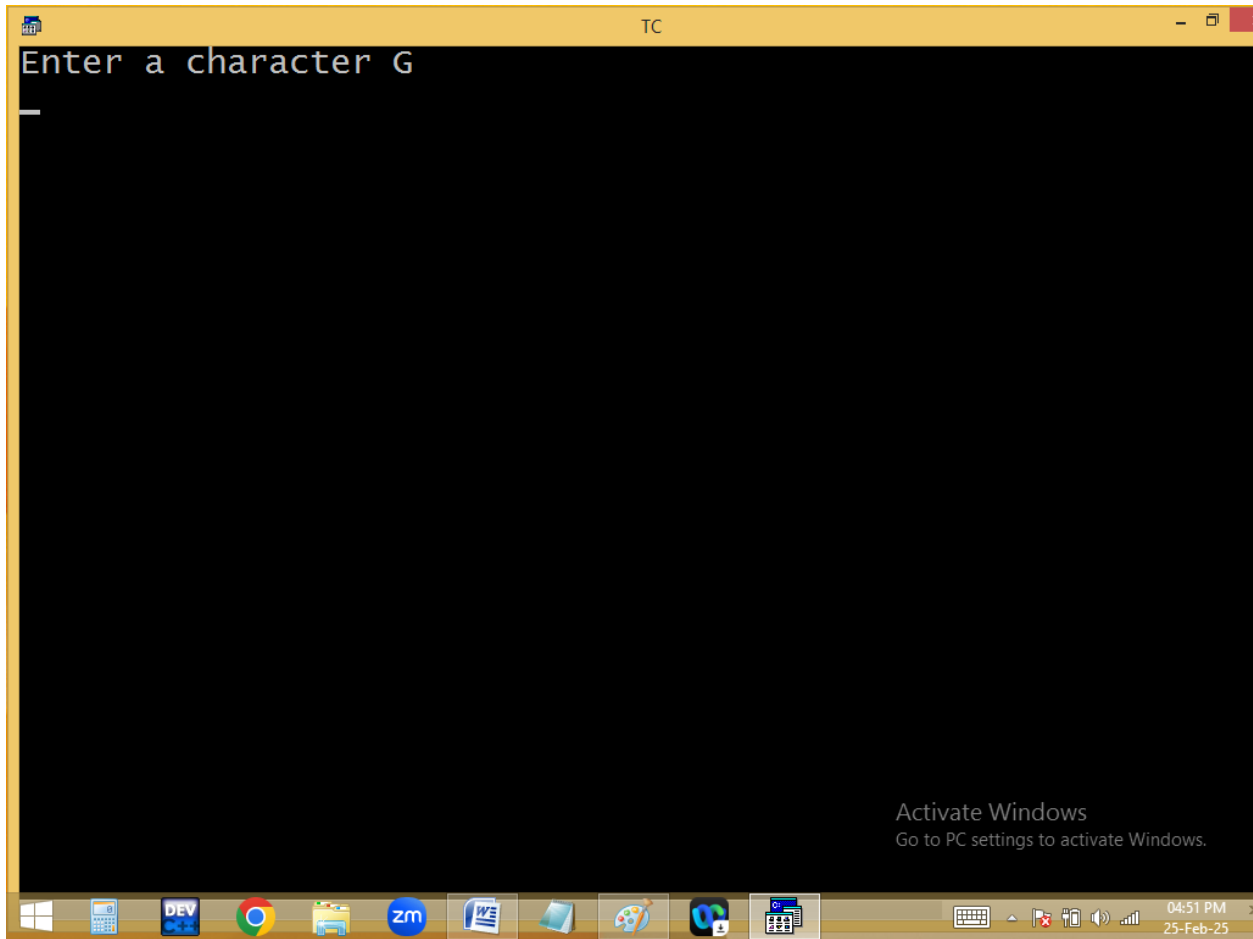

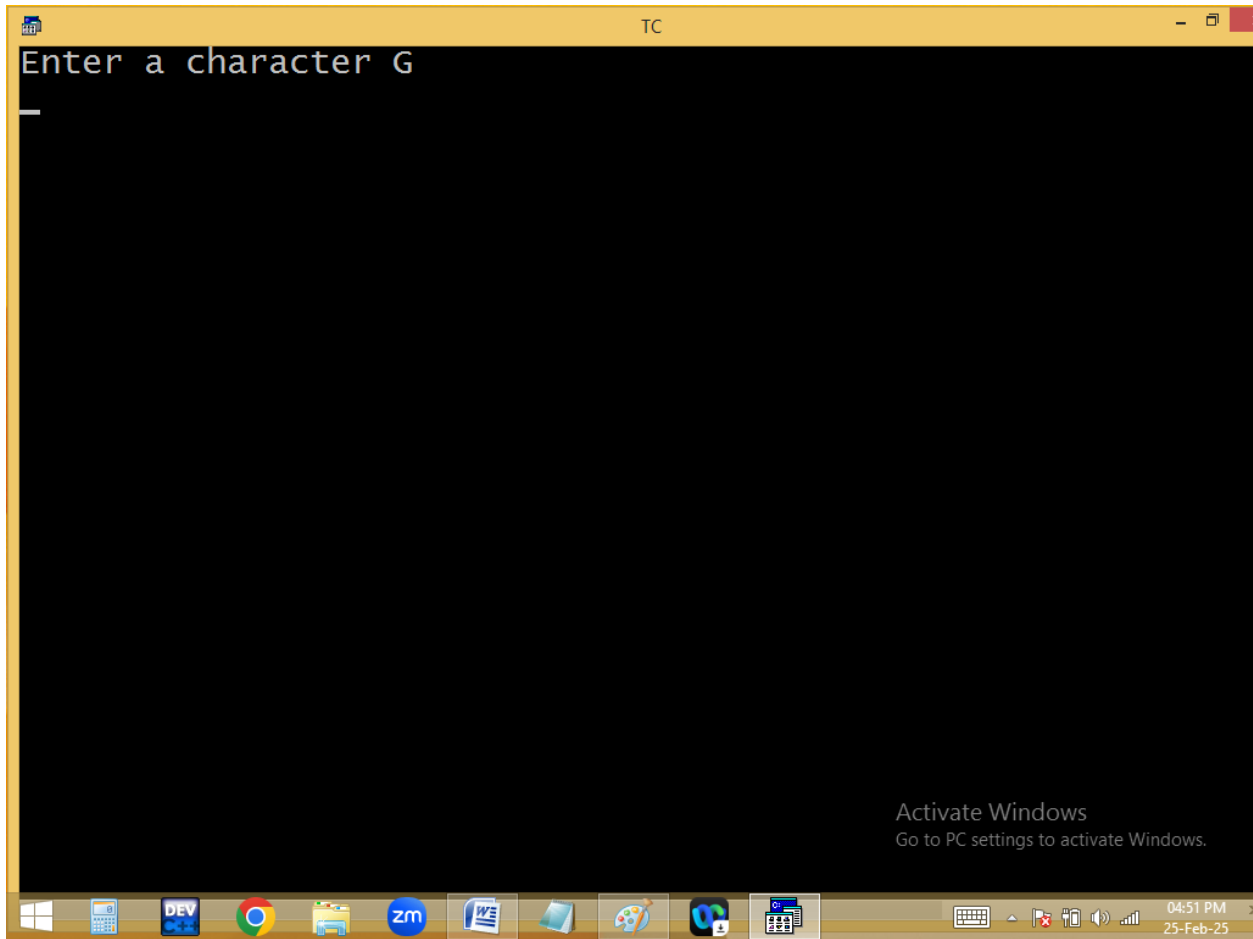

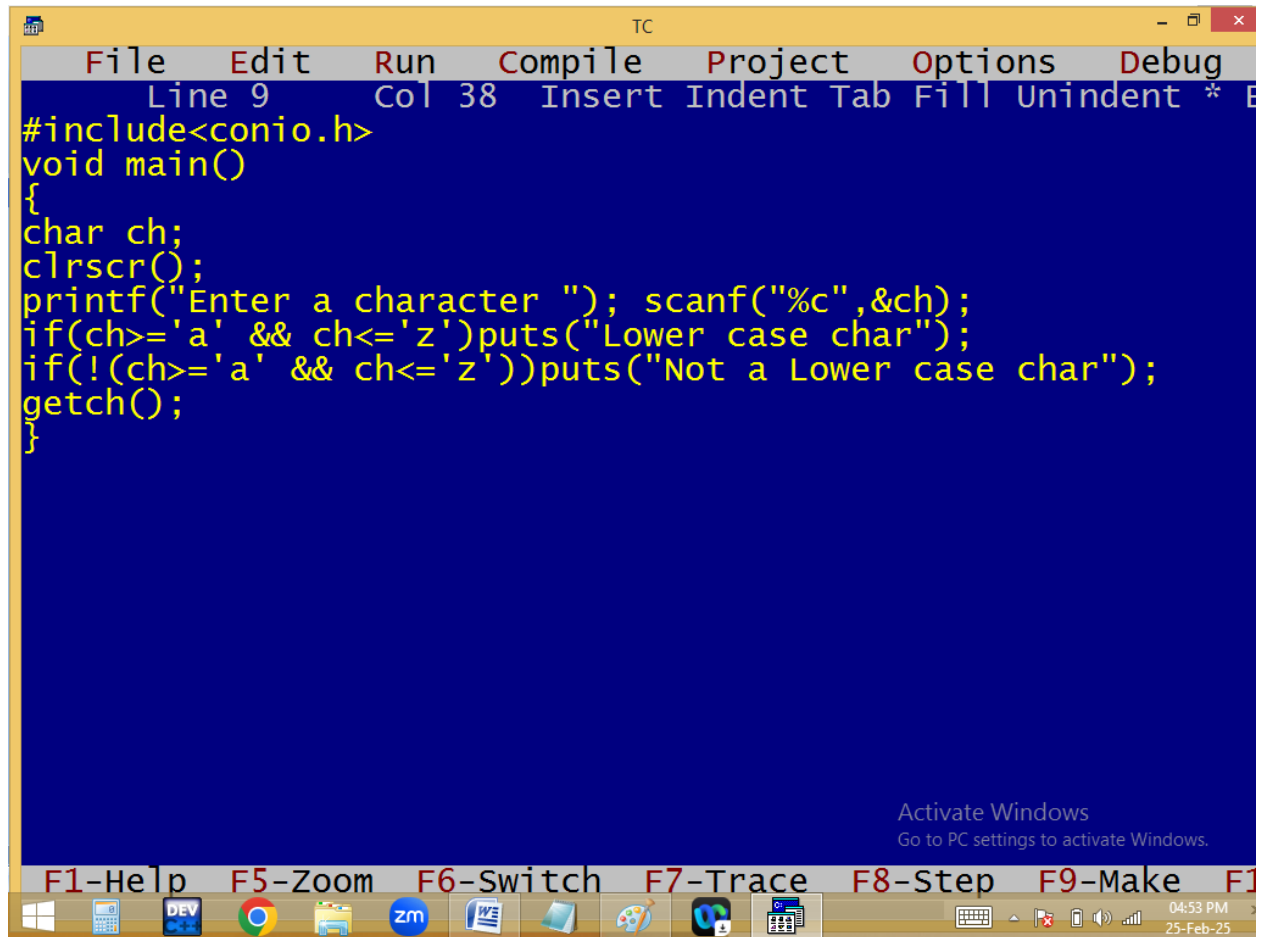

The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 9", "Col 38", and "Insert" mode. The main editing area has a blue background and contains the following C code:

```
#include<conio.h>
void main()
{
char ch;
clrscr();
printf("Enter a character "); scanf("%c",&ch);
if(ch>='a' && ch<='z')puts("Lower case char");
if(!(ch>='a' && ch<='z'))puts("Not a Lower case char");
getch();
}
```

At the bottom of the window, there is a row of function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". The Windows taskbar is visible at the very bottom, showing icons for the Start menu, Task View, File Explorer, and several other applications. The system clock in the bottom right corner shows "04:53 PM" and "25-Feb-25".



TC



Enter a character G
Not a Lower case char

|

Activate Windows
Go to PC settings to activate Windows.



04:53 PM
25-Feb-25



TC




Enter a character n
Lower case char

Activate Windows
Go to PC settings to activate Windows.




04:53 PM
25-Feb-25

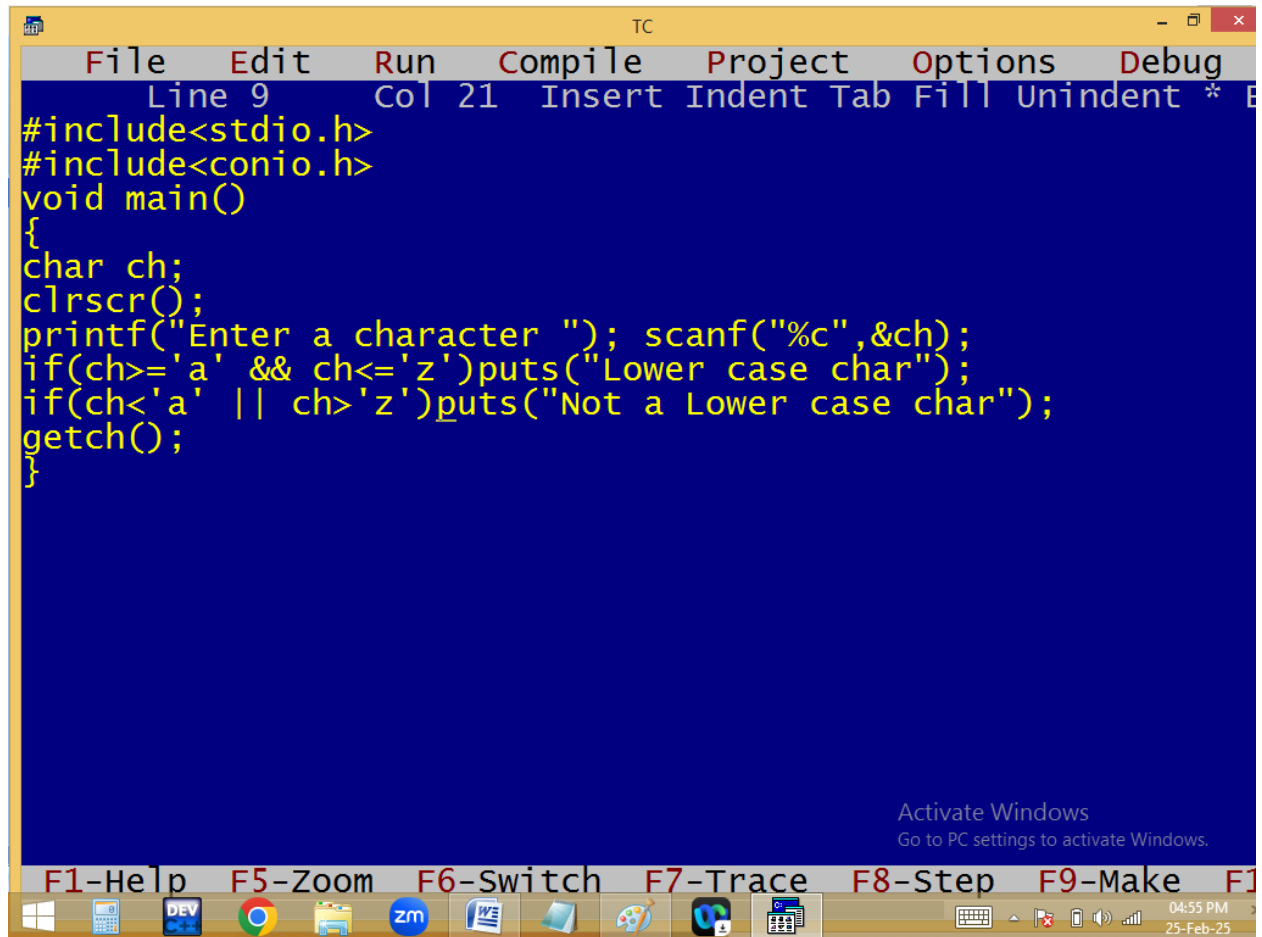



The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 9", "Col 21", and provides shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", and a wildcard "*". The code editor has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
char ch;
clrscr();
printf("Enter a character "); scanf("%c",&ch);
if(ch>='a' && ch<='z')puts("Lower case char");
if(ch<'a' || ch>'z')puts("Not a Lower case char");
getch();
}
```

At the bottom of the code editor, there is a message: "Activate Windows. Go to PC settings to activate Windows." Below the code editor is a toolbar with function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". The Windows taskbar is visible at the very bottom, showing icons for the Start menu, Task View, File Explorer, Google Chrome, Zoom, Word, and other applications. The system clock in the bottom right corner shows "04:55 PM" and "25-Feb-25".

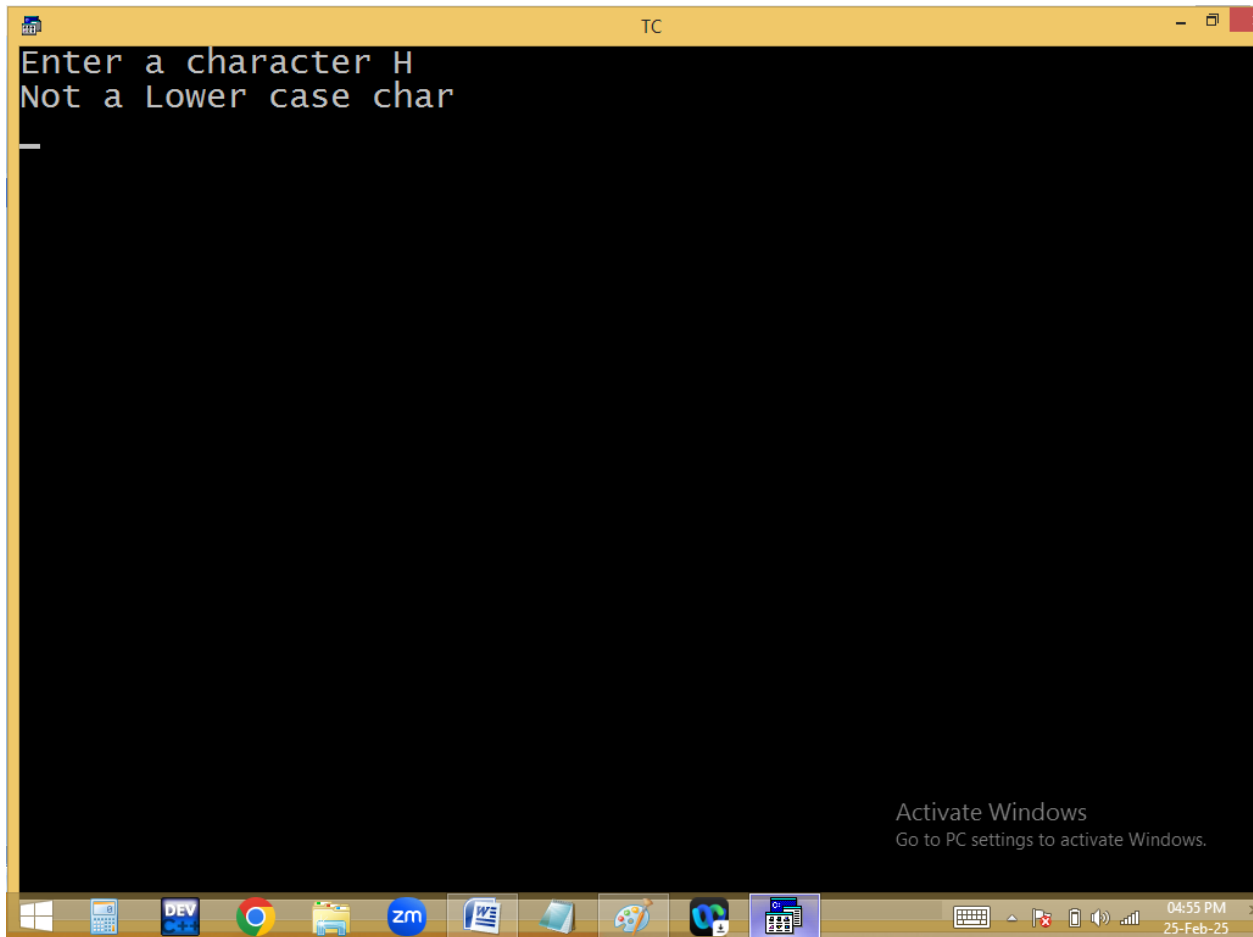

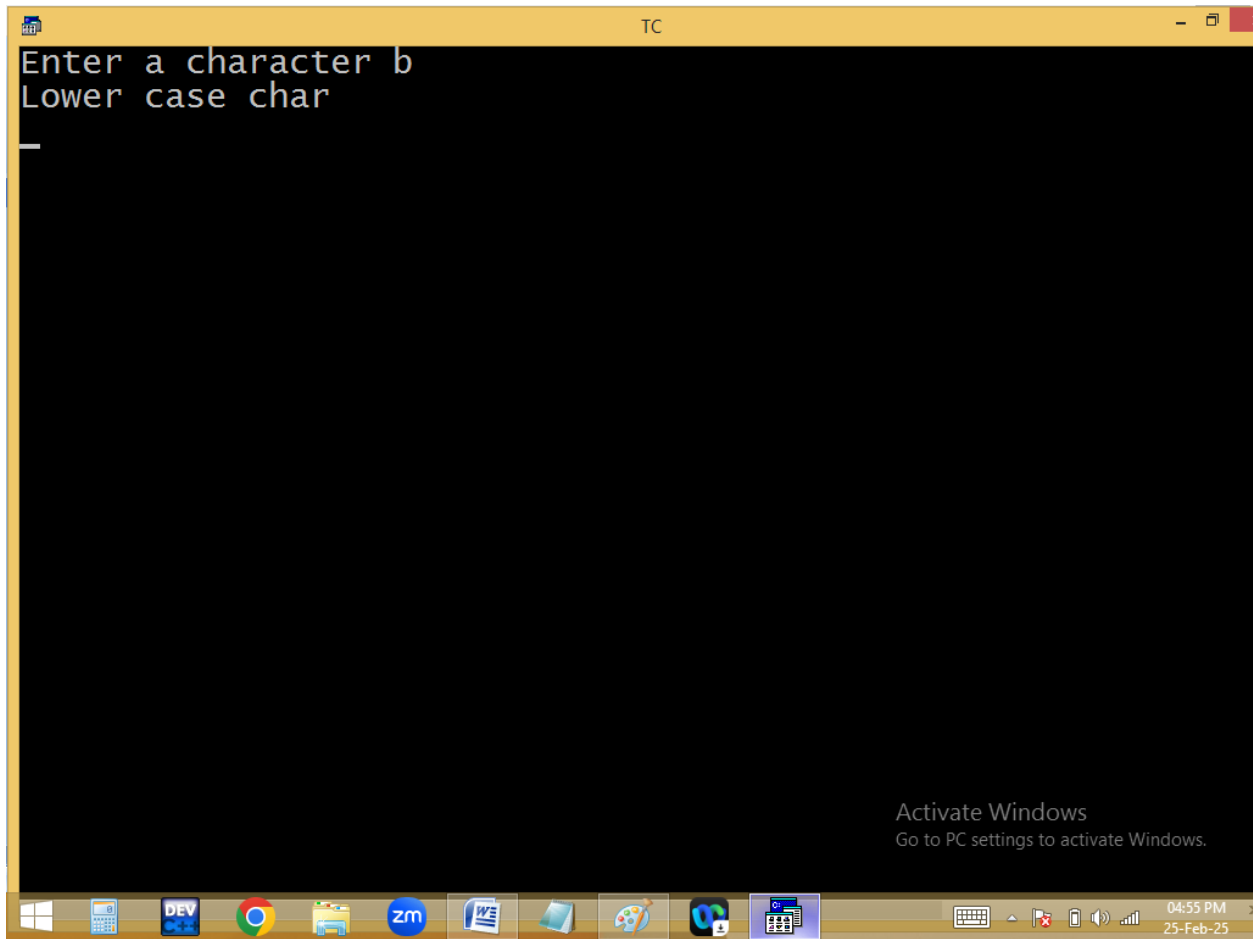

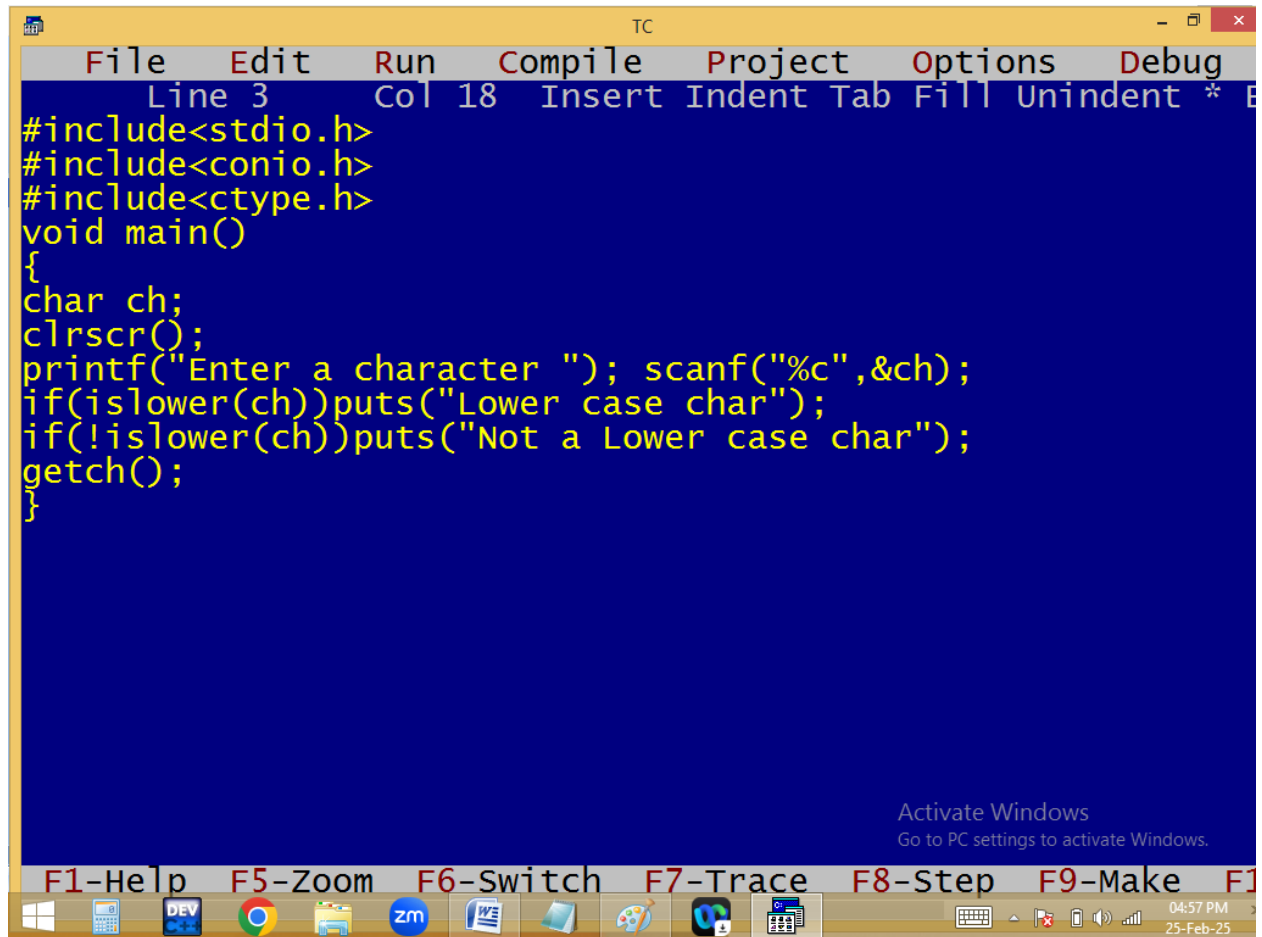


The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates "Line 3 Col 18" and lists editing actions: Insert, Indent, Tab, Fill, Unindent, and *. The code is written in yellow text on a blue background. It includes headers for stdio.h, conio.h, and ctype.h. The main function declares a char variable 'ch', clears the screen, prompts the user to enter a character, and uses scanf to read it. It then checks if the character is lowercase using islower and puts the appropriate message. Finally, it uses getch to wait for a key press before exiting. The bottom status bar shows function key shortcuts: F1-Help, F5-Zoom, F6-Switch, F7-Trace, F8-Step, F9-Make, and F10-Run. The Windows taskbar at the bottom shows the Start button, taskbar icons for Calculator, DEV C++, Google Chrome, File Explorer, Zoom, Word, and Paint, and the system tray with the date and time (04:57 PM, 25-Feb-25).

```
#include<stdio.h>
#include<conio.h>
#include<ctype.h>
void main()
{
char ch;
clrscr();
printf("Enter a character "); scanf("%c",&ch);
if(islower(ch))puts("Lower case char");
if(!islower(ch))puts("Not a Lower case char");
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run

04:57 PM
25-Feb-25

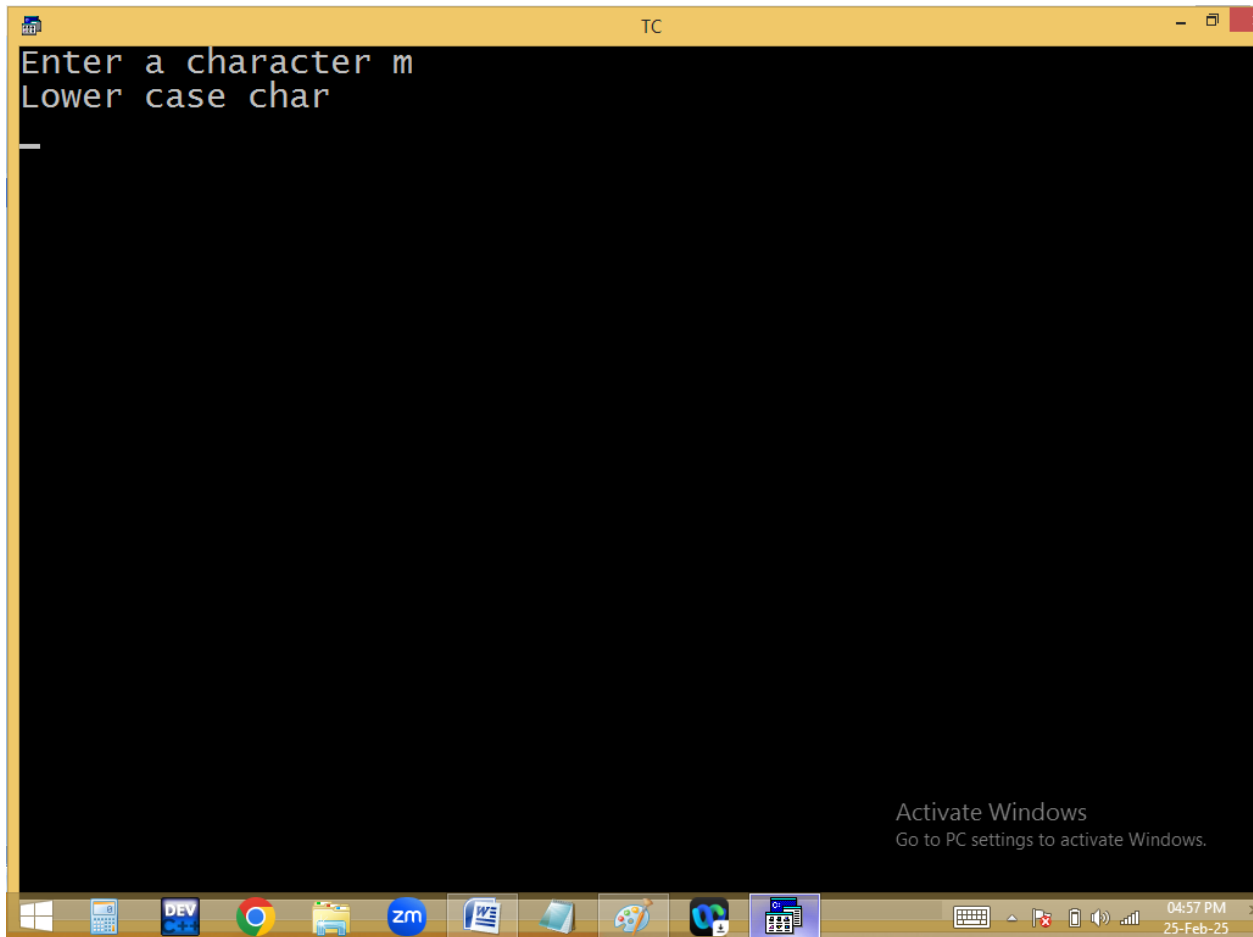



TC



Enter a character Z
Not a Lower case char


|

Activate Windows
Go to PC settings to activate Windows.






04:57 PM
25-Feb-25

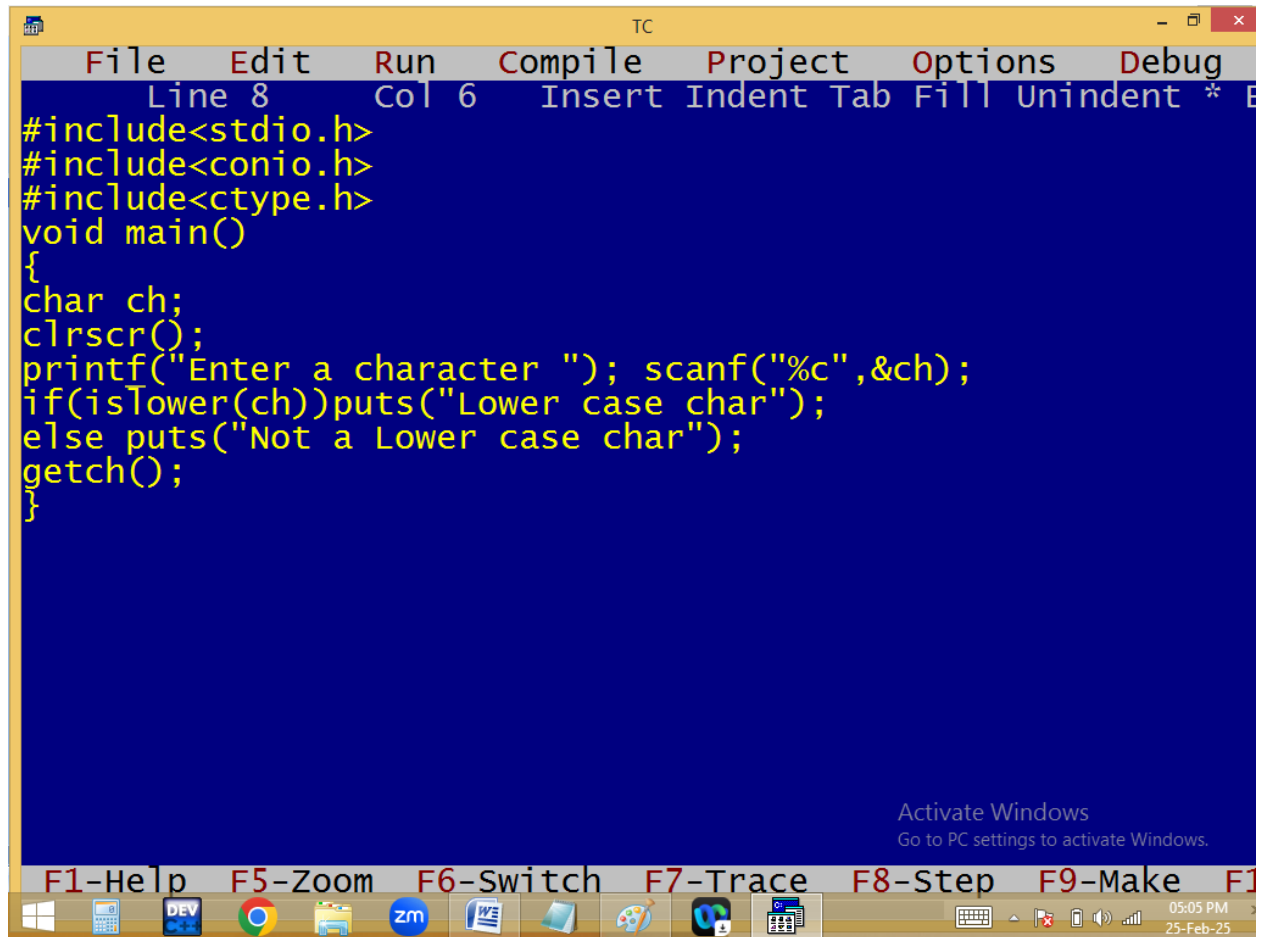

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates "Line 8", "Col 6", and lists editing actions: Insert, Indent, Tab, Fill, Unindent, and *. The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
#include<ctype.h>
void main()
{
char ch;
clrscr();
printf("Enter a character "); scanf("%c",&ch);
if(isLower(ch))puts("Lower case char");
else puts("Not a Lower case char");
getch();
}
```

An "Activate Windows" watermark is visible in the bottom right of the IDE window, stating "Go to PC settings to activate Windows." Below the IDE window is the Windows taskbar. It features a row of function key shortcuts: F1-Help, F5-Zoom, F6-Switch, F7-Trace, F8-Step, F9-Make, and F10-Exit. The taskbar also includes icons for the Start menu, Task View, File Explorer, Google Chrome, Zoom, Word, and other applications. The system tray on the right shows the time as 05:05 PM and the date as 25-Feb-25.

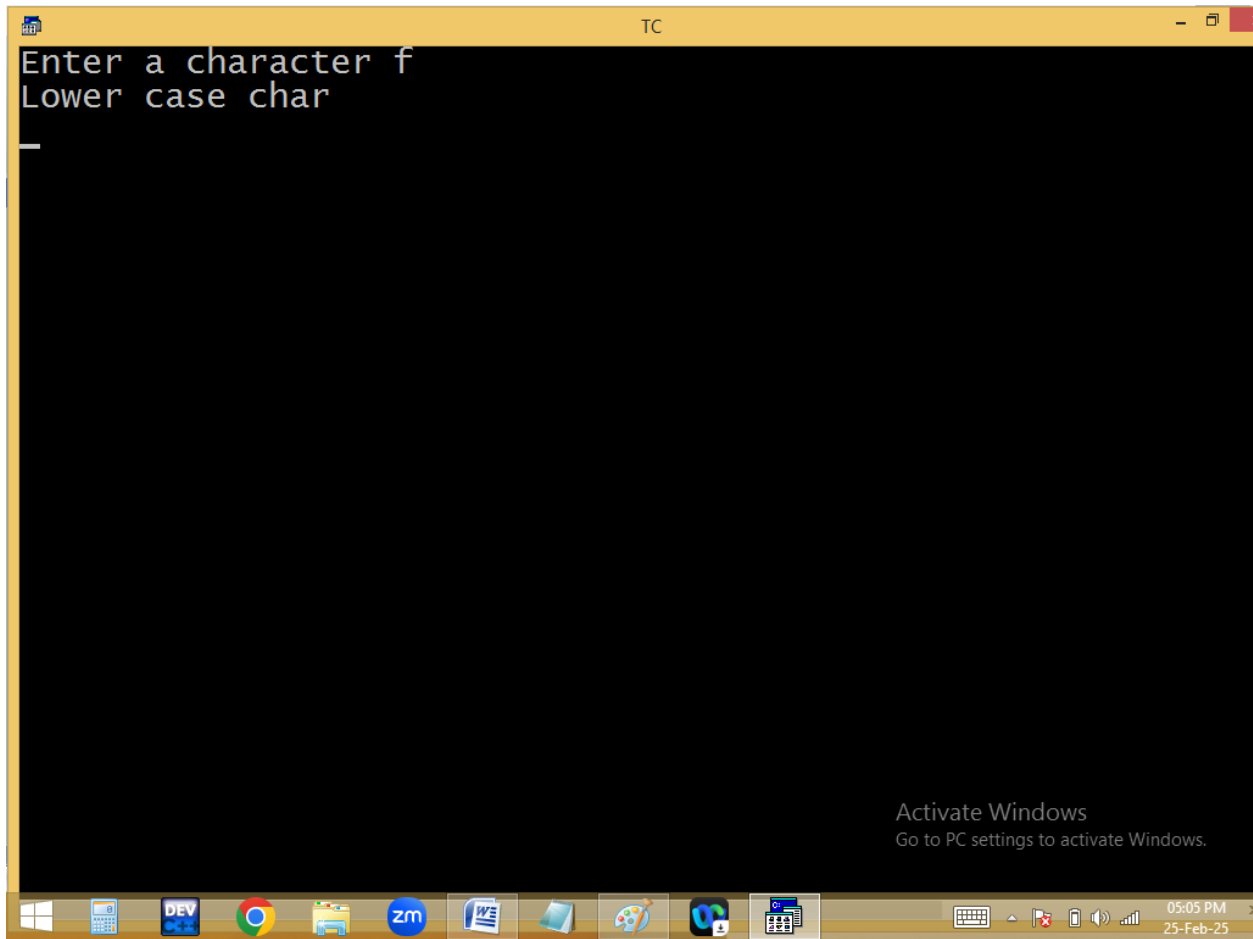



TC




Enter a character H
Not a Lower case char

Activate Windows
Go to PC settings to activate Windows.




05:05 PM
25-Feb-25

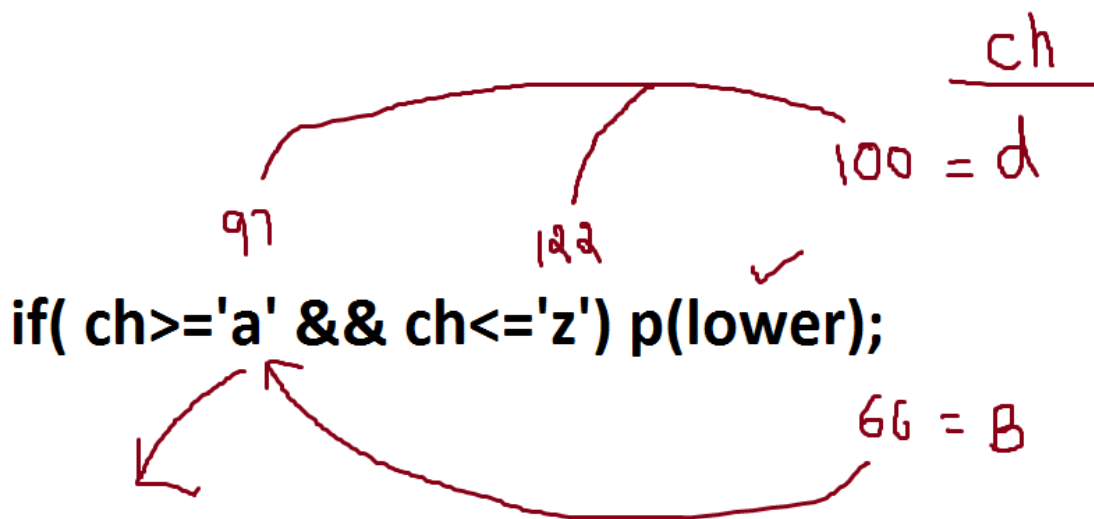


if..else: When the program is having two options and user have to select one then go for if..else.

if condition true statements in if block { } are executed and else not considered.

If condition false then statements in else block { } only executed. Else doesn't require any condition.

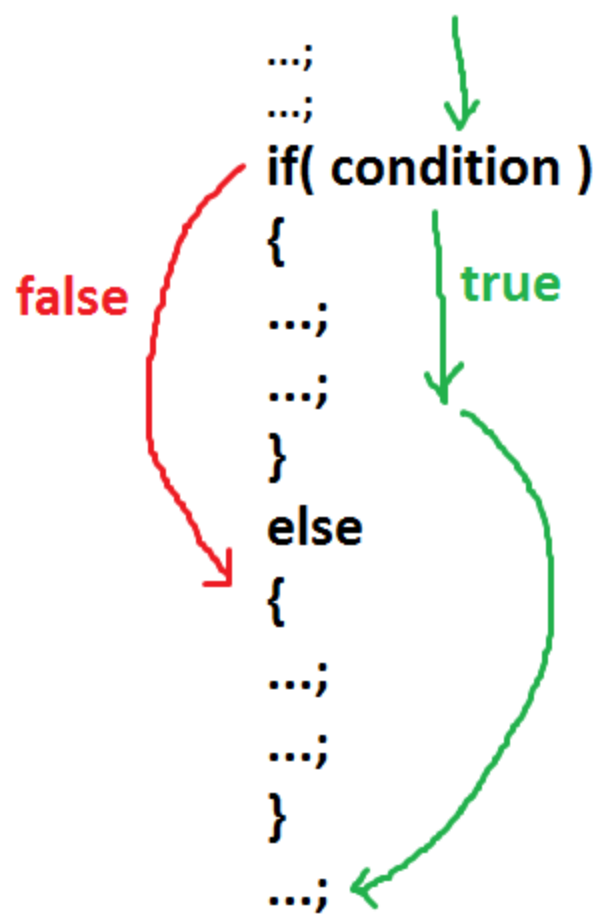

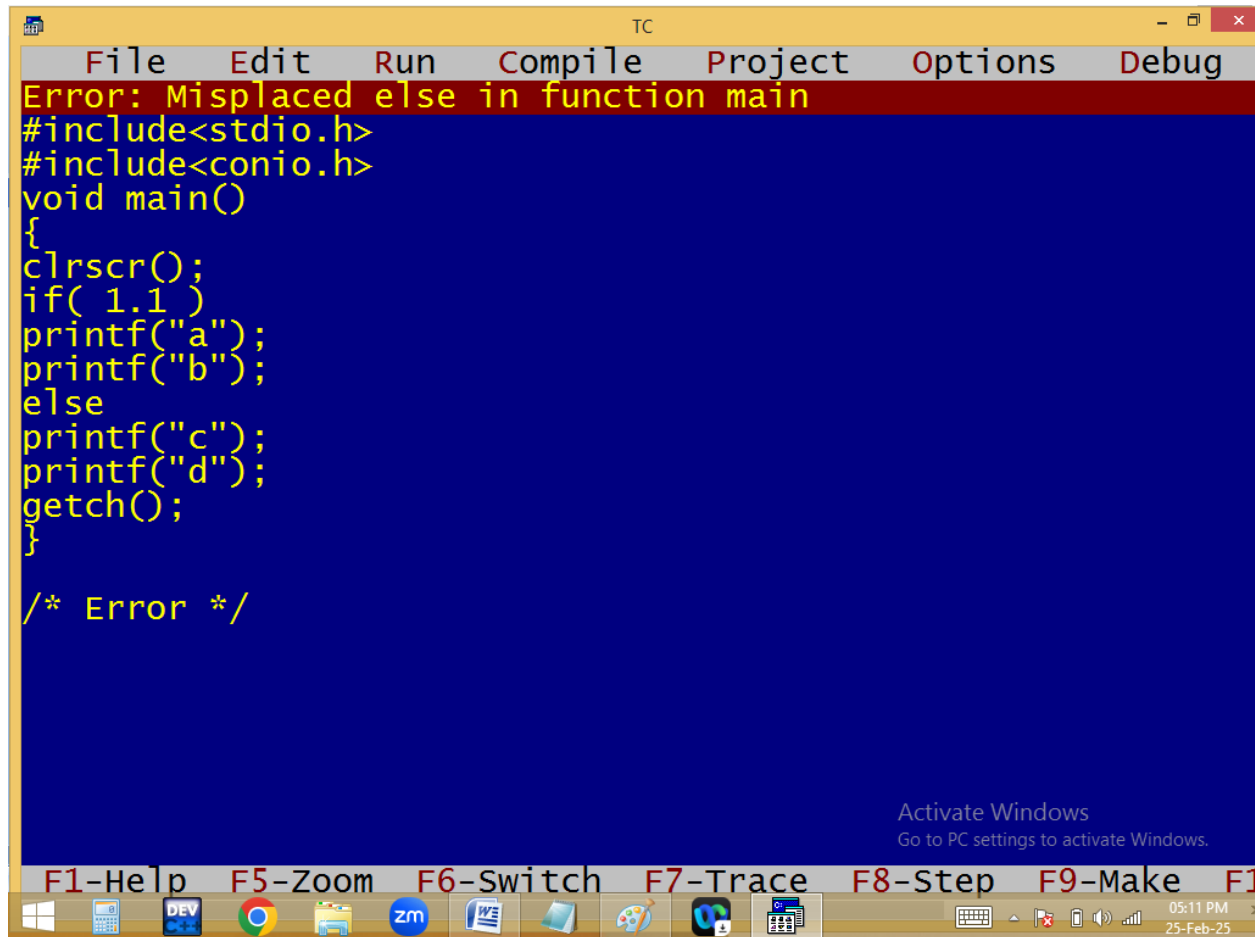


The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error message banner at the top reads "Error: Misplaced else in function main". The code editor has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( 1.1 )
printf("a");
printf("b");
else
printf("c");
printf("d");
getch();
}

/* Error */
```


At the bottom of the IDE, there is a status bar with function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". The Windows taskbar is visible at the very bottom, showing icons for Windows, File Explorer, Dev-C++, Google Chrome, and other applications. The system clock in the bottom right corner shows "05:11 PM" and "25-Feb-25".

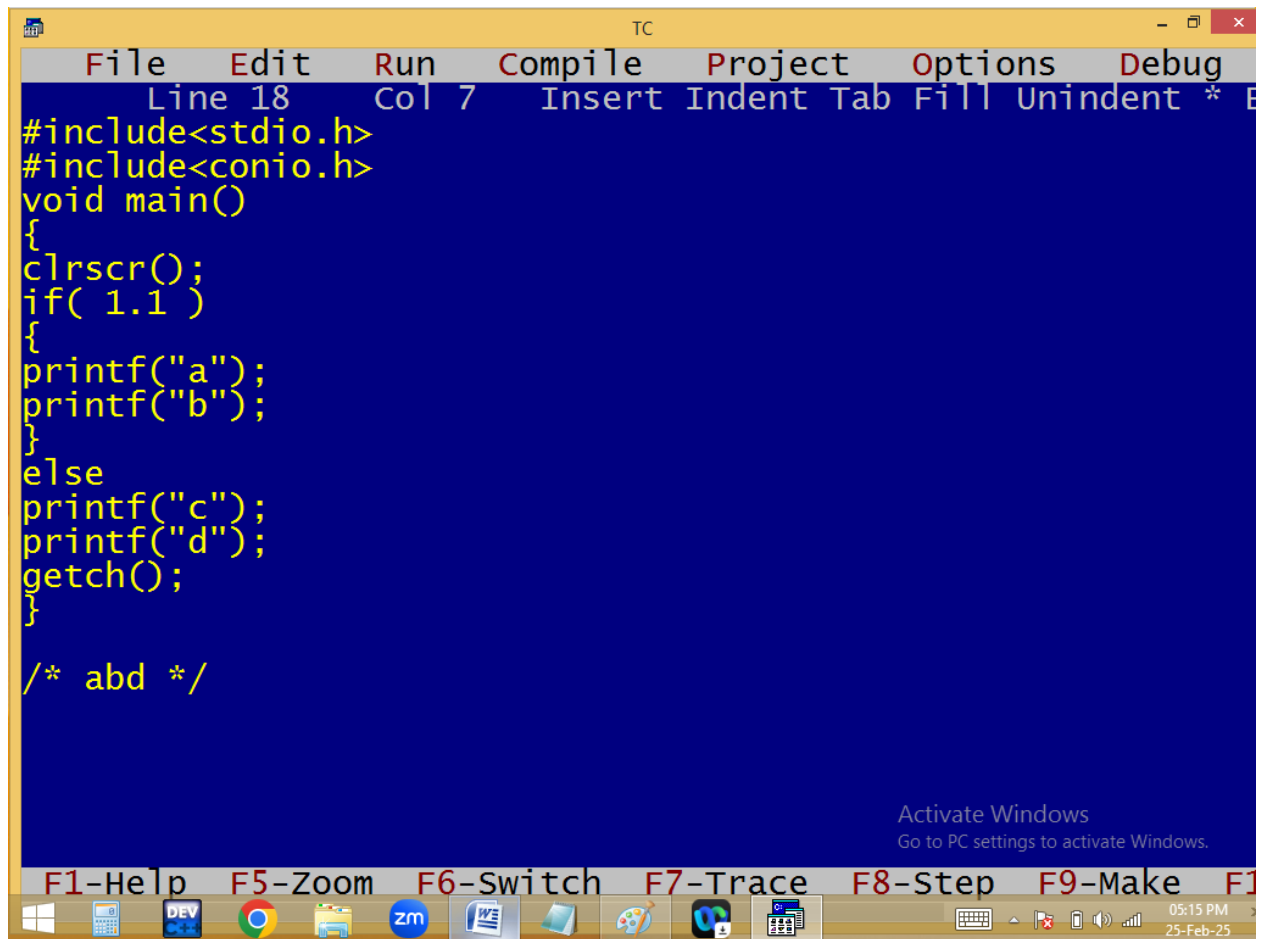

```
TC
File Edit Run Compile Project Options Debug
Line 18 Col 7 Insert Indent Tab Fill Unindent * B
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( 1.1 )
{
printf("a");
printf("b");
}
else
printf("c");
printf("d");
getch();
}

/* abd */

Activate Windows
Go to PC settings to activate Windows.
F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run
```

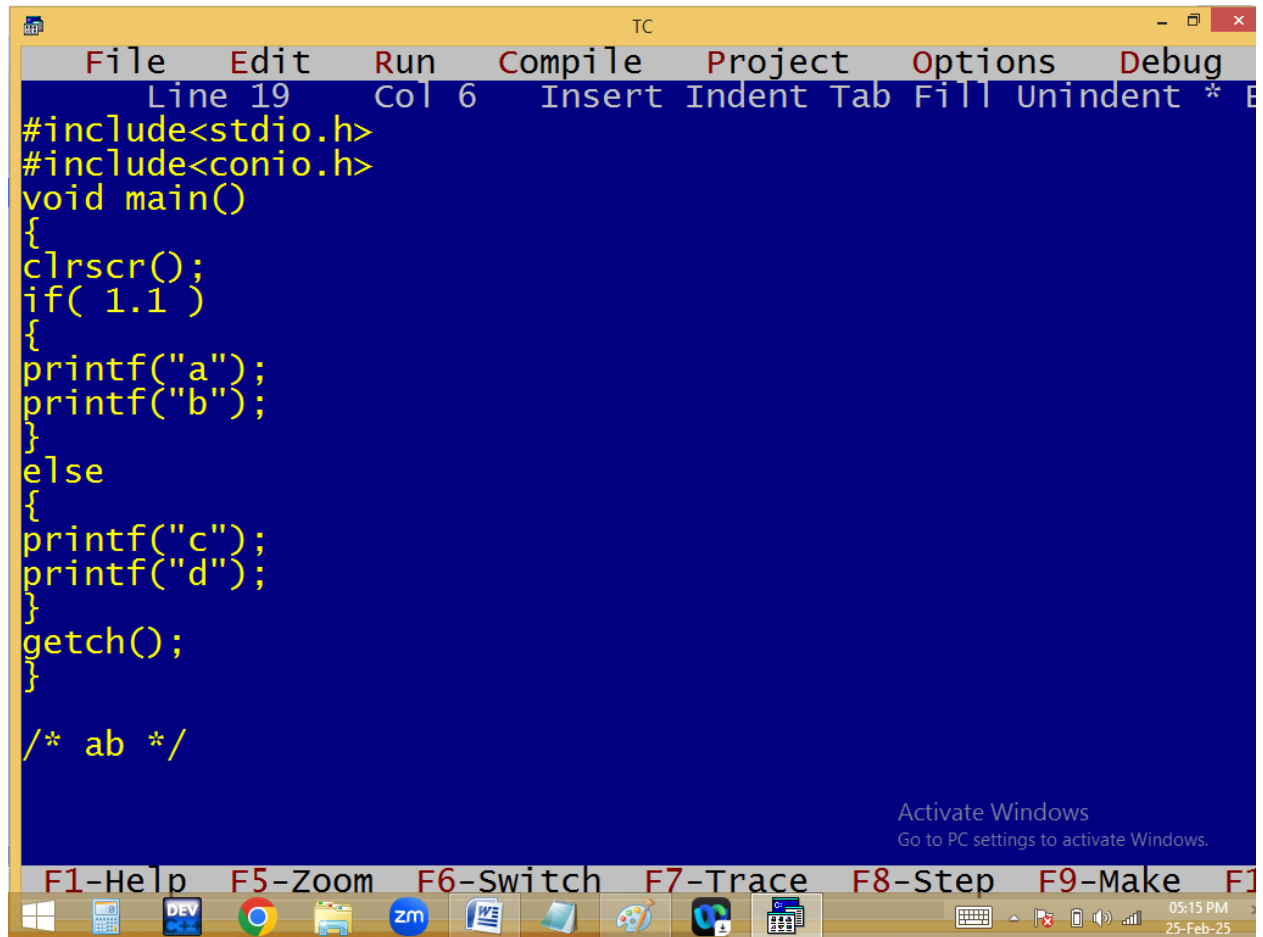

```
TC
File Edit Run Compile Project Options Debug
Line 19 Col 6 Insert Indent Tab Fill Unindent * B
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( 1.1 )
{
printf("a");
printf("b");
}
else
{
printf("c");
printf("d");
}
getch();
}

/* ab */

Activate Windows
Go to PC settings to activate Windows.
F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run
```


TC

File Edit Run Compile Project Options Debug

Error: Misplaced else in function main


```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if( 1.1 ) ;
{
printf("a");
printf("b");
}
else
{
printf("c");
printf("d");
}
getch();
}

/* Error */
```

Activate Windows
Go to PC settings to activate Windows.

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run


05:16 PM
25-Feb-25

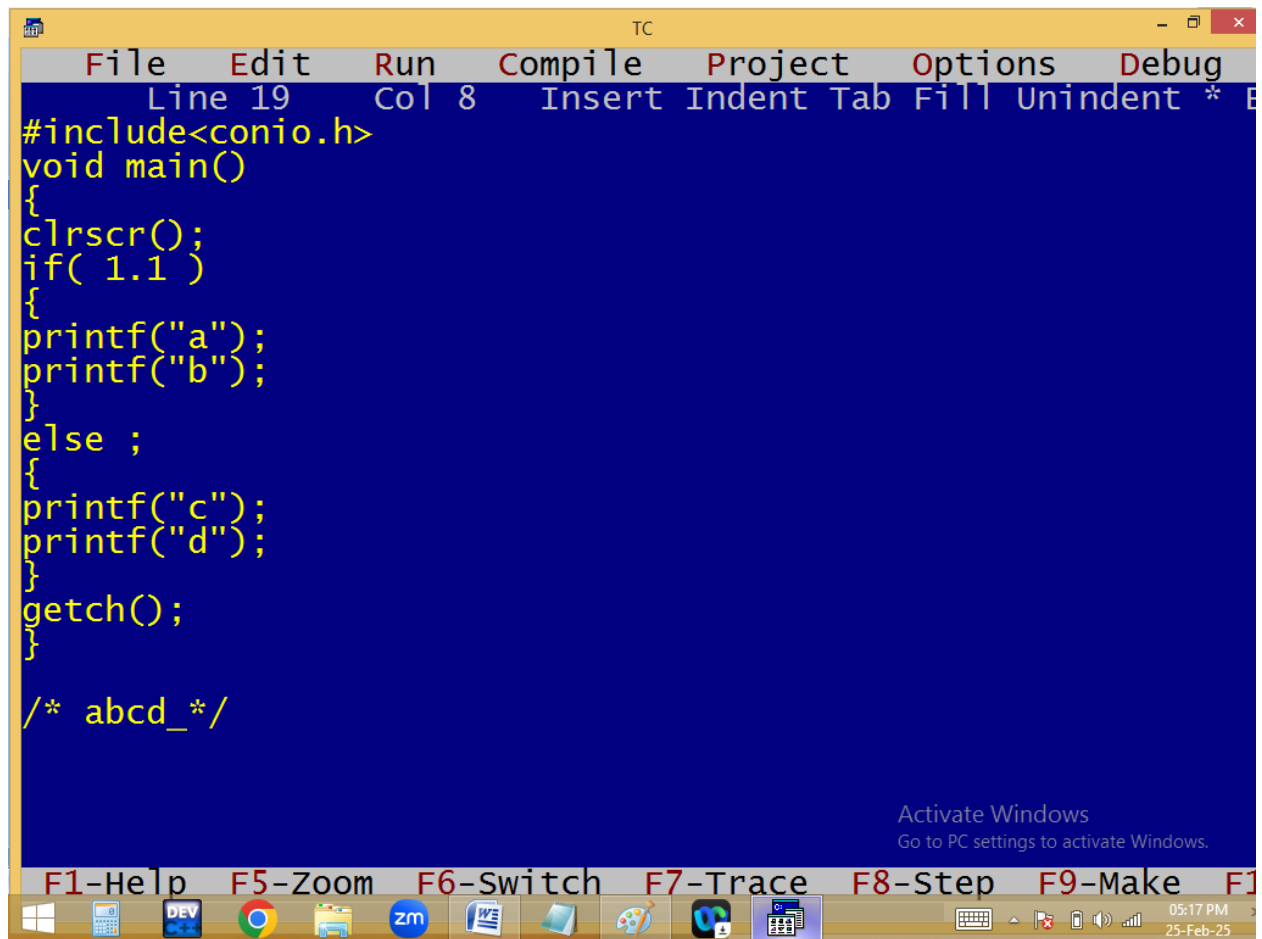

```
TC
File Edit Run Compile Project Options Debug
Line 19 Col 8 Insert Indent Tab Fill Unindent * B
#include<conio.h>
void main()
{
clrscr();
if( 1.1 )
{
printf("a");
printf("b");
}
else ;
{
printf("c");
printf("d");
}
getch();
}

/* abcd_*/

Activate Windows
Go to PC settings to activate Windows.
F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Run
05:17 PM
25-Feb-25
```

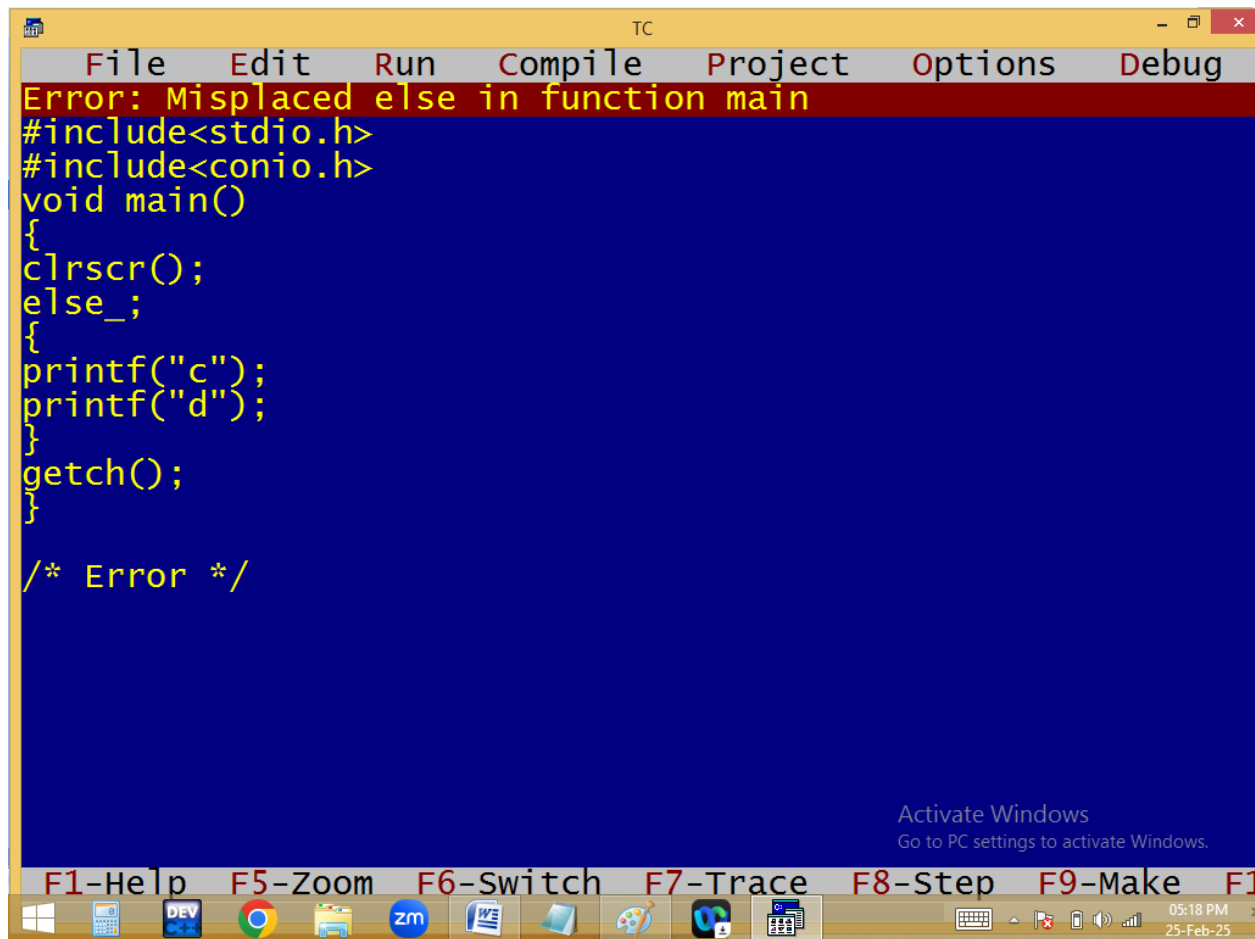


The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error message banner at the top reads "Error: Misplaced else in function main". The code editor has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
else_
{
printf("c");
printf("d");
}
getch();
}

/* Error */
```

At the bottom right of the editor, there is a message: "Activate Windows Go to PC settings to activate Windows." Below the code editor is a toolbar with function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". The Windows taskbar is visible at the very bottom, showing icons for the Start menu, Task View, File Explorer, and several other applications. The system clock in the bottom right corner shows "05:18 PM" and "25-Feb-25".

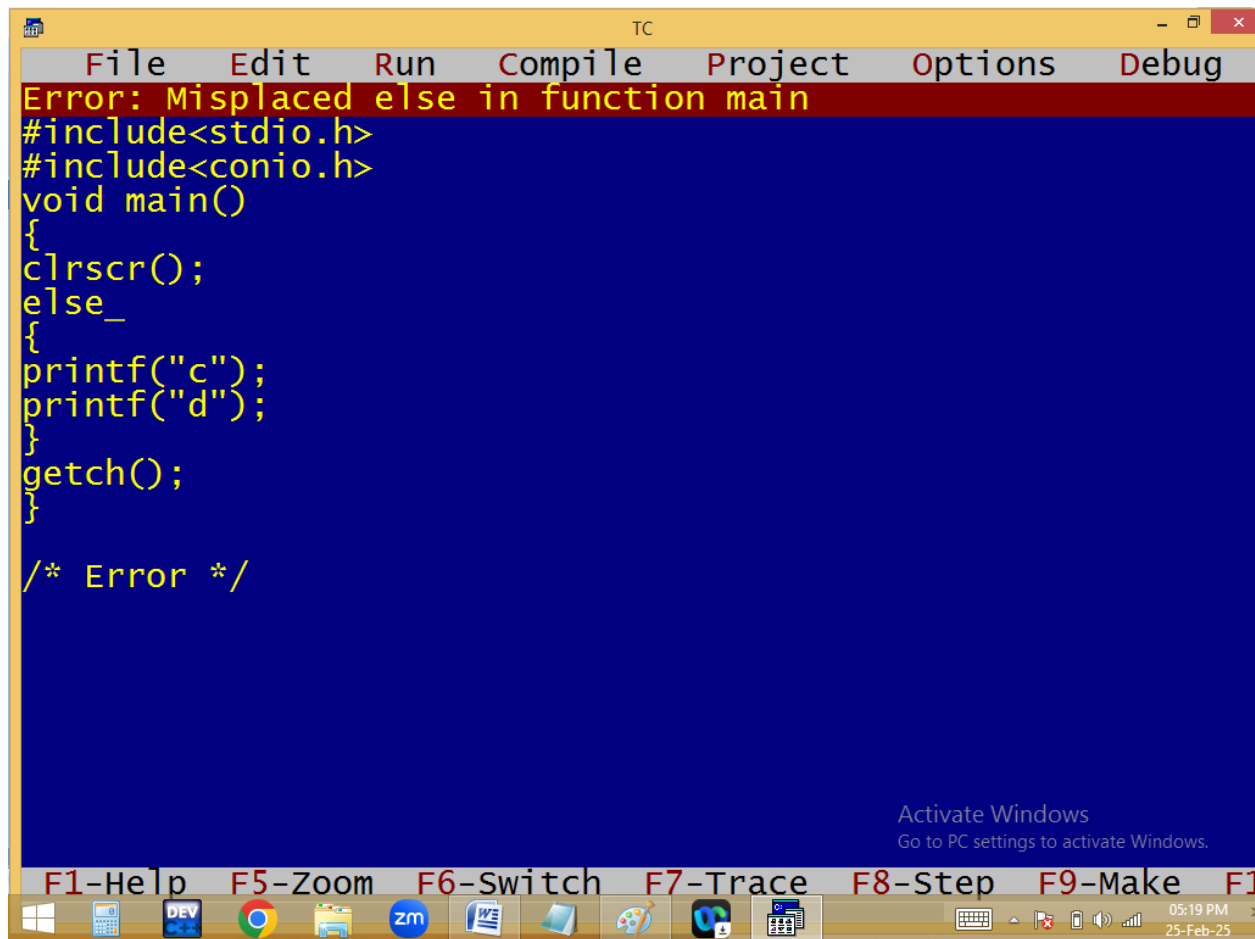


The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error message banner at the top reads "Error: Misplaced else in function main". The code editor has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
else_
{
printf("c");
printf("d");
}
getch();
}

/* Error */
```

At the bottom right of the editor, there is a message: "Activate Windows Go to PC settings to activate Windows." Below the editor, a toolbar contains function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". The Windows taskbar at the very bottom shows various application icons, including the Start button, File Explorer, and several other programs. The system clock in the bottom right corner displays "05:19 PM" and "25-Feb-25".

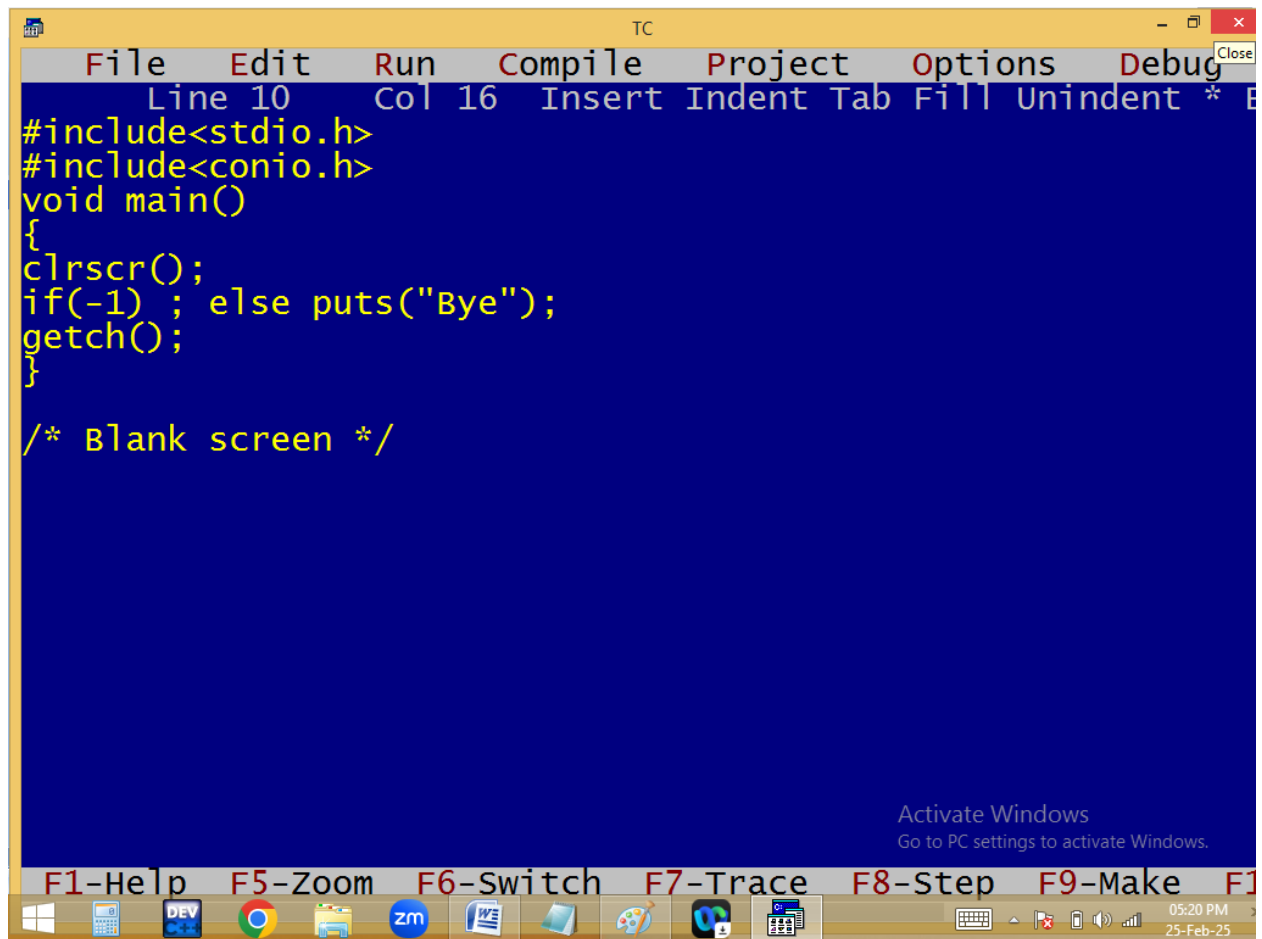


The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 10", "Col 16", and lists editing actions: "Insert", "Indent", "Tab", "Fill", "Unindent", and "Comment". The code editor has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if(-1) ; else puts("Bye");
getch();
}

/* Blank screen */
```

At the bottom of the code editor, there is a message: "Activate Windows. Go to PC settings to activate Windows." Below the code editor is a toolbar with function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run". The Windows taskbar is visible at the very bottom, showing icons for the Start menu, Task View, File Explorer, Google Chrome, Zoom, Word, and other applications. The system clock in the bottom right corner shows "05:20 PM" and "25-Feb-25".

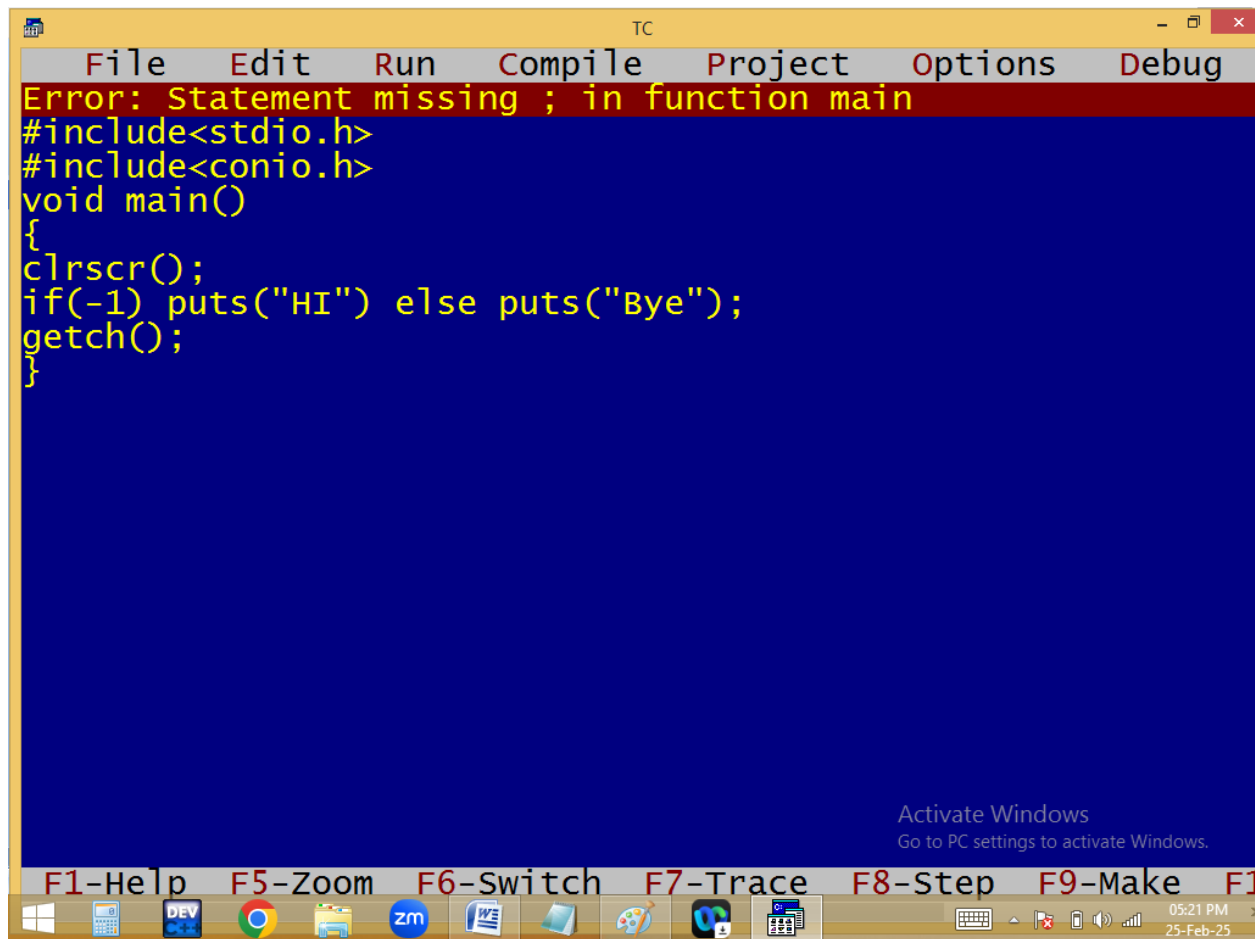


The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The main editing area has a blue background and displays the following C code:

```
Error: Statement missing ; in function main
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if(-1) puts("HI") else puts("Bye");
getch();
}
```

An error message, "Error: Statement missing ; in function main", is displayed at the top of the code area in red and yellow text. The code itself is in yellow text. The code includes headers for `stdio.h` and `conio.h`, defines a `main` function, clears the screen, prints "HI" if the condition `-1` is true, prints "Bye" otherwise, and waits for a key press before exiting.

At the bottom of the IDE window, there is a status bar with the text "Activate Windows Go to PC settings to activate Windows." and a row of function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Run".


The Windows taskbar is visible at the very bottom, showing icons for the Start menu, Task View, File Explorer, Google Chrome, Zoom, Word, and other applications. The system clock shows "05:21 PM" and "25-Feb-25".

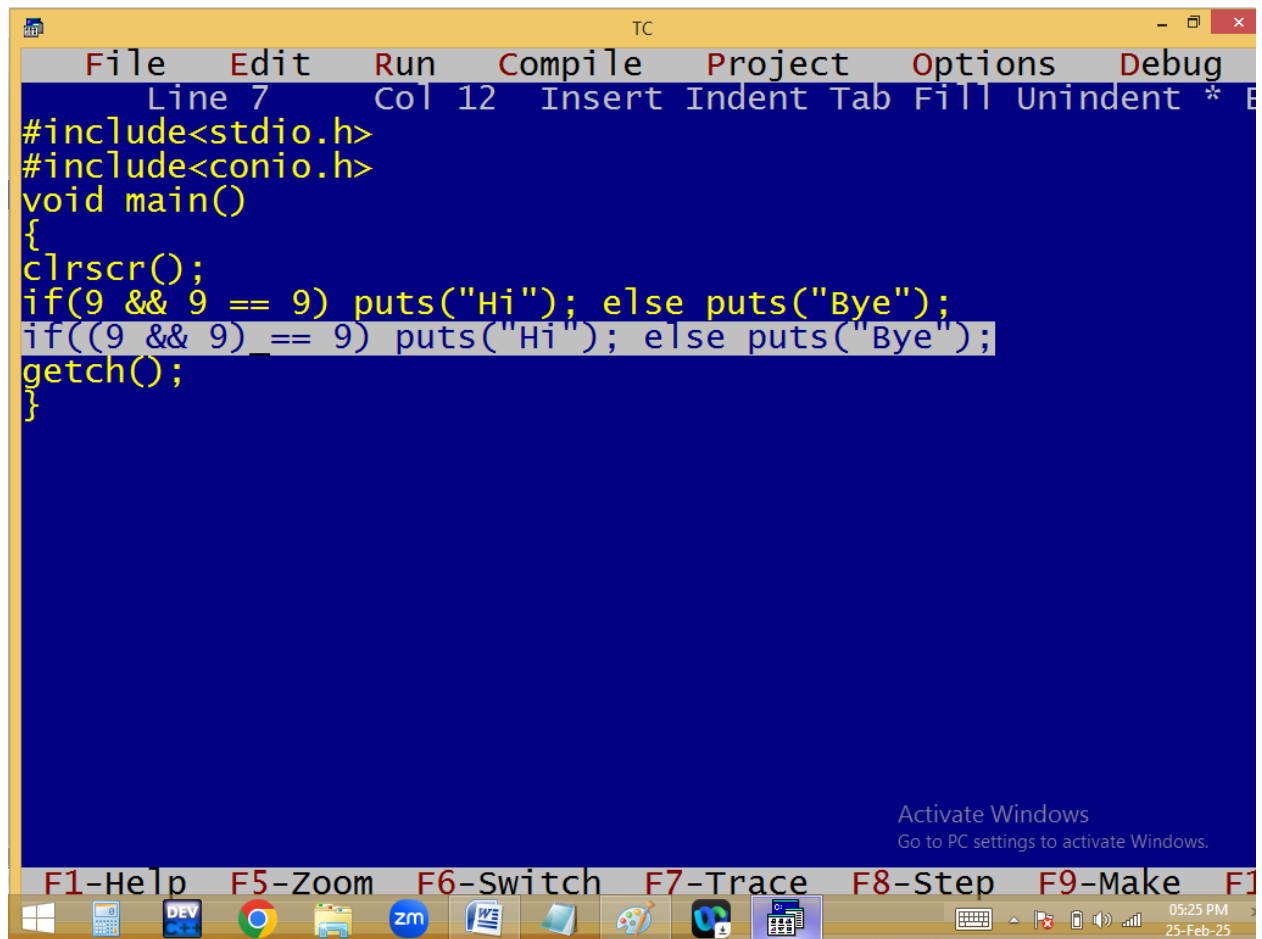

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates "Line 7 Col 12 Insert Indent Tab Fill Unindent *". The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if(9 && 9 == 9) puts("Hi"); else puts("Bye");
if((9 && 9) == 9) puts("Hi"); else puts("Bye");
getch();
}
```

The second if statement, `if((9 && 9) == 9) puts("Hi"); else puts("Bye");`, is highlighted with a light blue selection. At the bottom of the IDE window, there is a text prompt: "Activate Windows Go to PC settings to activate Windows." Below the code editor, a toolbar contains function key shortcuts: F1-Help, F5-Zoom, F6-Switch, F7-Trace, F8-Step, F9-Make, and F10-Run. The Windows taskbar at the very bottom shows various application icons and the system clock displaying "05:25 PM 25-Feb-25".

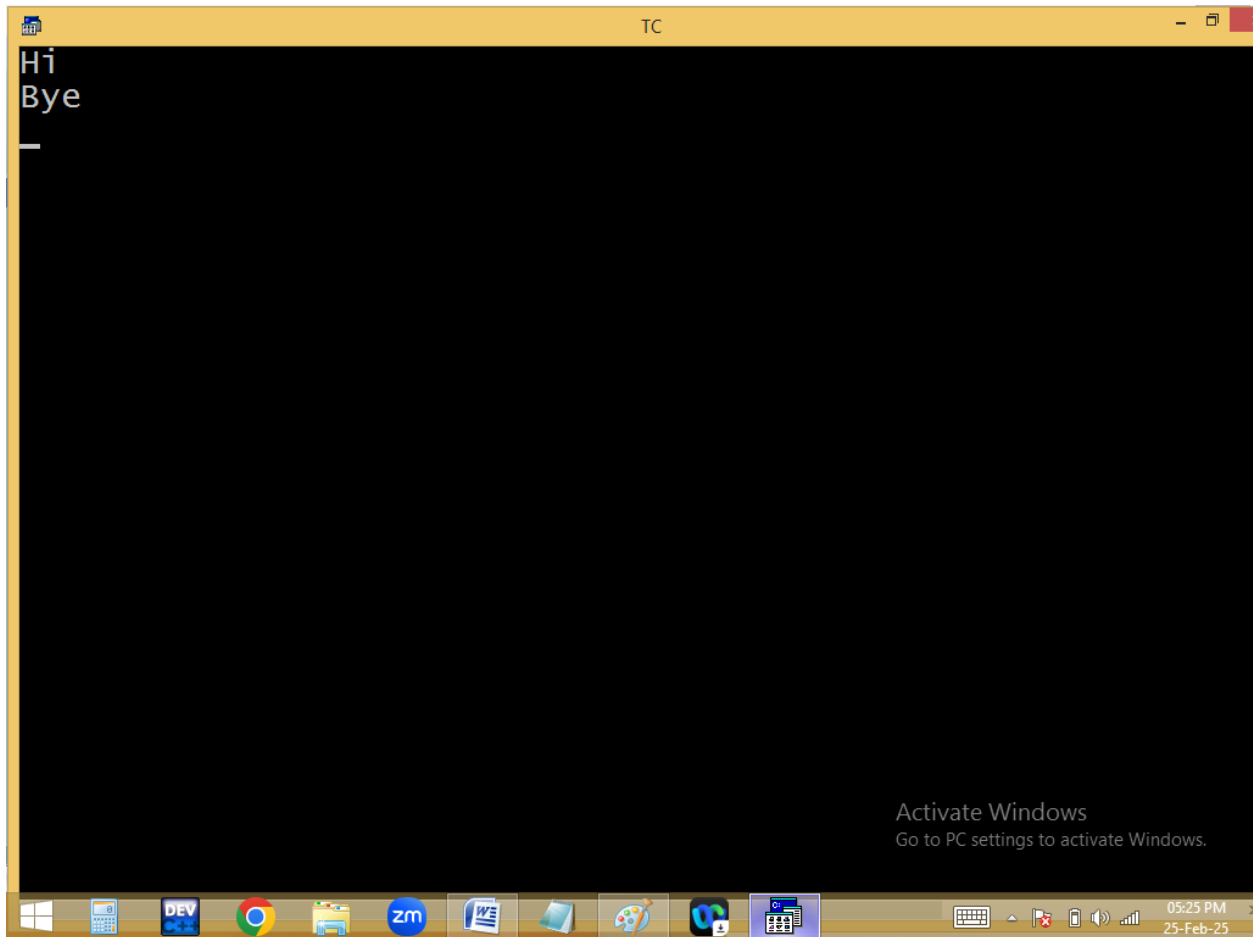


$$\begin{array}{c} \text{&\&} \\ \hline \end{array}$$

$$\text{if} \left(\begin{array}{c} \text{9} \text{ \&\& } \text{9} \\ \hline \end{array} \right) == 9 \text{) puts("Hi"); else puts("Bye");}$$

$$\begin{array}{c} \text{&\&} \\ \hline \end{array} \quad \text{false} \quad \text{1} == 9$$

Note: == got first priority


In turbo c/c++:

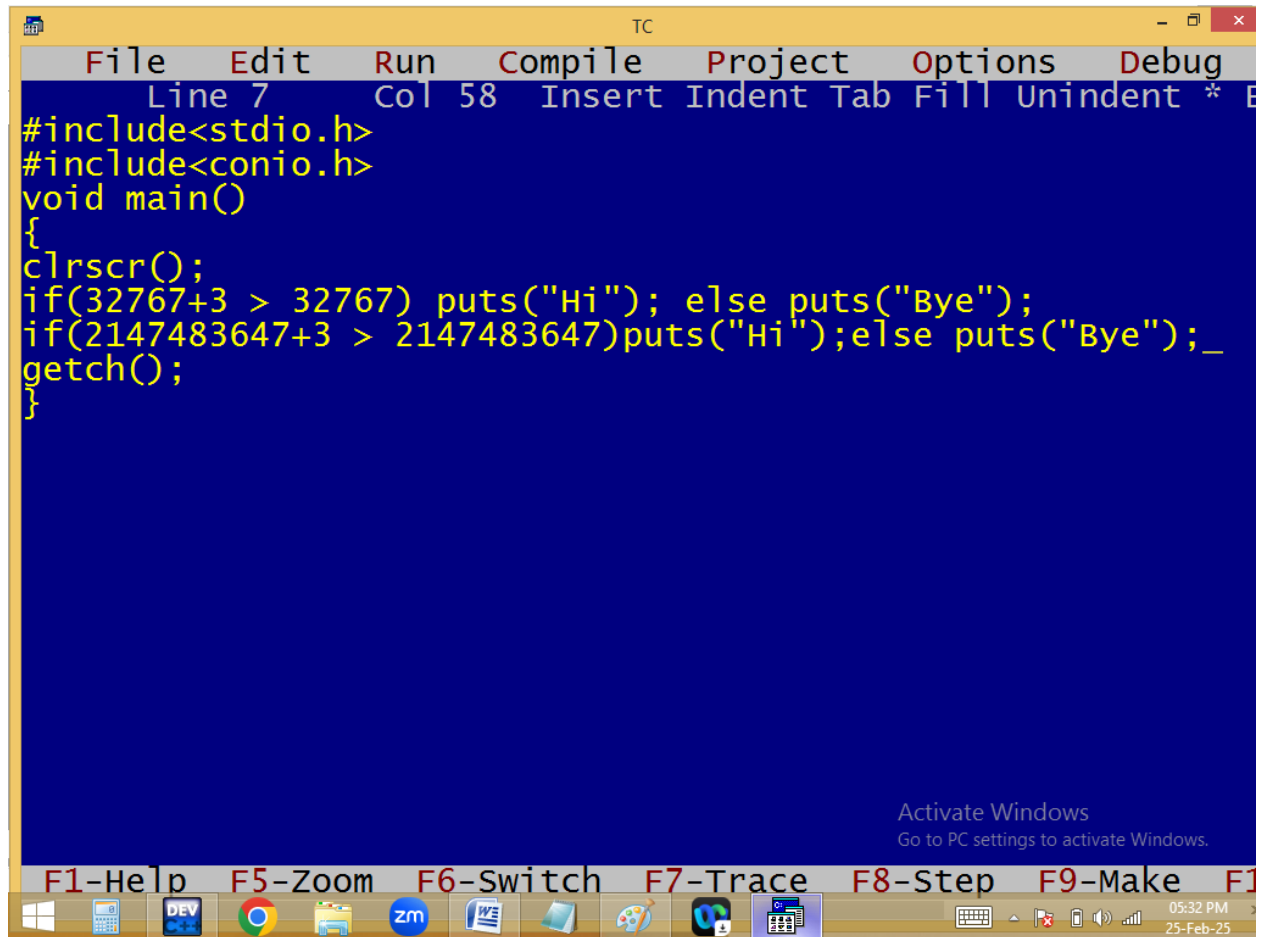


```
TC
File Edit Run Compile Project Options Debug
Line 7 Col 58 Insert Indent Tab Fill Unindent * B
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if(32767+3 > 32767) puts("Hi"); else puts("Bye");
if(2147483647+3 > 2147483647)puts("Hi");else puts("Bye");_
getch();
}


Activate Windows
Go to PC settings to activate Windows.


F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F1
05:32 PM
25-Feb-25
```

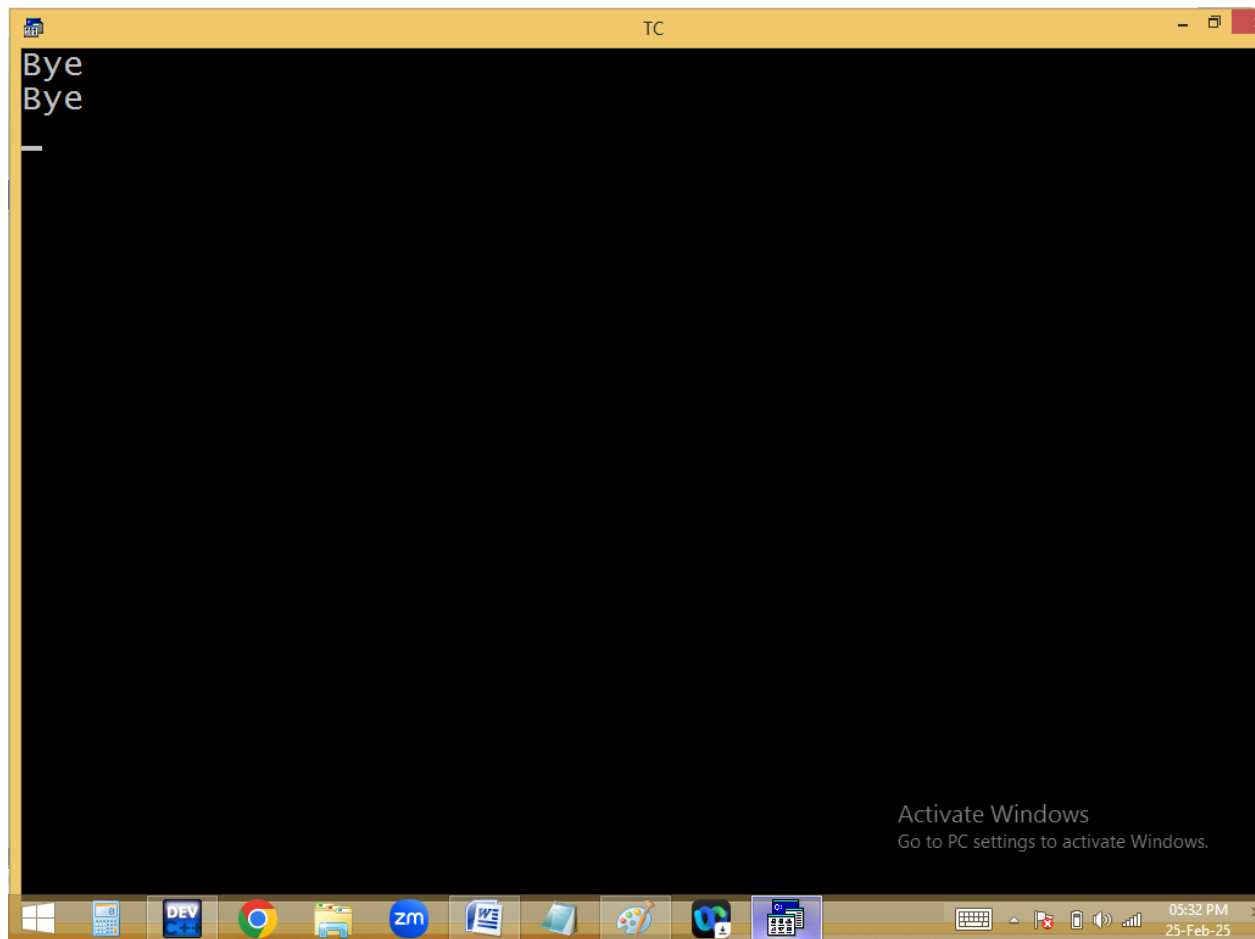

In 32 bit / online compilers:

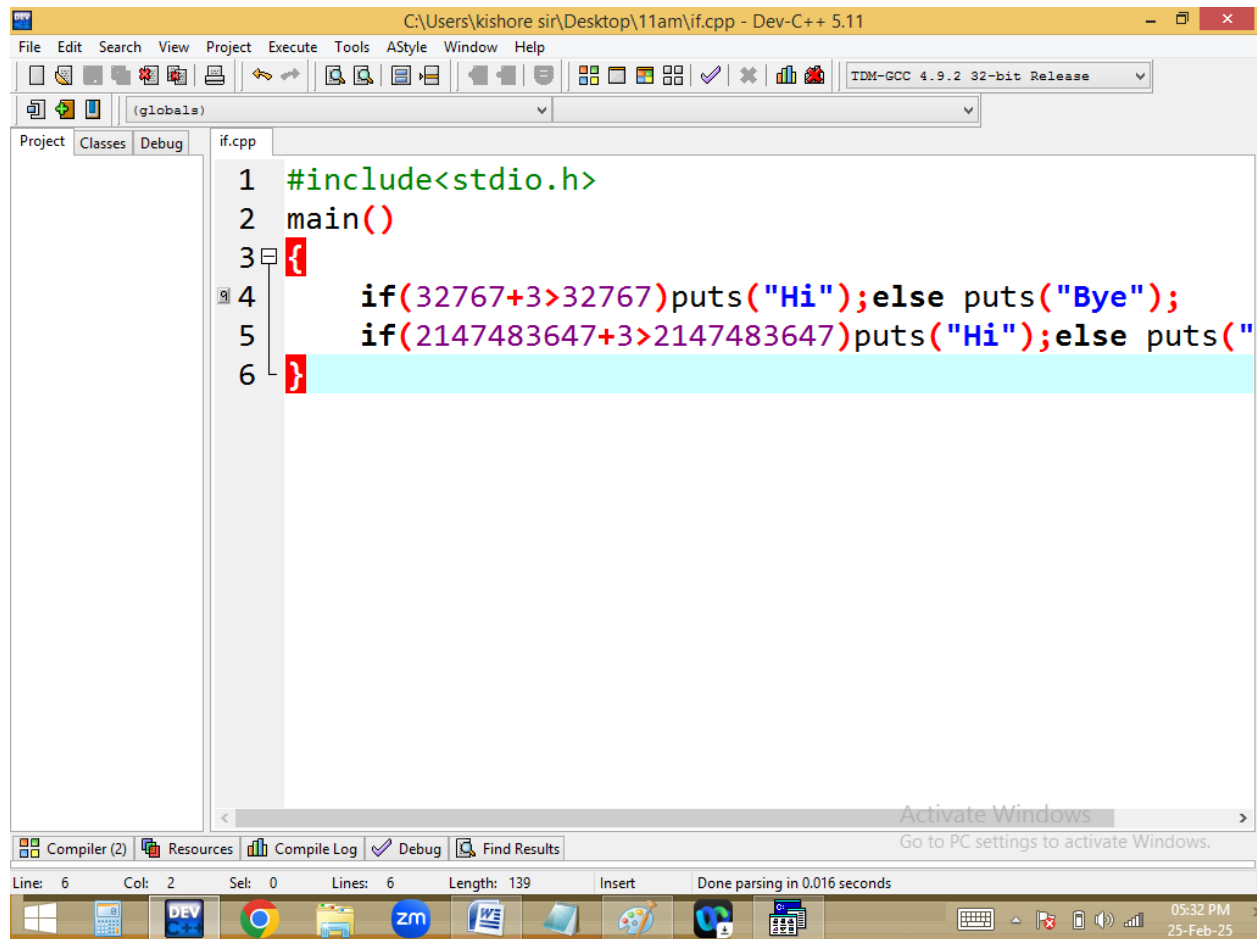

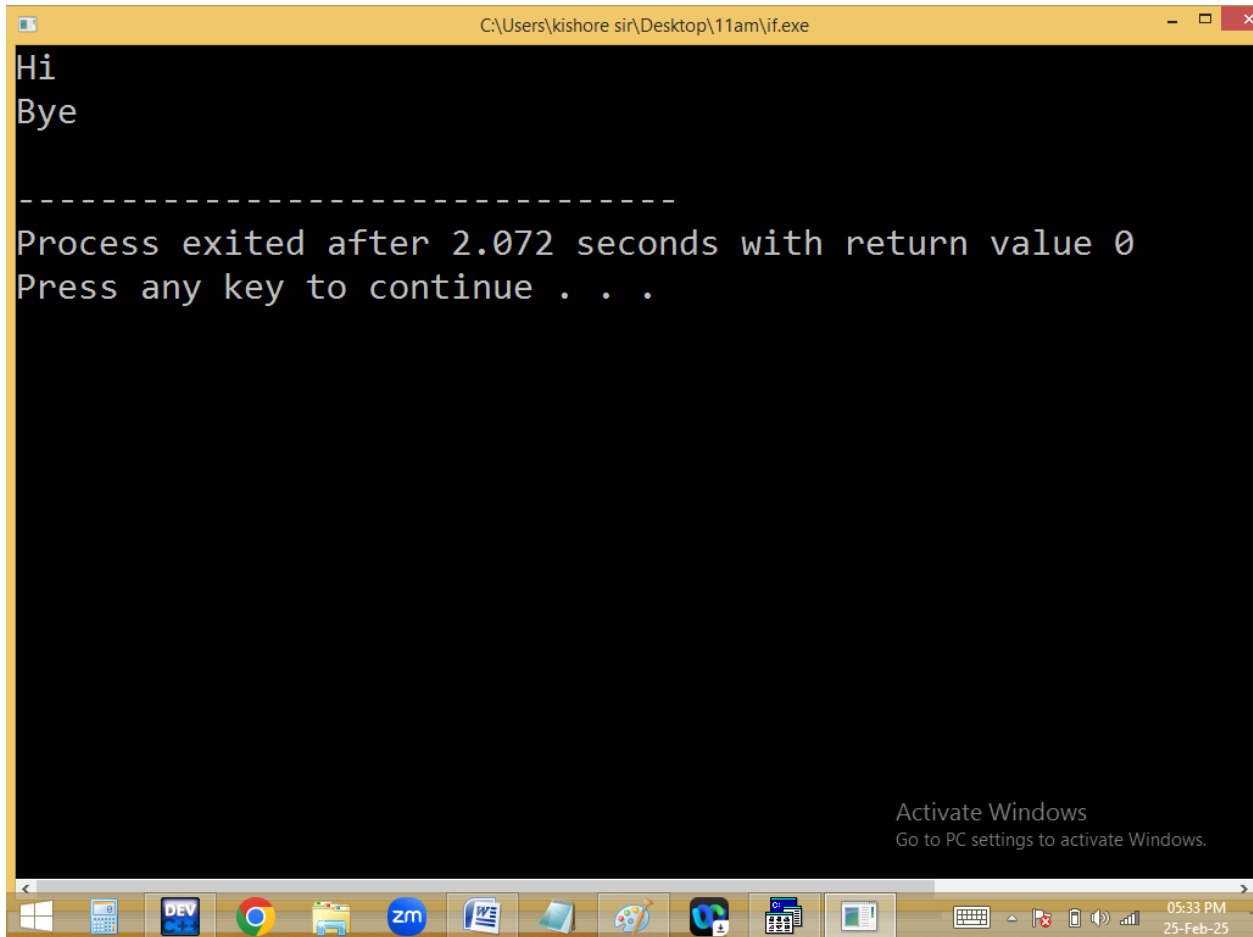


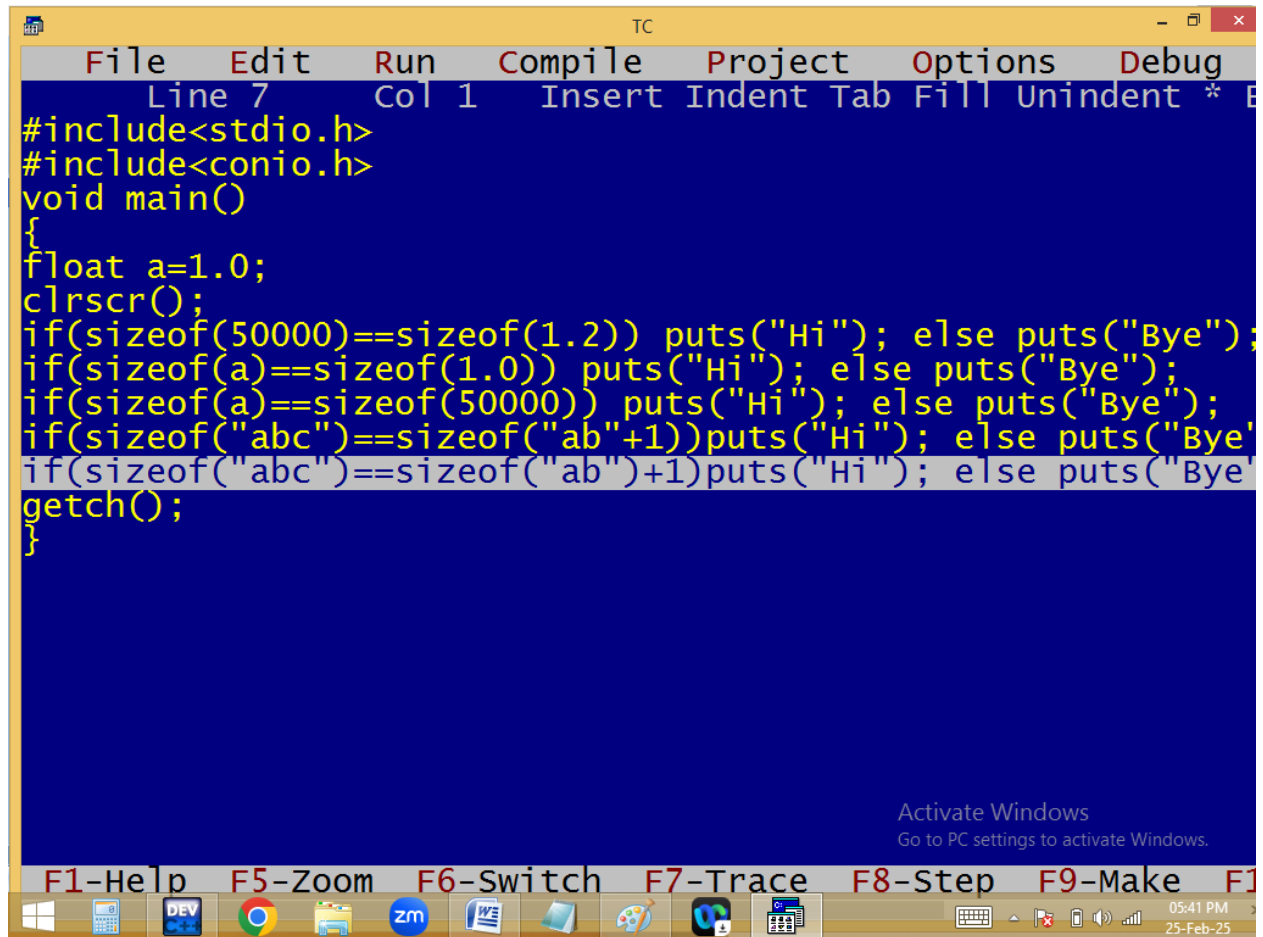


The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 7", "Col 1", and a list of actions: "Insert", "Indent", "Tab", "Fill", "Unindent", and a cursor icon. The main editing area has a dark blue background with yellow text. The code is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
float a=1.0;
clrscr();
if(sizeof(50000)==sizeof(1.2)) puts("Hi"); else puts("Bye");
if(sizeof(a)==sizeof(1.0)) puts("Hi"); else puts("Bye");
if(sizeof(a)==sizeof(50000)) puts("Hi"); else puts("Bye");
if(sizeof("abc")==sizeof("ab")+1)puts("Hi"); else puts("Bye");
if(sizeof("abc")==sizeof("ab")+1)puts("Hi"); else puts("Bye");
getch();
}
```

At the bottom of the IDE window, there is a row of function key shortcuts: "F1-Help", "F5-Zoom", "F6-Switch", "F7-Trace", "F8-Step", "F9-Make", and "F10-Exit". Below this is the Windows taskbar, which includes icons for the Start menu, Task View, File Explorer, Google Chrome, Zoom, Word, and other applications. The system tray on the right shows the time as "05:41 PM" and the date as "25-Feb-25". An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.

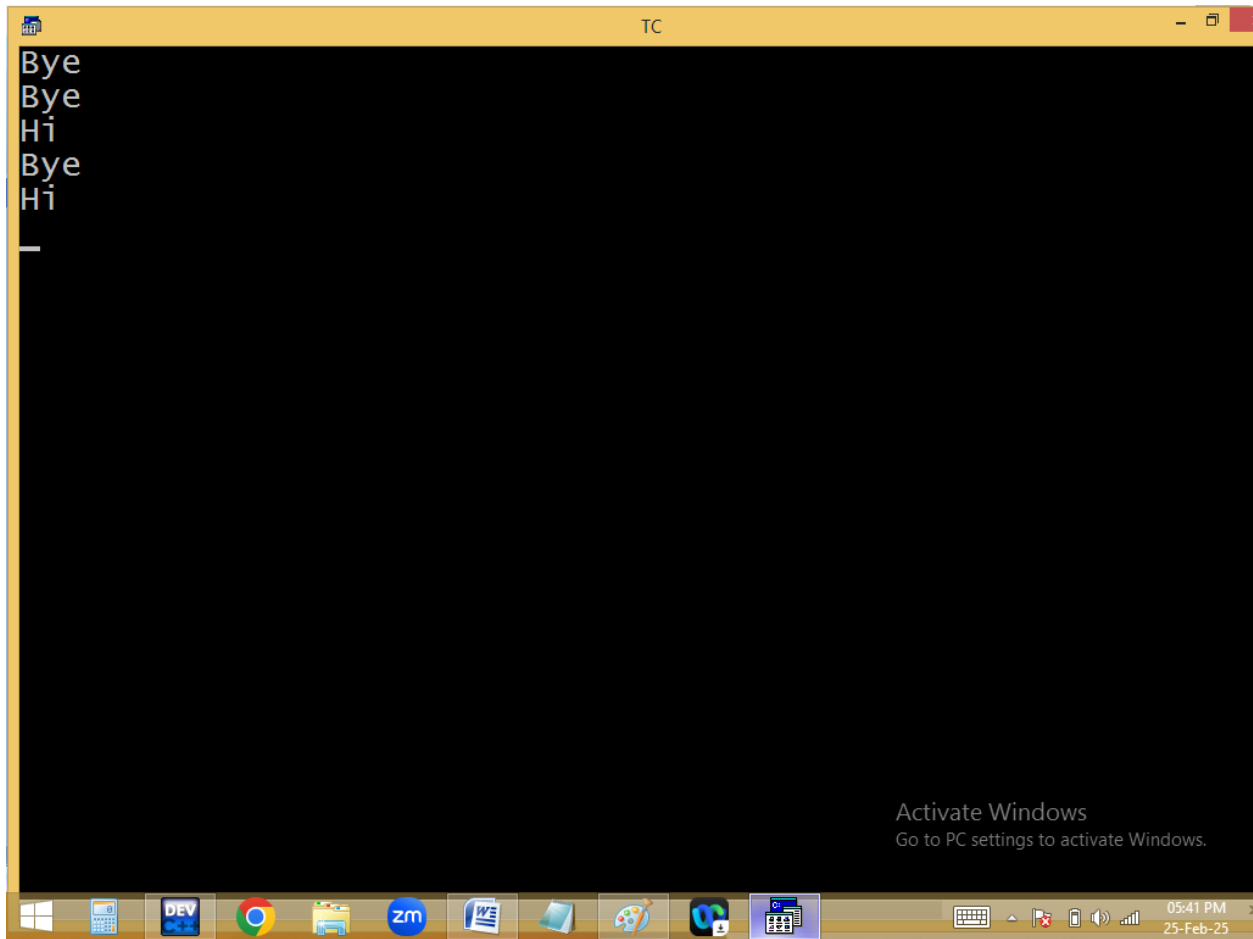


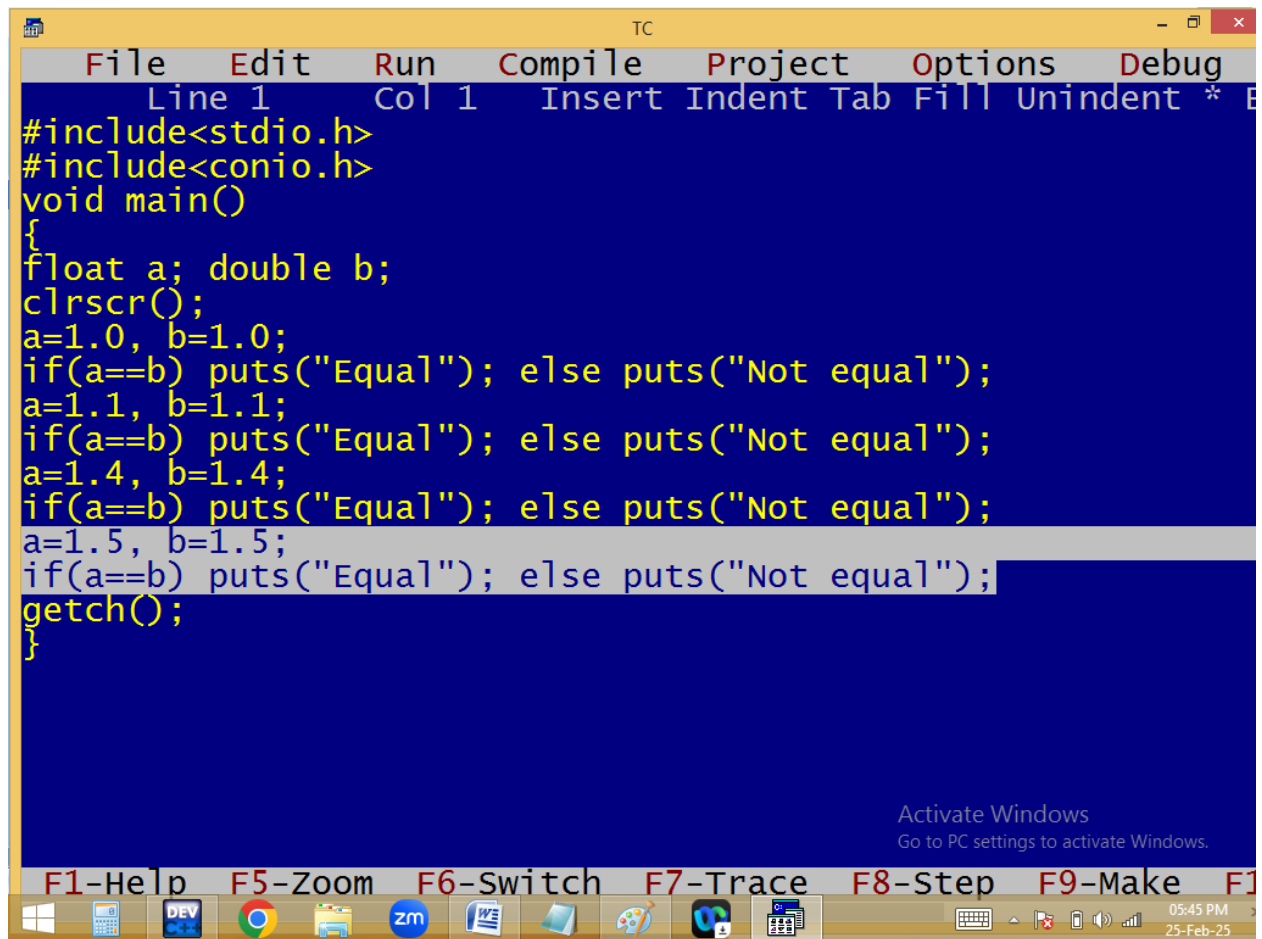


The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates "Line 1", "Col 1", and "Insert" mode. The code editor has a dark blue background with yellow text. The code is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
float a; double b;
clrscr();
a=1.0, b=1.0;
if(a==b) puts("Equal"); else puts("Not equal");
a=1.1, b=1.1;
if(a==b) puts("Equal"); else puts("Not equal");
a=1.4, b=1.4;
if(a==b) puts("Equal"); else puts("Not equal");
a=1.5, b=1.5;
if(a==b) puts("Equal"); else puts("Not equal");
getch();
}
```

At the bottom of the IDE, there is a row of function key shortcuts: F1-Help, F5-Zoom, F6-Switch, F7-Trace, F8-Step, F9-Make, and F10-Run. The Windows taskbar is visible at the very bottom, showing icons for the Start menu, Task View, File Explorer, Google Chrome, Zoom, and other applications. The system clock in the bottom right corner shows "05:45 PM" and "25-Feb-25".

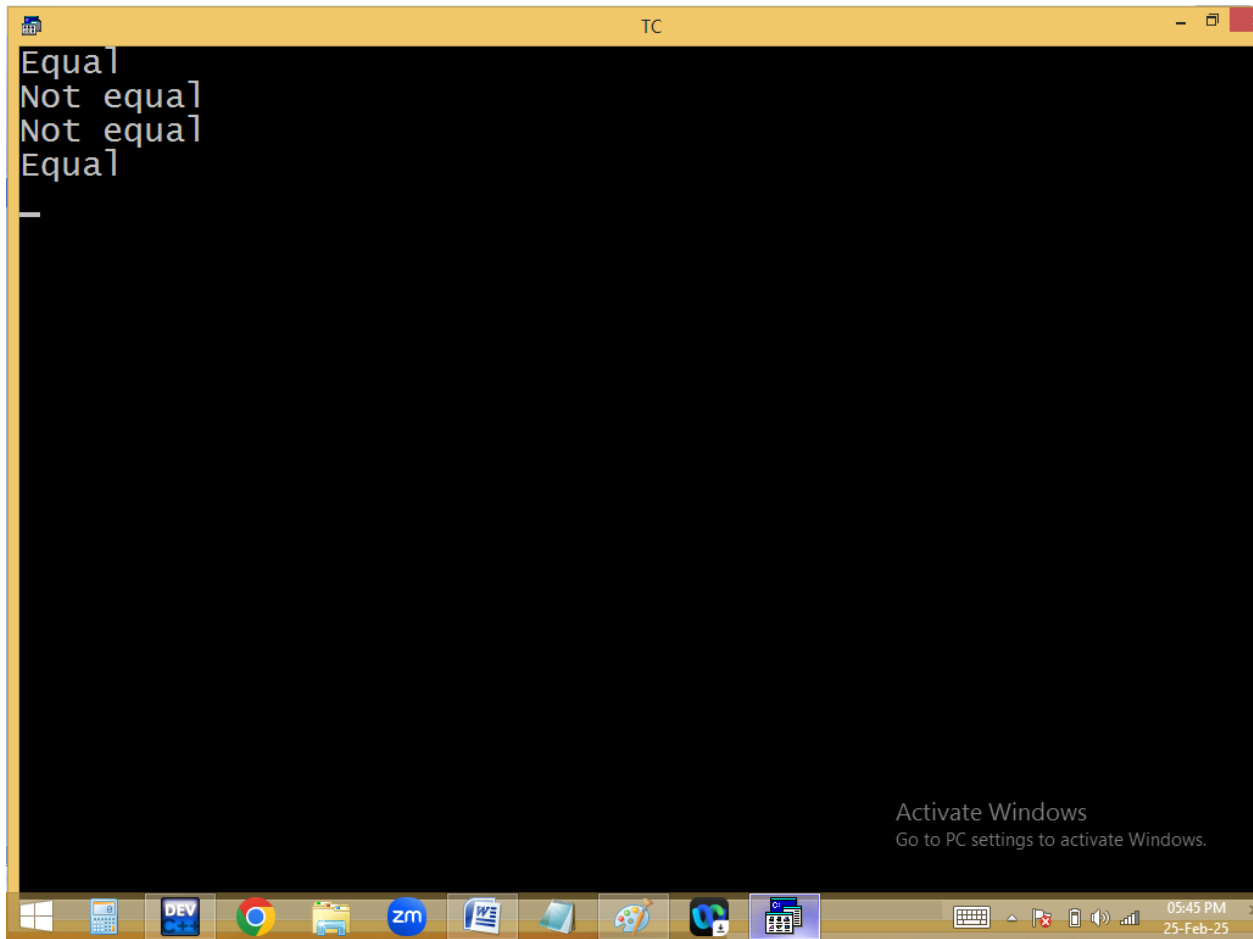

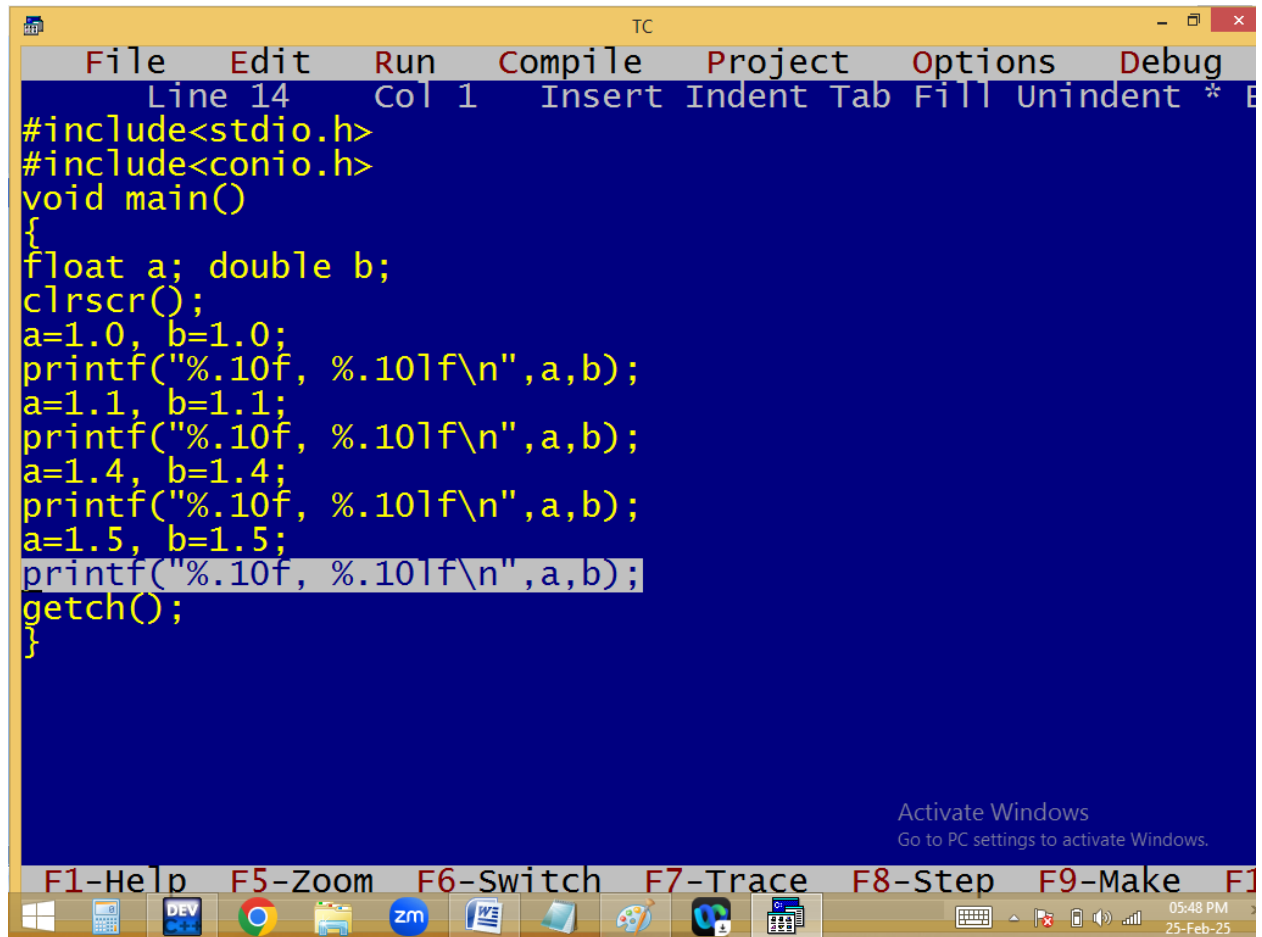

```
TC
File Edit Run Compile Project Options Debug
Line 14 Col 1 Insert Indent Tab Fill Unindent * B
#include<stdio.h>
#include<conio.h>
void main()
{
float a; double b;
clrscr();
a=1.0, b=1.0;
printf("%.10f, %.10lf\n",a,b);
a=1.1, b=1.1;
printf("%.10f, %.10lf\n",a,b);
a=1.4, b=1.4;
printf("%.10f, %.10lf\n",a,b);
a=1.5, b=1.5;
printf("%.10f, %.10lf\n",a,b);
getch();
}

Activate Windows
Go to PC settings to activate Windows.

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Menu
05:48 PM
25-Feb-25
```

