



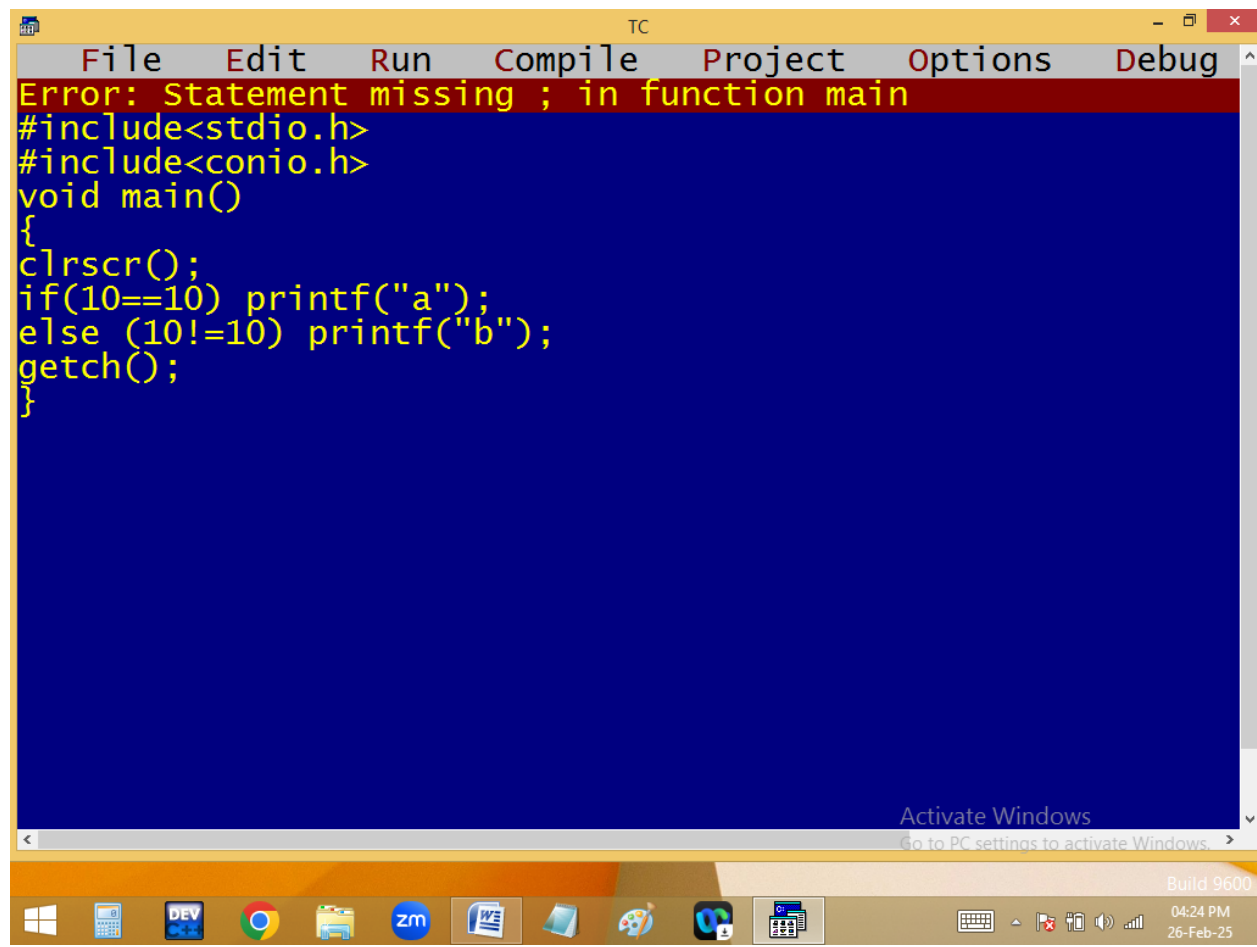


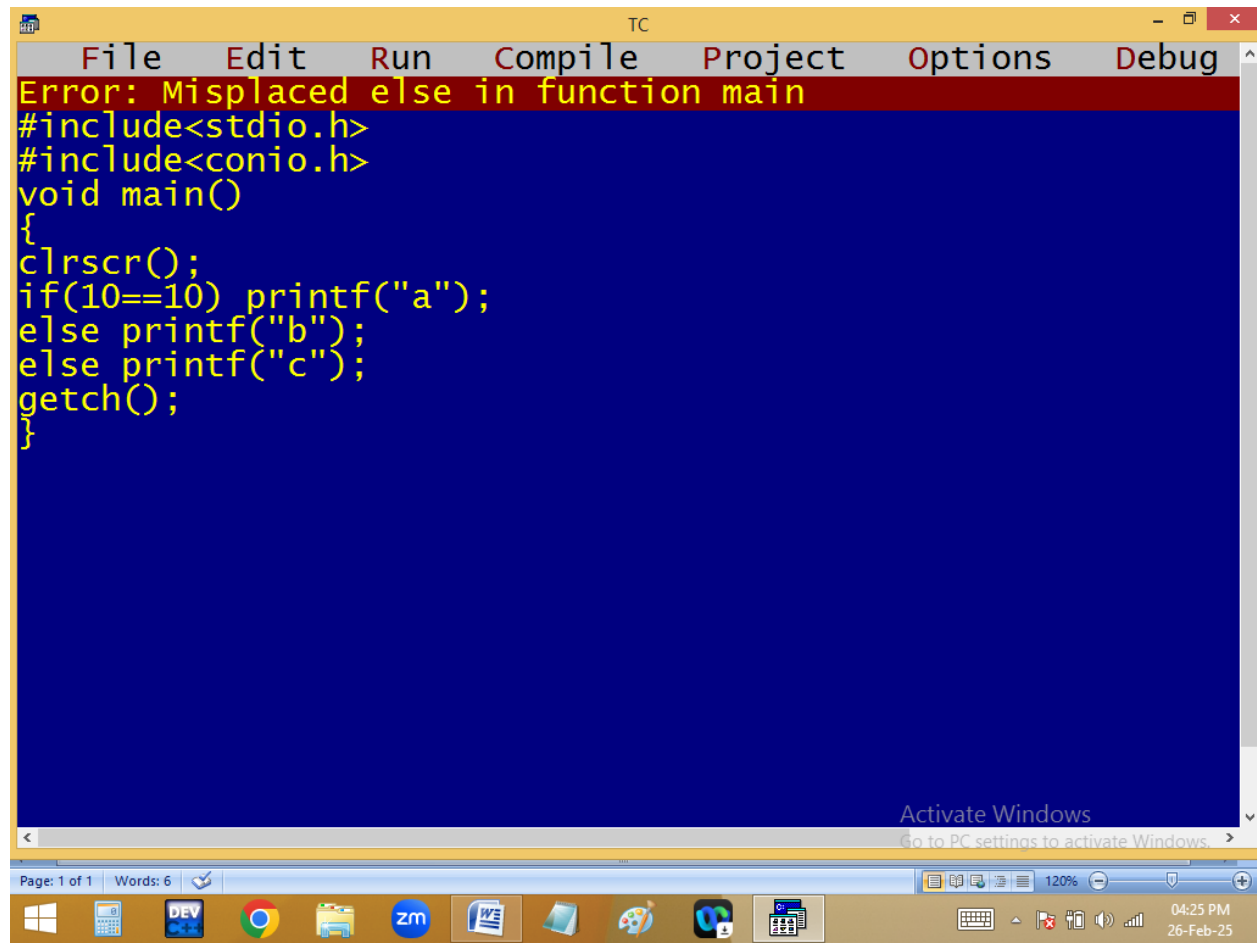

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error message banner at the top reads "Error: Misplaced else in function main". The code editor has a blue background and contains the following C code:


```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if(10==10) printf("a");
else printf("b");
else printf("c");
getch();
}
```

At the bottom of the IDE window, there is a status bar showing "Page: 1 of 1" and "Words: 6". Below the IDE window is the Windows taskbar, which includes icons for the Start menu, Task View, File Explorer, Google Chrome, Zoom, Word, and other applications. The system tray on the right shows the time as 04:25 PM and the date as 26-Feb-25. An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.

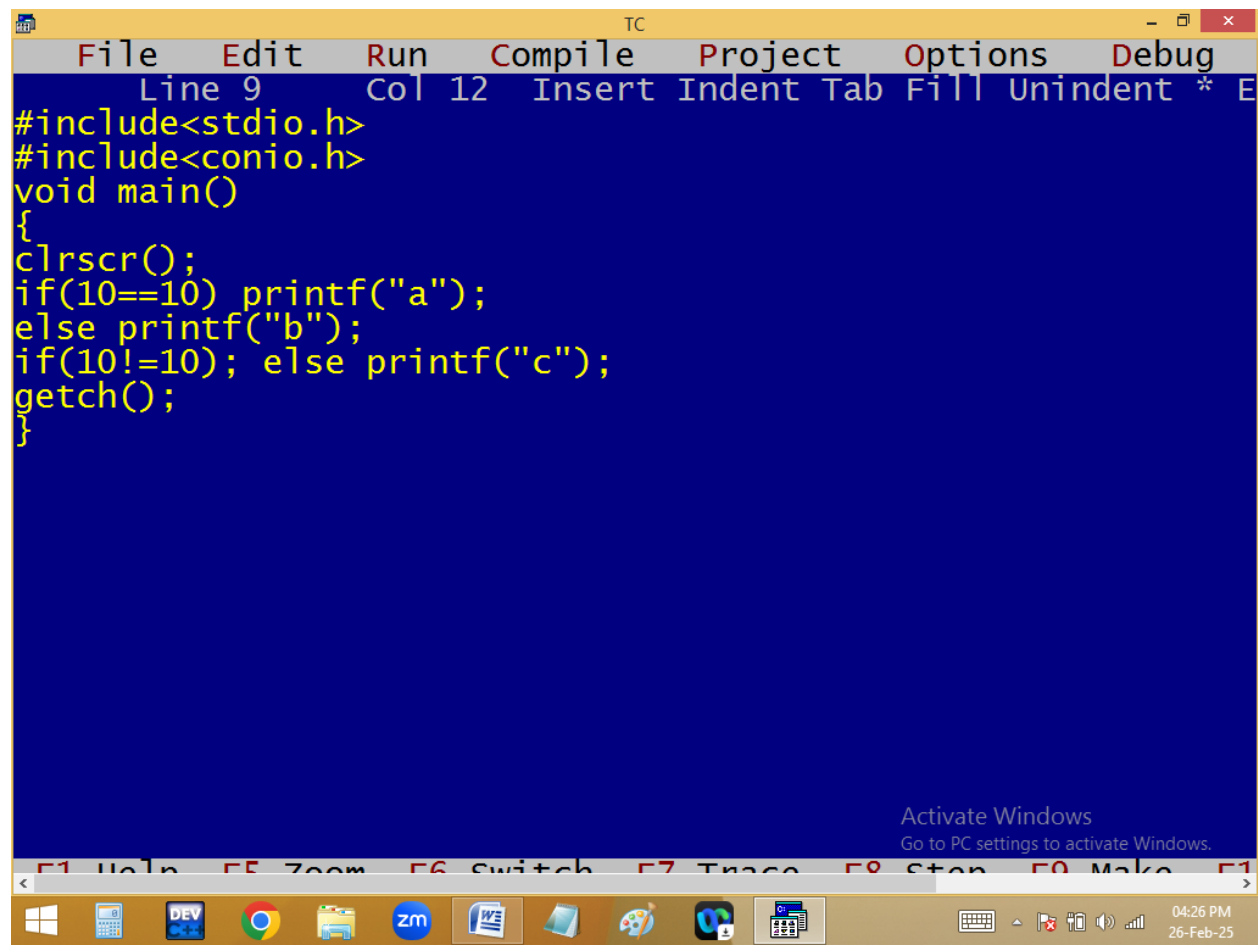


```
TC
File Edit Run Compile Project Options Debug
Line 9 Col 12 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
if(10==10) printf("a");
else printf("b");
if(10!=10); else printf("c");
getch();
}

Activate Windows
Go to PC settings to activate Windows.
F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
```

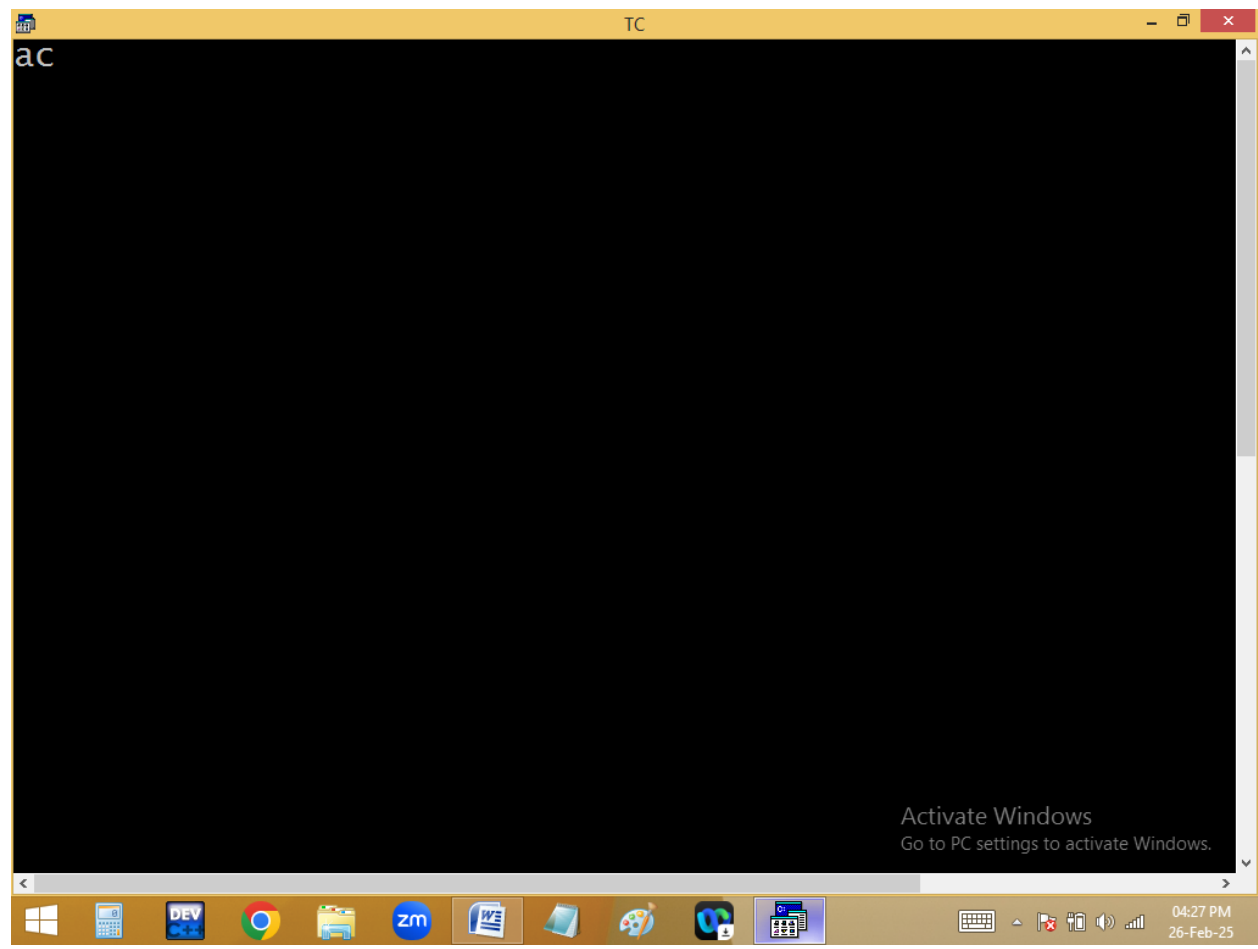


Finding lower case char or not?

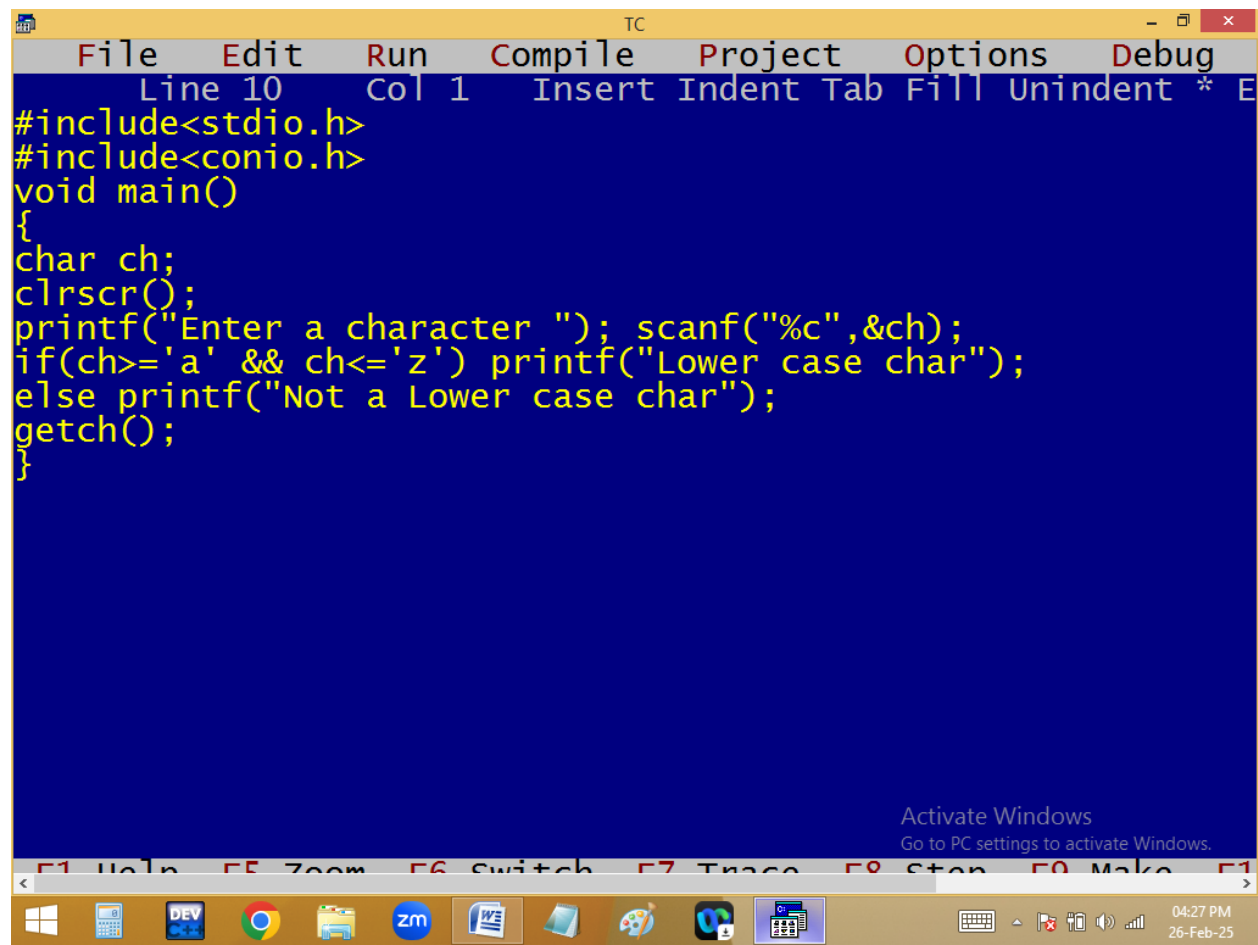


The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, the status bar shows "Line 10", "Col 1", and "Insert Indent Tab Fill Unindent * E". The main editing area has a blue background with yellow text. The code is as follows:


```
#include<stdio.h>
#include<conio.h>
void main()
{
char ch;
clrscr();
printf("Enter a character "); scanf("%c",&ch);
if(ch>='a' && ch<='z') printf("Lower case char");
else printf("Not a Lower case char");
getch();
}
```

At the bottom of the window, there is a taskbar with various icons including Windows, DEV, Chrome, File Explorer, Zoom, Word, and others. The system tray on the right shows the time "04:27 PM" and the date "26-Feb-25". An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.

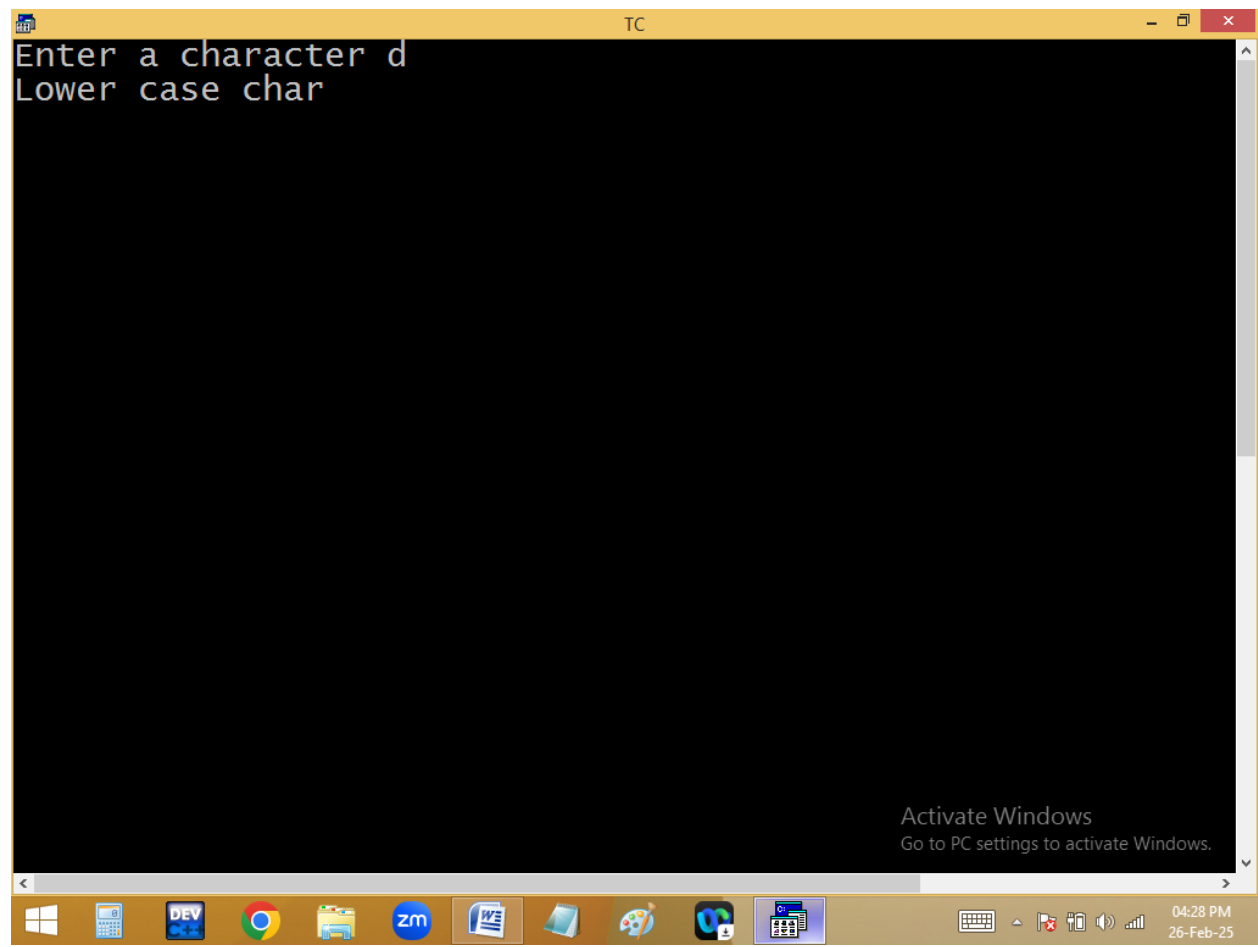

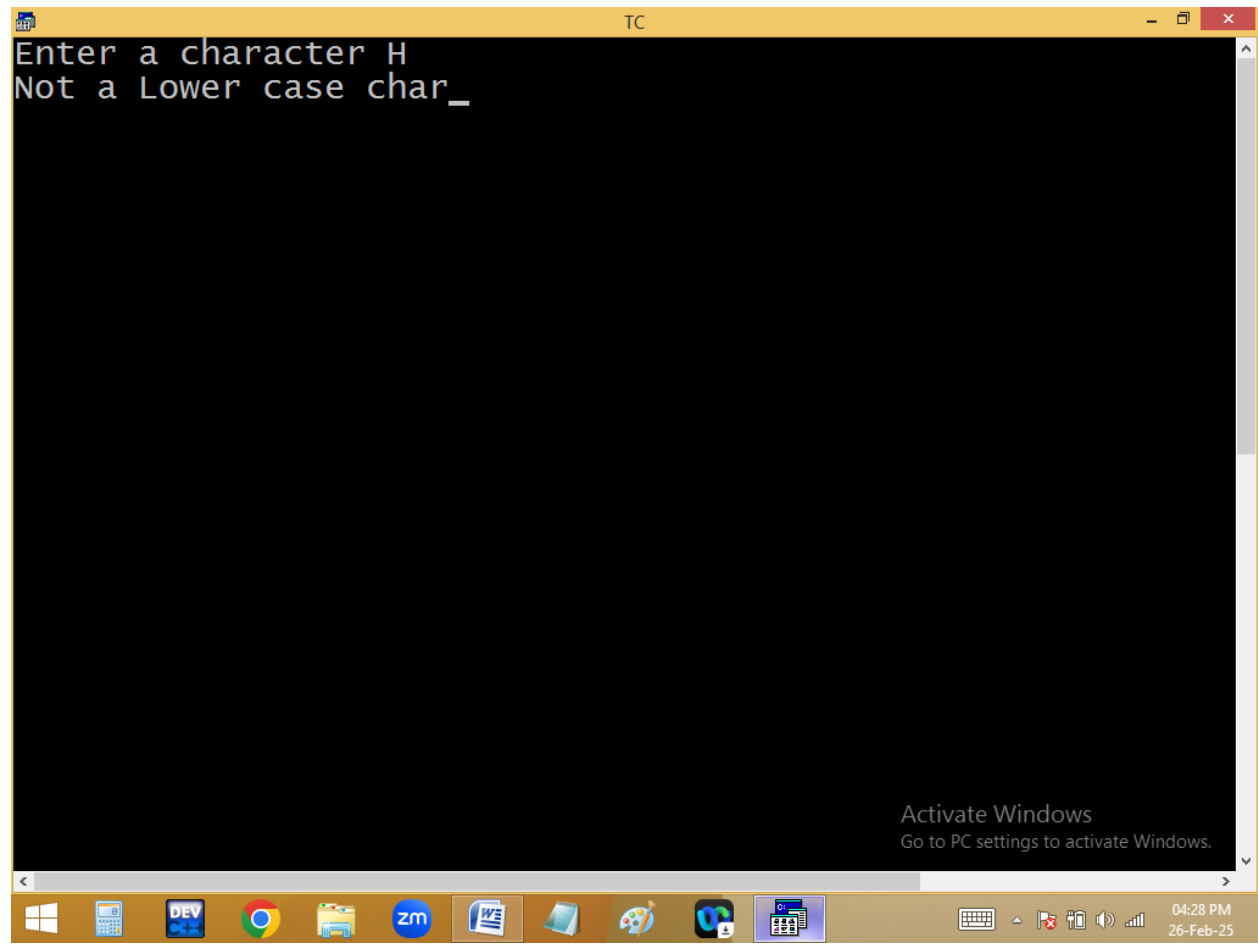


Finding upper case char or not?

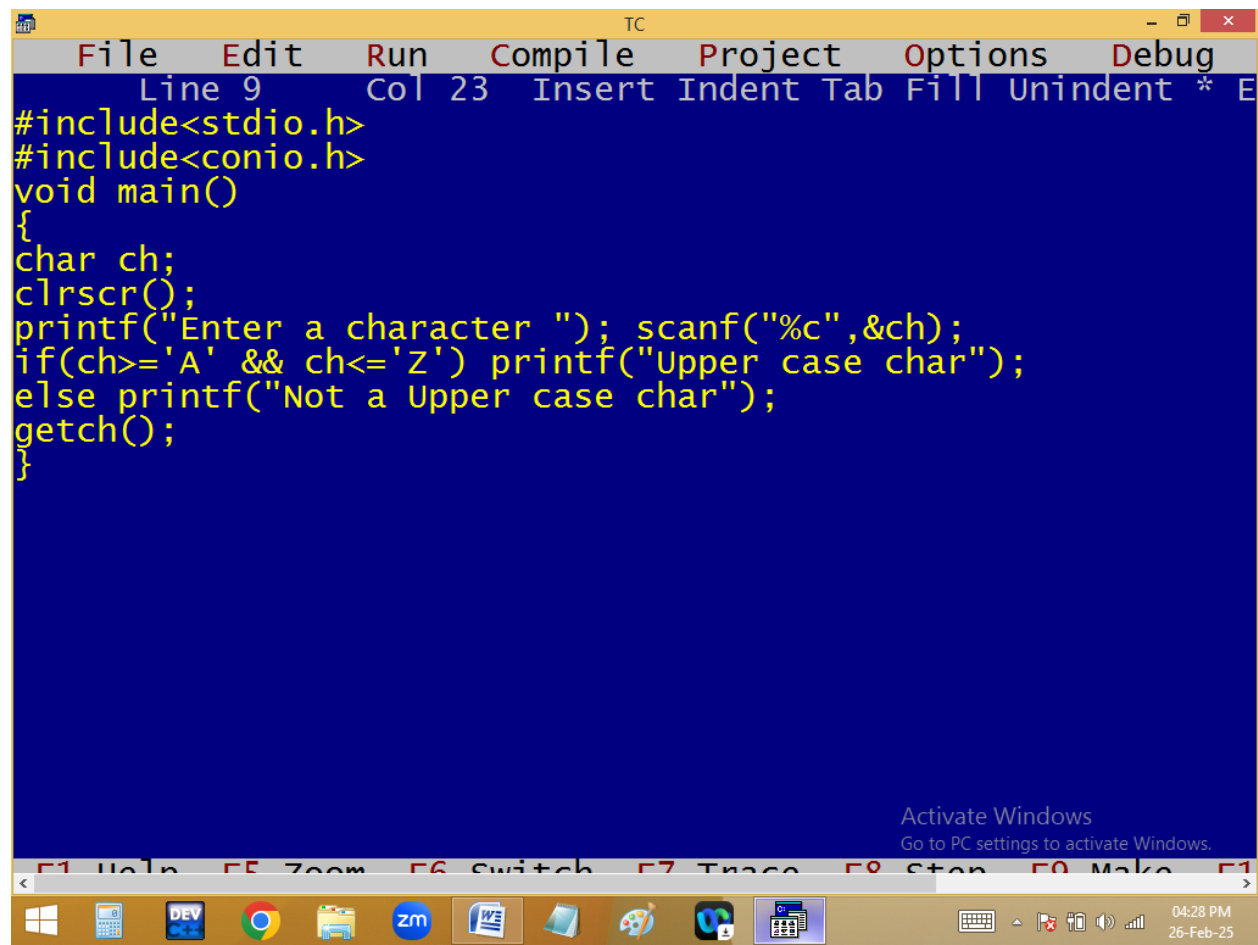


The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, the status bar shows "Line 9", "Col 23", and a list of keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", "*", and "E". The main editing area has a dark blue background with yellow text. The code is as follows:


```
#include<stdio.h>
#include<conio.h>
void main()
{
char ch;
clrscr();
printf("Enter a character "); scanf("%c",&ch);
if(ch>='A' && ch<='Z') printf("Upper case char");
else printf("Not a Upper case char");
getch();
}
```

At the bottom of the window, there is a taskbar with various application icons including Windows Explorer, Dev-C++, Google Chrome, and others. The system tray on the right shows the time as "04:28 PM" and the date as "26-Feb-25". An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.

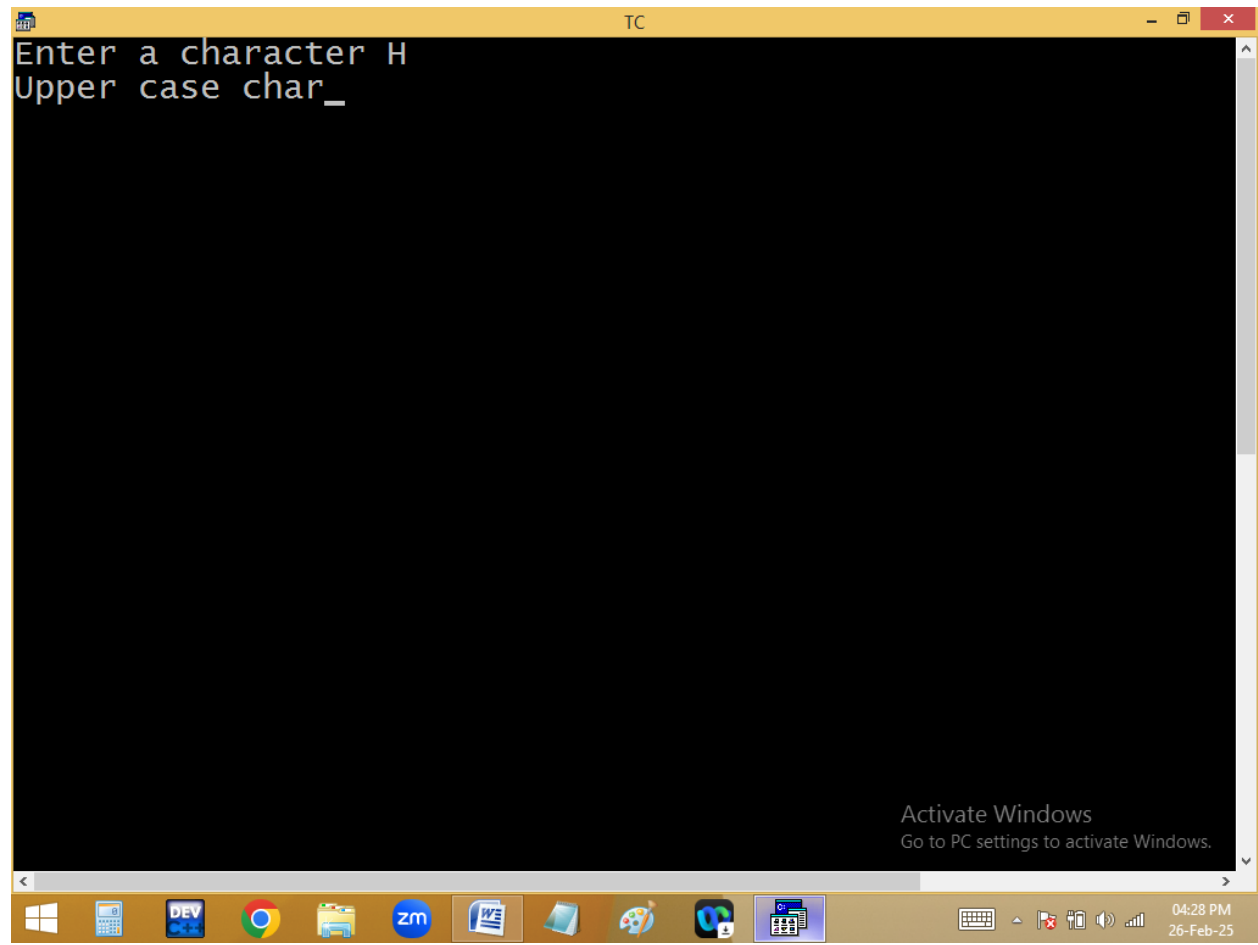

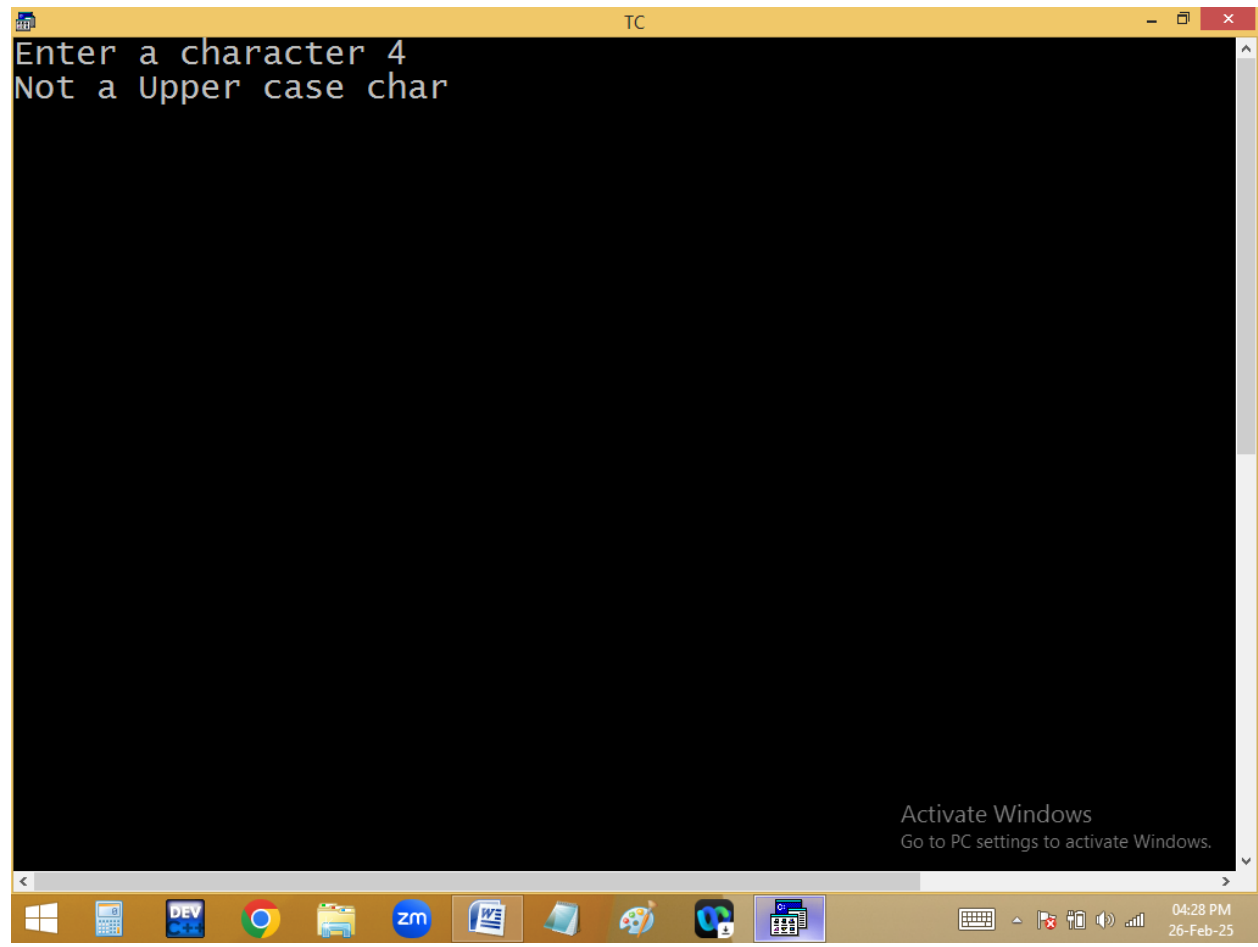

Finding alphabet or not?

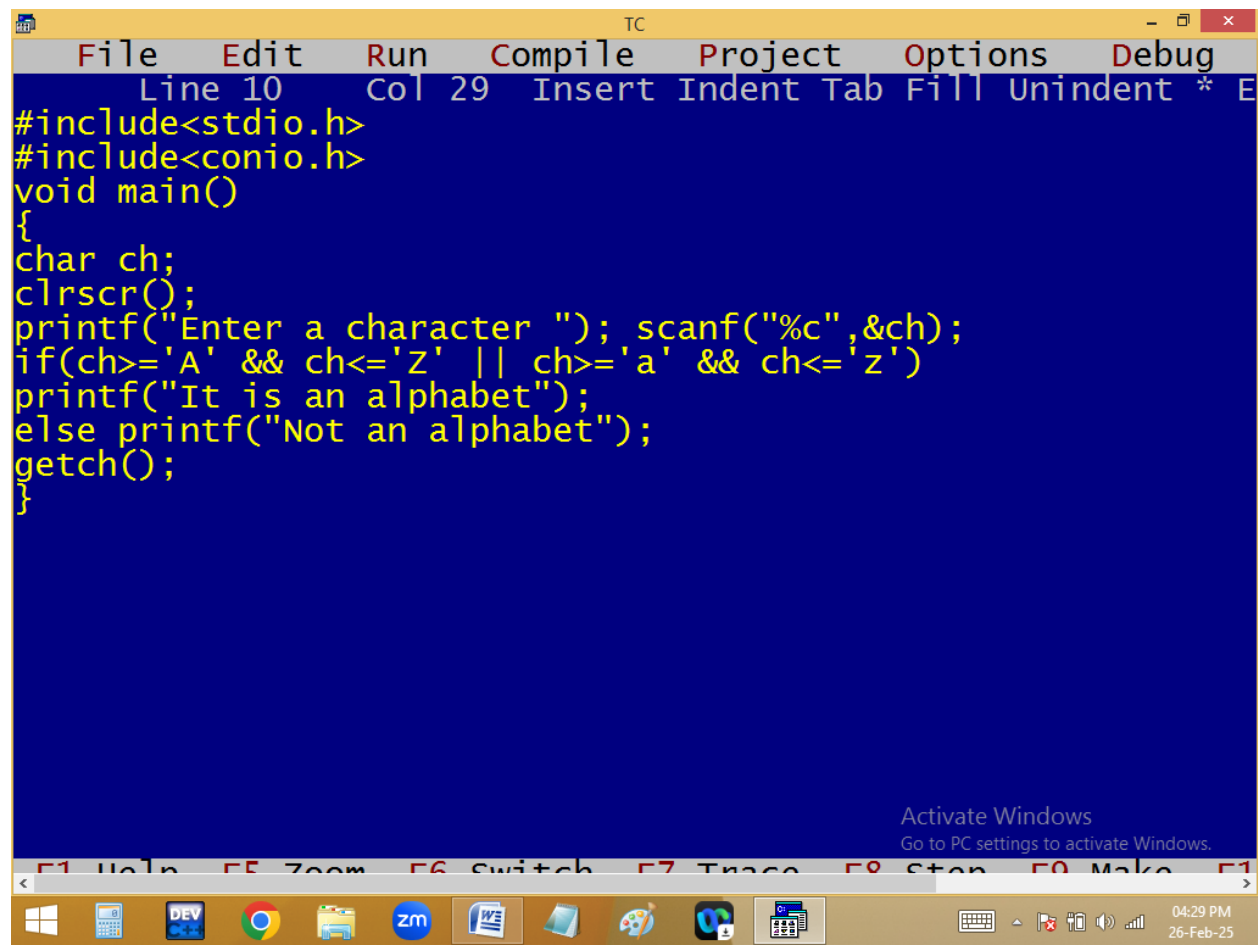



```
TC
File Edit Run Compile Project Options Debug
Line 10 Col 29 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
char ch;
clrscr();
printf("Enter a character "); scanf("%c",&ch);
if(ch>='A' && ch<='Z' || ch>='a' && ch<='z')
printf("It is an alphabet");
else printf("Not an alphabet");
getch();
}
```


Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10


04:29 PM
26-Feb-25

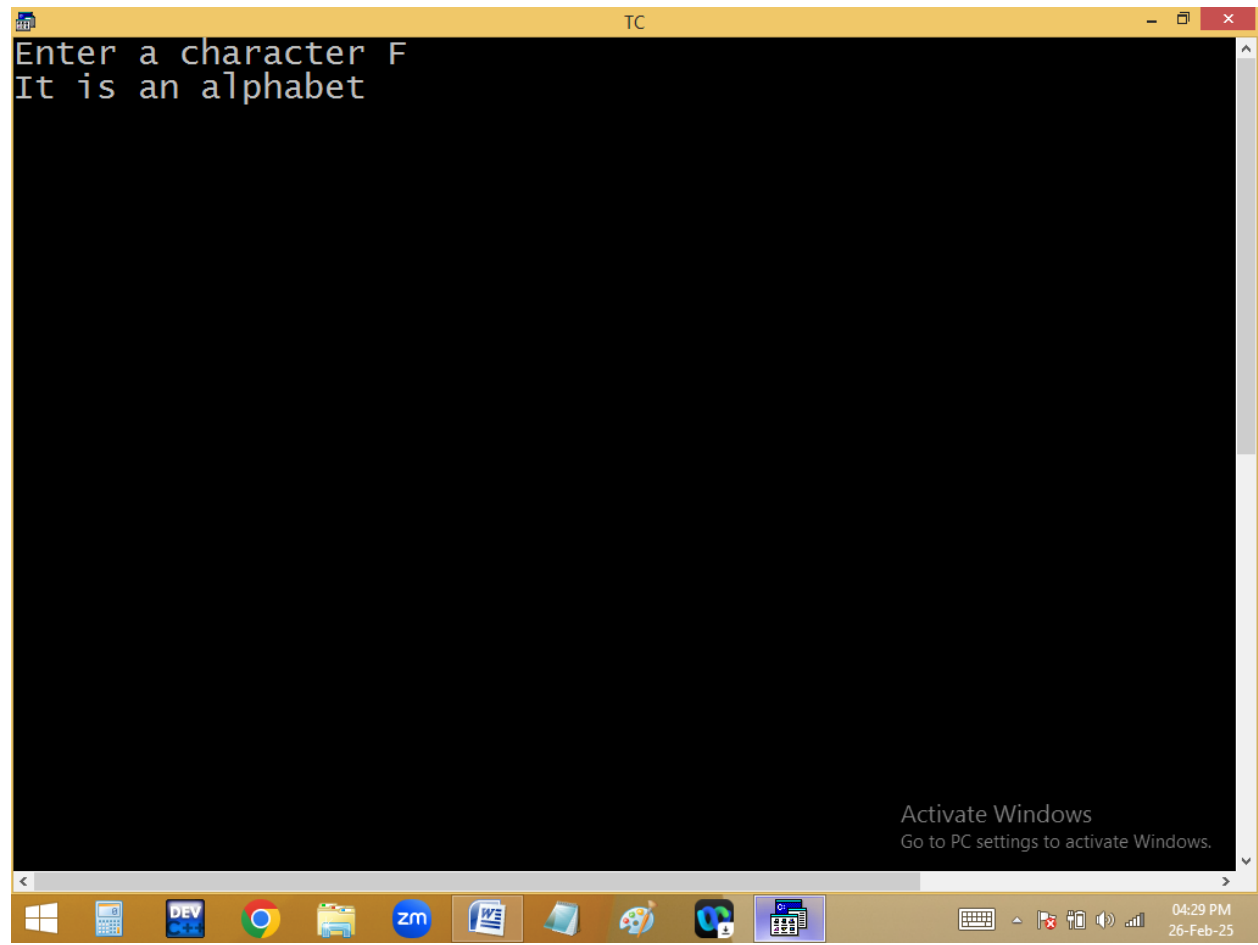

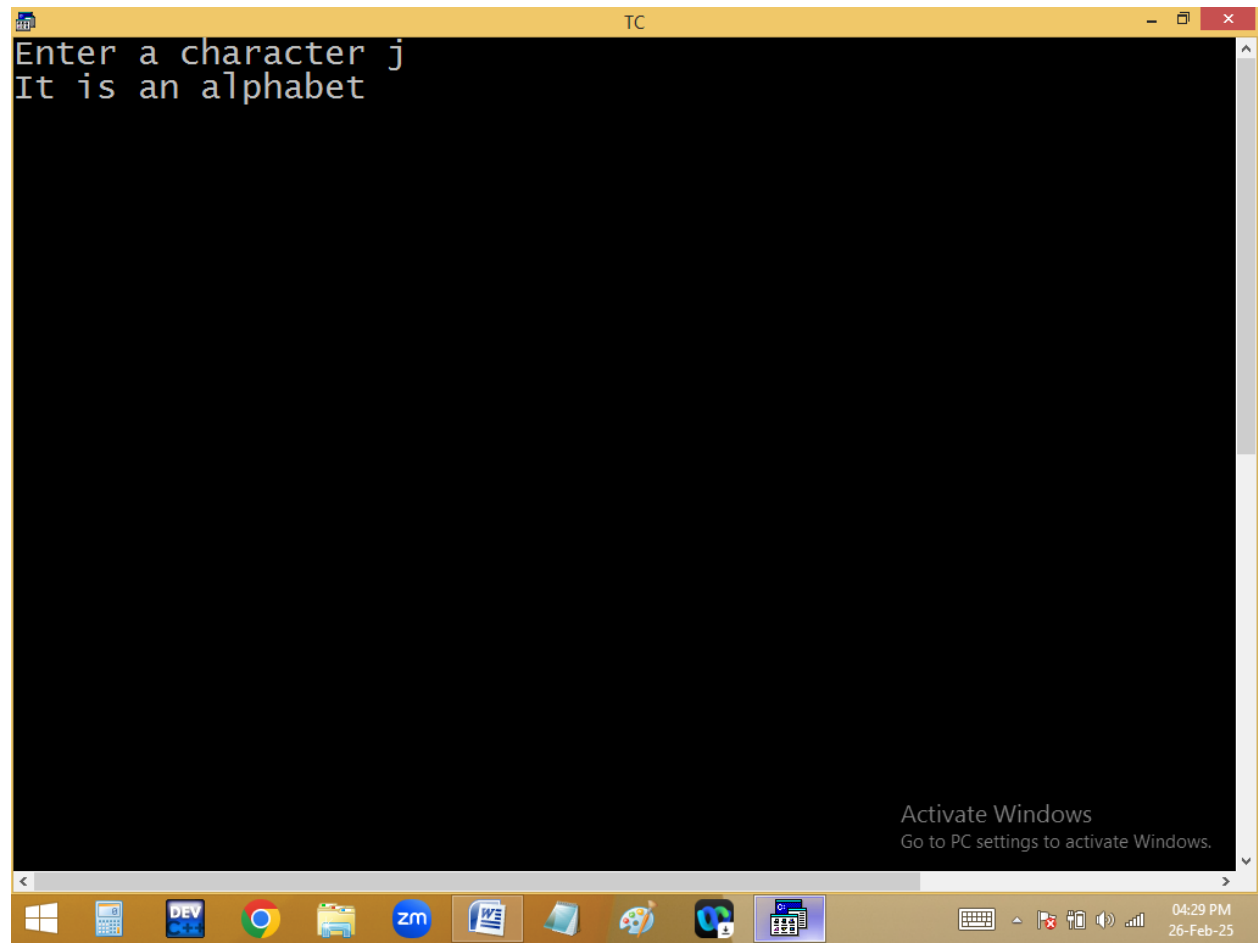

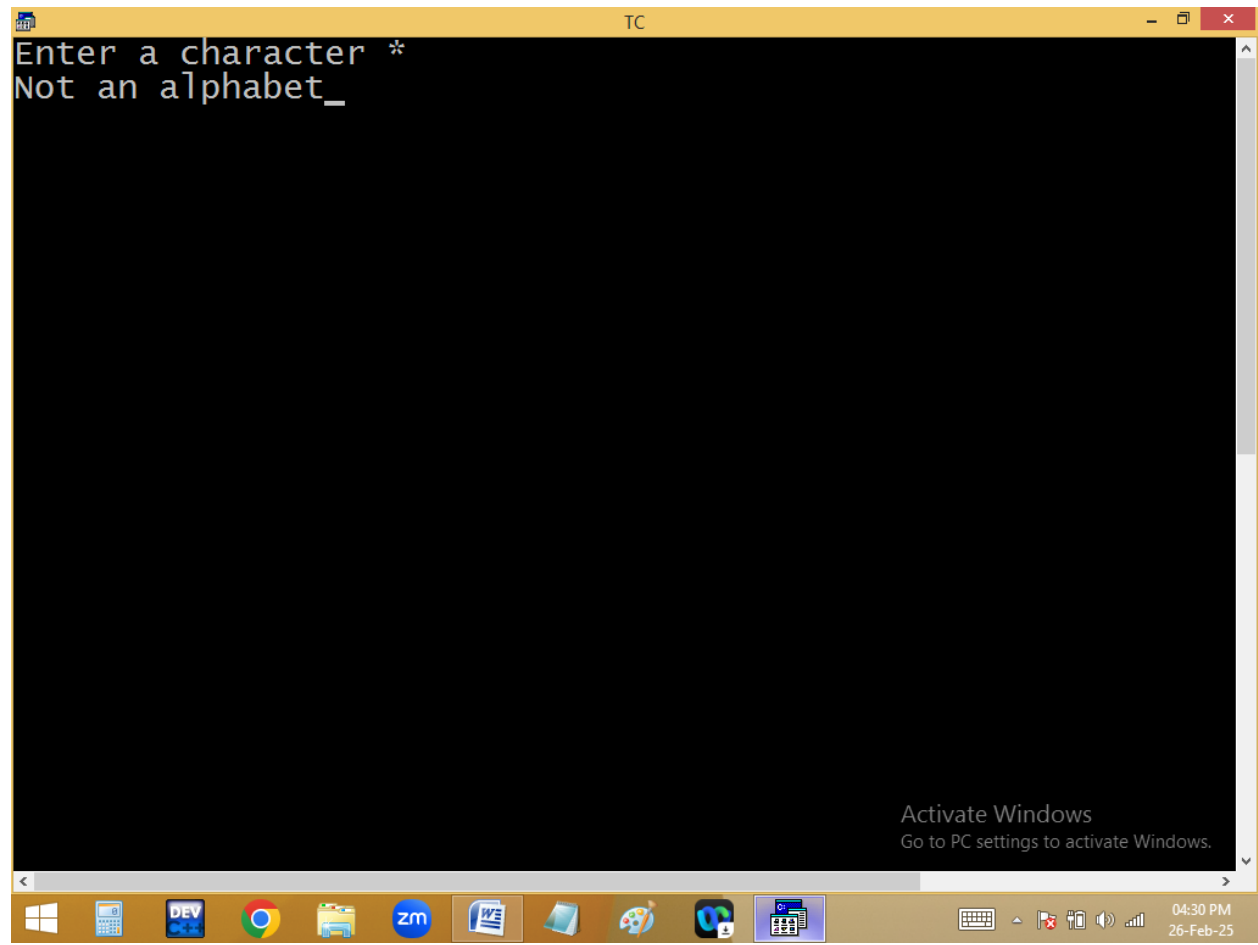


Finding 3 digit no or not?

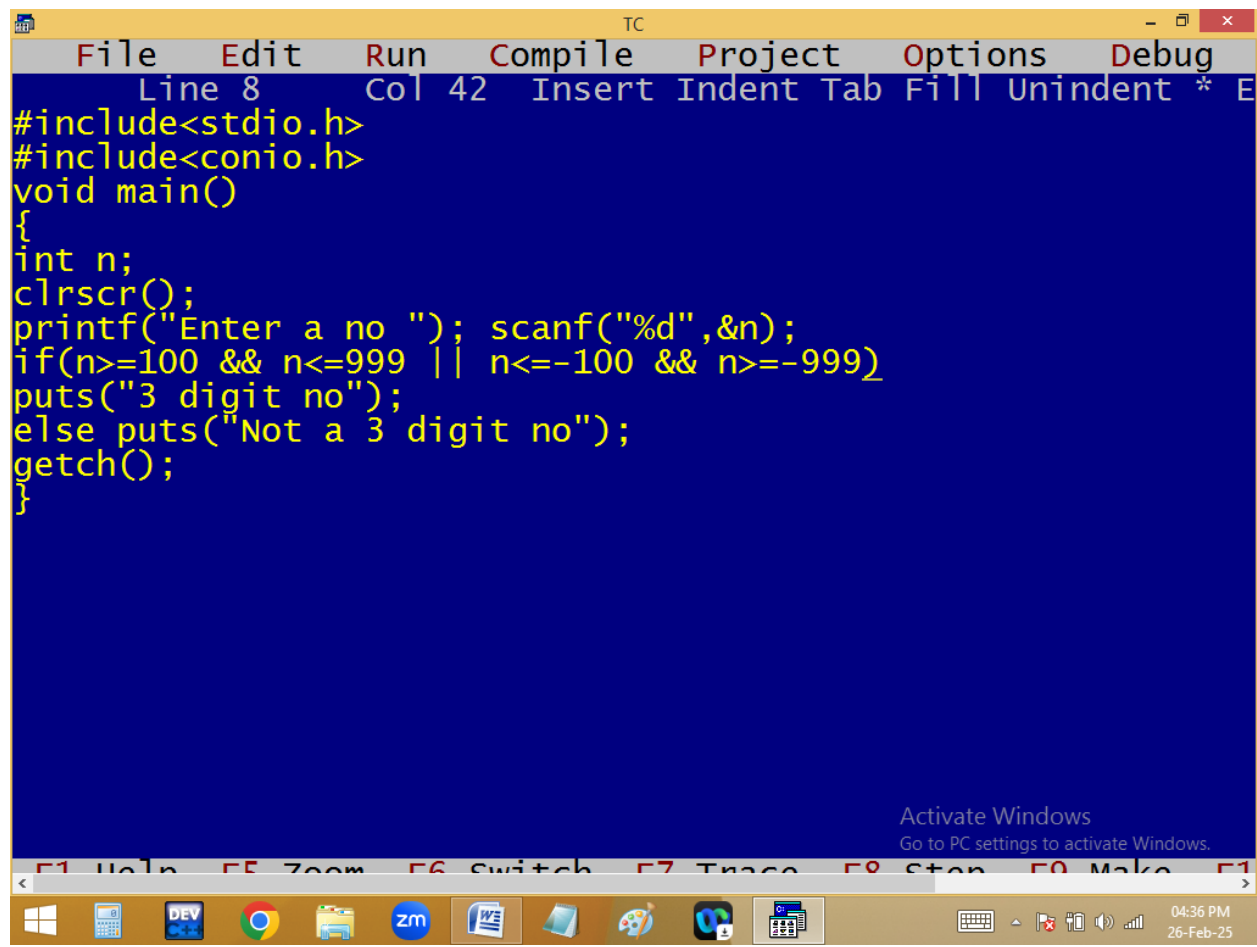



```
TC
File Edit Run Compile Project Options Debug
Line 8 Col 42 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int n;
clrscr();
printf("Enter a no "); scanf("%d",&n);
if(n>=100 && n<=999 || n<=-100 && n>=-999)
puts("3 digit no");
else puts("Not a 3 digit no");
getch();
}


Activate Windows
Go to PC settings to activate Windows.
F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
```

Windows taskbar icons: Windows Start, Task View, DEV, Chrome, File Explorer, Zoom, Word, Edge, Paint, VS Code, Calculator, System Tray (Keyboard, Network, Volume, Battery), System Clock (04:36 PM, 26-Feb-25).

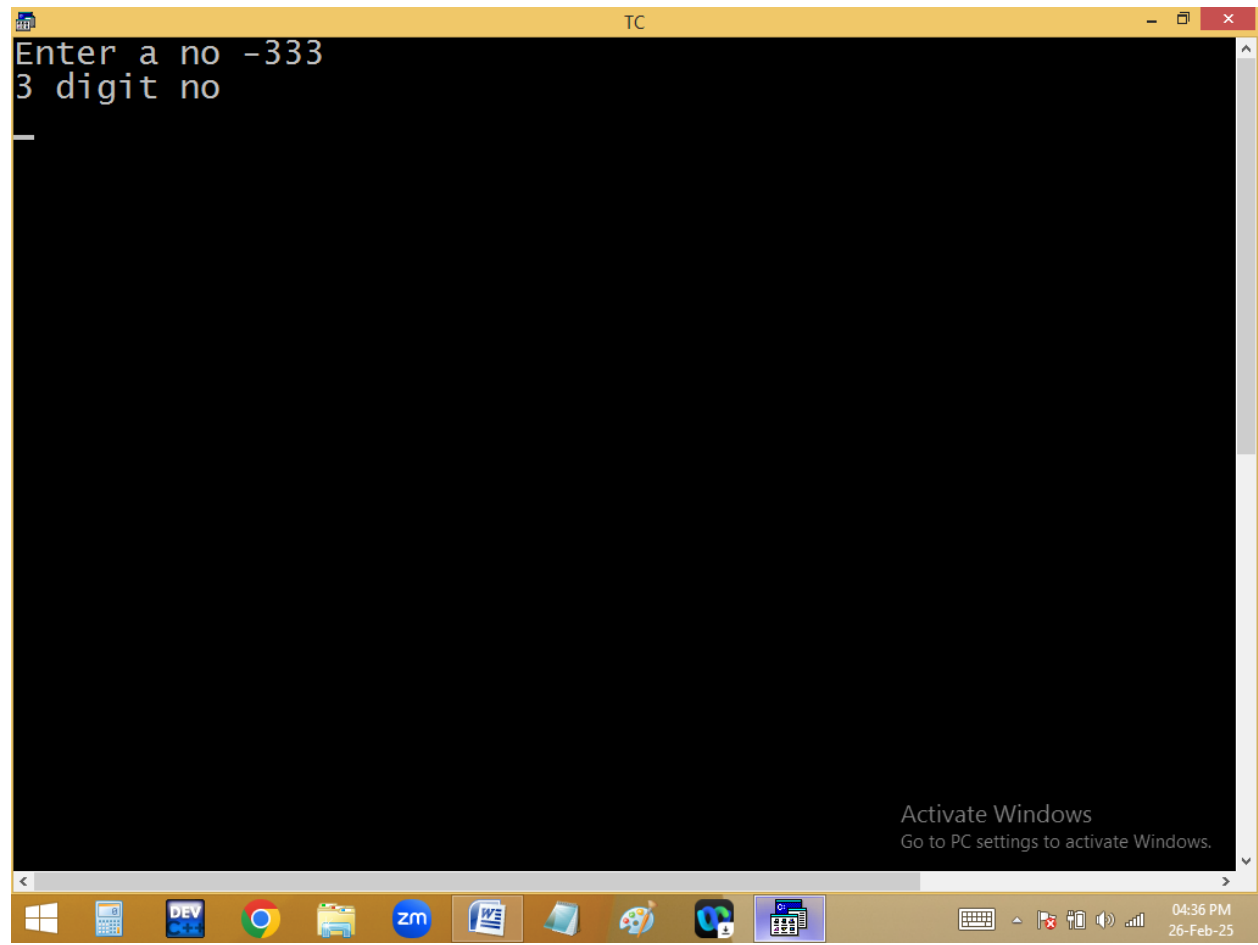

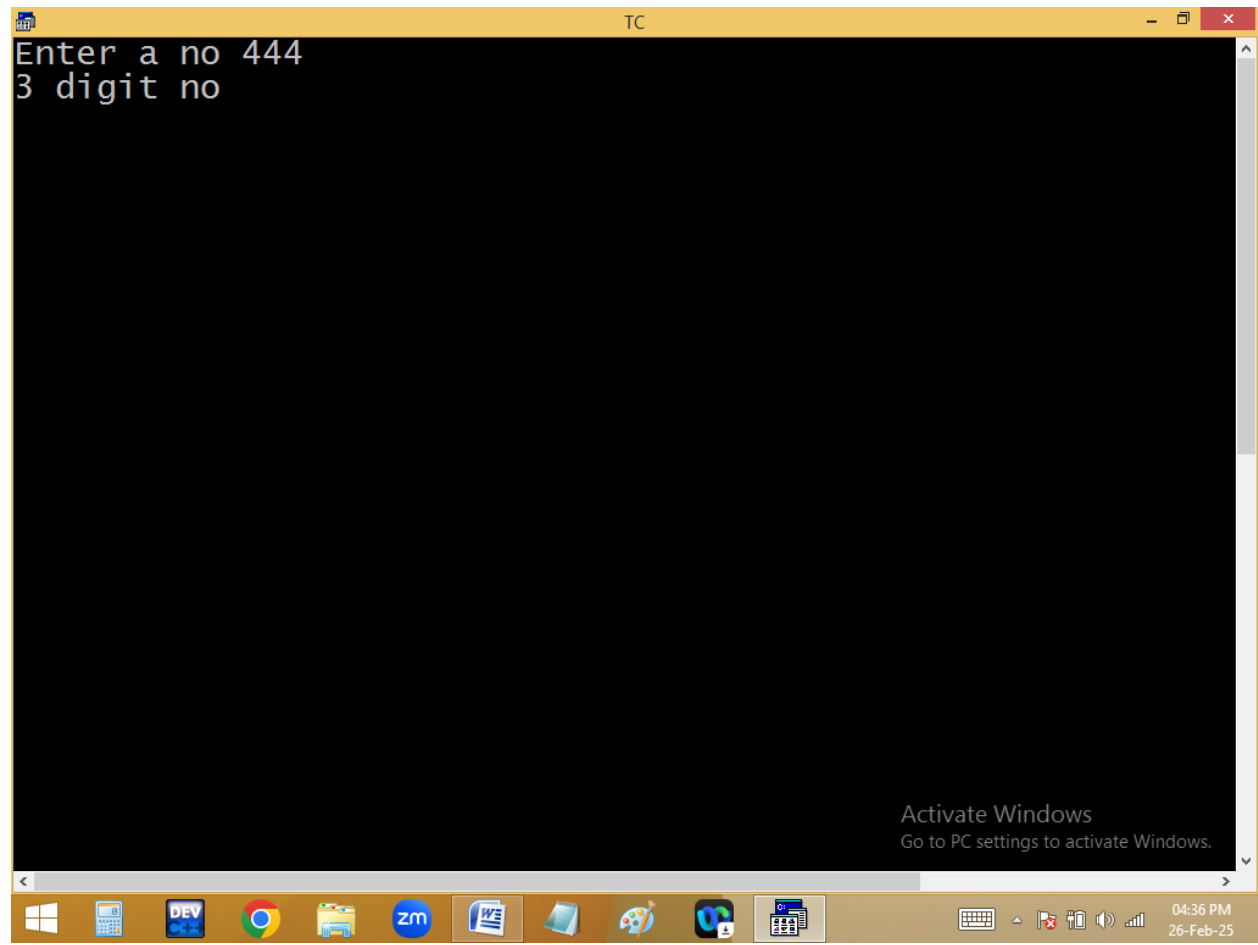

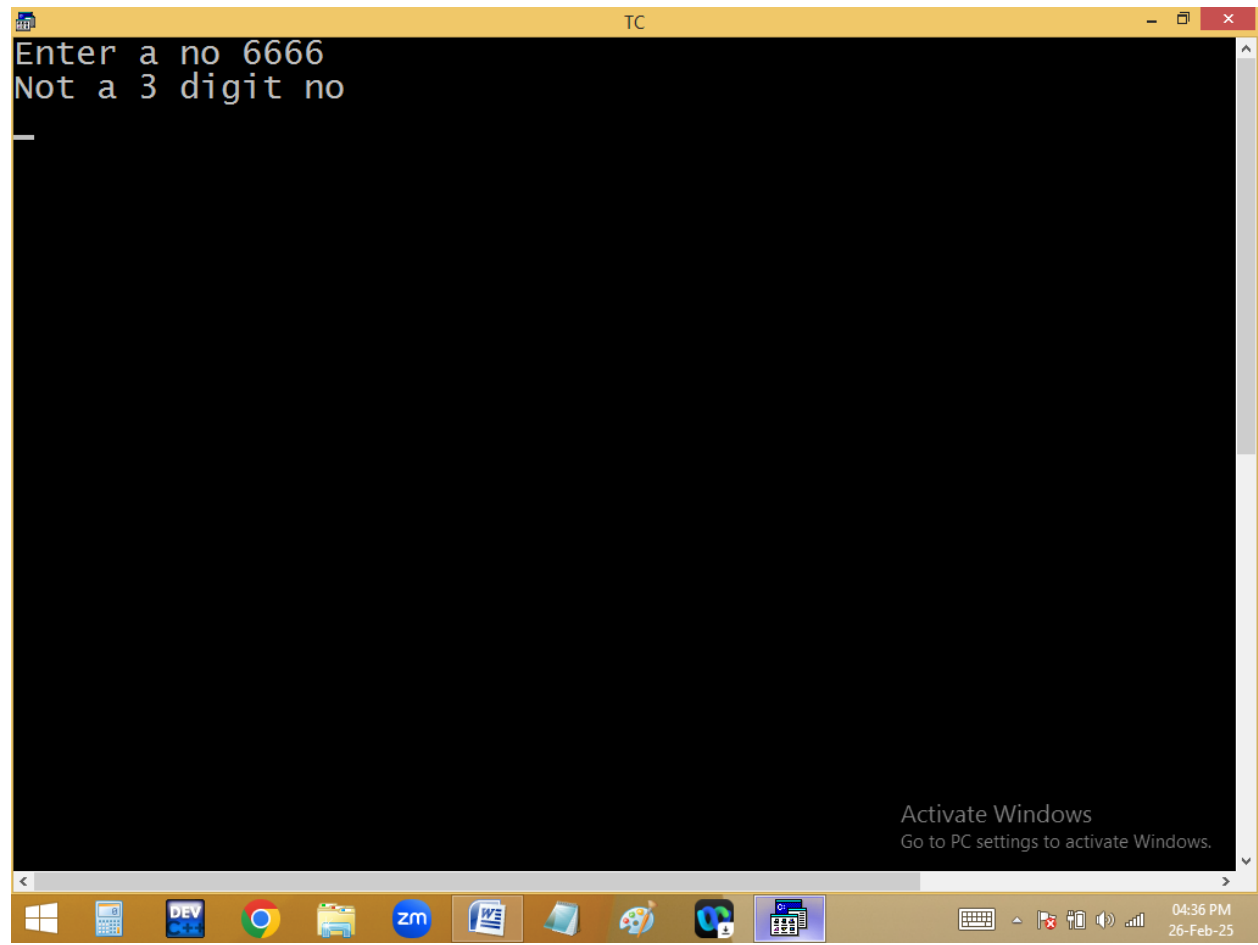

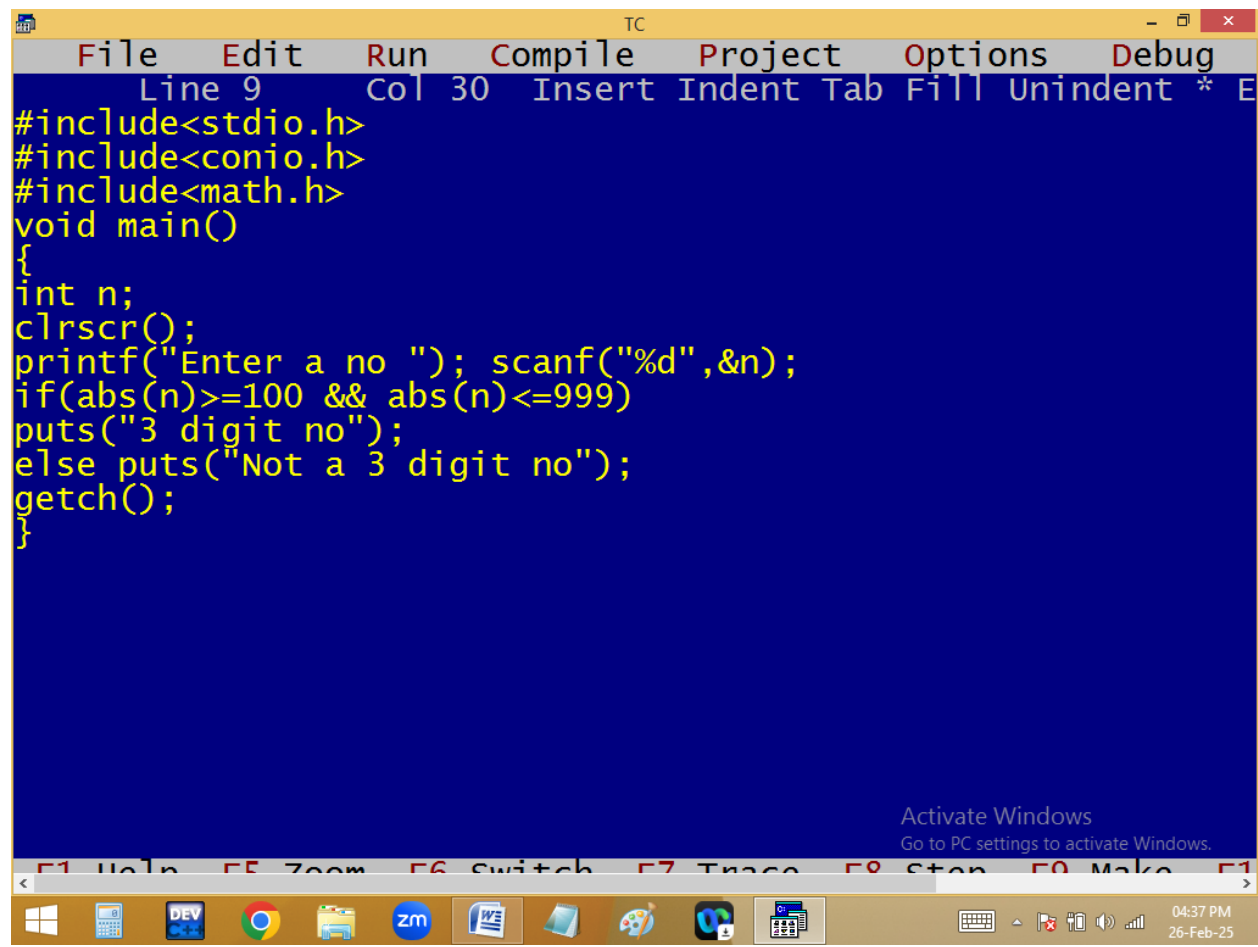


```
TC
File Edit Run Compile Project Options Debug
Line 9 Col 30 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
#include<math.h>
void main()
{
int n;
clrscr();
printf("Enter a no "); scanf("%d",&n);
if(abs(n)>=100 && abs(n)<=999)
puts("3 digit no");
else puts("Not a 3 digit no");
getch();
}
```


Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

04:37 PM
26-Feb-25

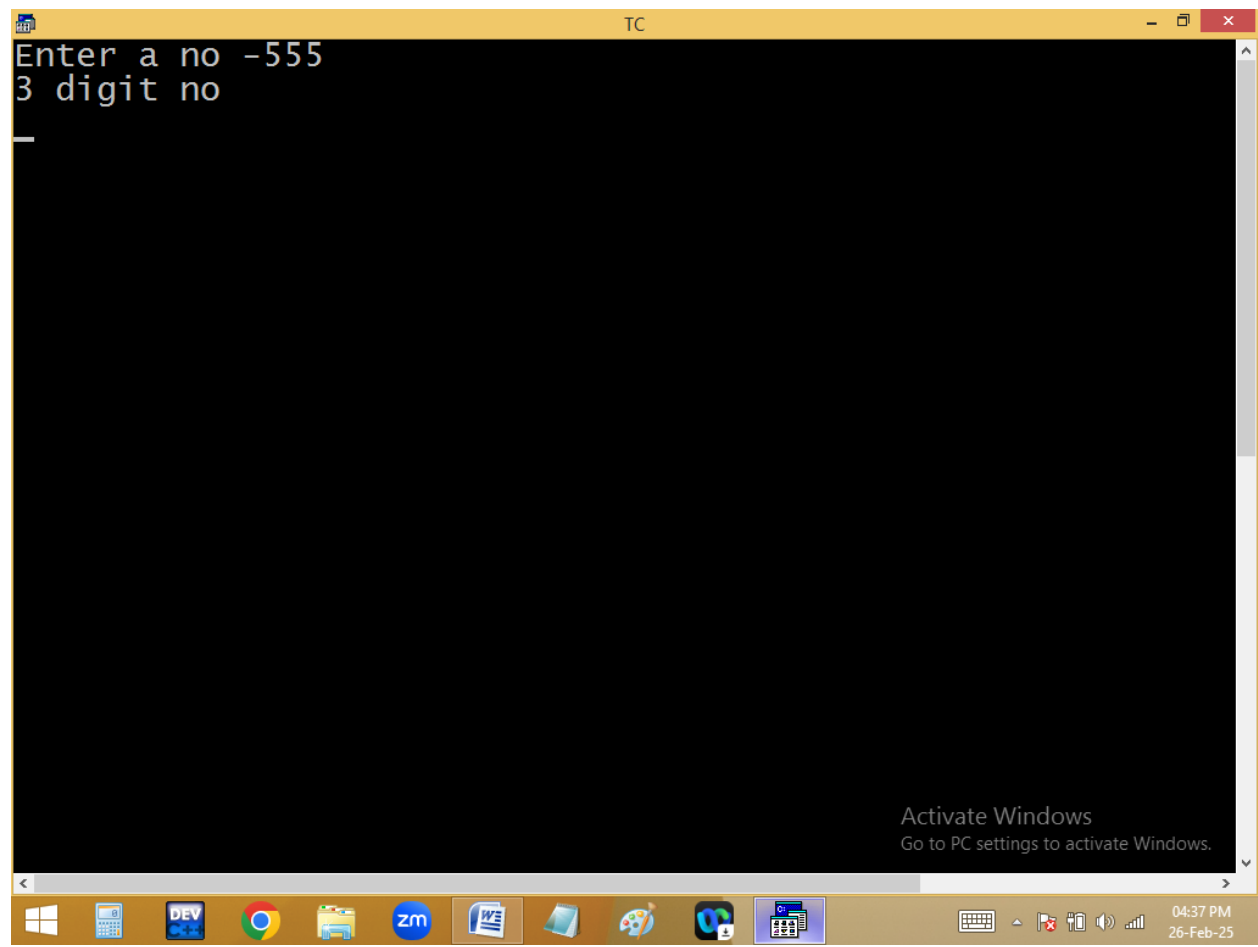



Finding special char or not?

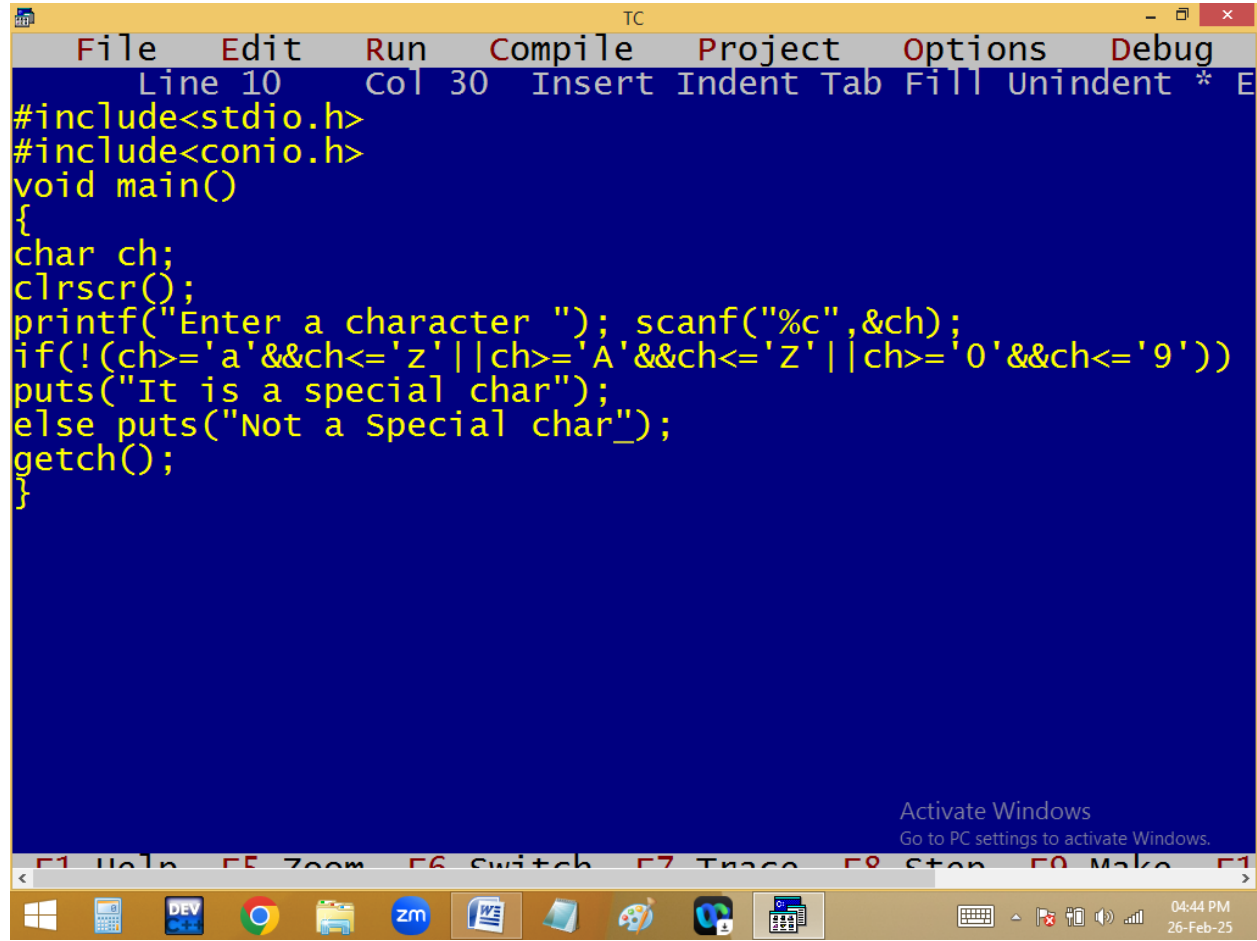


The screenshot shows a Turbo C++ (TC) IDE window. The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates 'Line 10', 'Col 30', and various editing options like 'Insert', 'Indent', 'Tab', 'Fill', 'Unindent', and '* E'. The code is written in yellow text on a blue background. It includes `<stdio.h>` and `<conio.h>`, defines a `main` function, declares a `char ch`, clears the screen with `clrscr()`, and prompts the user to 'Enter a character'. It then uses `scanf` to read a character and an `if` statement to check if it is an alphanumeric character. If not, it prints 'It is a special char'; otherwise, it prints 'Not a Special char'. The program ends with `getch()`. The Windows taskbar at the bottom shows the Start button, task view, and several application icons including DEV, Chrome, File Explorer, Zoom, Word, and a calculator. The system clock shows 04:44 PM on 26-Feb-25. An 'Activate Windows' watermark is visible in the bottom right corner of the IDE window.


```
#include<stdio.h>
#include<conio.h>
void main()
{
char ch;
clrscr();
printf("Enter a character "); scanf("%c",&ch);
if(!(ch>='a'&&ch<='z' || ch>='A'&&ch<='Z' || ch>='0'&&ch<='9'))
puts("It is a special char");
else puts("Not a Special char");
getch();
}
```

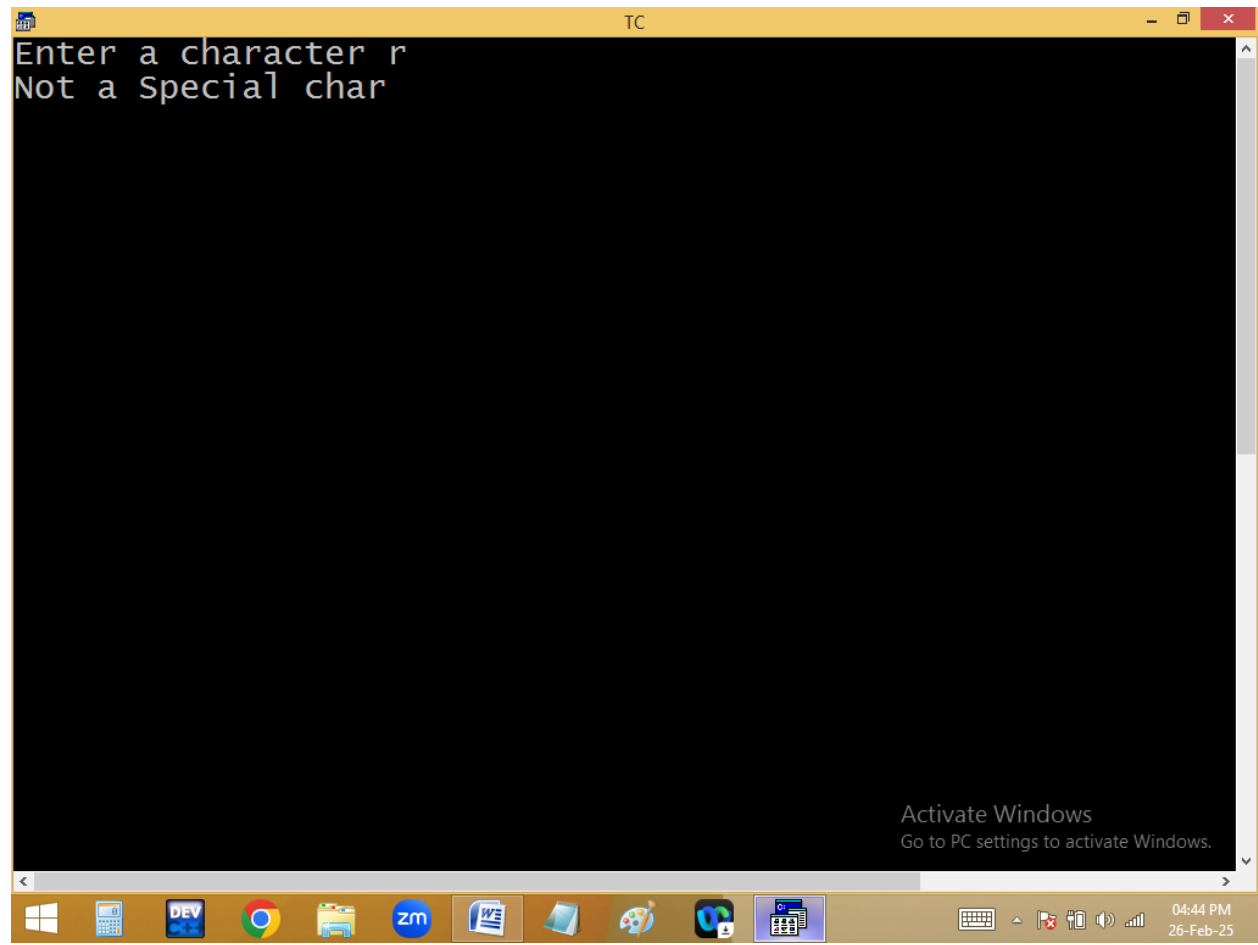

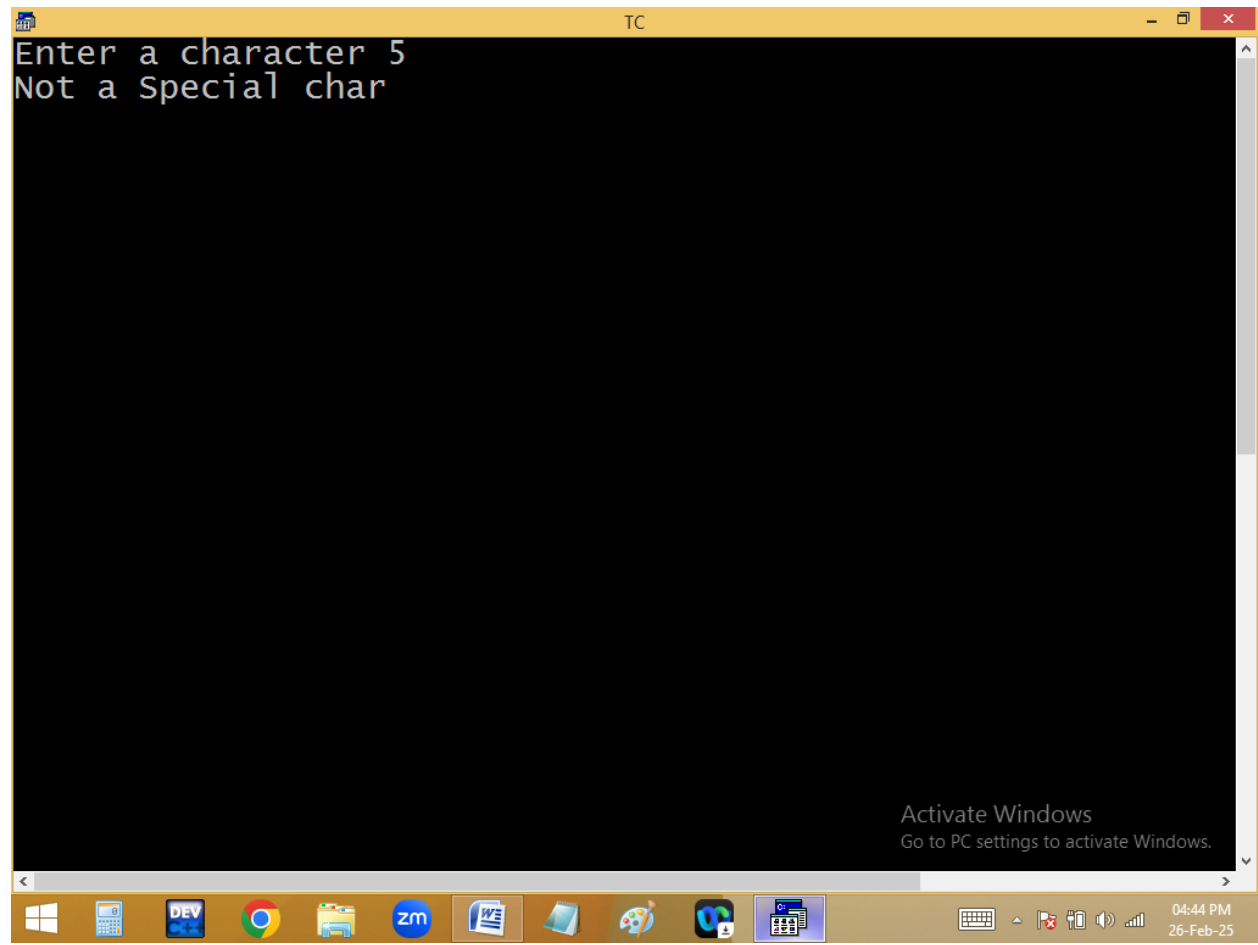

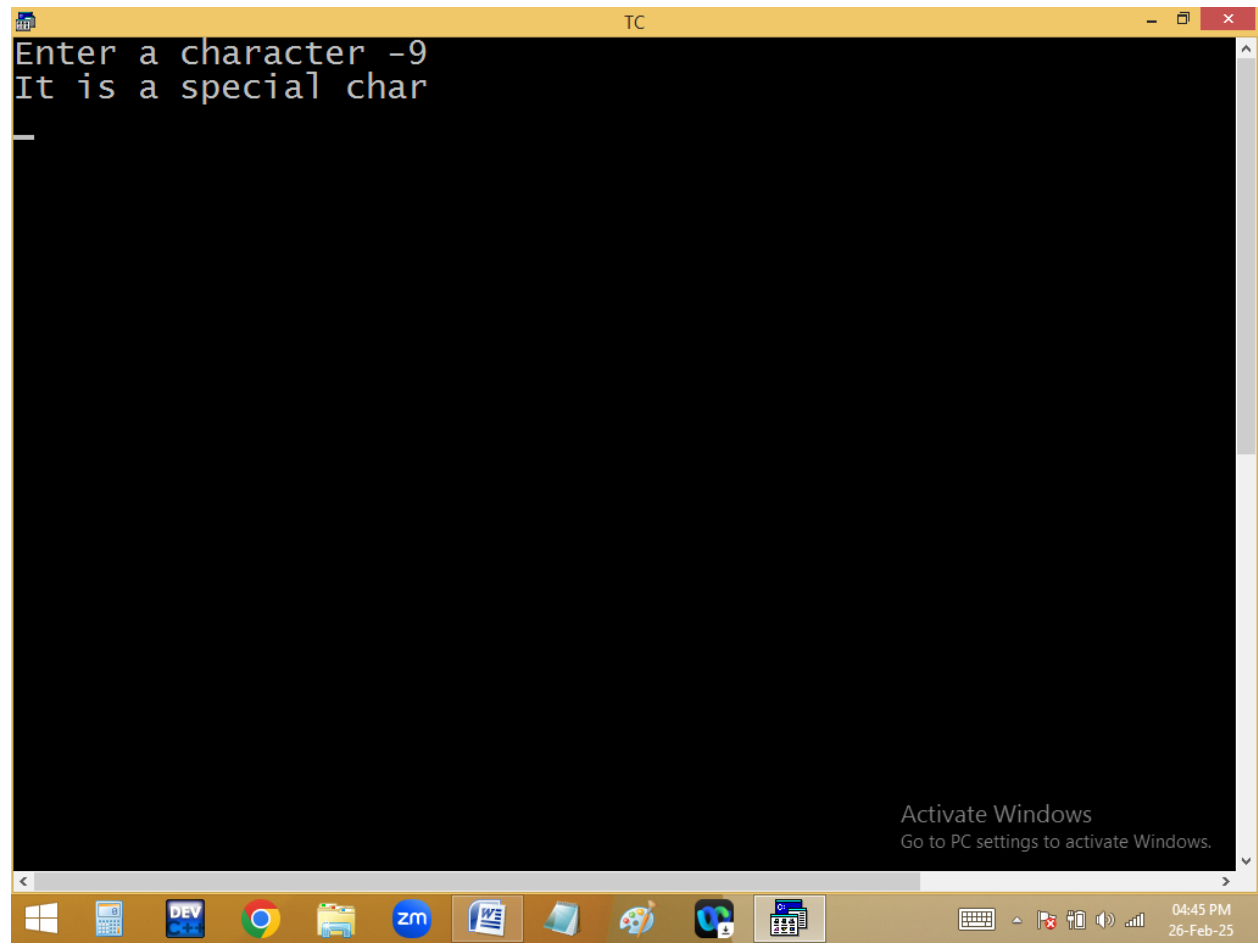

Finding even/odd:

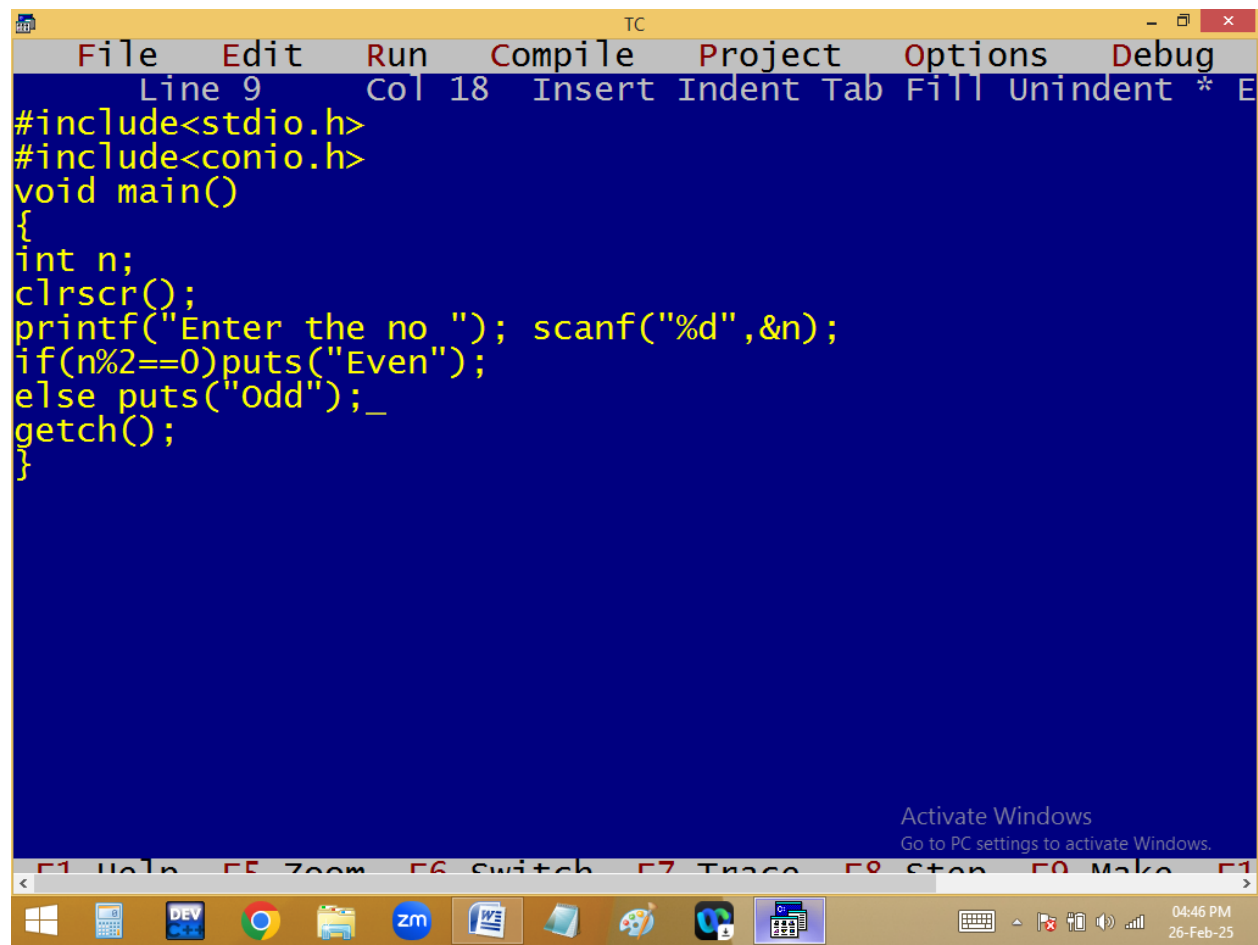


```
TC
File Edit Run Compile Project Options Debug
Line 9 Col 18 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int n;
clrscr();
printf("Enter the no "); scanf("%d",&n);
if(n%2==0)puts("Even");
else puts("Odd");_
getch();
}
```


Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

04:46 PM
26-Feb-25



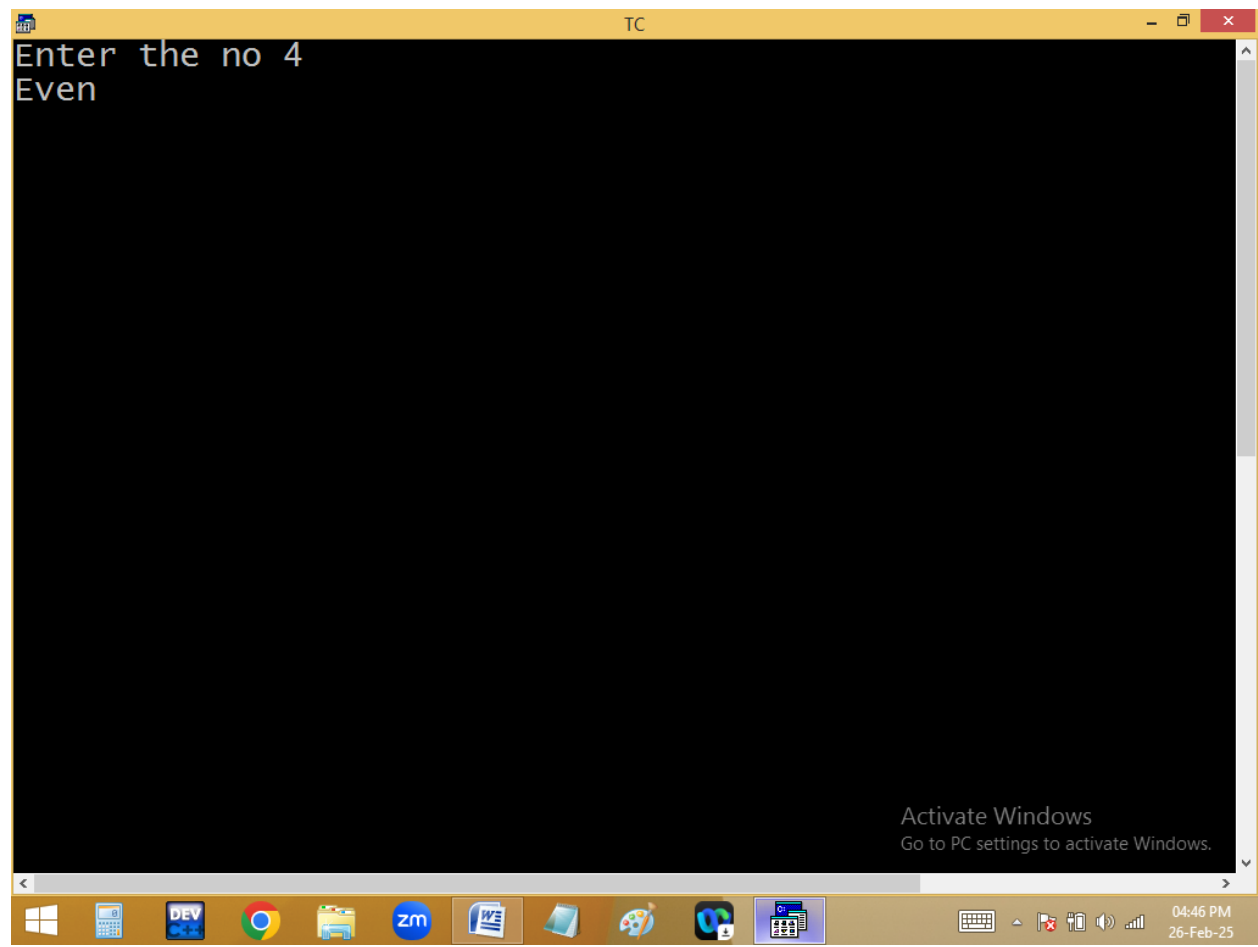


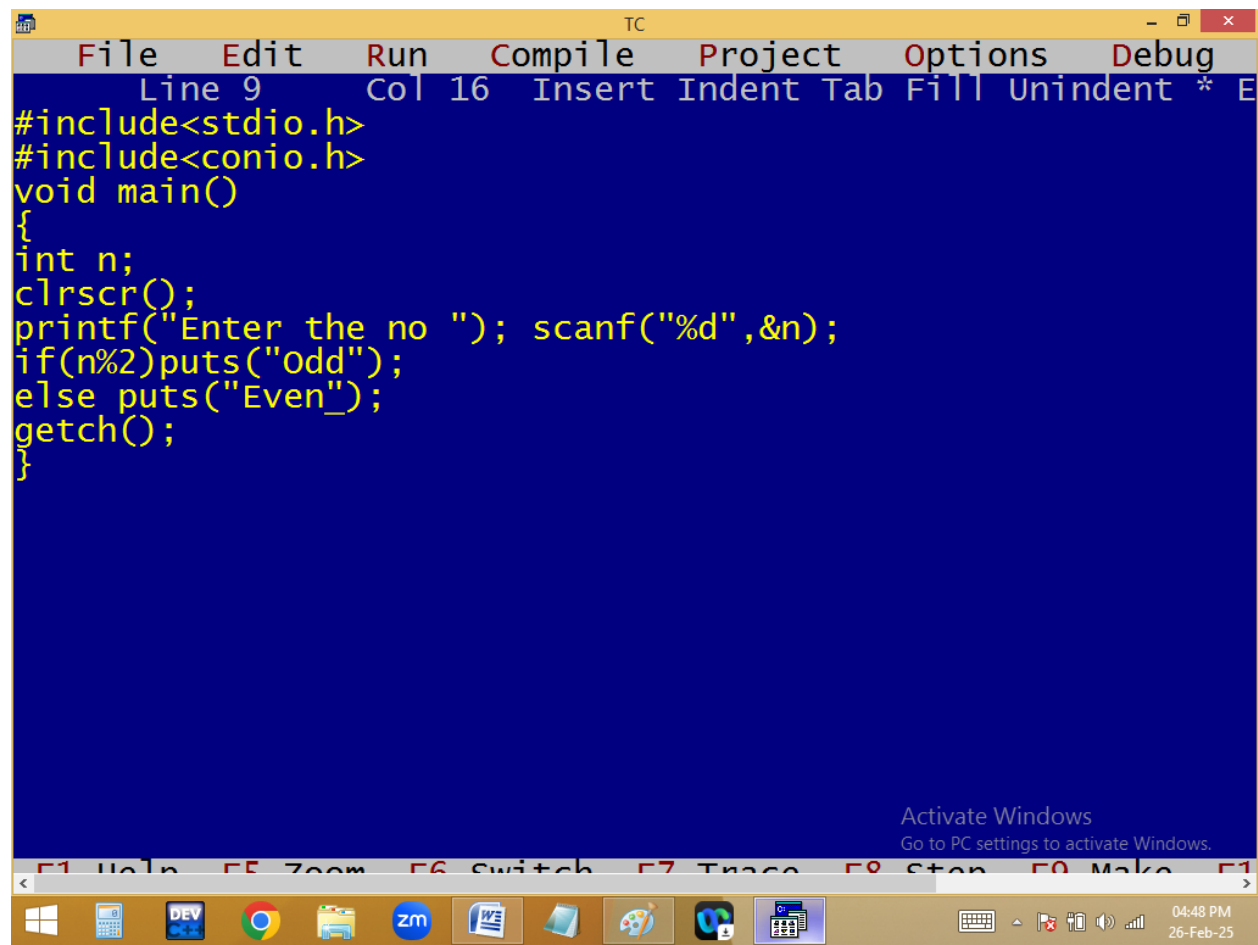


The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 9", "Col 16", and a list of keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", "*", and "E". The main editing area has a blue background and contains the following C code in yellow text:


```
#include<stdio.h>
#include<conio.h>
void main()
{
int n;
clrscr();
printf("Enter the no "); scanf("%d",&n);
if(n%2)puts("Odd");
else puts("Even");
getch();
}
```

At the bottom of the window, there is a taskbar with various application icons including Windows, a calculator, a development environment (DEV), Google Chrome, a file explorer, a Zoom icon (zm), a Word document, a folder, a game controller, a game, and a calculator. The system tray on the right shows the date and time: "04:48 PM" and "26-Feb-25". An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.

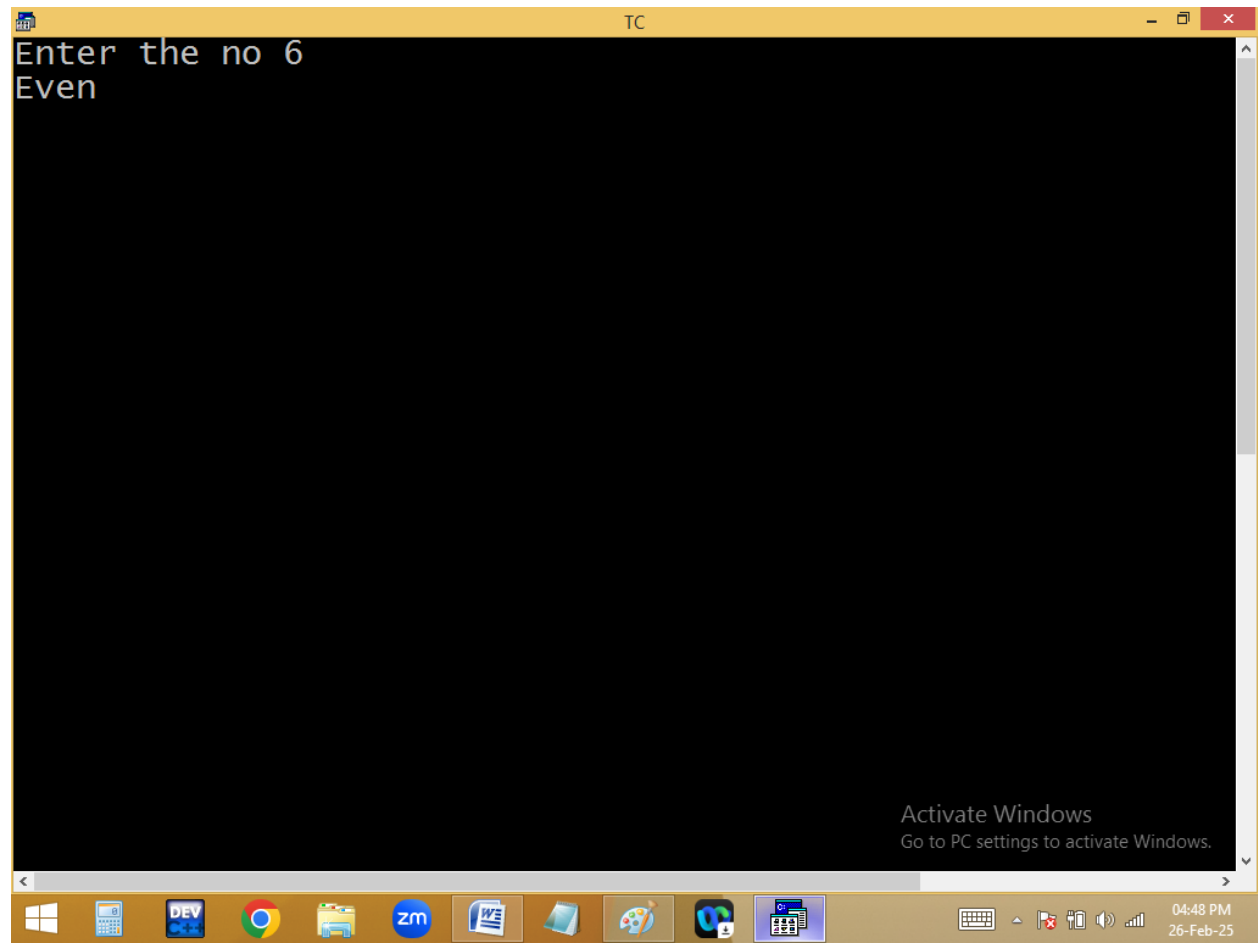

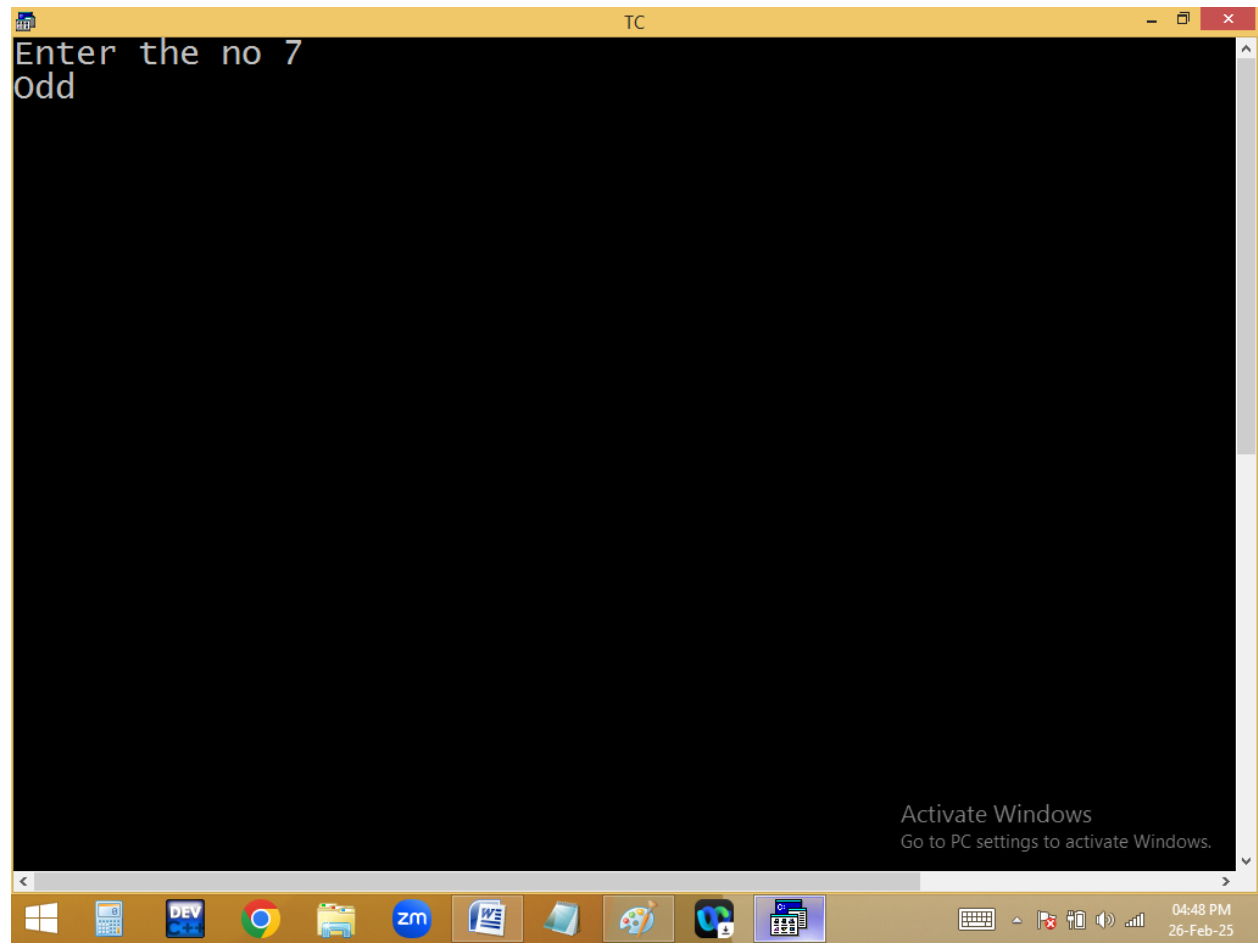

Without using %:

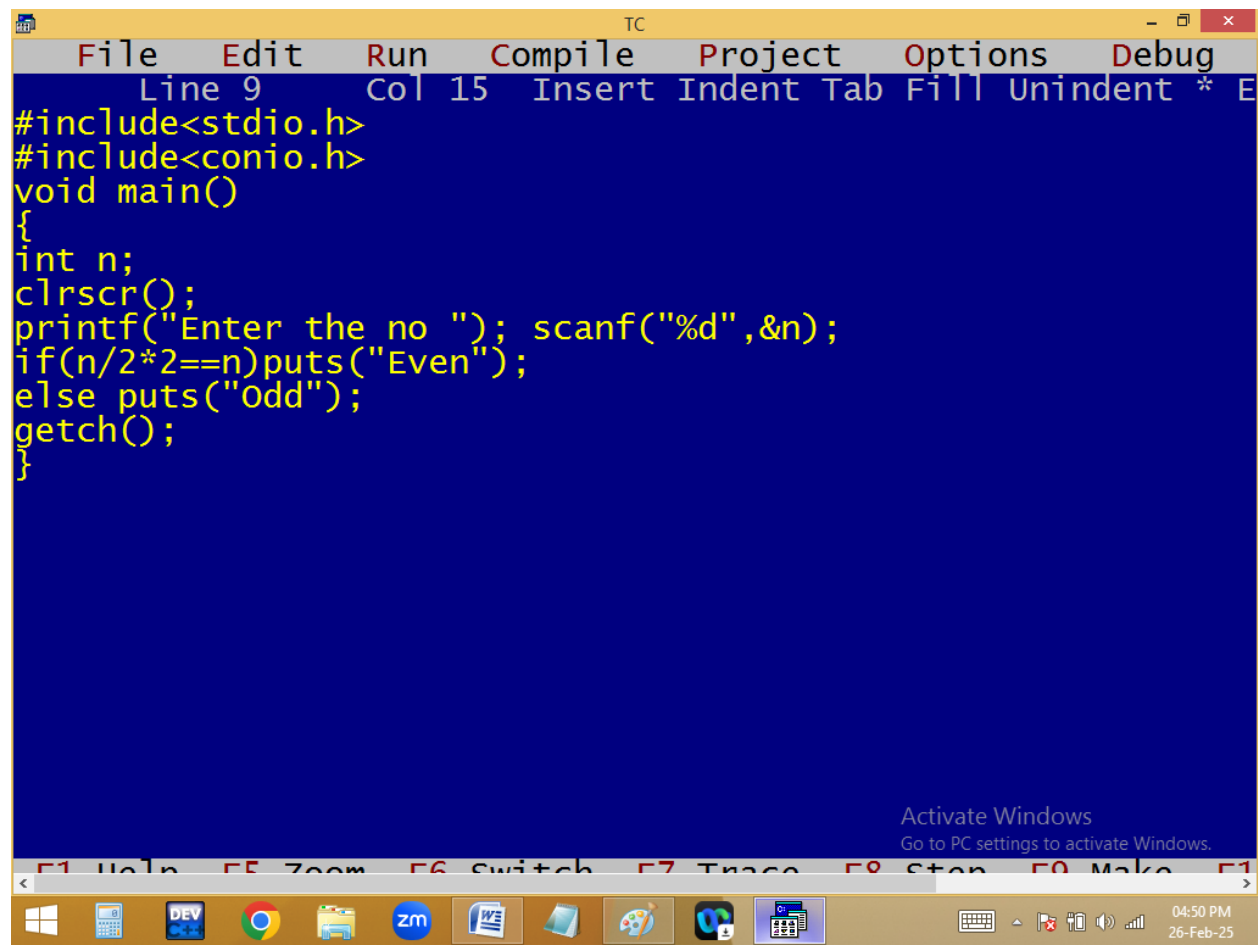

The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 9", "Col 15", and a list of keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", "*", and "E". The main editing area has a blue background and contains the following C code in yellow text:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int n;
clrscr();
printf("Enter the no "); scanf("%d",&n);
if(n/2*2==n)puts("Even");
else puts("Odd");
getch();
}
```

At the bottom of the window, there is a taskbar with various application icons including Windows, Calculator, DEV C++, Google Chrome, File Explorer, Zoom, Word, and others. The system tray on the right shows the time as 04:50 PM and the date as 26-Feb-25. An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.






$$4/2=2*2=4==4$$

if($n/2 * 2 == n$) **p(even);** else p(odd);

$$5/2=2*2=4==5$$


Without using arithmetic operators?

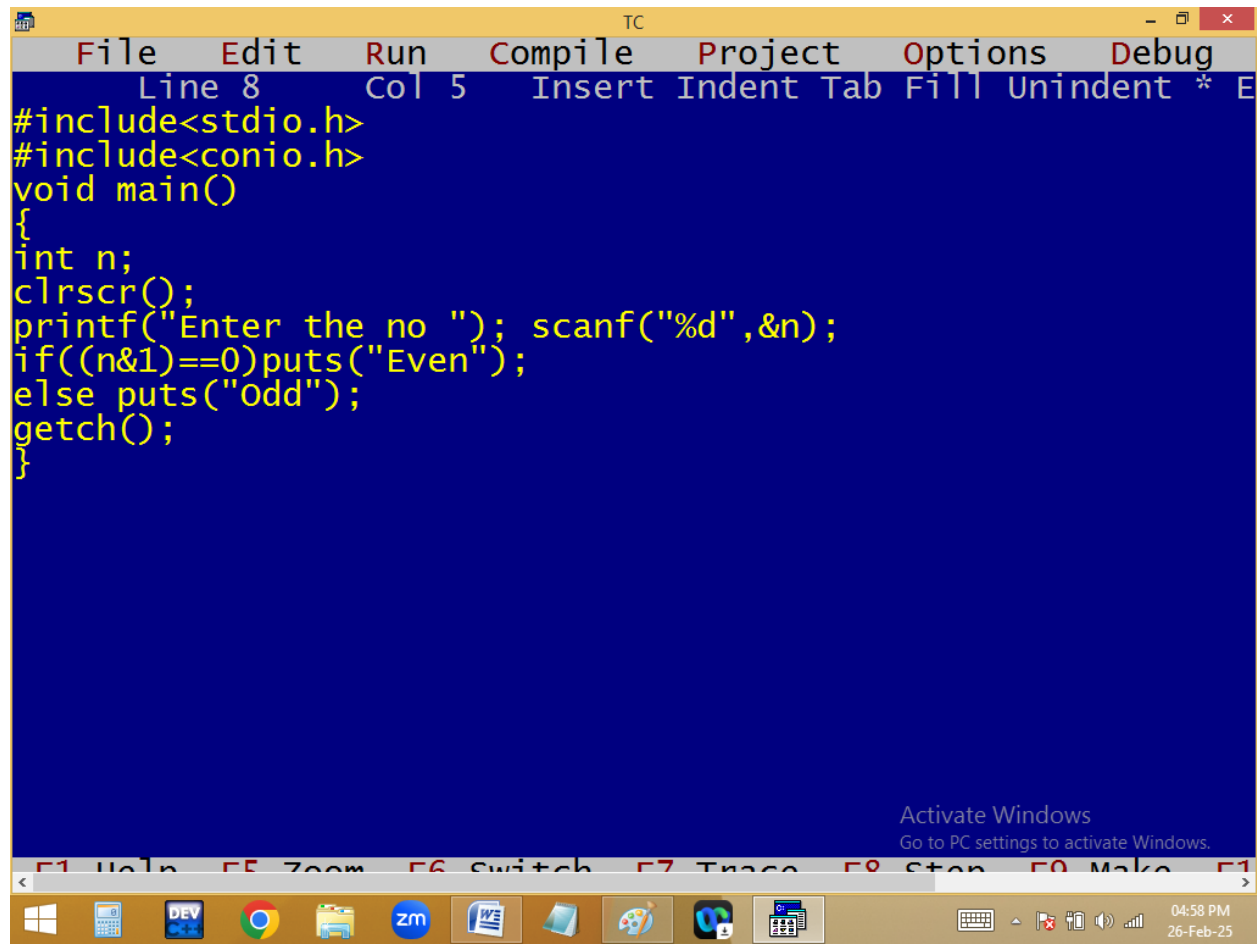


The screenshot shows the Turbo C++ (TC) IDE interface. The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates 'Line 8 Col 5' and provides shortcuts for Insert, Indent, Tab, Fill, Unindent, and *E. The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int n;
    clrscr();
    printf("Enter the no "); scanf("%d",&n);
    if((n&1)==0)puts("Even");
    else puts("Odd");
    getch();
}
```

At the bottom of the window, there is a toolbar with function keys F1 through F11 and a taskbar. The taskbar shows icons for Windows, a calculator, a development environment (DEV), Google Chrome, a file explorer, Zoom (zm), a document editor, a folder, a paint application, a game, and a calendar. The system tray on the right shows the time as 04:58 PM on 26-Feb-25. An 'Activate Windows' watermark is visible in the bottom right corner of the IDE window.

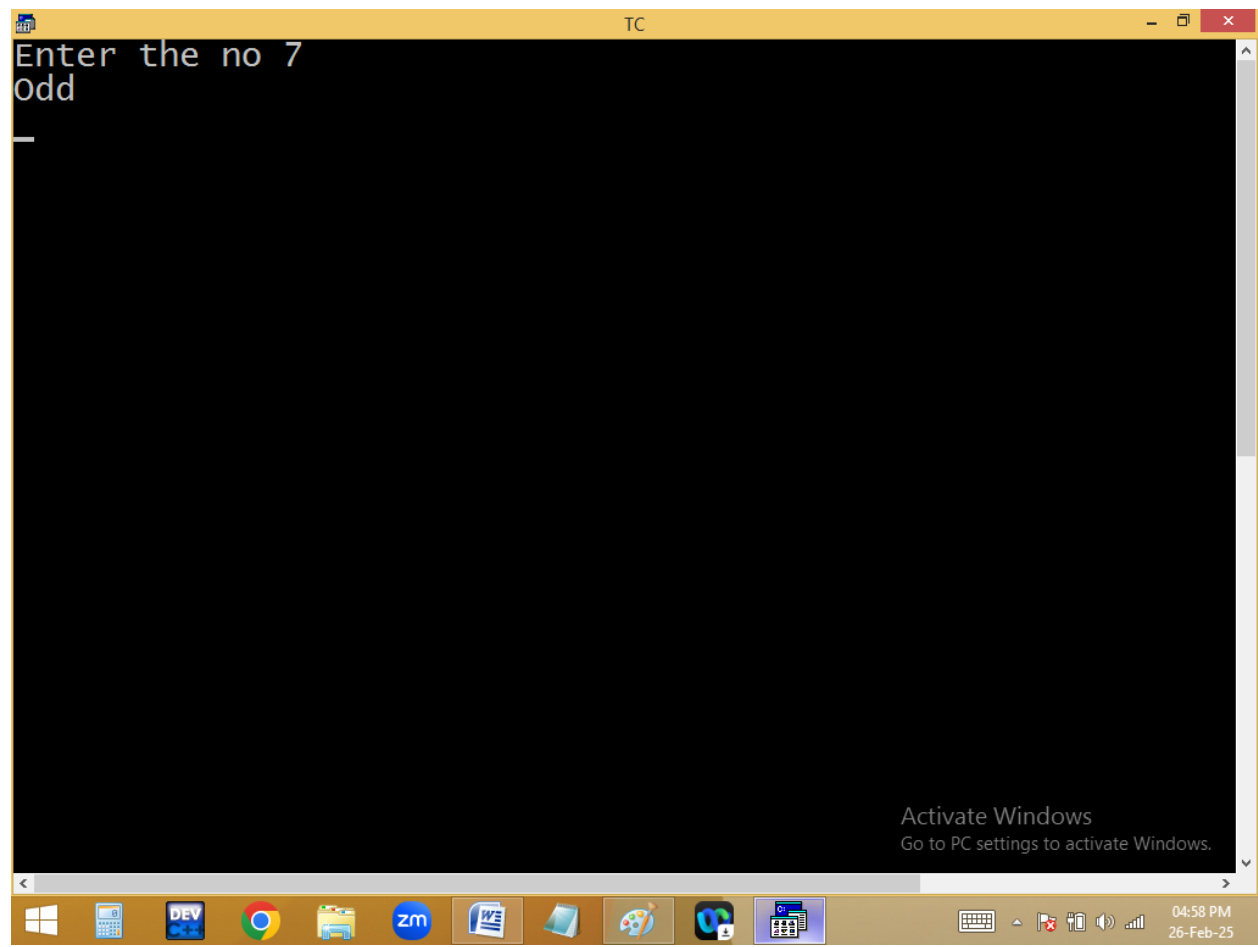



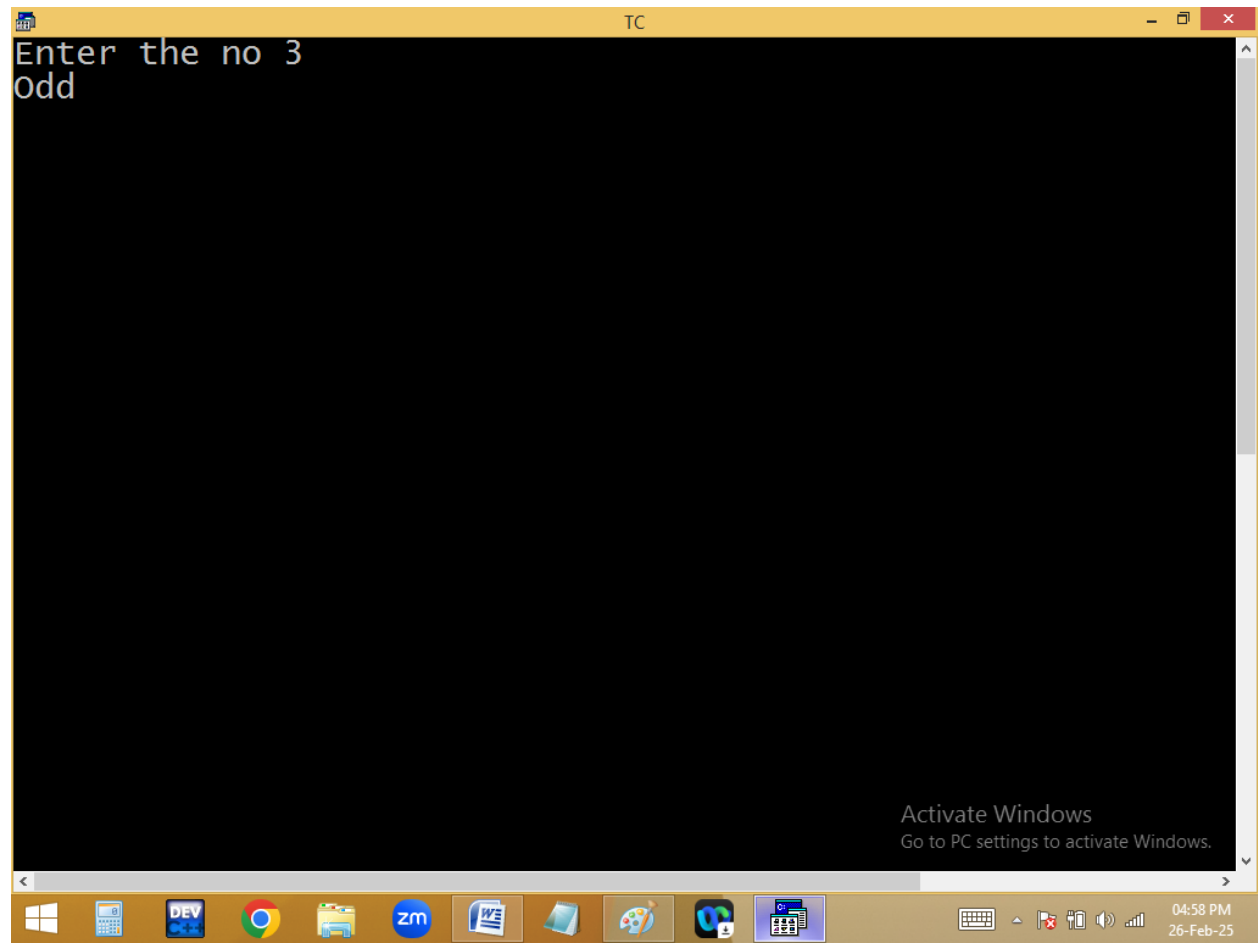



3=11

1=01

01=1

if(n&1==0) p(even); else p(Odd);


4 = 100

1= 001

000=0

2 | 3 2 | 11 2 | 4
 1-1 0-1 2 | 2-0
 1-0

with simple if:

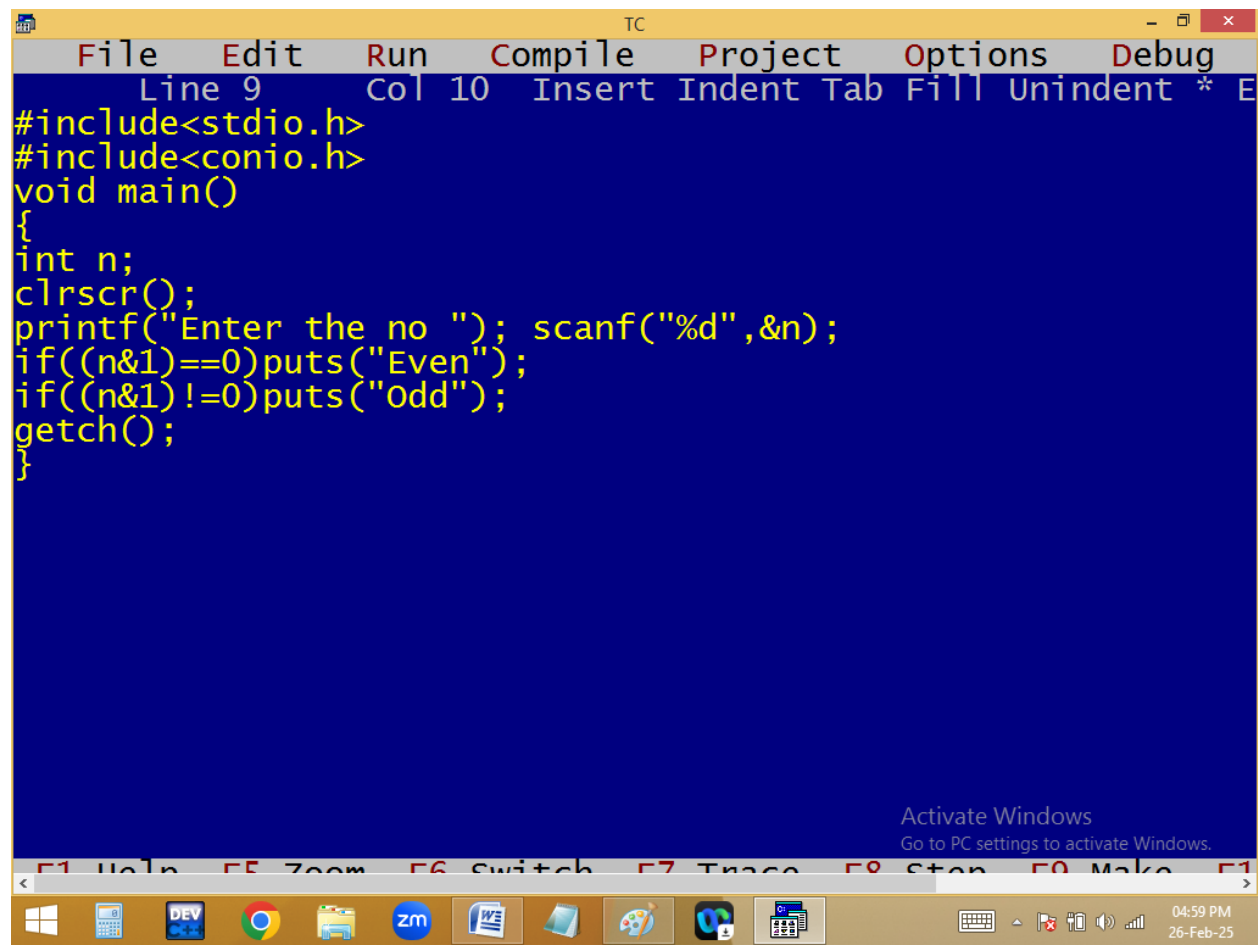



```
TC
File Edit Run Compile Project Options Debug
Line 9 Col 10 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int n;
clrscr();
printf("Enter the no "); scanf("%d",&n);
if((n&1)==0)puts("Even");
if((n&1)!=0)puts("Odd");
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.


F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

04:59 PM
26-Feb-25

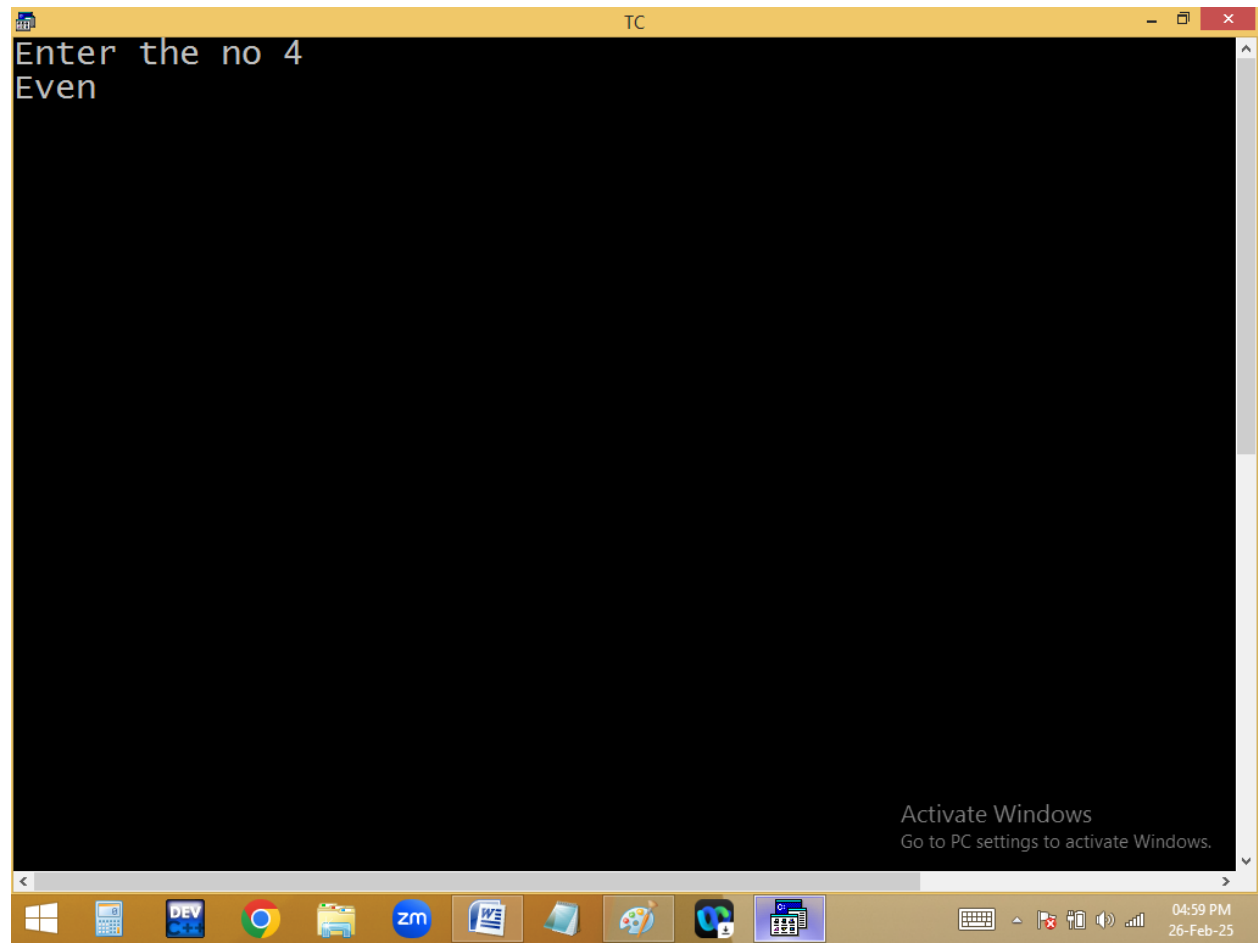

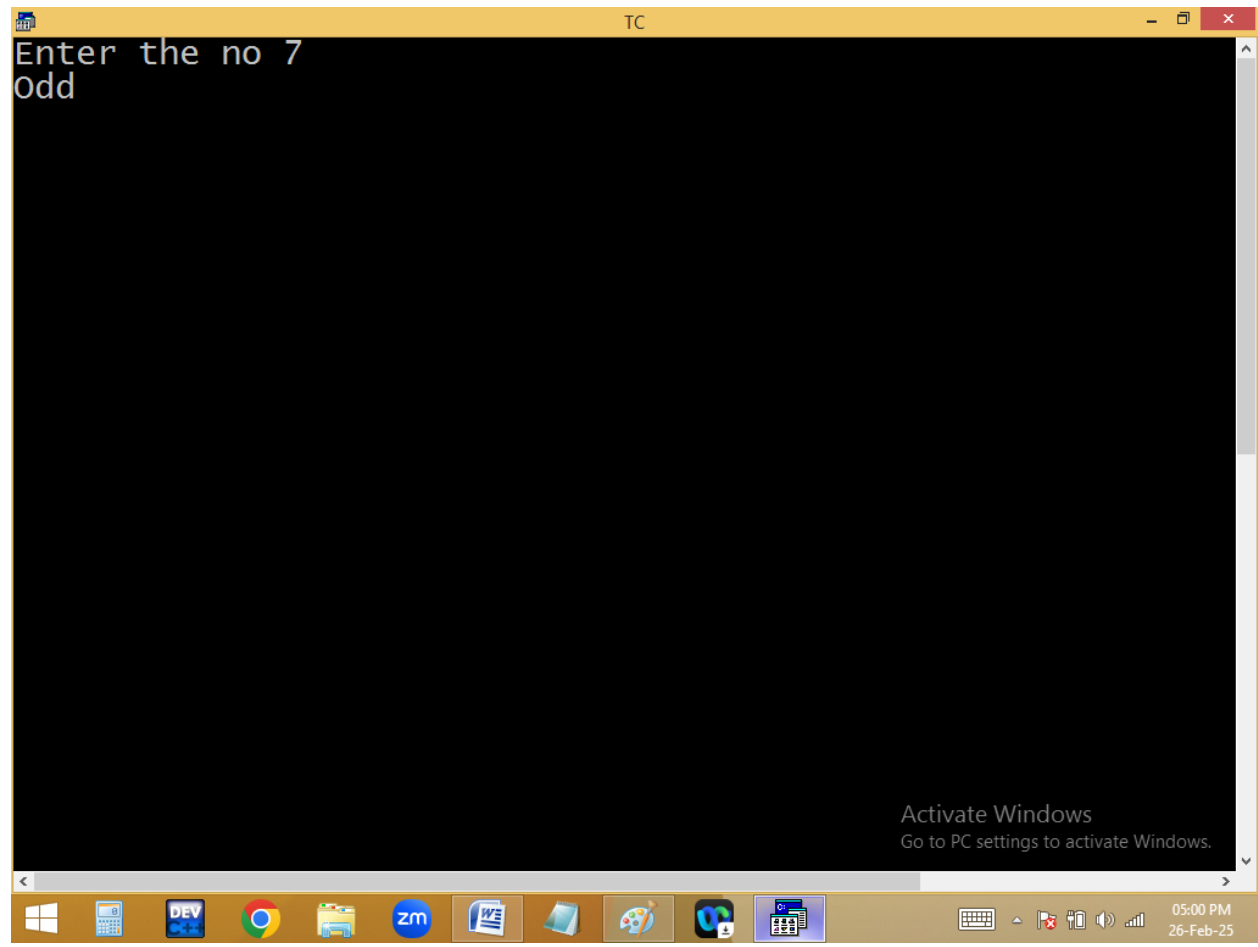


Finding leap / common year:

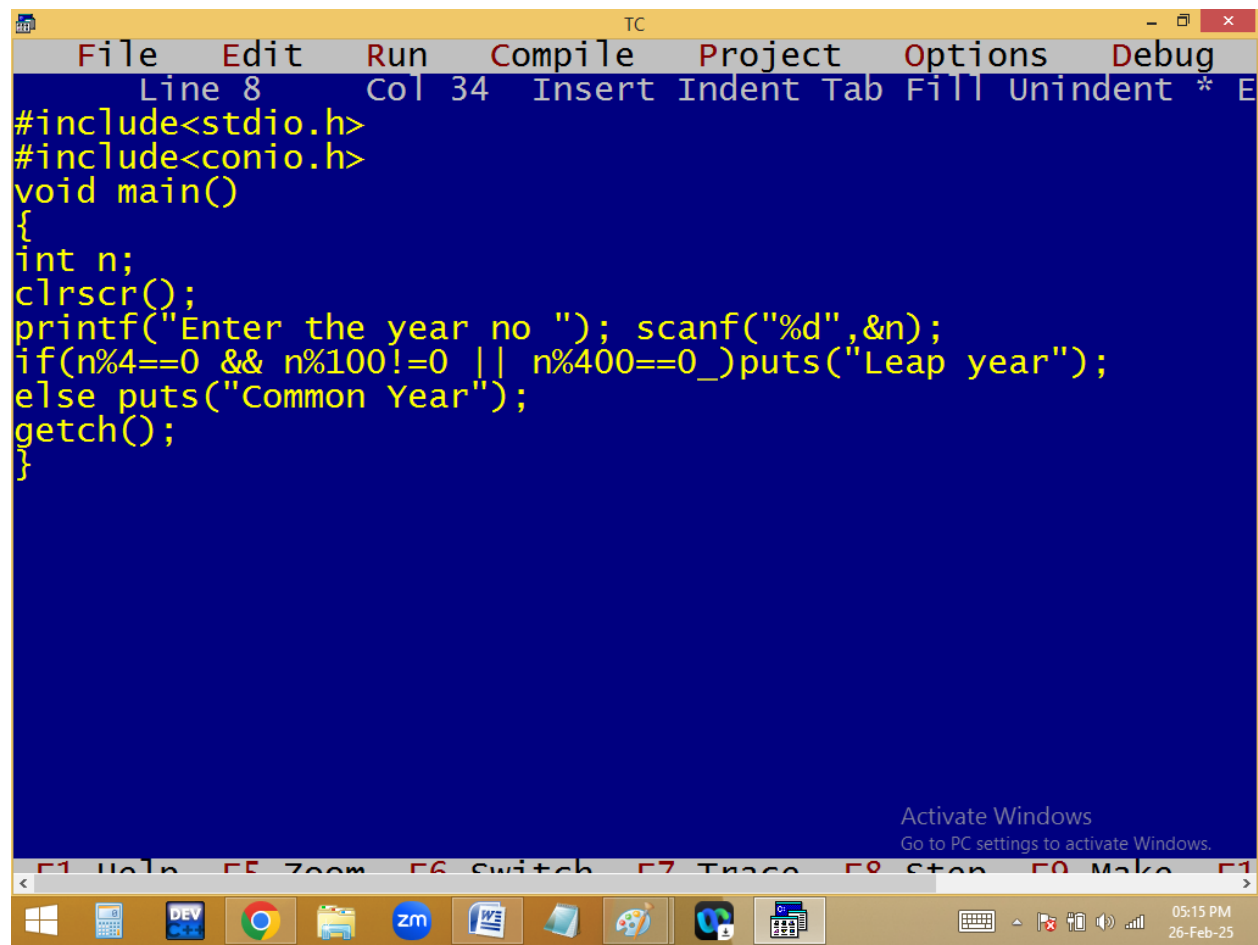



The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 8" and "Col 34". The main editing area has a blue background and contains the following C code:


```
#include<stdio.h>
#include<conio.h>
void main()
{
    int n;
    clrscr();
    printf("Enter the year no "); scanf("%d",&n);
    if(n%4==0 && n%100!=0 || n%400==0)puts("Leap year");
    else puts("Common Year");
    getch();
}
```


At the bottom of the window, there is a taskbar with various application icons including Windows Explorer, Dev-C++, Google Chrome, and Zoom. The system tray on the right shows the time as 05:15 PM and the date as 26-Feb-25. An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.

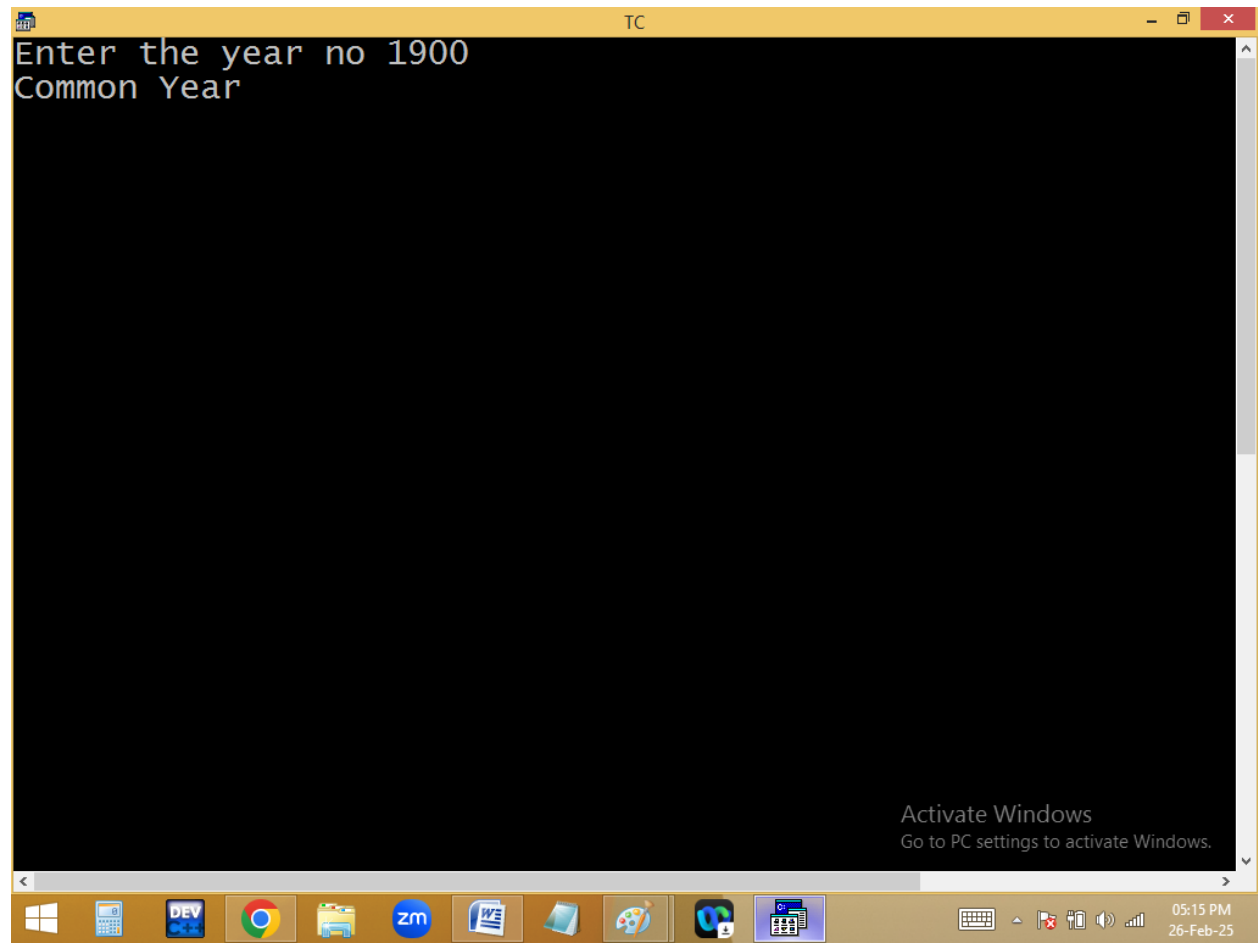

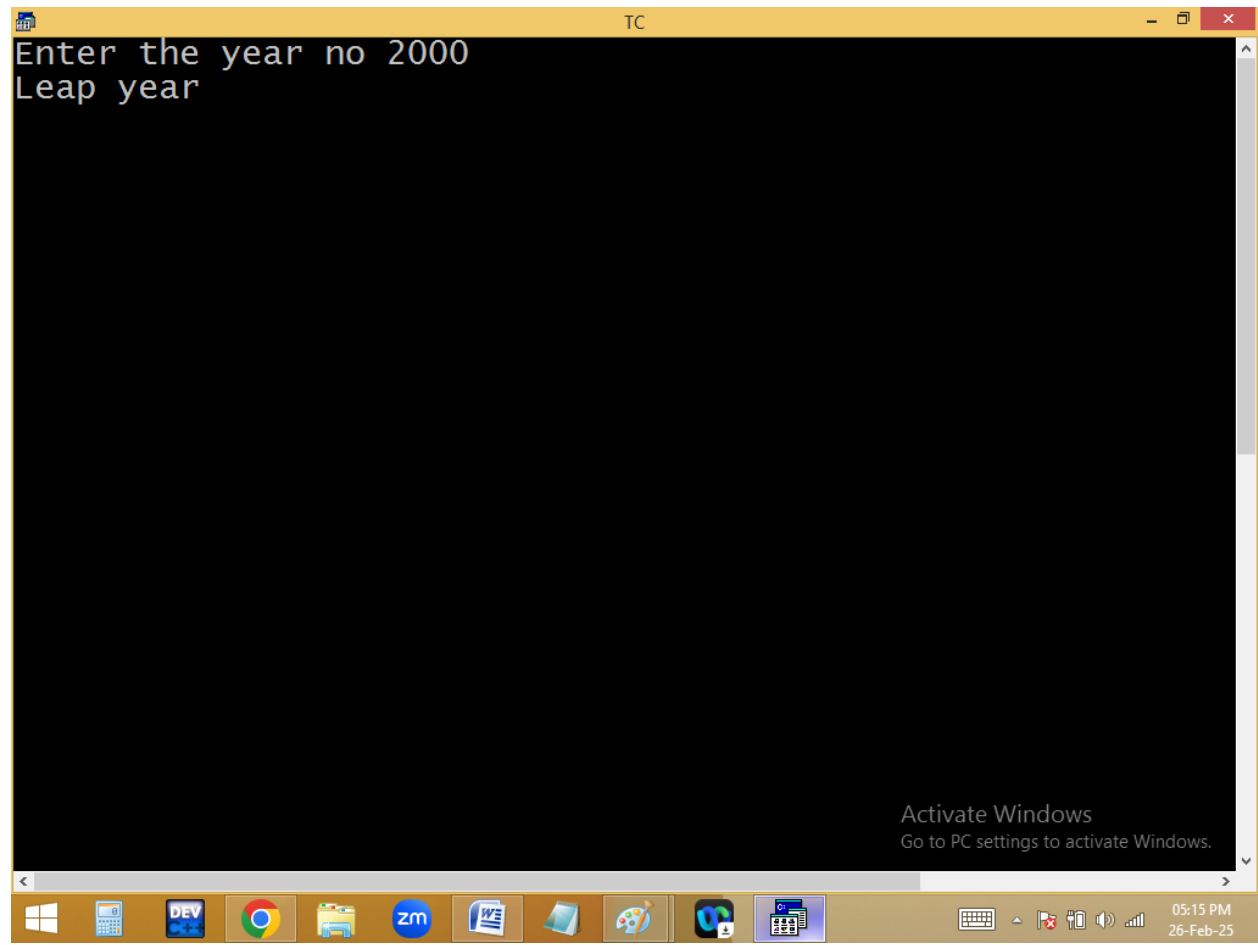

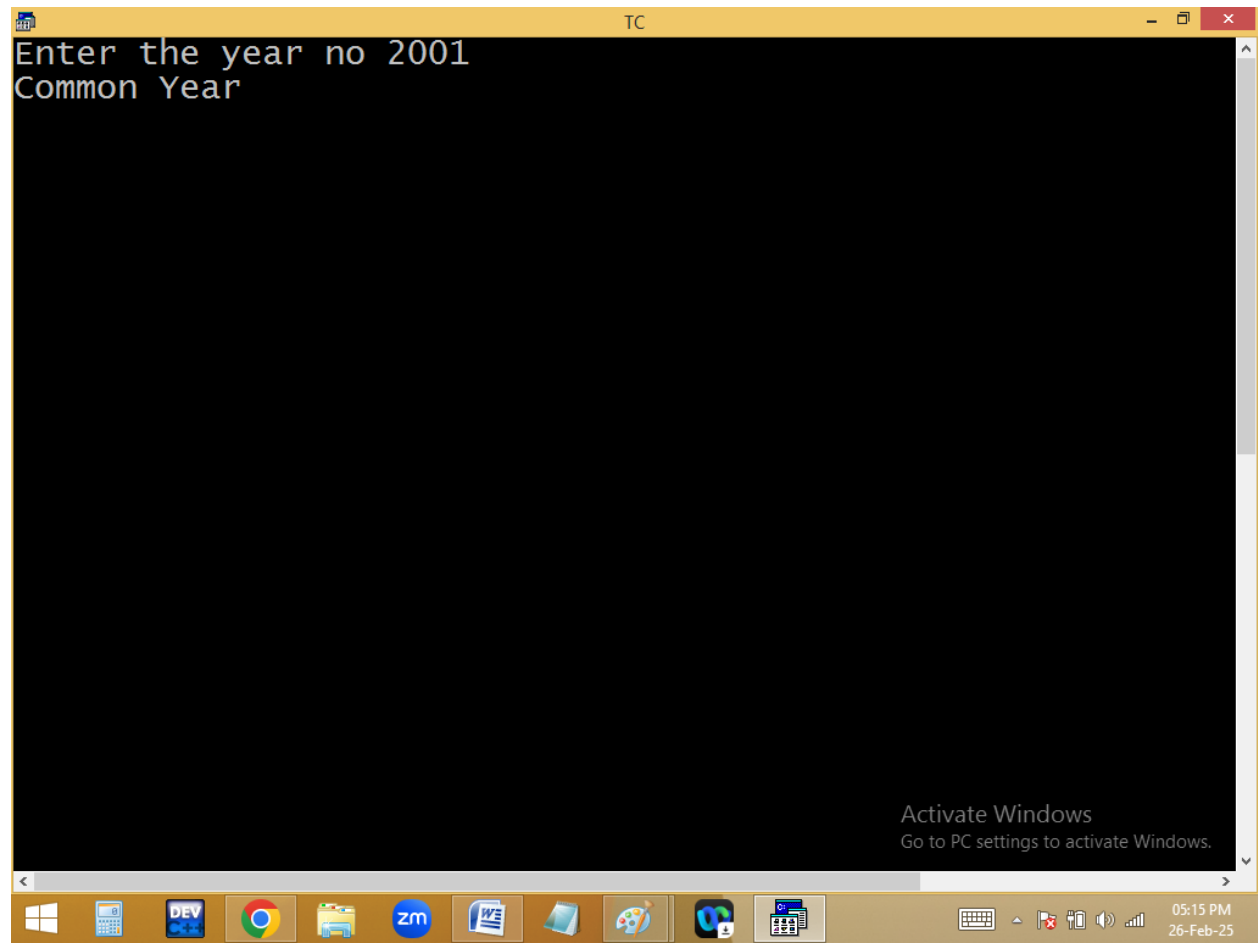

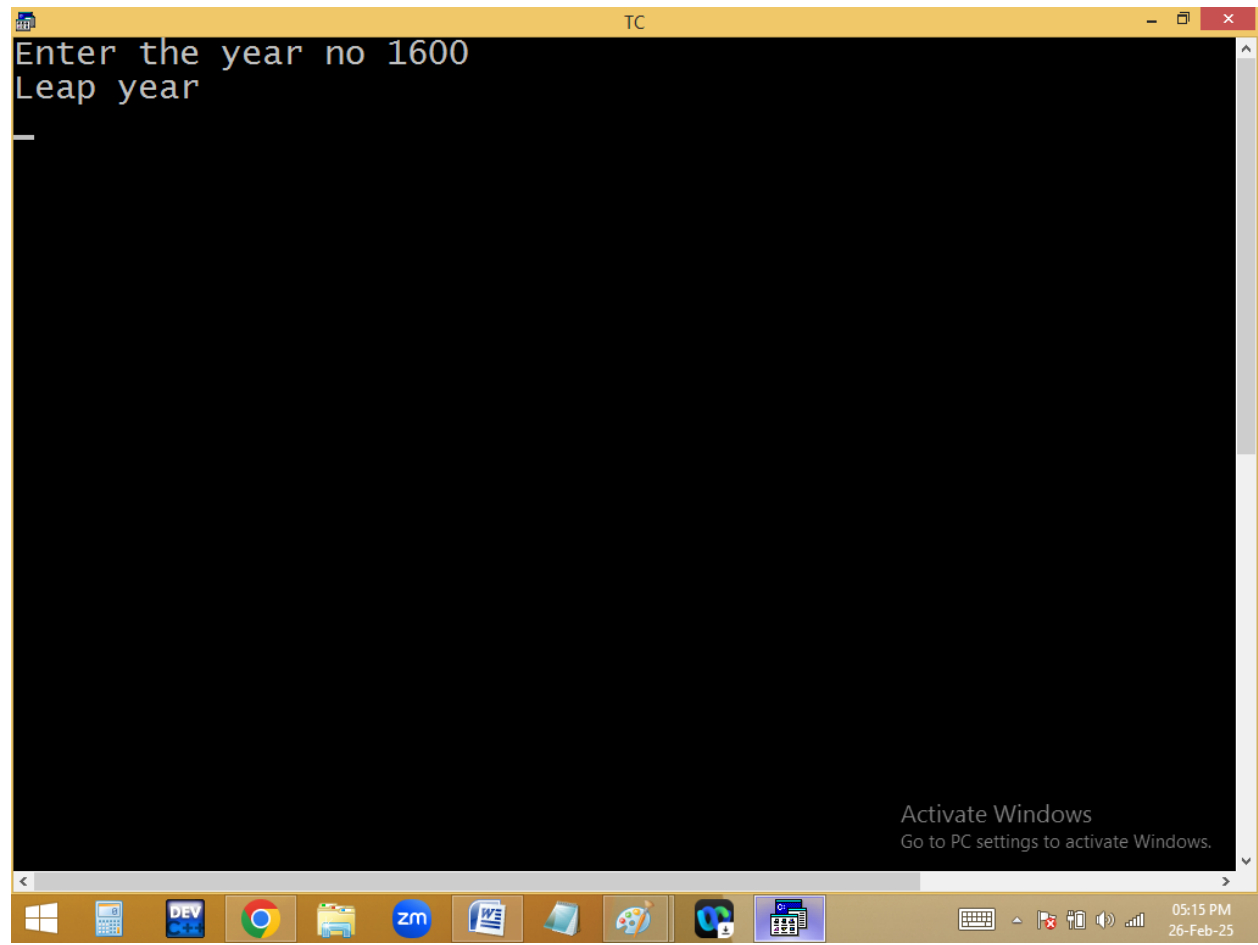

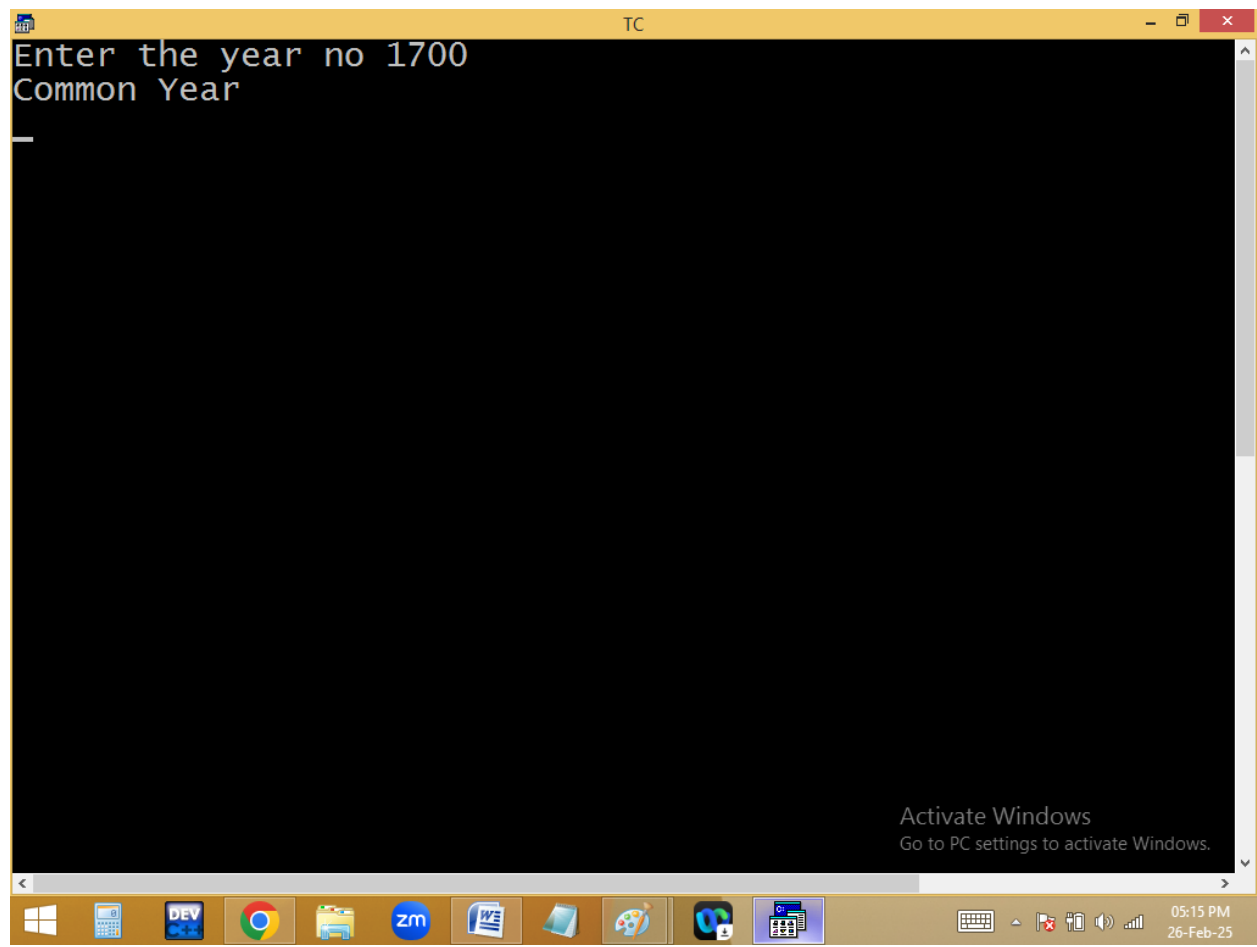

$$\begin{array}{r} 4 \overline{) 1900} \quad (475 \quad 100) \quad 1900 \quad (19 \\ \underline{1900} \\ 0 \end{array}$$

0 ✓

$$\begin{array}{r} 400 \overline{) 1900} \quad (4 \\ \underline{1600} \\ 300 \end{array}$$

300 = 0 ✗


$$\begin{array}{r} 0 \overline{) 0} \quad (0 \\ \underline{0} \\ 0 \end{array}$$

0 = 0 ✗

$$\begin{array}{r}
 4 \overline{) 2000} \begin{array}{l} \checkmark \\ (500 \text{ } 100) \end{array} \quad \begin{array}{r} X \\ 2000(20 \\ \underline{2000} \\ 00=0 \end{array} \quad \parallel \quad \begin{array}{r} 400 \overline{) 2000} (5 \\ \underline{2000} \\ 00=0 \end{array}
 \end{array}$$

Read a salesman sales and find the gross amount using below table.

Sales $\geq$ 100000	Sales $<$ 100000
Basic=10000	Basic=10000
Da=65.5% in basic	Da=65.5% in basic
Bonus=10000	Bonus=2000
Commission=10% of sales	Commission=5% of sales
Gross=basic+da+bonus+commission	

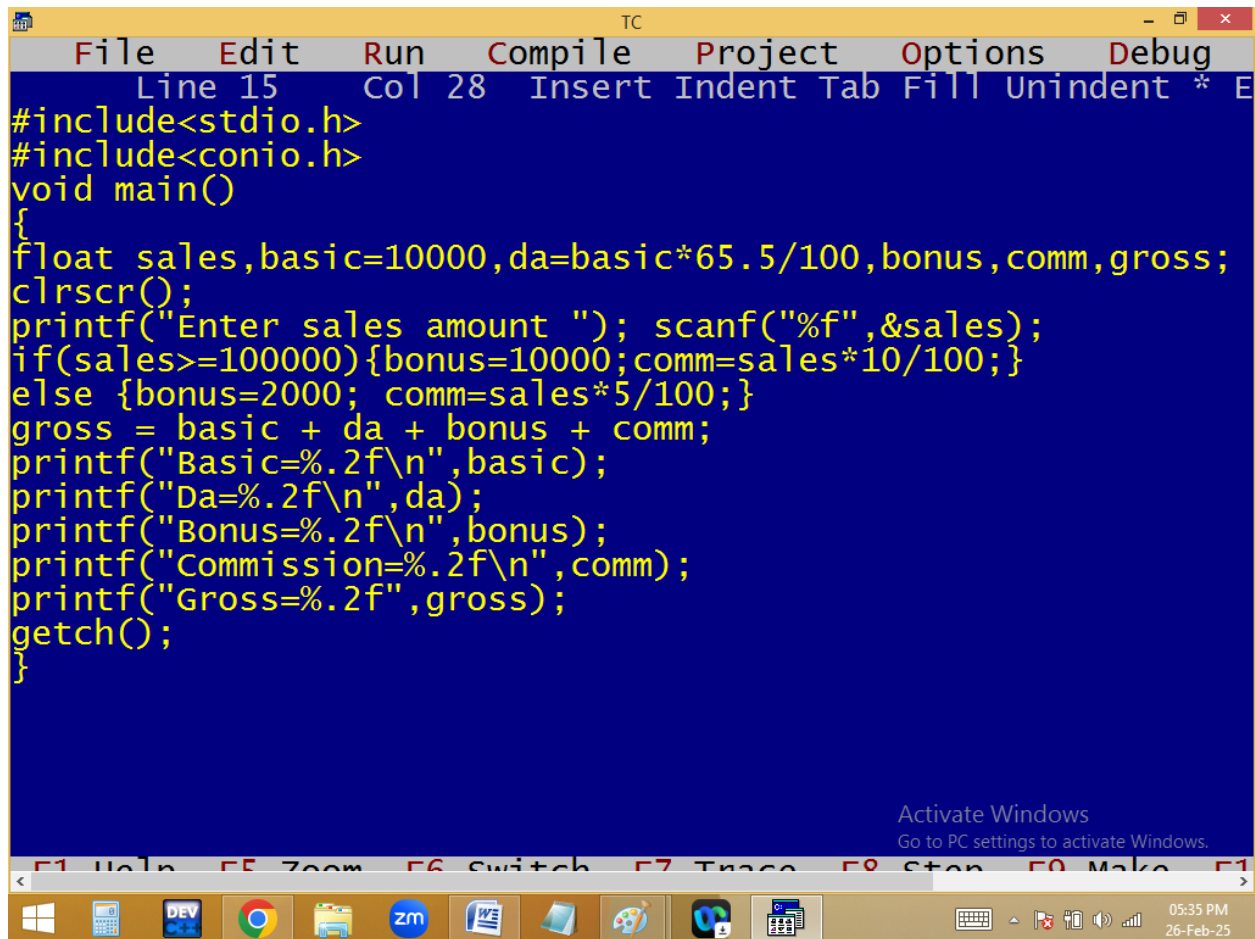


The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, the status bar shows "Line 15", "Col 28", and a list of editing actions: "Insert", "Indent", "Tab", "Fill", "Unindent", "*", and "E". The main editing area has a blue background with yellow text. It contains a C program that calculates sales commission based on sales amount. The code includes headers for `stdio.h` and `conio.h`, defines a `main` function, and uses `float` variables for sales, basic salary, dearness allowance, bonus, commission, and gross salary. It uses `clrscr()` to clear the screen, `scanf` to take input, and `printf` to display results. A `getch()` call is at the end of the function. At the bottom of the window, there is a watermark that says "Activate Windows Go to PC settings to activate Windows." The Windows taskbar is visible at the very bottom, showing icons for Windows, Calculator, DEV C++, Google Chrome, File Explorer, Zoom, Word, and other applications. The system clock shows "05:35 PM 26-Feb-25".

```
#include<stdio.h>
#include<conio.h>
void main()
{
float sales,basic=10000,da=basic*65.5/100,bonus,comm,gross;
clrscr();
printf("Enter sales amount "); scanf("%f",&sales);
if(sales>=100000){bonus=10000;comm=sales*10/100;}
else {bonus=2000; comm=sales*5/100;}
gross = basic + da + bonus + comm;
printf("Basic=%.2f\n",basic);
printf("Da=%.2f\n",da);
printf("Bonus=%.2f\n",bonus);
printf("Commission=%.2f\n",comm);
printf("Gross=%.2f",gross);
getch();
}
```

```
TC
Enter sales amount 100000
Basic=10000.00
Da=6550.00
Bonus=10000.00
Commission=10000.00
Gross=36550.00_
```

Activate Windows
Go to PC settings to activate Windows.

05:35 PM
26-Feb-25

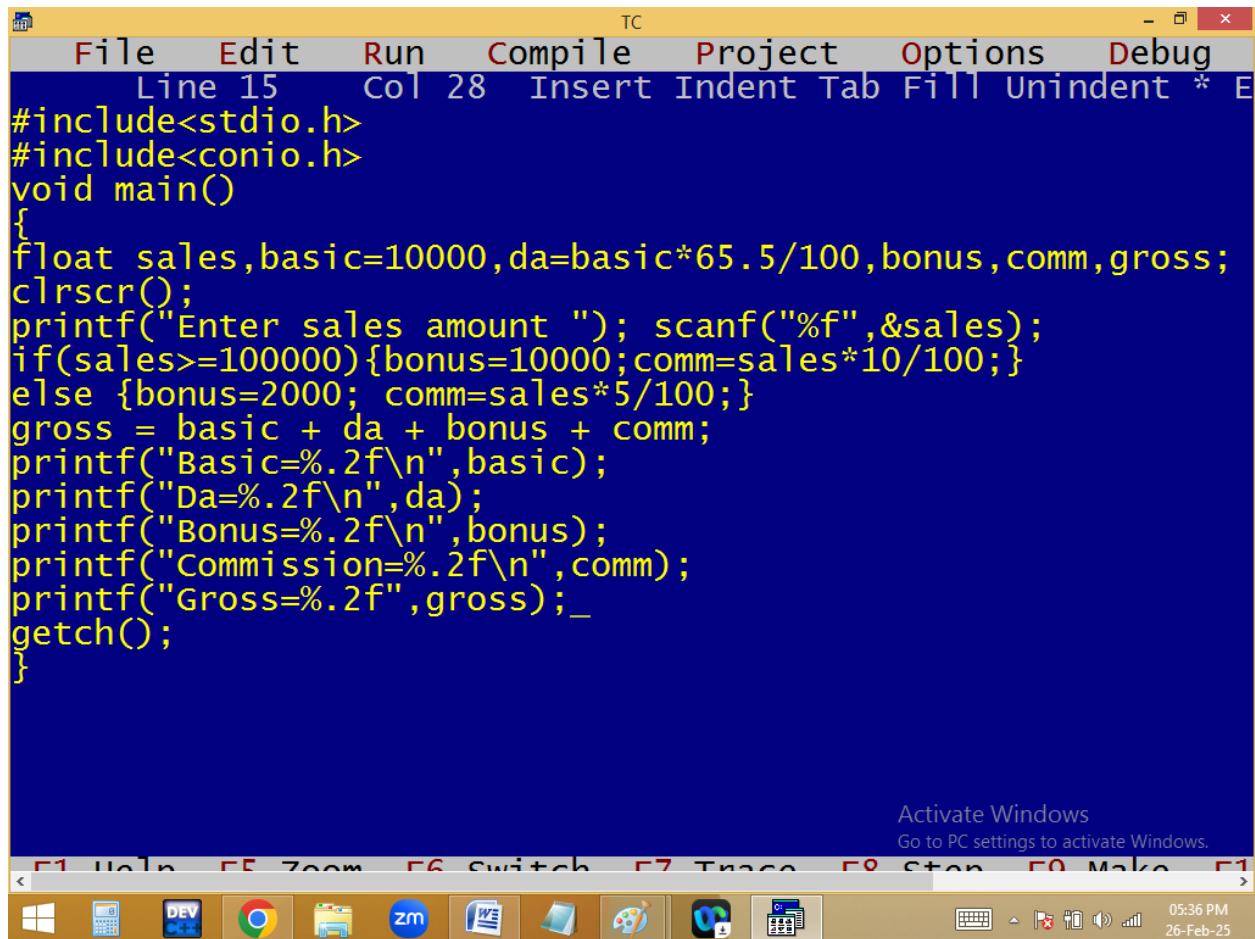

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 15", "Col 28", and lists keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", "*", and "E". The main editing area has a blue background with yellow text containing the following C code:


```
#include<stdio.h>
#include<conio.h>
void main()
{
float sales,basic=10000,da=basic*65.5/100,bonus,comm,gross;
clrscr();
printf("Enter sales amount "); scanf("%f",&sales);
if(sales>=100000){bonus=10000;comm=sales*10/100;}
else {bonus=2000; comm=sales*5/100;}
gross = basic + da + bonus + comm;
printf("Basic=%.2f\n",basic);
printf("Da=%.2f\n",da);
printf("Bonus=%.2f\n",bonus);
printf("Commission=%.2f\n",comm);
printf("Gross=%.2f",gross);_
getch();
}
```

At the bottom of the window, there is a taskbar with icons for Windows, a calculator, a folder, a document, a paint application, and a terminal. A system tray on the right shows the time "05:36 PM" and the date "26-Feb-25". An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.

```
TC
Enter sales amount 99999
Basic=10000.00
Da=6550.00
Bonus=2000.00
Commission=4999.95
Gross=23549.95_
```

Activate Windows
Go to PC settings to activate Windows.

05:36 PM
26-Feb-25

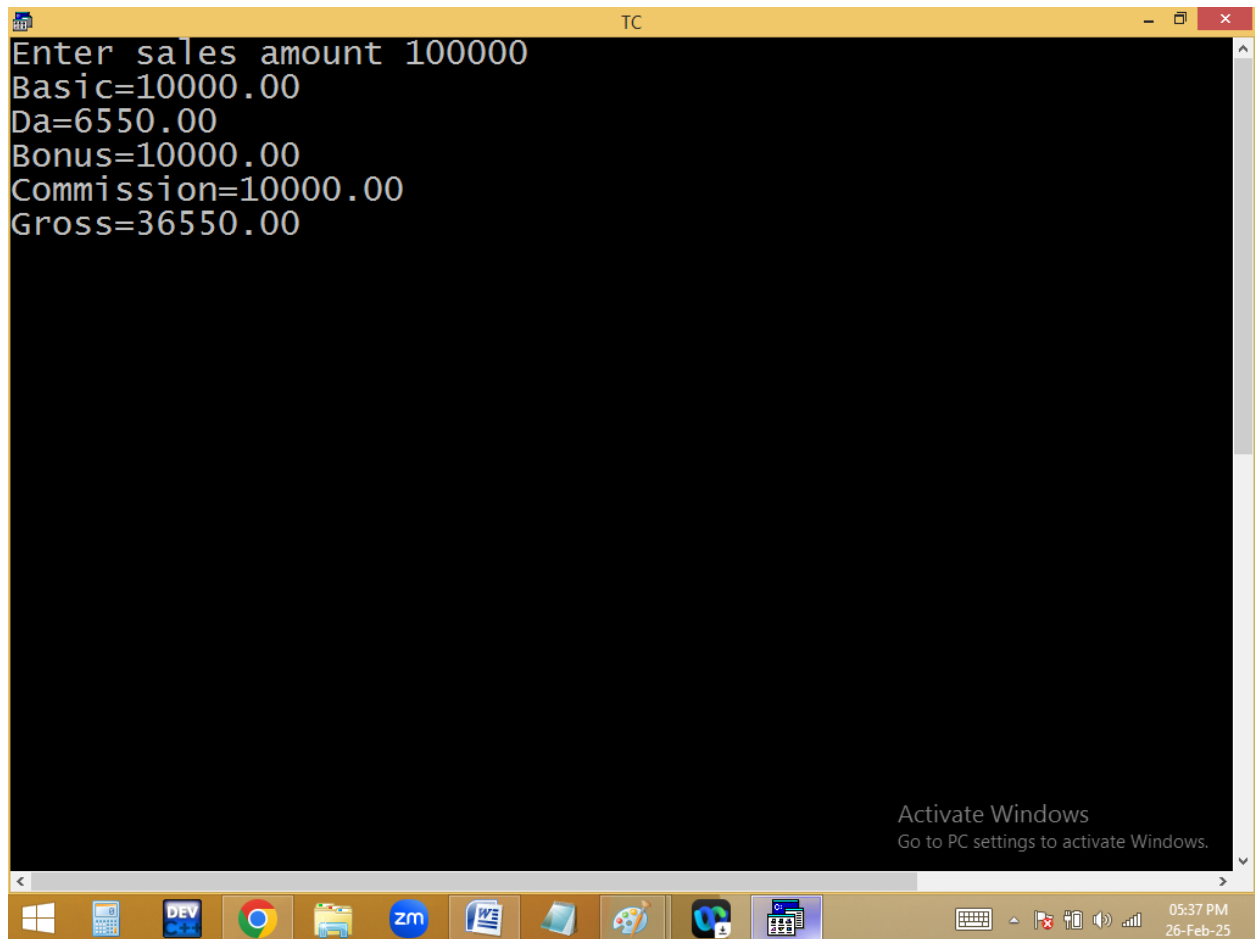


```
TC
Enter sales amount 100000
Basic=10000.00
Da=6550.00
Bonus=10000.00
Commission=10000.00
Gross=36550.00

Activate Windows
Go to PC settings to activate Windows.
```

The screenshot shows a Windows 10 desktop environment. A Turbo C++ (TC) window is open, displaying a salary calculation program. The program prompts the user to enter a sales amount, which is 100000. It then calculates and displays the following values: Basic salary (10000.00), Dearness Allowance (Da) (6550.00), Bonus (10000.00), Commission (10000.00), and the total Gross salary (36550.00). The Windows taskbar at the bottom contains icons for various applications, including the Start menu, Task View, File Explorer, Microsoft Edge, Zoom, Word, and several utility icons. The system clock in the bottom right corner shows the time as 05:37 PM on 26-Feb-25.


Finding voter eligibility:

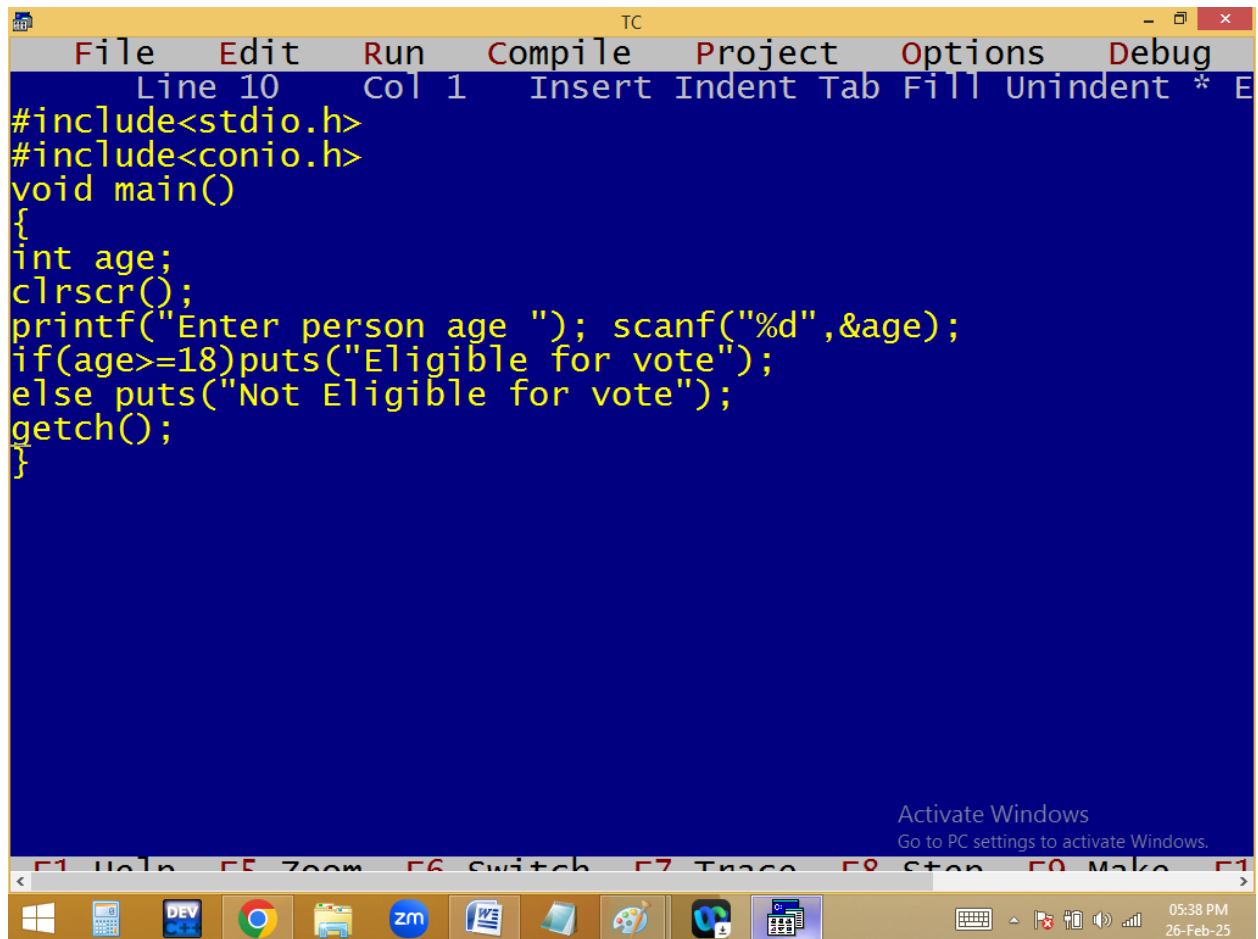



The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates "Line 10 Col 1" and lists keyboard shortcuts: Insert, Indent, Tab, Fill, Unindent, *, and E. The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int age;
clrscr();
printf("Enter person age "); scanf("%d",&age);
if(age>=18)puts("Eligible for vote");
else puts("Not Eligible for vote");
getch();
}
```

At the bottom right of the IDE window, there is a message: "Activate Windows Go to PC settings to activate Windows." The Windows taskbar is visible at the bottom, showing icons for Windows, Calculator, DEV C++, Google Chrome, File Explorer, Zoom, Word, and other applications. The system clock in the bottom right corner shows "05:38 PM 26-Feb-25".

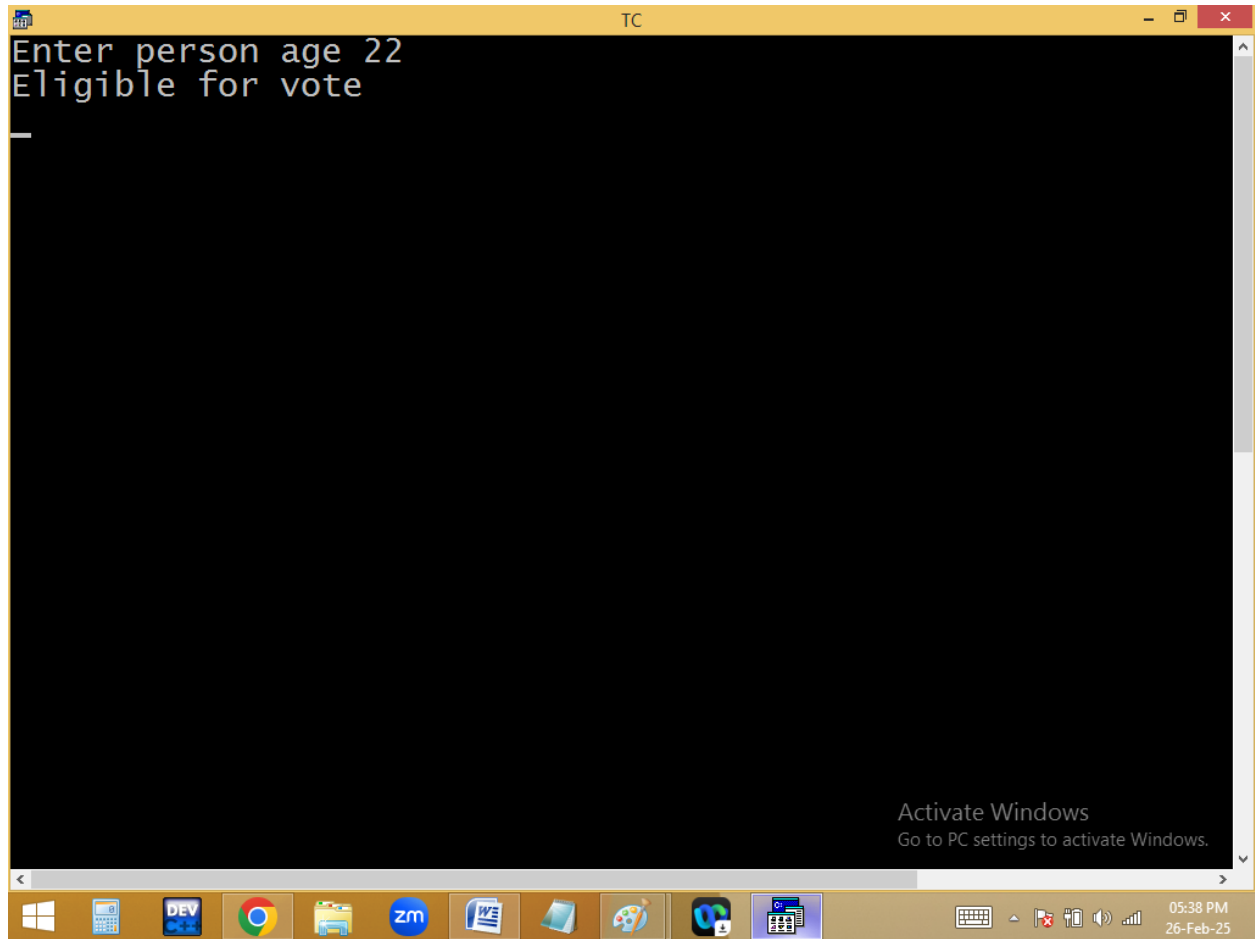

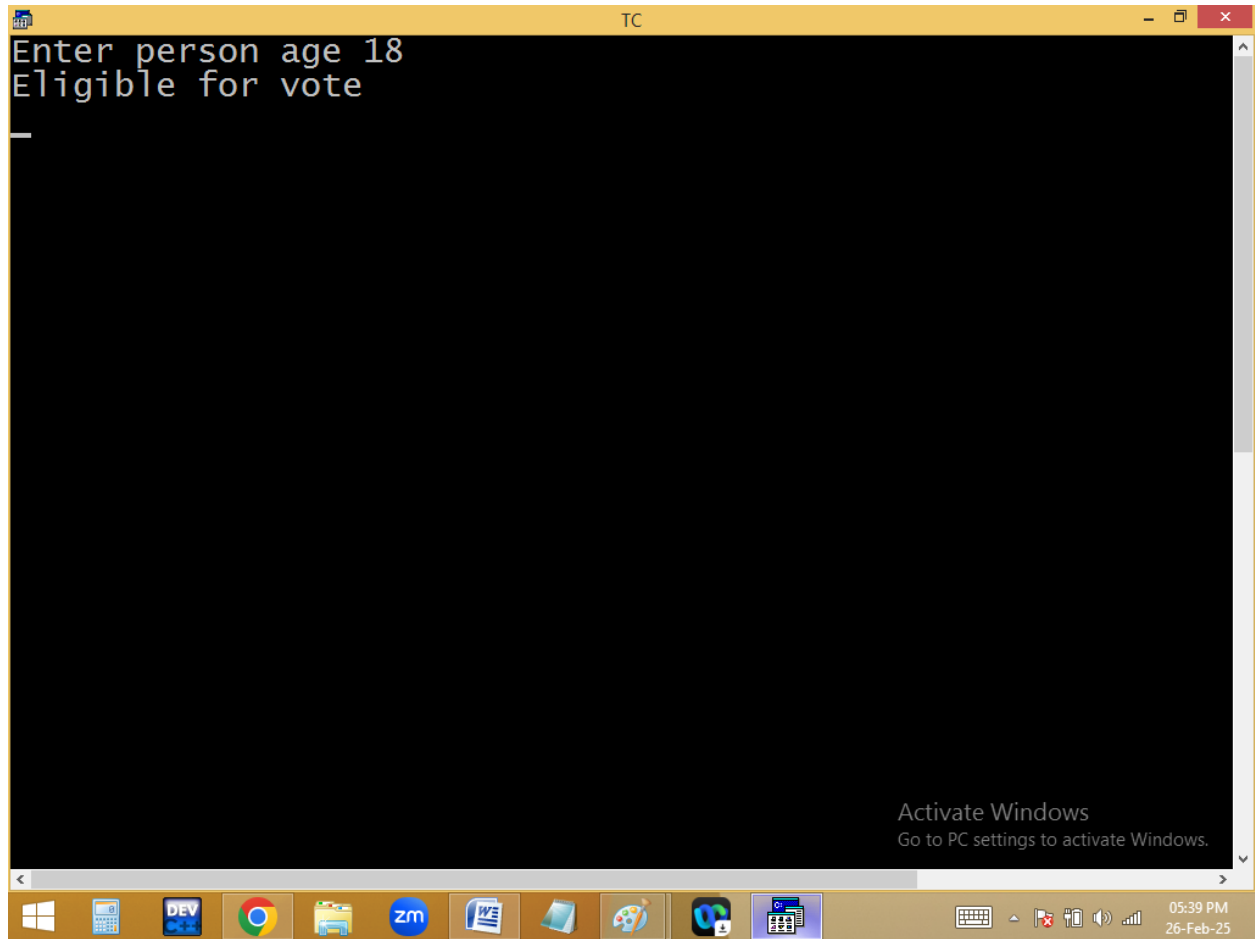

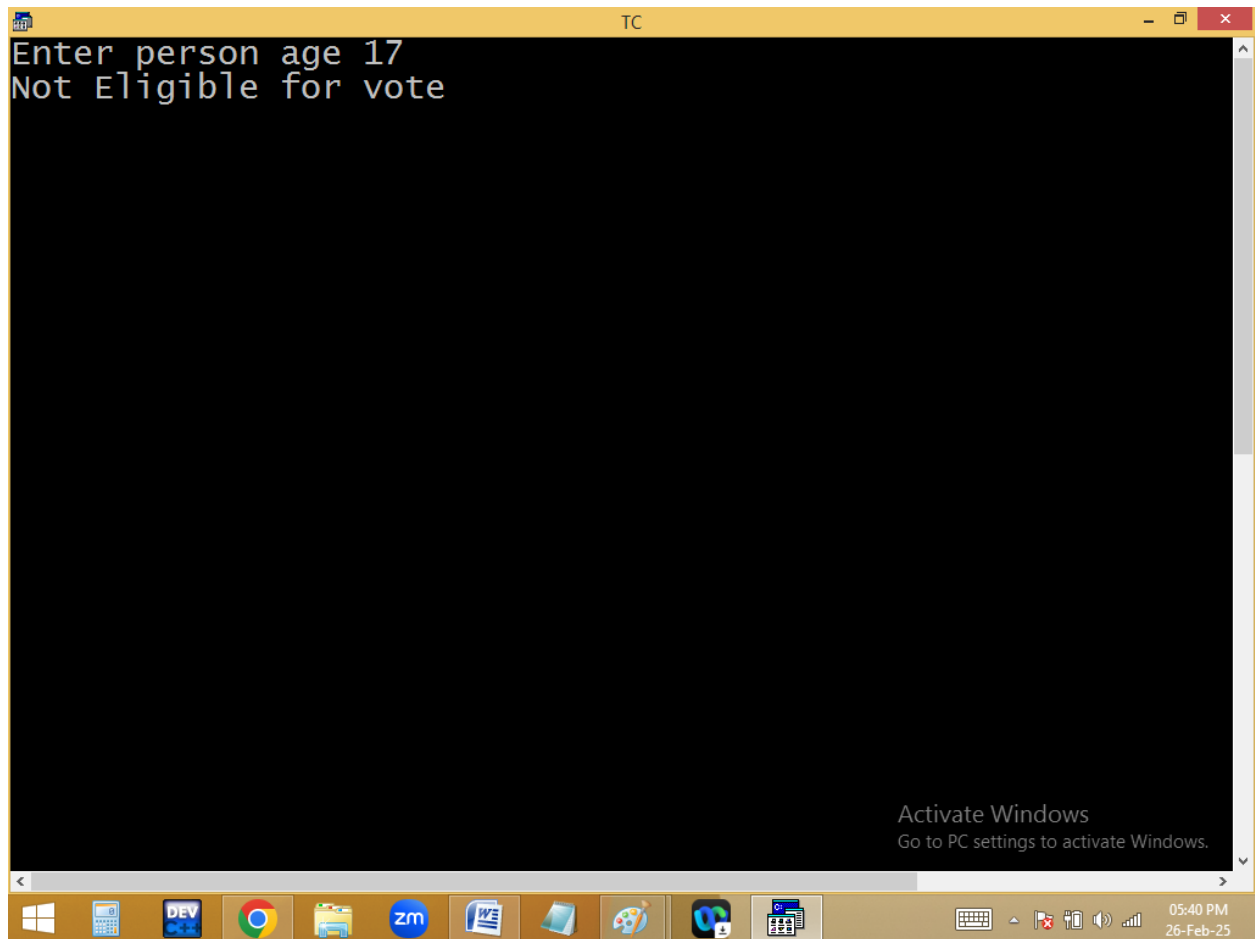

Read a person age and gender and determine that person eligible for marriage or not?

