

Modeling and Numerical Solution of Damped Simple Pendulums at Large Amplitudes and Educational Visualization with Manim

Hélio Delfino Lopes de Alcântara | Advisor: Prof. Letícia N. Coelho

University of Brasília – Institute of Physics

The 2026 Autumn Meeting of the Brazilian Physical Society



Introduction

The simple pendulum is one of the most familiar systems in classical mechanics, but its apparently elementary behavior hides a relevant non-linear problem when the angular amplitude is no longer small. In this regime, the approximation $\sin \theta \approx \theta$ is not sufficient to describe the motion, and dissipative effects modify both the amplitude and the energy of the system over time.

This work investigates damped simple pendulums at large amplitudes by combining experimental data, numerical integration, and scientific visualization. The analysis uses Python routines to solve the nonlinear equation of motion, extract peaks from measured signals, compare damping regimes, and produce visual materials with Manim. The central idea is not only to compute the motion, but to build a bridge between the mathematical model, the measured dynamics, and an educational visual representation of phase-space evolution.

Research Question and Objectives

The project asks how a damped pendulum behaves outside the linear small-angle regime and how this behavior can be represented clearly for teaching and analysis.

- Model the nonlinear damped pendulum without replacing $\sin \theta$ by θ .
- Estimate oscillation peaks using FFT-assisted peak detection.
- Analyze amplitude, velocity, phase space, and energy decay.
- Compare experimental trends with synthetic/numerical datasets.
- Generate educational animations and interactive visualizations with Manim and Python.

Theoretical Model

For small angular displacements, the damped pendulum can be approximated by the linear differential equation

$$\ddot{\theta} + 2\gamma\dot{\theta} + \omega_0^2\theta = 0, \quad (1)$$

where $\theta(t)$ is the angular displacement, γ is the damping parameter, and ω_0 is the natural angular frequency of the undamped system.

The behavior of the system depends on the relation between γ and ω_0 . This leads to three characteristic damping regimes.

Underdamped regime: for $0 < \gamma < \omega_0$, the system oscillates with decreasing amplitude:

$$\omega_d = \sqrt{\omega_0^2 - \gamma^2}, \quad (2)$$

$$\theta(t) = e^{-\gamma t} [C_1 \cos(\omega_d t) + C_2 \sin(\omega_d t)]. \quad (3)$$

Equivalently,

$$\theta(t) = Ae^{-\gamma t} \cos(\omega_d t + \phi). \quad (4)$$

Critically damped regime: for $\gamma = \omega_0$, the system returns to equilibrium without oscillating and in the shortest possible time:

$$\theta(t) = (C_1 + C_2 t)e^{-\gamma t}. \quad (5)$$

For the initial conditions

$$\theta(0) = \theta_0, \quad \dot{\theta}(0) = 0, \quad (6)$$

the solution becomes

$$\theta(t) = \theta_0(1 + \gamma t)e^{-\gamma t}. \quad (7)$$

Overdamped regime: for $\gamma > \omega_0$, the system also returns to equilibrium without oscillating, but more slowly than in the critical case:

$$\alpha = \sqrt{\gamma^2 - \omega_0^2}, \quad (8)$$

$$\theta(t) = C_1 e^{-(\gamma+\alpha)t} + C_2 e^{-(\gamma-\alpha)t}. \quad (9)$$

Using $\theta(0) = \theta_0$ and $\dot{\theta}(0) = 0$, one obtains

$$C_1 = \frac{\gamma - \alpha}{2\alpha} \theta_0, \quad C_2 = \frac{\gamma + \alpha}{2\alpha} \theta_0. \quad (10)$$

For large amplitudes, the linear approximation $\sin \theta \approx \theta$ is no longer valid. Therefore, the complete nonlinear model is written as

$$\ddot{\theta} + 2\gamma\dot{\theta} + \omega_0^2 \sin \theta = 0. \quad (11)$$

This equation is solved numerically and used to generate the time-series curves and phase-space visualizations presented in this work.

Numerical and Data-Analysis Pipeline

The nonlinear second-order equation was rewritten as a first-order system,

$$\dot{\theta} = \omega, \quad \dot{\omega} = -\frac{b}{mL^2}\omega - \frac{g}{L}\sin \theta.$$

The numerical solution was obtained in Python and compared with experimental time series processed from Tracker and PASCO Capstone. The FFT was used as a calibration step for peak detection: the dominant frequency f_0 gives an estimated period $T = 1/f_0$, which is converted into a minimum distance between physical peaks. This prevents the peak-finding algorithm from interpreting noise fluctuations as real oscillations.

Velocity as a Function of Time

The velocity signal was analyzed in two different time intervals in order to compare the initial transient behavior with the long-time damped regime.

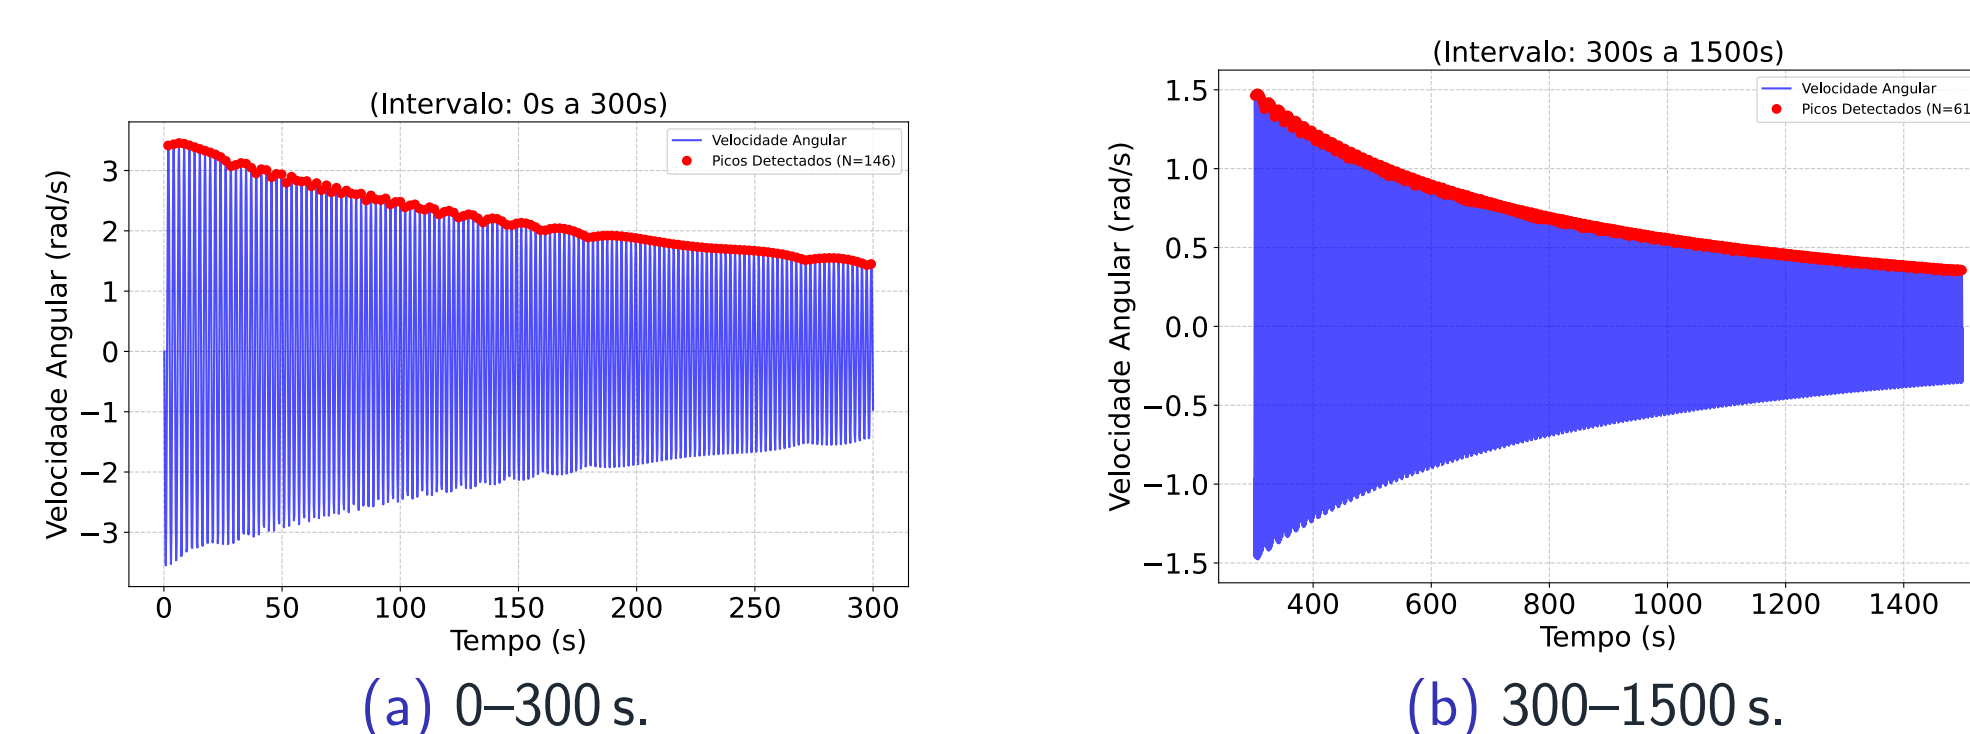


Figure: Velocity as a function of time for two different analysis intervals.

The maximum velocity was extracted over time to compare two damping regimes: a stronger initial damping regime and a weaker long-time damping regime.

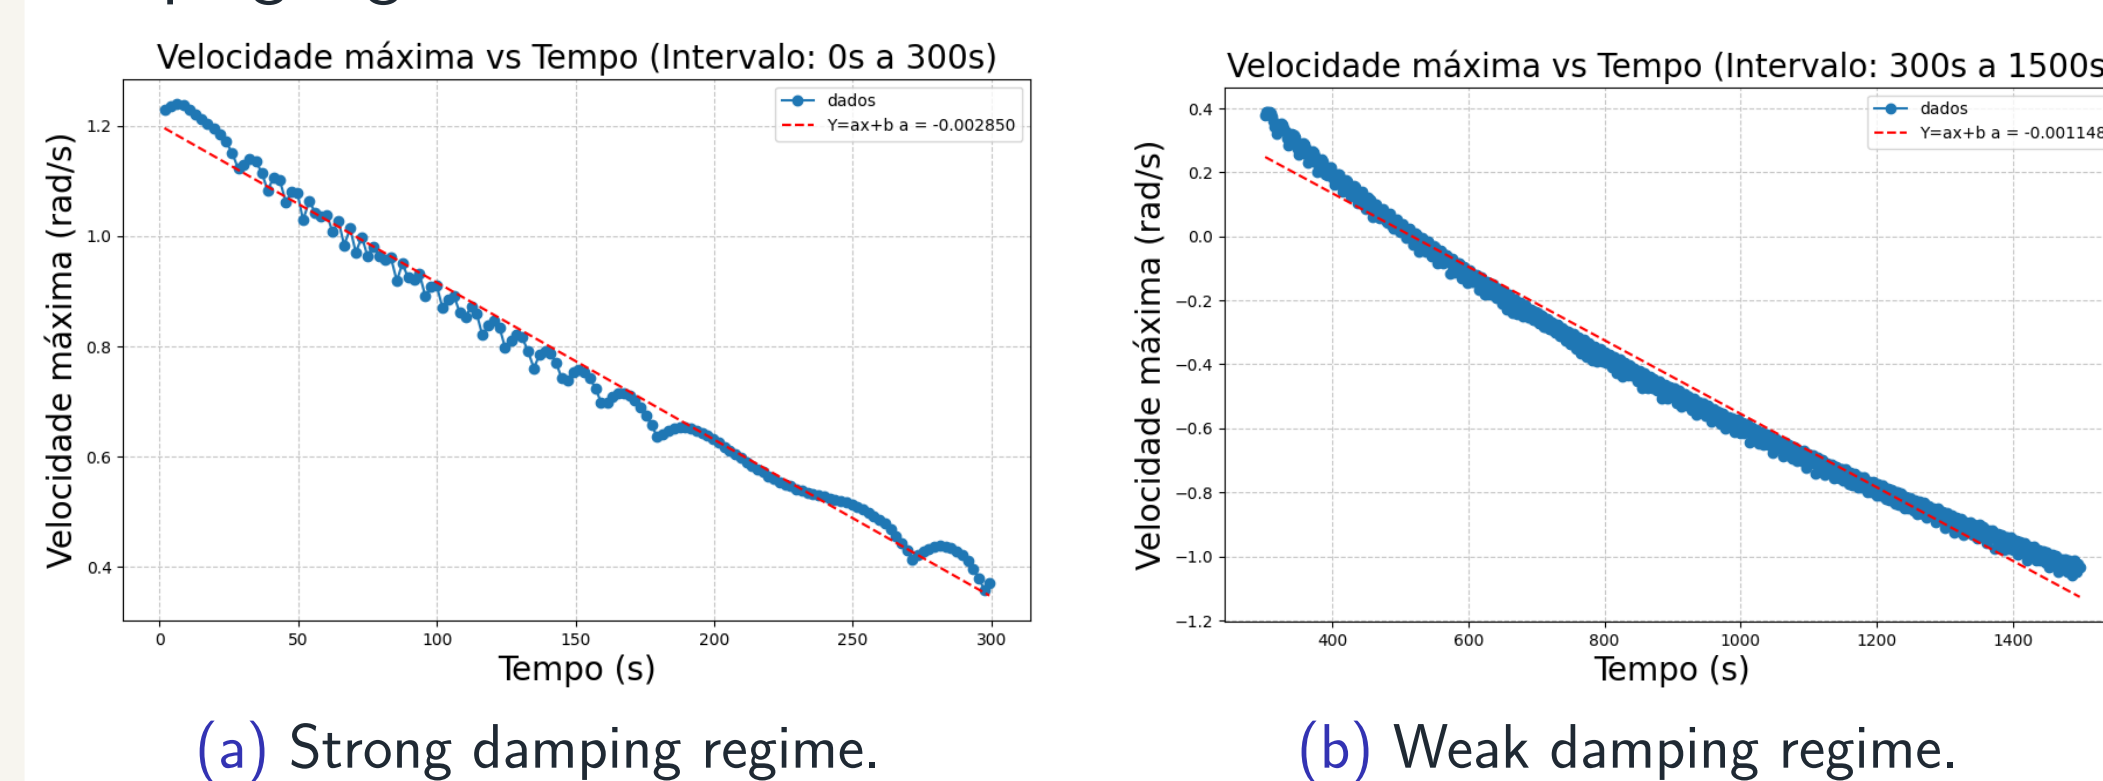


Figure: Maximum velocity as a function of time for two damping regimes.

Velocity as a Function of Amplitude

The relation between maximum velocity and amplitude is used to highlight the transition from the nearly linear regime to the nonlinear large-amplitude regime. For small amplitudes, the maximum velocity changes slowly, indicating that the system remains close to the linear approximation. As the amplitude increases, the maximum velocity grows more rapidly, showing that the pendulum dynamics clearly depart from the linear regime.

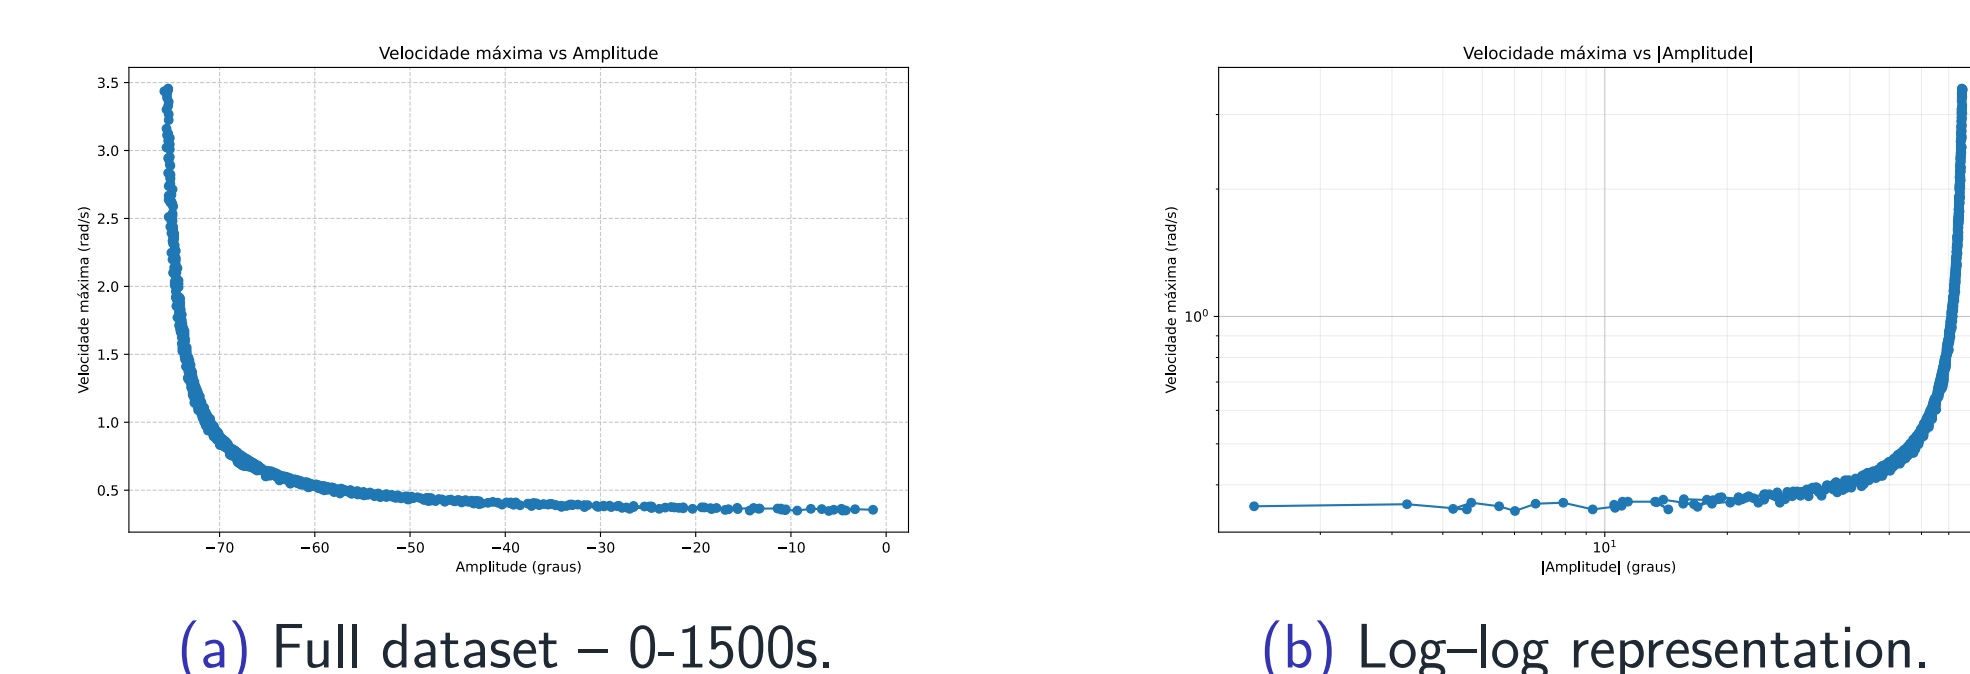


Figure: Maximum velocity as a function of amplitude.

Phase Space and Damping Regimes

Synthetic datasets were produced for different damping values in order to study qualitative features observed in the motion: large amplitudes, energy loss, and the contraction of phase-space trajectories. For the underdamped regime, the trajectory forms a spiral-like curve approaching equilibrium; stronger damping suppresses oscillations and changes the geometry of the phase portrait.

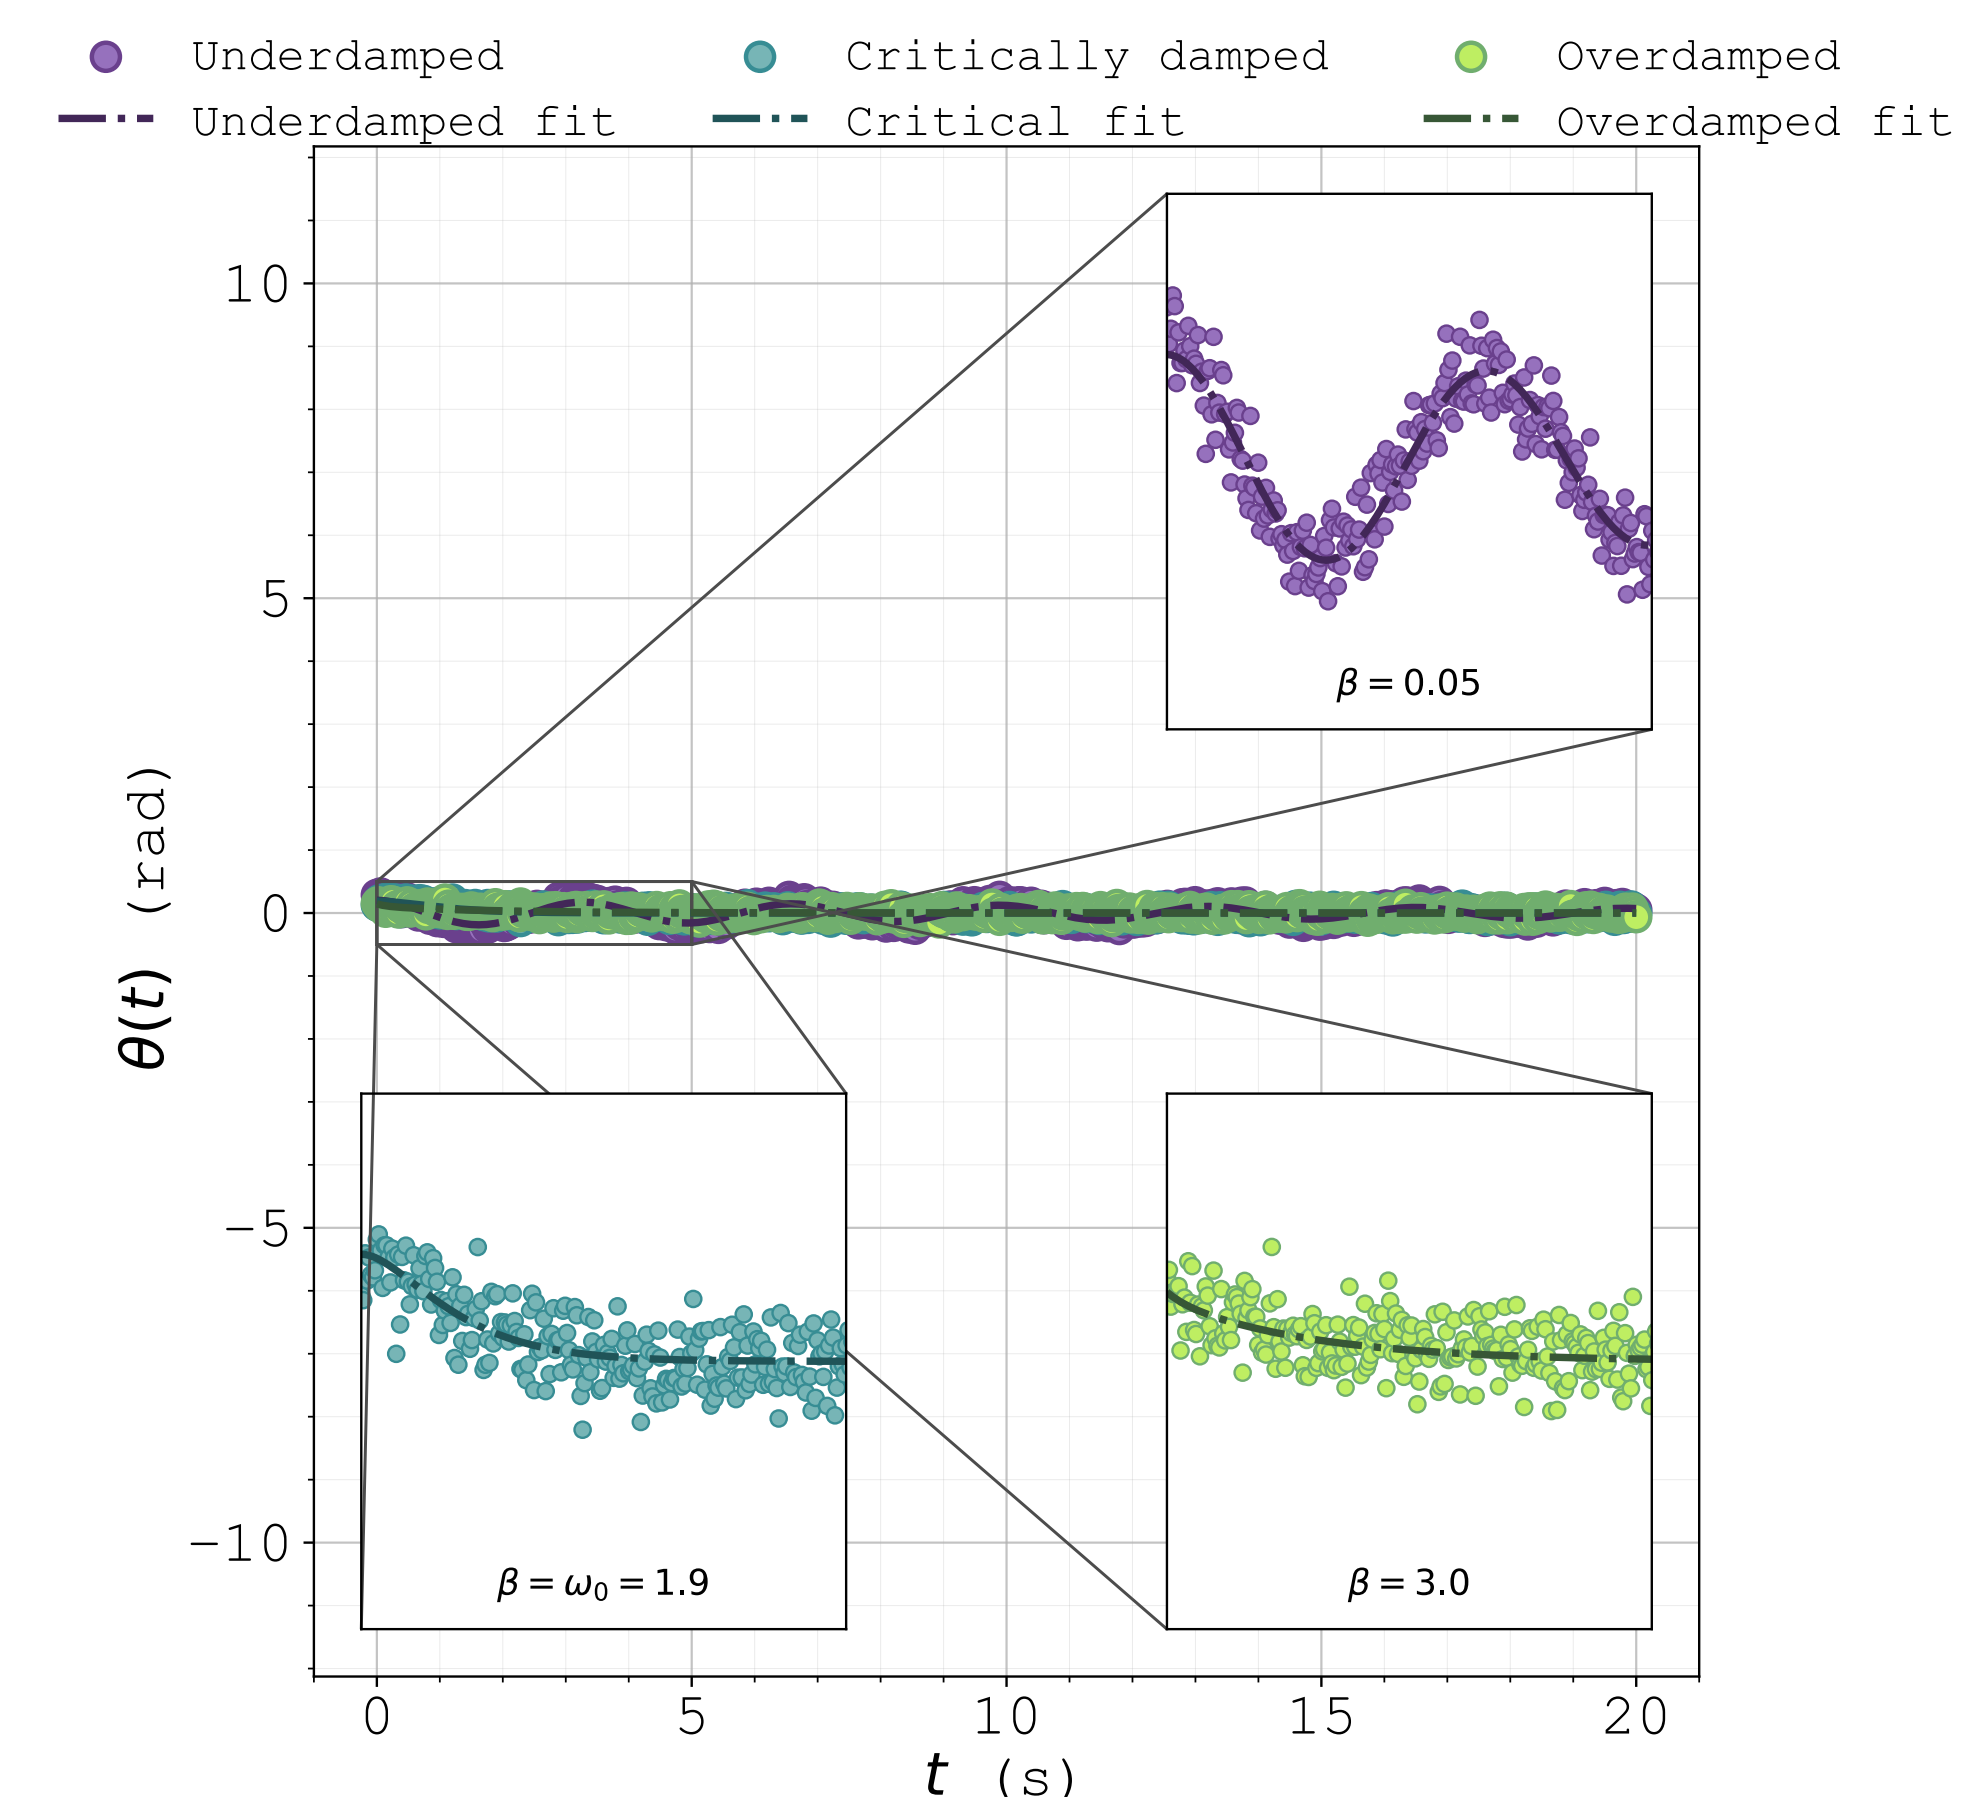


Figure: Graph showing the different damping regimes obtained from synthetic data with 5% pseudo-random Gaussian noise (seed = 0) and initial amplitude $A_0 = 0.2$ rad.

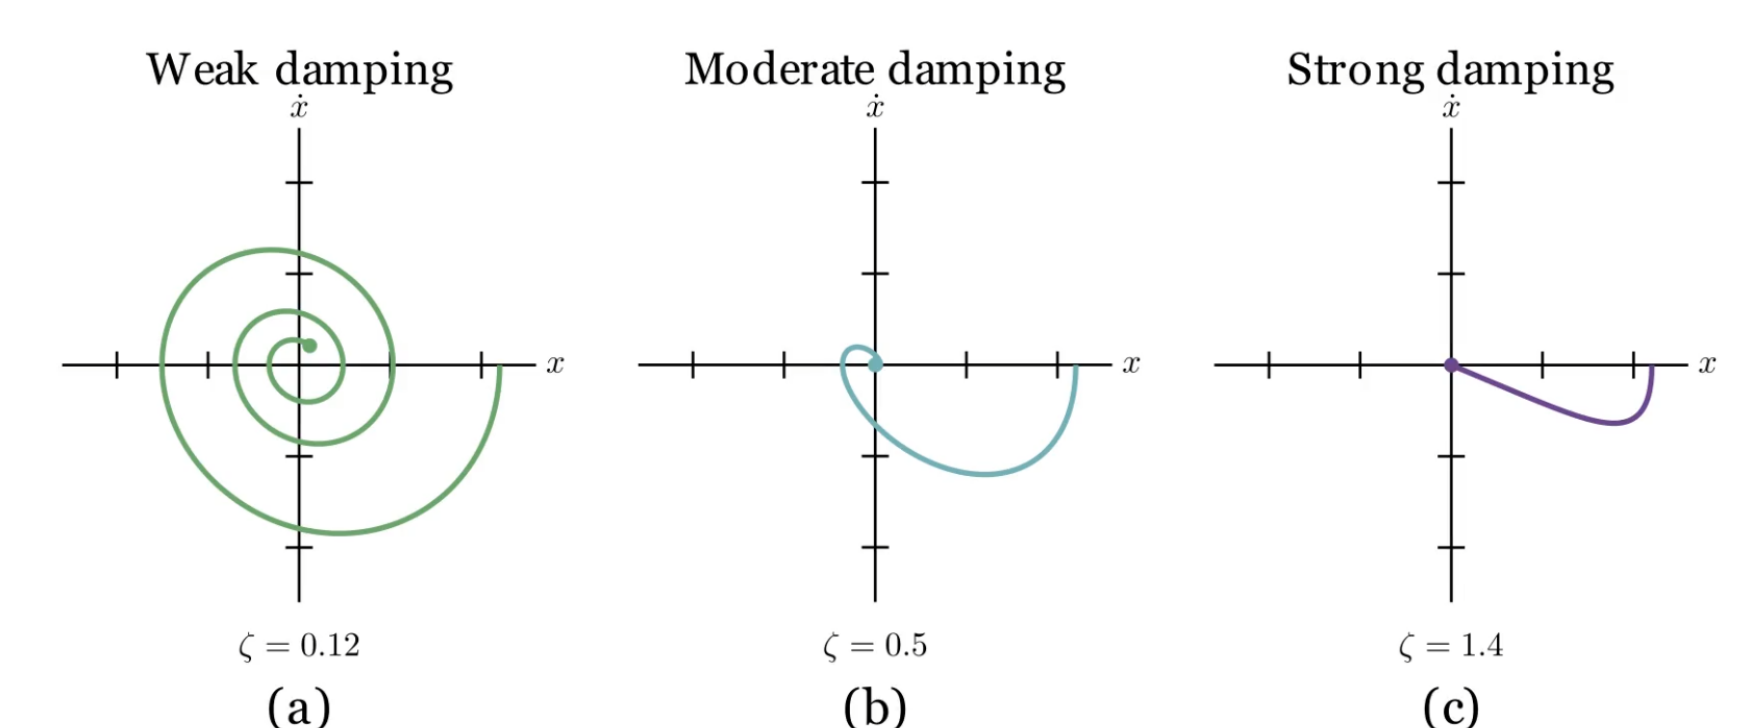


Figure: Phase-space trajectories for different damping regimes. In the weak damping regime ($\zeta = 0.12$), the system exhibits oscillatory motion with a slowly decreasing amplitude, producing a spiral trajectory toward equilibrium. For moderate damping ($\zeta = 0.5$), the oscillations decay more rapidly and the trajectory approaches equilibrium with fewer cycles. In the strong damping regime ($\zeta = 1.4$), the system returns to equilibrium without oscillating, characterizing an overdamped response.

Phase Flow and Educational Visualization

Por fazer...

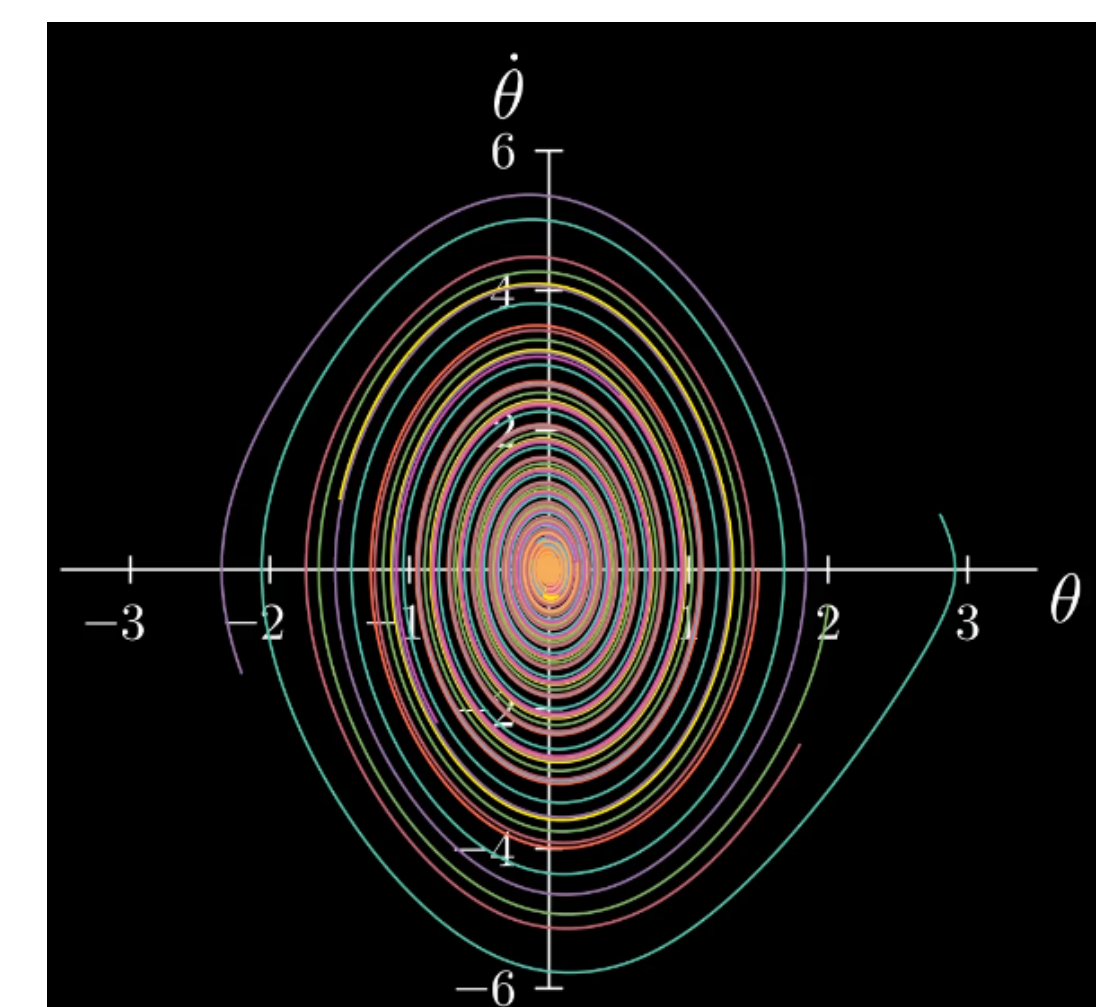


Figure: Phase-flow simulation with a set of 10 different initial conditions.

Conclusions

Por fazer...

Acknowledgments

The author gratefully acknowledges the financial support of the Institute of Physics at the University of Brasília (UnB) and the guidance of his advisor, Prof. Letícia N. Coelho.