


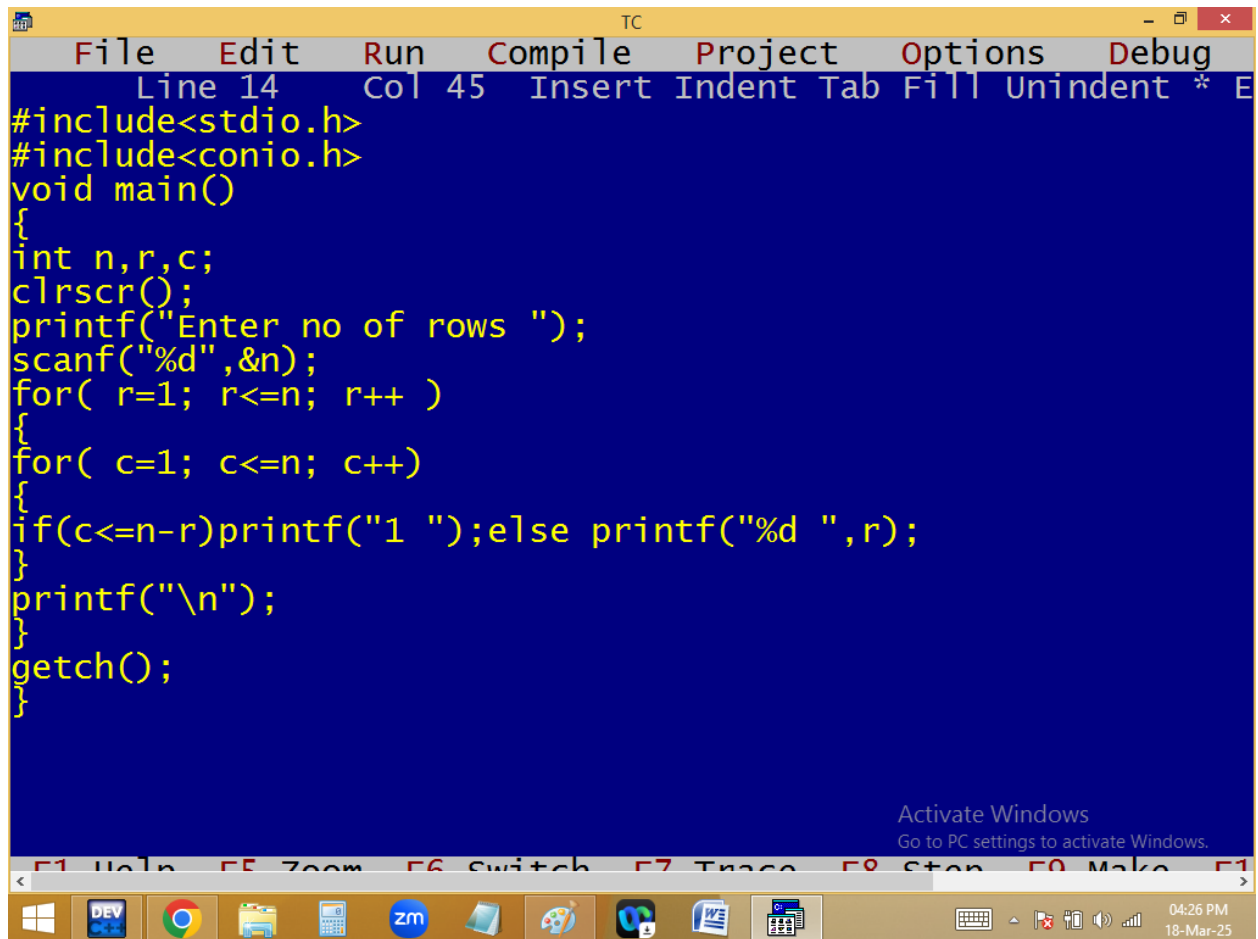

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates "Line 14 Col 45". The code editor contains the following C program:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int n,r,c;
    clrscr();
    printf("Enter no of rows ");
    scanf("%d",&n);
    for( r=1; r<=n; r++ )
    {
        for( c=1; c<=n; c++)
        {
            if(c<=n-r)printf("1 ");else printf("%d ",r);
        }
        printf("\n");
    }
    getch();
}
```

At the bottom of the window, there is a taskbar with icons for Windows, DEV C++, Google Chrome, File Explorer, Calculator, Zoom, and other applications. The system tray shows the time as 04:26 PM on 18-Mar-25. An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.

```
TC
Enter no of rows 4
1 1 1 1
1 1 2 2
1 3 3 3
4 4 4 4
```

Activate Windows
Go to PC settings to activate Windows.

04:26 PM
18-Mar-25

```

Enter no of rows 9
1 1 1 1 1 1 1 1 1
1 1 1 1 1 1 1 2 2
1 1 1 1 1 1 3 3 3
1 1 1 1 1 4 4 4 4
1 1 1 1 5 5 5 5 5
1 1 1 6 6 6 6 6 6
1 1 7 7 7 7 7 7 7
1 8 8 8 8 8 8 8 8
9 9 9 9 9 9 9 9 9

```


Activate Windows
Go to PC settings to activate Windows.

```


for( r=1; r<=4; r++ )
{
for( c=1; c<=4; c++)
{
    4-3=1
    4-2=2
    4-1=3
if( c<=n-r)p(1);else p(r);

}
p("\n");
}

```

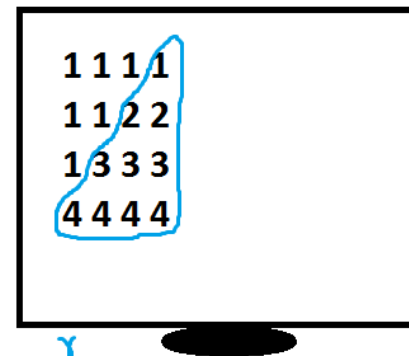

<u>n</u>	<u>r</u>	<u>1</u>	<u>r</u>
4	- 1 =	3	1
4	- 2 =	2	2
4	- 3 =	1	3
4	- 4 =	0	4

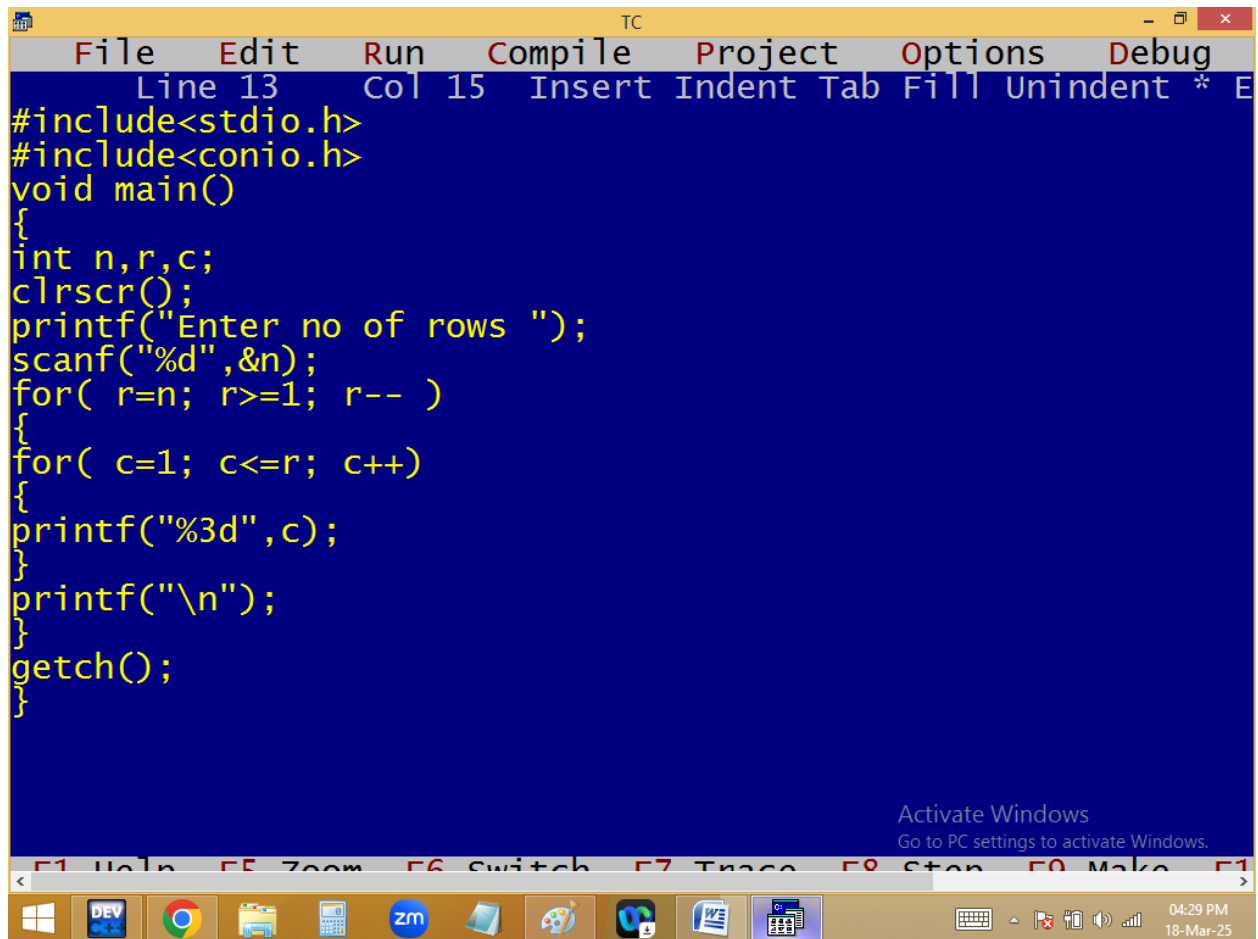

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates "Line 13 Col 15" and lists keyboard shortcuts: Insert, Indent, Tab, Fill, Unindent, *, and E. The main editing area has a blue background and contains the following C code:


```
#include<stdio.h>
#include<conio.h>
void main()
{
    int n,r,c;
    clrscr();
    printf("Enter no of rows ");
    scanf("%d",&n);
    for( r=n; r>=1; r-- )
    {
        for( c=1; c<=r; c++)
        {
            printf("%3d",c);
        }
        printf("\n");
    }
    getch();
}
```

At the bottom right of the IDE, there is a message: "Activate Windows Go to PC settings to activate Windows." The Windows taskbar is visible at the bottom, showing icons for Windows, DEV, Chrome, File Explorer, Calculator, Zoom, and other applications. The system clock in the bottom right corner shows "04:29 PM 18-Mar-25".

```
TC
Enter no of rows 4
1 2 3 4
1 2 3
1 2
1
```

Activate Windows
Go to PC settings to activate Windows.

04:29 PM
18-Mar-25

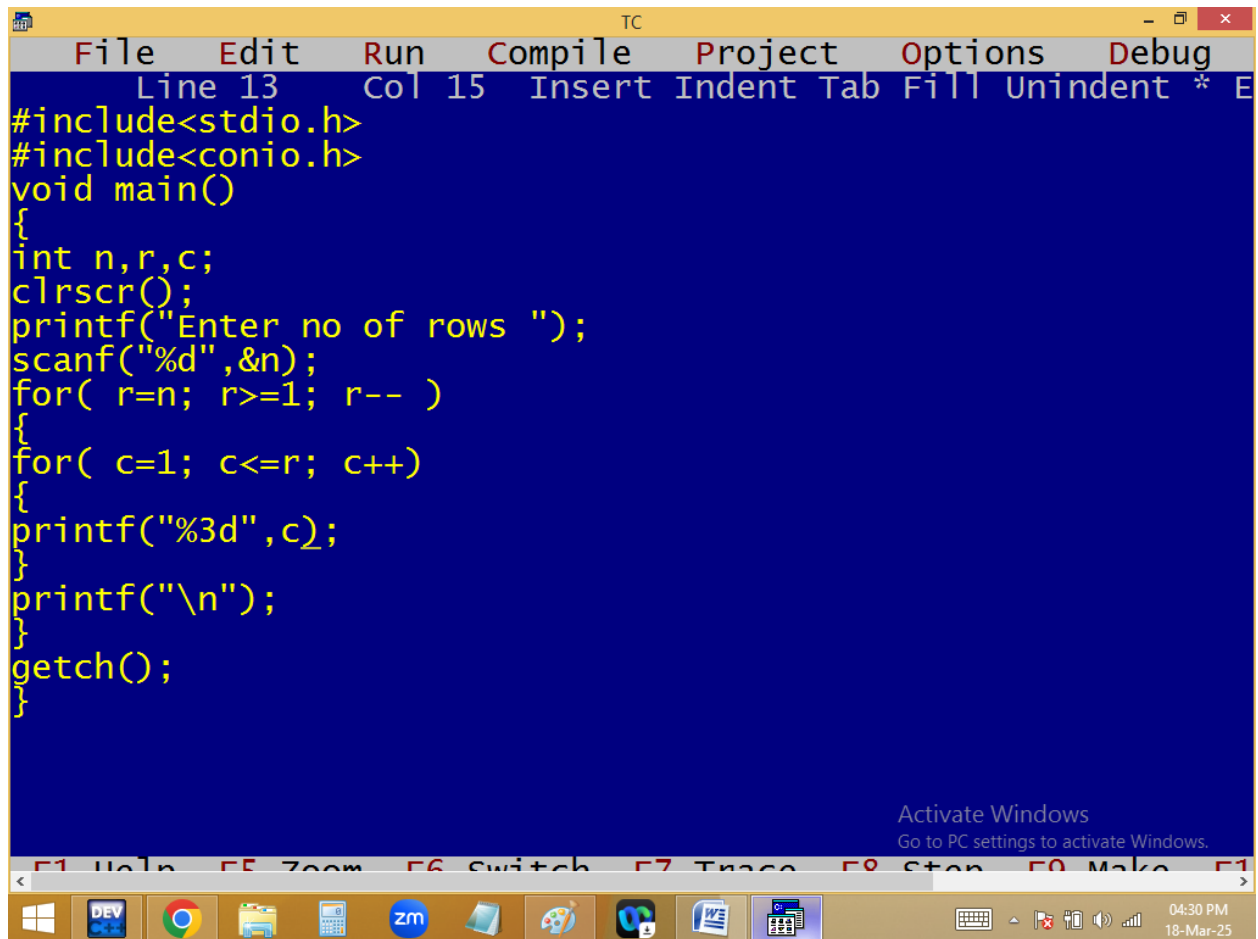

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 13", "Col 15", and a list of keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", "*", and "E". The main editing area has a dark blue background with yellow text. It contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int n,r,c;
    clrscr();
    printf("Enter no of rows ");
    scanf("%d",&n);
    for( r=n; r>=1; r-- )
    {
        for( c=1; c<=r; c++)
        {
            printf("%3d",c);
        }
        printf("\n");
    }
    getch();
}
```

At the bottom right of the IDE window, there is a message: "Activate Windows. Go to PC settings to activate Windows." Below the IDE window is the Windows taskbar, which includes icons for Windows, DEV, Chrome, File Explorer, Calculator, Zoom, and other applications. The system tray on the right shows the time as "04:30 PM" and the date as "18-Mar-25".

```
TC
Enter no of rows 10
1 2 3 4 5 6 7 8 9 10
1 2 3 4 5 6 7 8 9
1 2 3 4 5 6 7 8
1 2 3 4 5 6 7
1 2 3 4 5 6
1 2 3 4 5
1 2 3 4
1 2 3
1 2
1
```

Activate Windows
Go to PC settings to activate Windows.

04:30 PM
18-Mar-25

```

for( r=n; r>=1; r-- )
{
    for ( c=1; c<=r; c++ )
    {
        p(c);
    }
    p("\n");
}


```

```

1 2 3 4 ✓
1 2 3 ✓
1 2 ✓
1 ✓

```

<u>n</u> → <u>r</u>	<u>c: 1 to r</u>
4	1 to 4
3	1 to 3
2	1 to 2
1	1 to 1

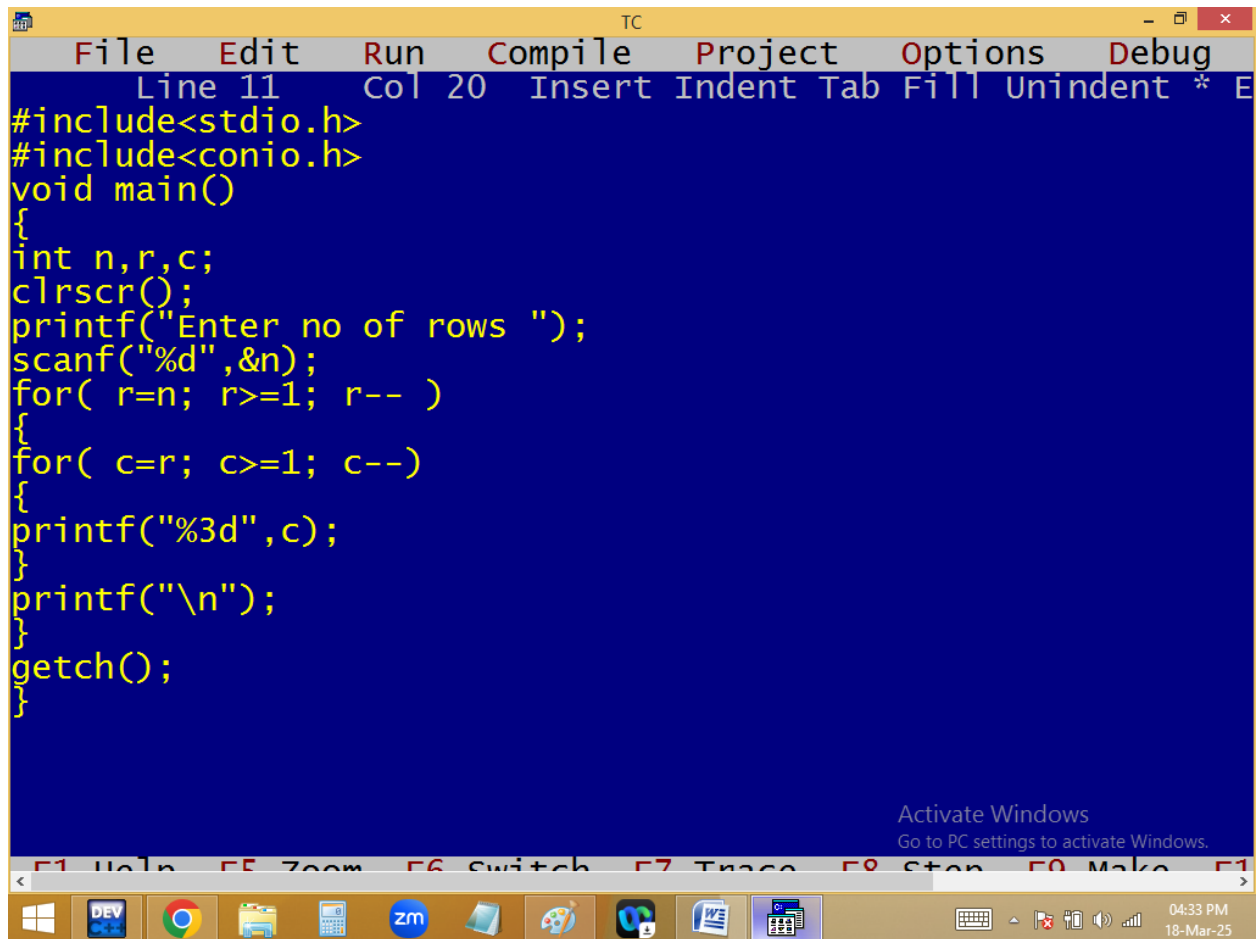

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar indicates "Line 11" and "Col 20". The main editing area has a blue background with yellow text. The code is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int n,r,c;
    clrscr();
    printf("Enter no of rows ");
    scanf("%d",&n);
    for( r=n; r>=1; r-- )
    {
        for( c=r; c>=1; c--)
        {
            printf("%3d",c);
        }
        printf("\n");
    }
    getch();
}
```

At the bottom of the window, there is a taskbar with various application icons including Windows, DEV, Chrome, File Explorer, Calculator, Zoom, and others. On the right side of the taskbar, the system clock shows "04:33 PM" and the date "18-Mar-25". An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.


```
TC
Enter no of rows 4
4 3 2 1
3 2 1
2 1
1
```

Activate Windows
Go to PC settings to activate Windows.

```
for( r=n; r>=1; r-- )  
{  
  for( c=r; c>=1; c-- ) p(c);  
  p("\n");  
}
```

4 3 2 1 ✓
3 2 1 ✓
2 1 ✓
1 ✓

$\frac{n}{4} \rightarrow \frac{r}{4} \rightarrow \frac{c}{4}$
4 4 4 to 1
3 3 to 1
2 2 to 1
1 1 to 1

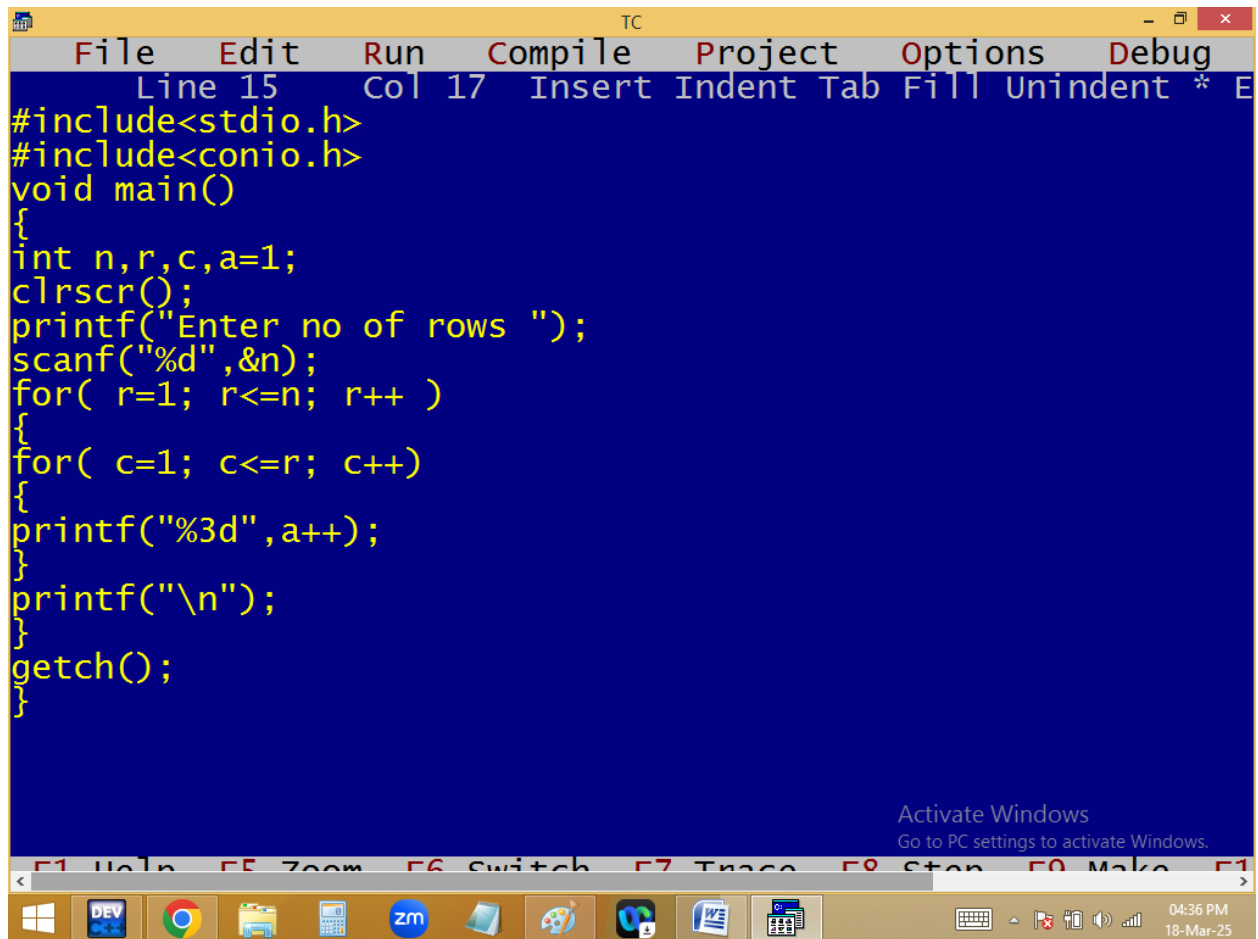

```
TC
File Edit Run Compile Project Options Debug
Line 15 Col 17 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int n,r,c,a=1;
clrscr();
printf("Enter no of rows ");
scanf("%d",&n);
for( r=1; r<=n; r++ )
{
for( c=1; c<=r; c++)
{
printf("%3d",a++);
}
printf("\n");
}
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

04:36 PM
18-Mar-25

```
TC
Enter no of rows 4
1
2 3
4 5 6
7 8 9 10
```

Activate Windows
Go to PC settings to activate Windows.

04:36 PM
18-Mar-25

```
TC
Enter no of rows 10
1
2 3
4 5 6
7 8 9 10
11 12 13 14 15
16 17 18 19 20 21
22 23 24 25 26 27 28
29 30 31 32 33 34 35 36
37 38 39 40 41 42 43 44 45
46 47 48 49 50 51 52 53 54 55
```

Activate Windows
Go to PC settings to activate Windows.

04:36 PM
18-Mar-25

```
TC
Enter no of rows 3
1
2 3
4 5 6
```


Activate Windows
Go to PC settings to activate Windows.

```
for( a=1, r=1; r<=4; r++ )
{
for( c=1; c<=r; c++)
{
p( a++ );
p("\n");
}
```

<u>a</u>	<u>r</u>	<u>c=1 to r</u>
1	1	1 to 1
	2	1 to 2
	3	1 to 3
	4	1 to 4

Floyd's triangle

1 ✓
2 3 ✓
4 5 6 ✓
7 8 9 10

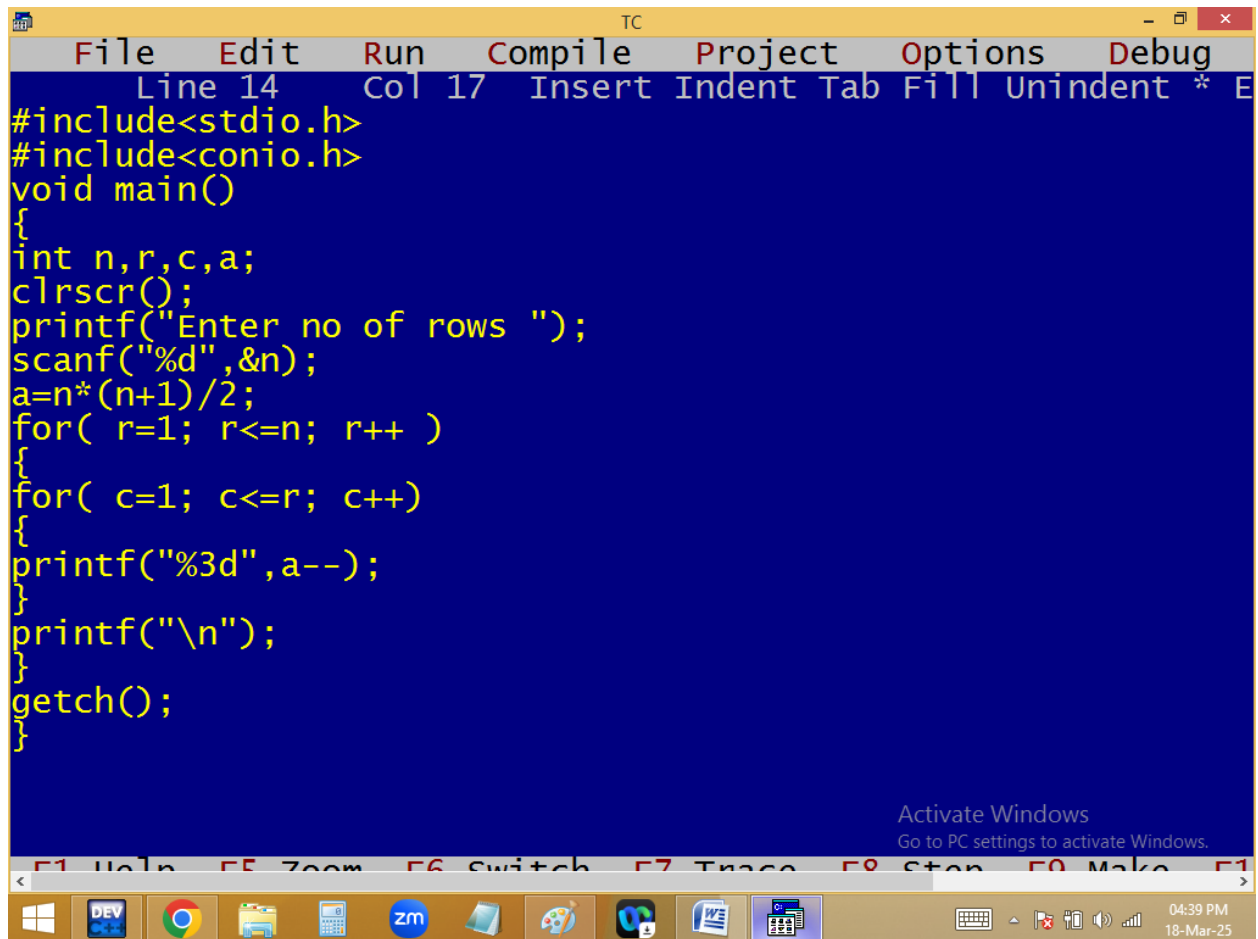

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 14", "Col 17", and a list of editing actions: "Insert", "Indent", "Tab", "Fill", "Unindent", "*", and "E". The main editing area has a dark blue background with yellow text. It contains a C program that calculates the sum of the first n natural numbers and prints it in a descending triangle format. The code is as follows:


```
#include<stdio.h>
#include<conio.h>
void main()
{
    int n,r,c,a;
    clrscr();
    printf("Enter no of rows ");
    scanf("%d",&n);
    a=n*(n+1)/2;
    for( r=1; r<=n; r++ )
    {
        for( c=1; c<=r; c++)
        {
            printf("%3d",a--);
        }
        printf("\n");
    }
    getch();
}
```

At the bottom right of the IDE window, there is a watermark that says "Activate Windows" and "Go to PC settings to activate Windows." Below the IDE window is the Windows taskbar, which includes icons for Windows, DEV, Chrome, File Explorer, Calculator, Zoom, and several other applications. The system tray on the right shows the time as 04:39 PM and the date as 18-Mar-25.

```
TC
Enter no of rows 4
10
9 8
7 6 5
4 3 2 1
```

Activate Windows
Go to PC settings to activate Windows.

04:40 PM
18-Mar-25

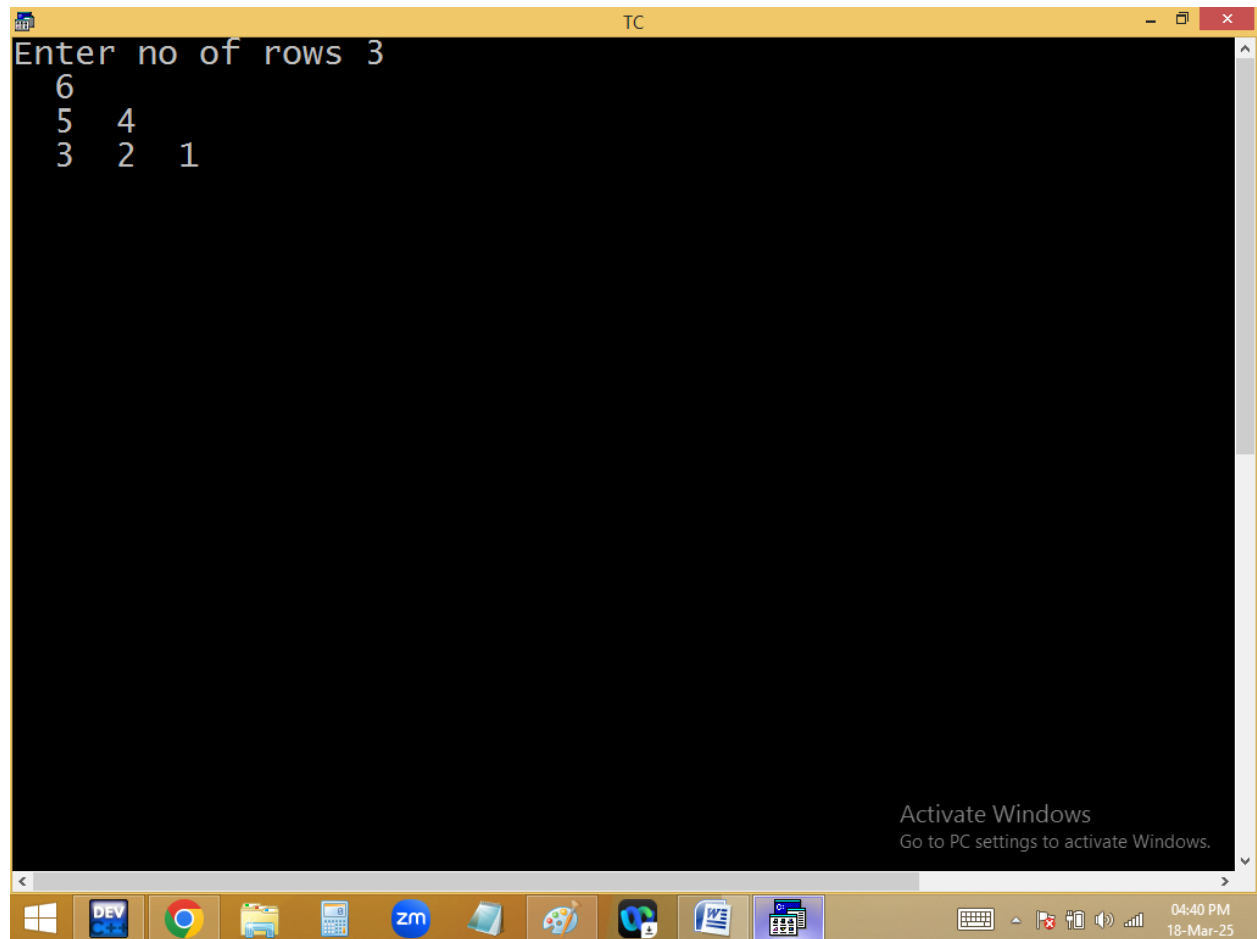

```

Enter no of rows 10
55
54 53
52 51 50
49 48 47 46
45 44 43 42 41
40 39 38 37 36 35
34 33 32 31 30 29 28
27 26 25 24 23 22 21 20
19 18 17 16 15 14 13 12 11
10 9 8 7 6 5 4 3 2 1

```

```

a=n*(n+1)/2;
for( r=1; r<=4; r++ )
{
for( c=1; c<=r; c++)
{
p( a-- );
p("\n");
}
}

```

$n=4$


$4*5/2=10$

$3*4/2=6$

$n=3$

10	6
9 8	5 4
7 6 5	3 2 1
4 3 2 1	

$\frac{n}{4}$	$\frac{a}{1}$	$\frac{r}{1}$	$\frac{c=1 \text{ to } r}{1 \text{ to } 1}$
		2	1 to 2
		3	1 to 3
		4	1 to 4

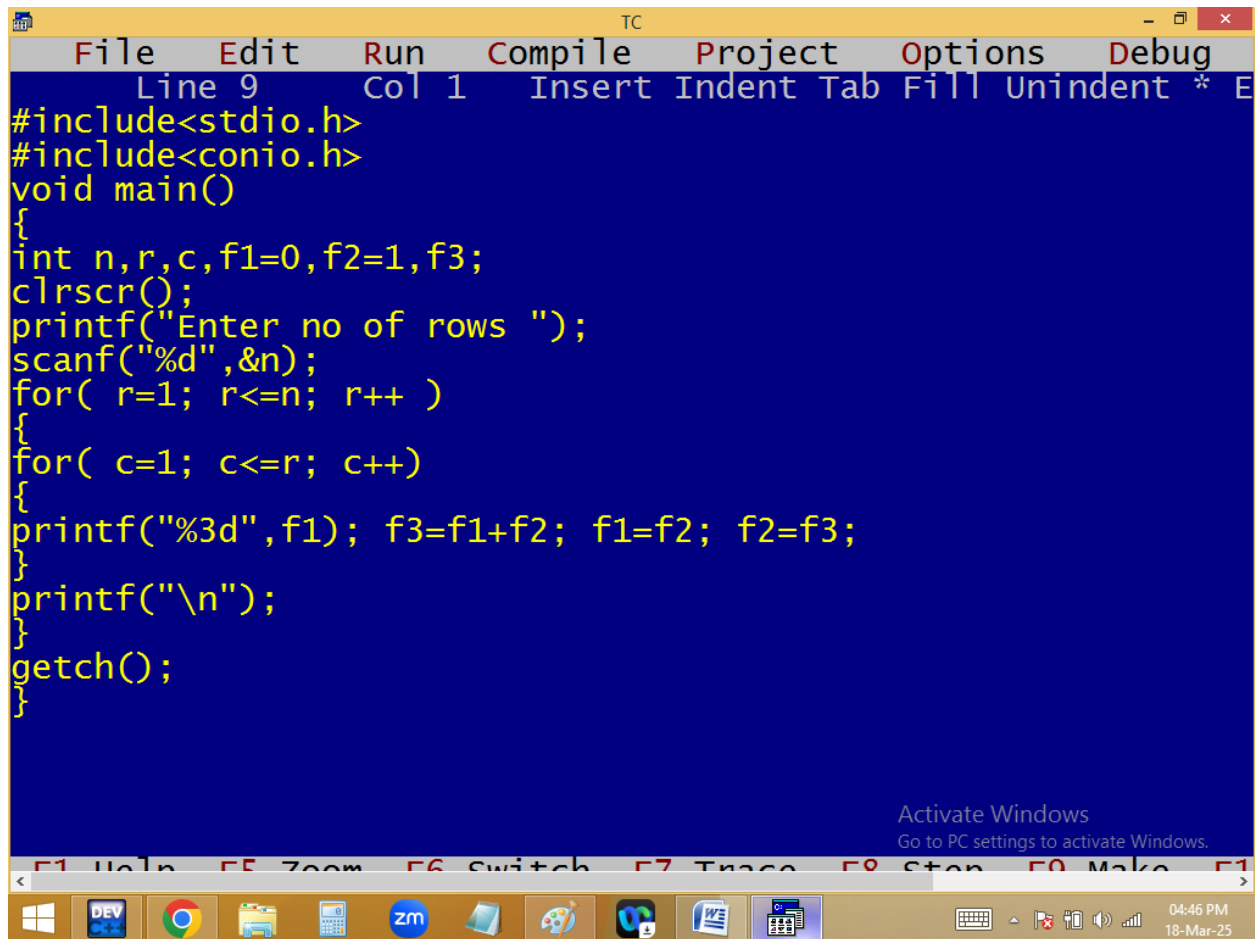

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, the status bar shows "Line 9", "Col 1", and "Insert Indent Tab Fill Unindent * E". The main editing area has a blue background with yellow text containing the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int n,r,c,f1=0,f2=1,f3;
clrscr();
printf("Enter no of rows ");
scanf("%d",&n);
for( r=1; r<=n; r++ )
{
for( c=1; c<=r; c++)
{
printf("%3d",f1); f3=f1+f2; f1=f2; f2=f3;
}
printf("\n");
}
getch();
}
```

At the bottom of the IDE window, there is a text box that says "Activate Windows" and "Go to PC settings to activate Windows." Below the IDE window is the Windows taskbar, which includes icons for Windows, DEV, Chrome, File Explorer, Calculator, Zoom, and several other applications. The system tray on the right shows the time as "04:46 PM" and the date as "18-Mar-25".

```
TC
Enter no of rows 4
0
1 1
2 3 5
8 13 21 34
```

Activate Windows
Go to PC settings to activate Windows.

04:46 PM
18-Mar-25

p(f1\n);

<u>f1</u>		<u>f2</u>		<u>f3</u>
✓ 0	+	1	=	1
✓ 1	+	1	=	2
✓ 1	+	2	=	3
✓ 2	+	3	=	5
✓ 3	+	5	=	8
✓ 5	+	8	=	13
✓ 8	+	13	=	21
✓ 13	+	21	=	34
✓ 21	+	34	=	55
✓ 34		55		

fibonacci series:

0 ✓
1 1
2 3 5
8 13 21 34

```
TC
File Edit Run Compile Project Options Debug
Line 14 Col 48 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int n,r,c,e=0, o=-1;
clrscr();
printf("Enter no of rows ");
scanf("%d",&n);
for( r=1; r<=n; r++ )
{
for( c=1; c<=r; c++)
{
if(r%2==0){textcolor(LIGHTGREEN);cprintf("%3d",e+=2);}
else {textcolor(LIGHTRED);cprintf("%3d",o+=2);}
}
printf("\n");
}
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10


04:51 PM
18-Mar-25

```
Enter no of rows 10
1
2 4
3 5 7
6 8 10 12
9 11 13 15 17
14 16 18 20 22 24
19 21 23 25 27 29 31
26 28 30 32 34 36 38 40
33 35 37 39 41 43 45 47 49
42 44 46 48 50 52 54 56 58 60
```

Activate Windows
Go to PC settings to activate Windows.

```
e=2, o=1;
for( r=1;r<=4; r++ )
{
for( c=1; c<=r; c++)
{
if(r%2==0){ printf("%3d",e); e+=2; }
else {printf("%3d",o); o+=2;}
}
p("\n");
}
```

1 - 1
2 4
3 - 3 5 7
6 8 10 12

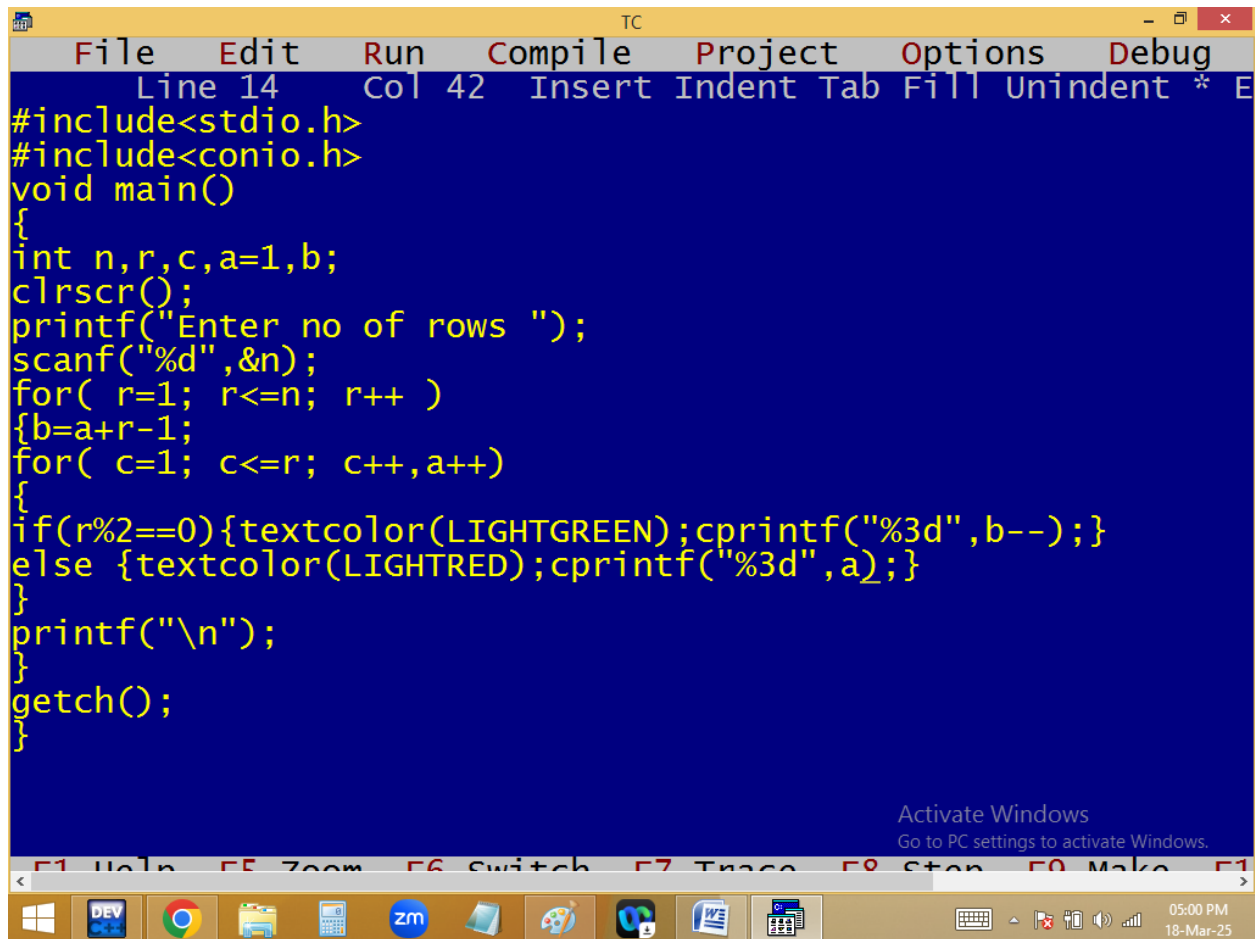

```
TC
File Edit Run Compile Project Options Debug
Line 14 Col 42 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int n,r,c,a=1,b;
clrscr();
printf("Enter no of rows ");
scanf("%d",&n);
for( r=1; r<=n; r++ )
{b=a+r-1;
for( c=1; c<=r; c++,a++)
{
if(r%2==0){textcolor(LIGHTGREEN);cprintf("%3d",b--);}
else {textcolor(LIGHTRED);cprintf("%3d",a);}
}
printf("\n");
}
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

Windows taskbar: DEV, Chrome, File Explorer, Calculator, Zoom, Paint, VS Code, Word, Excel, System tray (05:00 PM, 18-Mar-25)


```
TC
Enter no of rows 4
1
3 2
4 5 6
10 9 8 7
```

Activate Windows
Go to PC settings to activate Windows.

05:00 PM
18-Mar-25

```
Enter no of rows 9
1
3 2
4 5 6
10 9 8 7
11 12 13 14 15
21 20 19 18 17 16
22 23 24 25 26 27 28
36 35 34 33 32 31 30 29
37 38 39 40 41 42 43 44 45
```

Activate Windows
Go to PC settings to activate Windows.


a++
1 2

r
1
2

a+r
2+2-1=3
7+4-1=10

b=a+r-1; 2+2-1=3
7+4-1=10

1

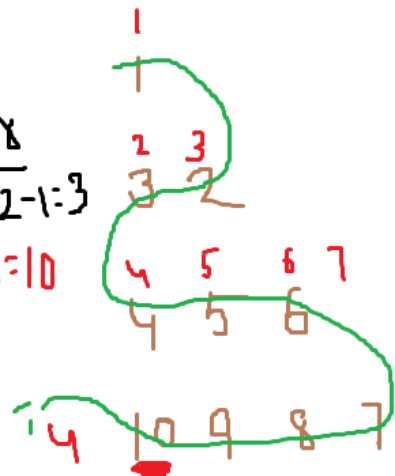

```
TC
File Edit Run Compile Project Options Debug
Line 10 Col 8 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int n,r,c,a=1,b;
clrscr();
printf("Enter no of rows ");
scanf("%d",&n);
for( r=1; r<=n; r++ )
{ a=n-1; b=a+r;
for( c=1; c<=r; c++ )
{
if(c==1)printf("%3d",r);
else {printf("%3d",b); a--; b+=a;}
}
printf("\n");
}
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

05:20 PM
18-Mar-25

```
TC
Enter no of rows 5
1
2 6
3 7 10
4 8 11 13
5 9 12 14 15
```

Activate Windows
Go to PC settings to activate Windows.

05:20 PM
18-Mar-25

```
TC
Enter no of rows 10
1
2 11
3 12 20
4 13 21 28
5 14 22 29 35
6 15 23 30 36 41
7 16 24 31 37 42 46
8 17 25 32 38 43 47 50
9 18 26 33 39 44 48 51 53
10 19 27 34 40 45 49 52 54 55
```

Activate Windows
Go to PC settings to activate Windows.

05:20 PM
18-Mar-25

$$a = 5 - 4 = 1$$

1

$$2 + 4 \rightarrow 6$$

$$3 + 4 \rightarrow 7 + 3 \rightarrow 10$$

$$4 + 4 \rightarrow 8 + 3 \rightarrow 11 + 2 \rightarrow 13$$


$$5 + 4 \rightarrow 9 + 3 \rightarrow 12 + 2 \rightarrow 14 + 1 = 15$$

```
TC
File Edit Run Compile Project Options Debug
Line 13 Col 9 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int n,r,c;
clrscr();
printf("Enter no of rows ");
scanf("%d",&n);
for( r=1; r<=n; r++ )
{
for( c=1; c<=r; c++)
{
if((r+c)%2==0)printf("$ ");
else printf("* ");
}
printf("\n");
}
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

05:26 PM
18-Mar-25

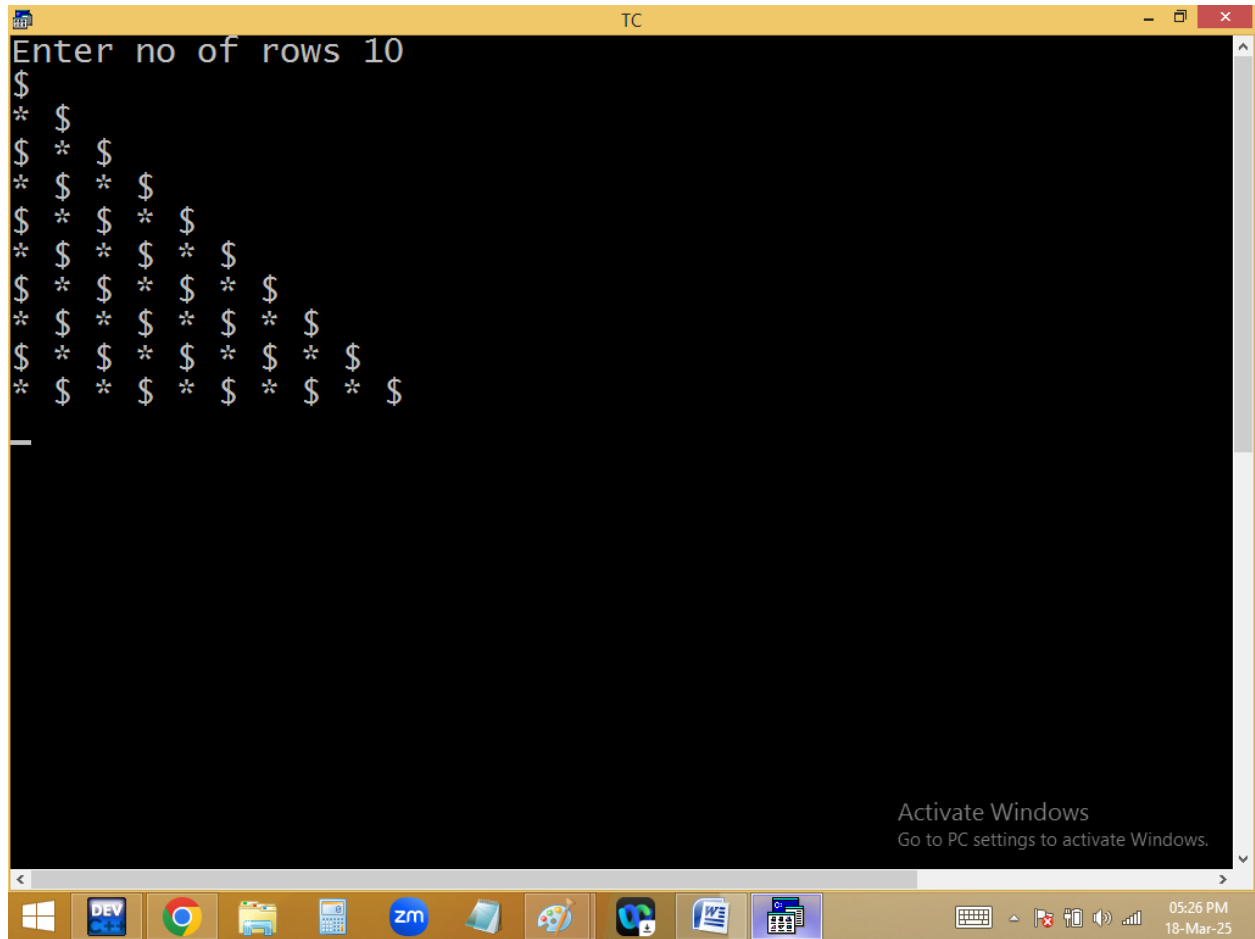

\$

$$1+1=2$$

if((r+c)%2==0)p(\$);
else p(*);

*

$$2+1=3$$

\$

$$2+2=4$$

\$

$$3+1=4$$

*

$$3+2=5$$

\$


$$3+3=6$$

*

\$

*

\$

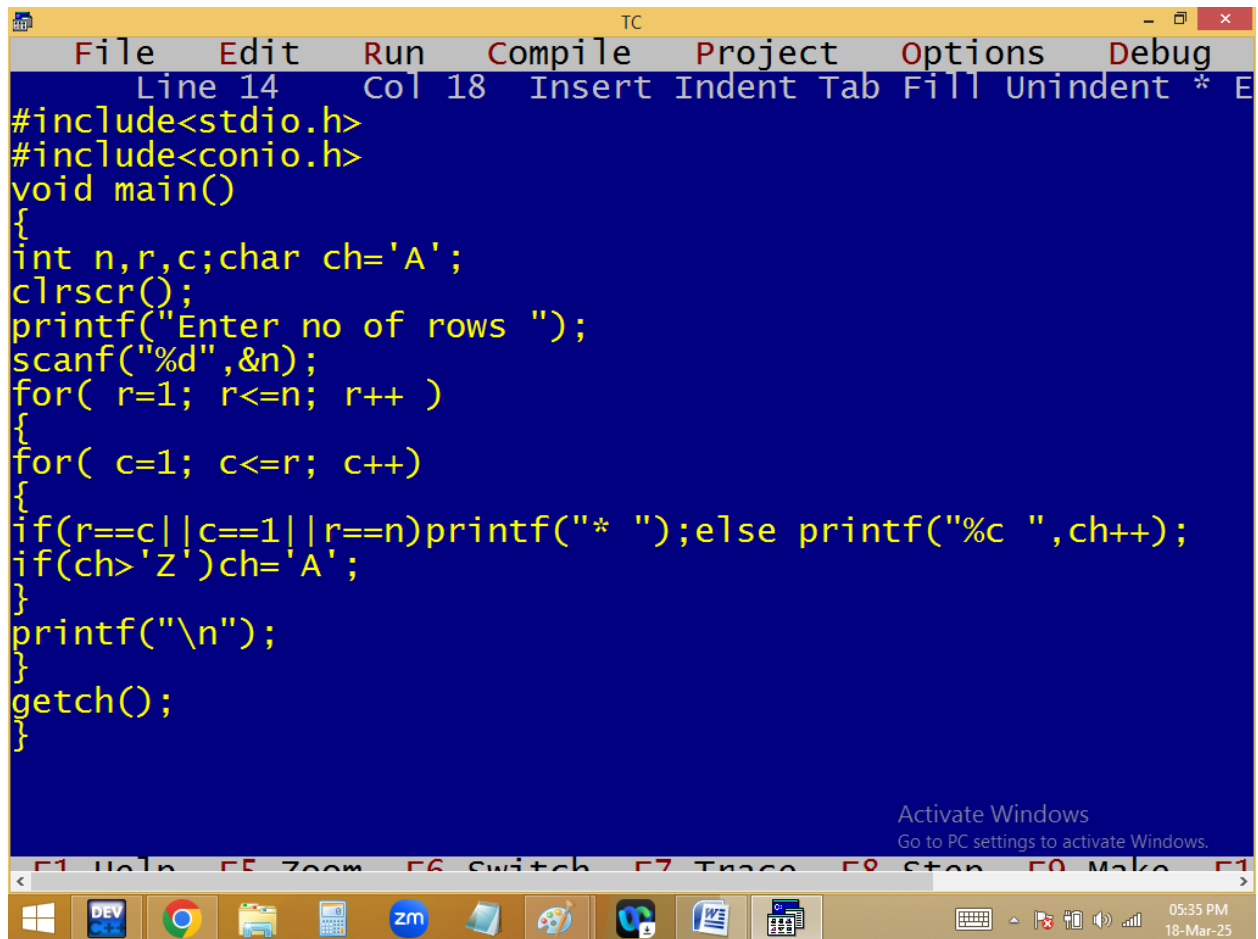

```
TC
File Edit Run Compile Project Options Debug
Line 14 Col 18 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int n,r,c;char ch='A';
clrscr();
printf("Enter no of rows ");
scanf("%d",&n);
for( r=1; r<=n; r++ )
{
for( c=1; c<=r; c++)
{
if(r==c||c==1||r==n)printf("* ");else printf("%c ",ch++);
if(ch>'Z')ch='A';
}
printf("\n");
}
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.


F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10


05:35 PM
18-Mar-25

```
TC
Enter no of rows 14
*
* *
* A *
* B C *
* D E F *
* G H I J *
* K L M N O *
* P Q R S T U *
* V W X Y Z A B *
* C D E F G H I J *
* K L M N O P Q R S *
* T U V W X Y Z A B C *
* D E F G H I J K L M N *
* * * * * * * * * *
```

`char ch='A';`

`if( c==1 || c==r || r==n )p(*);`
`else p(ch++);`

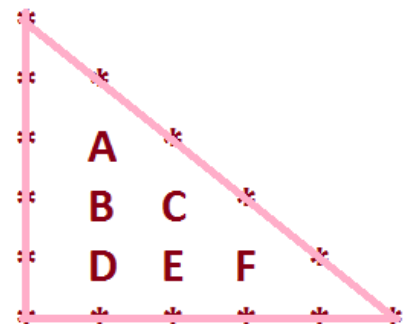

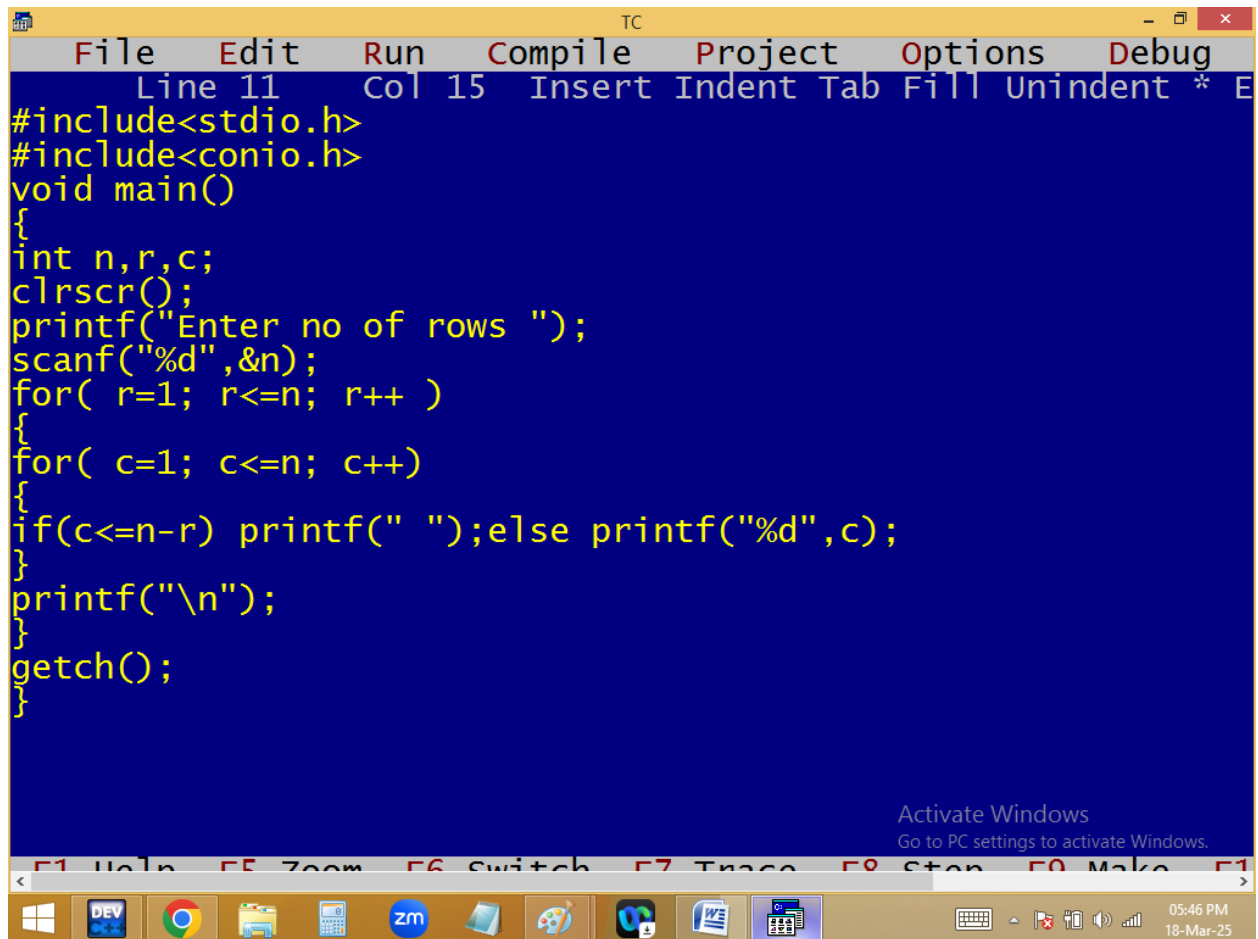

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 11", "Col 15", and a list of editing commands: "Insert", "Indent", "Tab", "Fill", "Unindent", "*", and "E". The main editing area has a dark blue background with yellow text. It contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int n,r,c;
    clrscr();
    printf("Enter no of rows ");
    scanf("%d",&n);
    for( r=1; r<=n; r++ )
    {
        for( c=1; c<=n; c++)
        {
            if(c<=n-r) printf(" ");else printf("%d",c);
        }
        printf("\n");
    }
    getch();
}
```

At the bottom of the window, there is a taskbar with various application icons including Windows, DEV, Chrome, File Explorer, Calculator, Zoom, and others. On the right side of the taskbar, the system clock shows "05:46 PM" and the date "18-Mar-25". An "Activate Windows" watermark is visible in the bottom right corner of the IDE window, with the text "Go to PC settings to activate Windows."

```
TC
Enter no of rows 4
4
34
234
1234
_
```

Activate Windows
Go to PC settings to activate Windows.

05:46 PM
18-Mar-25


```

Enter no of rows 9
  9
 89
789
6789
56789
456789
3456789
23456789
123456789

```

Activate Windows
Go to PC settings to activate Windows.


$$\begin{array}{rcl}
 n & r & s \\
 \hline
 4 & - 1 & = 3 \\
 4 & - 2 & = 2 \\
 4 & - 3 & = 1 \\
 4 & - 4 & = 0
 \end{array}$$

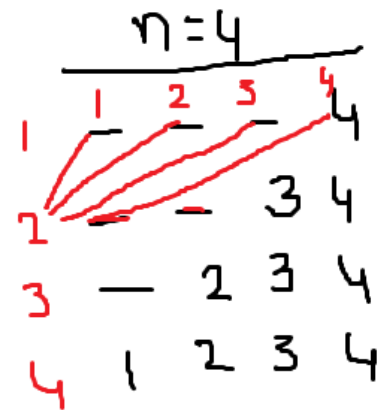

```

for( r=1; r<=4; r++ )
{
  for( c=1; c<=4; c++) if( c<=n-r) p(" "); else p(c);
}


```

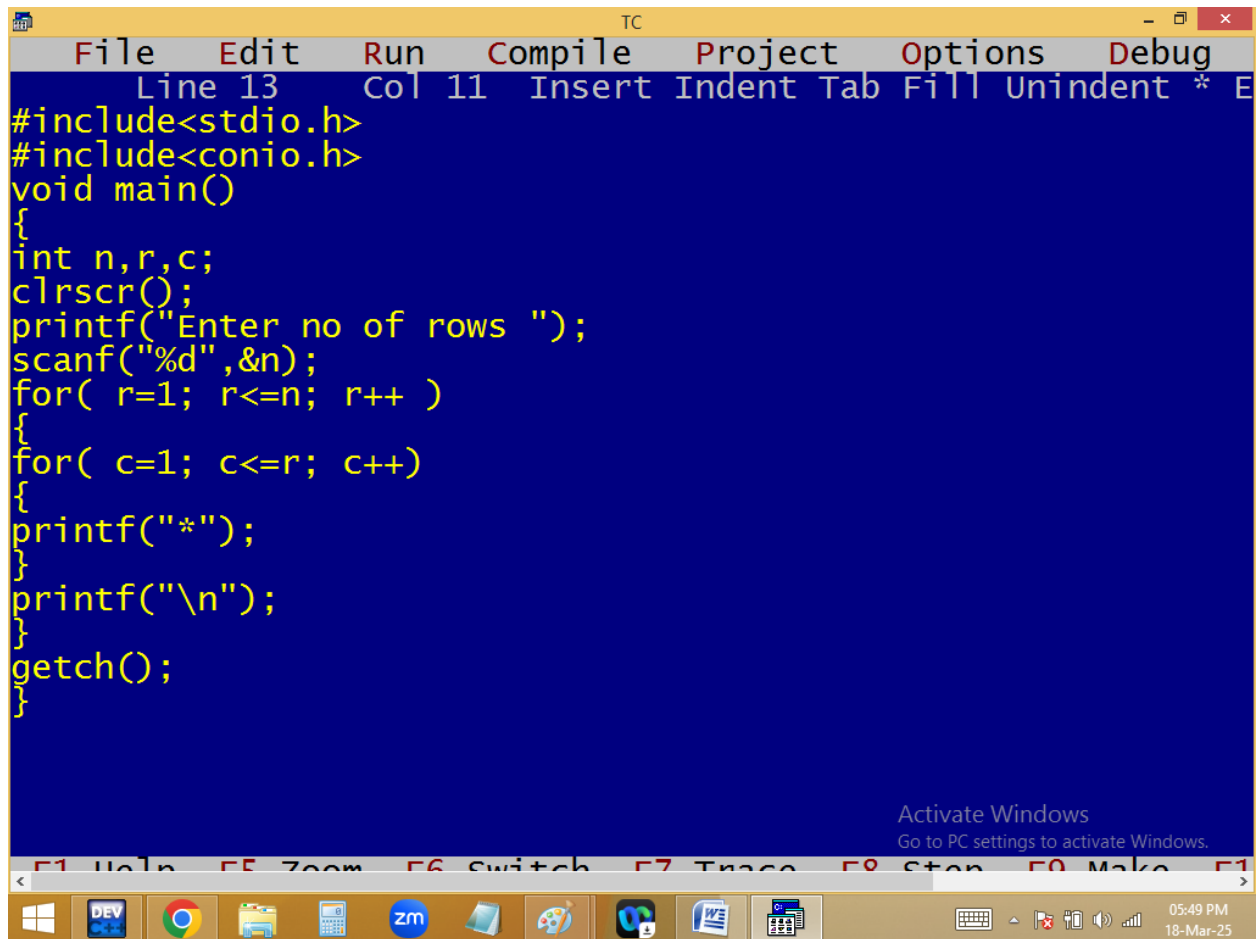

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates "Line 13 Col 11" and lists keyboard shortcuts: Insert, Indent, Tab, Fill, Unindent, *, and E. The main editing area has a blue background with yellow text containing the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int n,r,c;
    clrscr();
    printf("Enter no of rows ");
    scanf("%d",&n);
    for( r=1; r<=n; r++ )
    {
        for( c=1; c<=r; c++)
        {
            printf("*");
        }
        printf("\n");
    }
    getch();
}
```

At the bottom right of the IDE, there is a message: "Activate Windows Go to PC settings to activate Windows." Below the IDE window is the Windows taskbar, which includes icons for Windows, DEV, Chrome, File Explorer, Calculator, Zoom, and other applications. The system tray on the right shows the time as 05:49 PM and the date as 18-Mar-25.

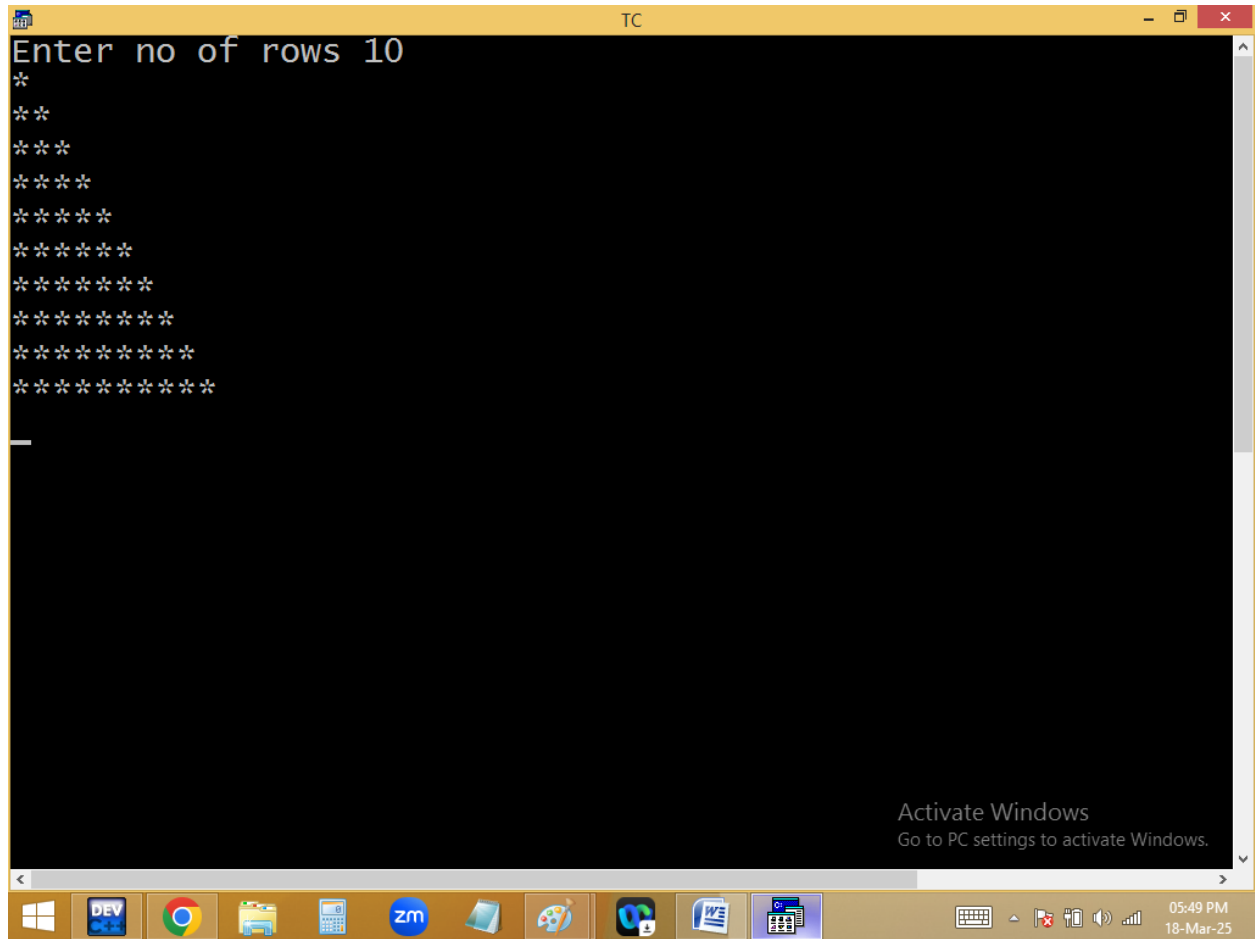




```
TC
File Edit Run Compile Project Options Debug
Line 5 Col 12 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int n,r,c,s;
clrscr();
printf("Enter no of rows ");
scanf("%d",&n);
for( r=1; r<=n; r++ )
{
for(s=1;s<=n-r;s++)printf(" ");
for( c=1; c<=r; c++)
{
printf("*");
}
printf("\n");
}
getch();
}
```


Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

05:50 PM
18-Mar-25

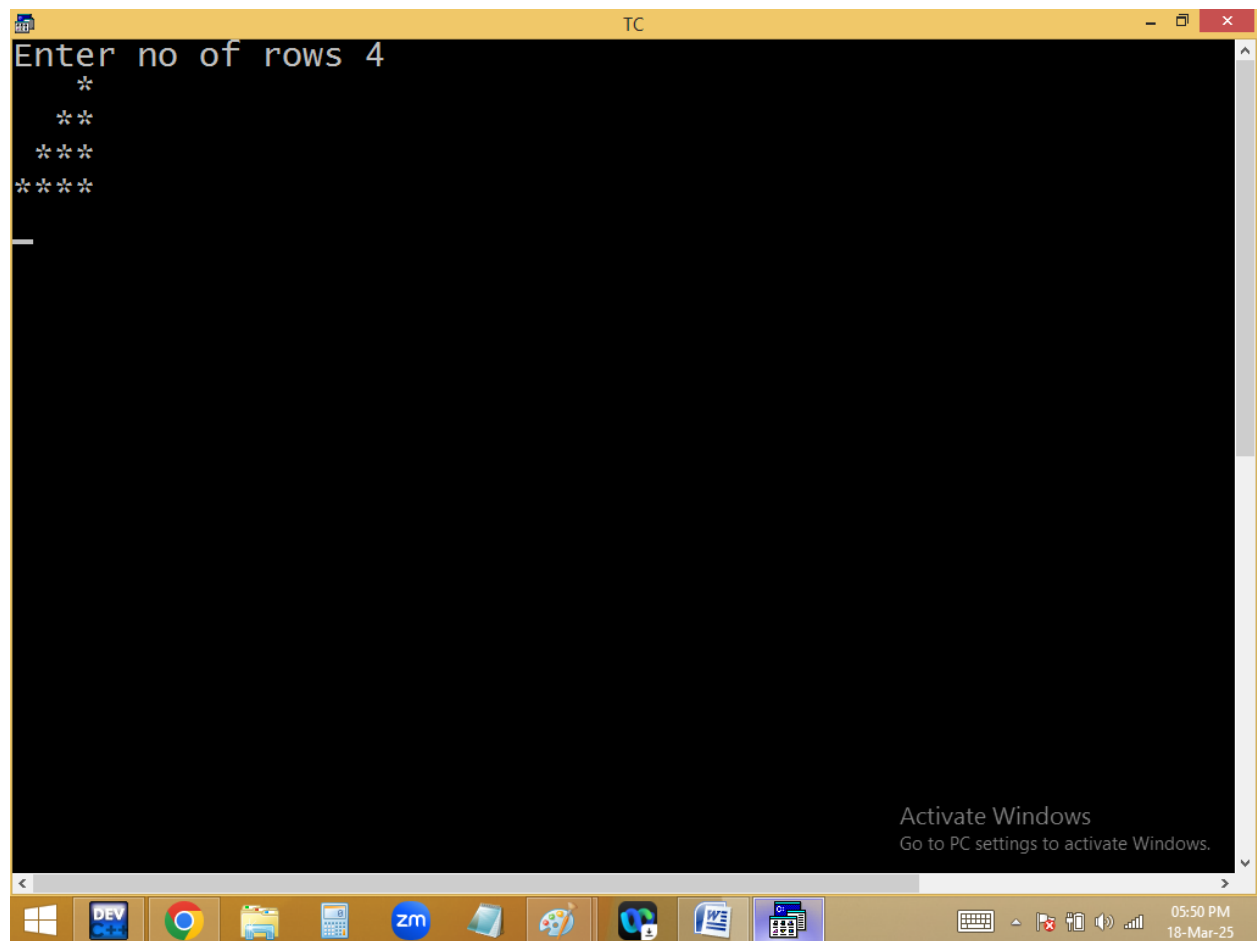

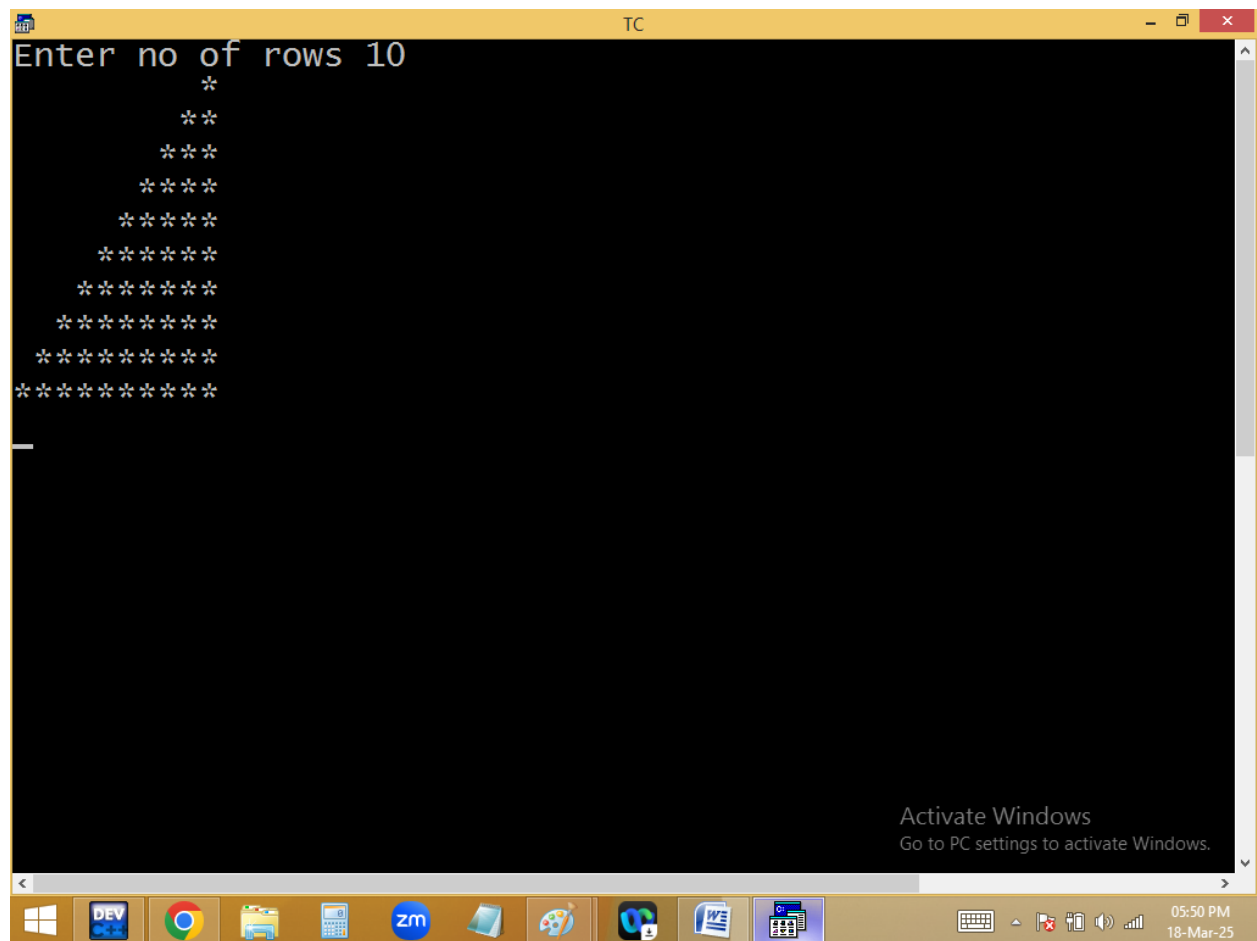

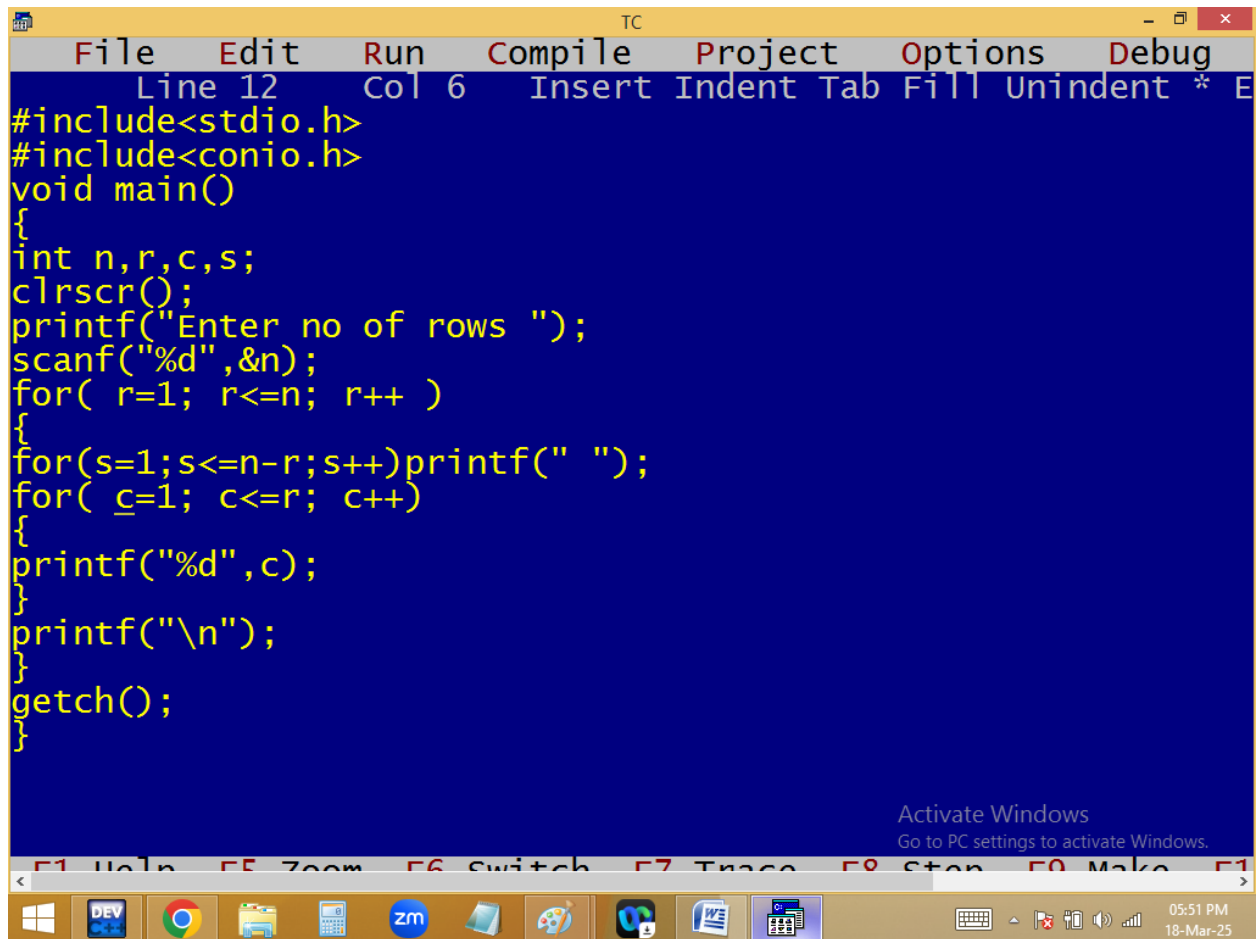

```
TC
File Edit Run Compile Project Options Debug
Line 12 Col 6 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int n,r,c,s;
clrscr();
printf("Enter no of rows ");
scanf("%d",&n);
for( r=1; r<=n; r++ )
{
for(s=1;s<=n-r;s++)printf(" ");
for( c=1; c<=r; c++)
{
printf("%d",c);
}
printf("\n");
}
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.


F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

05:51 PM
18-Mar-25

```
TC
Enter no of rows 9
  1
 12
123
1234
12345
123456
1234567
12345678
123456789
_
```

Activate Windows
Go to PC settings to activate Windows.

05:51 PM
18-Mar-25

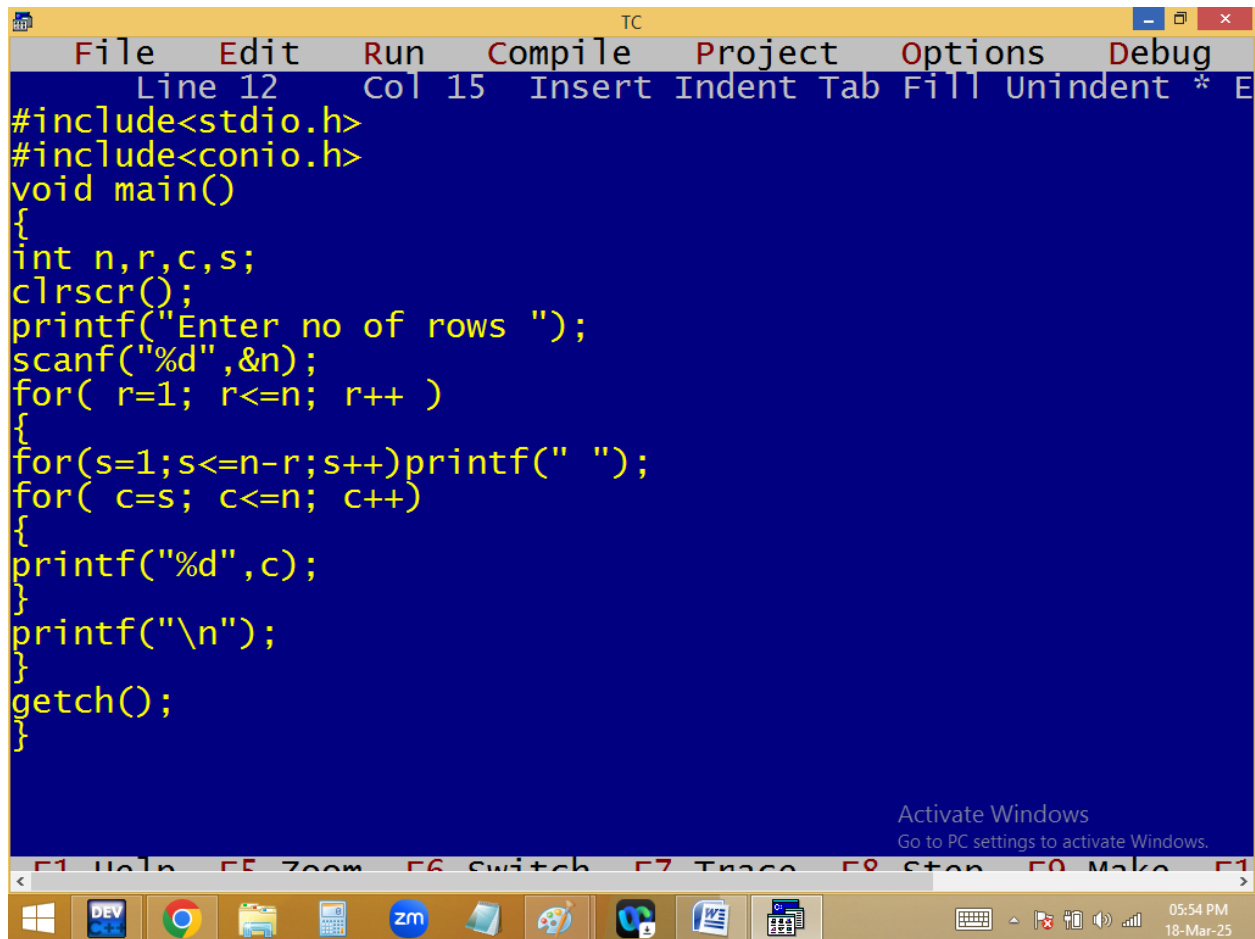

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The status bar at the top indicates "Line 12 Col 15". The code editor contains the following C program:


```
#include<stdio.h>
#include<conio.h>
void main()
{
    int n,r,c,s;
    clrscr();
    printf("Enter no of rows ");
    scanf("%d",&n);
    for( r=1; r<=n; r++ )
    {
        for(s=1;s<=n-r;s++)printf(" ");
        for( c=s; c<=n; c++)
        {
            printf("%d",c);
        }
        printf("\n");
    }
    getch();
}
```

At the bottom of the window, there is a taskbar with icons for Windows, DEV, Chrome, File Explorer, Calculator, Zoom, and other applications. The system tray shows the time as 05:54 PM on 18-Mar-25. An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.

```
TC
Enter no of rows 9
      9
     89
    789
   6789
  56789
 456789
3456789
23456789
123456789
_
```


Activate Windows
Go to PC settings to activate Windows.


05:54 PM
18-Mar-25

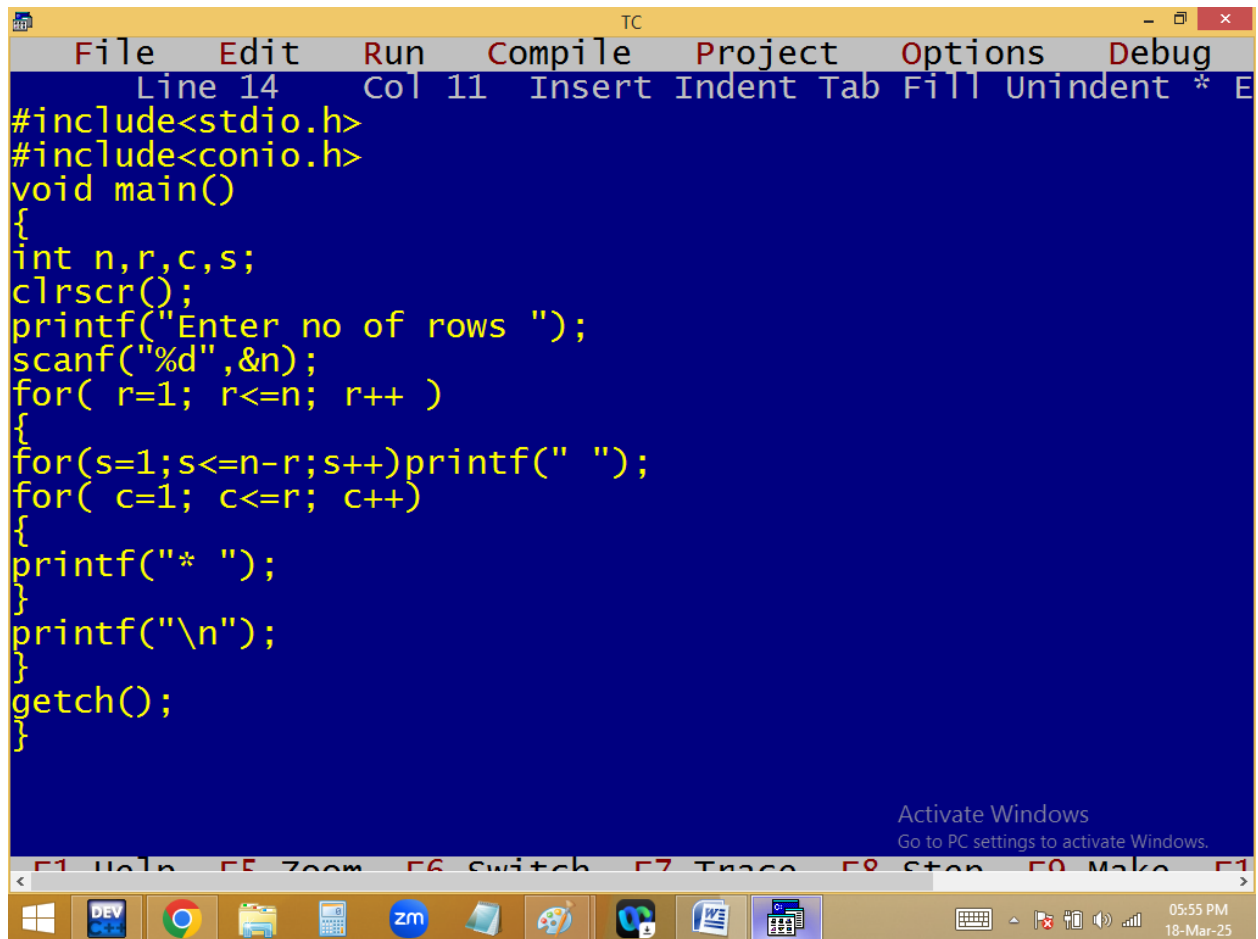

```
TC
File Edit Run Compile Project Options Debug
Line 14 Col 11 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int n,r,c,s;
clrscr();
printf("Enter no of rows ");
scanf("%d",&n);
for( r=1; r<=n; r++ )
{
for(s=1;s<=n-r;s++)printf(" ");
for( c=1; c<=r; c++)
{
printf("* ");
}
printf("\n");
}
getch();
}

Activate Windows
Go to PC settings to activate Windows.
F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10
```

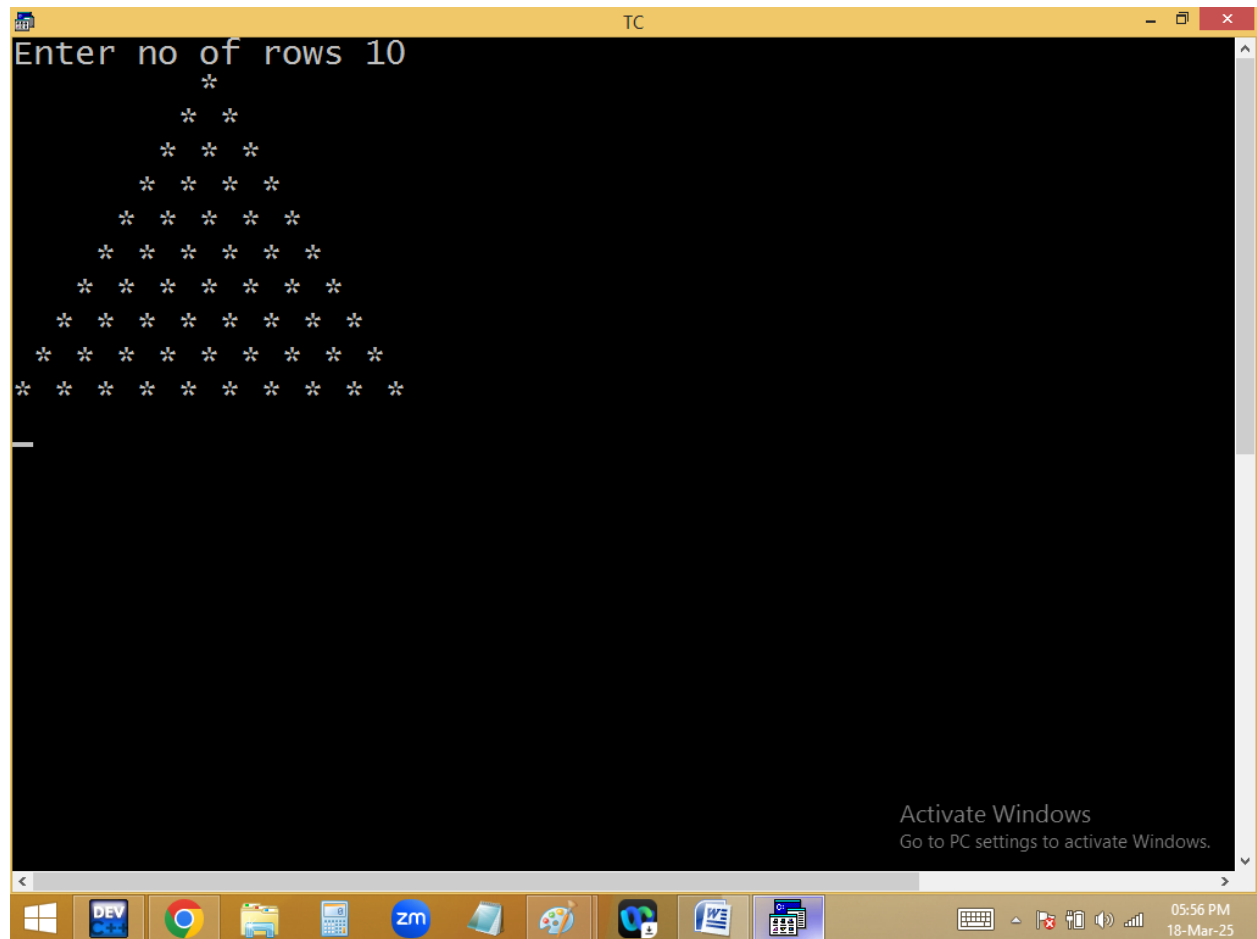


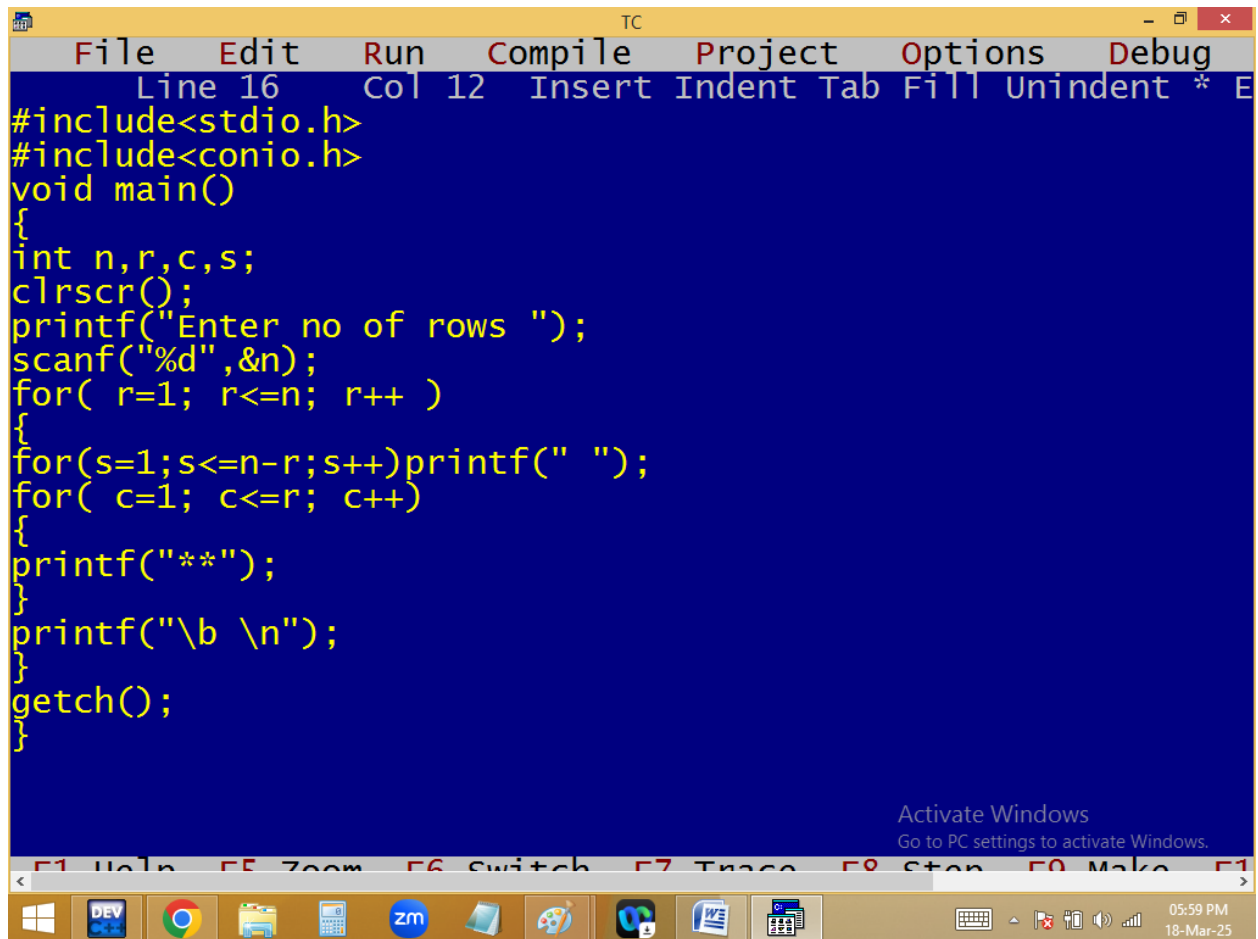


The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 16", "Col 12", and "Insert Indent Tab Fill Unindent * E". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int n,r,c,s;
clrscr();
printf("Enter no of rows ");
scanf("%d",&n);
for( r=1; r<=n; r++ )
{
for(s=1;s<=n-r;s++)printf(" ");
for( c=1; c<=r; c++)
{
printf("**");
}
printf("\b \n");
}
getch();
}
```

At the bottom right of the IDE, there is a message: "Activate Windows Go to PC settings to activate Windows." The Windows taskbar is visible at the bottom, showing icons for Windows, DEV, Chrome, File Explorer, Calculator, Zoom, and other applications. The system clock in the bottom right corner shows "05:59 PM 18-Mar-25".

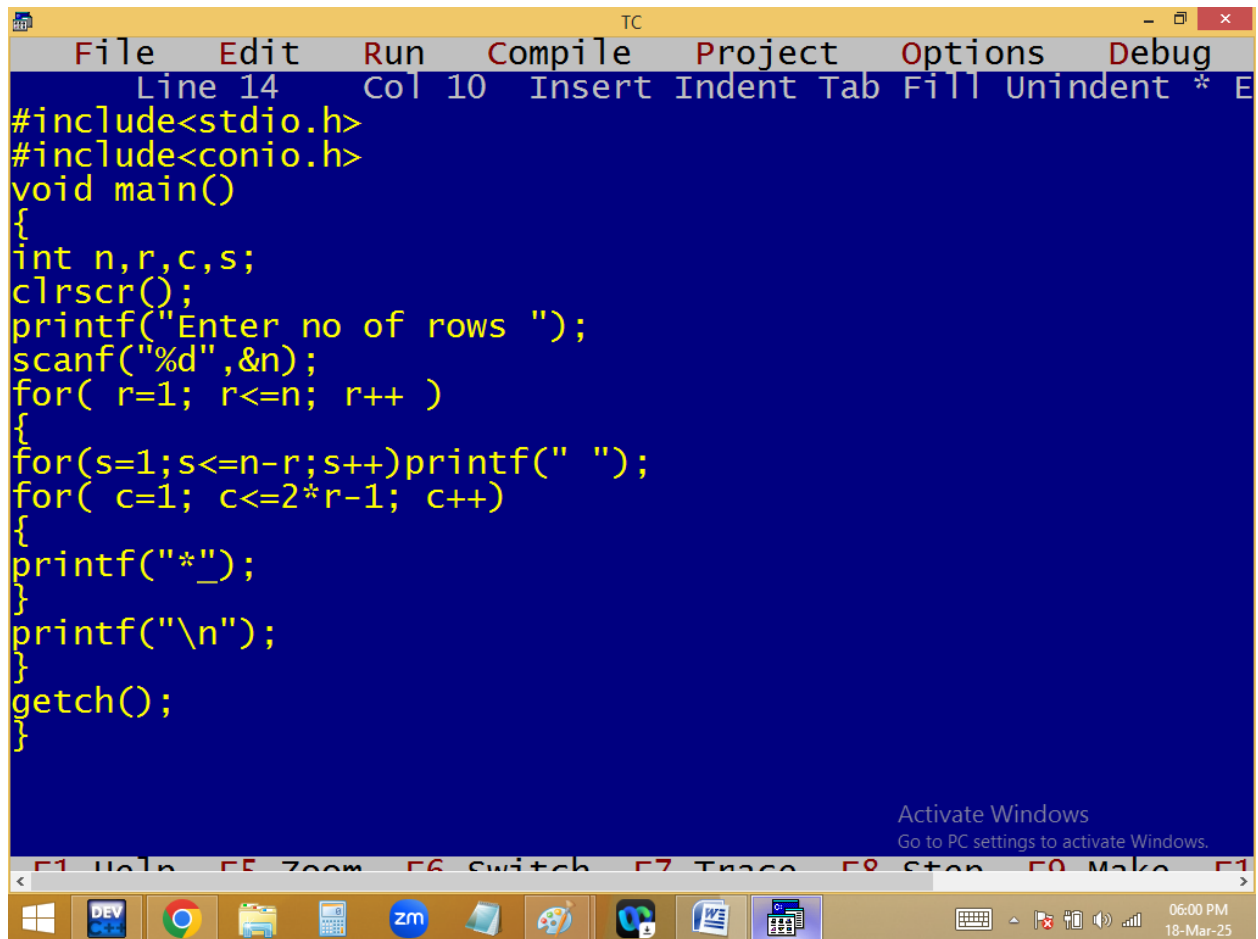

```
TC
File Edit Run Compile Project Options Debug
Line 14 Col 10 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int n,r,c,s;
clrscr();
printf("Enter no of rows ");
scanf("%d",&n);
for( r=1; r<=n; r++ )
{
for(s=1;s<=n-r;s++)printf(" ");
for( c=1; c<=2*r-1; c++)
{
printf("*");
}
printf("\n");
}
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

06:00 PM
18-Mar-25

