



```
TC
File Edit Run Compile Project Options Debug
Line 1 Col 14 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
#include<stdlib.h>
void main()
{
int n,r,c,s; clrscr();
printf("Enter no of rows ");
scanf("%d",&n);
while(!kbhit())
{
for( r=1; r<=n; r++ )
{
for(s=1;s<=n-r;s++)printf(" ");
for( c=1; c<=2*r-1; c++)
{
textcolor(random(16));
cprintf("*");
}
printf("\n");
}
}
```

Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

04:23 PM
19-Mar-25

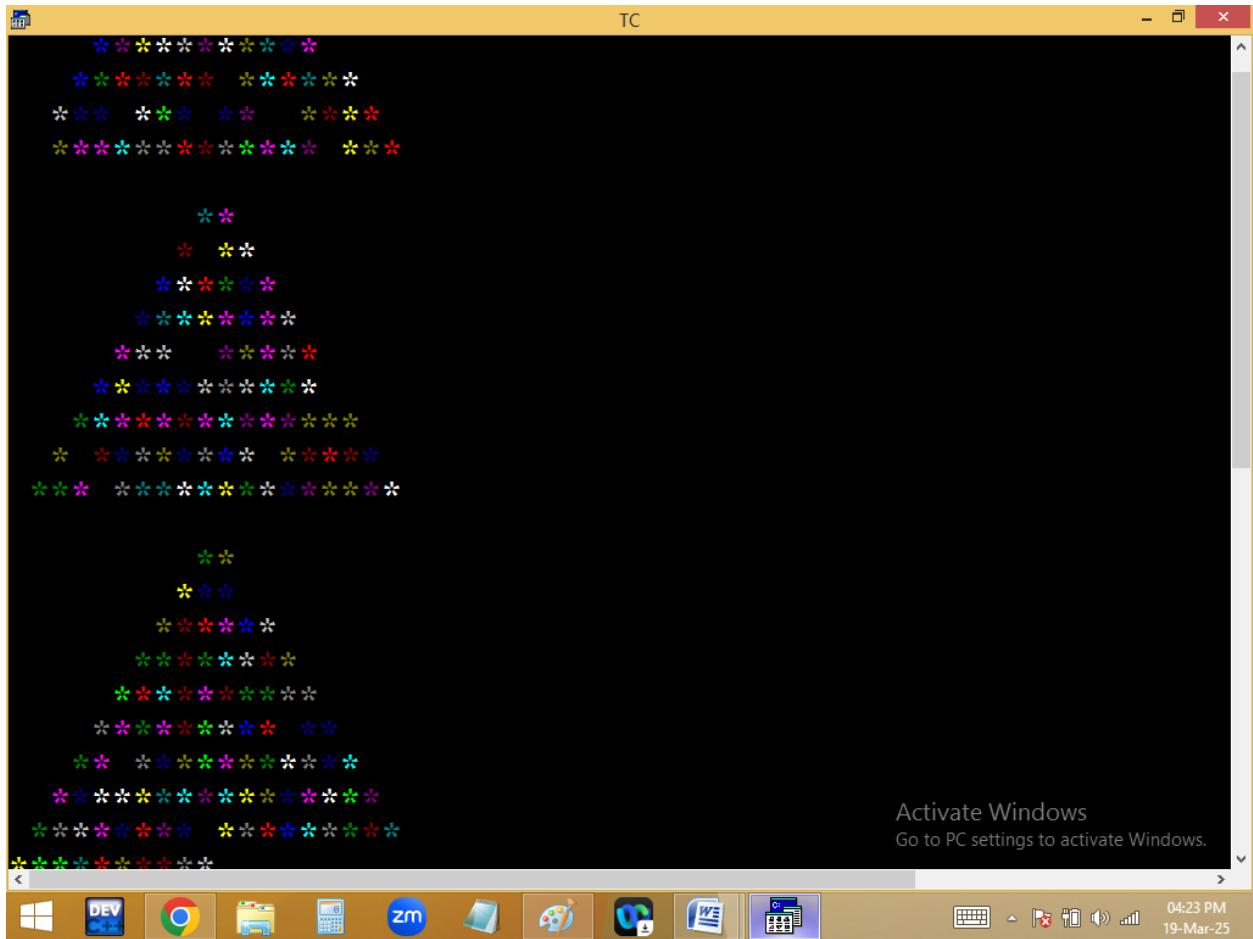


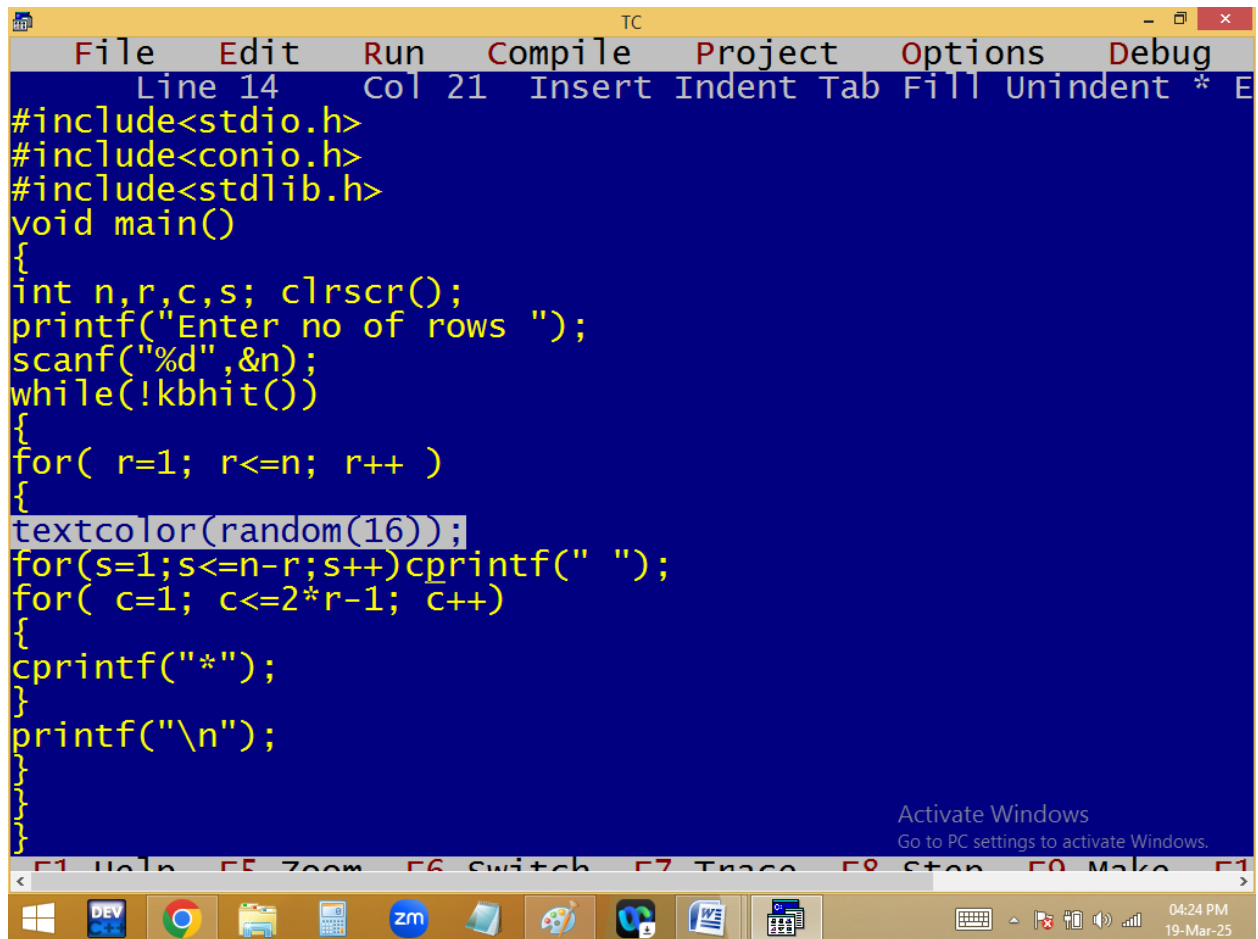

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 14", "Col 21", and lists keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", and a function key "E". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
#include<stdlib.h>
void main()
{
    int n,r,c,s; clrscr();
    printf("Enter no of rows ");
    scanf("%d",&n);
    while(!kbhit())
    {
        for( r=1; r<=n; r++ )
        {
            textcolor(random(16));
            for(s=1;s<=n-r;s++)cprintf(" ");
            for( c=1; c<=2*r-1; c++)
            {
                cprintf("*");
            }
            printf("\n");
        }
    }
}
```


An "Activate Windows" watermark is visible in the bottom right corner of the code area, with the text "Go to PC settings to activate Windows." Below the code, a toolbar contains function key shortcuts: "F1 Help", "F5 Zoom", "F6 Switch", "F7 Trace", "F8 Stop", "F9 Make", and "F10". The Windows taskbar at the bottom shows icons for Windows, DEV C++, Google Chrome, File Explorer, Calculator, Zoom, and other applications. The system clock in the bottom right corner displays "04:24 PM" and "19-Mar-25".

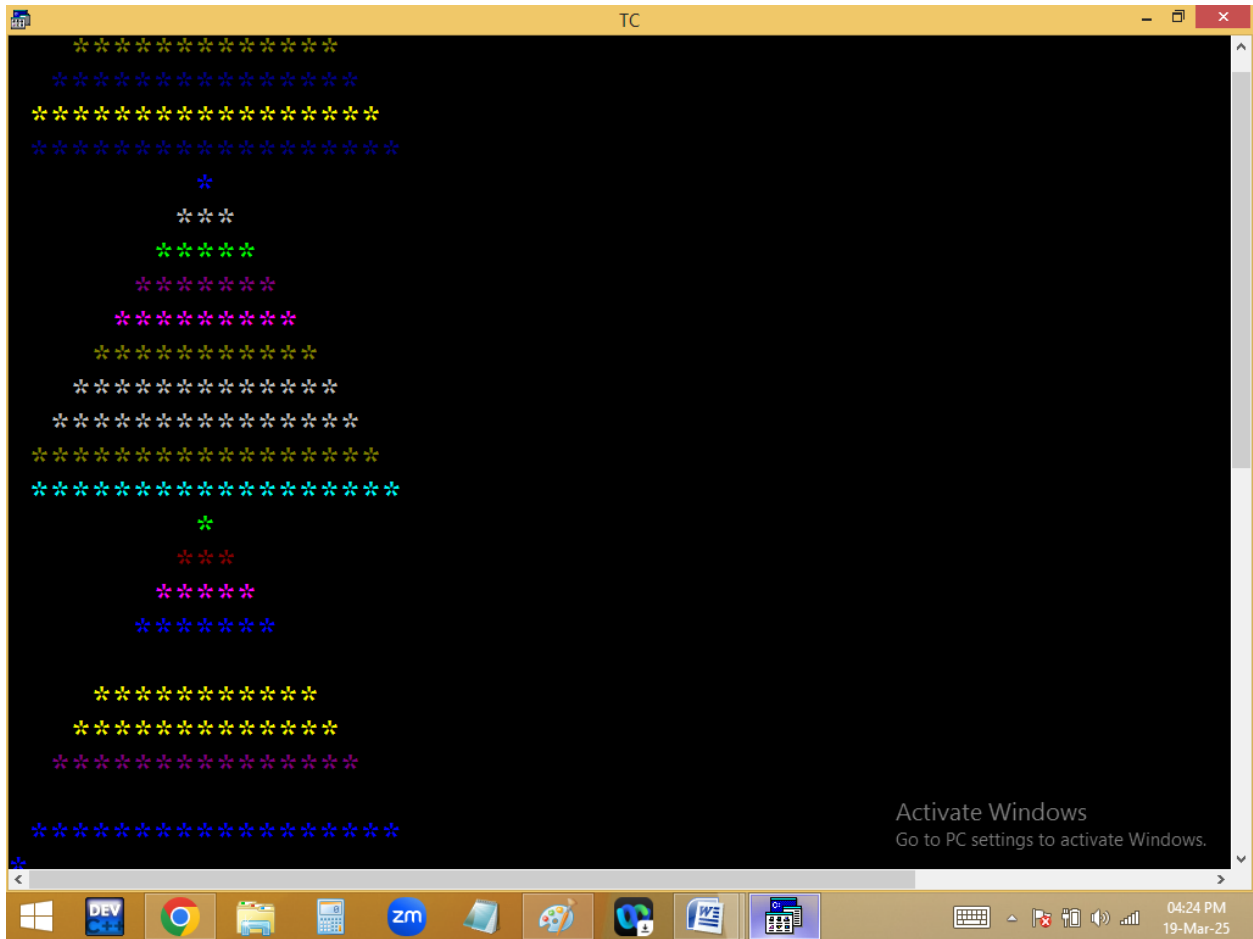

```
TC
File Edit Run Compile Project Options Debug
Line 13 Col 1 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
#include<stdlib.h>
void main()
{
int n,r,c,s; clrscr();
printf("Enter no of rows ");
scanf("%d",&n);
while(!kbhit())
{textcolor(random(16));
for( r=1; r<=n; r++ )
{
for(s=1;s<=n-r;s++)cprintf(" ");
for( c=1; c<=2*r-1; c++)
{
cprintf("*");
}
printf("\n");
}
}
```

Activate Windows
Go to PC settings to activate Windows.

04:25 PM
19-Mar-25

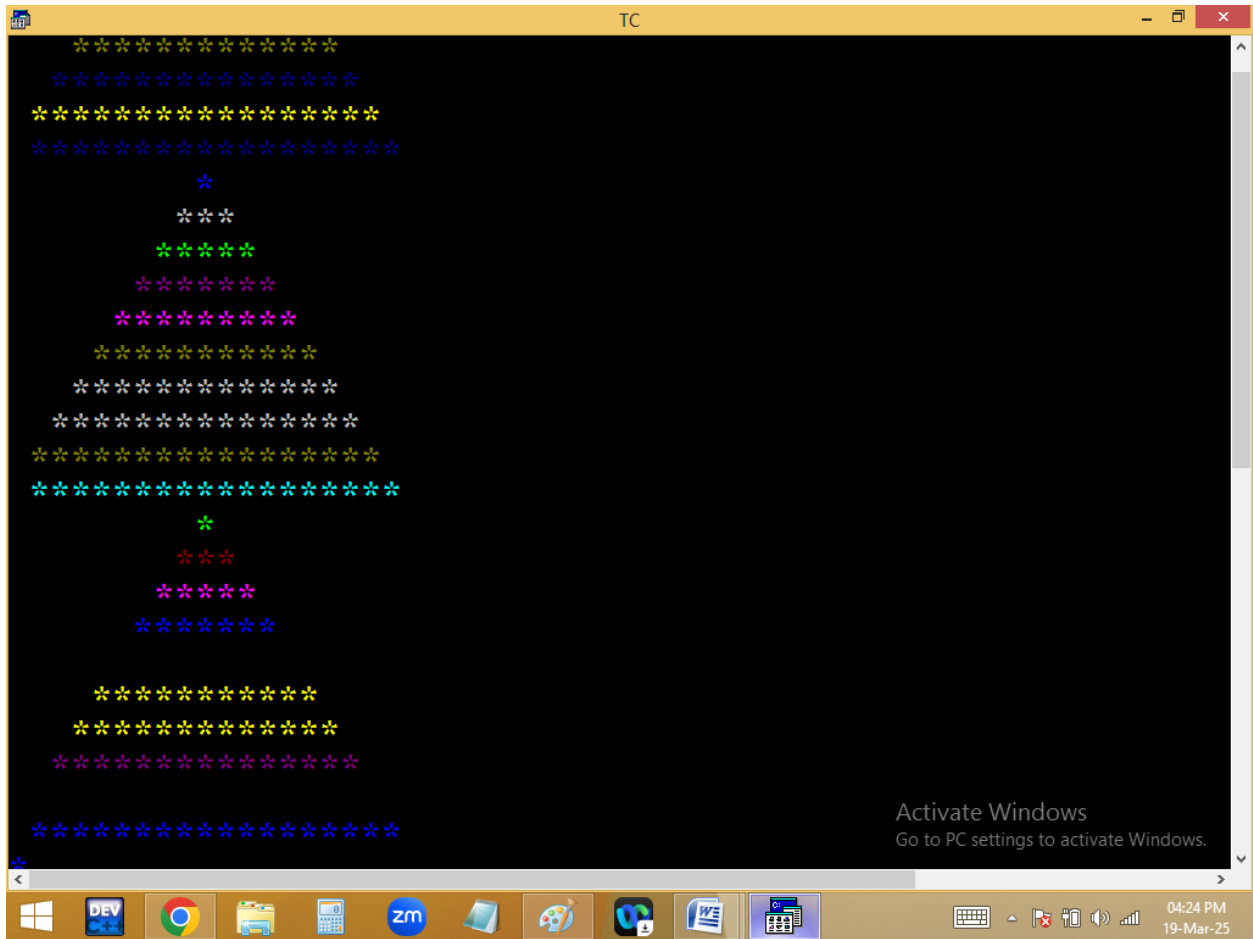


```
TC
File Edit Run Compile Project Options Debug
Line 10 Col 20 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
#include<stdlib.h>
void main()
{
int n,r,c,s; clrscr();
printf("Enter no of rows ");
scanf("%d",&n);
while(!kbhit())
{textcolor(LIGHTRED);
for( r=1; r<=n; r++ )
{
for(s=1;s<=n-r;s++)cprintf(" ");
for( c=1; c<=2*r-1; c++)
{
cprintf("*");
}
printf("\n");
}
}
}
```

Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

04:26 PM
19-Mar-25

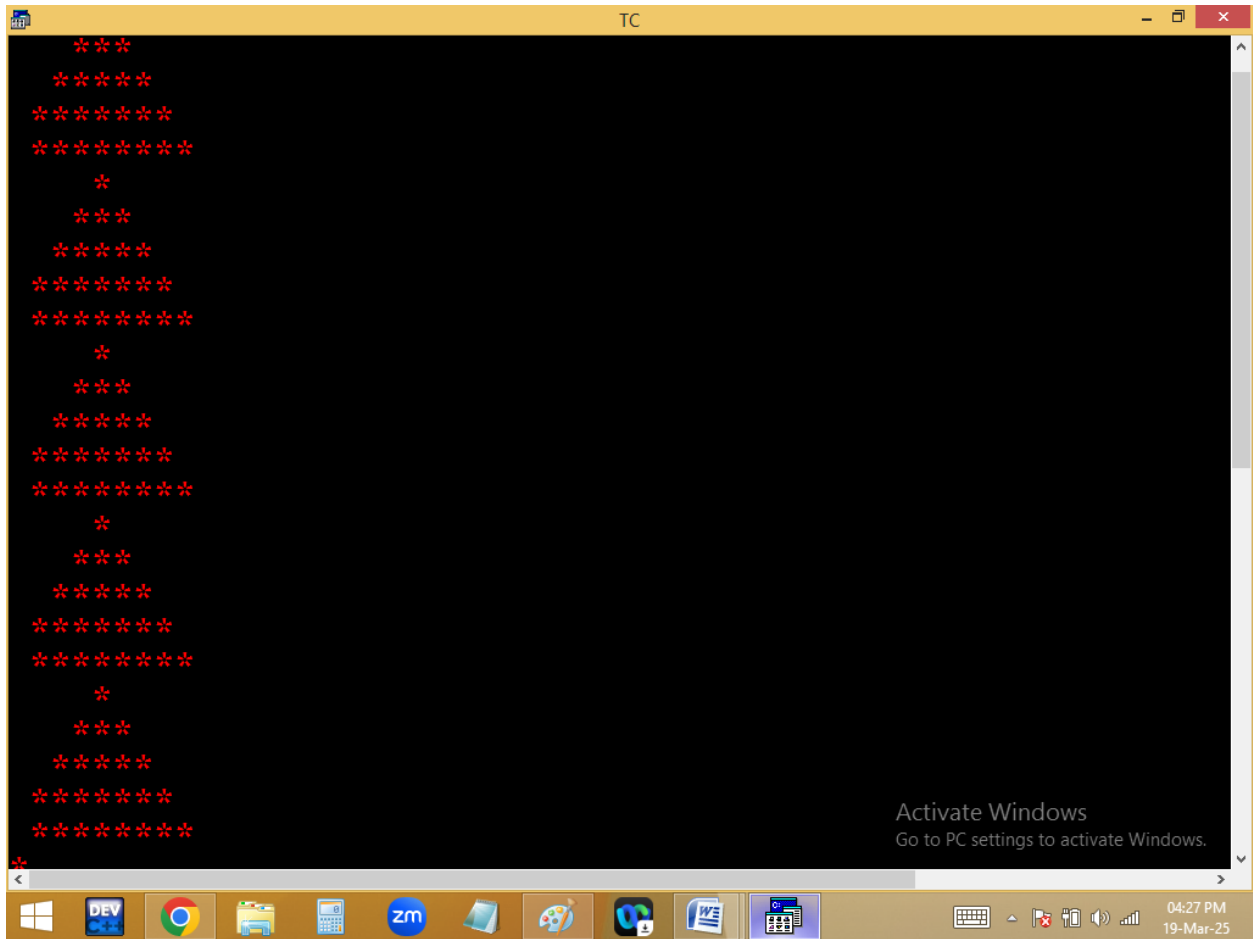



```
TC
File Edit Run Compile Project Options Debug
Line 11 Col 20 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
#include<stdlib.h>
void main()
{
int n,r,c,s; clrscr();
printf("Enter no of rows ");
scanf("%d",&n);
while(!kbhit())
{textcolor(LIGHTRED);
for( r=n; r>=1; r--_)
{
for(s=1;s<=n-r;s++)cprintf(" ");
for( c=1; c<=2*r-1; c++)
{
cprintf("*");
}
printf("\n");
}
}
}
```

Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

04:28 PM
19-Mar-25

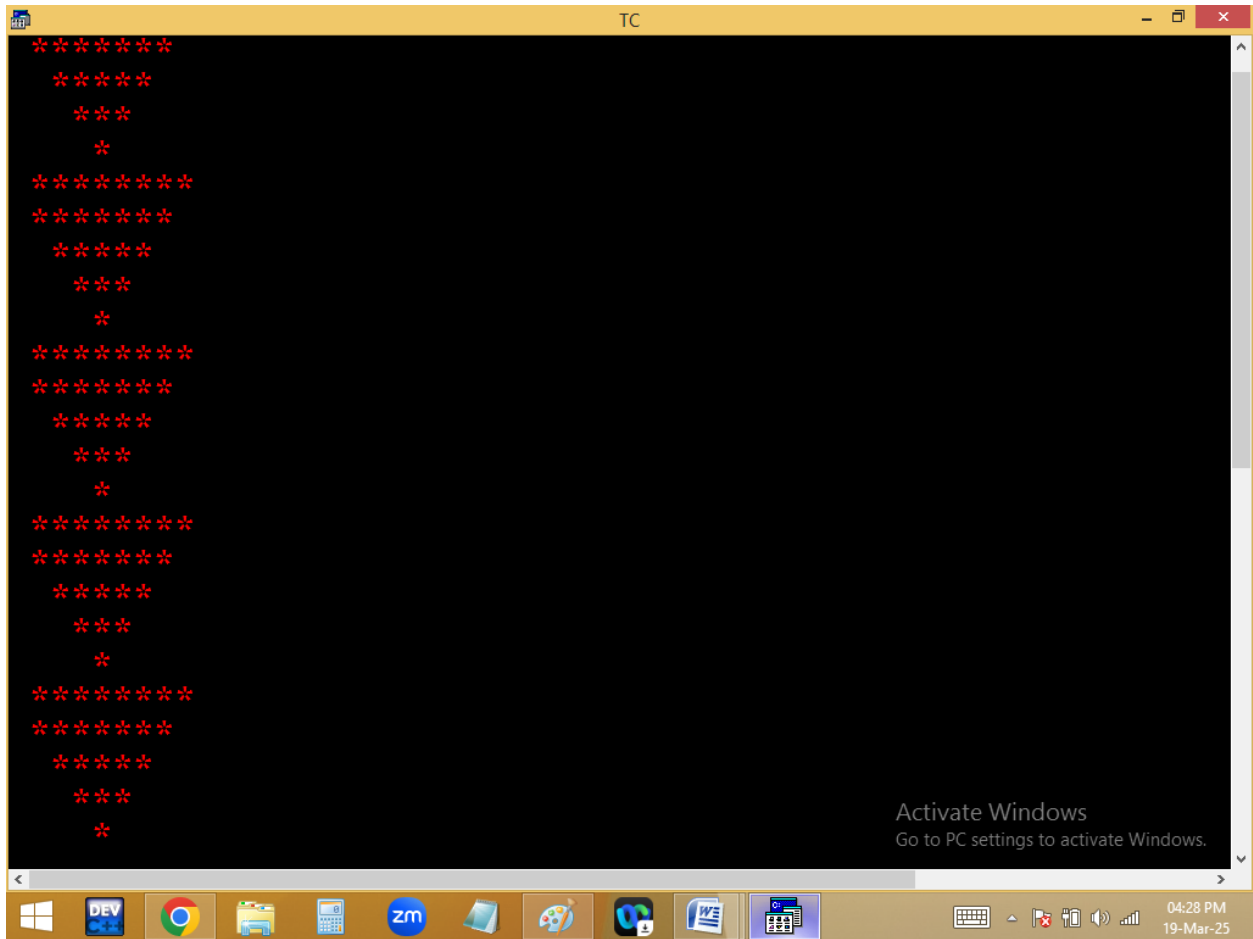



```
TC
File Edit Run Compile Project Options Debug
Line 15 Col 1 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
int n,r,c,s; clrscr();
printf("Enter no of rows ");
scanf("%d",&n);
for( r=1; r<=n;r++ )
{
for(s=1;s<=n-r;s++)printf(" ");
for( c=1; c<=2*r-1; c++)printf("*");
printf("\n");
}for( r=n-1; r>=1; r-- )
{
for(s=1;s<=n-r;s++)printf(" ");
for( c=1; c<=2*r-1; c++)printf("*");
printf("\n");
}
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

04:30 PM
19-Mar-25

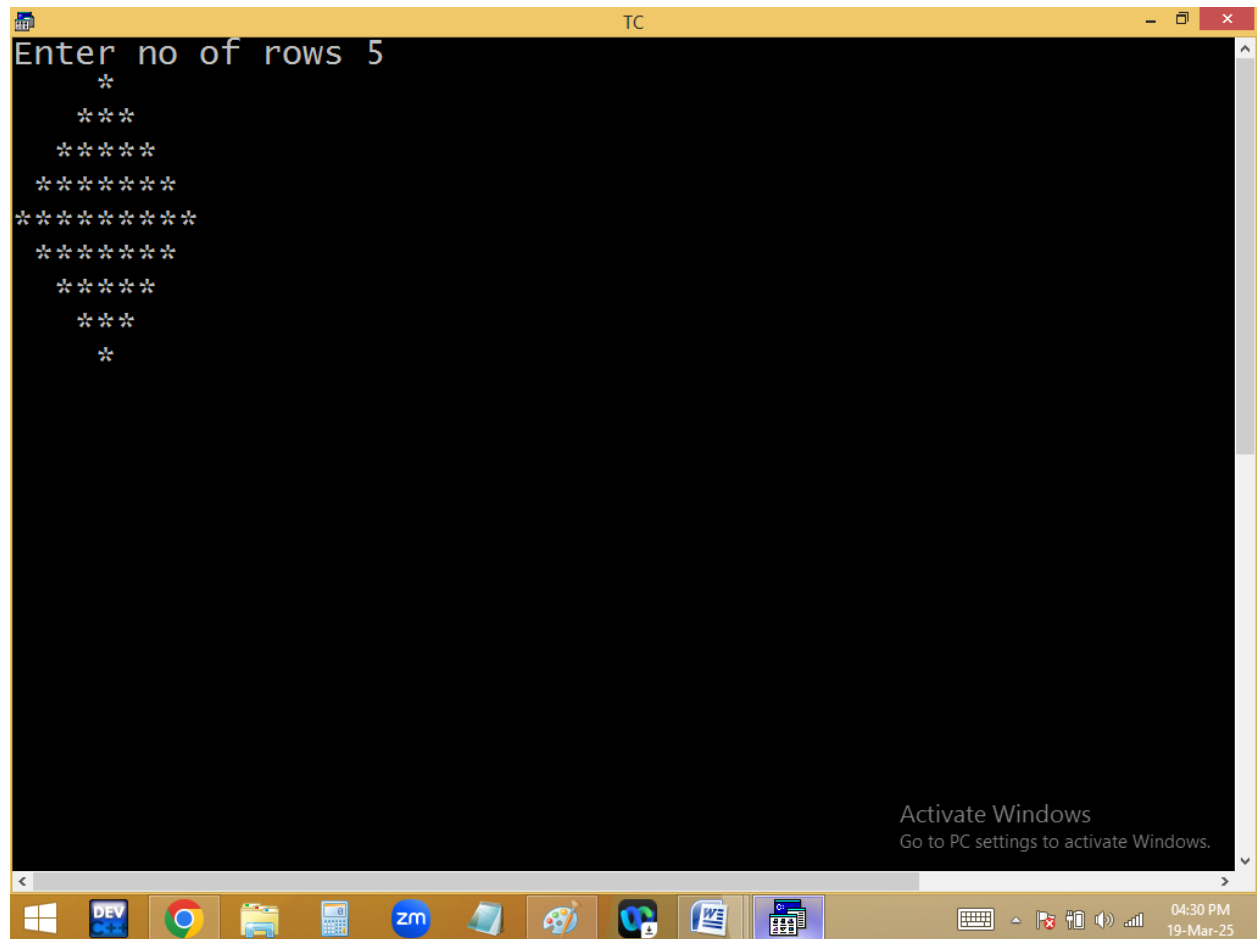


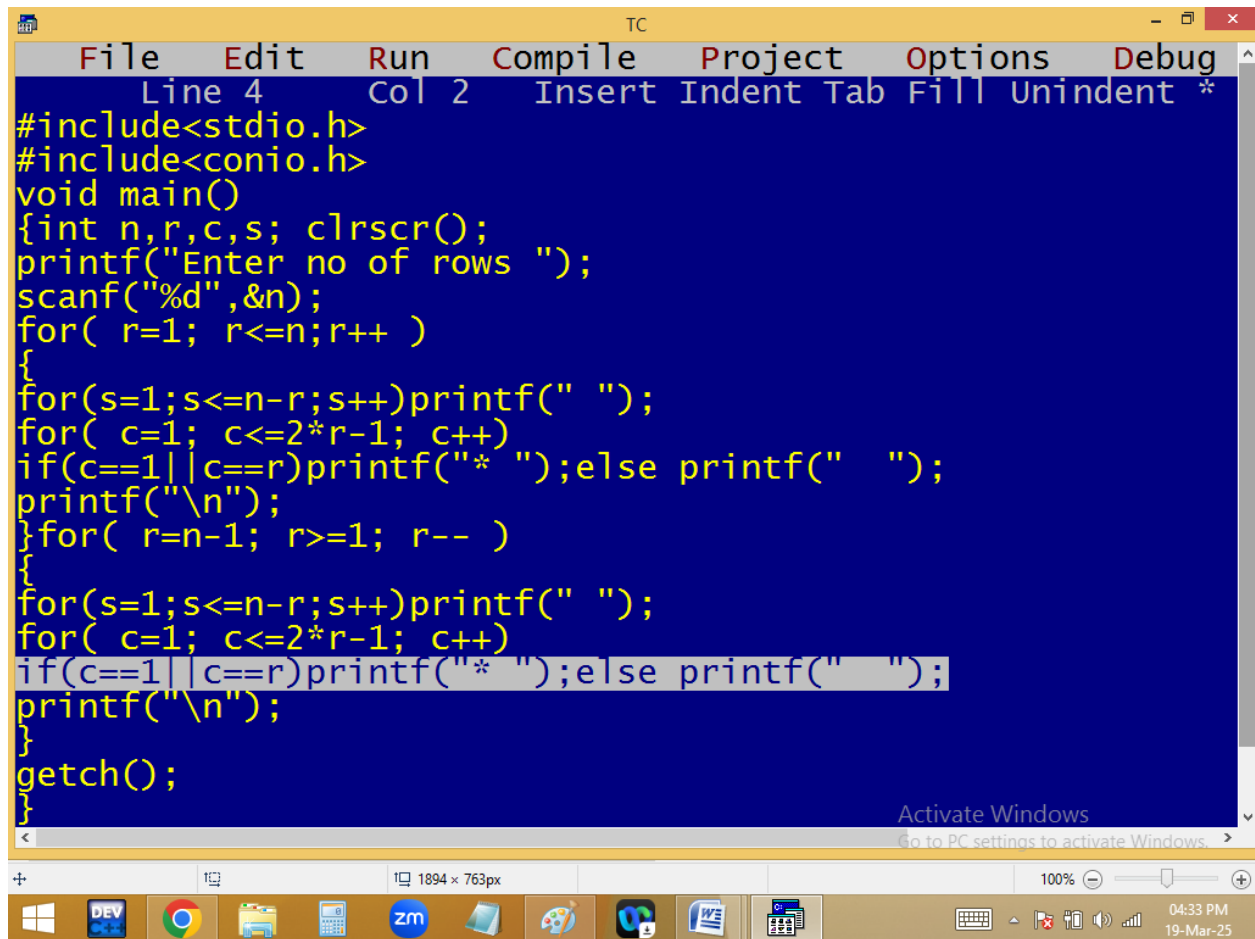

```
TC
File Edit Run Compile Project Options Debug
Line 4 Col 2 Insert Indent Tab Fill Unindent *
#include<stdio.h>
#include<conio.h>
void main()
{int n,r,c,s; clrscr();
printf("Enter no of rows ");
scanf("%d",&n);
for( r=1; r<=n;r++ )
{
for(s=1;s<=n-r;s++)printf(" ");
for( c=1; c<=2*r-1; c++)
if(c==1||c==r)printf("* ");else printf(" ");
printf("\n");
}for( r=n-1; r>=1; r-- )
{
for(s=1;s<=n-r;s++)printf(" ");
for( c=1; c<=2*r-1; c++)
if(c==1||c==r)printf("* ");else printf(" ");
printf("\n");
}
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

1894 x 763px 100% 04:33 PM 19-Mar-25

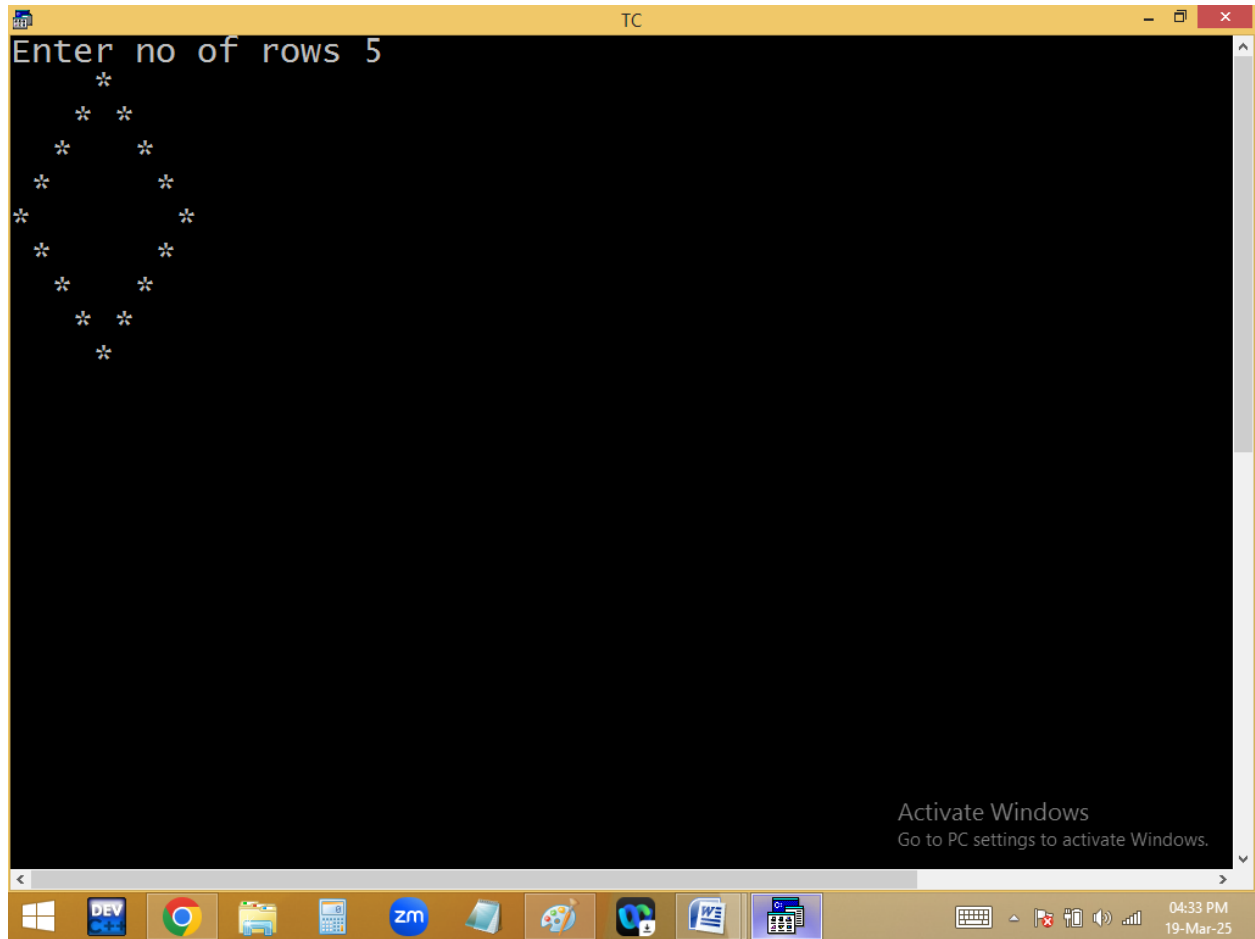


```
TC
File Edit Run Compile Project Options Debug
Line 13 Col 5 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{int n,r,c,s; clrscr();
printf("Enter no of rows ");
scanf("%d",&n);
for( r=n-1; r>=1; r-- )
{
for(s=1;s<=n-r;s++)printf(" ");
for( c=1; c<=2*r-1; c++)printf("*");
printf("\n");
}
for(r=2; r<=n;r++ )
{
for(s=1;s<=n-r;s++)printf(" ");
for( c=1; c<=2*r-1; c++)printf("*");
printf("\n");
}
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

04:36 PM
19-Mar-25

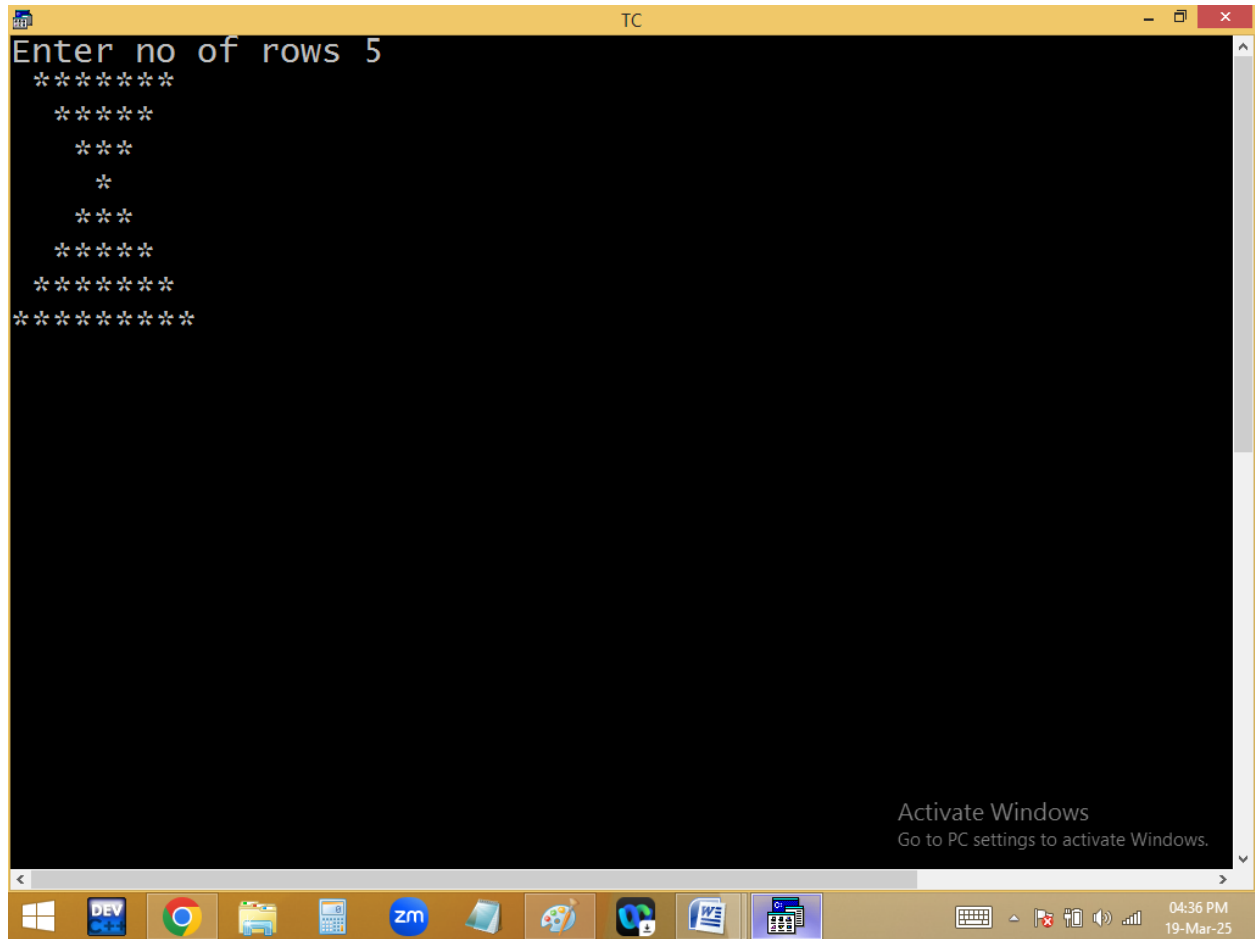



```
TC
File Edit Run Compile Project Options Debug
Line 16 Col 17 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{int n,r,c; clrscr();
printf("Enter no of rows ");
scanf("%d",&n);
for( r=1; r<=n; r++ )
{
for(c=1; c<=r; c++)printf("*");
printf("\n");
}
for(r=n-1; r>=1; r-- )
{
for( c=1; c<=r; c++)printf("*");
printf("\n");
}
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

04:39 PM
19-Mar-25

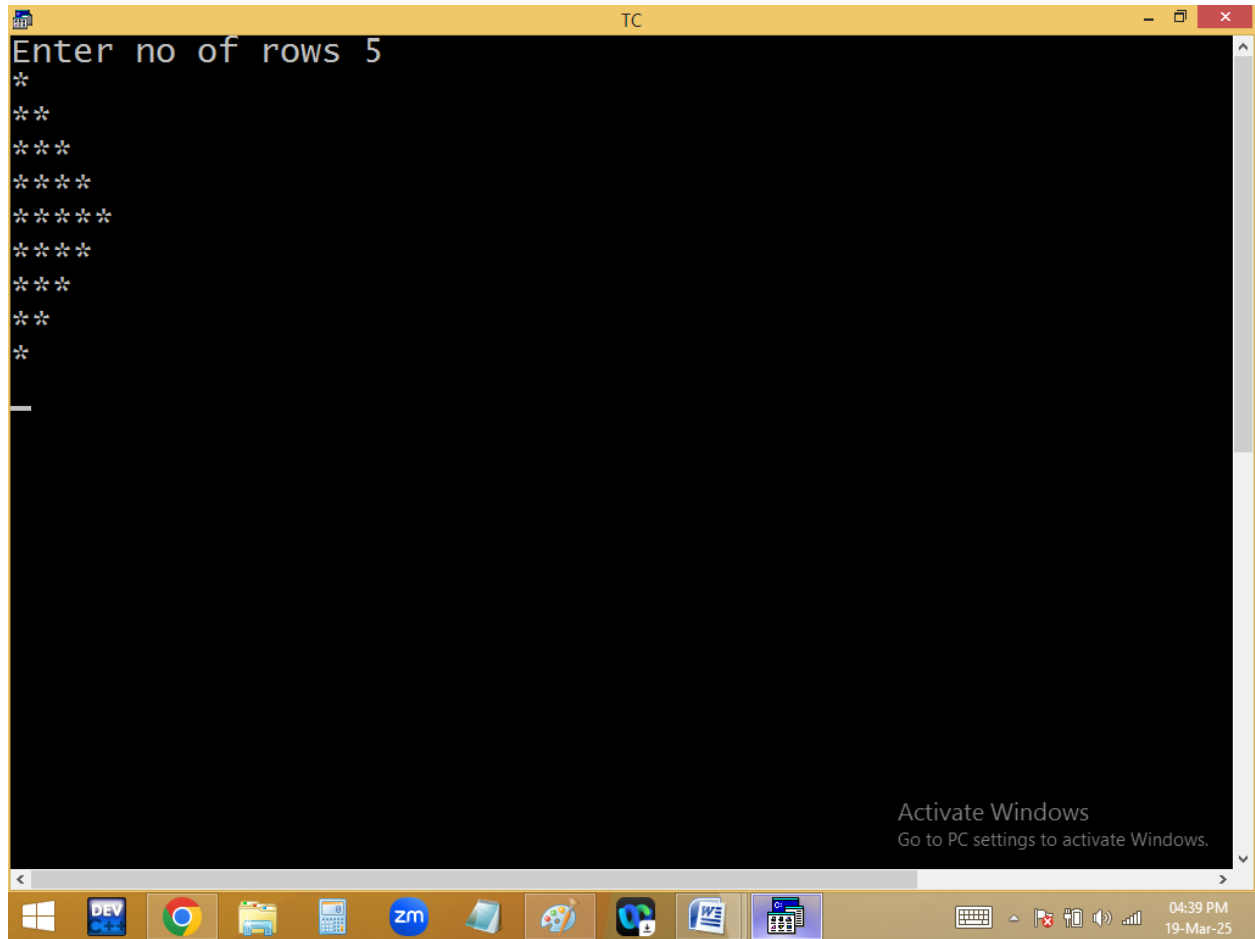

```
#include<stdio.h>
#include<conio.h>
void main()
{int n,r,c,s;
clrscr();
printf("Enter no of rows ");
scanf("%d",&n);
for( r=1; r<=n; r++ )
{
for(s=1;s<=n-r;s++)printf(" ");
for(c=1; c<=r; c++)printf("%3d",c);
for(c=r-1;c>=1;c--)printf("%3d",c);
printf("\n");
}
getch();
}
```

F1-Help F5-Zoom F6-Switch F7-Trace F8-Step F9-Make F10-Menu NUM

```

for( r=1; r<=4; r++ )
{
for( s=1; s<=n-r; s++) p(" ");

for(c=1; c<=r;c++)p(c);
fo( c=r-1;r>=1;r--)p(c);
p("\n");
}


```

```

- - - 1
- - 1 2 1
- 1 2 3 2 1
1 2 3 4 3 2 1

```

PASCAL TRIANGLE:

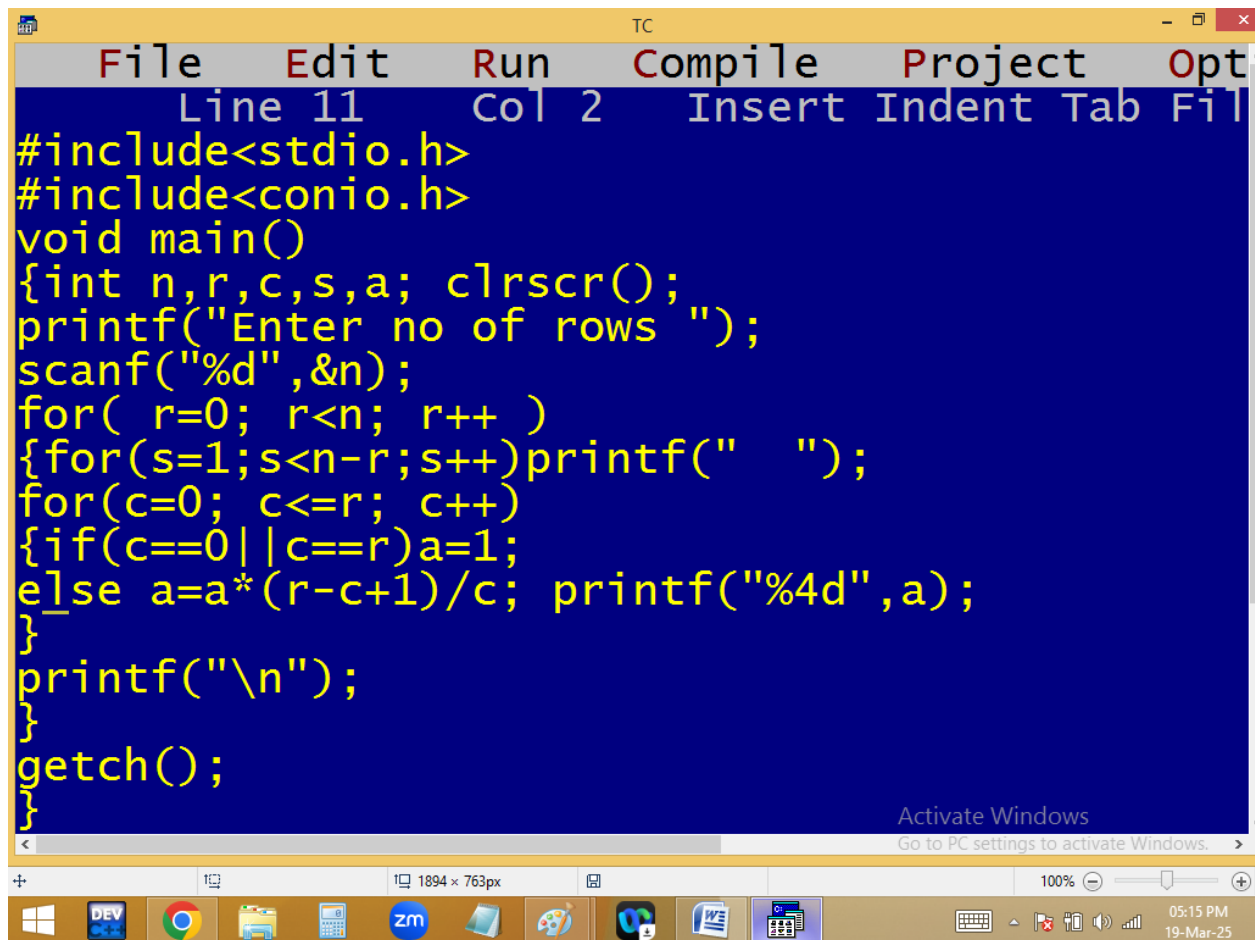

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", and "Options". The status bar at the top indicates "Line 11", "Col 2", and "Insert Indent Tab Fil". The main editing area has a dark blue background with yellow text. The code is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{int n,r,c,s,a; clrscr();
printf("Enter no of rows ");
scanf("%d",&n);
for( r=0; r<n; r++ )
{for(s=1;s<n-r;s++)printf("  ");
for(c=0; c<=r; c++)
{if(c==0||c==r)a=1;
else a=a*(r-c+1)/c; printf("%4d",a);
}
printf("\n");
}
getch();
}
```

At the bottom of the IDE window, there is a watermark that says "Activate Windows" and "Go to PC settings to activate Windows." The Windows taskbar is visible at the very bottom, showing icons for Windows, DEV, Chrome, File Explorer, Calculator, Zoom, and other applications. The system clock shows "05:15 PM" and "19-Mar-25".

```

Enter no of rows 10
      1
     1 1
    1 2 1
   1 3 3 1
  1 4 6 4 1
 1 5 10 10 5 1
1 6 15 20 15 6 1
 1 7 21 35 35 21 7 1
   1 8 28 56 70 56 28 8 1
    1 9 36 84 126 126 84 36 9 1

```


Activate Windows
Go to PC settings to activate Windows.

```

for( r=0; r<n; r++)
{
for( s=1;s<n-r;s++)p(" ");
for( c=0; c<=r; c++ )
{
if(c==0 | c==r ) a=1;
else p(" ");
}
printf("\n");
}

```

$$\frac{n}{5} - \frac{r}{5} = \frac{5}{5}$$

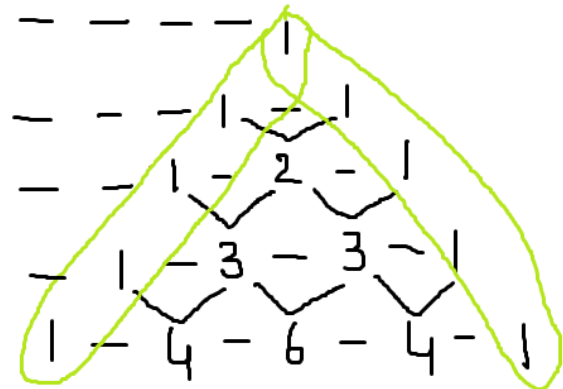


$\frac{r}{0}$	$\frac{c}{0}$	$\frac{a}{1*(2-1+1)} \Big 1:2$	
1	0 1	$1*(3-1+1)/1=3$	1 1
2	0 1 2	$3*(3-2+1)/2=3$	1 2 1
3	0 1 2 3		1+3+3+1
4	0 1 2 3 4	$1*(4-1+1)/1=4$	1 4 6 4 1
		$4*(4-2+1)/2=6$	
		$6*(4-3+1)/3=4$	

$a = a*(r-c+1)/c;$

break:

break is a keyword used within loop / switch.


When break is used, the remaining statements in that switch / loop not working. Because of the program execution jumped to outside the switch / loop.

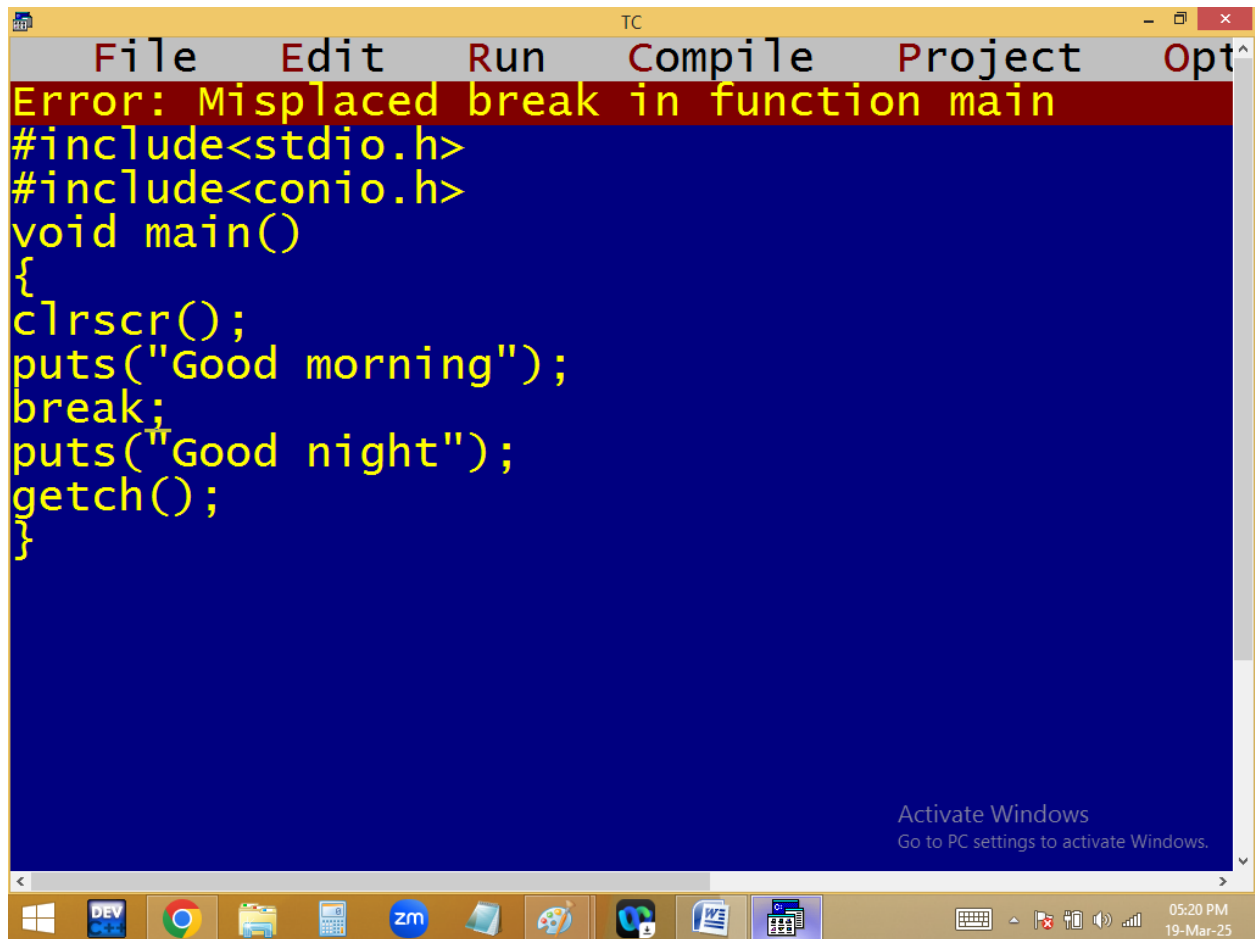

The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", and "Opt^". A red error message banner at the top reads "Error: Misplaced break in function main". The code editor has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
clrscr();
puts("Good morning");
break;
puts("Good night");
getch();
}
```


An "Activate Windows" watermark is visible in the bottom right corner of the code editor area, with the text "Go to PC settings to activate Windows." The Windows taskbar is at the bottom, showing icons for Windows, DEV, Chrome, File Explorer, Calculator, Zoom, and other applications. The system clock in the bottom right corner shows "05:20 PM" and "19-Mar-25".

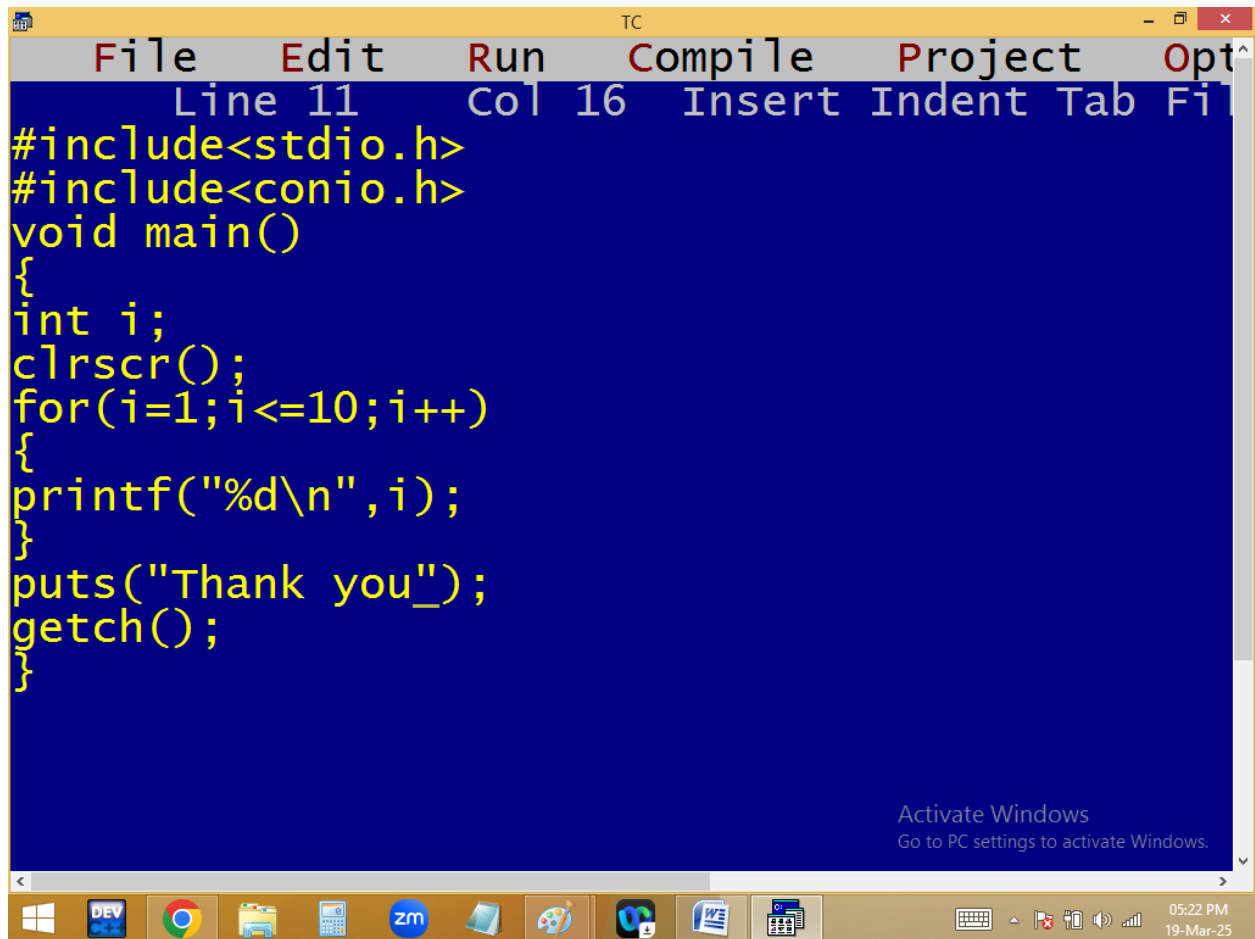


The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", and "Options". Below the menu bar, a status bar indicates "Line 11", "Col 16", and lists editing options: "Insert", "Indent", "Tab", and "Fill". The main editing area has a blue background and contains the following C code in yellow text:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i;
    clrscr();
    for(i=1;i<=10;i++)
    {
        printf("%d\n",i);
    }
    puts("Thank you_");
    getch();
}
```

In the bottom right corner of the IDE window, there is a message: "Activate Windows. Go to PC settings to activate Windows." The Windows taskbar is visible at the bottom, showing icons for Windows, DEV, Chrome, File Explorer, Calculator, Zoom, and other applications. The system clock in the bottom right corner shows "05:22 PM" and "19-Mar-25".

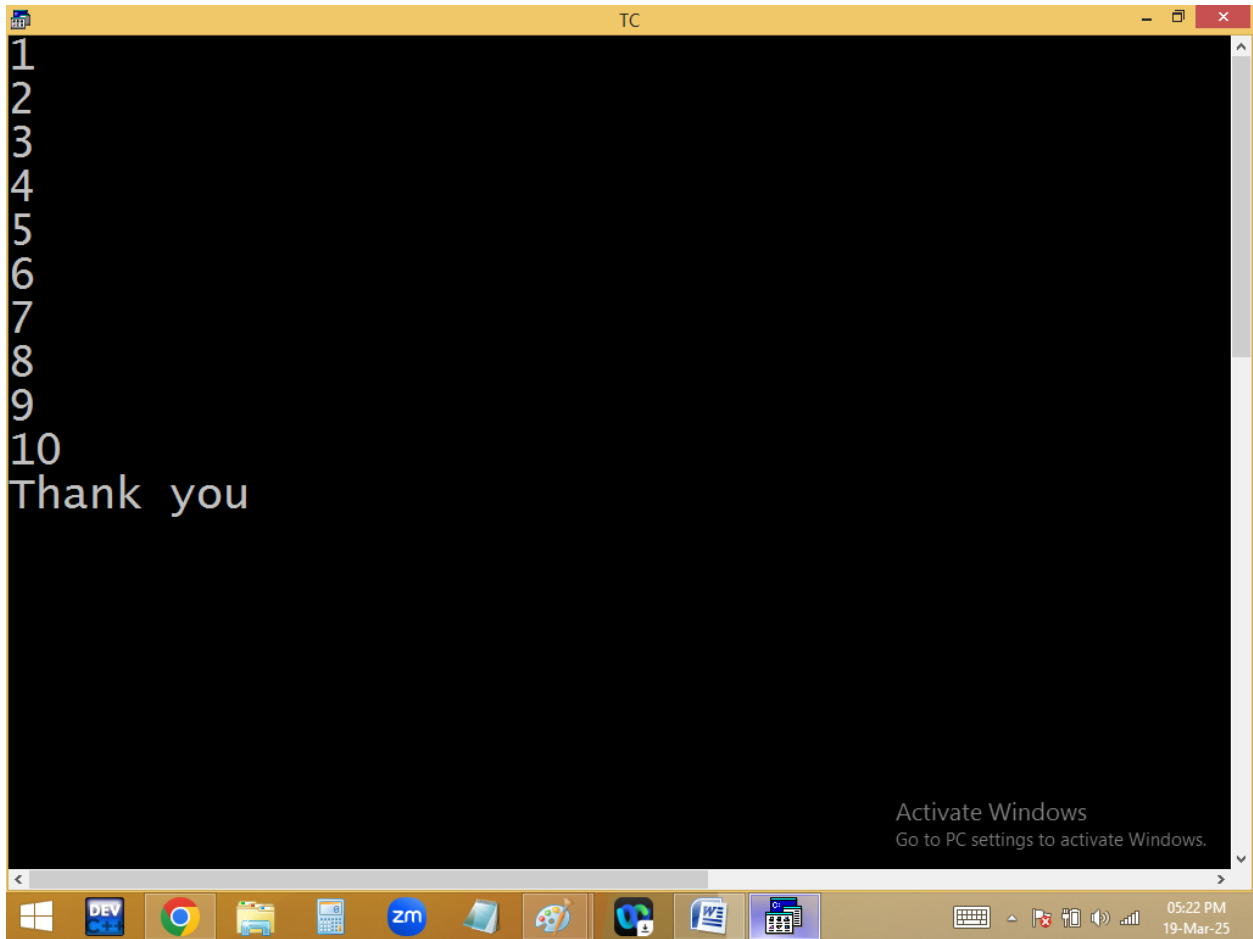


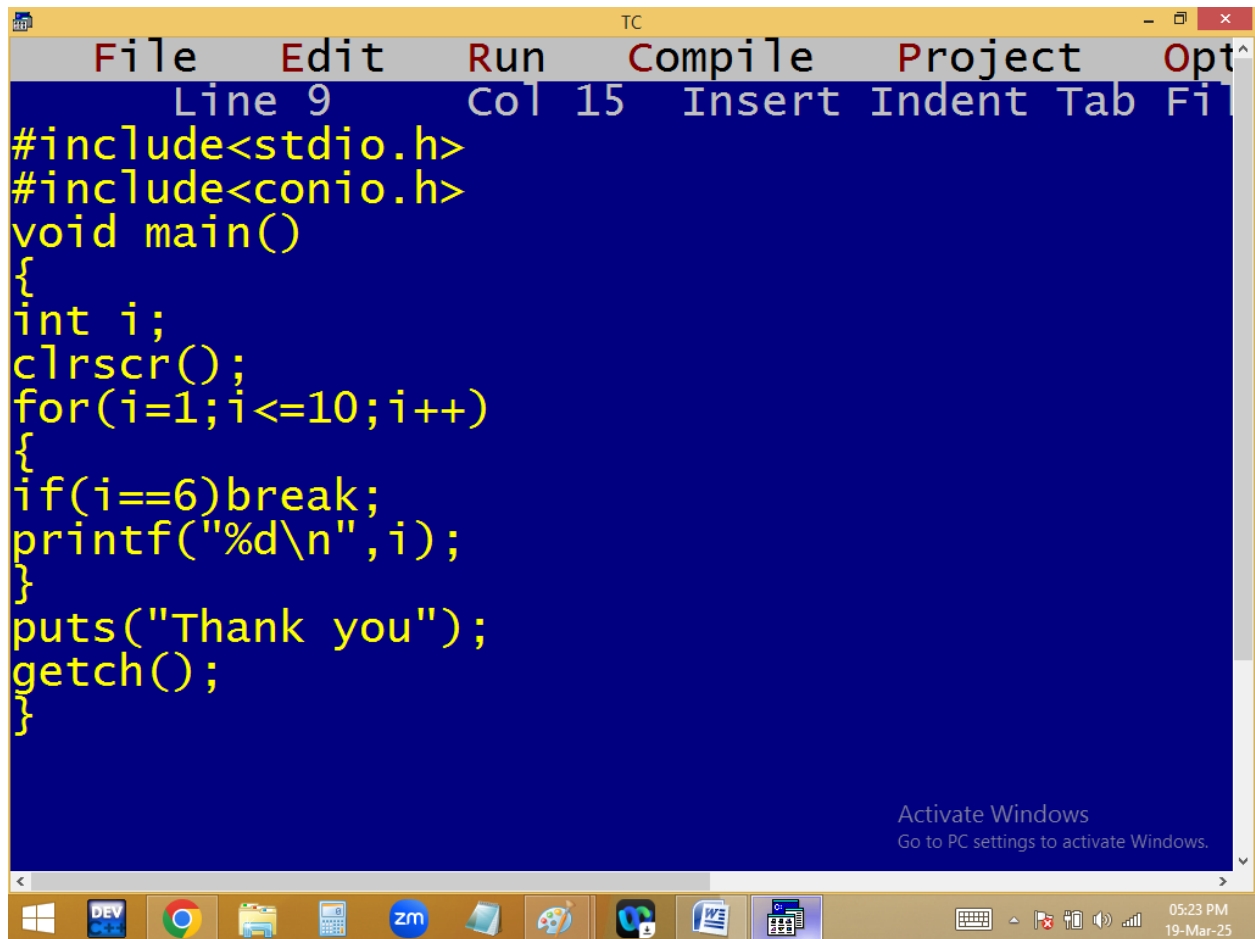


```
TC
File Edit Run Compile Project Opt
Line 9 Col 15 Insert Indent Tab Fi
#include<stdio.h>
#include<conio.h>
void main()
{
int i;
clrscr();
for(i=1;i<=10;i++)
{
if(i==6)break;
printf("%d\n",i);
}
puts("Thank you");
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

05:23 PM
19-Mar-25

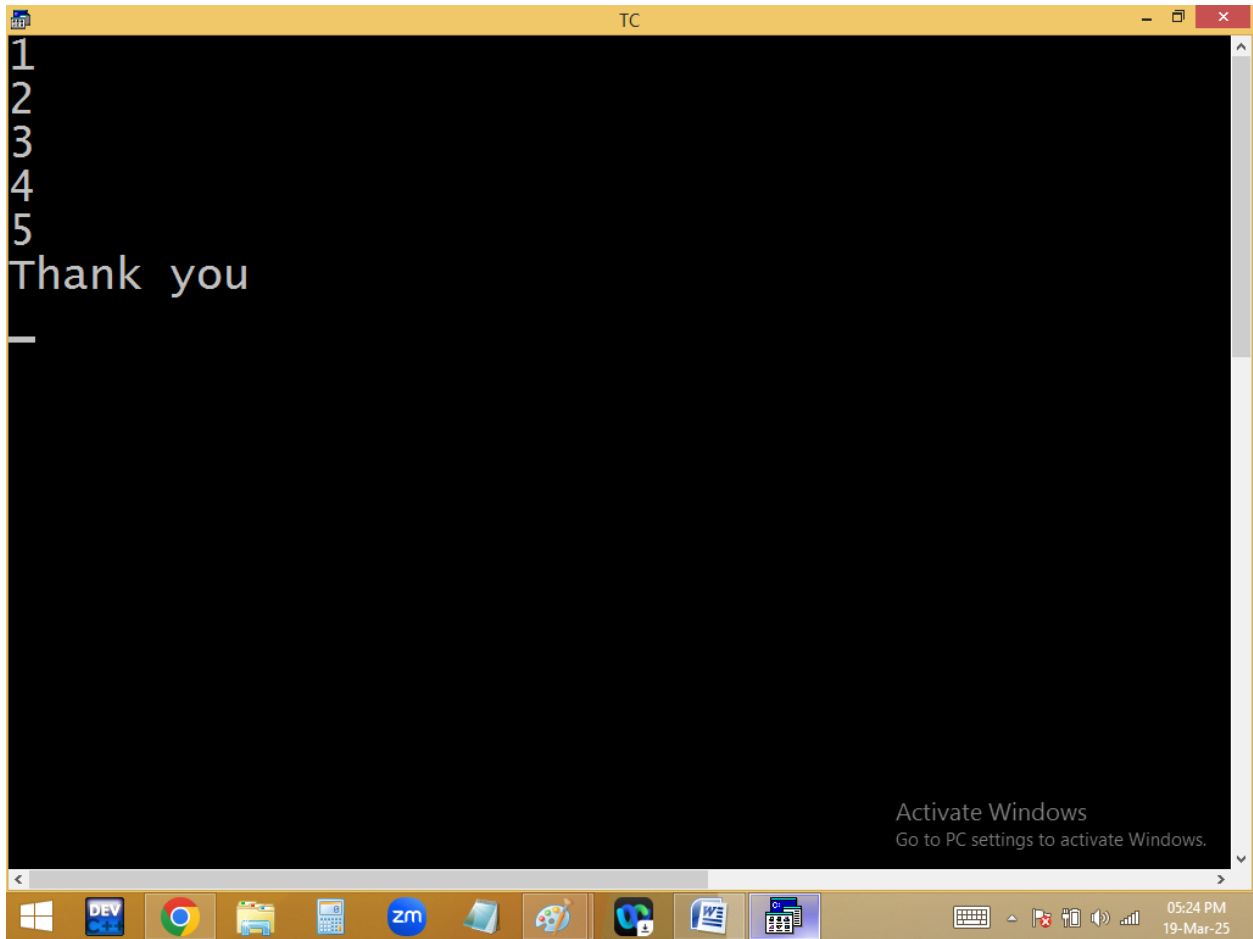


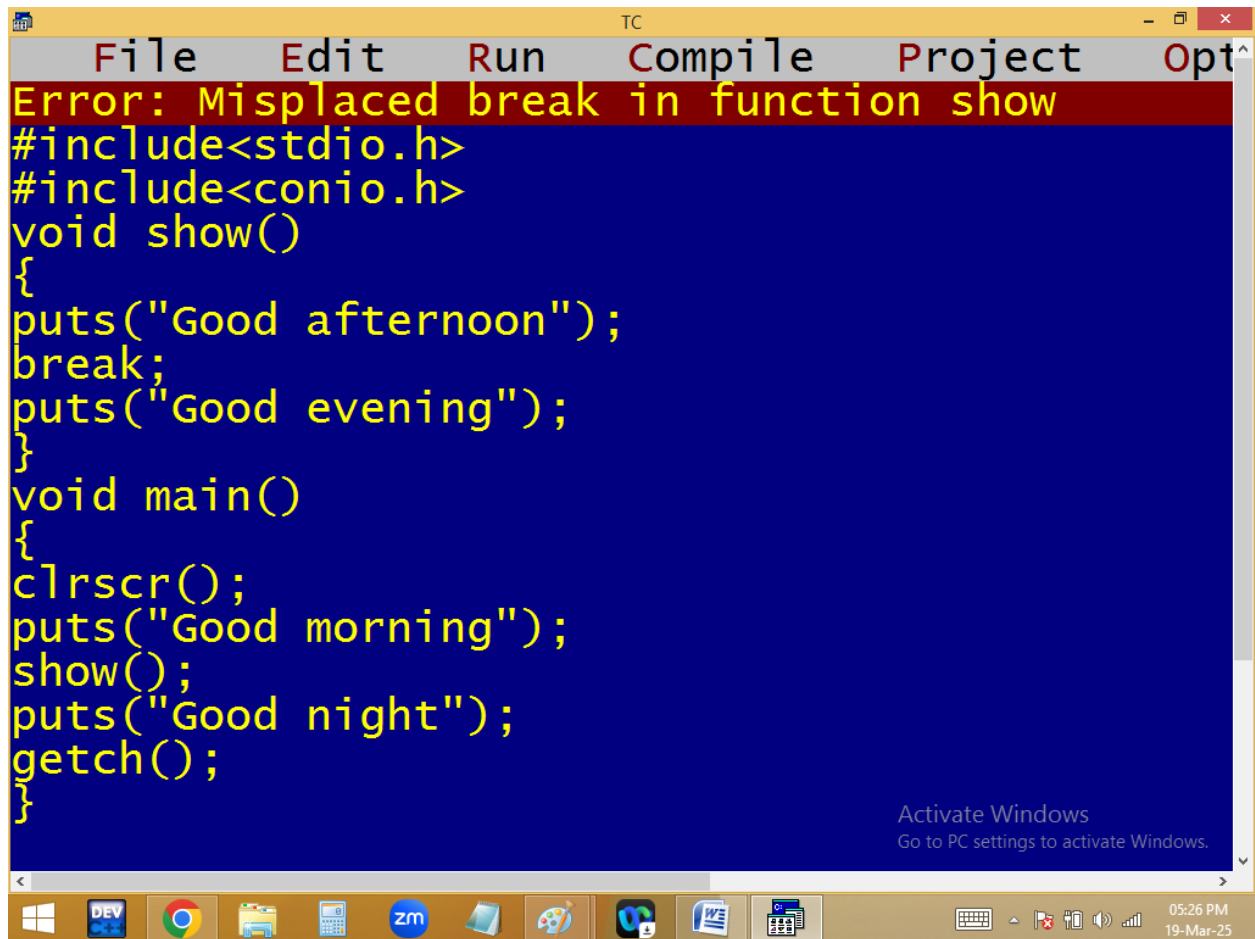

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", and "Opt^". A red error message banner at the top of the code editor states: "Error: Misplaced break in function show". The code in the editor is as follows:

```
#include<stdio.h>
#include<conio.h>
void show()
{
puts("Good afternoon");
break;
puts("Good evening");
}
void main()
{
clrscr();
puts("Good morning");
show();
puts("Good night");
getch();
}
```


An "Activate Windows" watermark is visible in the bottom right corner of the code editor area, with the text "Go to PC settings to activate Windows." The Windows taskbar at the bottom shows the Start button, a taskbar search icon, and several application icons including DEV, Chrome, File Explorer, Calculator, Zoom, and others. The system tray on the right shows the date and time as "05:26 PM 19-Mar-25".

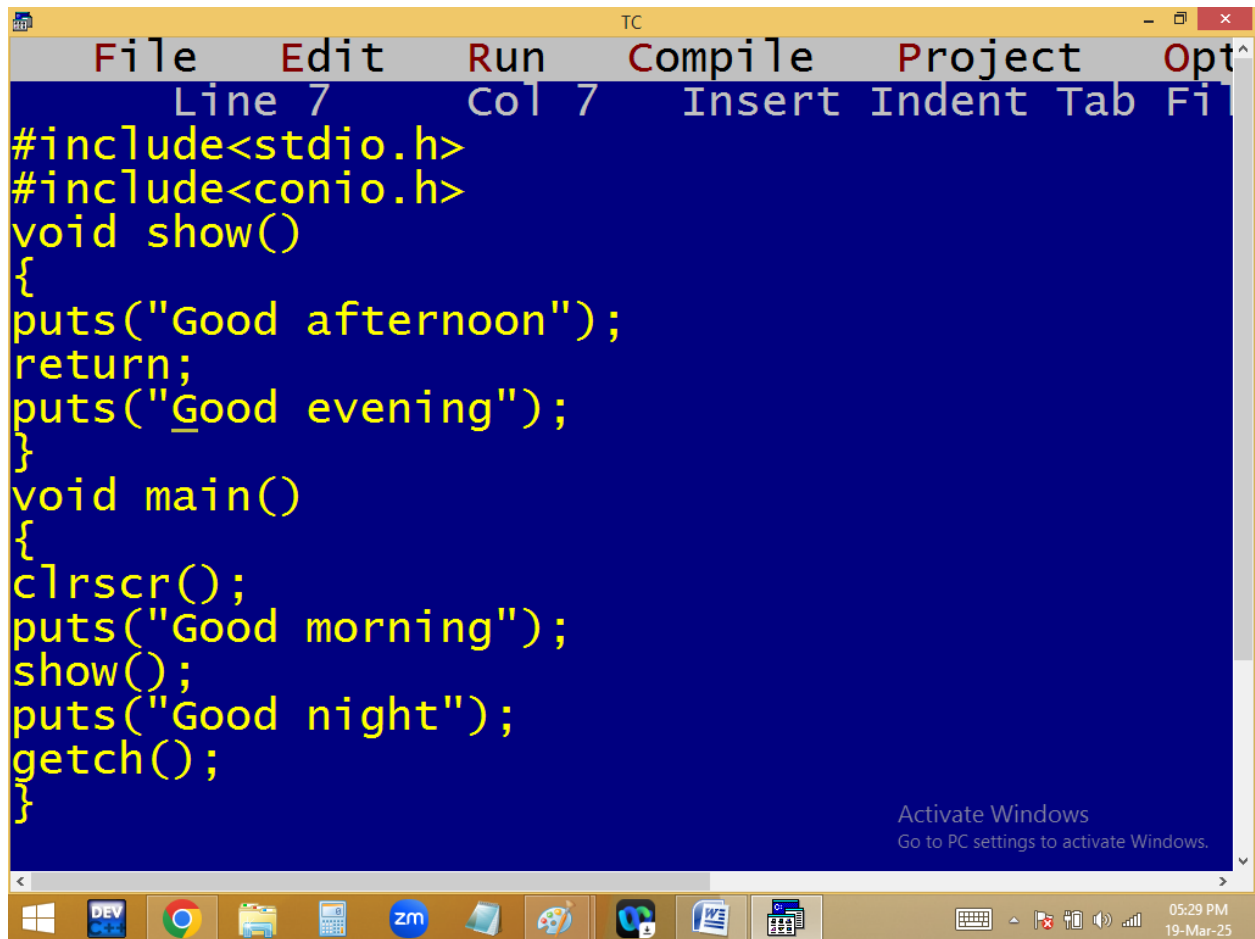


```
TC
File Edit Run Compile Project Options
Line 7 Col 7 Insert Indent Tab Fil
#include<stdio.h>
#include<conio.h>
void show()
{
puts("Good afternoon");
return;
puts("Good evening");
}
void main()
{
clrscr();
puts("Good morning");
show();
puts("Good night");
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

05:29 PM
19-Mar-25

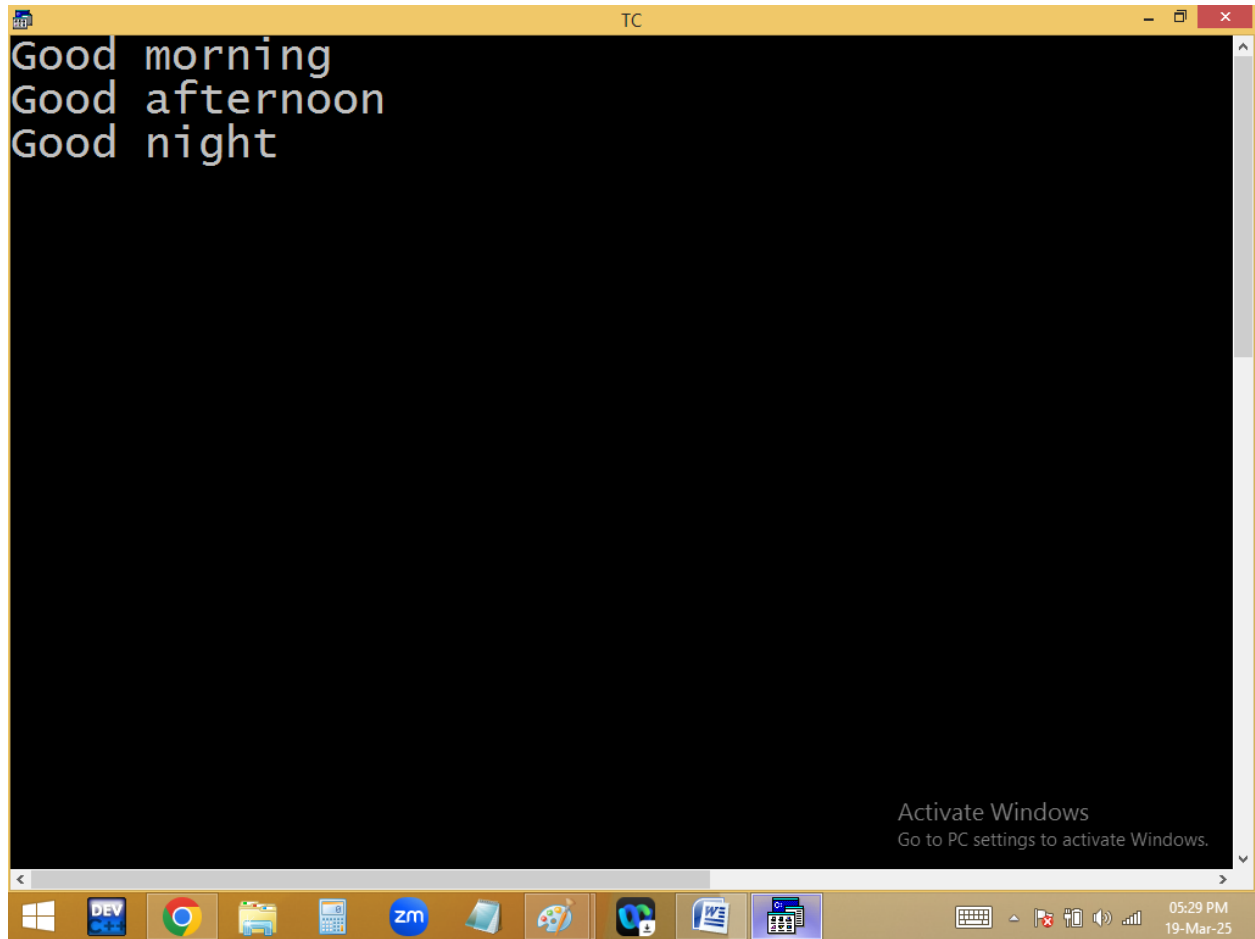


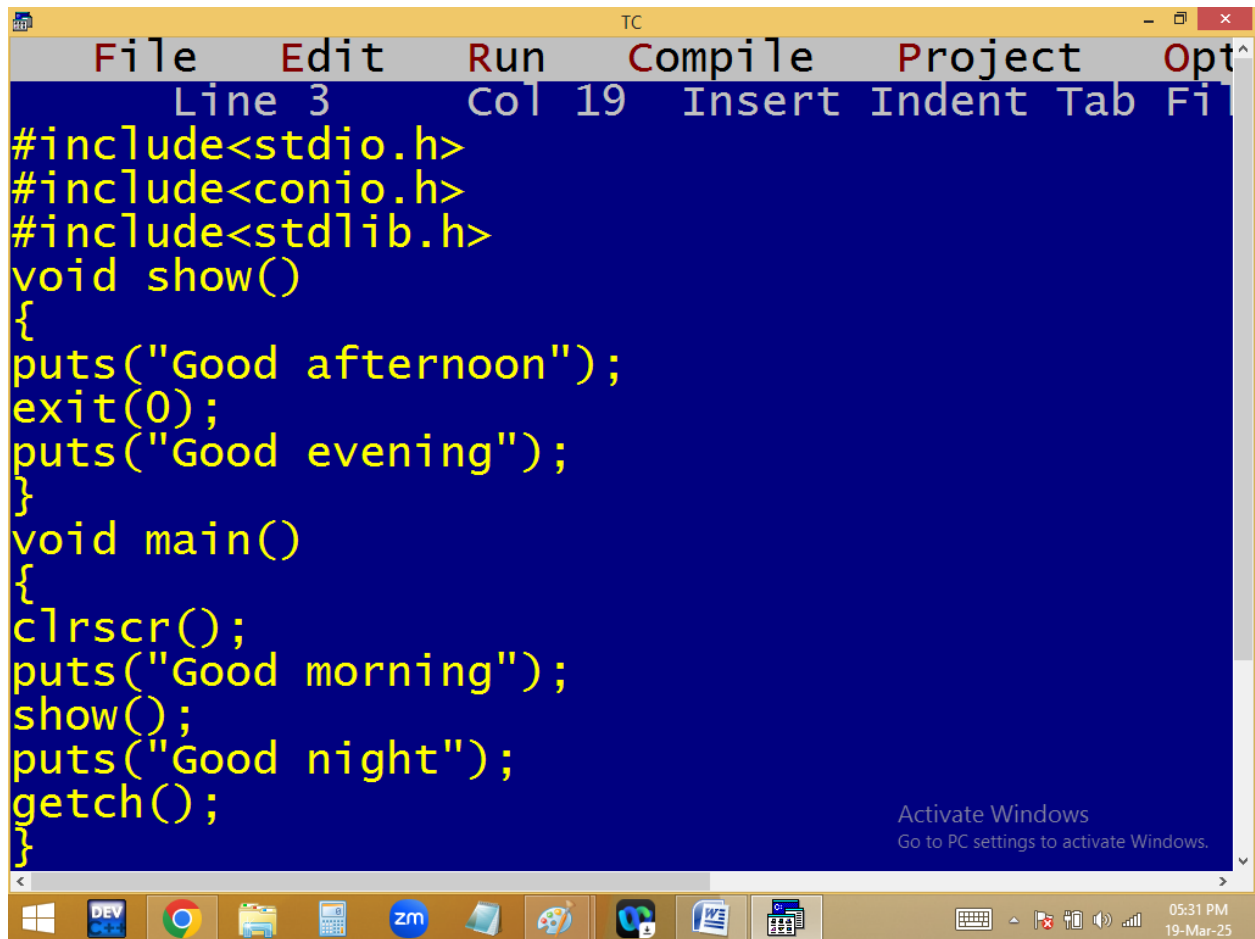

```
TC
File Edit Run Compile Project Opt
Line 3 Col 19 Insert Indent Tab Fi
#include<stdio.h>
#include<conio.h>
#include<stdlib.h>
void show()
{
puts("Good afternoon");
exit(0);
puts("Good evening");
}
void main()
{
clrscr();
puts("Good morning");
show();
puts("Good night");
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

05:31 PM
19-Mar-25

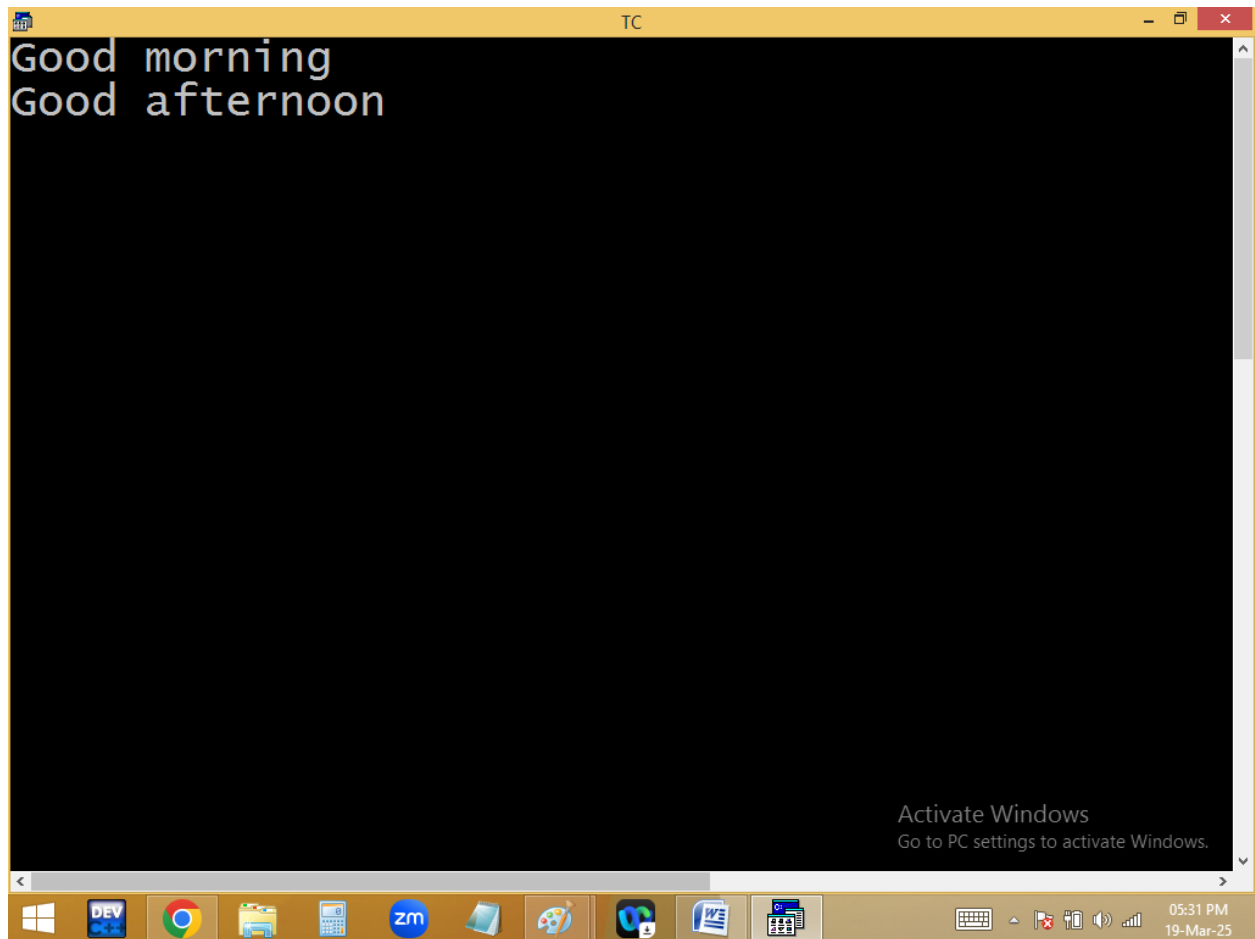


```
TC
Good morning
Good afternoon
```

break	exit()	Return
Keyword	Function	Keyword
Header file not required	stdlib.h / process.h required	Header file not required
Terminates switch / loop	Terminates total program	Closes that function only
Should be used within switch/loop	Used any where	Used any where

continue:

It is a keyword used within a loop.

When `continue` occurred the remaining statements in that loop are skipped because of program execution jumped to loop ending and later to beginning of the loop.

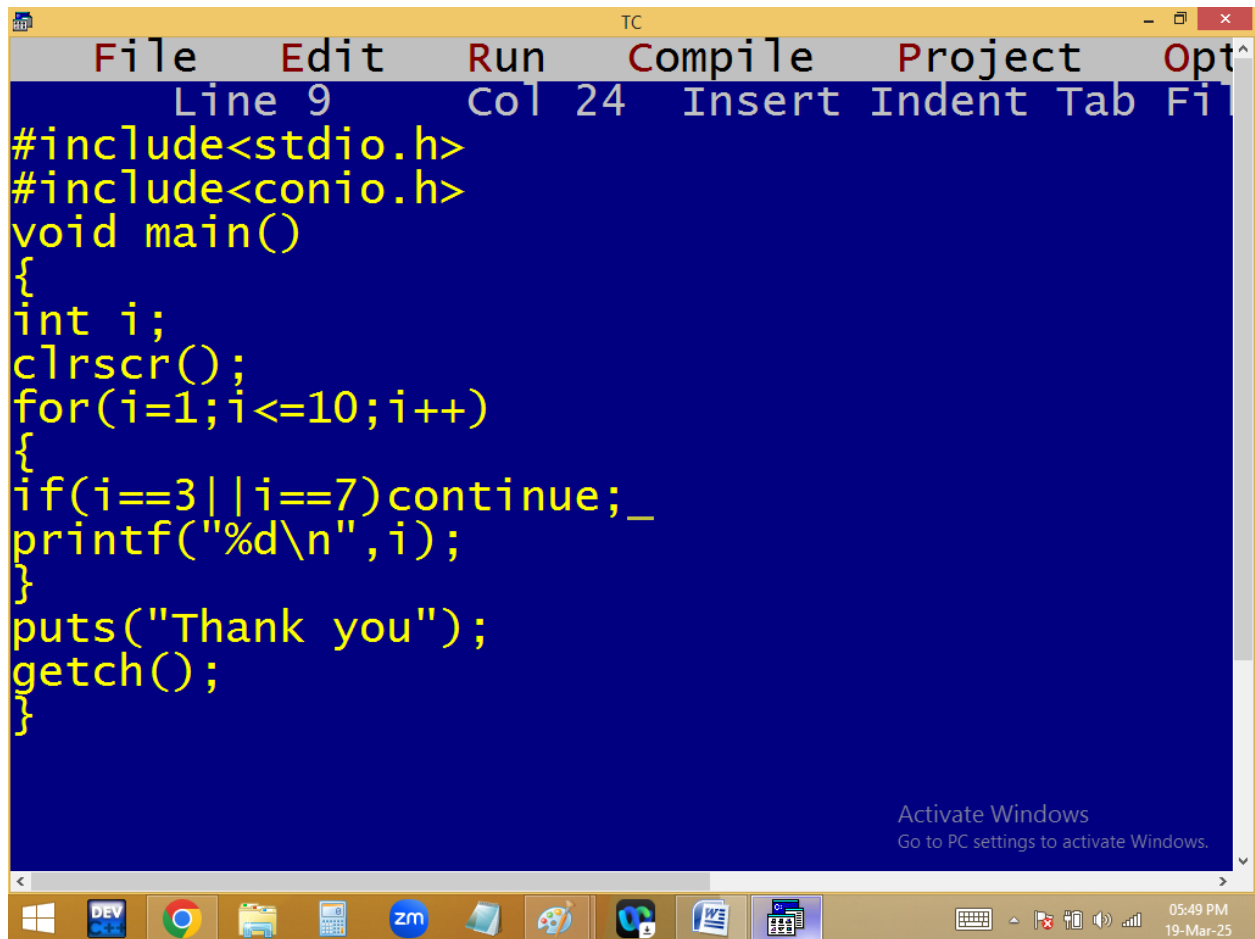

The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. Below the title bar is a menu bar with the following options: File, Edit, Run, Compile, Project, and Opt. Below the menu bar is a status bar that displays "Line 9" and "Col 24". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i;
    clrscr();
    for(i=1;i<=10;i++)
    {
        if(i==3||i==7)continue;_
        printf("%d\n",i);
    }
    puts("Thank you");
    getch();
}
```


At the bottom of the window, there is a taskbar with various application icons, including Windows, DEV, Chrome, File Explorer, Calculator, Zoom, and others. The system tray on the right shows the date and time as "05:49 PM 19-Mar-25".

```
TC
1
2
4
5
6
8
9
10
Thank you
_
```

Activate Windows
Go to PC settings to activate Windows.

05:50 PM
19-Mar-25


Print 1..10 even no's using continue:

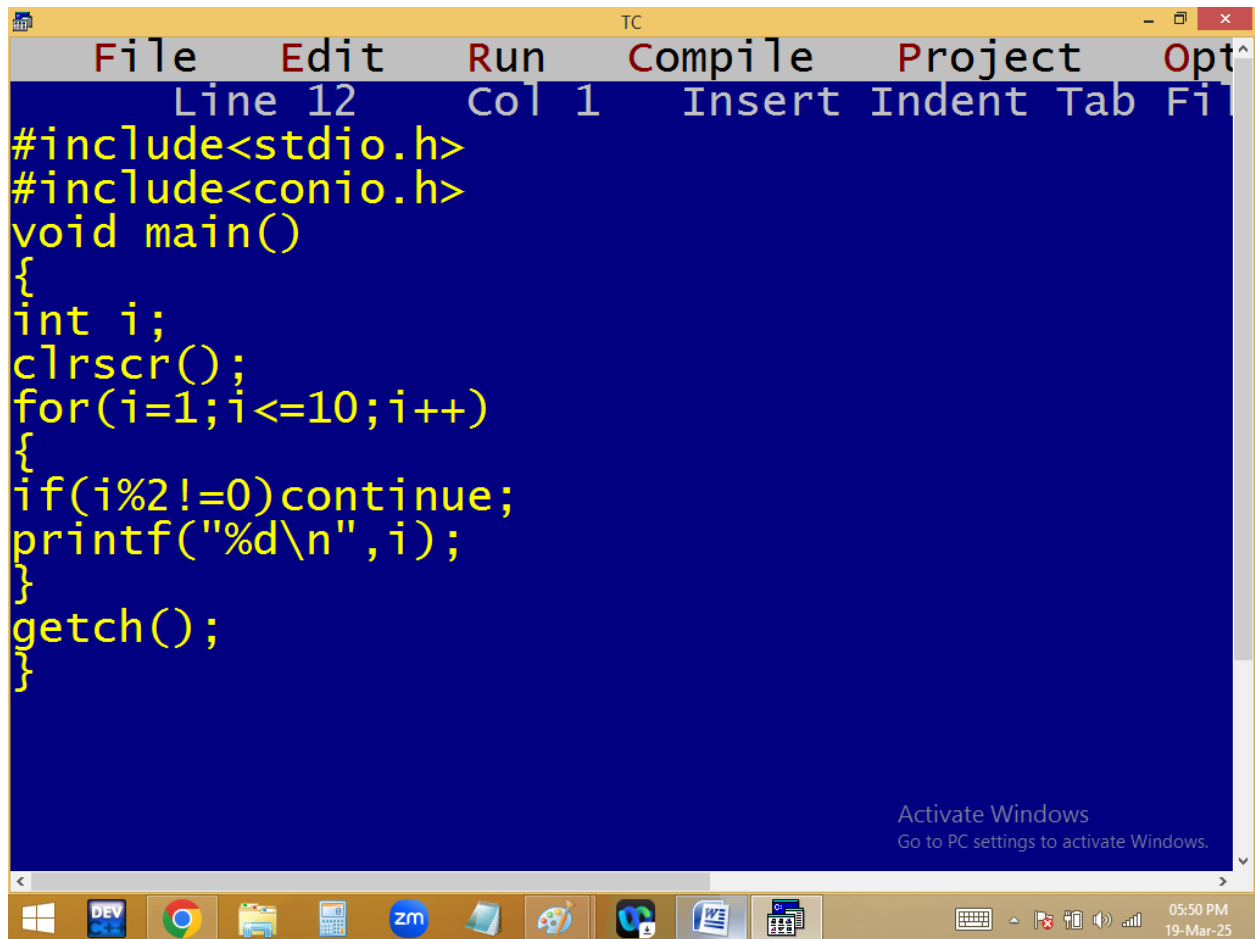


The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", and "Options". Below the menu bar, a status bar indicates "Line 12", "Col 1", and lists editing options: "Insert", "Indent", "Tab", and "Fill". The main editing area has a blue background and contains the following C code in yellow text:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i;
    clrscr();
    for(i=1;i<=10;i++)
    {
        if(i%2!=0)continue;
        printf("%d\n",i);
    }
    getch();
}
```

In the bottom right corner of the IDE window, there is a message: "Activate Windows. Go to PC settings to activate Windows." The Windows taskbar is visible at the bottom, showing icons for Windows, DEV, Chrome, File Explorer, Calculator, Zoom, and several other applications. The system tray on the right shows the date and time as "05:50 PM 19-Mar-25".

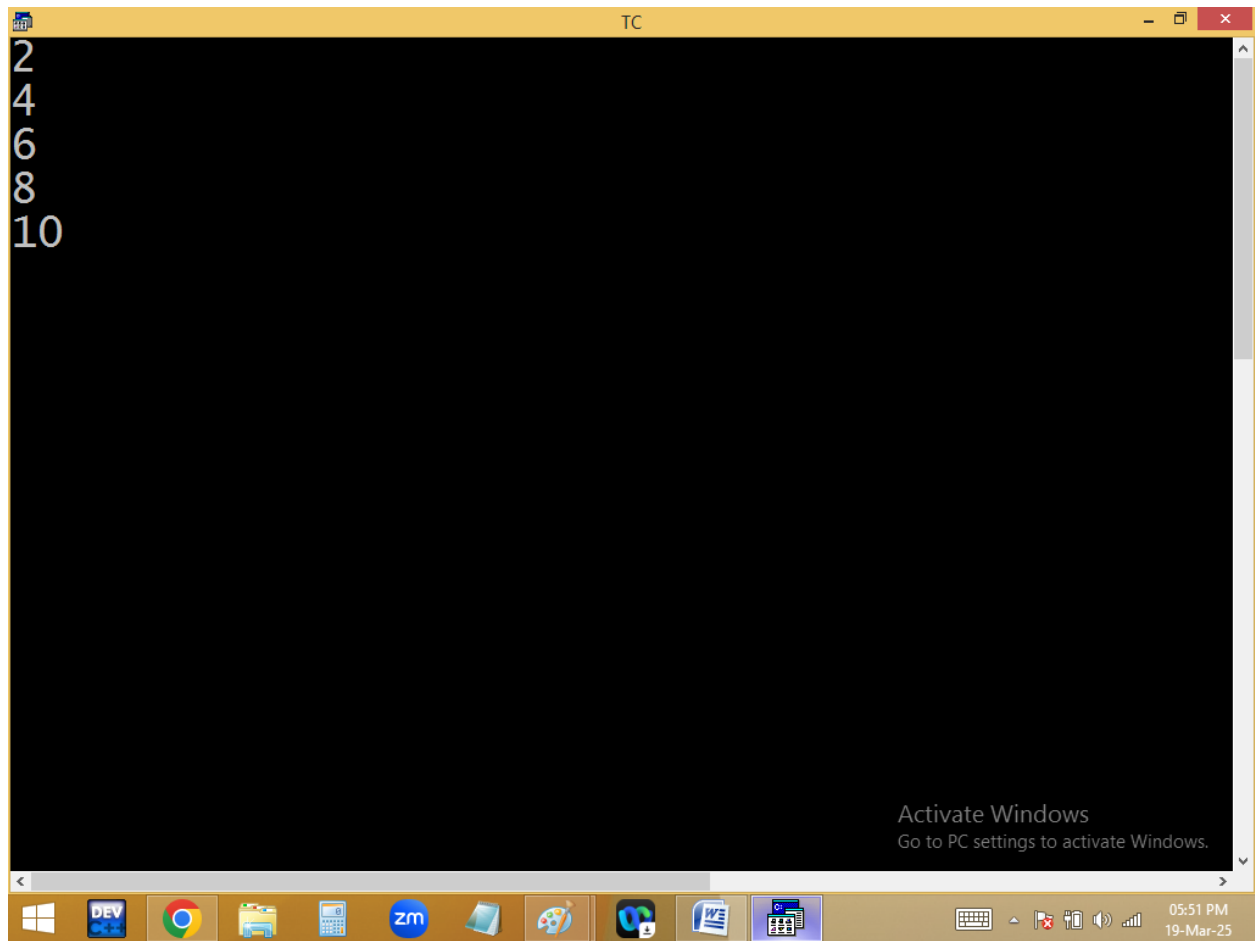

Odd no's:

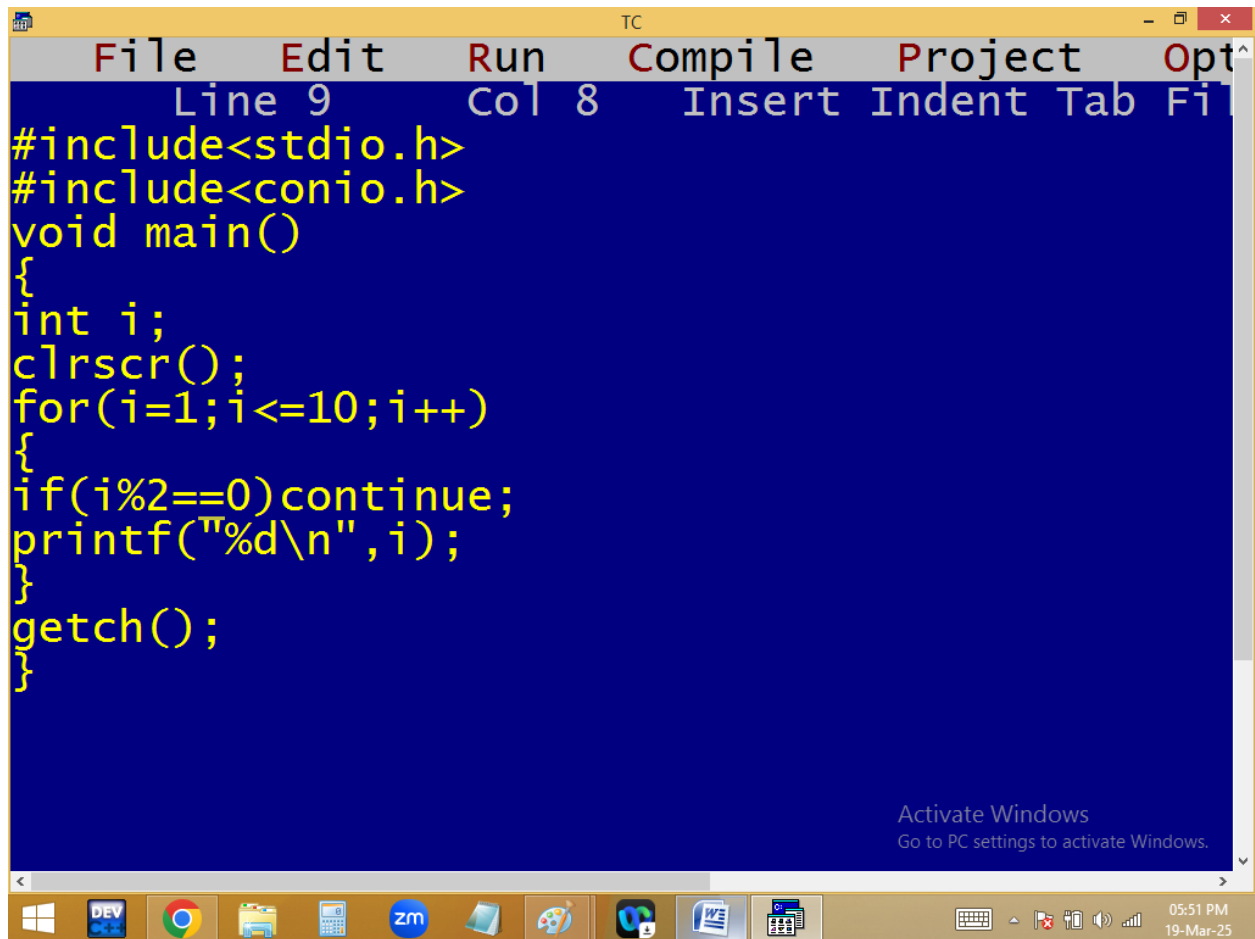

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", and "Options". Below the menu bar, a status bar indicates "Line 9", "Col 8", and lists editing options: "Insert", "Indent", "Tab", and "Fill". The main editing area has a blue background and contains the following C code in yellow text:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i;
    clrscr();
    for(i=1;i<=10;i++)
    {
        if(i%2==0)continue;
        printf("%d\n",i);
    }
    getch();
}
```

At the bottom right of the IDE window, there is a watermark that says "Activate Windows" and "Go to PC settings to activate Windows." The Windows taskbar is visible at the bottom, showing icons for Windows, DEV, Chrome, File Explorer, Calculator, Zoom, and other applications. The system clock in the bottom right corner shows "05:51 PM" and "19-Mar-25".

