



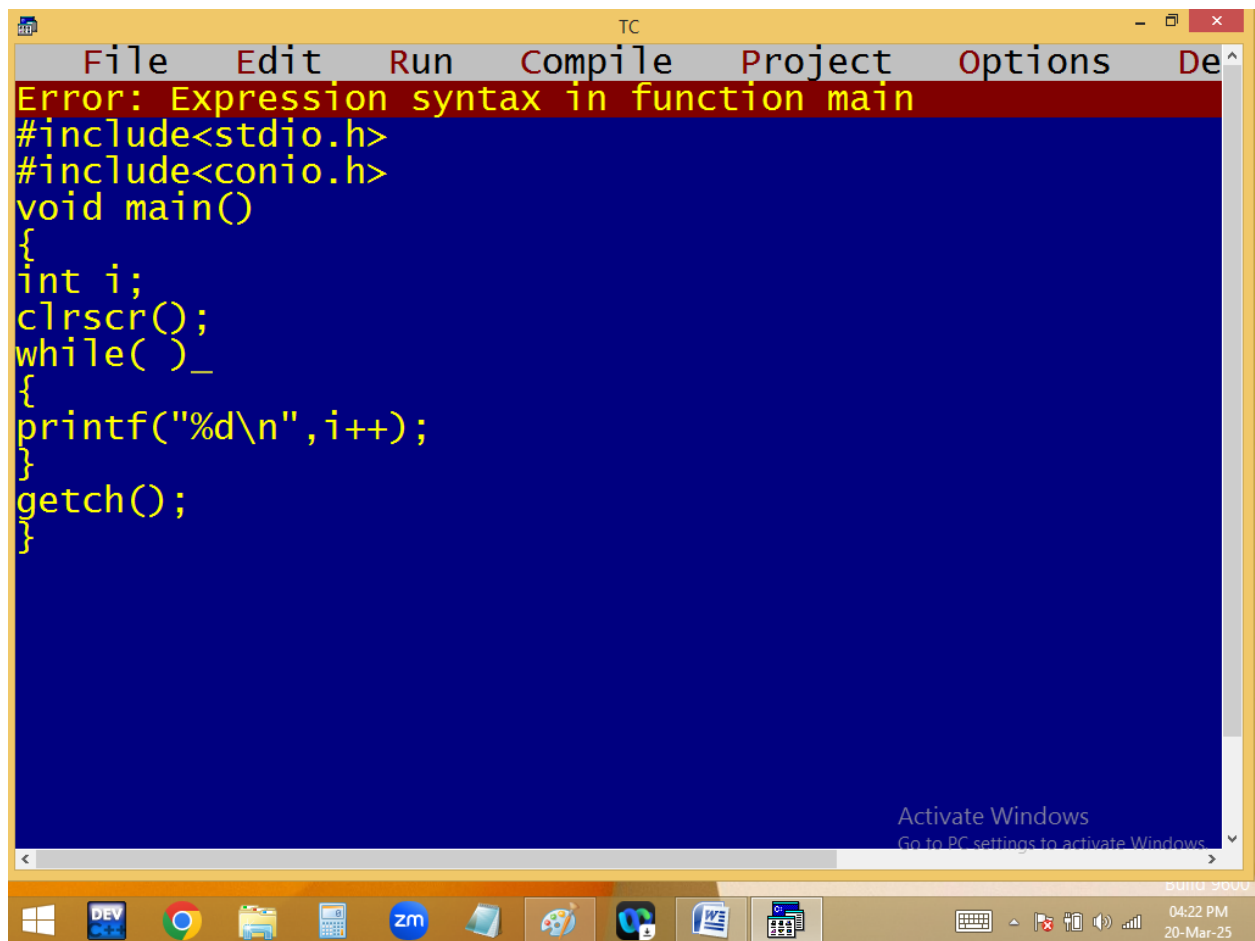

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error message banner at the top states "Error: Expression syntax in function main". The code editor has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i;
    clrscr();
    while( )_
    {
        printf("%d\n",i++);
    }
    getch();
}
```


An "Activate Windows" watermark is visible in the bottom right corner of the code editor area, with the text "Go to PC settings to activate Windows". The Windows taskbar is at the bottom, showing icons for Windows, DEV, Chrome, File Explorer, Calculator, Zoom, and other applications. The system clock in the bottom right corner shows "04:22 PM" and "20-Mar-25".

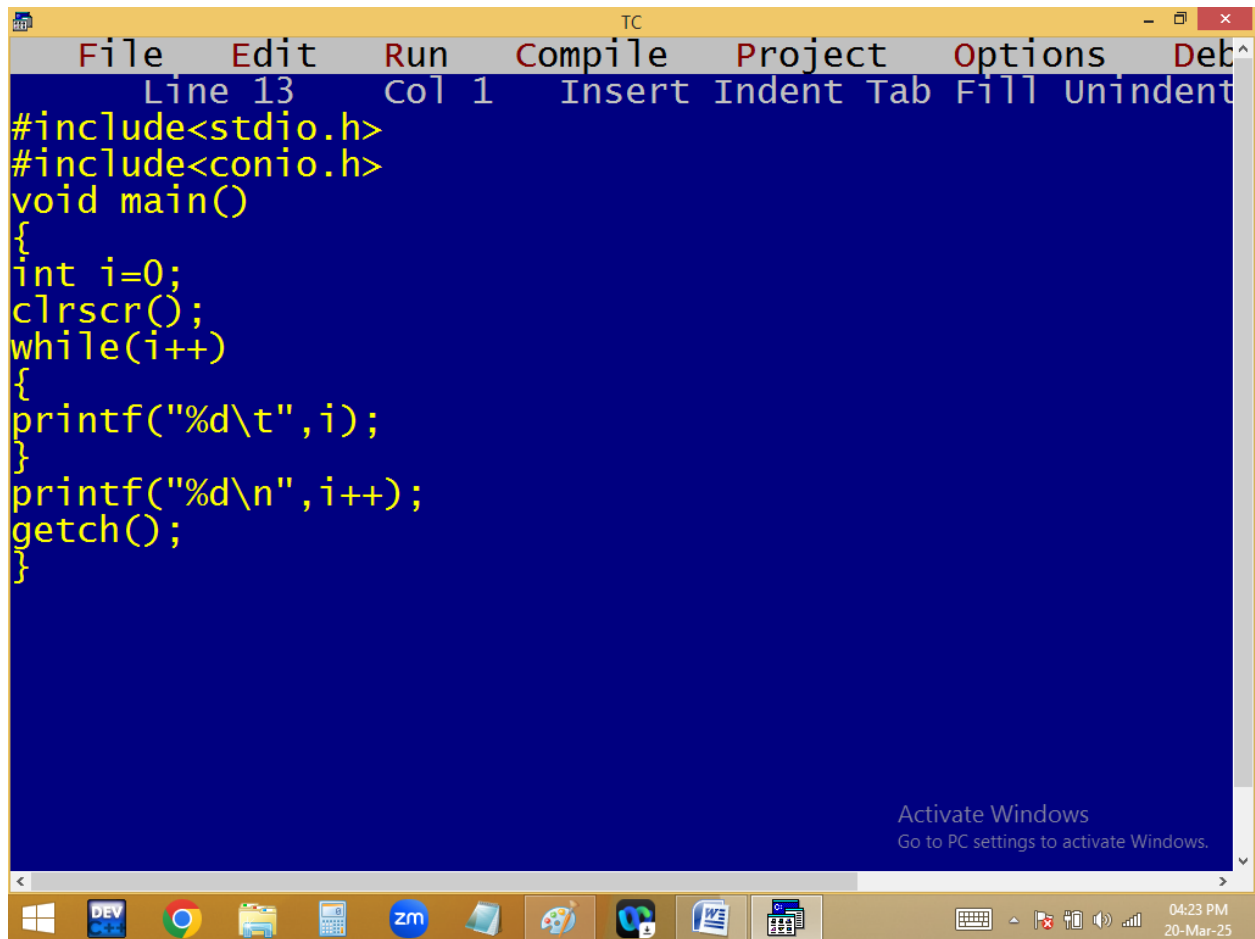


```
TC
File Edit Run Compile Project Options Debug
Line 13 Col 1 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
    int i=0;
    clrscr();
    while(i++)
    {
        printf("%d\t",i);
    }
    printf("%d\n",i++);
    getch();
}
```

Activate Windows
Go to PC settings to activate Windows.


04:23 PM
20-Mar-25

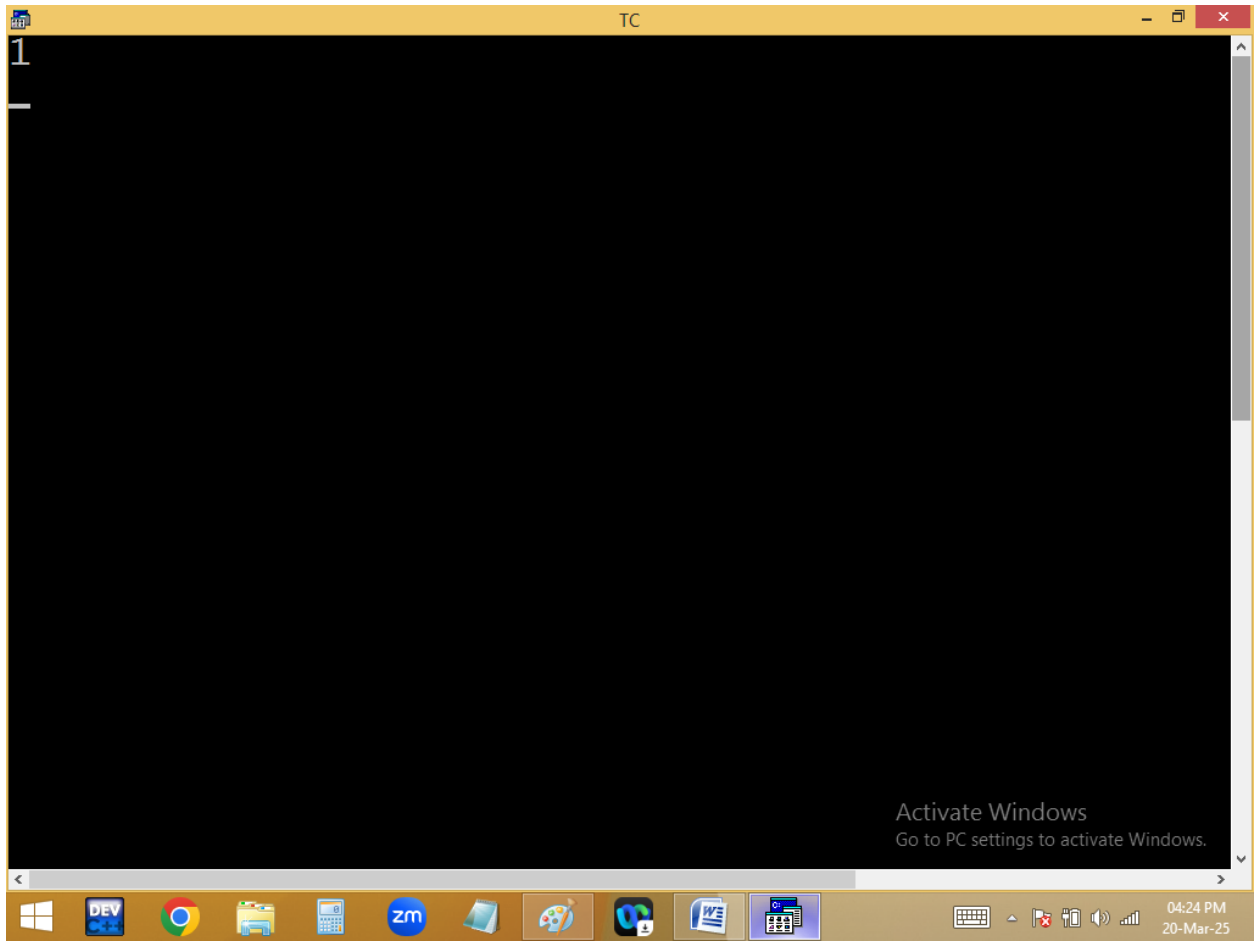

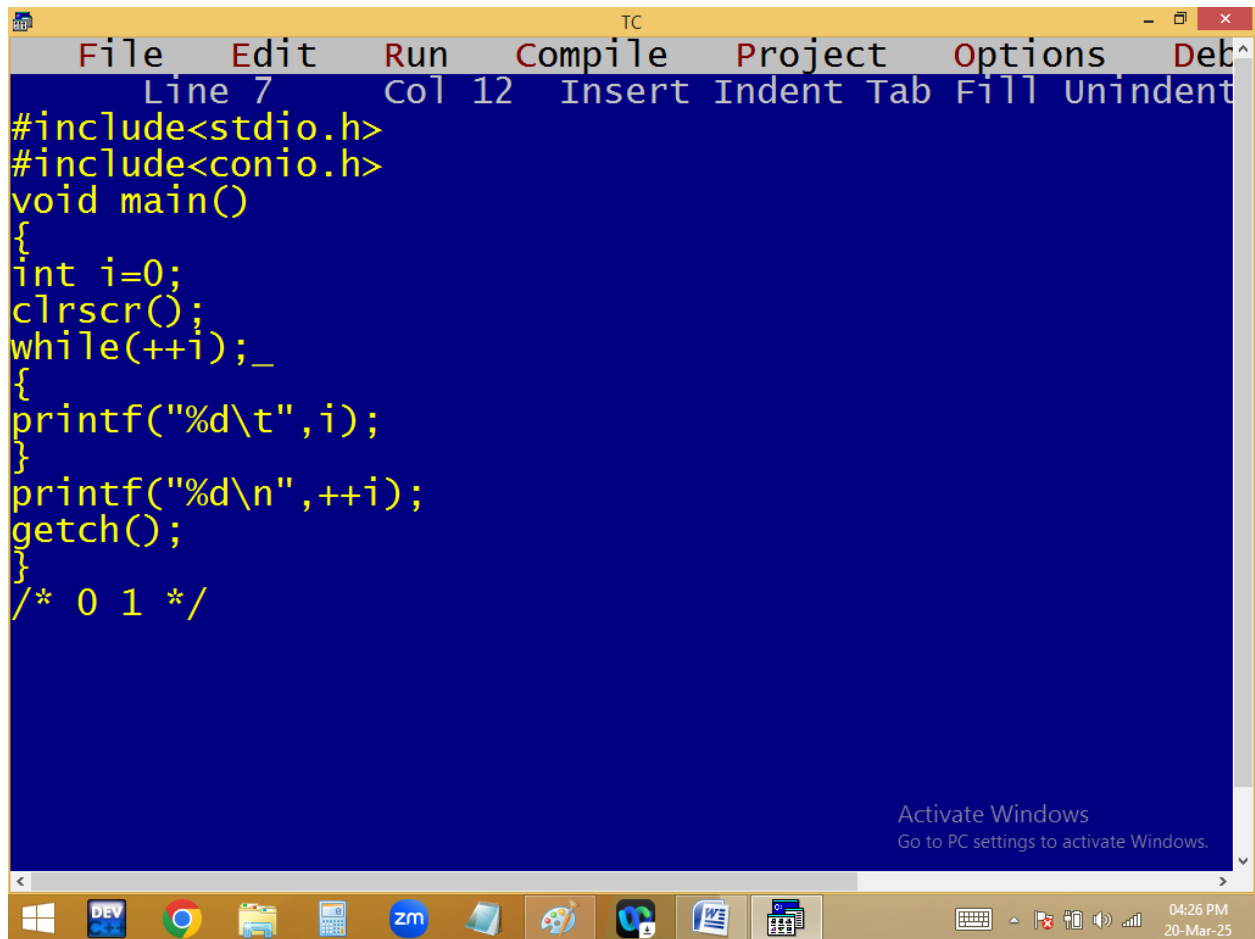


```
TC
File Edit Run Compile Project Options Debug
Line 7 Col 12 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
    int i=0;
    clrscr();
    while(++i);_
    {
        printf("%d\t",i);
    }
    printf("%d\n",++i);
    getch();
}
/* 0 1 */

Activate Windows
Go to PC settings to activate Windows.
```

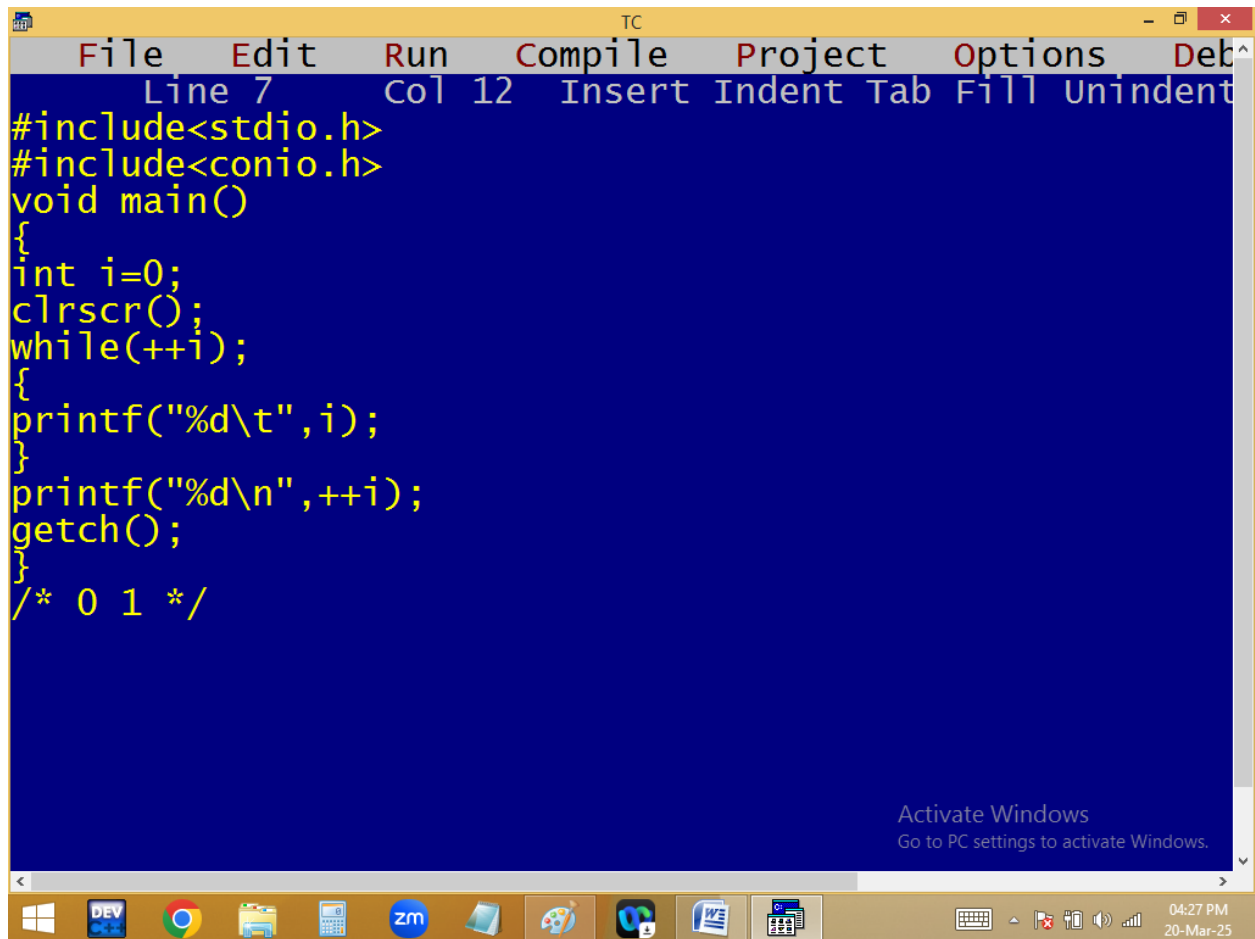


```
TC
File Edit Run Compile Project Options Debug
Line 7 Col 12 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
    int i=0;
    clrscr();
    while(++i);
    {
        printf("%d\t",i);
    }
    printf("%d\n",++i);
    getch();
}
/* 0 1 */

Activate Windows
Go to PC settings to activate Windows.
```

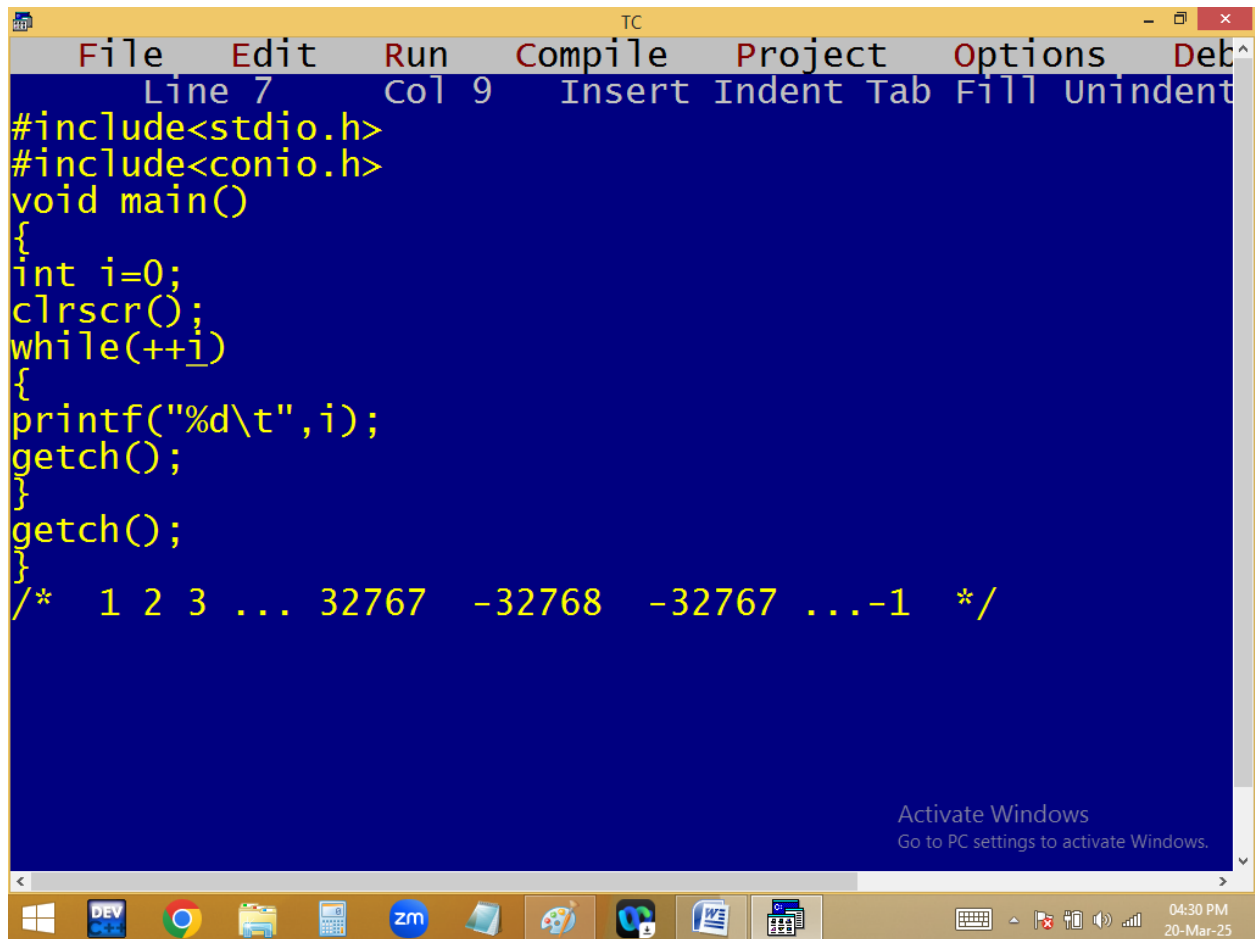


```
TC
File Edit Run Compile Project Options Debug
Line 7 Col 9 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
    int i=0;
    clrscr();
    while(++i)
    {
        printf("%d\t",i);
        getch();
    }
    getch();
}
/* 1 2 3 ... 32767 -32768 -32767 ...-1 */

Activate Windows
Go to PC settings to activate Windows.
```

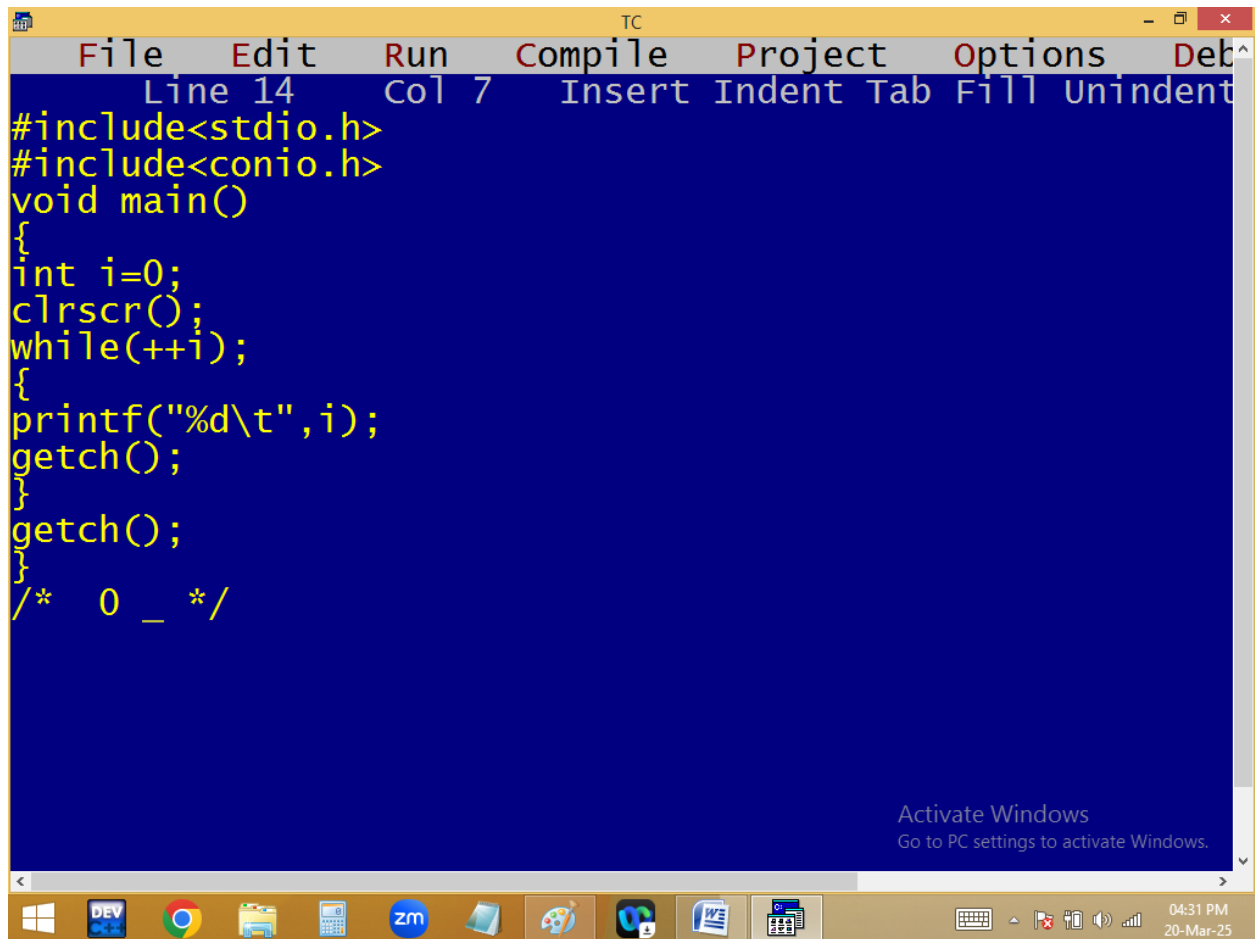

```
TC
File Edit Run Compile Project Options Debug
Line 14 Col 7 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
    int i=0;
    clrscr();
    while(++i);
    {
        printf("%d\t",i);
        getch();
    }
    getch();
}
/* 0 _ */


Activate Windows
Go to PC settings to activate Windows.
```

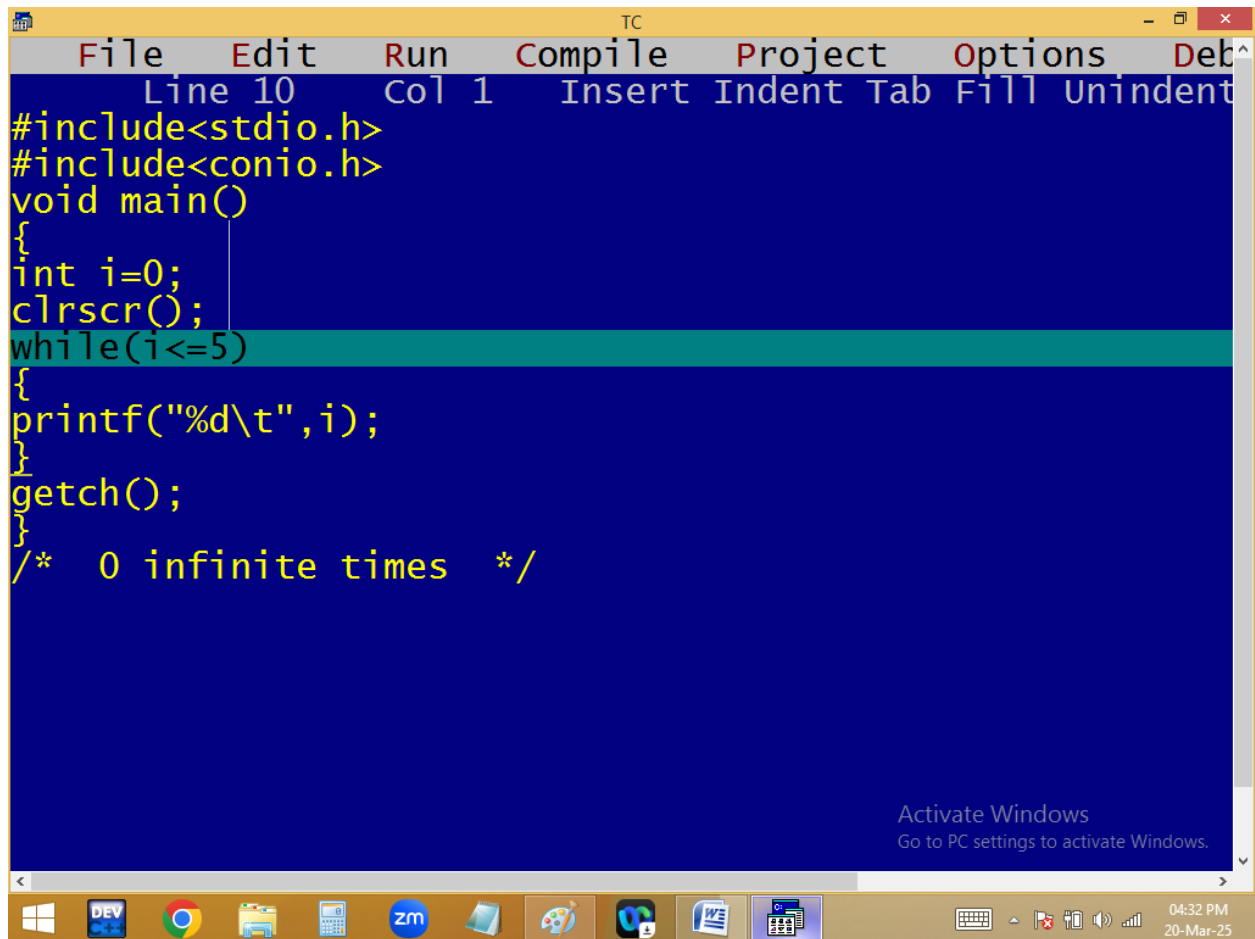

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 10", "Col 1", and lists editing options: "Insert", "Indent", "Tab", "Fill", and "Unindent". The code editor has a dark blue background with yellow text. The code is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i=0;
    clrscr();
    while(i<=5)
    {
        printf("%d\t",i);
    }
    getch();
}
/* 0 infinite times */
```


The line "while(i<=5)" is highlighted with a teal background. In the bottom right corner of the IDE, there is a message: "Activate Windows. Go to PC settings to activate Windows." The Windows taskbar is visible at the bottom, showing icons for Windows, DEV, Chrome, File Explorer, Calculator, Zoom, and other applications. The system clock in the bottom right corner shows "04:32 PM" and "20-Mar-25".

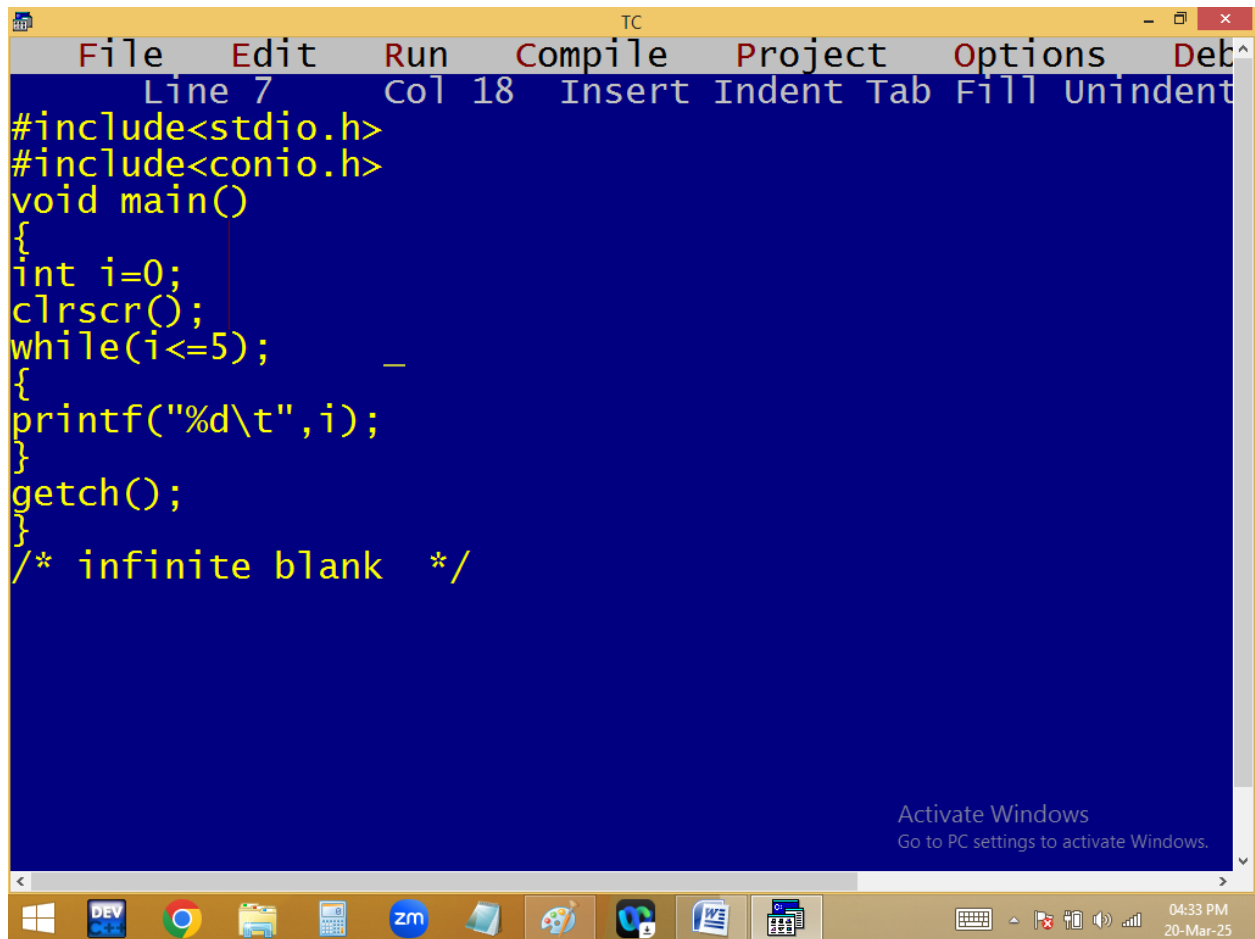

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 7", "Col 18", and lists keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", and "Unindent". The main editing area has a dark blue background with yellow text. The code is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i=0;
    clrscr();
    while(i<=5);
    {
        printf("%d\t",i);
    }
    getch();
}
/* infinite blank */
```


An "Activate Windows" watermark is visible in the bottom right corner of the IDE window, stating "Go to PC settings to activate Windows." The Windows taskbar is at the bottom, showing icons for Windows, DEV, Chrome, File Explorer, Calculator, Zoom, and other applications. The system clock in the bottom right corner shows "04:33 PM" and "20-Mar-25".

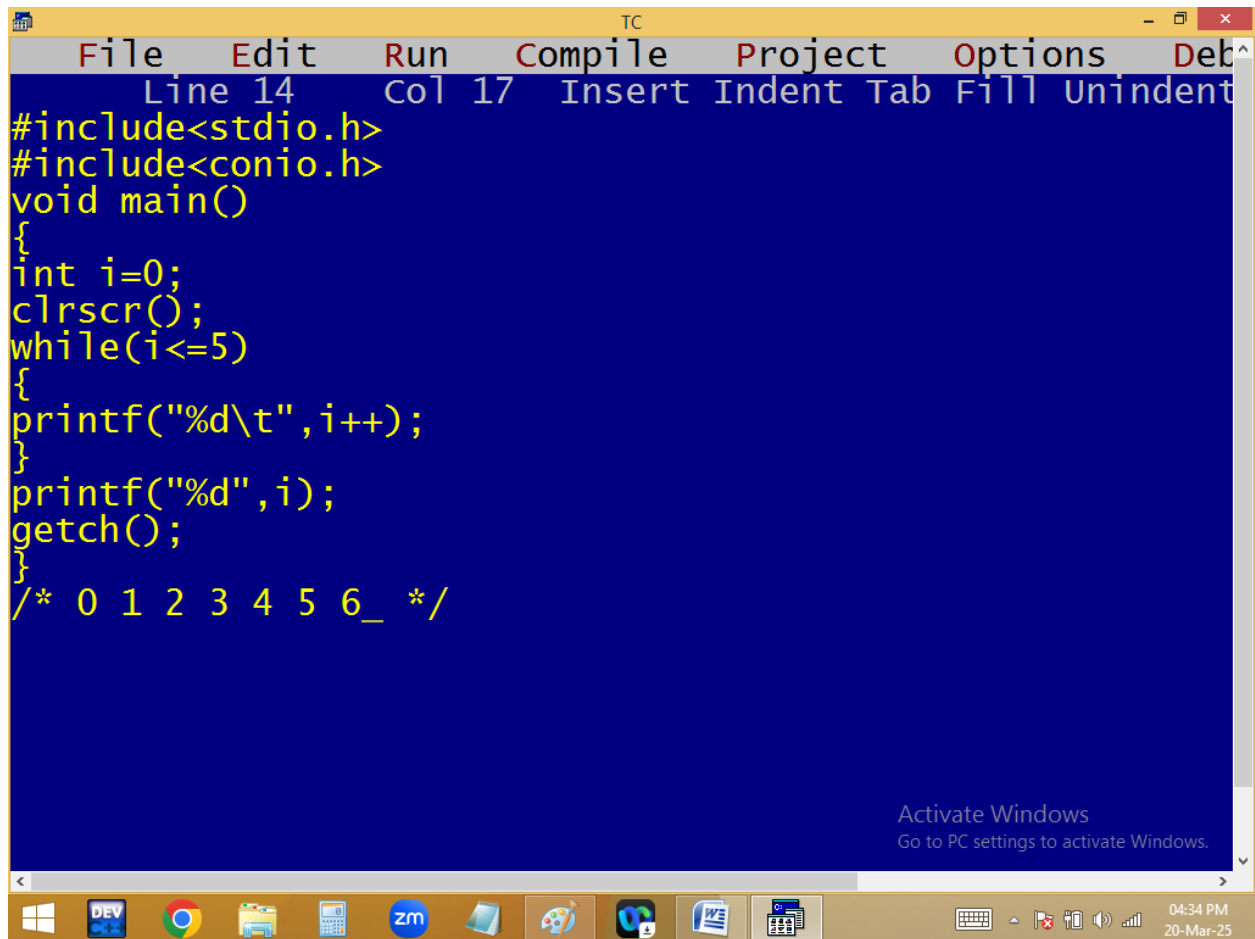

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 14", "Col 17", and lists editing actions: "Insert", "Indent", "Tab", "Fill", and "Unindent". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i=0;
    clrscr();
    while(i<=5)
    {
        printf("%d\t",i++);
    }
    printf("%d",i);
    getch();
}
/* 0 1 2 3 4 5 6_ */
```


An "Activate Windows" watermark is visible in the bottom right corner of the IDE window, stating "Go to PC settings to activate Windows." The Windows taskbar is at the bottom, showing icons for Windows, DEV, Chrome, File Explorer, Calculator, Zoom, and other applications. The system clock in the bottom right corner shows "04:34 PM" and "20-Mar-25".

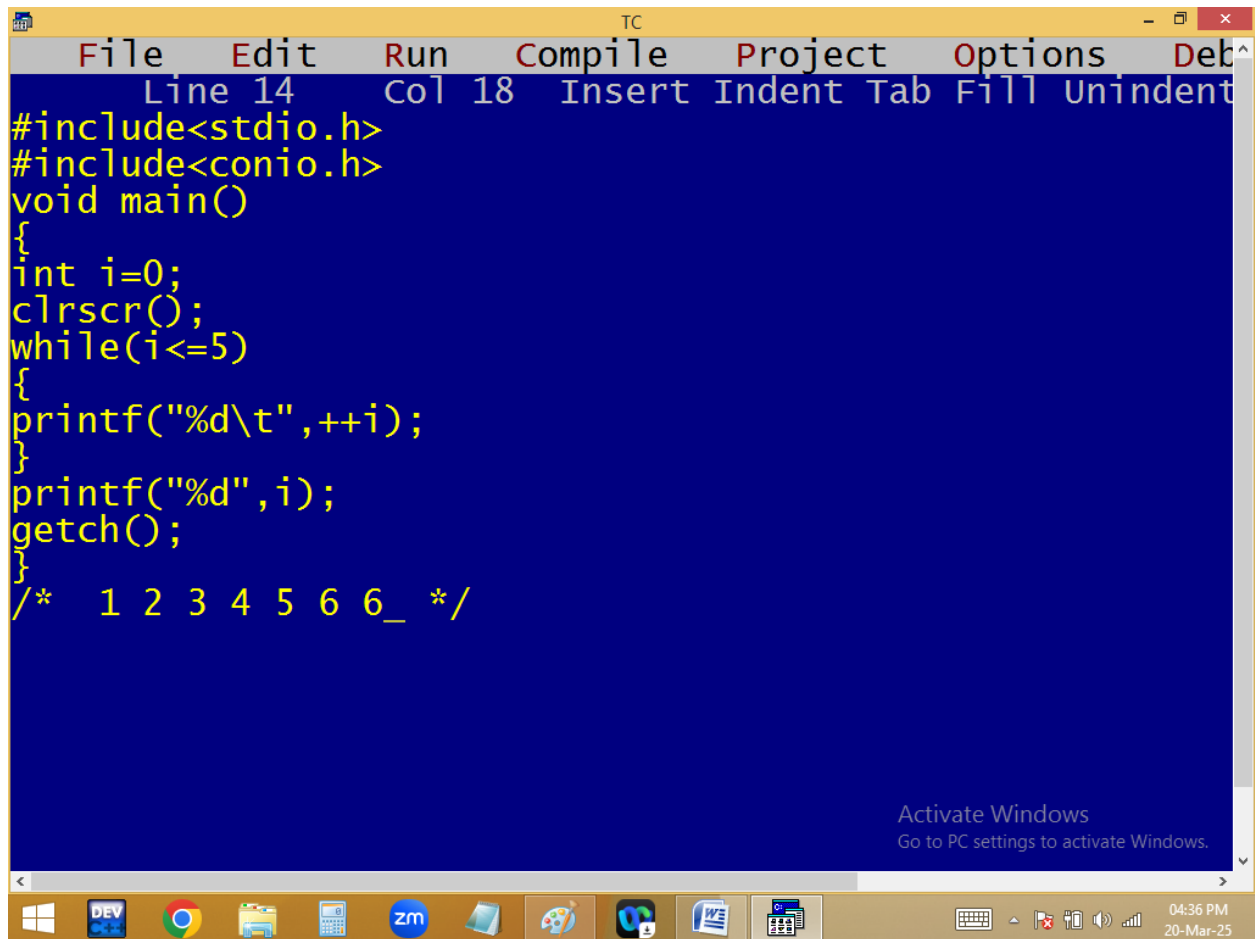

```
TC
File Edit Run Compile Project Options Debug
Line 14 Col 18 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while(i<=5)
{
printf("%d\t",++i);
}
printf("%d",i);
getch();
}
/* 1 2 3 4 5 6 6_ */


Activate Windows
Go to PC settings to activate Windows.

04:36 PM
20-Mar-25
```

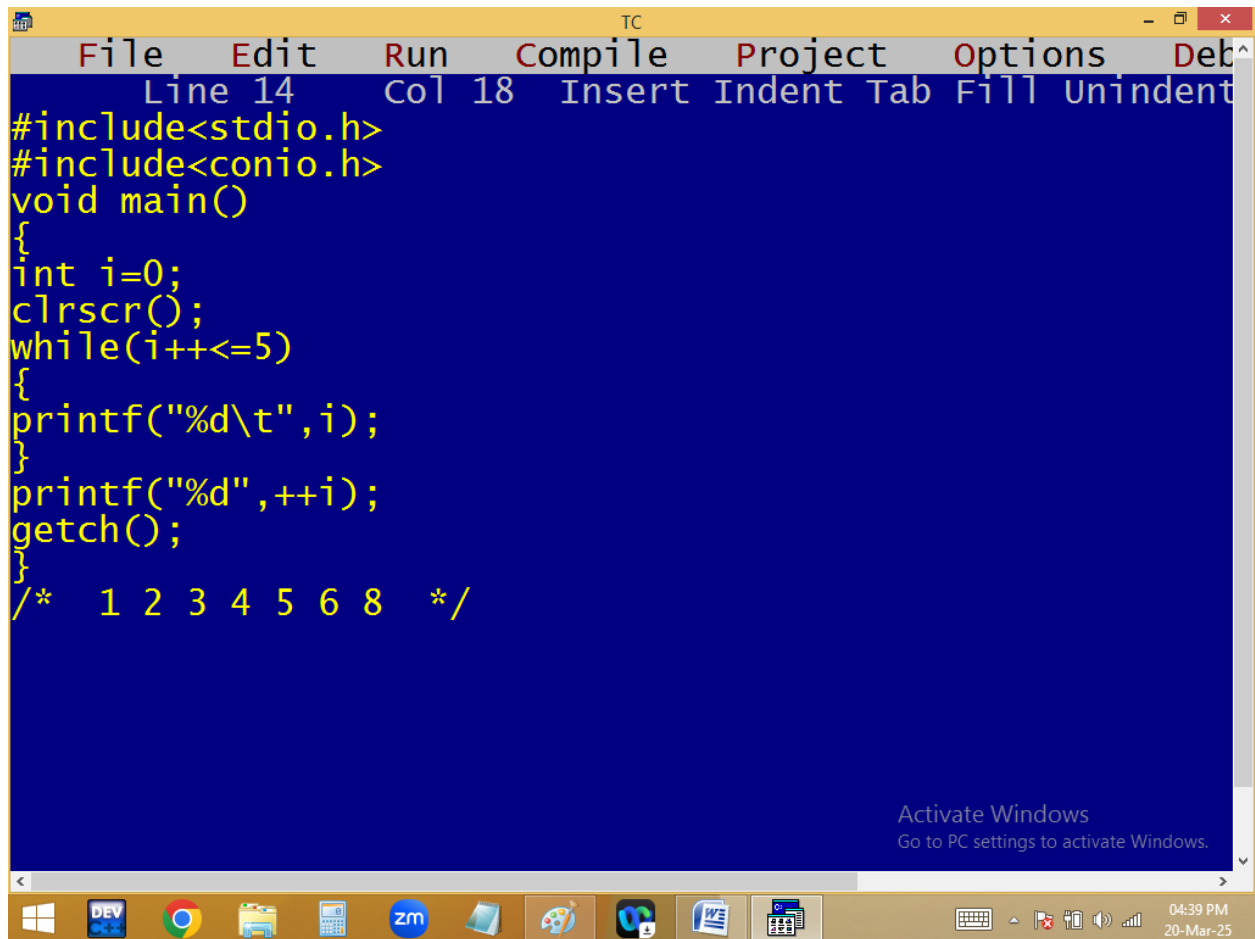


```
TC
File Edit Run Compile Project Options Debug
Line 14 Col 18 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while(i++<=5)
{
printf("%d\t",i);
}
printf("%d",++i);
getch();
}
/* 1 2 3 4 5 6 8 */


Activate Windows
Go to PC settings to activate Windows.
```

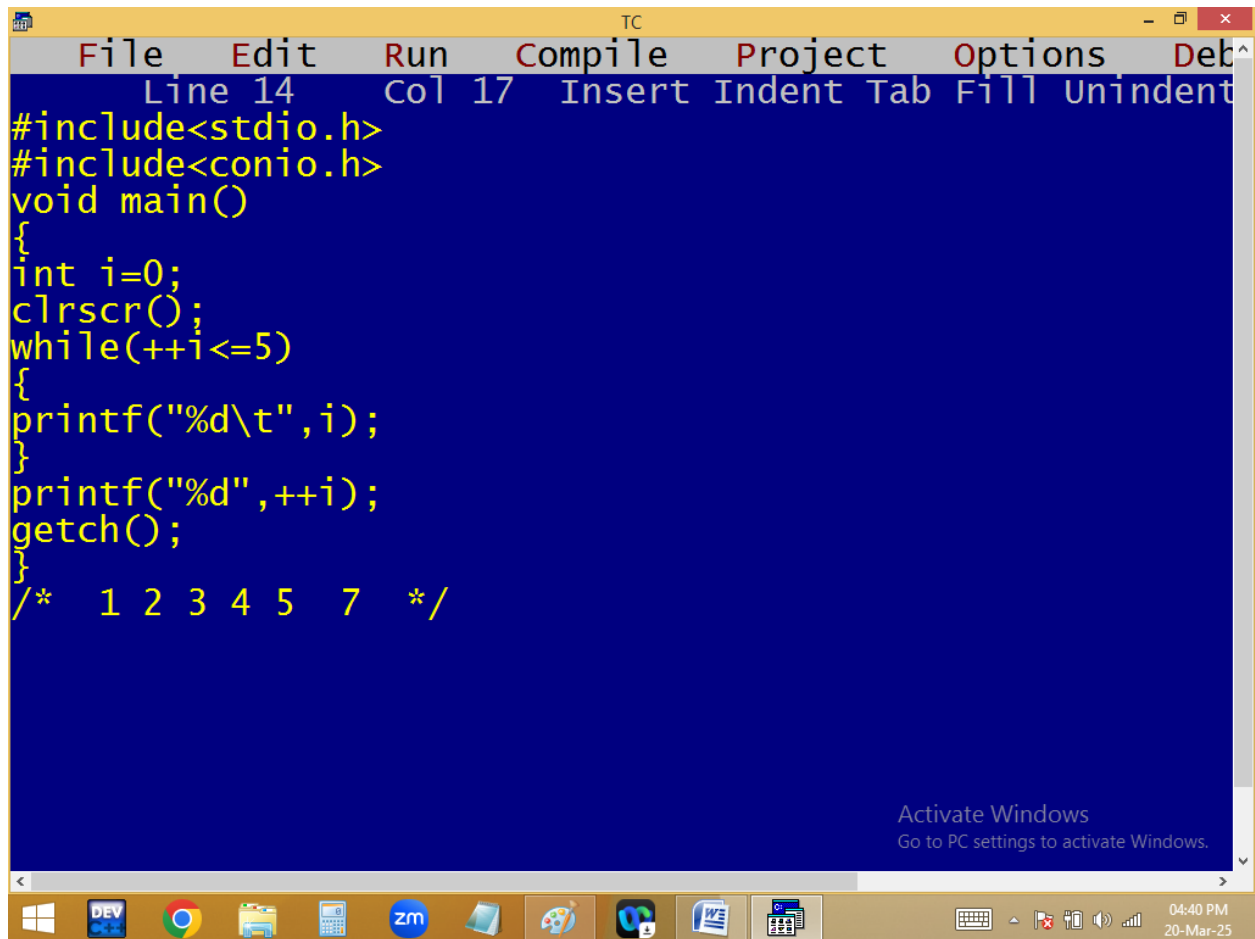

```
TC
File Edit Run Compile Project Options Debug
Line 14 Col 17 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while(++i<=5)
{
printf("%d\t",i);
}
printf("%d",++i);
getch();
}
/* 1 2 3 4 5 7 */


Activate Windows
Go to PC settings to activate Windows.
```

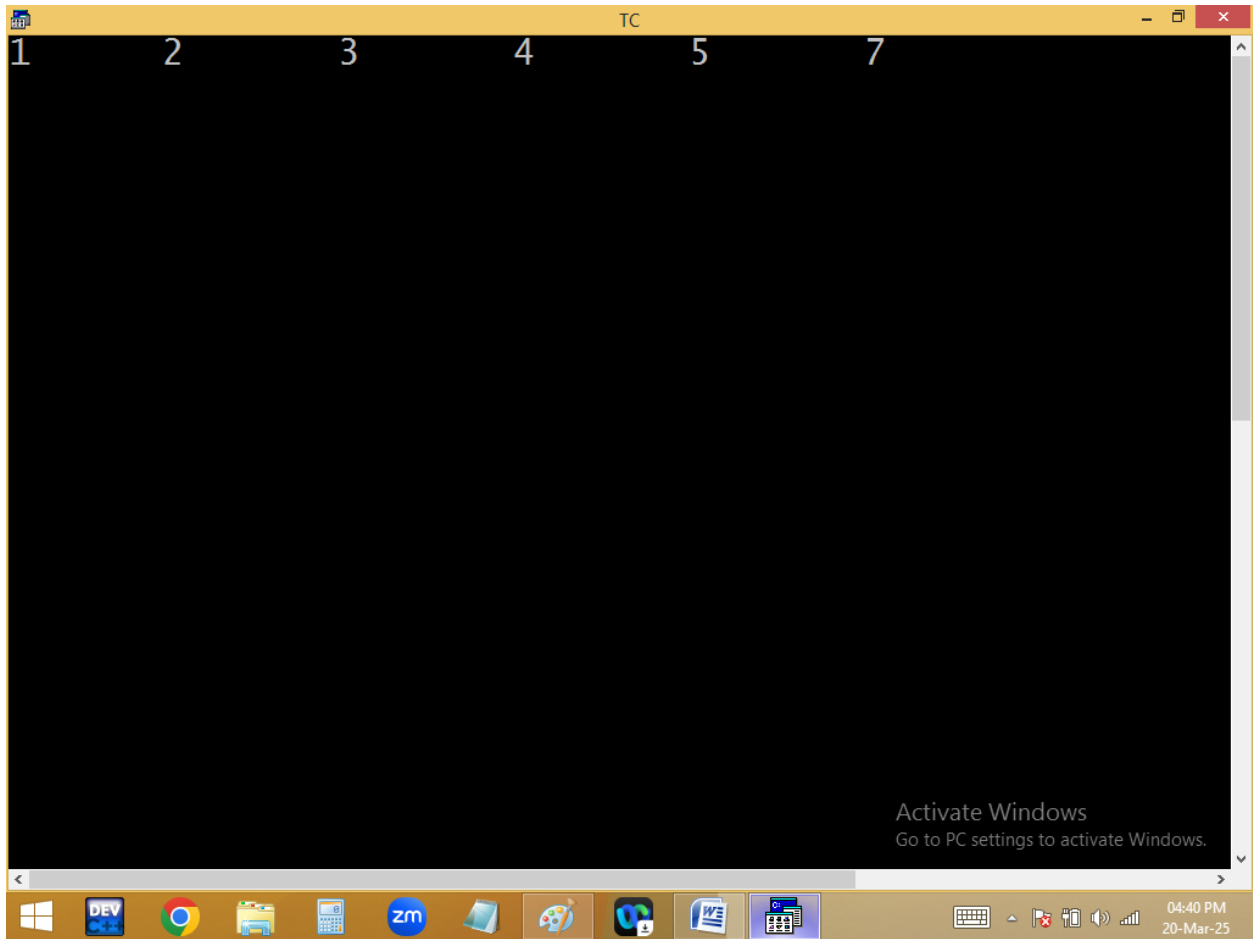

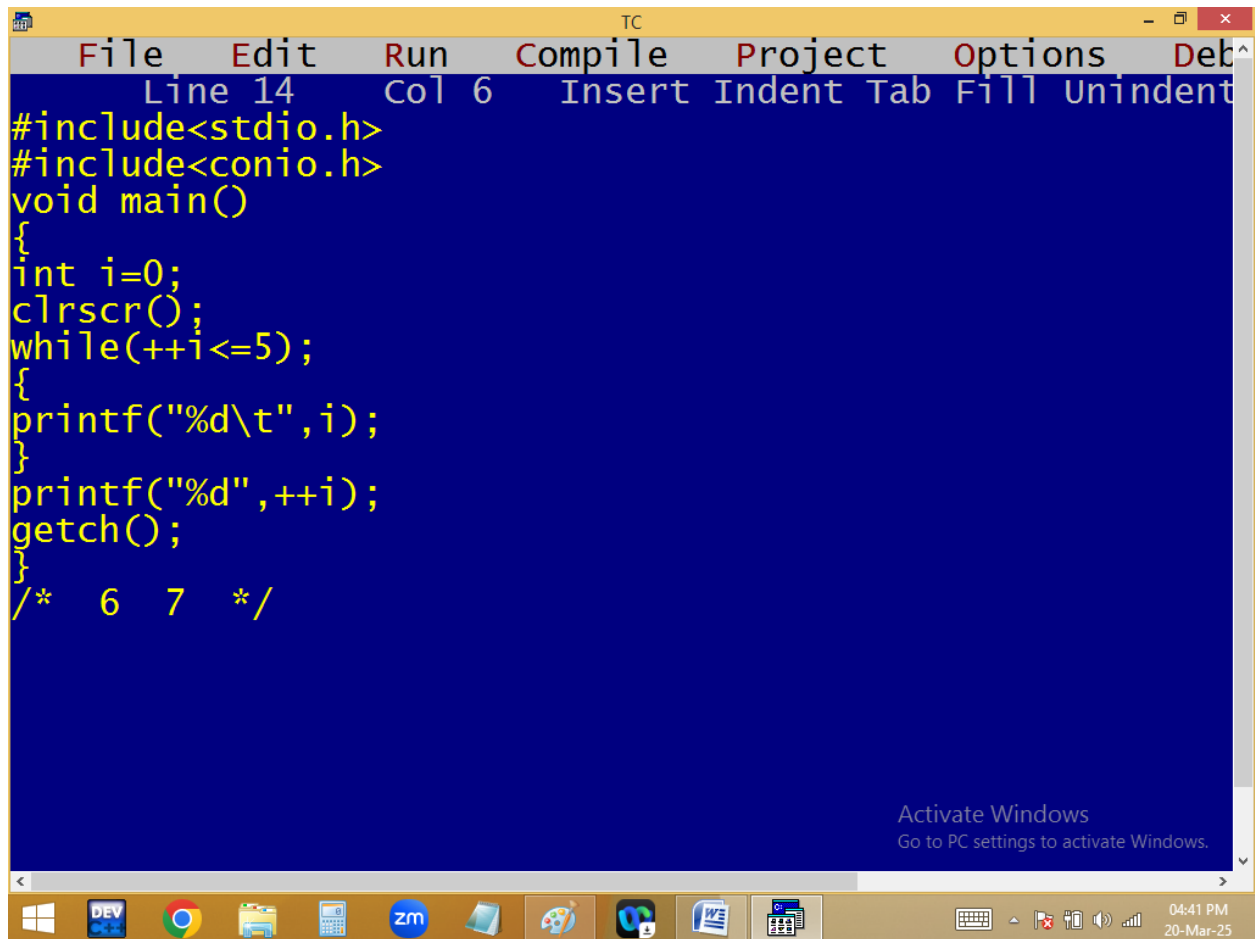


```
TC
File Edit Run Compile Project Options Debug
Line 14 Col 6 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while(++i<=5);
{
printf("%d\t",i);
}
printf("%d",++i);
getch();
}
/* 6 7 */

Activate Windows
Go to PC settings to activate Windows.
```

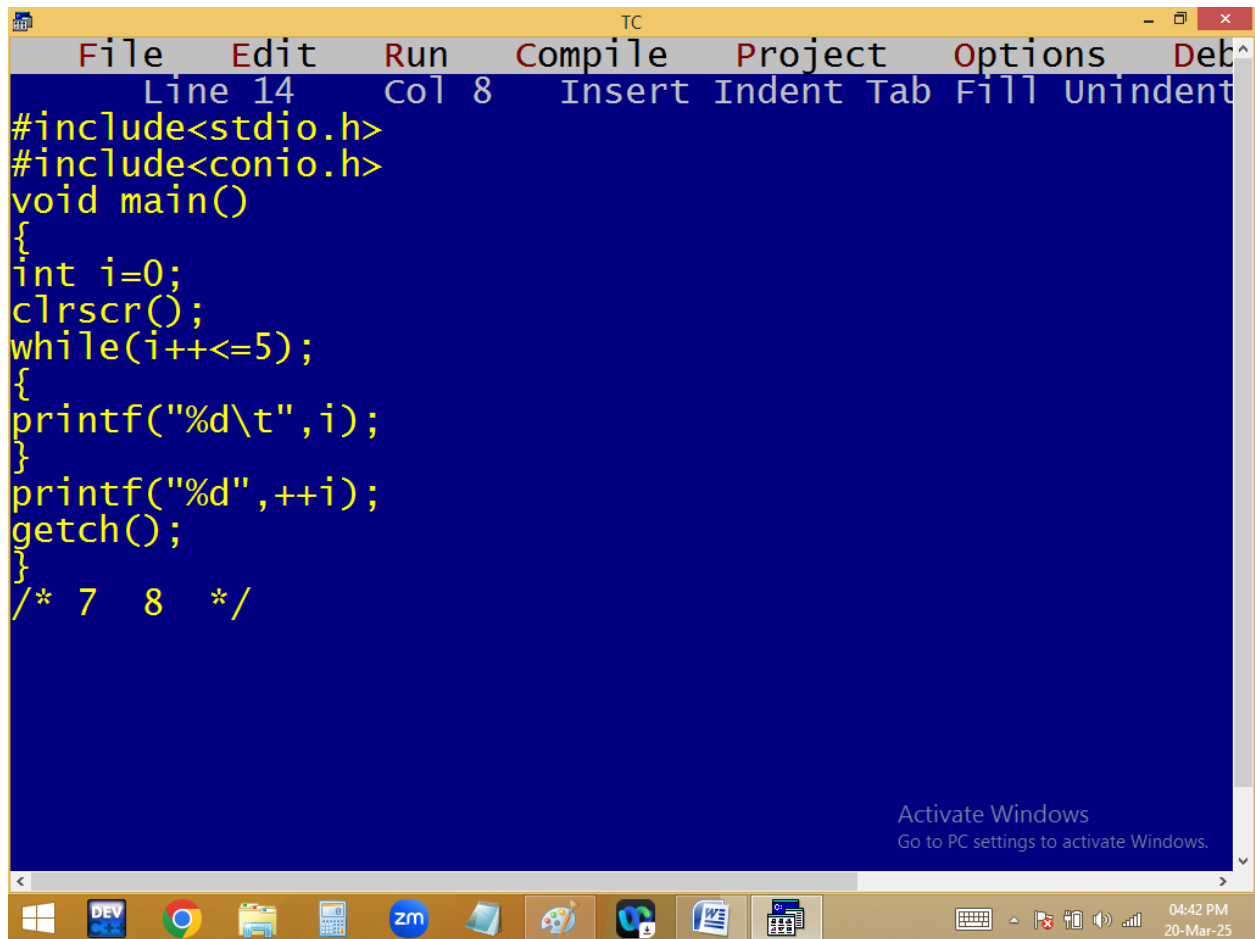

```
TC
File Edit Run Compile Project Options Debug
Line 14 Col 8 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
    int i=0;
    clrscr();
    while(i++<=5);
    {
        printf("%d\t",i);
    }
    printf("%d",++i);
    getch();
}
/* 7 8 */


Activate Windows
Go to PC settings to activate Windows.
```

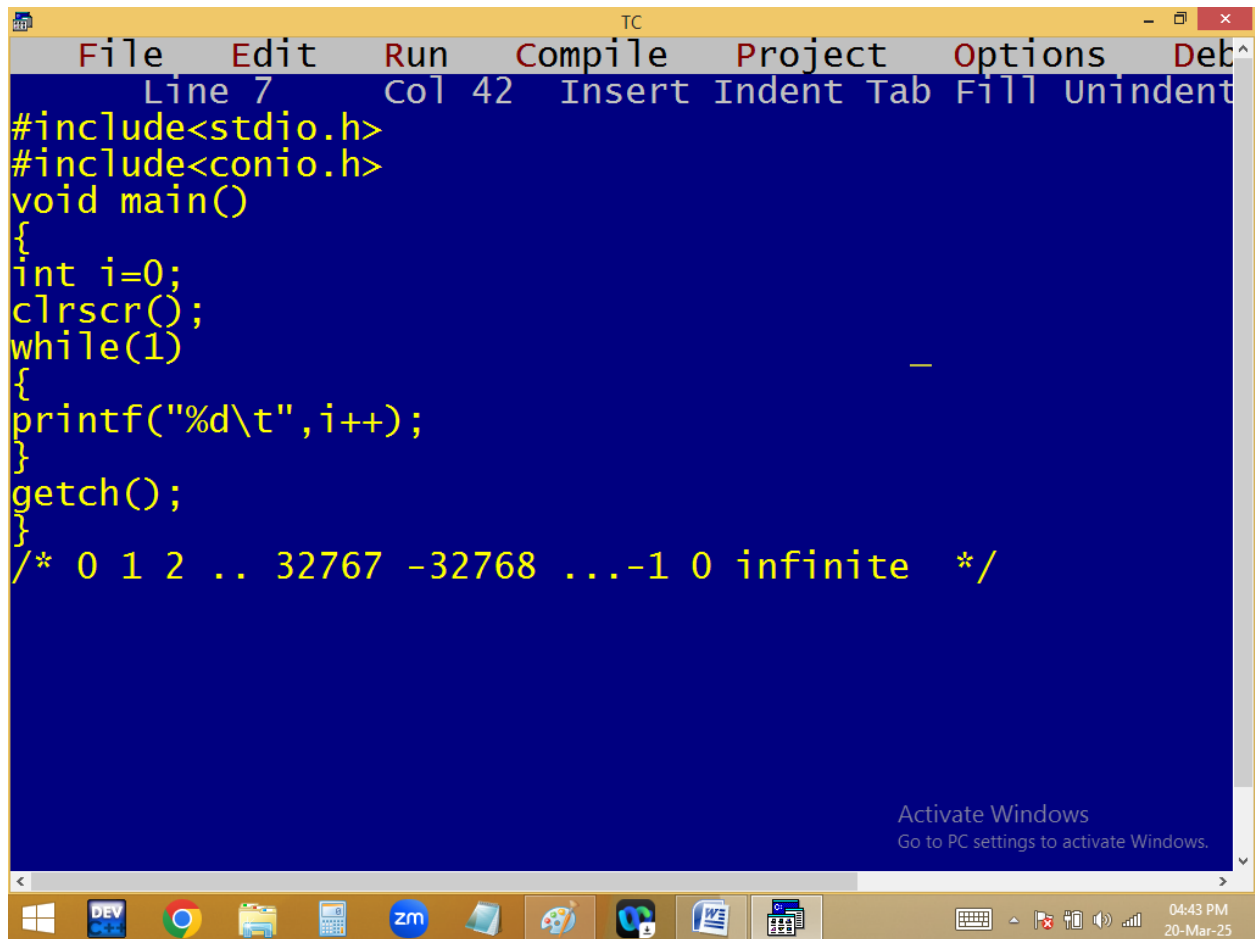The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 7", "Col 42", and lists keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", and "Unindent". The main editing area has a blue background with yellow text. The code is as follows:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i=0;
    clrscr();
    while(1)
    {
        printf("%d\t",i++);
    }
    getch();
}
/* 0 1 2 .. 32767 -32768 ...-1 0 infinite */
```

At the bottom right of the window, there is a message: "Activate Windows Go to PC settings to activate Windows." The Windows taskbar is visible at the bottom, showing icons for Windows, DEV, Chrome, File Explorer, Calculator, Zoom, and other applications. The system clock in the bottom right corner shows "04:43 PM" and "20-Mar-25".

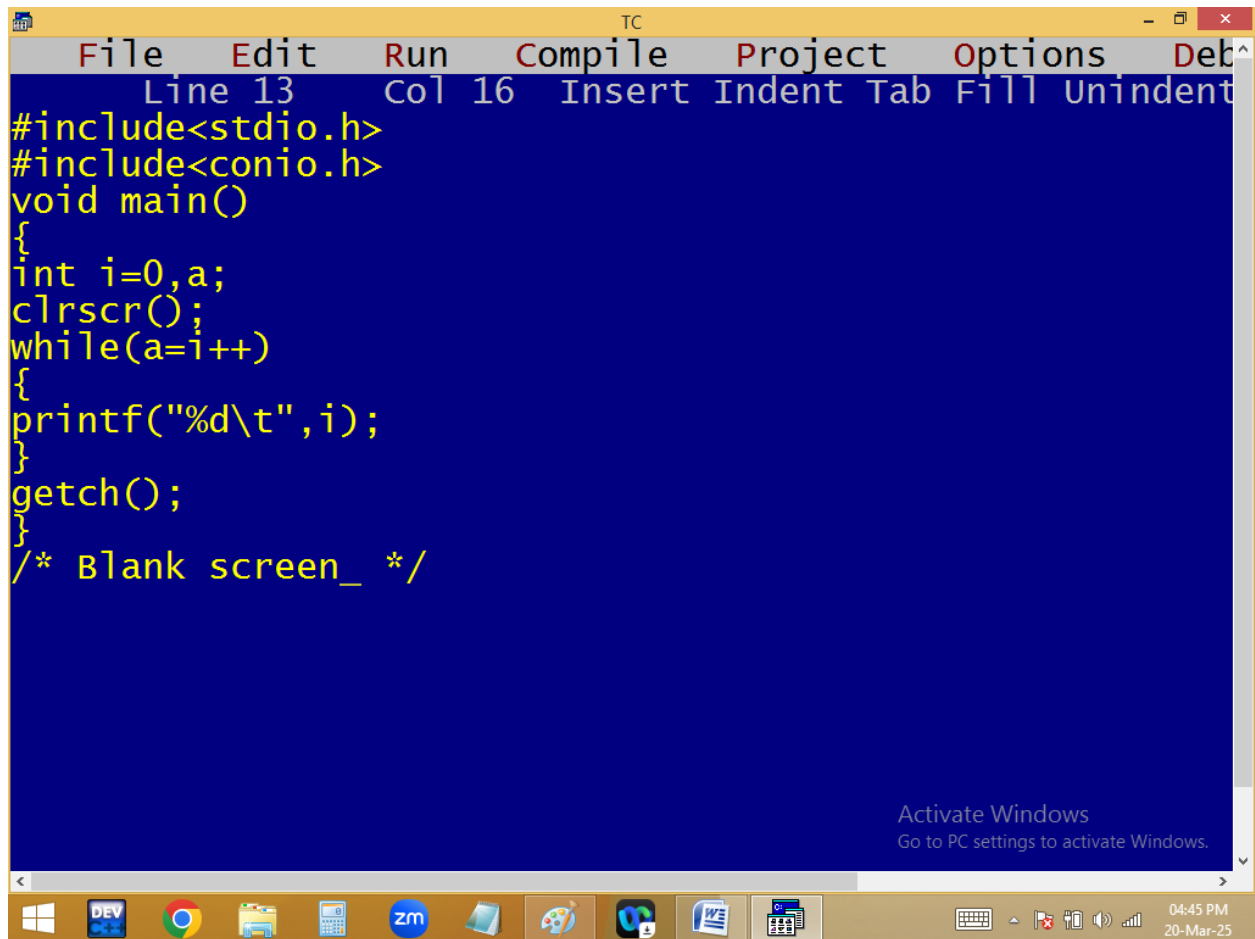

The image shows a screenshot of a Turbo C++ (TC) IDE window. The window has a yellow title bar with the text "TC" and standard window controls. The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 13", "Col 16", and lists editing options: "Insert", "Indent", "Tab", "Fill", and "Unindent". The main editing area has a blue background and contains the following C code:


```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i=0,a;
    clrscr();
    while(a=i++)
    {
        printf("%d\t",i);
    }
    getch();
}
/* Blank screen_ */
```


At the bottom right of the editing area, there is a watermark that says "Activate Windows" and "Go to PC settings to activate Windows." The Windows taskbar is visible at the bottom, showing icons for Windows, DEV, Chrome, File Explorer, Calculator, Zoom, and other applications. The system tray on the right shows the time as 04:45 PM on 20-Mar-25.

```
TC
File Edit Run Compile Project Options Debug
Line 14 Col 1 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while(i<=printf("Indian"))
{
printf("%d\\n",i++);
}
printf("%d",i);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

04:48 PM
20-Mar-25

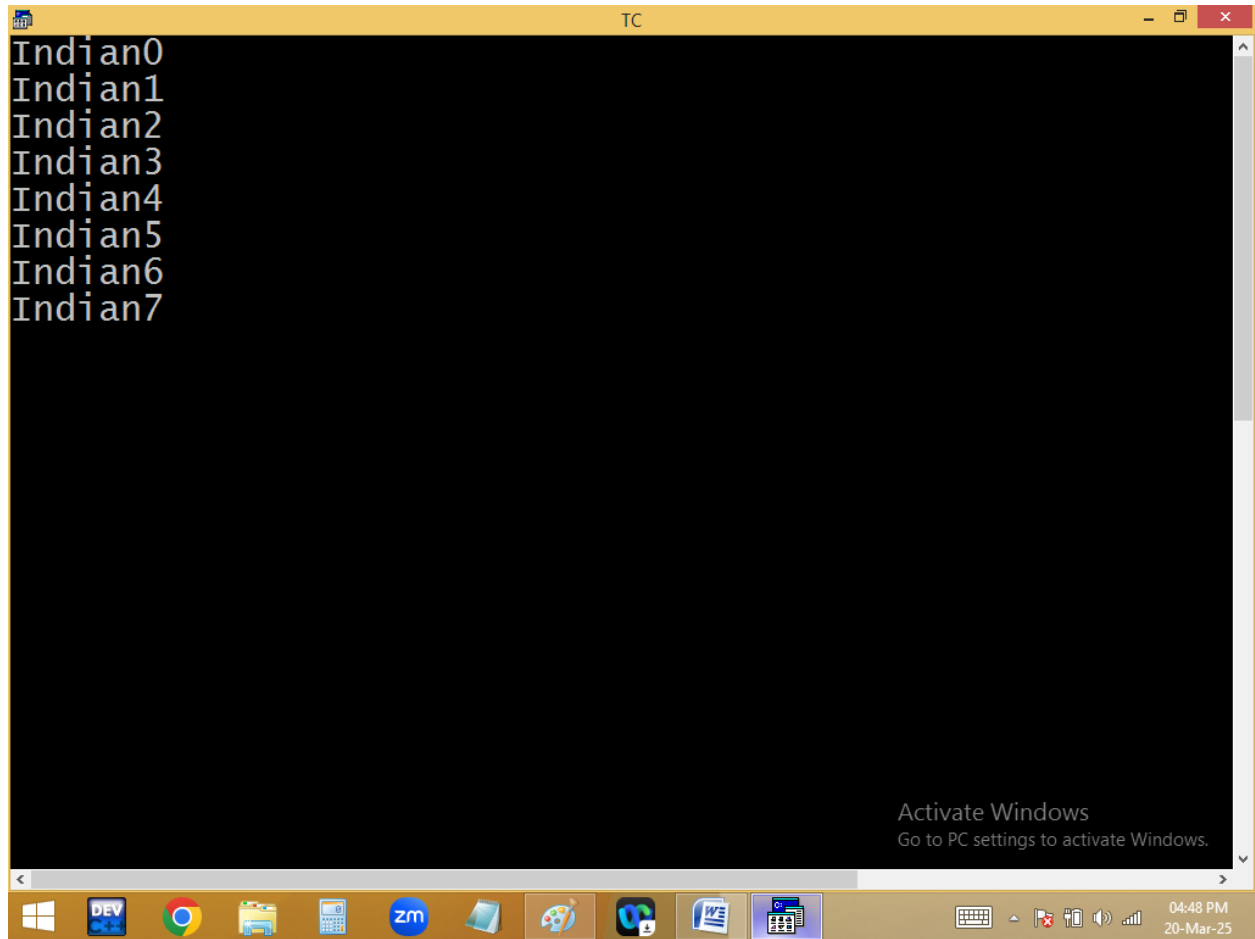


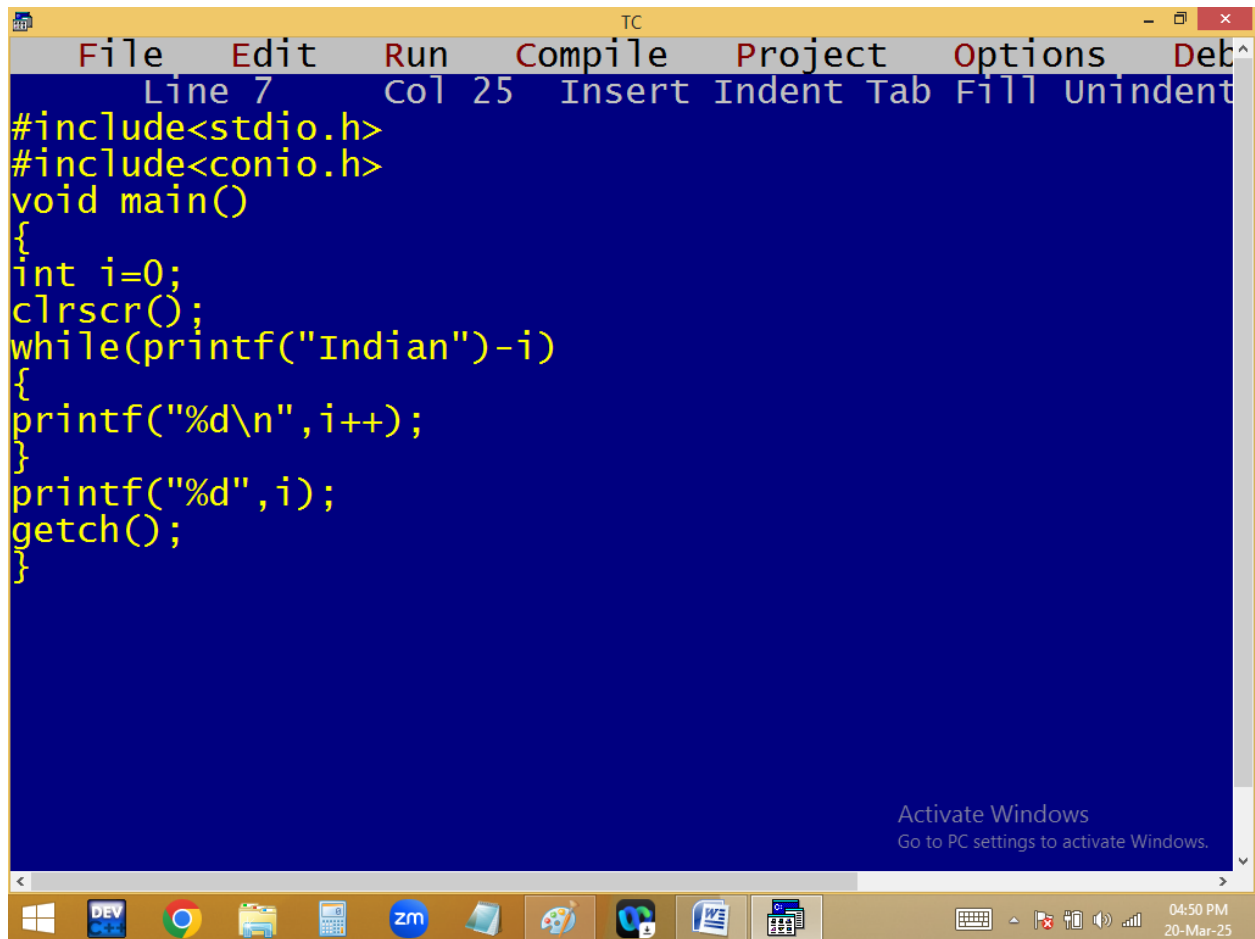


```
TC
File Edit Run Compile Project Options Deb
Line 7 Col 25 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while(printf("Indian")-i)
{
printf("%d\n",i++);
}
printf("%d",i);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

04:50 PM
20-Mar-25

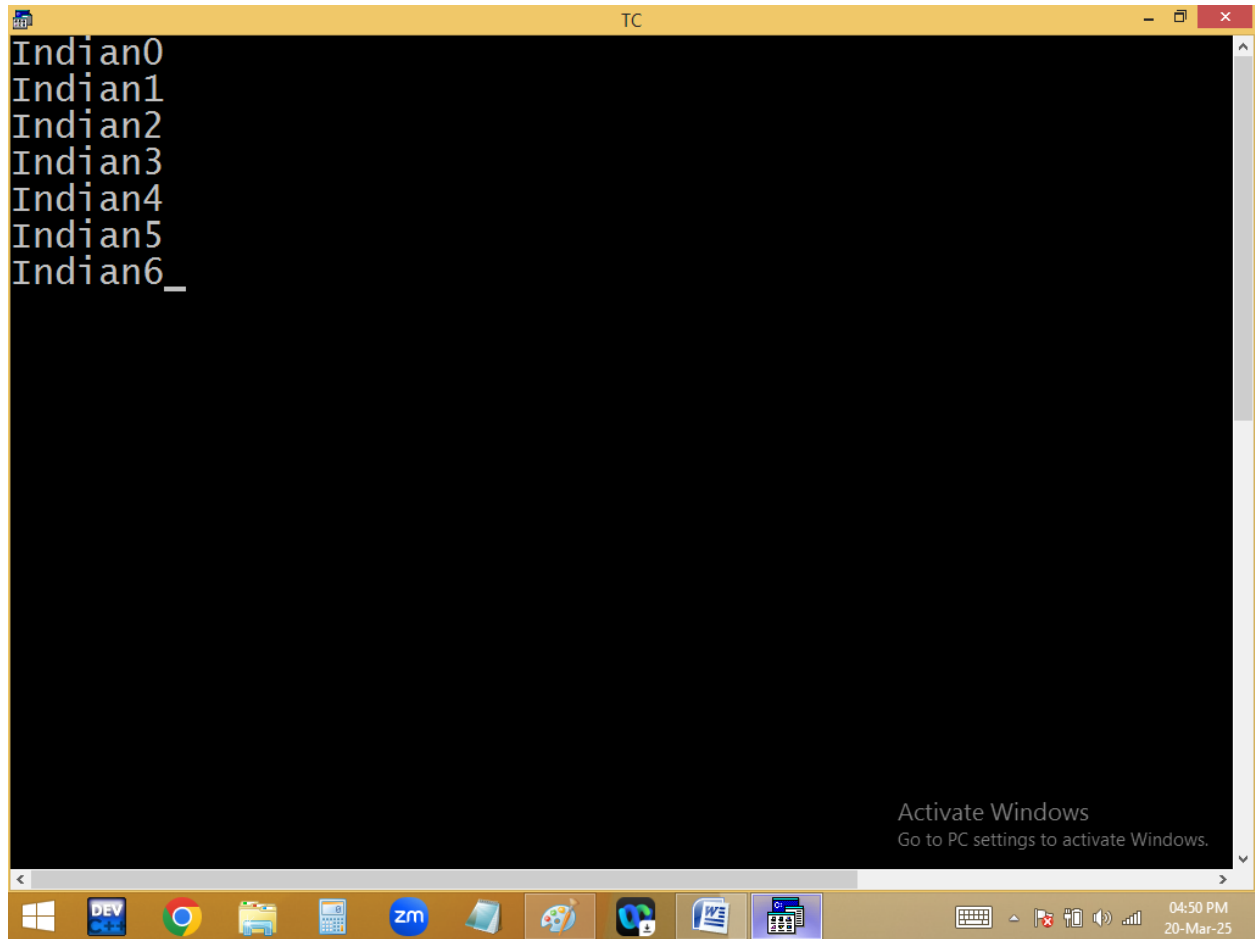

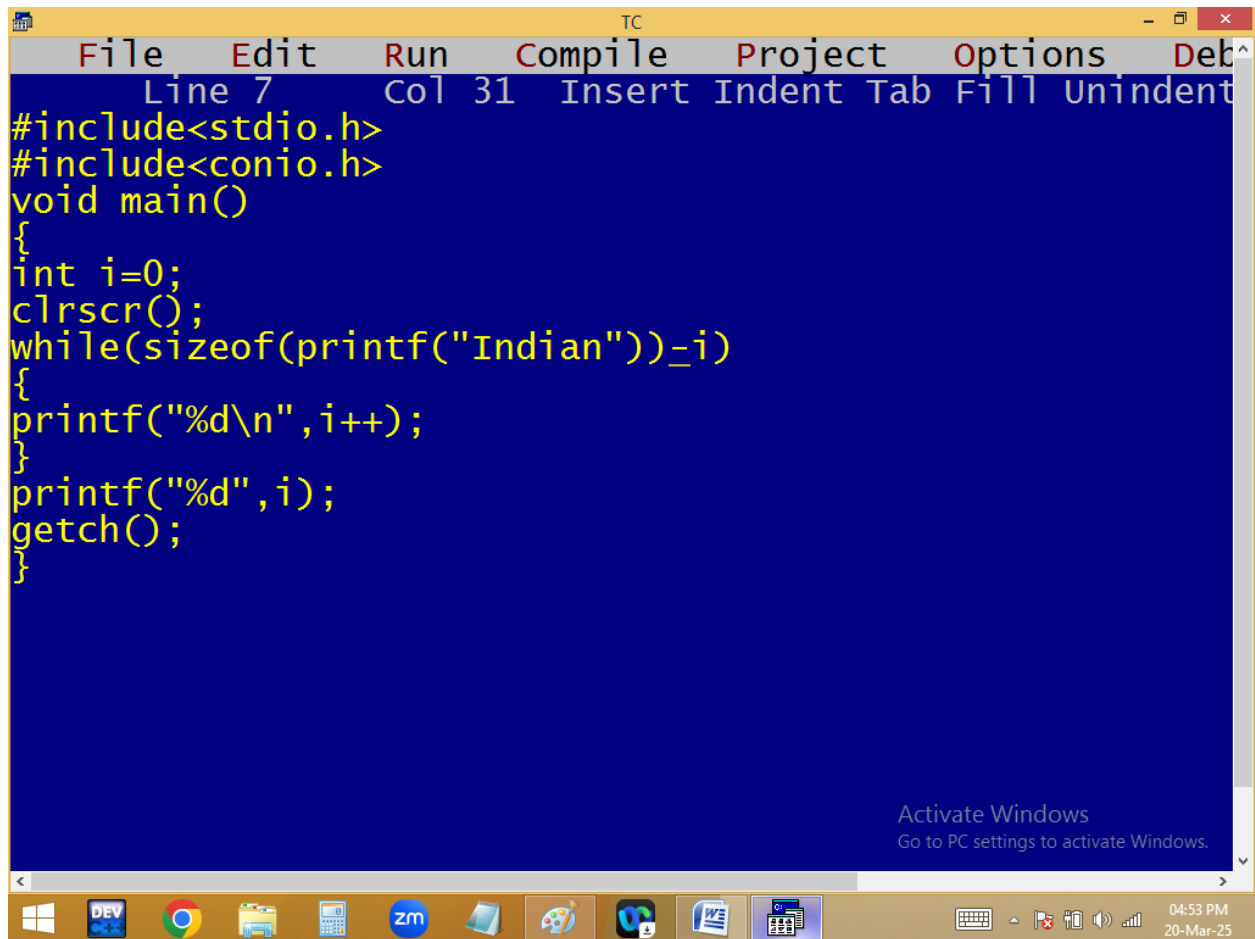

```
TC
File Edit Run Compile Project Options Deb
Line 7 Col 31 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while(sizeof printf("Indian"))_i)
{
printf("%d\n",i++);
}
printf("%d",i);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

04:53 PM
20-Mar-25

while(sizeof(printf("Indian"))-i)

sizeof(G)

2-0

2-1


2-2=0


i

0 ✓

1 ✓

2 ✓

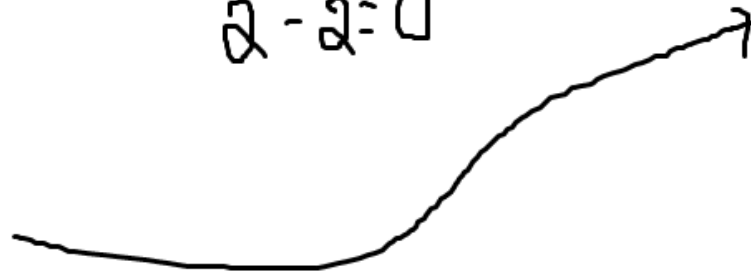


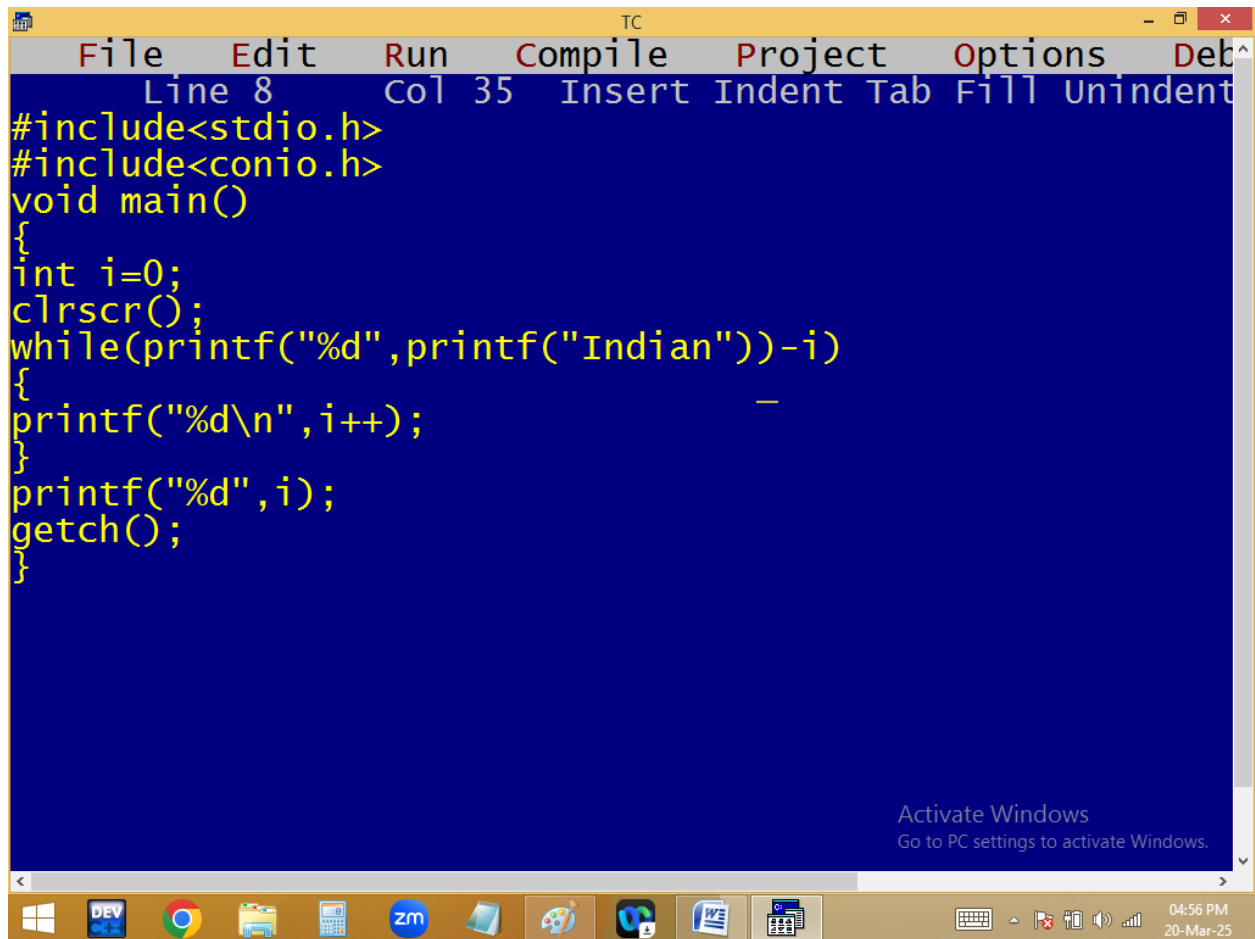

```
TC
File Edit Run Compile Project Options Deb
Line 8 Col 35 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while(printf("%d",printf("Indian"))-i)
{
printf("%d\n",i++);
}
printf("%d",i);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

04:56 PM
20-Mar-25

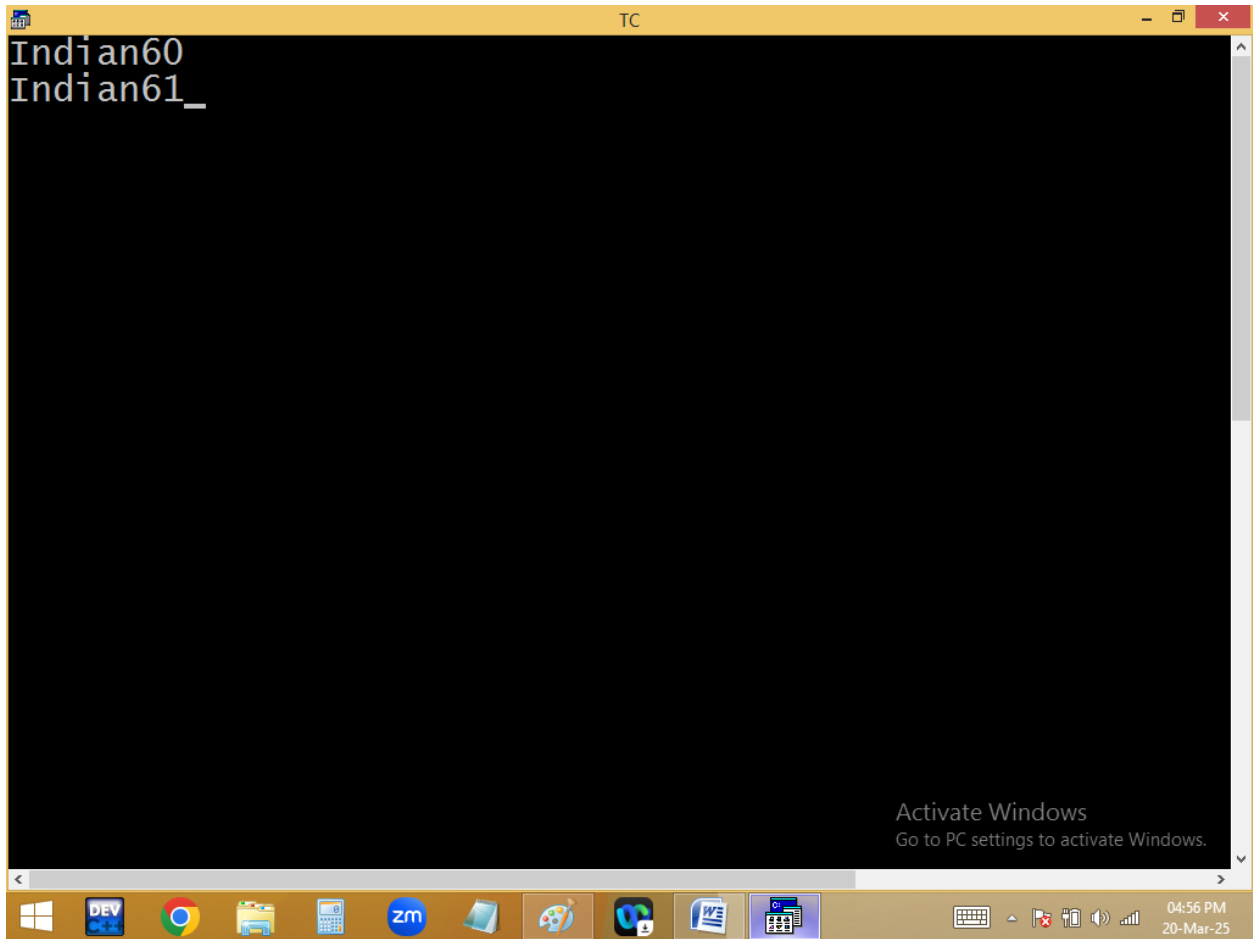

$1-1=0$
 $1-0=1$

$\begin{array}{r} 1 \\ \overline{6} 1 \\ 60 \end{array}$ ✓

```

while( printf("%d", p("Indian"))-i)
{
  p(i++);
}
p(i);
  
```

Diagrams showing the flow of execution:


- An arrow from the closing brace of the while loop to the `p(i);` statement.
- An arrow from the `p(i);` statement back to the condition of the while loop.
- An arrow from the `p(i++)` statement to the `i` in the condition of the while loop.
- An arrow from the `p("Indian")` expression to the `6` in the `60` part of the division diagram.


```

TC
File Edit Run Compile Project Options Deb
Line 7 Col 20 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
while(sizeof("Indian")-i)
{
printf("%d\n",i++);
}
printf("%d",i);
getch();
}
  
```

Activate Windows
 Go to PC settings to activate Windows.

05:02 PM
 20-Mar-25

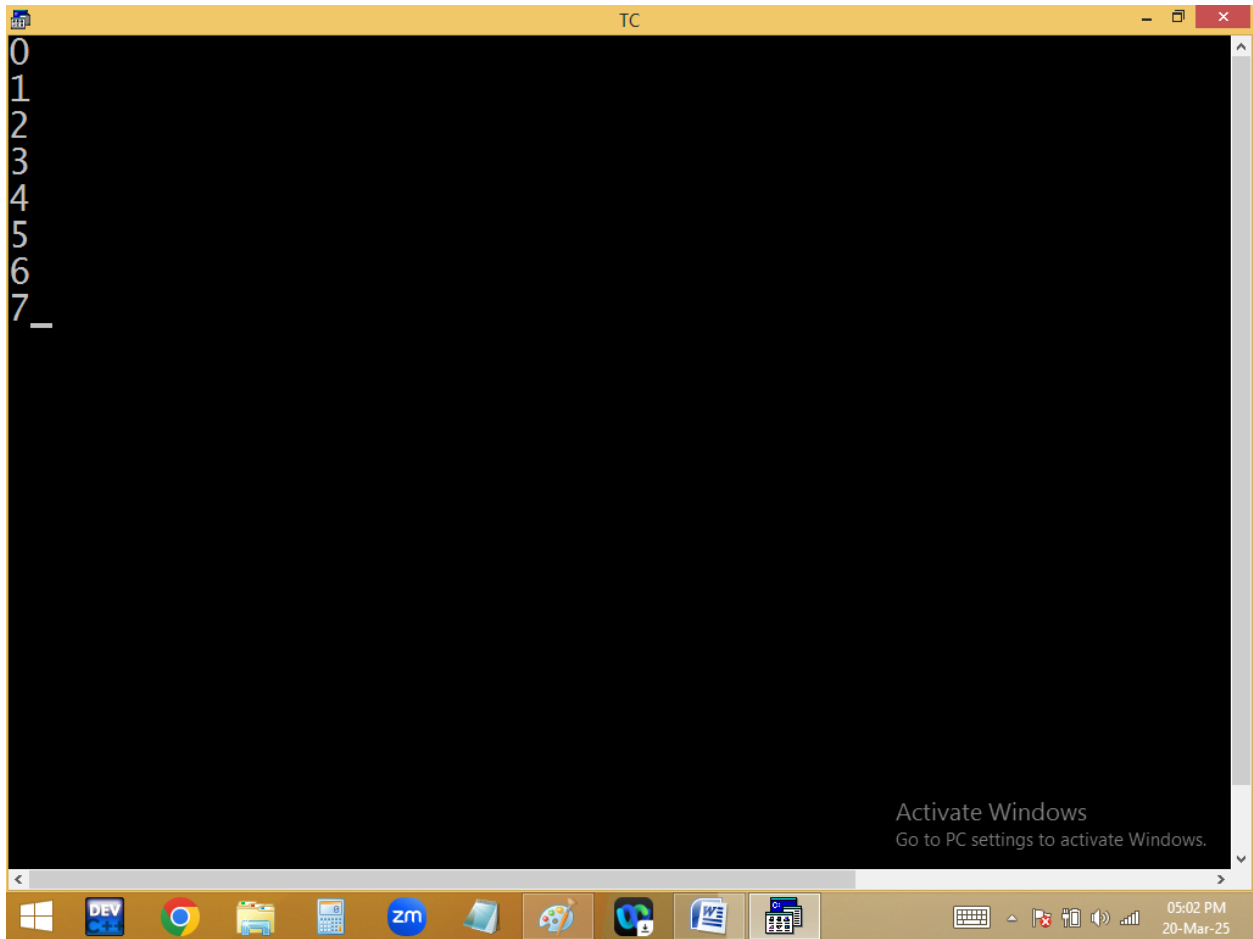


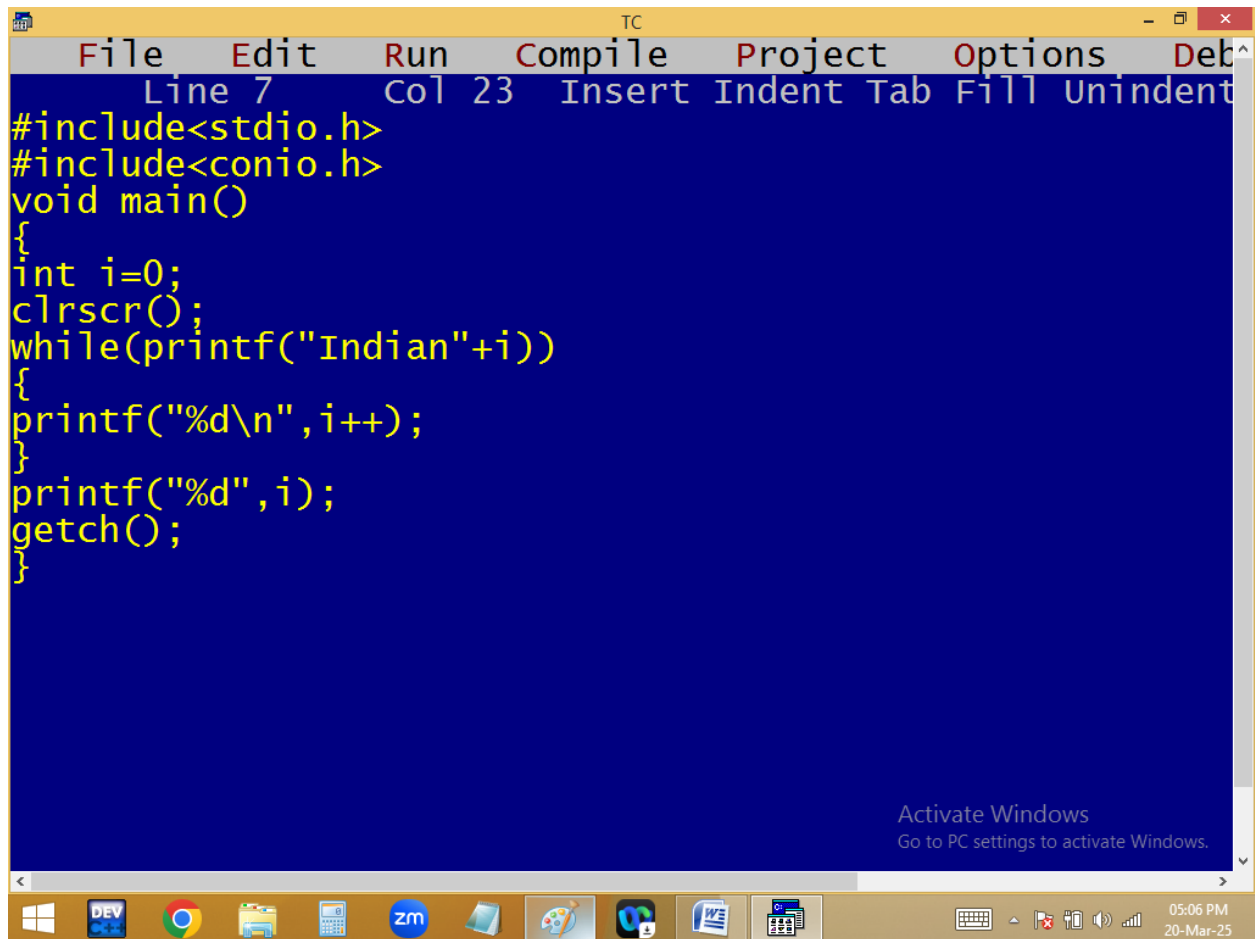

```
TC
File Edit Run Compile Project Options Debug
Line 7 Col 23 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
    int i=0;
    clrscr();
    while(printf("Indian"+i))
    {
        printf("%d\n",i++);
    }
    printf("%d",i);
    getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

05:06 PM
20-Mar-25

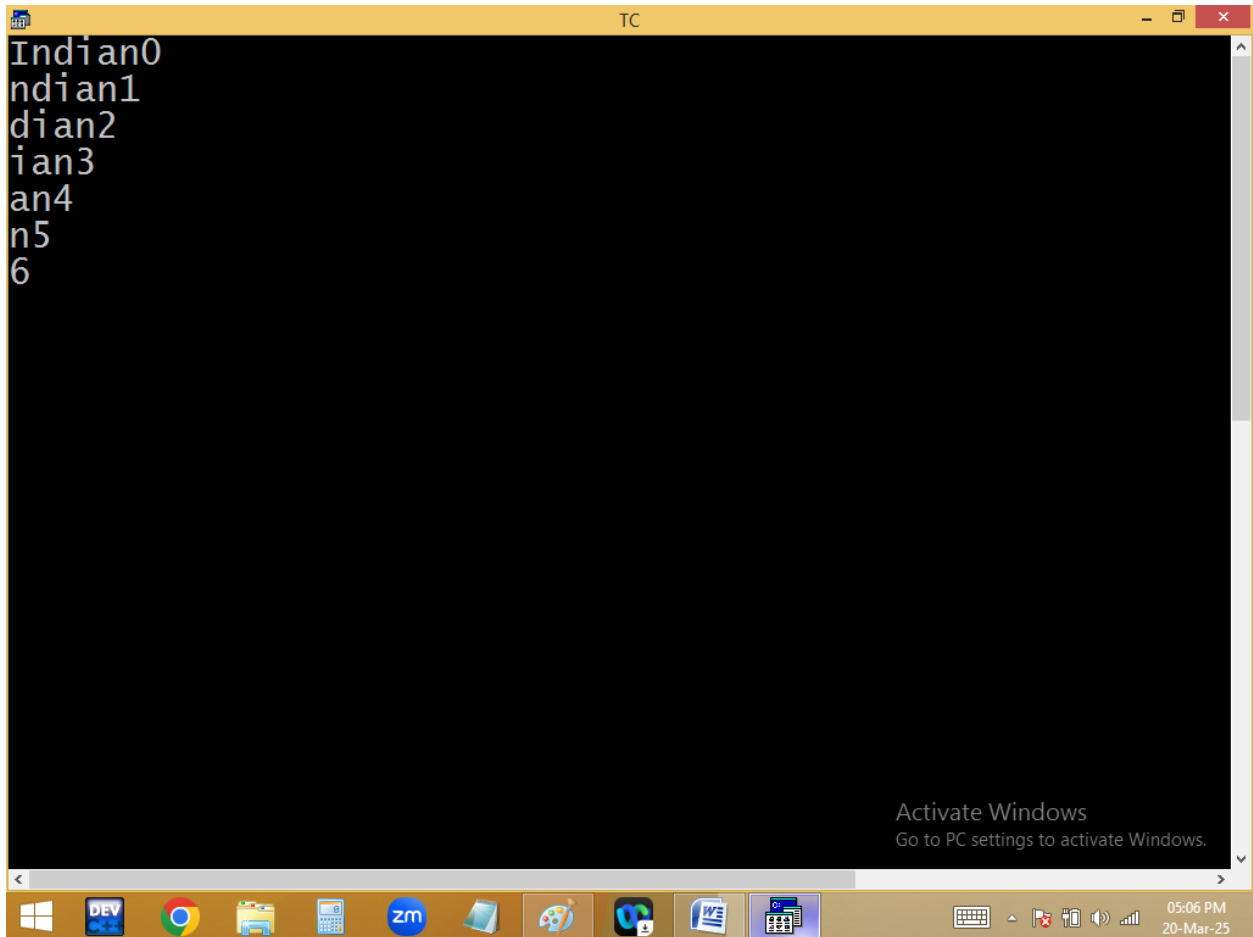

base addr + 0 = 420




420 21 22 23 24 25 26

I	n	d	i	a	n	\0
---	---	---	---	---	---	----

420


```
while( printf("Indian" + i ))
```

Indian0
ndian1
dian2
ian3
an4
n5
6

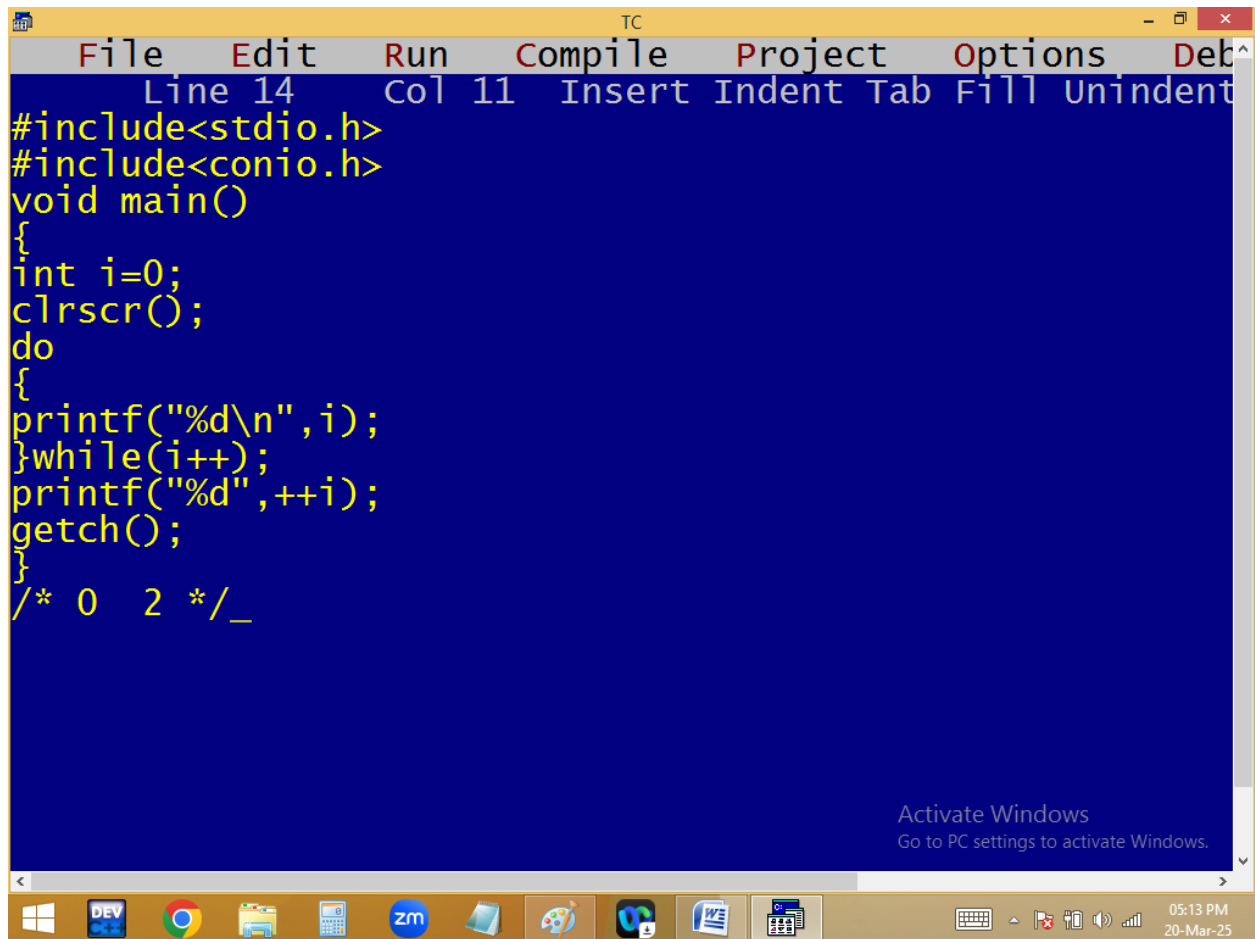

```
TC
File Edit Run Compile Project Options Debug
Line 14 Col 11 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
do
{
printf("%d\n",i);
}while(i++);
printf("%d",++i);
getch();
}
/* 0 2 */_


Activate Windows
Go to PC settings to activate Windows.
```

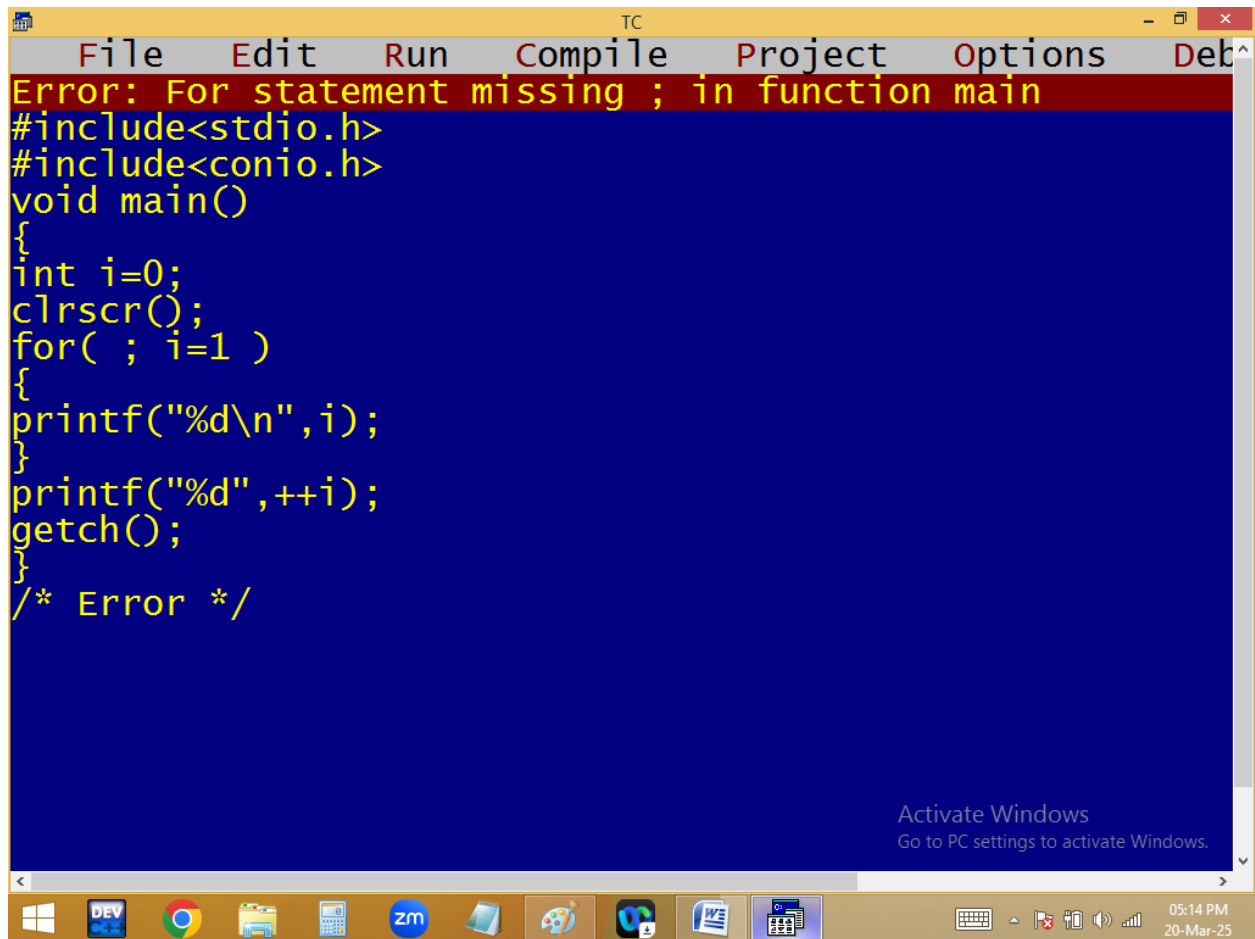

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error message banner at the top states: "Error: For statement missing ; in function main". The code editor has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
for( ; i=1 )
{
printf("%d\n",i);
}
printf("%d",++i);
getch();
}
/* Error */
```


An "Activate Windows" watermark is visible in the bottom right corner of the code editor area, with the text "Go to PC settings to activate Windows." The Windows taskbar is at the bottom, showing icons for Windows, DEV, Chrome, File Explorer, Calculator, Zoom, and other applications. The system clock in the bottom right corner shows "05:14 PM" and "20-Mar-25".

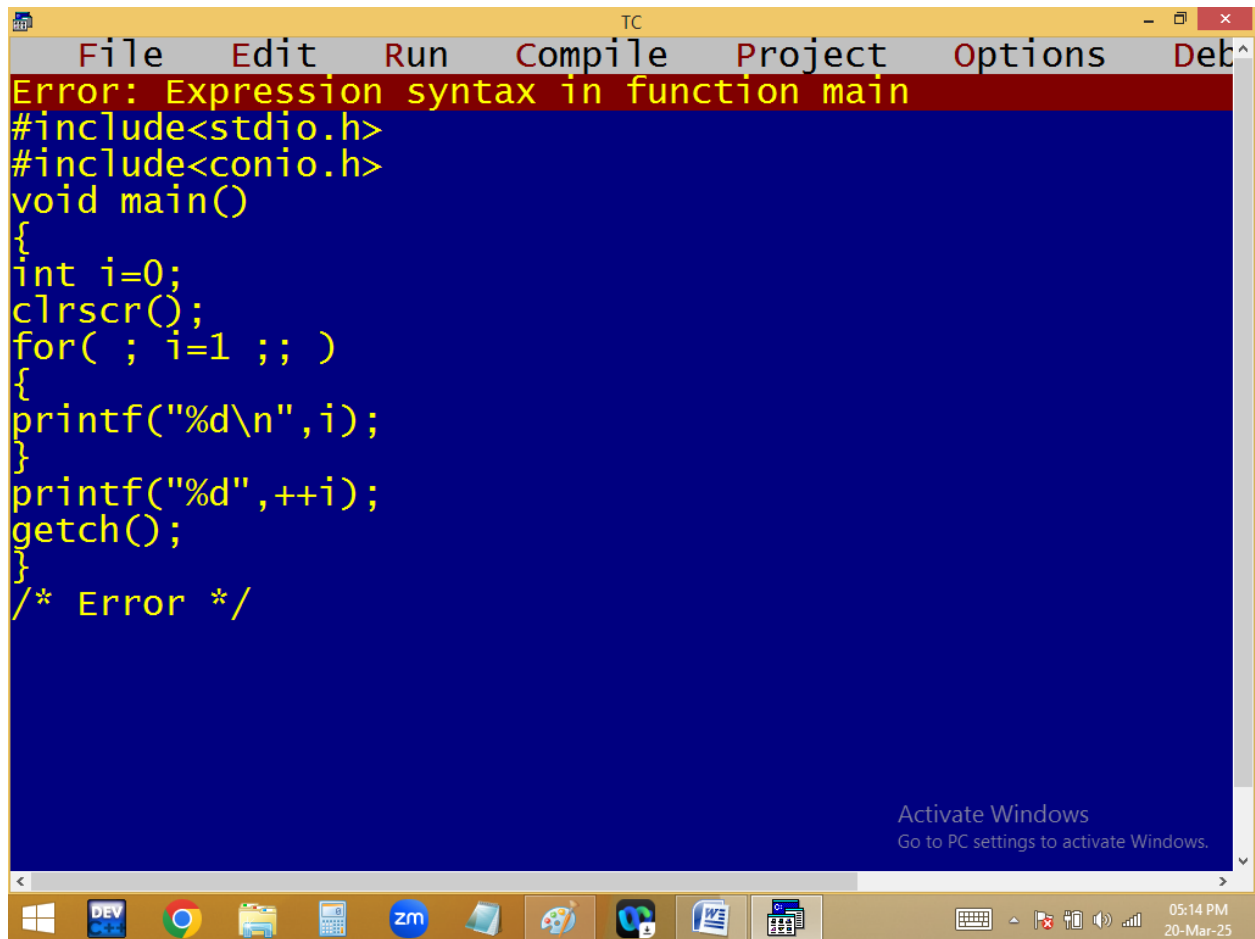

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". A red error message banner at the top states "Error: Expression syntax in function main". The code editor has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i=0;
    clrscr();
    for( ; i=1 ;; )
    {
        printf("%d\n",i);
    }
    printf("%d",++i);
    getch();
}
/* Error */
```


An "Activate Windows" watermark is visible in the bottom right corner of the code editor area, with the text "Go to PC settings to activate Windows." The Windows taskbar at the bottom shows the Start button, a taskbar search icon, and several application icons including DEV, Chrome, File Explorer, Calculator, Zoom, and others. The system tray on the right shows the date and time as "05:14 PM 20-Mar-25".

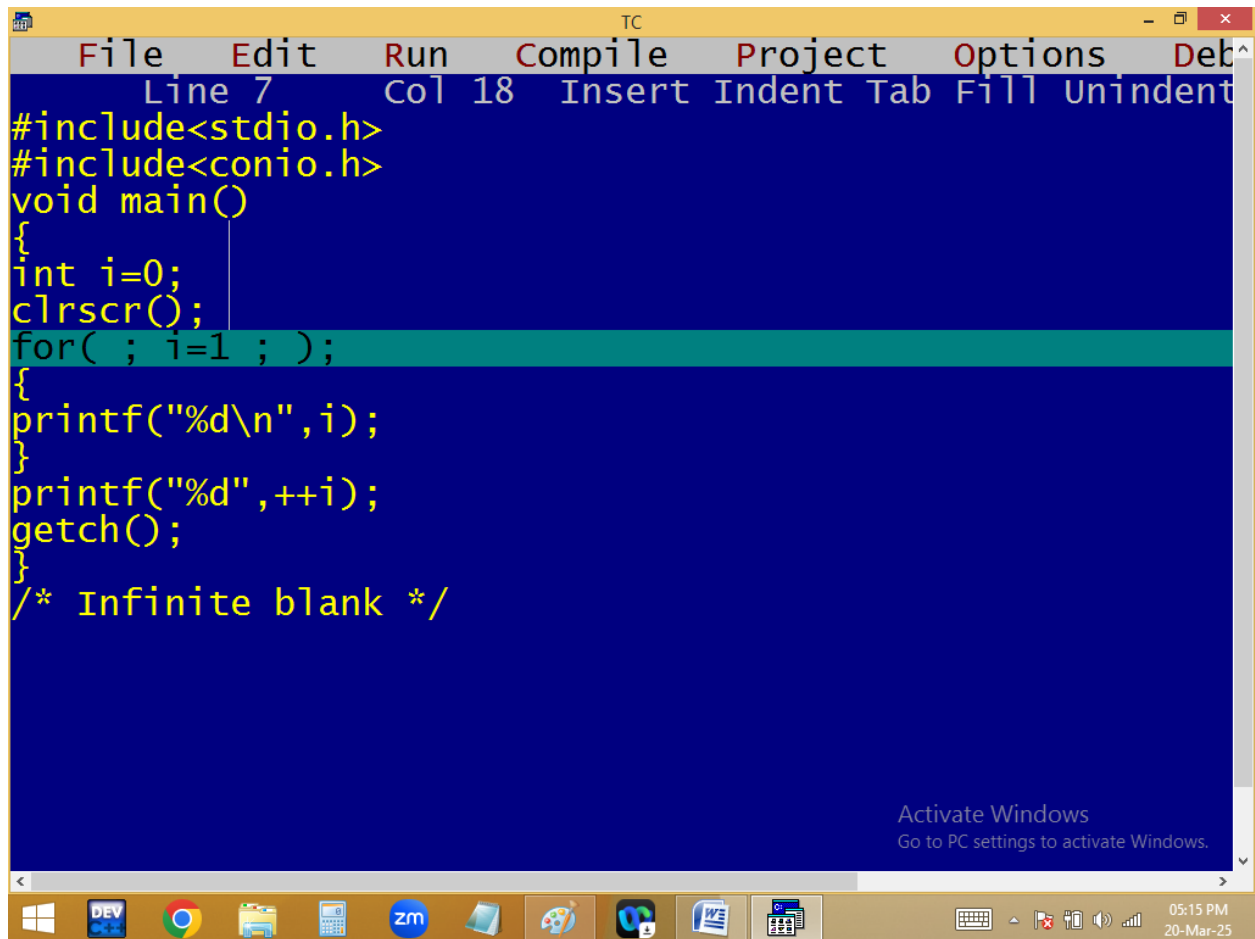

```
TC
File Edit Run Compile Project Options Debug
Line 7 Col 18 Insert Indent Tab Fill Unindent
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
for( ; i=1 ; );
{
printf("%d\n",i);
}
printf("%d",++i);
getch();
}
/* Infinite blank */


Activate Windows
Go to PC settings to activate Windows.

05:15 PM
20-Mar-25
```

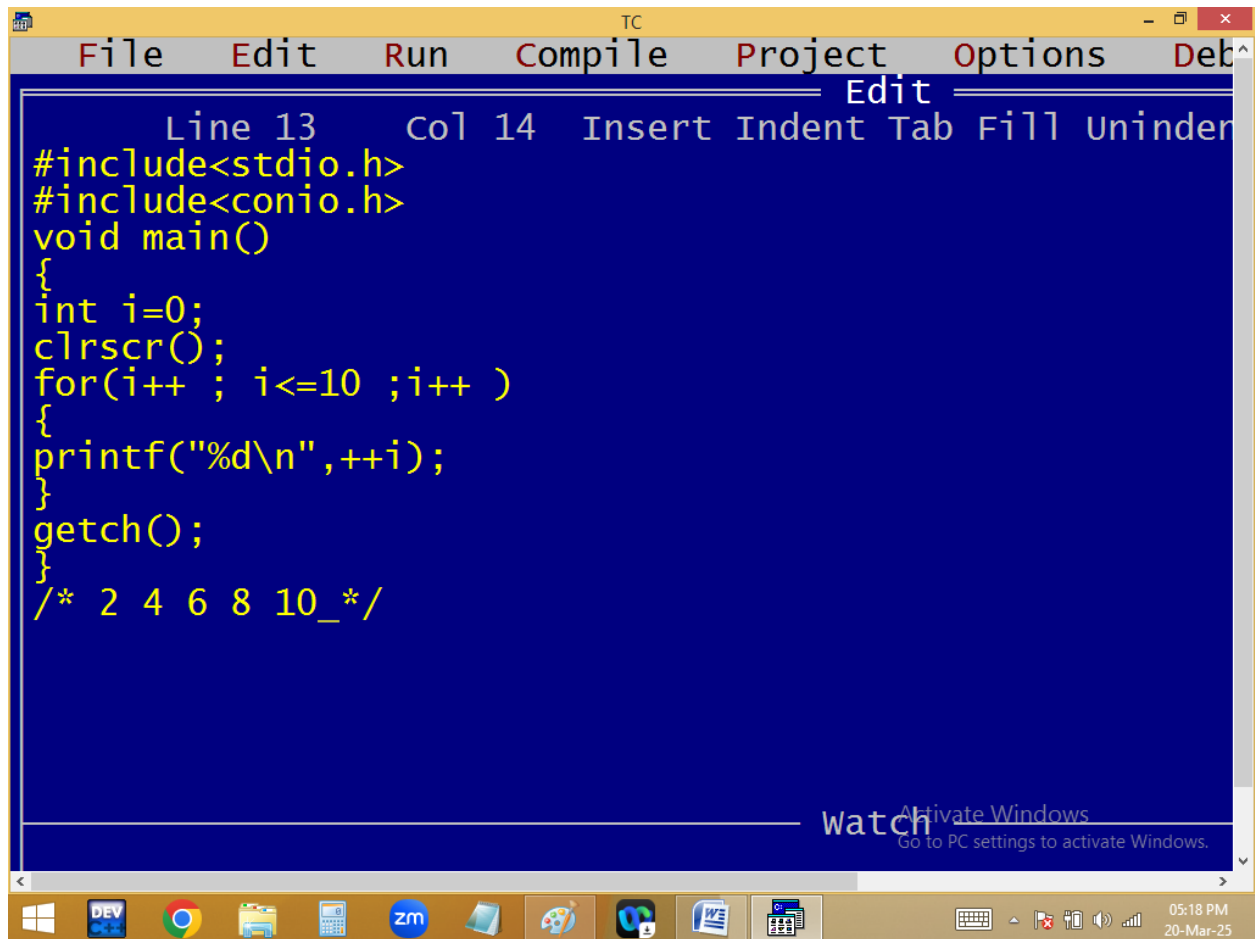

```
TC
File Edit Run Compile Project Options Debug
Line 13 Col 14 Insert Indent Tab Fill Underline
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
for(i++ ; i<=10 ;i++ )
{
printf("%d\n",++i);
}
getch();
}
/* 2 4 6 8 10_*/

watch
Activate Windows
Go to PC settings to activate Windows.
05:18 PM
20-Mar-25
```

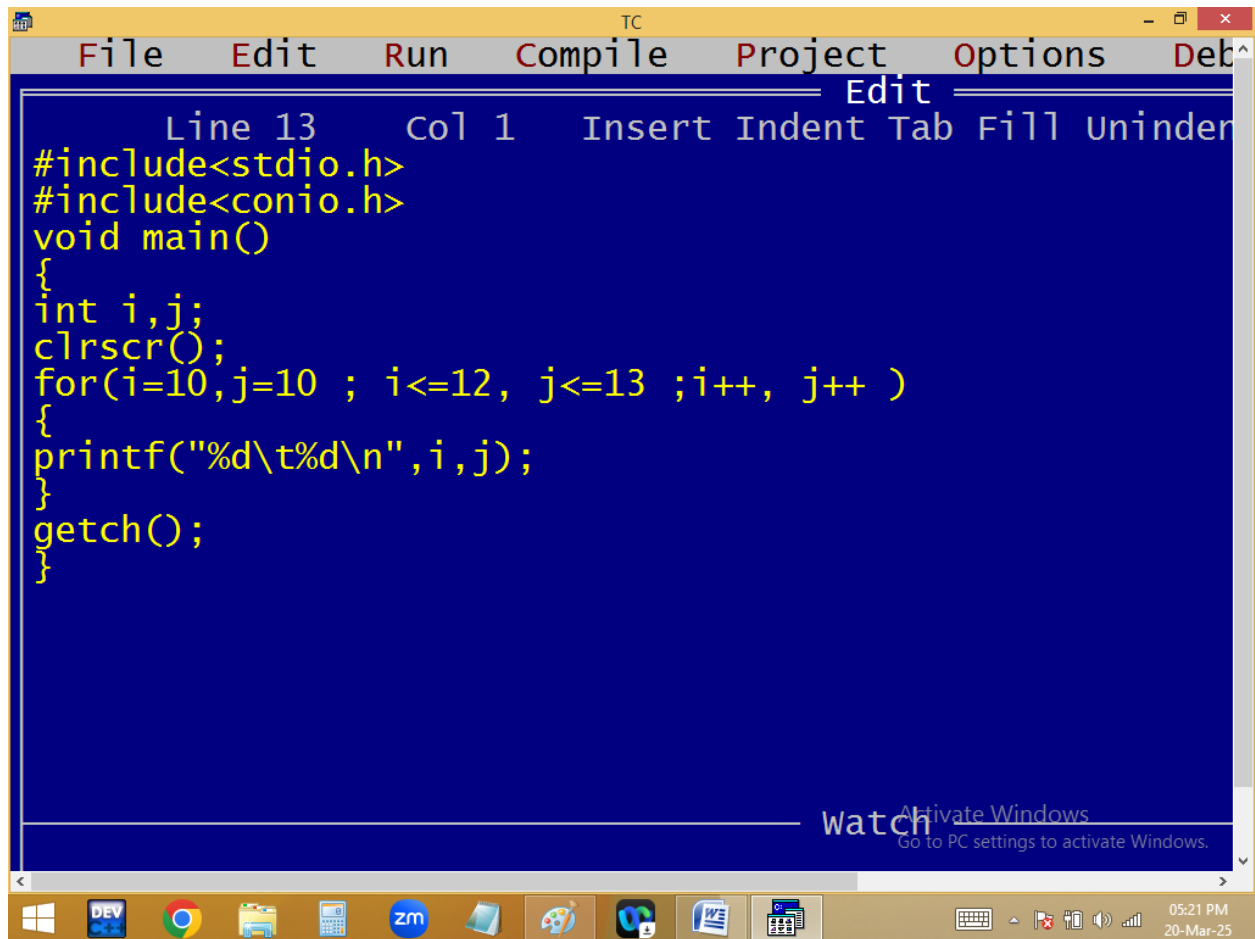



```
TC
File Edit Run Compile Project Options Debug
Line 13 Col 1 Insert Indent Tab Fill Underline
#include<stdio.h>
#include<conio.h>
void main()
{
int i,j;
clrscr();
for(i=10,j=10 ; i<=12, j<=13 ; i++, j++ )
{
printf("%d\t%d\n",i,j);
}
getch();
}
```

watch

Activate Windows
Go to PC settings to activate Windows.

05:21 PM
20-Mar-25

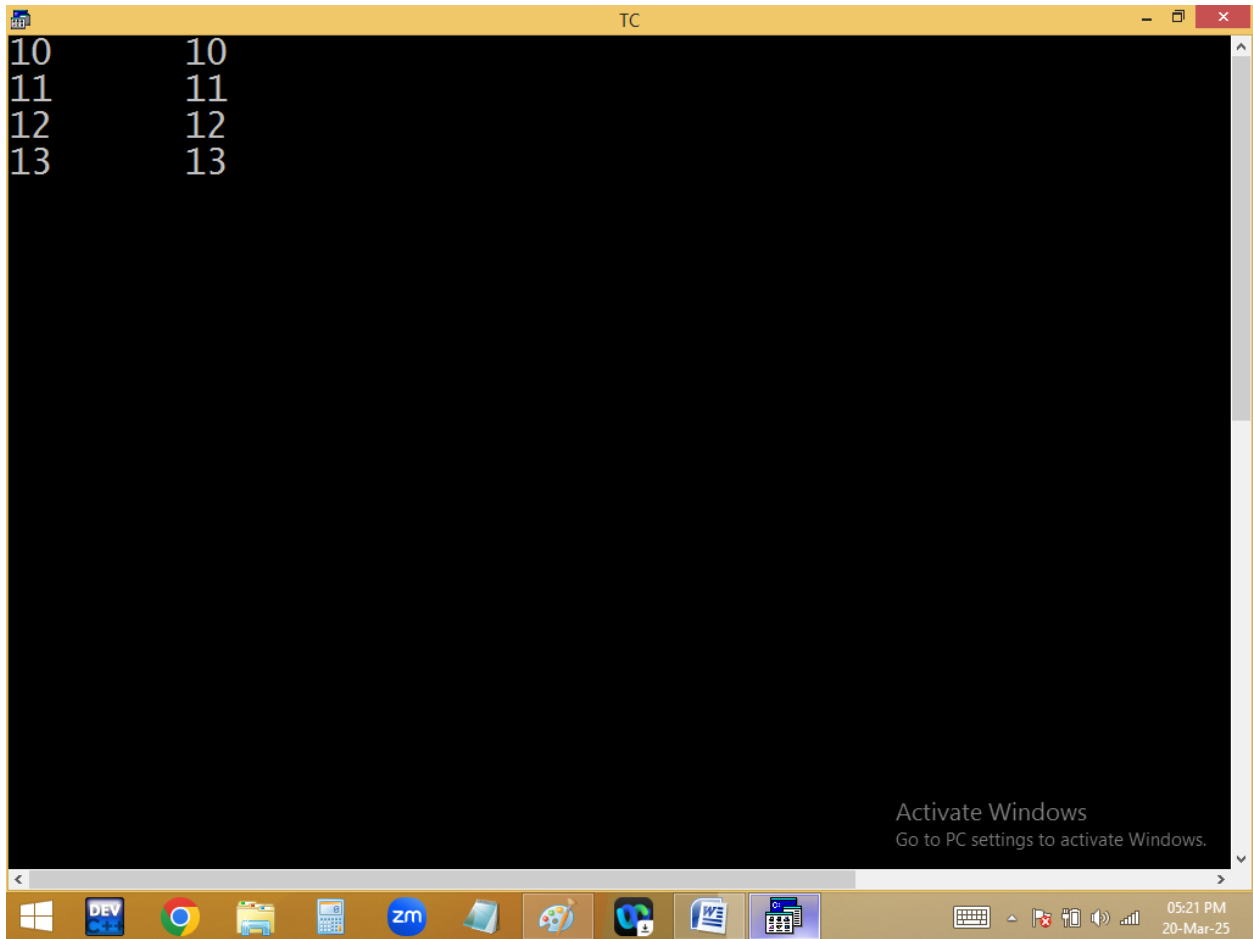

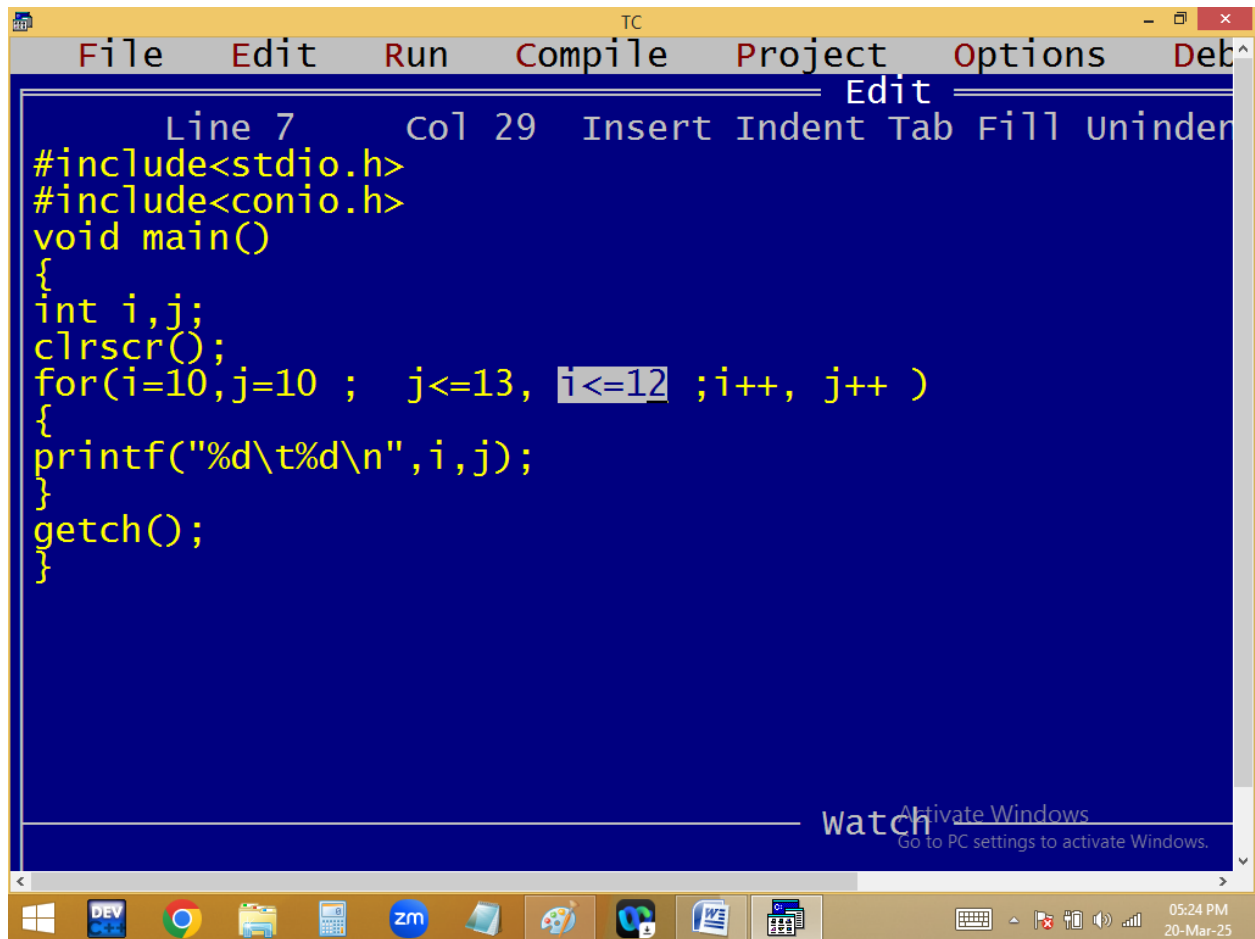



```
TC
File Edit Run Compile Project Options Deb^
Edit
Line 7 Col 29 Insert Indent Tab Fill Under
#include<stdio.h>
#include<conio.h>
void main()
{
int i,j;
clrscr();
for(i=10,j=10 ; j<=13, i<=12 ;i++, j++ )
{
printf("%d\t%d\n",i,j);
}
getch();
}
```

watch

Activate Windows
Go to PC settings to activate Windows.

05:24 PM
20-Mar-25

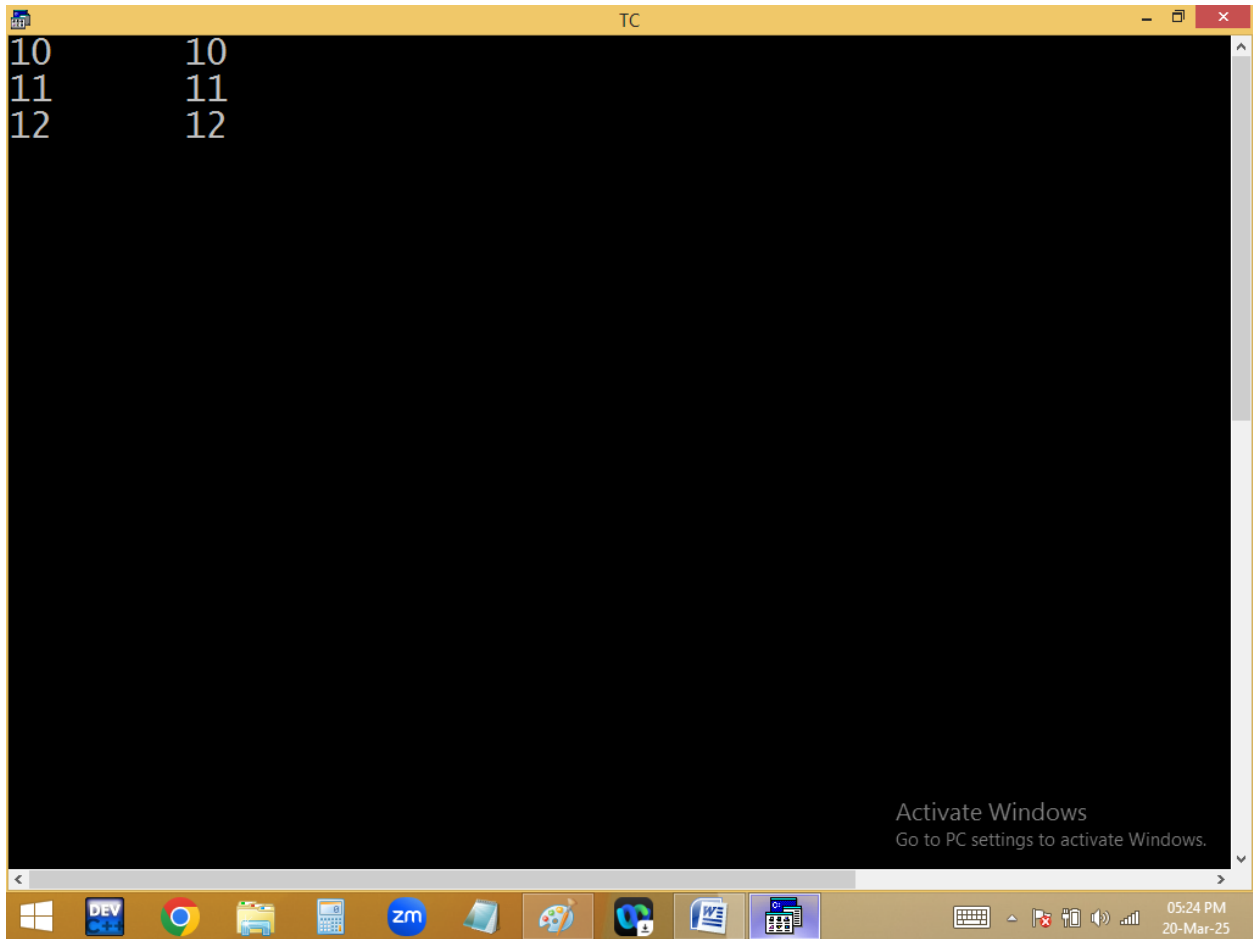

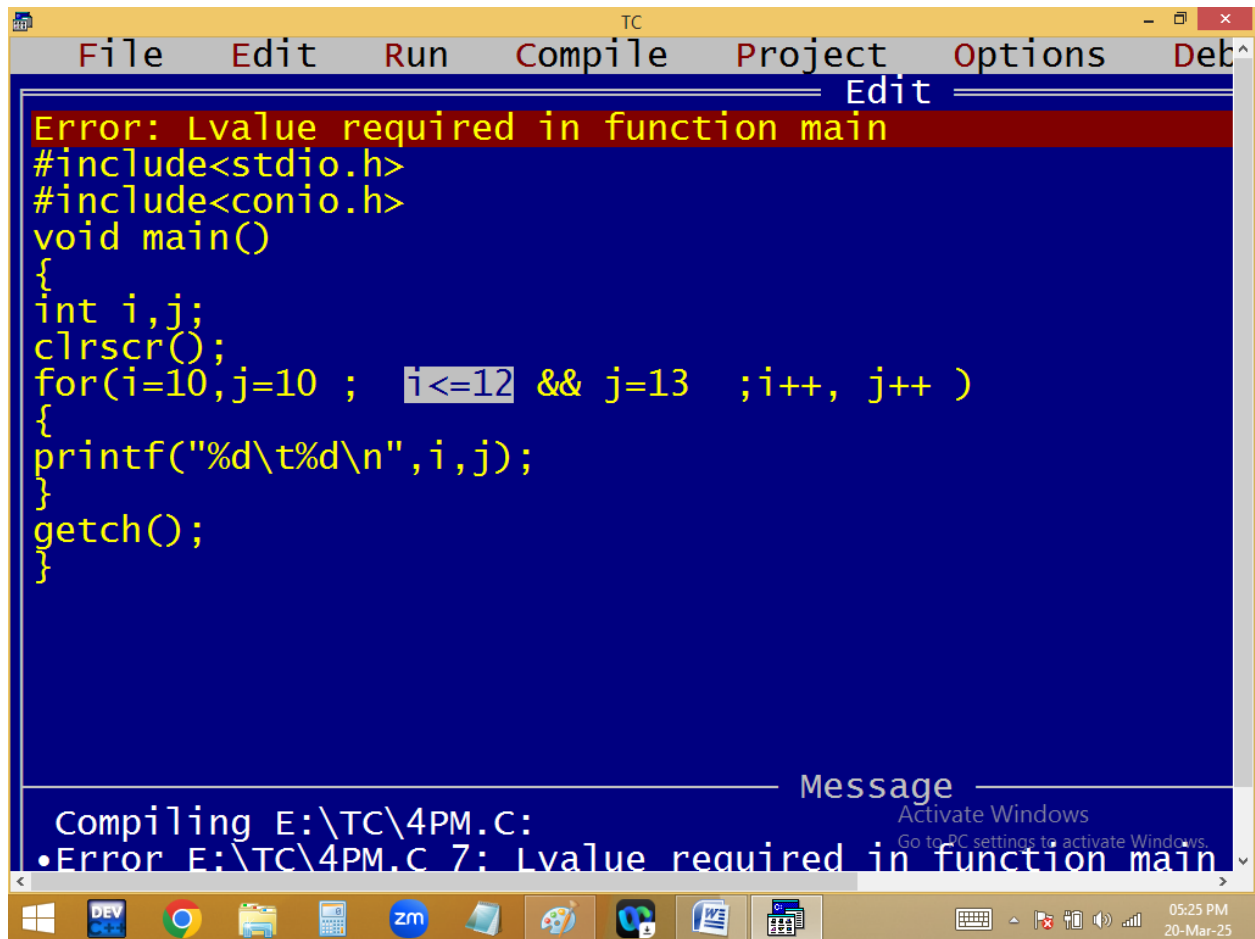

The screenshot shows the Turbo C++ (TC) IDE interface. The menu bar includes File, Edit, Run, Compile, Project, Options, and Debug. The main editing area has a blue background with yellow text. It contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i,j;
    clrscr();
    for(i=10,j=10 ; i<=12 && j=13 ; i++, j++ )
    {
        printf("%d\t%d\n",i,j);
    }
    getch();
}
```

An error message is displayed at the top of the editor: "Error: Lvalue required in function main". The expression `i<=12` in the for loop is highlighted with a light blue selection box.

At the bottom, a "Message" window shows the compilation status:

```
Compiling E:\TC\4PM.C:
•Error E:\TC\4PM.C 7: Lvalue required in function main
```

The Windows taskbar is visible at the bottom, showing icons for Windows, DEV, Chrome, File Explorer, Calculator, Zoom, and other applications. The system clock indicates 05:25 PM on 20-Mar-25.

$i \leq 12 \ \&\& \ j = 13$


$i = 12$

1 11 10

$i = 13$



constant

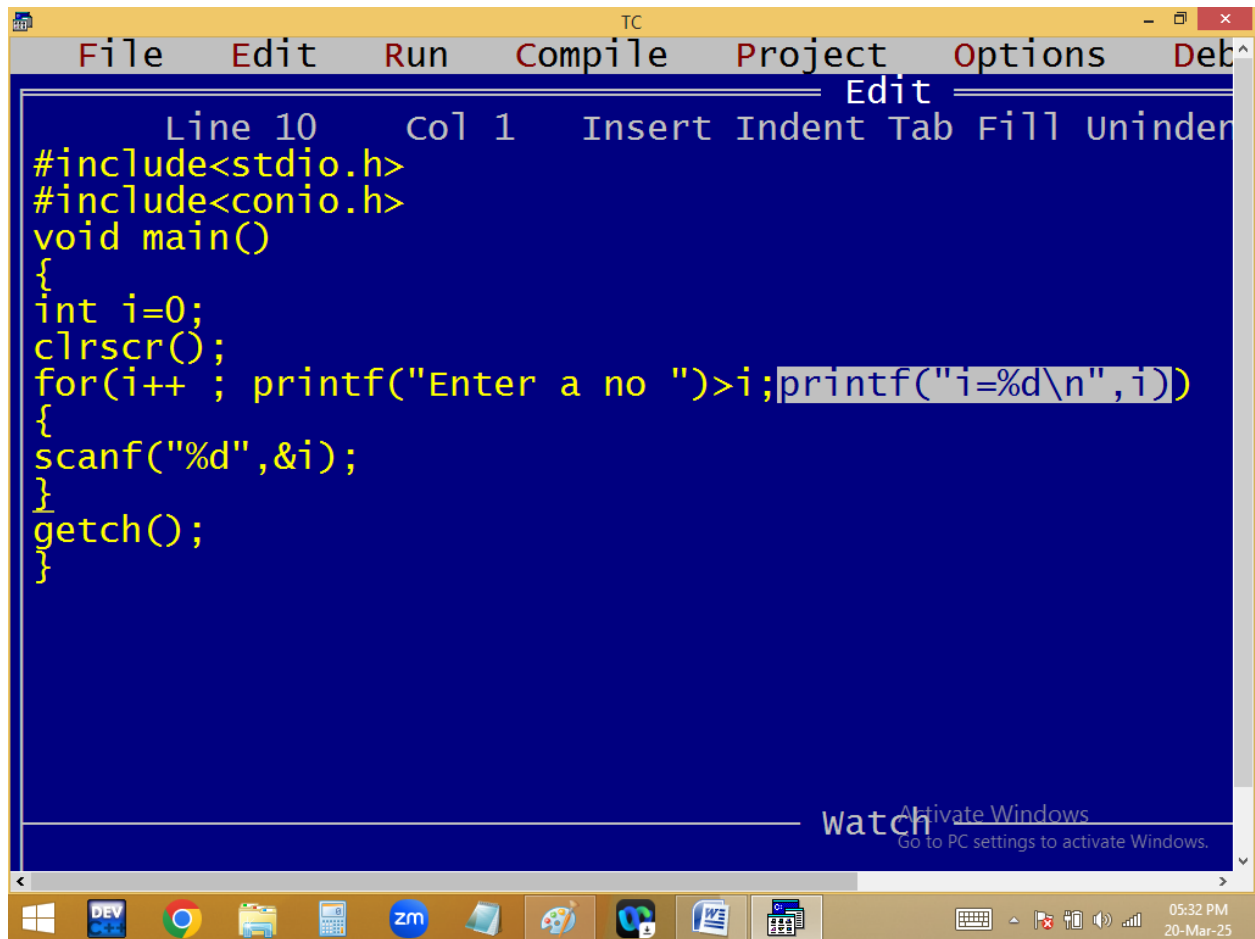

```
TC
File Edit Run Compile Project Options Debug
Line 10 Col 1 Insert Indent Tab Fill Underline
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
for(i++; printf("Enter a no ")>i; printf("i=%d\n",i))
{
scanf("%d",&i);
}
getch();
}
```

watch


Activate Windows
Go to PC settings to activate Windows.


05:32 PM
20-Mar-25

```
TC
Enter a no 3
i=3
Enter a no 9
i=9
Enter a no -12
i=-12
Enter a no 11
i=11
Enter a no _
```

Activate Windows
Go to PC settings to activate Windows.

05:32 PM
20-Mar-25

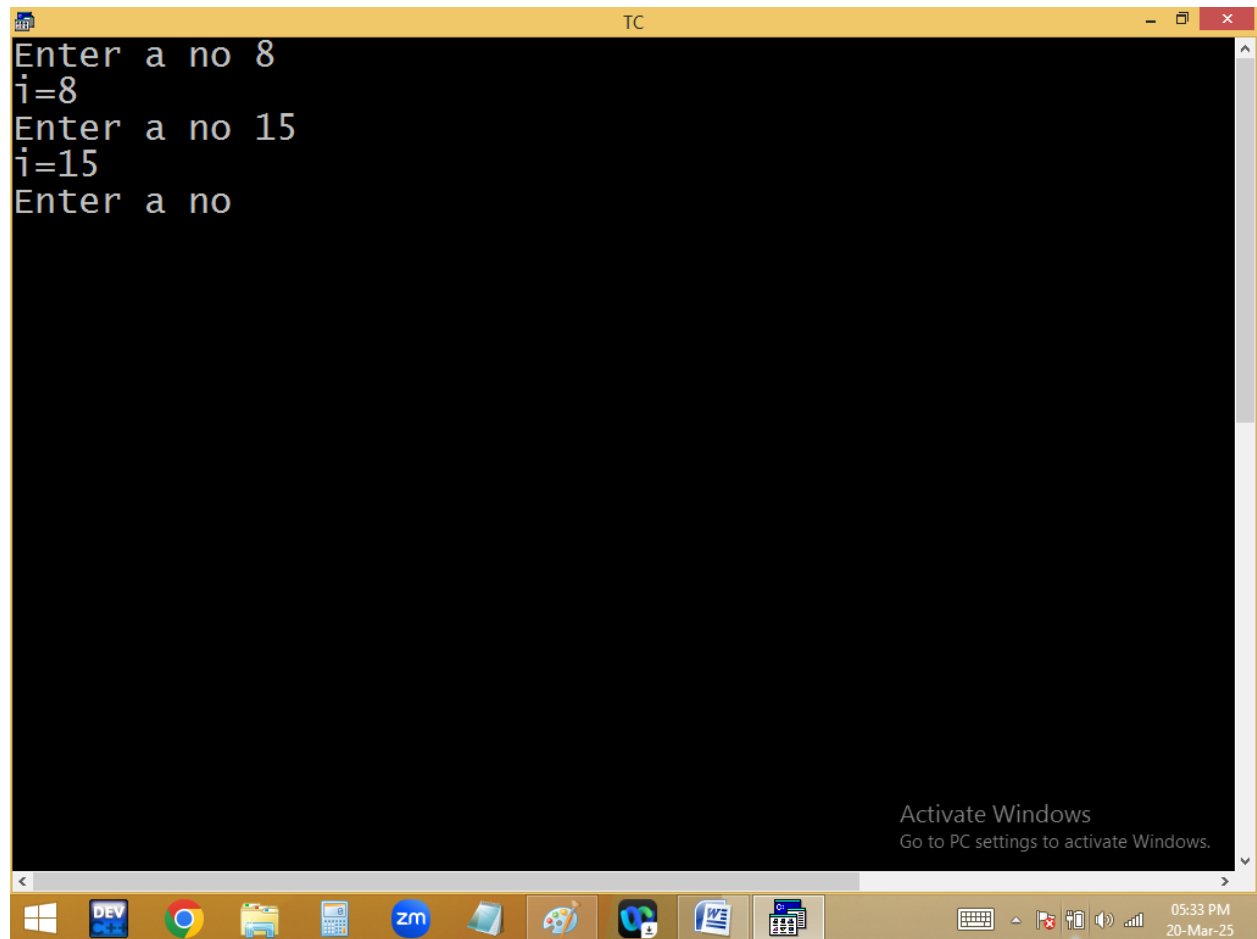

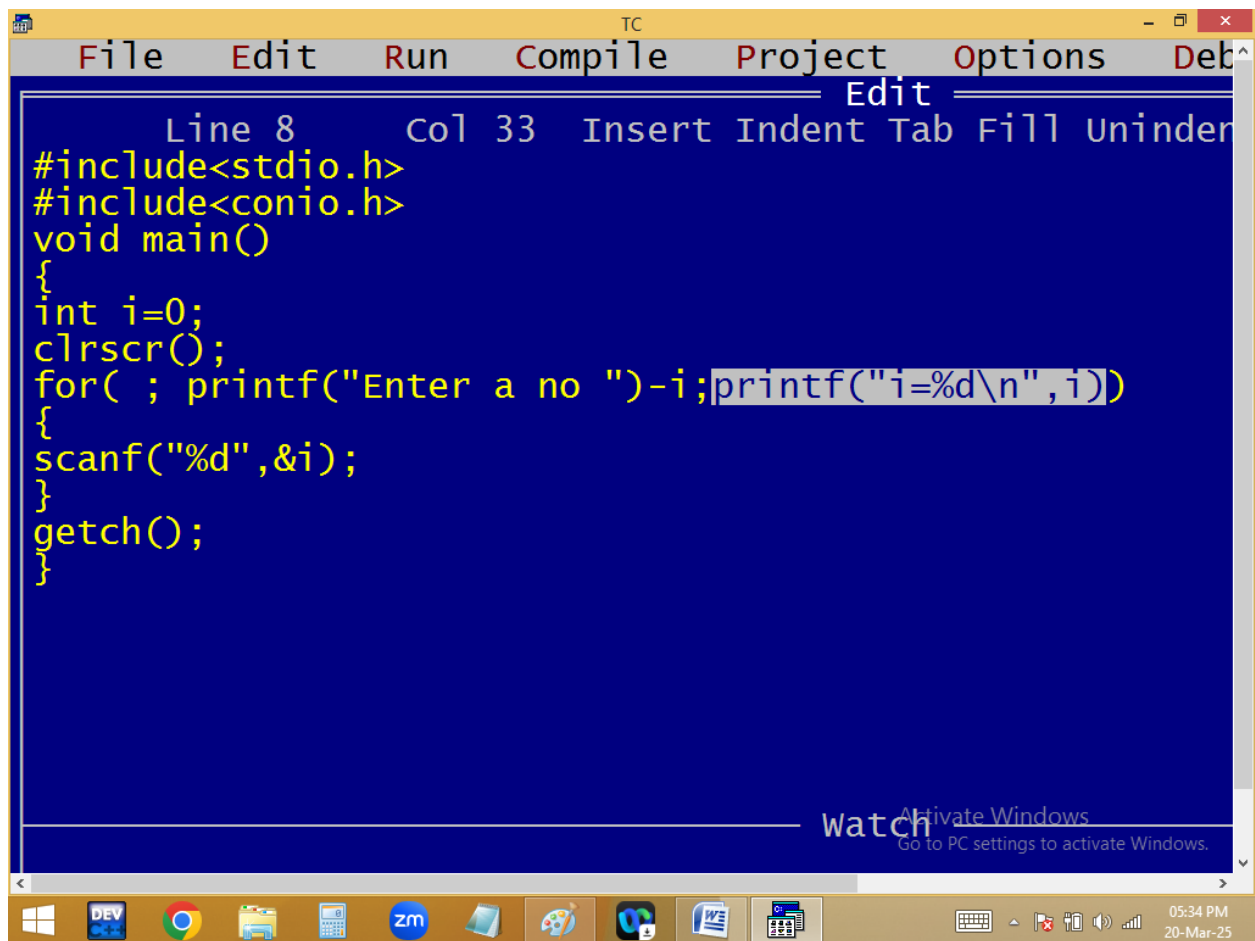

```
TC
File Edit Run Compile Project Options Debug
Line 8 Col 33 Insert Indent Tab Fill Underline
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
for( ; printf("Enter a no ") - i; printf("i=%d\n", i))
{
scanf("%d", &i);
}
getch();
}
```

watch


Activate Windows
Go to PC settings to activate Windows.

05:34 PM
20-Mar-25

```
TC
Enter a no 1
i=1
Enter a no 2
i=2
Enter a no -3
i=-3
Enter a no 0
i=0
Enter a no 11
i=11
Enter a no _
```

Activate Windows
Go to PC settings to activate Windows.

05:34 PM
20-Mar-25

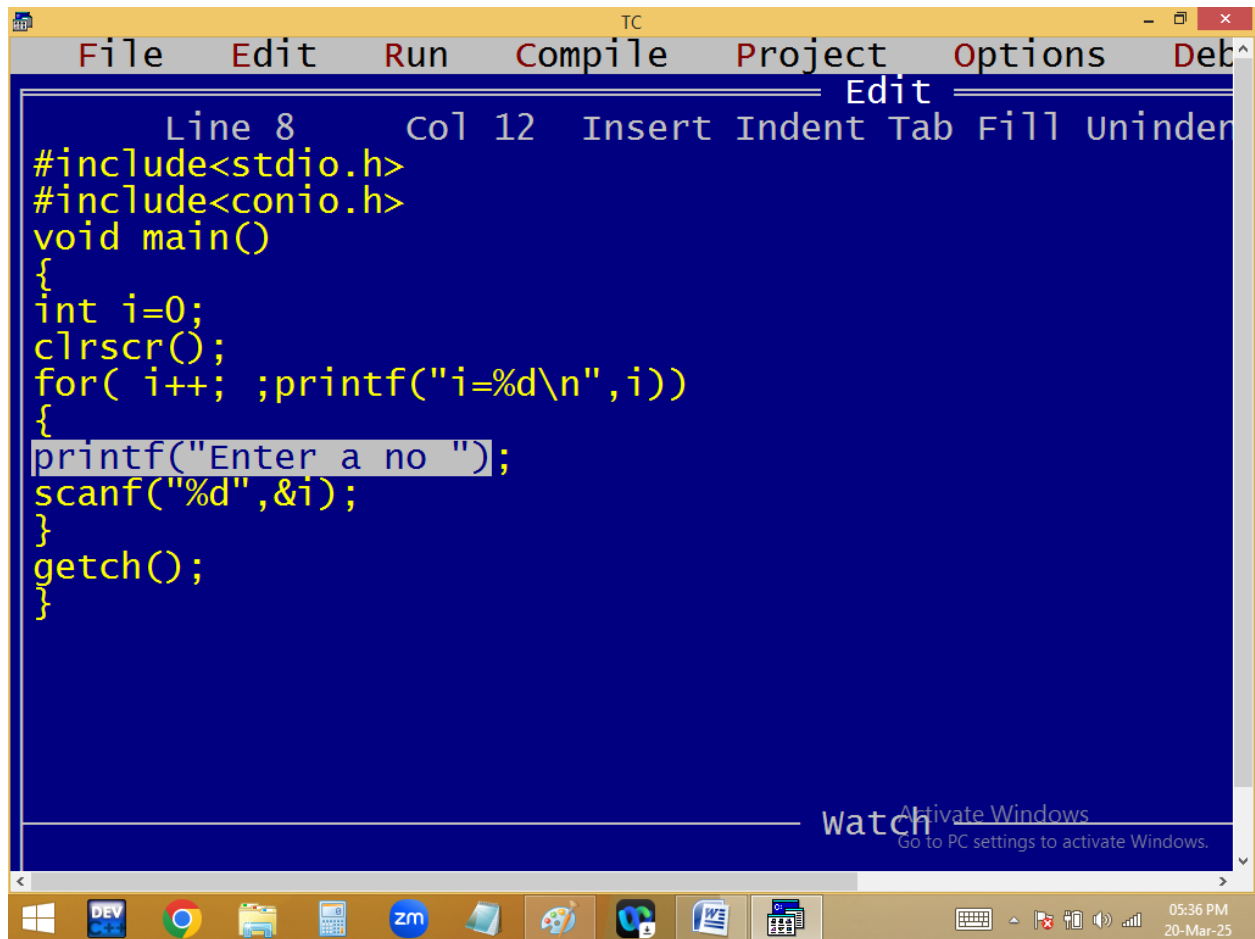

```
TC
File Edit Run Compile Project Options Debug
Line 8 Col 12 Insert Indent Tab Fill Underline
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
for( i++; ;printf("i=%d\n",i))
{
printf("Enter a no ");
scanf("%d",&i);
}
getch();
}
```

watch

Activate Windows
Go to PC settings to activate Windows.

05:36 PM
20-Mar-25

```
TC
Enter a no 1
i=1
Enter a no 2
i=2
Enter a no 3
i=3
Enter a no 0
i=0
Enter a no 11
i=11
Enter a no -11
i=-11
Enter a no _
```


Activate Windows
Go to PC settings to activate Windows.

05:35 PM
20-Mar-25


```
TC
Enter a no 1
i=1
Enter a no 2
i=2
Enter a no 11
i=11
Enter a no -1
i=-1
Enter a no 0
i=0
```

Activate Windows
Go to PC settings to activate Windows.

05:37 PM
20-Mar-25

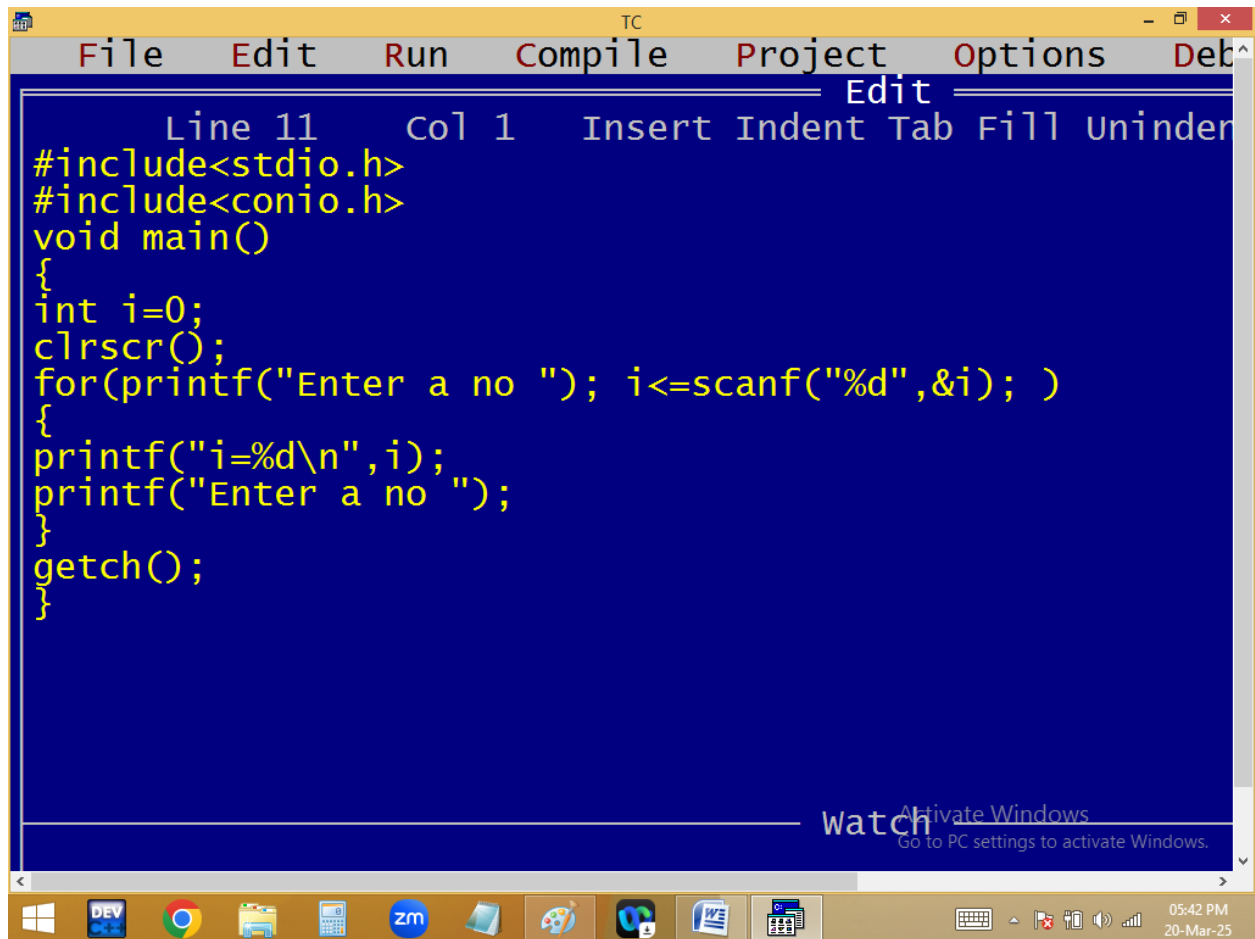



```
TC
File Edit Run Compile Project Options Debug
Line 11 Col 1 Insert Indent Tab Fill Underline
#include<stdio.h>
#include<conio.h>
void main()
{
int i=0;
clrscr();
for(printf("Enter a no "); i<=scanf("%d",&i); )
{
printf("i=%d\n",i);
printf("Enter a no ");
}
getch();
}
```

watch

Activate Windows
Go to PC settings to activate Windows.

05:42 PM
20-Mar-25

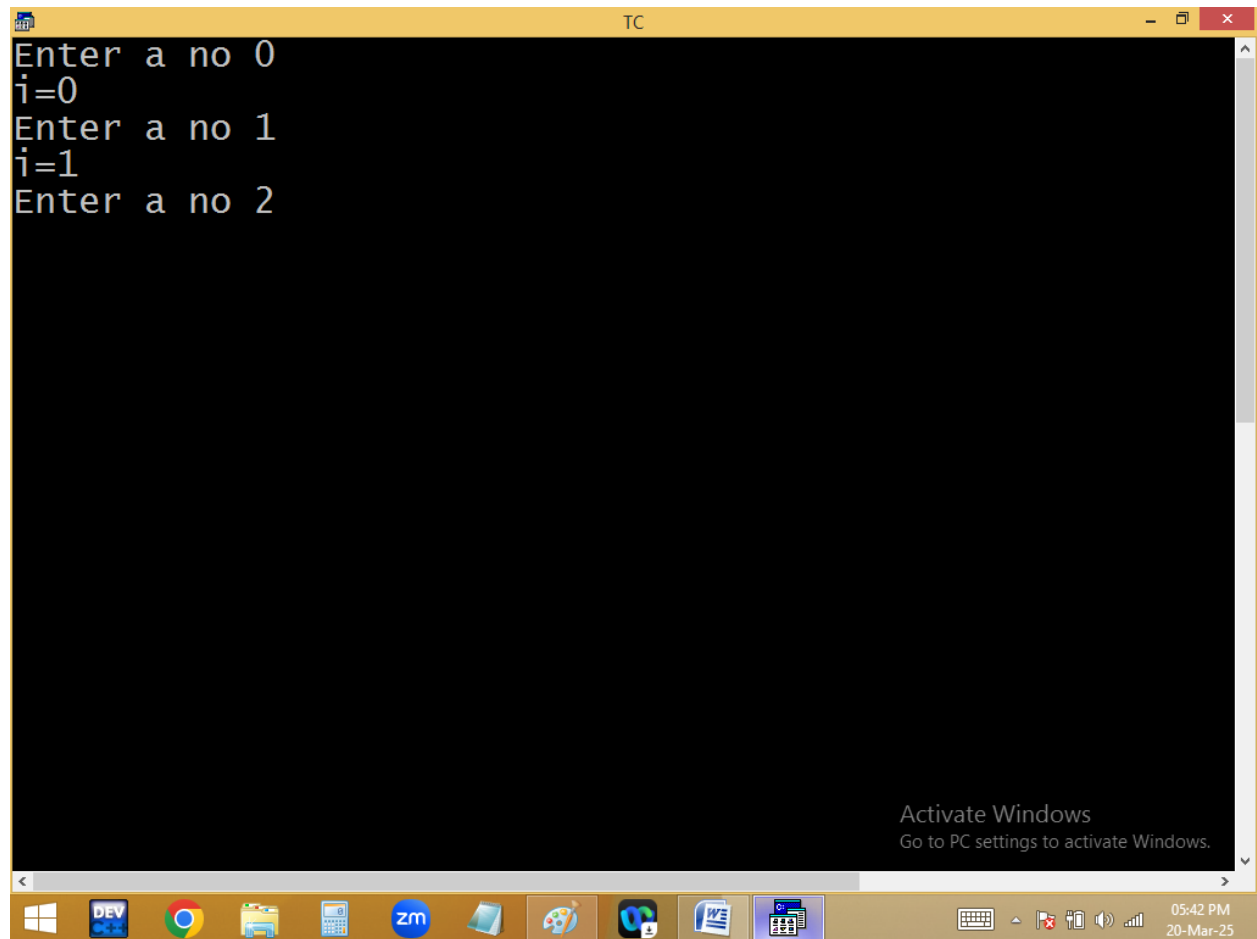


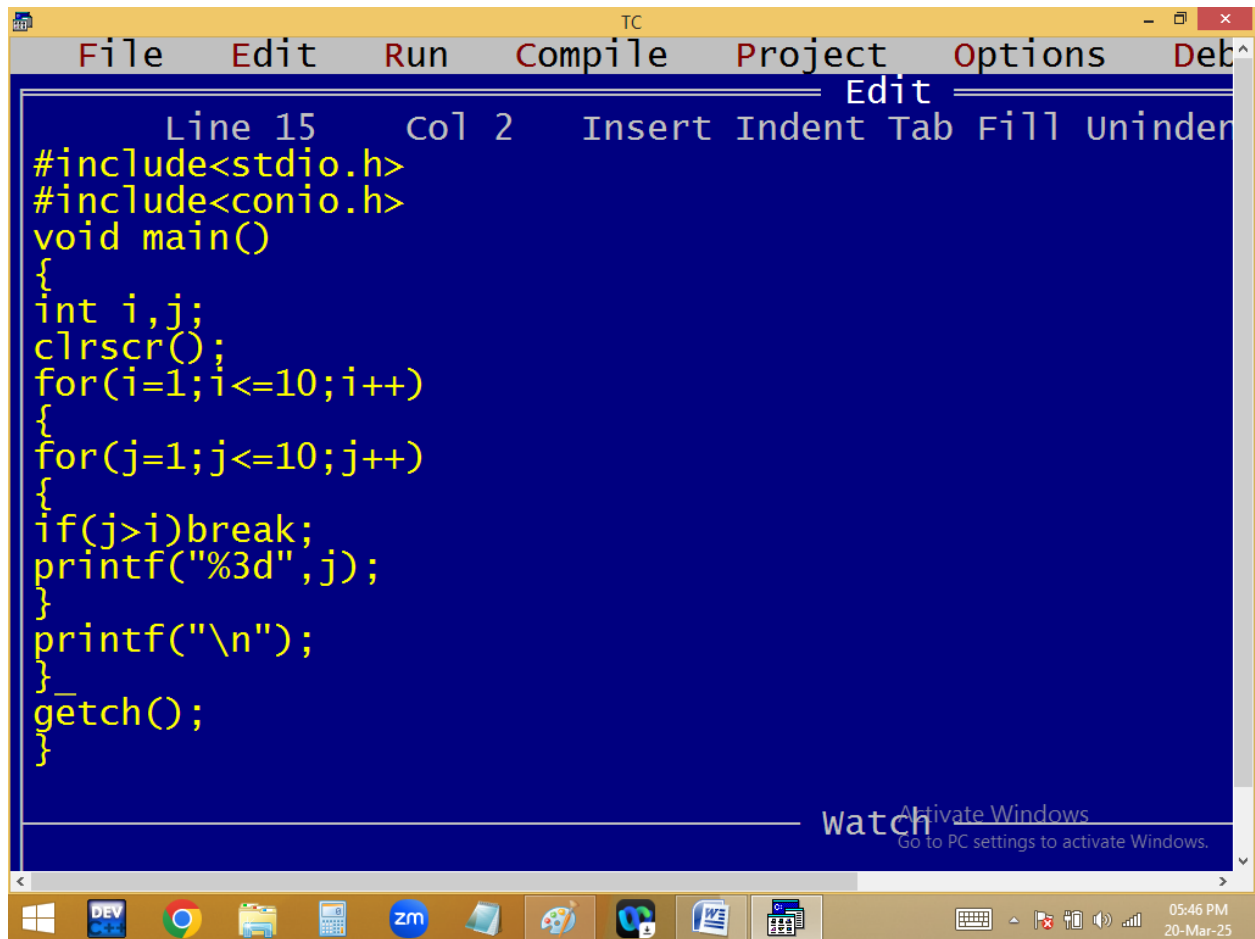


The image shows a screenshot of the Turbo C++ (TC) IDE. The window title is "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". The status bar at the top indicates "Line 15", "Col 2", and "Insert". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
    int i,j;
    clrscr();
    for(i=1;i<=10;i++)
    {
        for(j=1;j<=10;j++)
        {
            if(j>i)break;
            printf("%3d",j);
        }
        printf("\n");
    }
    getch();
}
```

At the bottom of the IDE, there is a "watch" window and a watermark that says "Activate Windows. Go to PC settings to activate Windows." The Windows taskbar is visible at the very bottom, showing icons for Windows, DEV, Chrome, File Explorer, Calculator, Zoom, and other applications. The system clock in the bottom right corner shows "05:46 PM" and "20-Mar-25".

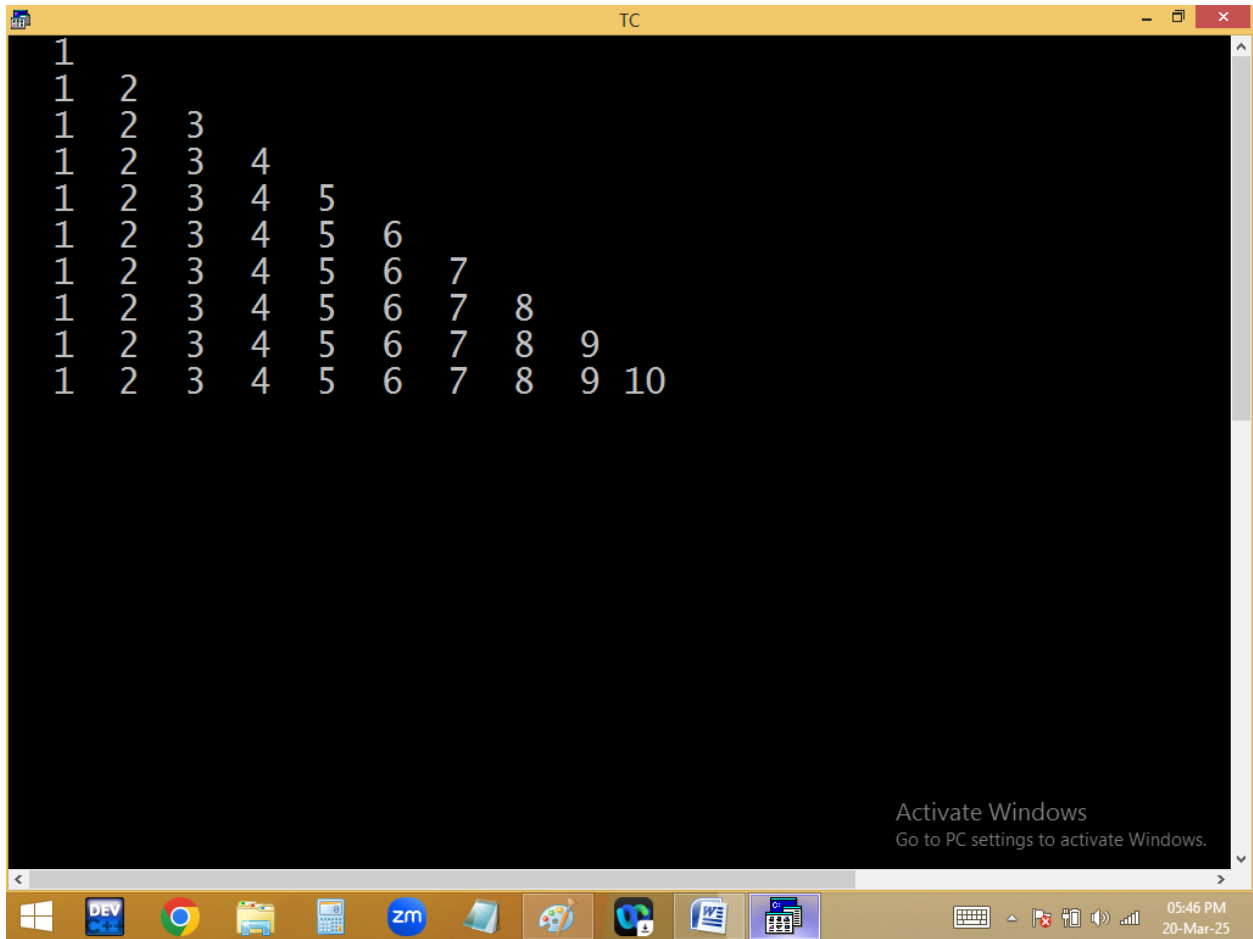


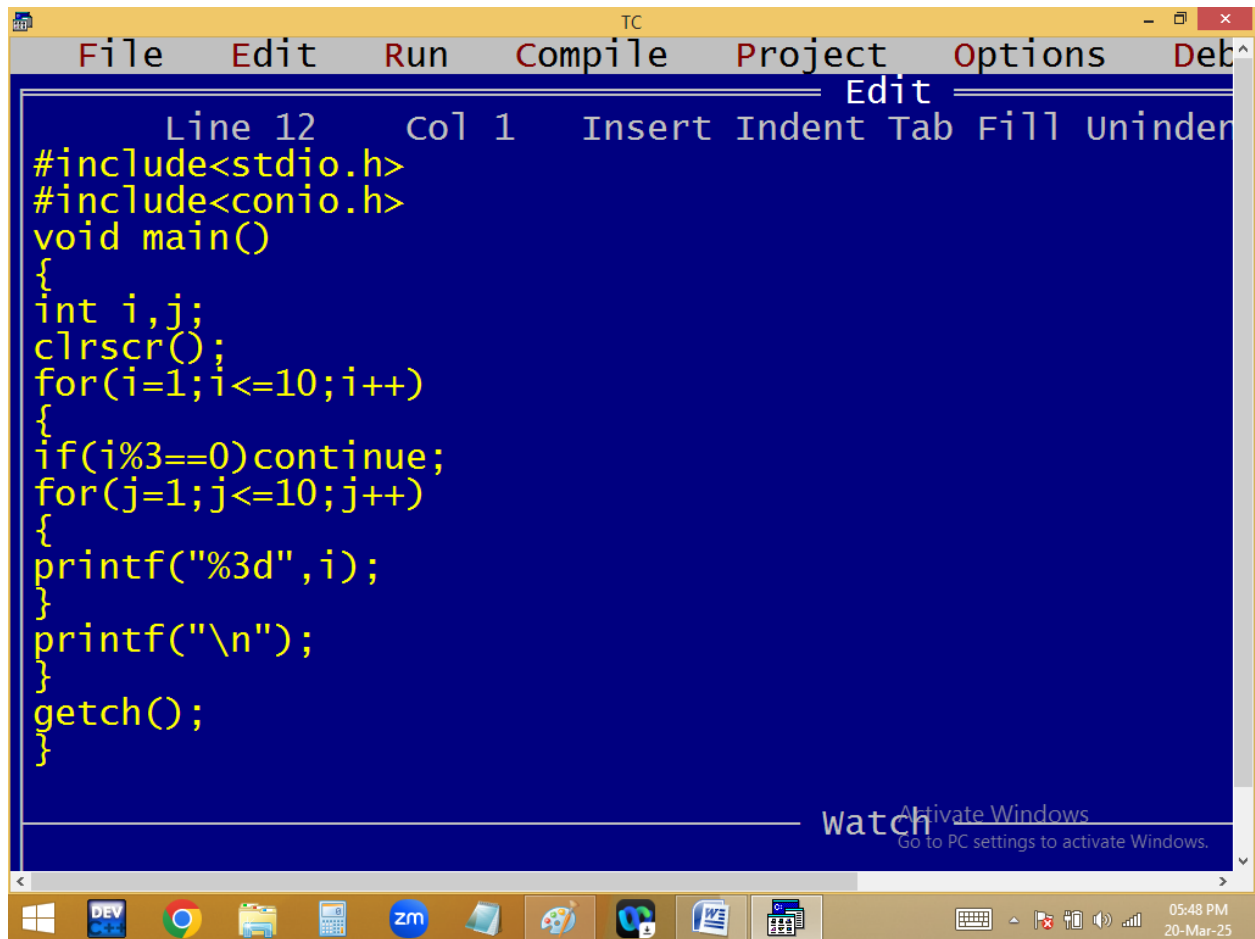


```
TC
File Edit Run Compile Project Options Debug
Line 12 Col 1 Insert Indent Tab Fill Underline
#include<stdio.h>
#include<conio.h>
void main()
{
    int i,j;
    clrscr();
    for(i=1;i<=10;i++)
    {
        if(i%3==0)continue;
        for(j=1;j<=10;j++)
        {
            printf("%3d",i);
            printf("\n");
        }
    }
    getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

Windows taskbar: DEV, Chrome, File Explorer, Calculator, Zoom, Paint, VS Code, Word, Excel, System tray (05:48 PM, 20-Mar-25)

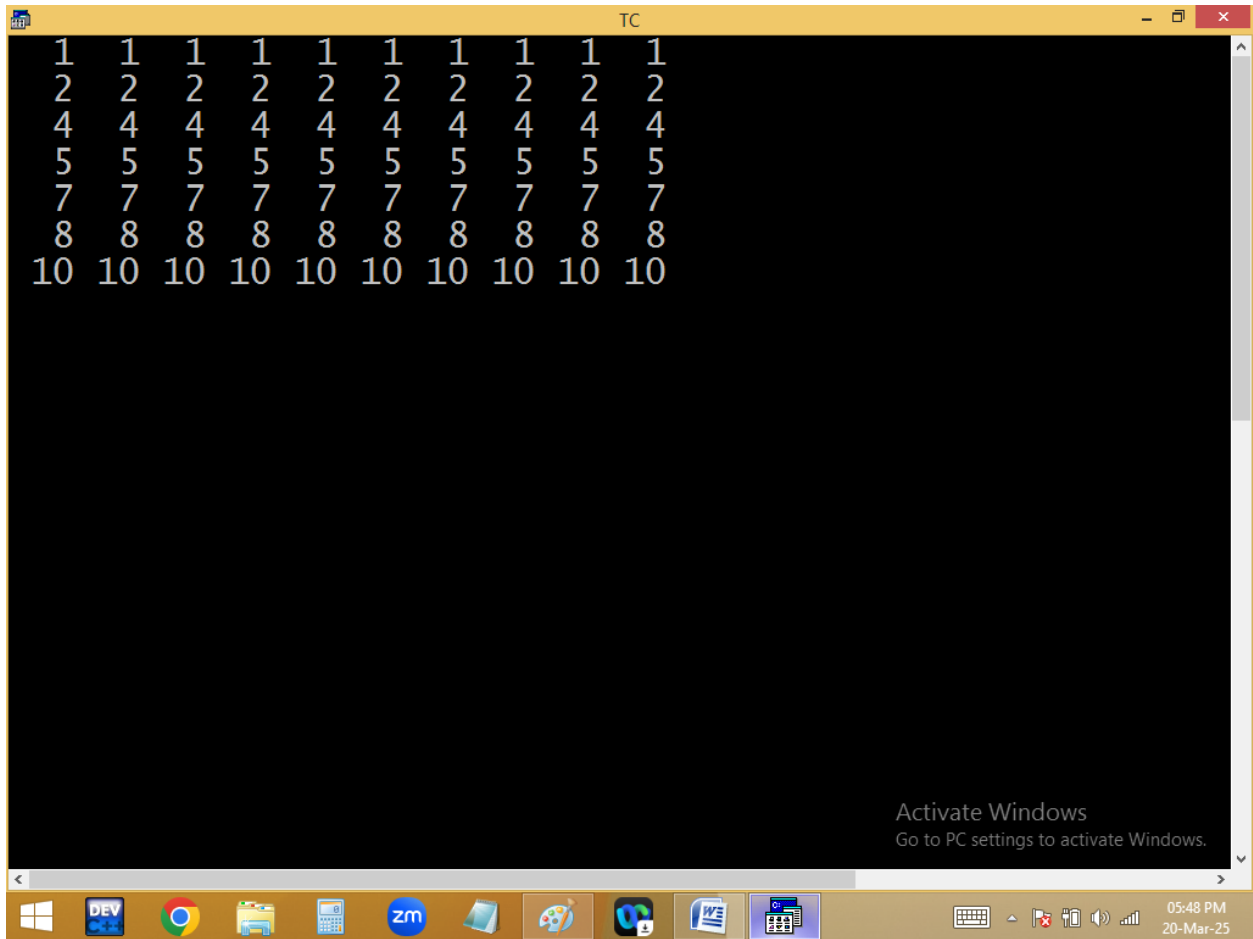

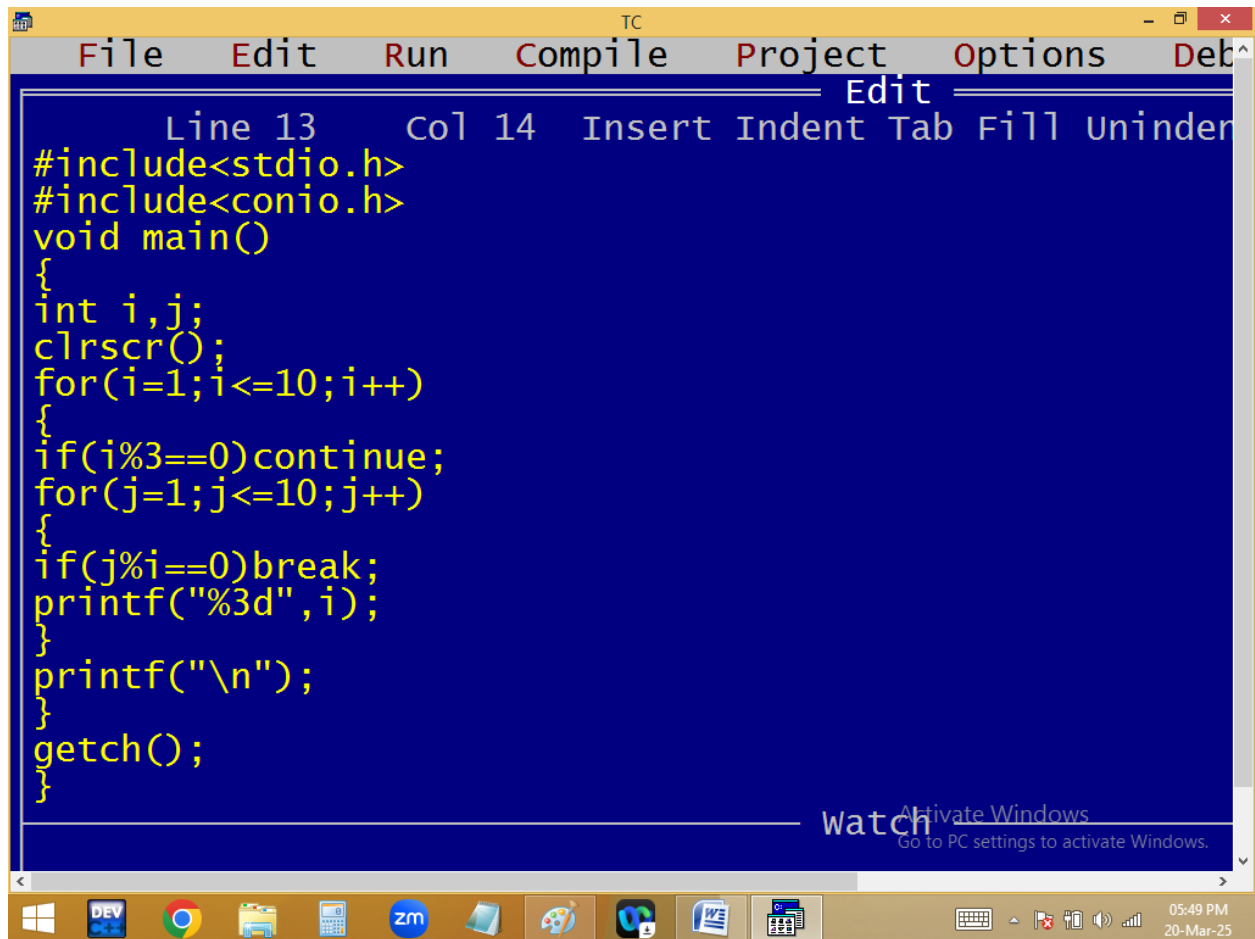

```
TC
File Edit Run Compile Project Options Debug
Line 13 Col 14 Insert Indent Tab Fill Underline
#include<stdio.h>
#include<conio.h>
void main()
{
    int i,j;
    clrscr();
    for(i=1;i<=10;i++)
    {
        if(i%3==0)continue;
        for(j=1;j<=10;j++)
        {
            if(j%i==0)break;
            printf("%3d",i);
            printf("\n");
        }
    }
    getch();
}
```

watch

Activate Windows
Go to PC settings to activate Windows.

05:49 PM
20-Mar-25

