


Pass word creation:

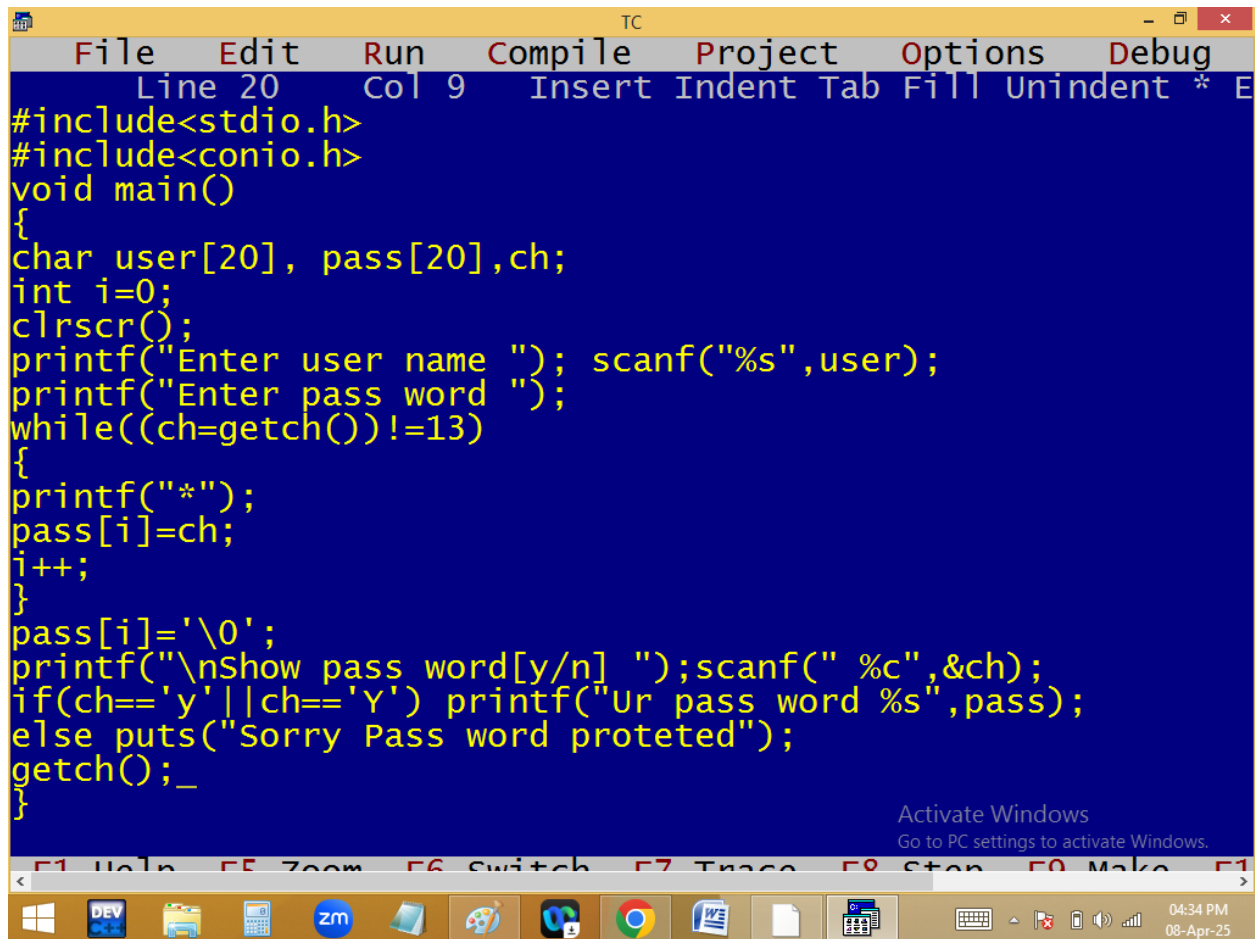


```
TC
File Edit Run Compile Project Options Debug
Line 20 Col 9 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
char user[20], pass[20],ch;
int i=0;
clrscr();
printf("Enter user name "); scanf("%s",user);
printf("Enter pass word ");
while((ch=getch())!=13)
{
printf("*");
pass[i]=ch;
i++;
}
pass[i]='\0';
printf("\nShow pass word[y/n] ");scanf(" %c",&ch);
if(ch=='y' || ch=='Y') printf("Ur pass word %s",pass);
else puts("Sorry Pass word proteted");
getch();_
}
```

Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

04:34 PM
08-Apr-25

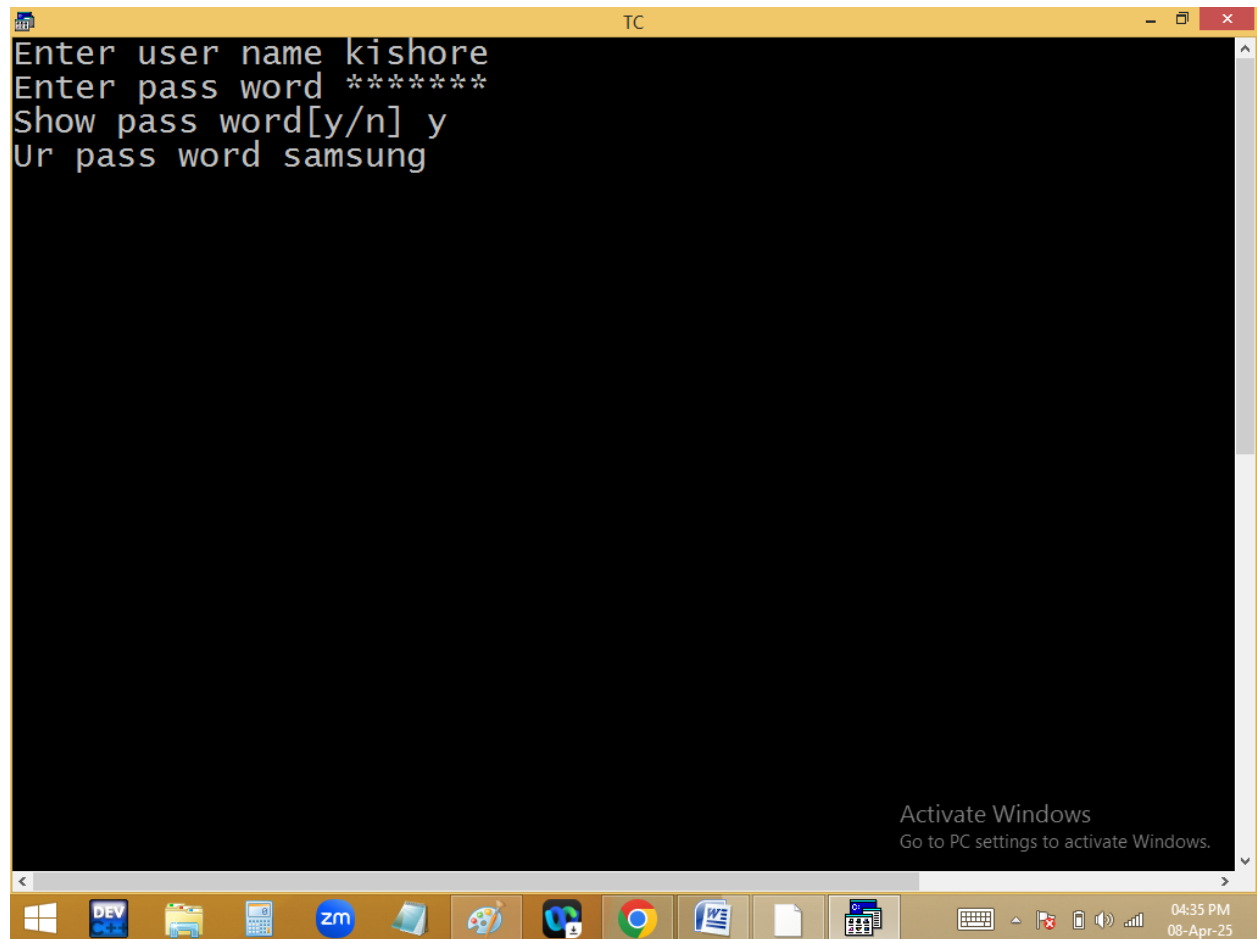

```
TC
Enter user name abcdef
Enter pass word *****
Show pass word[y/n] n
Sorry Pass word proteted
```

Activate Windows
Go to PC settings to activate Windows.


Character frequency:

Banana →

B – 1

a – 3

n – 2

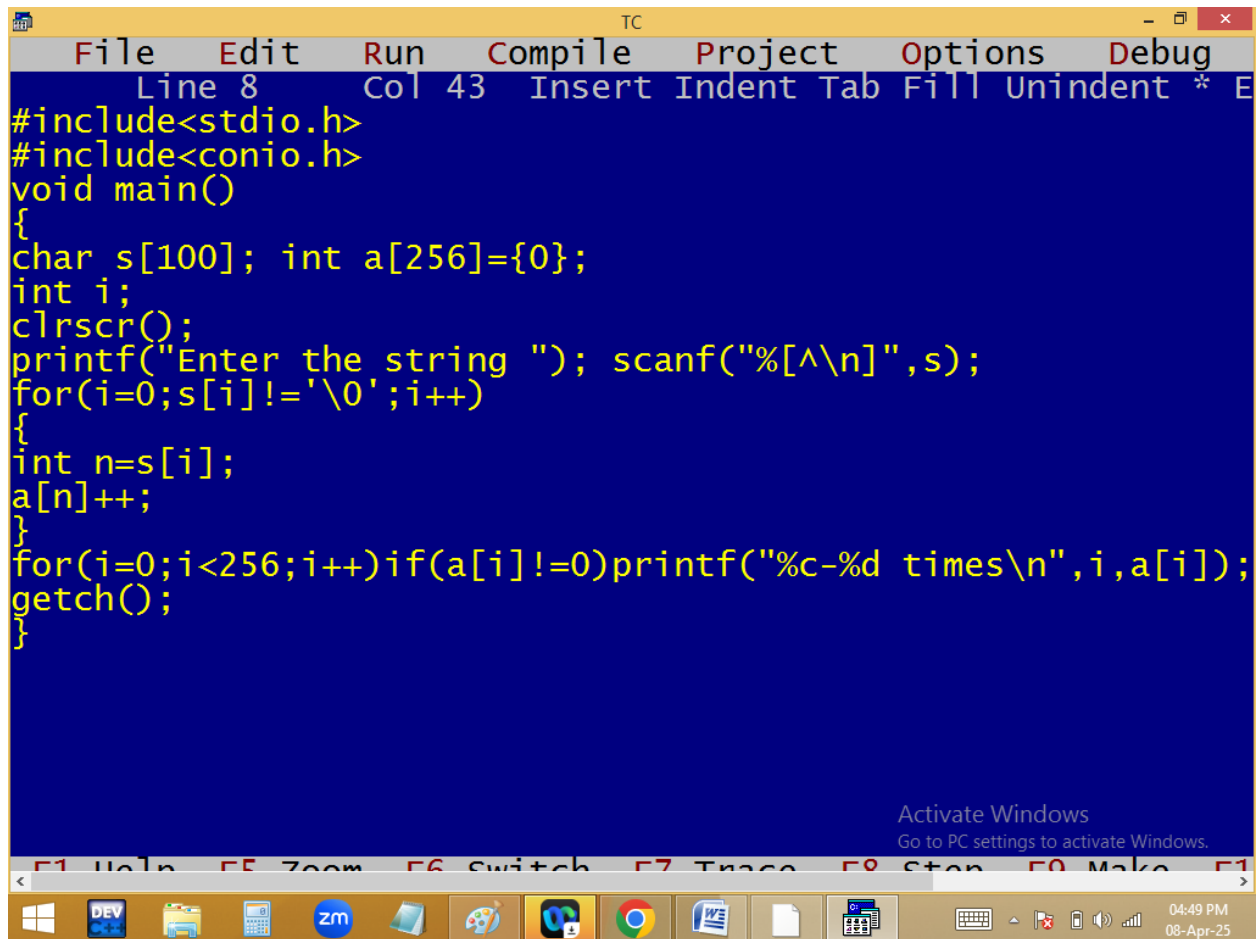

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, the status bar shows "Line 8", "Col 43", and a list of keyboard shortcuts: "Insert", "Indent", "Tab", "Fill", "Unindent", "*", and "E". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
void main()
{
char s[100]; int a[256]={0};
int i;
clrscr();
printf("Enter the string "); scanf("%[^\n]",s);
for(i=0;s[i]!='\0';i++)
{
int n=s[i];
a[n]++;
}
for(i=0;i<256;i++)if(a[i]!=0)printf("%c-%d times\n",i,a[i]);
getch();
}
```

At the bottom of the window, there is a taskbar with various application icons including Windows, DEV, a folder, a calculator, a Zoom icon, a paint palette, a code editor, Google Chrome, a document, and a calendar. The system tray on the right shows the time "04:49 PM" and the date "08-Apr-25". An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.

Title Case [**C**apitalize **E**ach **W**ord]:

Title Case [**C**apitalize **E**ach **W**ord]:

```
TC
File Edit Run Compile Project Options Debug
Line 11 Col 11 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
char s[100]; int i;
clrscr();
printf("Enter the string "); scanf("%[^\n]",s);
for(i=0;s[i]!='\0';i++)
if(s[i]>='A' && s[i]<='Z') s[i]+=32;/*lower */
if(s[0]>='a'&&s[0]<='z')s[0]-=32;
for(i=1; s[i]!='\0';i++)
{
if(s[i]==' ' &&s[i+1]>='a'&&s[i+1]<='z')s[i+1]-=32;
}
printf("Converted string %s",s);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

04:59 PM
08-Apr-25


```
TC
Enter the string narESH IT AMEerpet hyderABAD.
Converted string Naresh It Ameerpet Hyderabad.
```

Activate Windows
Go to PC settings to activate Windows.

05:00 PM
08-Apr-25


TOGGLE cASE:

```
TC
File Edit Run Compile Project Options Debug
Line 14 Col 47 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
void main()
{
char s[100]; int i;
clrscr();
printf("Enter the string "); scanf("%[^\n]",s);
for(i=0;s[i]!='\0';i++)
if(s[i]>='a' && s[i]<='z') s[i]-=32;/*upper */
if(s[0]>='A'&&s[0]<='Z')s[0]+=32;
for(i=1; s[i]!='\0';i++)
{
if(s[i]==' ' && s[i+1]>='A'&&s[i+1]<='Z')s[i+1]+=32;
}
printf("Converted string %s",s);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

05:03 PM
08-Apr-25

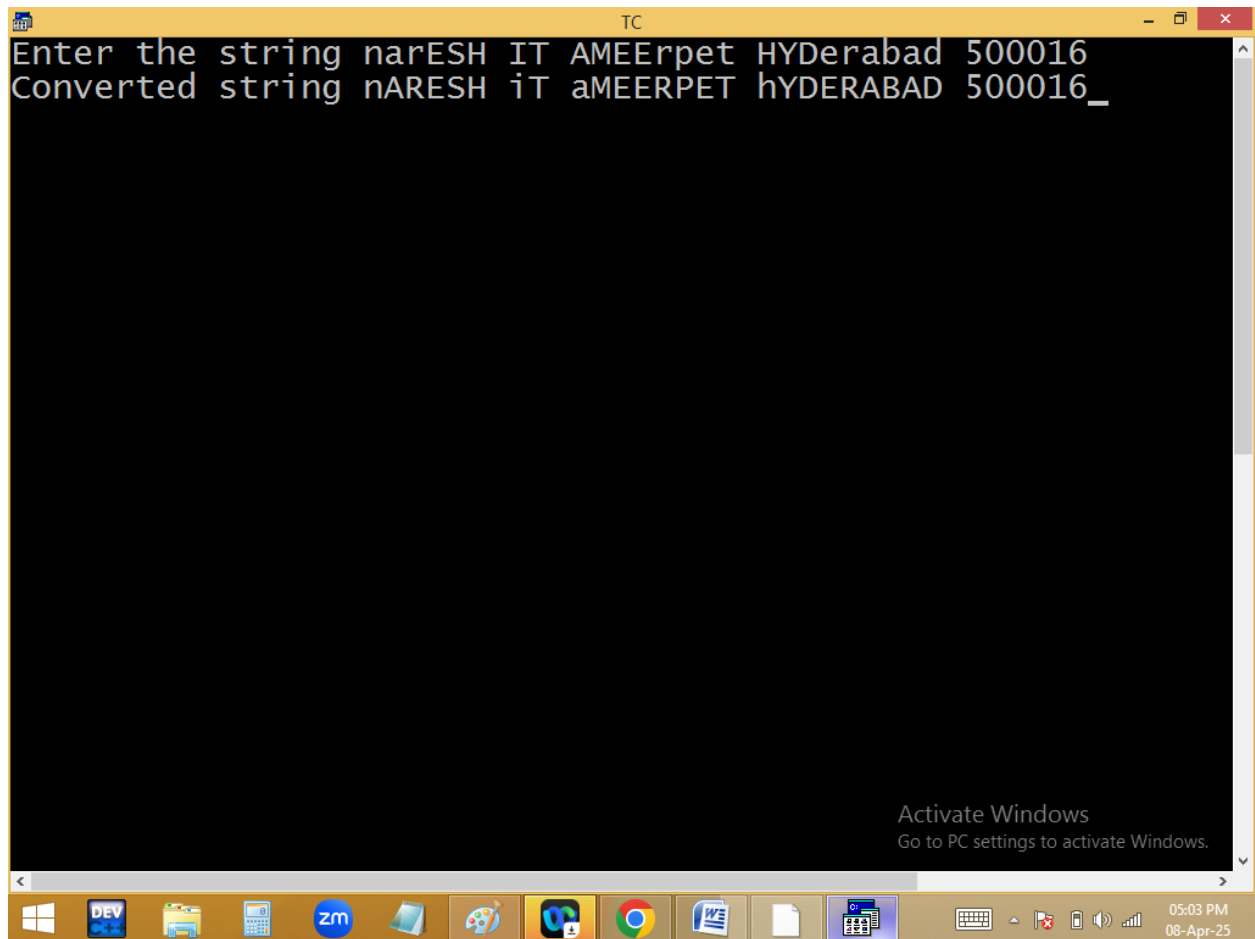

The screenshot shows a Turbo C++ (TC) window with a yellow title bar. The text inside the window is as follows:

```
Enter the string narESH IT AMEERpet HYDerabad 500016
Converted string nARESH iT aMEERPET HYDERABAD 500016_
```

An "Activate Windows" watermark is visible in the bottom right corner of the window. The Windows taskbar at the bottom includes icons for Windows, DEV, File Explorer, Calculator, Zoho Mail, a folder, Paint, VS Code, Chrome, Word, a document, and a calculator. The system tray on the right shows the time as 05:03 PM on 08-Apr-25.


Using predefined functions:

```
TC
File Edit Run Compile Project Options Debug
Line 15 Col 54 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
#include<string.h>
#include<ctype.h>
void main()
{
char s[100]; int i;
clrscr();
printf("Enter the string "); scanf("%[^\n]",s);
for(i=0;s[i]!='\0';i++)
strupr(s); /*upper */
s[0]=tolower(s[0]);
for(i=1; s[i]!='\0';i++)
{
if(s[i]==' ' && s[i+1]>='A' && s[i+1]<='Z') s[i+1]=tolower(s[i+1])
}
printf("Converted string %s",s);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

05:07 PM
08-Apr-25

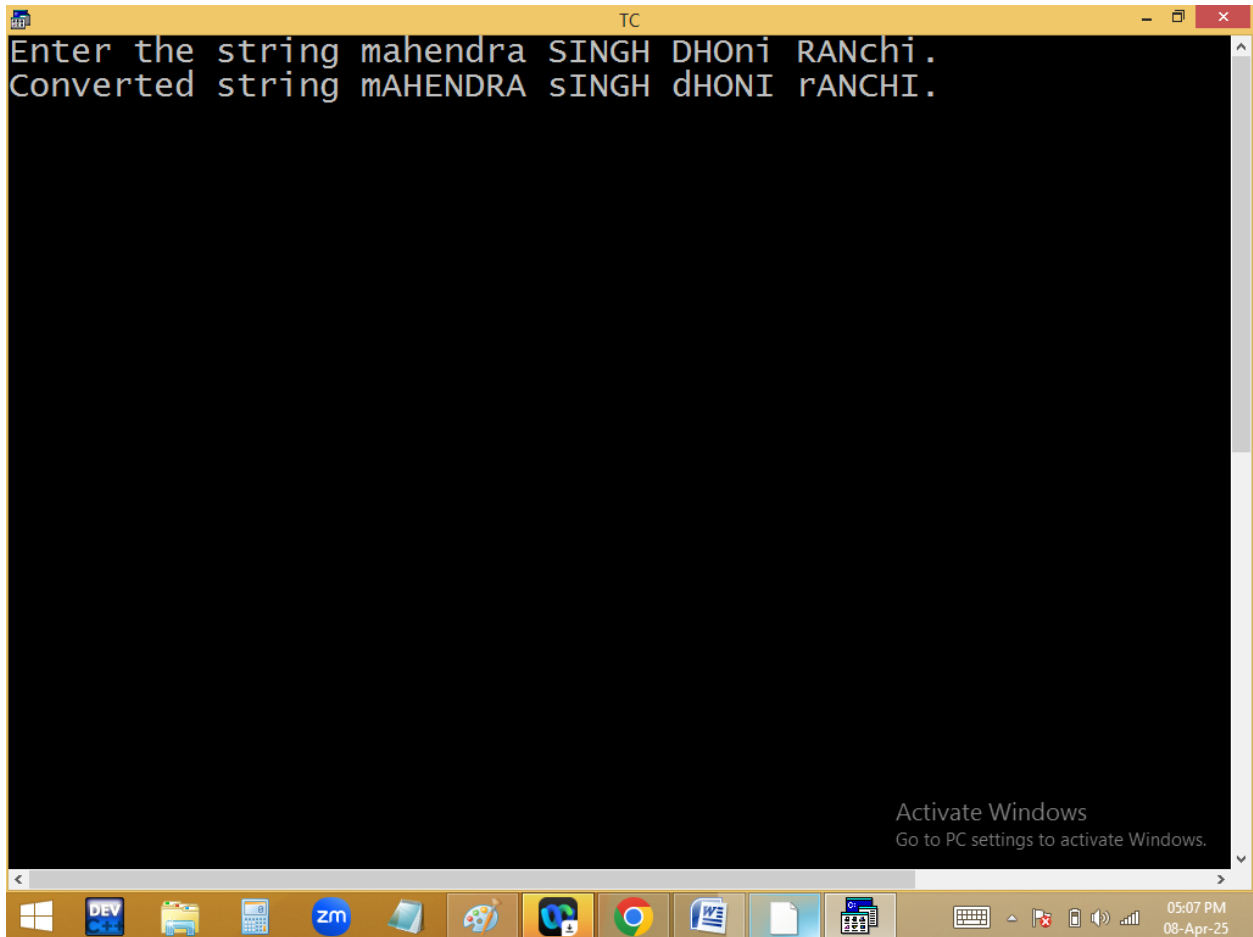


The screenshot shows a Turbo C++ (TC) window with a black background and white text. The text displays the input string 'mahendra SINGH DHONI RANChi.' and the output string 'mAHENDRA SINGH dHONI rANCHI.', demonstrating the effect of the `strupr()` function. The window title bar reads 'TC'. The Windows taskbar at the bottom includes icons for DEV, File Explorer, Calculator, Zoom, and other applications, along with the system clock showing 05:07 PM on 08-Apr-25.

```
Enter the string mahendra SINGH DHONI RANChi.  
Converted string mAHENDRA SINGH dHONI rANCHI.
```

String library functions:

To make string operations easy, the c language provides some predefined string functions available in `<string.h>`


- 1.Strlen(): Returns the string length.
- 2.Strrev(): Reverse the string.
- 3.Strlwr(): converts into lower case.
- 4.Strupr(): converts into upper case.

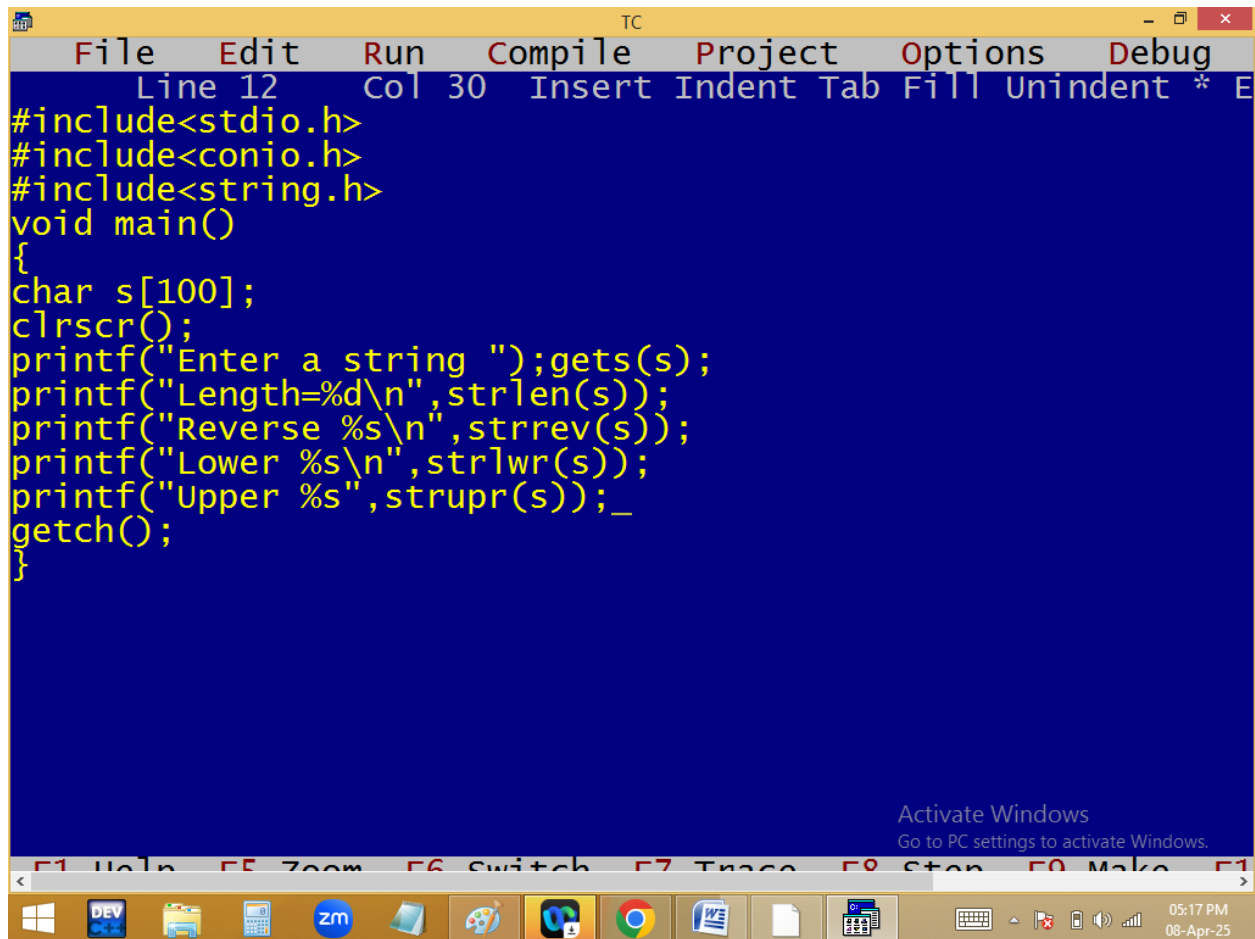

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar at the top reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, the status bar shows "Line 12", "Col 30", and a list of editing actions: "Insert", "Indent", "Tab", "Fill", "Unindent", "*", and "E". The main editing area has a blue background and contains the following C code:

```
#include<stdio.h>
#include<conio.h>
#include<string.h>
void main()
{
char s[100];
clrscr();
printf("Enter a string ");gets(s);
printf("Length=%d\n",strlen(s));
printf("Reverse %s\n",strrev(s));
printf("Lower %s\n",strlwr(s));
printf("Upper %s",strupr(s));_
getch();
}
```

At the bottom of the window, there is a taskbar with various application icons including Windows, DEV, a folder, a calculator, a ZOOM icon, a paint palette, a code editor, a Chrome browser, a Word document, and a file explorer. On the right side of the taskbar, the system clock displays "05:17 PM" and "08-Apr-25". An "Activate Windows" watermark is visible in the bottom right corner of the IDE window, with the text "Go to PC settings to activate Windows."

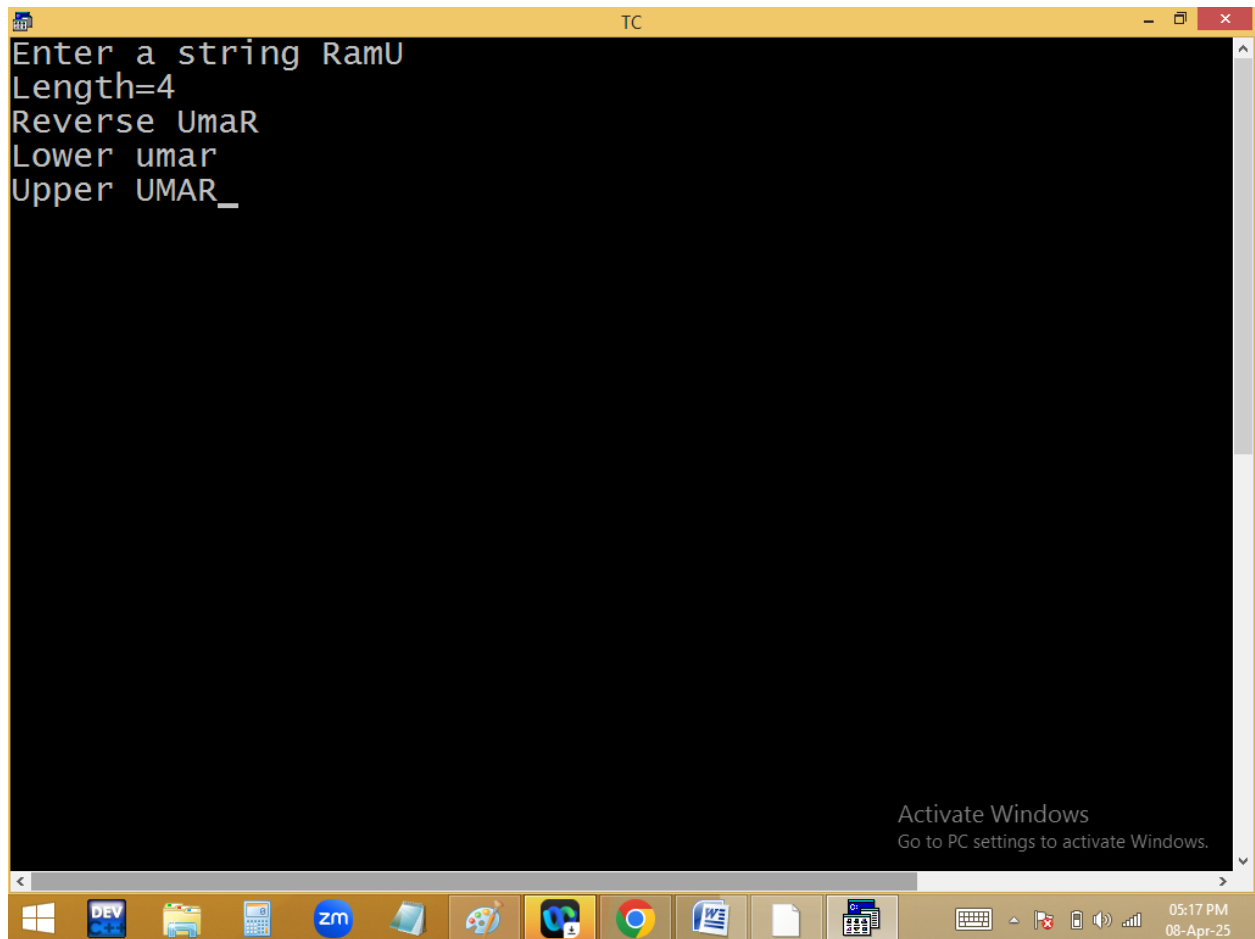

The screenshot shows a Turbo C++ (TC) window with a black background and white text. The text displays the results of a program that takes the string 'RamU' and performs several operations: reversing it to 'UmaR', converting it to lowercase to 'umar', and converting it to uppercase to 'UMAR_'. The window title is 'TC'. The Windows taskbar at the bottom shows various icons and the system clock indicating 05:17 PM on 08-Apr-25.


```
Enter a string RamU
Length=4
Reverse UmaR
Lower umar
Upper UMAR_
```

strcpy(): copies the source string into destination string.

Strcpy(destination string, source string);

Strncpy(): It copies specified no of char into destination string.

strncpy(destination string, source string, no of characters);

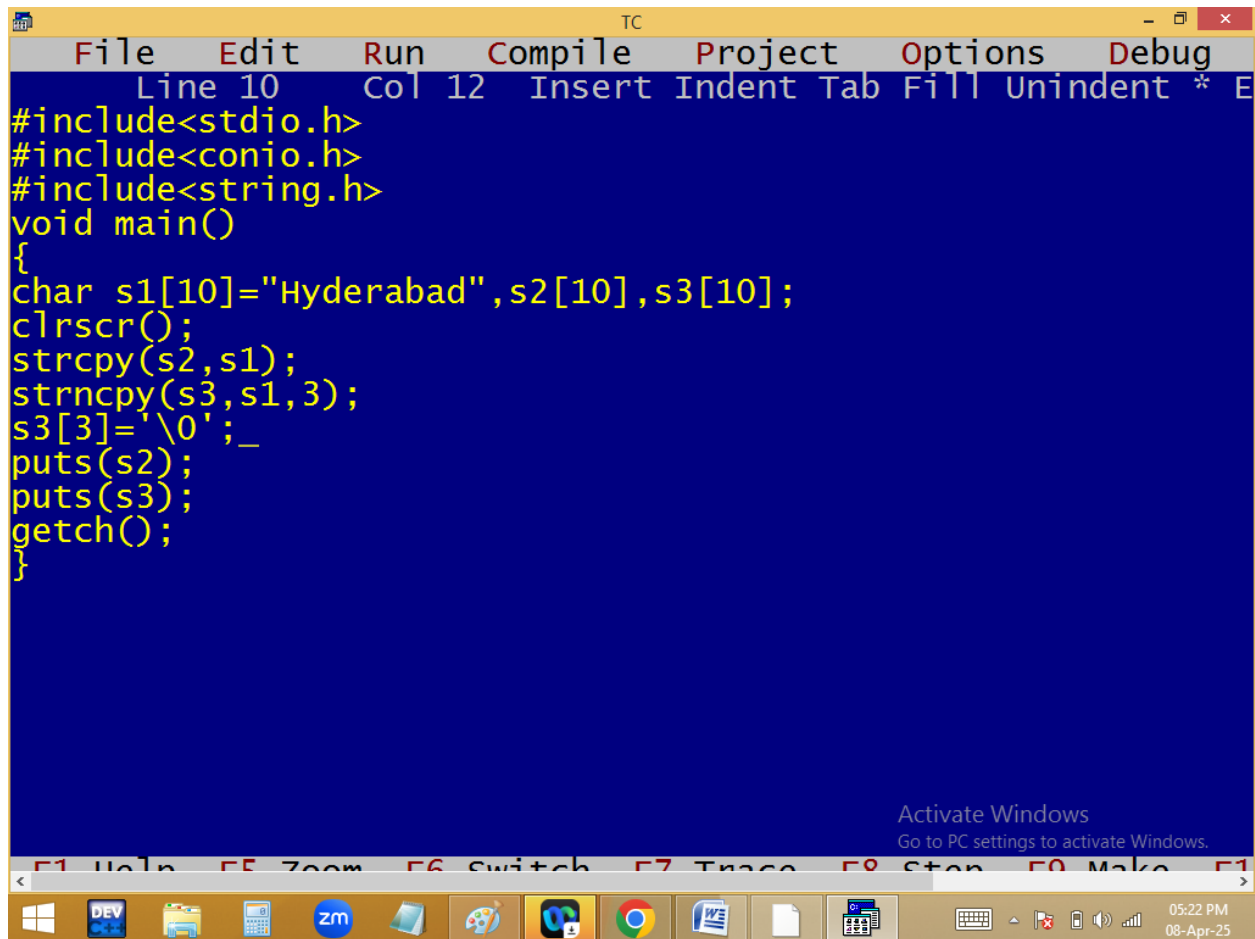


```
File Edit Run Compile Project Options Debug
Line 10 Col 12 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
#include<string.h>
void main()
{
char s1[10]="Hyderabad",s2[10],s3[10];
clrscr();
strcpy(s2,s1);
strncpy(s3,s1,3);
s3[3]='\0';
puts(s2);
puts(s3);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

05:22 PM
08-Apr-25

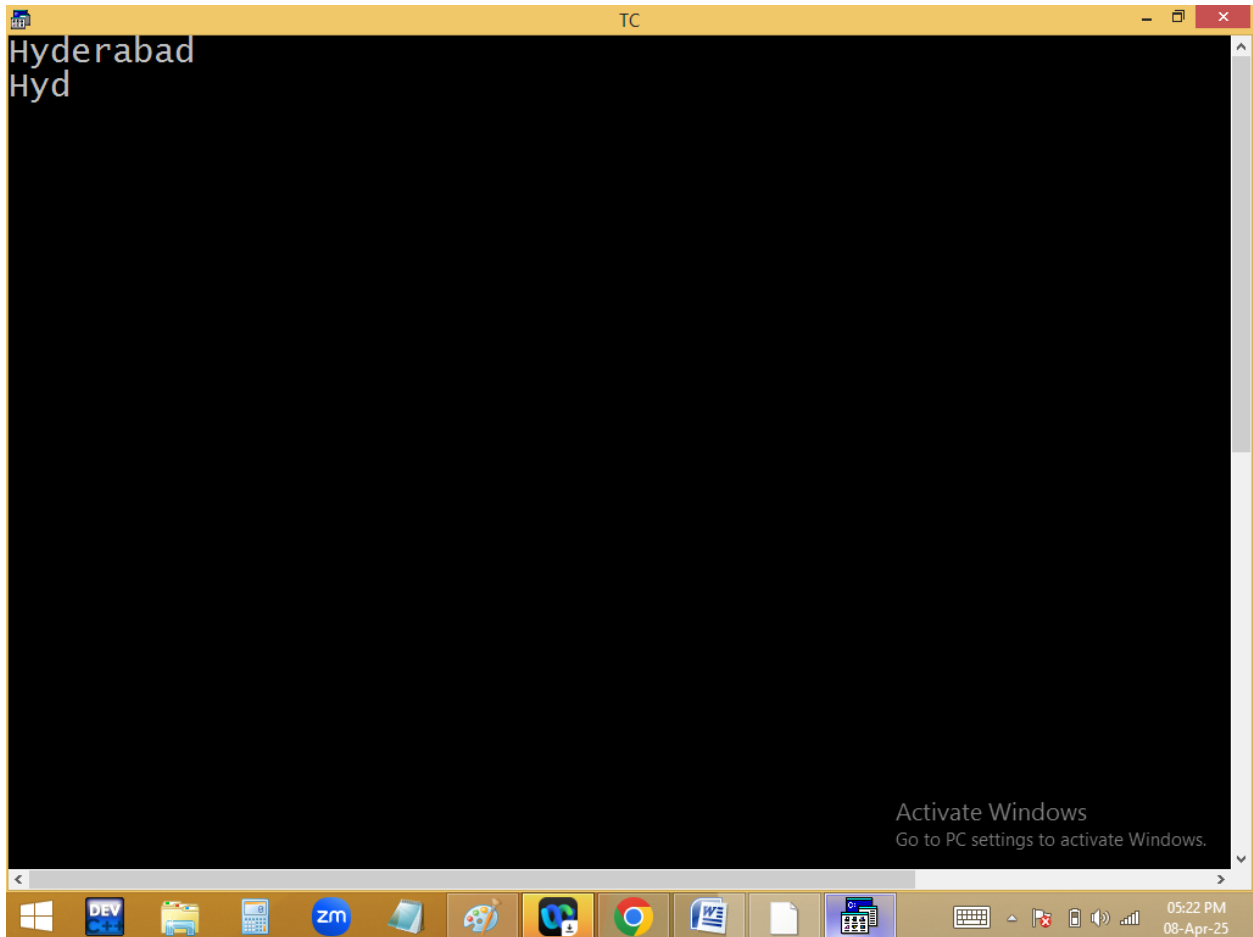


Strcat(): It adds string2 to string1.

Strcat(string1, string2);

Strncat(): It adds specified no of char's to string1.


Strncat(string1, string2, no of char's);

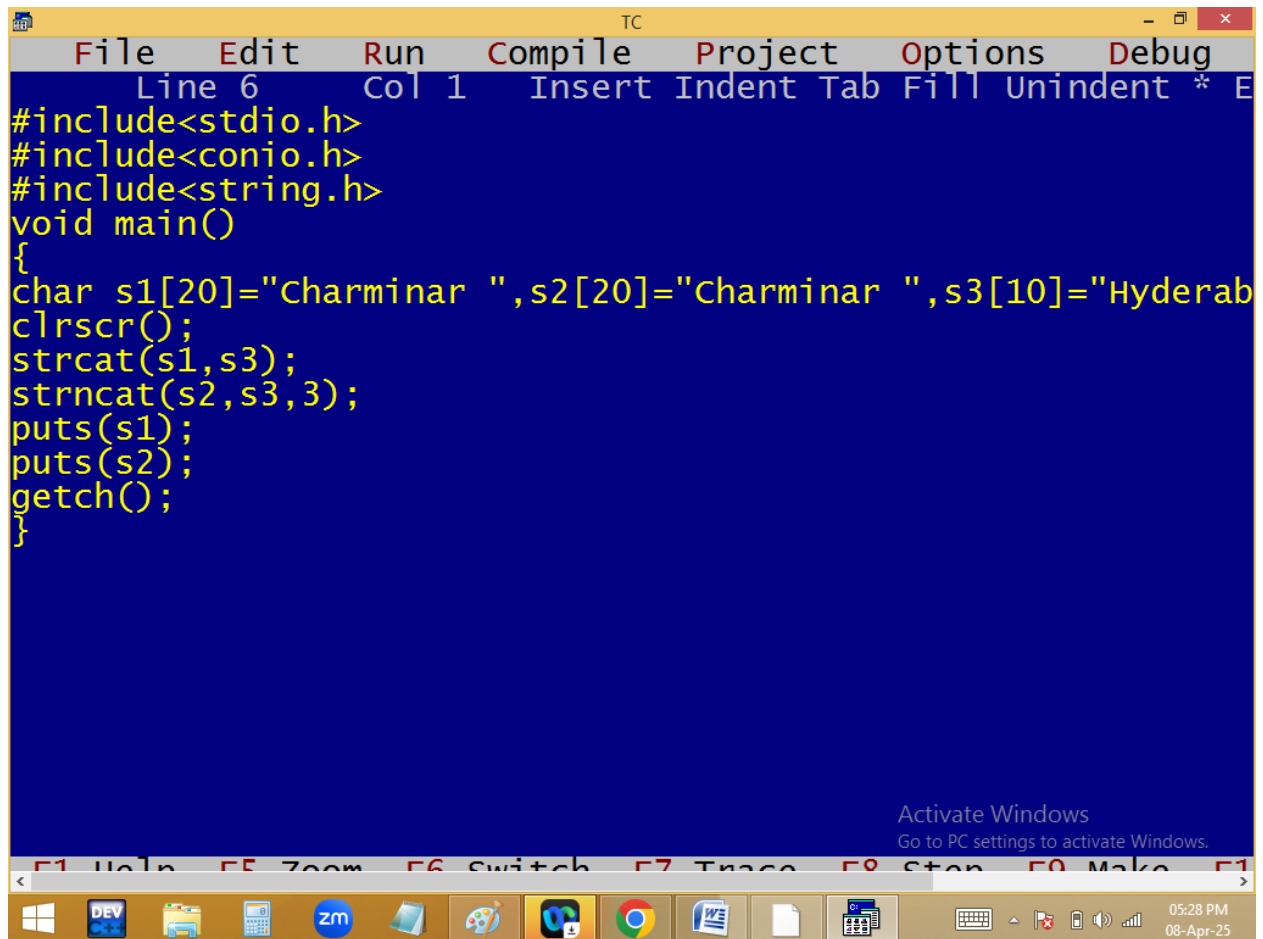

The image shows a screenshot of a Turbo C++ (TC) IDE window. The title bar reads "TC". The menu bar includes "File", "Edit", "Run", "Compile", "Project", "Options", and "Debug". Below the menu bar, a status bar shows "Line 6", "Col 1", and a list of editing actions: "Insert", "Indent", "Tab", "Fill", "Unindent", "*", and "E". The main editing area has a dark blue background with yellow text. The code is as follows:

```
#include<stdio.h>
#include<conio.h>
#include<string.h>
void main()
{
char s1[20]="Charminar ",s2[20]="Charminar ",s3[10]="Hyderab
clrscr();
strcat(s1,s3);
strncat(s2,s3,3);
puts(s1);
puts(s2);
getch();
}
```


At the bottom of the IDE window, there is a text box that says "Activate Windows" and "Go to PC settings to activate Windows." Below the IDE window is the Windows taskbar, which contains icons for Windows, DEV, File Explorer, Calculator, Zoom, Paint, VS Code, Chrome, Word, and a folder icon. The system tray on the right shows the time as "05:28 PM" and the date as "08-Apr-25".

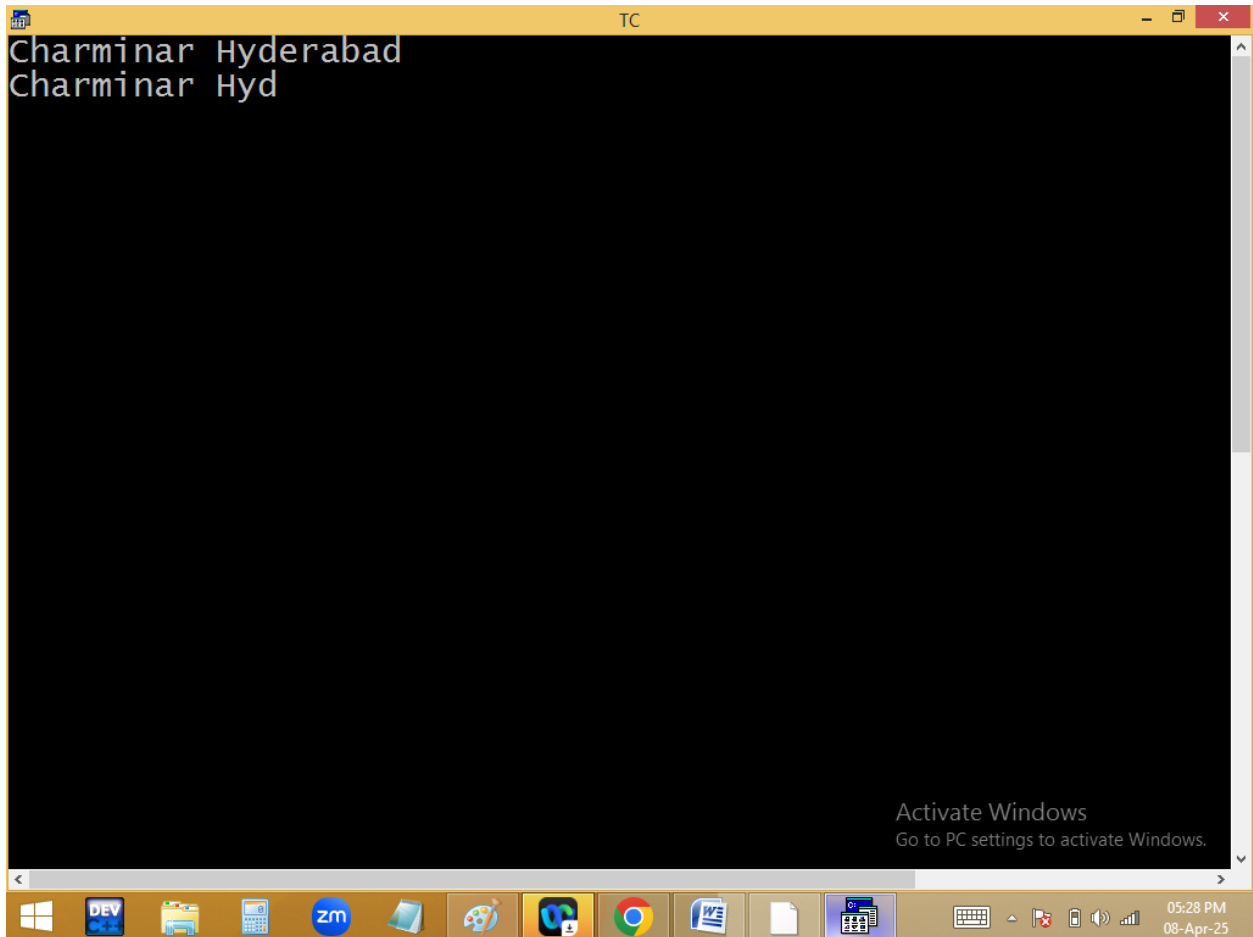

```
TC
Charminar Hyderabad
Charminar Hyd
```

Strcmp(): It compare two strings based on ascii difference. When first difference found, it is not going to check the remaining string.

Strcmp(string1, string2);

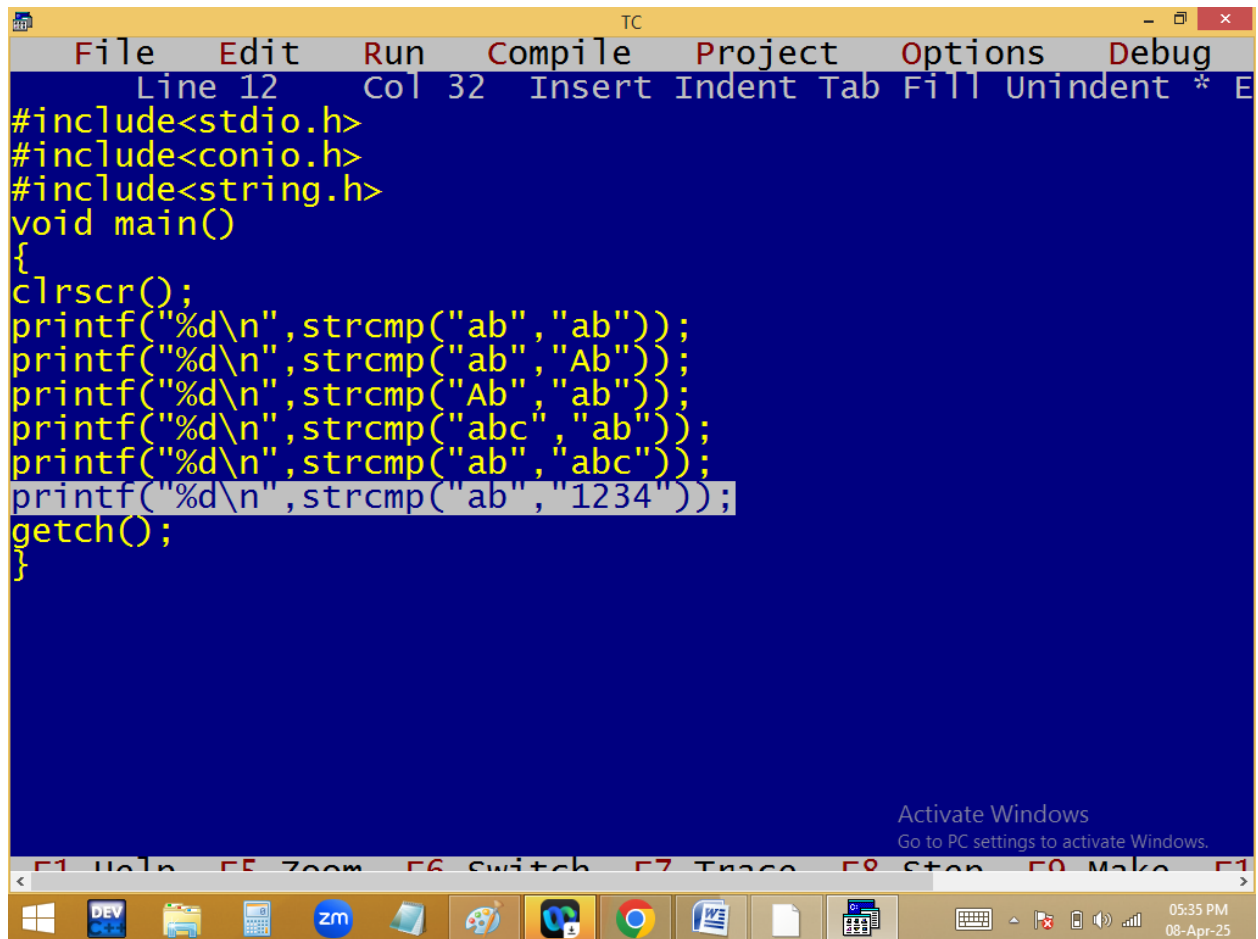


```
TC
File Edit Run Compile Project Options Debug
Line 12 Col 32 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
#include<string.h>
void main()
{
clrscr();
printf("%d\n",strcmp("ab","ab"));
printf("%d\n",strcmp("ab","Ab"));
printf("%d\n",strcmp("Ab","ab"));
printf("%d\n",strcmp("abc","ab"));
printf("%d\n",strcmp("ab","abc"));
printf("%d\n",strcmp("ab","1234"));
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

05:35 PM
08-Apr-25

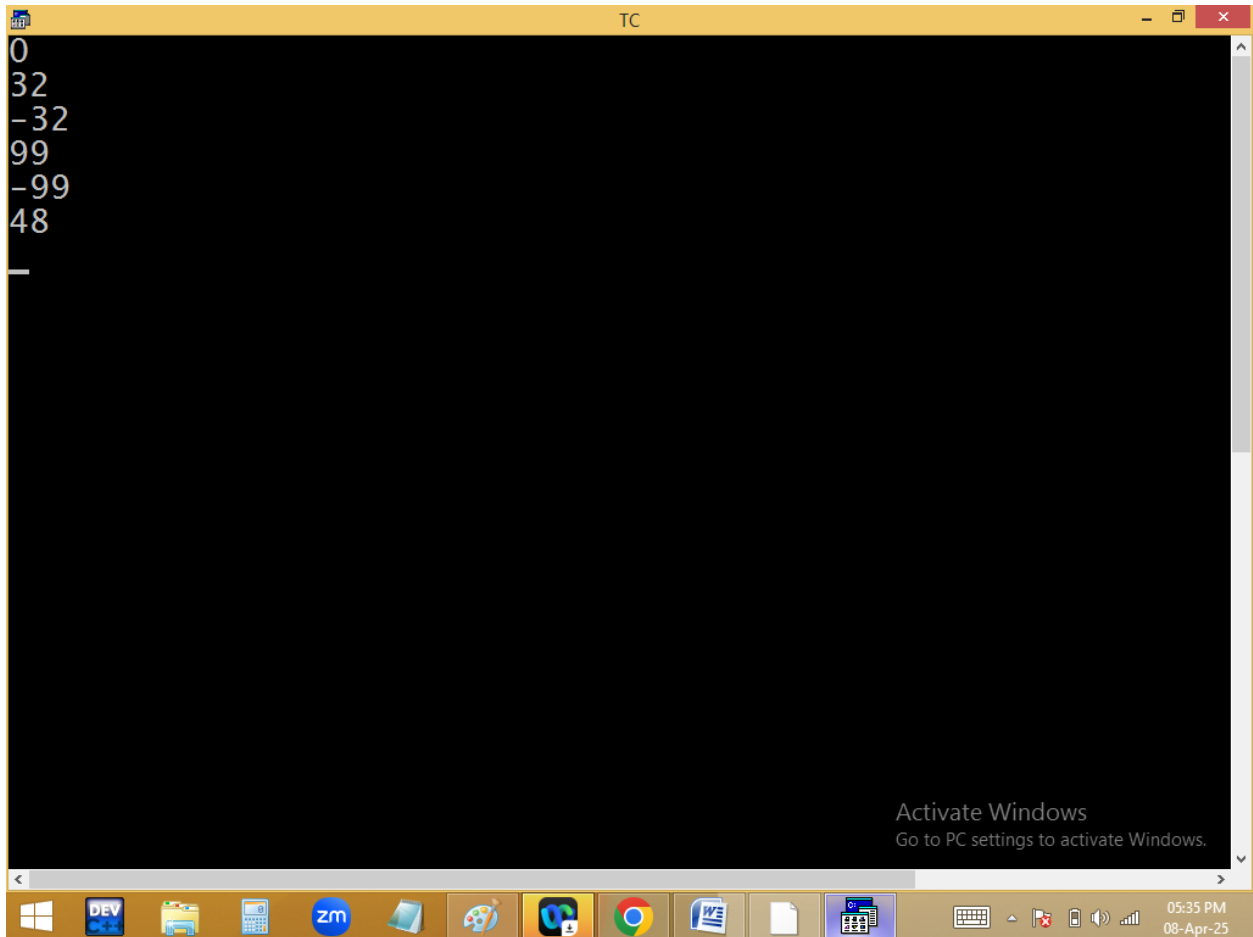


```
0
32
-32
99
-99
48

```

Stricmp(): It compare two strings by ignoring case. i.e. in stricmp() lower and upper are same. When matching char not found in 2nd string or different data type found in 2nd string, the first string char taken in upper case.

Stricmp(string1, string2);

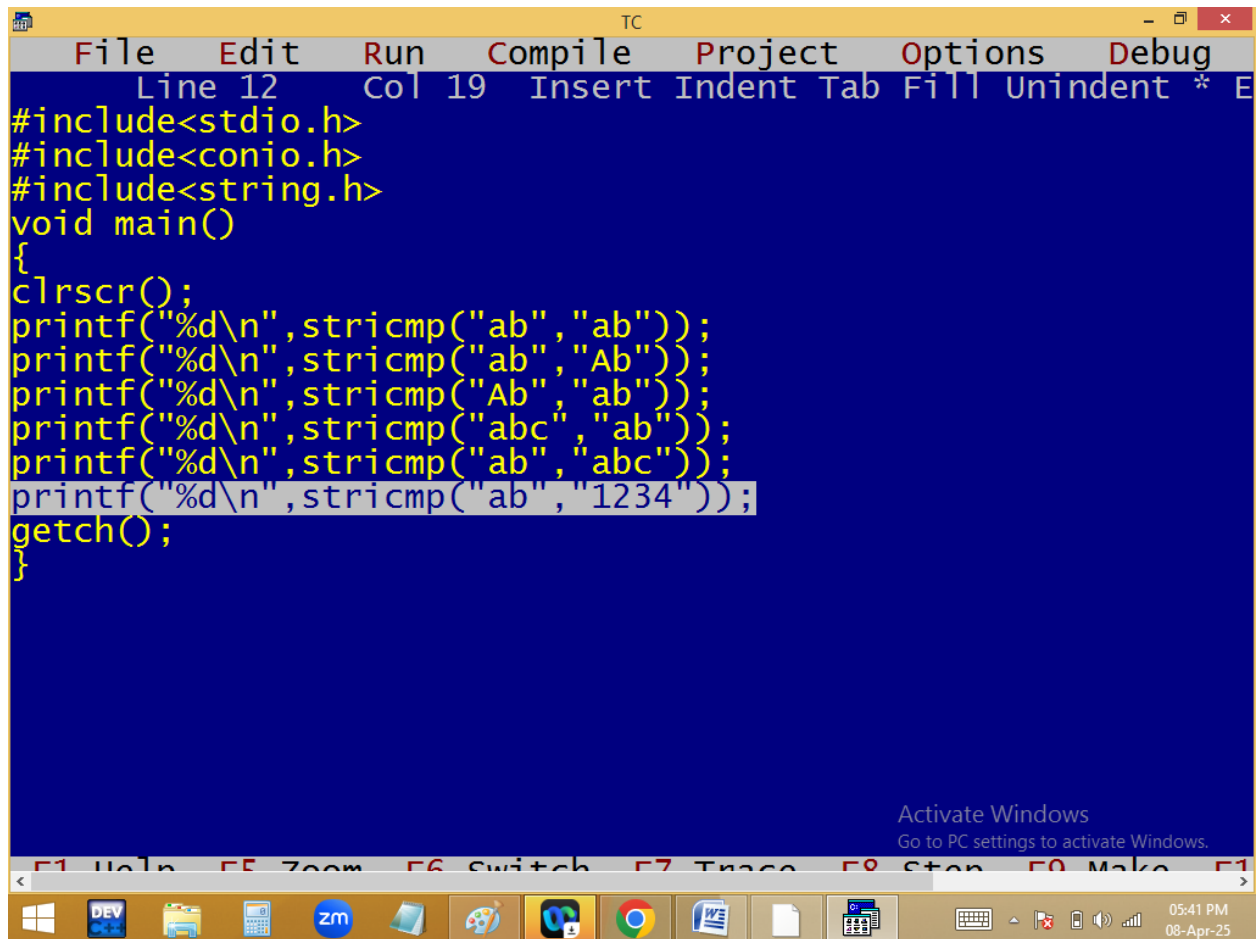


```
TC
File Edit Run Compile Project Options Debug
Line 12 Col 19 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
#include<string.h>
void main()
{
clrscr();
printf("%d\n",strcmp("ab","ab"));
printf("%d\n",strcmp("ab","Ab"));
printf("%d\n",strcmp("Ab","ab"));
printf("%d\n",strcmp("abc","ab"));
printf("%d\n",strcmp("ab","abc"));
printf("%d\n",strcmp("ab","1234"));
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10


05:41 PM
08-Apr-25

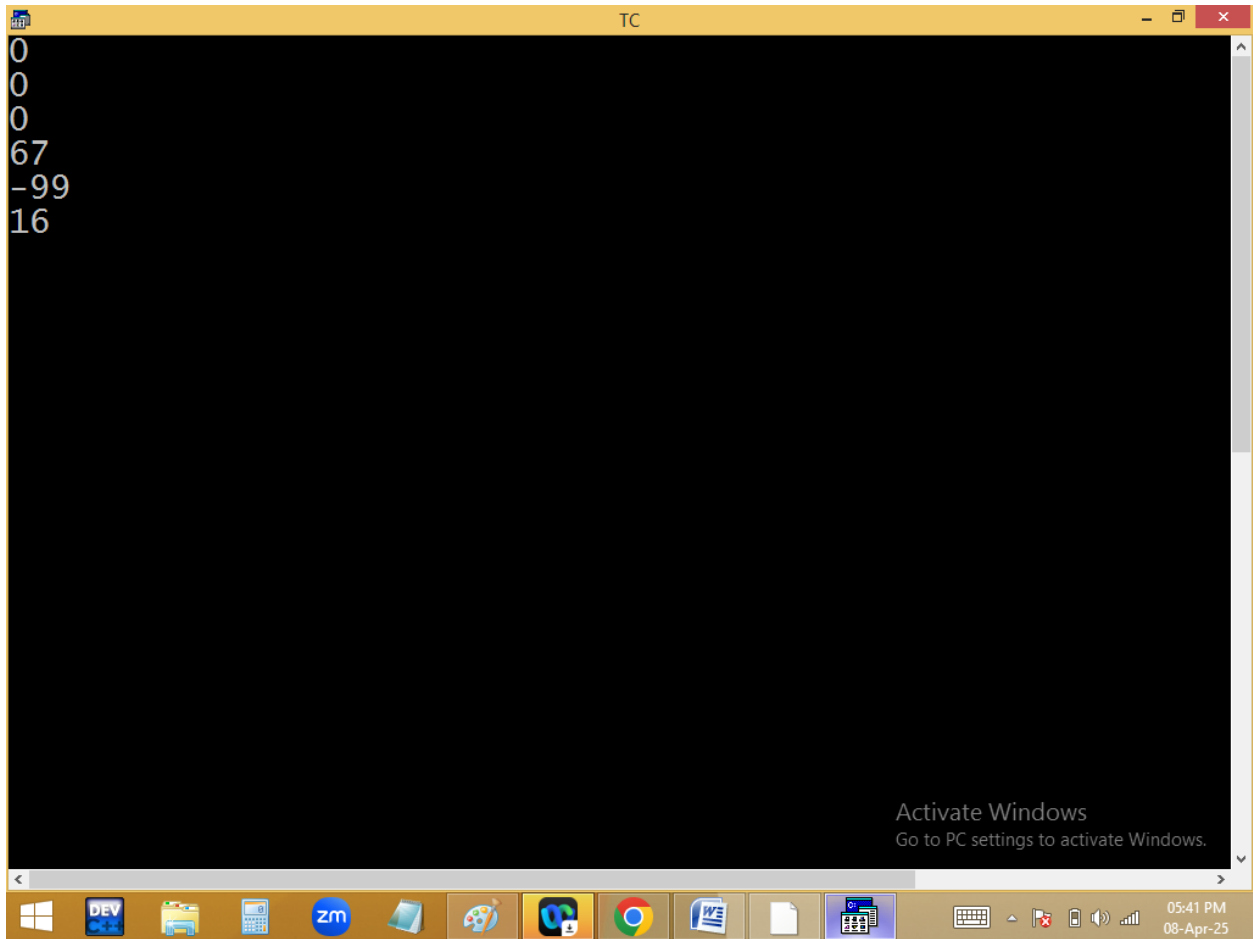

```
000067-9916
```

strstr(): It returns the substring address in main string. If sub string not found, it return (null) = 0.

Strstr(main string, sub string);

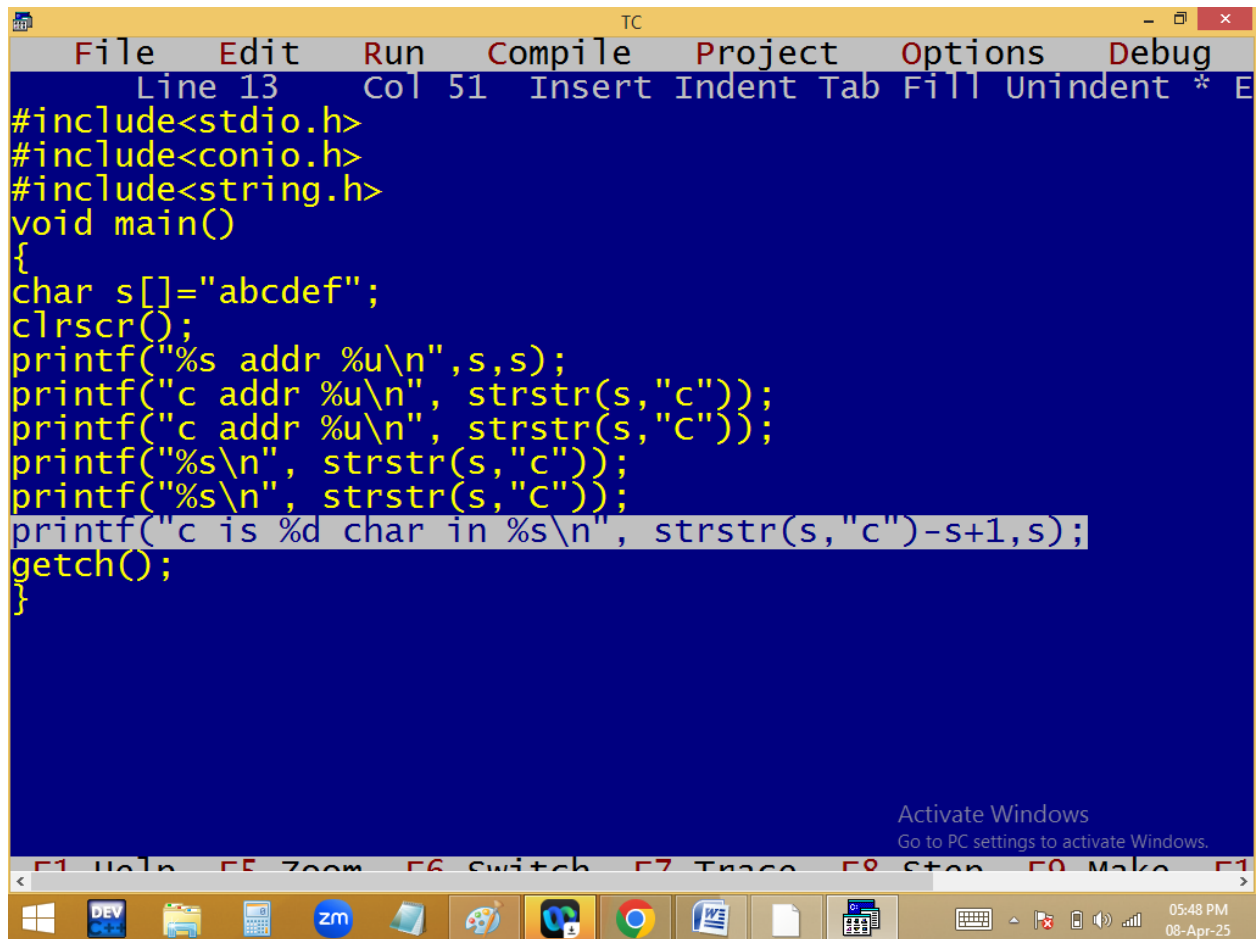

```
TC
File Edit Run Compile Project Options Debug
Line 13 Col 51 Insert Indent Tab Fill Unindent * E
#include<stdio.h>
#include<conio.h>
#include<string.h>
void main()
{
char s[]="abcdef";
clrscr();
printf("%s addr %u\n",s,s);
printf("c addr %u\n", strstr(s,"c"));
printf("c addr %u\n", strstr(s,"c"));
printf("%s\n", strstr(s,"c"));
printf("%s\n", strstr(s,"c"));
printf("c is %d char in %s\n", strstr(s,"c")-s+1,s);
getch();
}
```

Activate Windows
Go to PC settings to activate Windows.

F1 Help F5 Zoom F6 Switch F7 Trace F8 Stop F9 Make F10

05:48 PM
08-Apr-25

```
TC
abcdef addr 65496
c addr 65498
c addr 0
cdef
(null)
c is 3 char in abcdef
```

Activate Windows
Go to PC settings to activate Windows.

05:48 PM
08-Apr-25