


Function without arguments/ without return value:

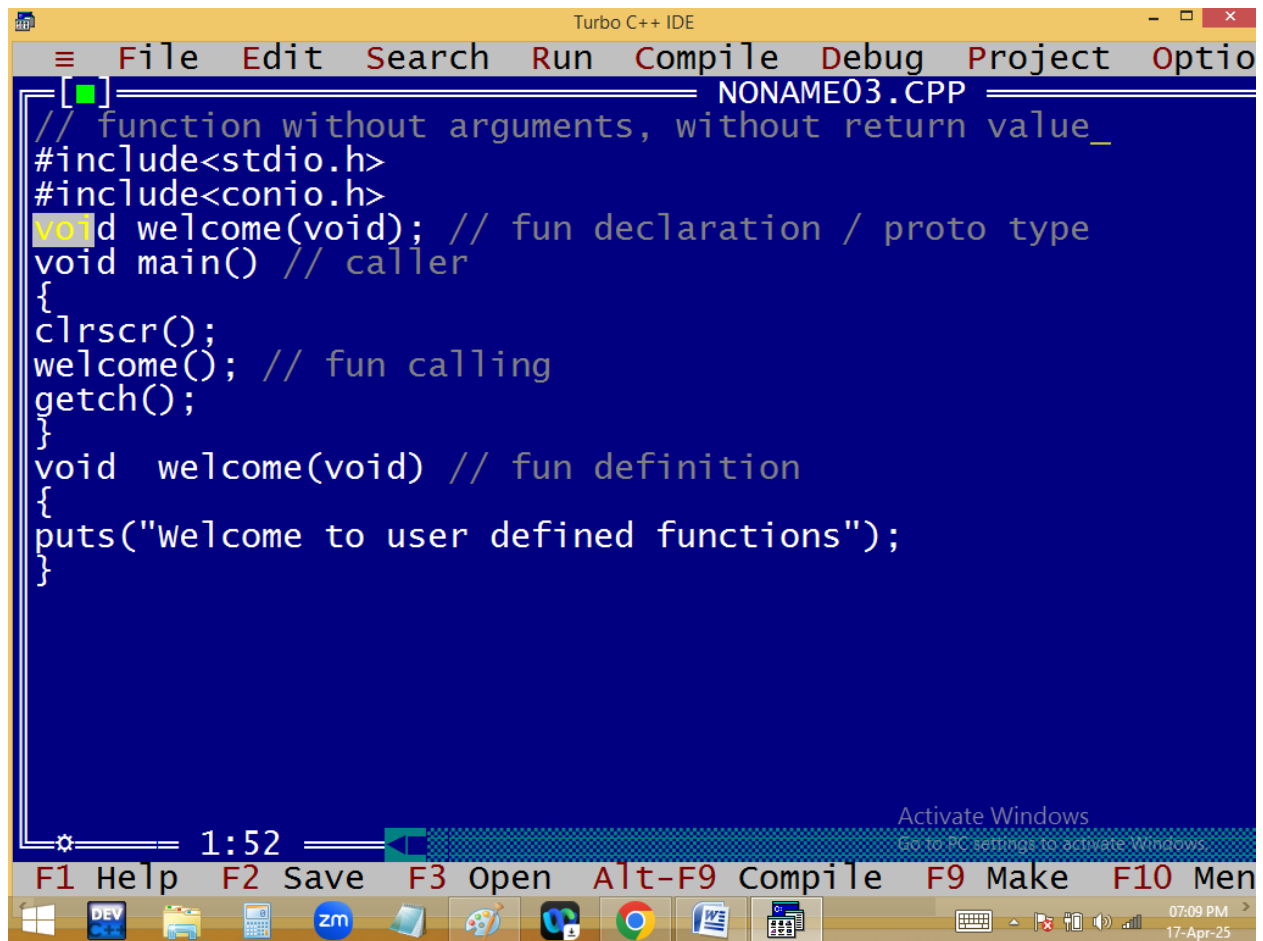


The image shows a screenshot of the Turbo C++ IDE. The title bar reads "Turbo C++ IDE". The menu bar includes "File", "Edit", "Search", "Run", "Compile", "Debug", "Project", and "Options". The file name "NONAME03.CPP" is displayed in the title bar. The code editor contains the following C++ code:

```
// function without arguments, without return value_
#include<stdio.h>
#include<conio.h>
void welcome(void); // fun declaration / proto type
void main() // caller
{
    clrscr();
    welcome(); // fun calling
    getch();
}

void welcome(void) // fun definition
{
    puts("welcome to user defined functions");
}
```

The status bar at the bottom shows the time "1:52" and a "Activate Windows" watermark. Below the status bar is a toolbar with function key shortcuts: "F1 Help", "F2 Save", "F3 Open", "Alt-F9 Compile", "F9 Make", and "F10 Men". The Windows taskbar at the very bottom shows various application icons and the system clock "07:09 PM 17-Apr-25".

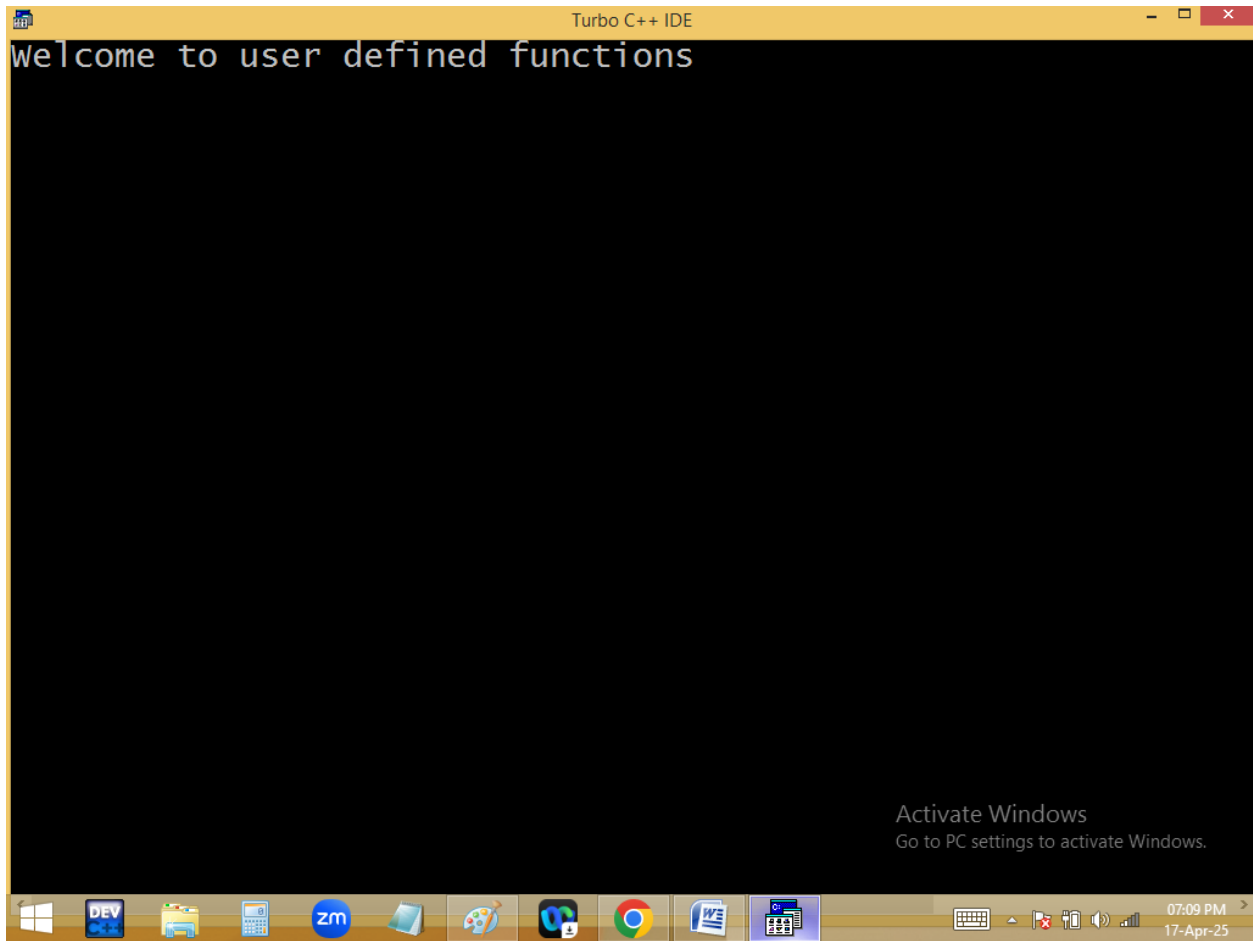

Turbo C++ IDE

File Edit Search Run Compile Debug Project Options

F1.CPP

```
#include<stdio.h>
#include<conio.h>
void sum(void); // fun dec / proto type
void main() // caller
{
    clrscr();
    sum(); // fun calling, callie
    getch();
}


void sum(void)// fun definition
{
    int a=10, b=20;
    printf("Sum=%d\n",a+b);
}
```

4:1


Activate Windows
Go to PC settings to activate Windows

F1 Help F2 Save F3 Open Alt-F9 Compile F9 Make F10 Men

07:10 PM
17-Apr-25

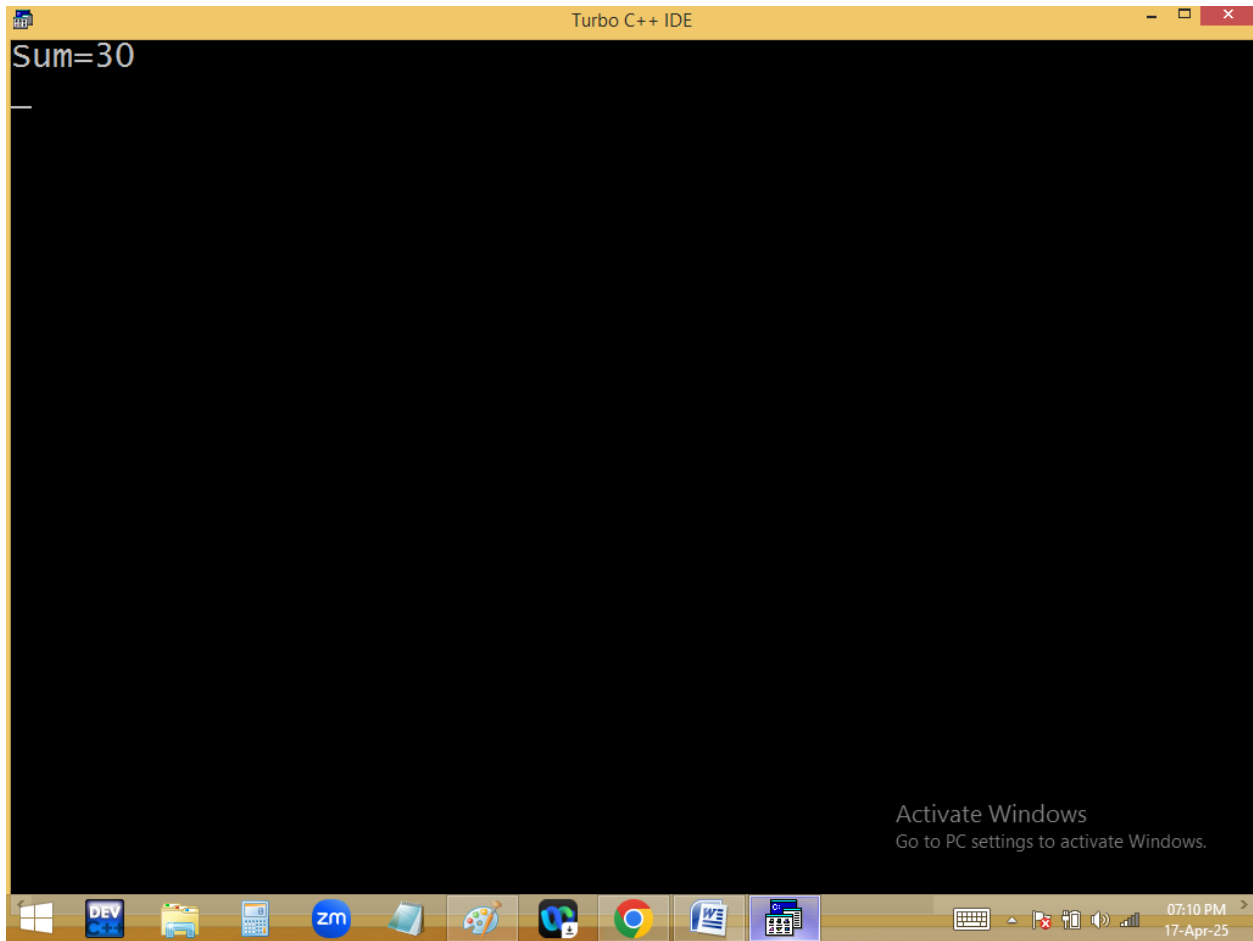

Function with arguments, with return value:

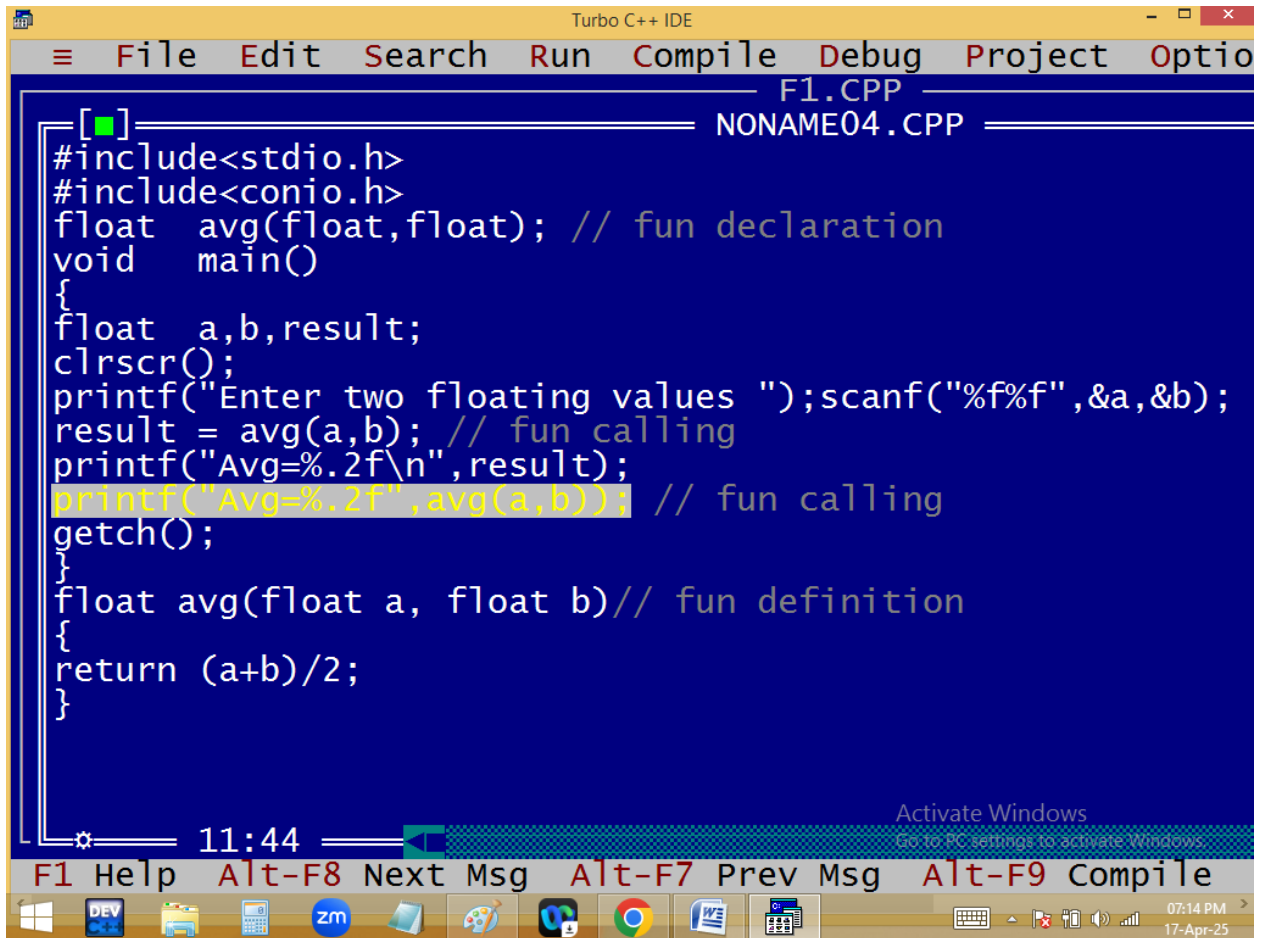


```
[■] F1.CPP
NONAME04.CPP
#include<stdio.h>
#include<conio.h>
float  avg(float,float); // fun declaration
void  main()
{
float  a,b,result;
clrscr();
printf("Enter two floating values ");scanf("%f%f",&a,&b);
result = avg(a,b); // fun calling
printf("Avg=%.2f\n",result);
printf("Avg=%.2f",avg(a,b)); // fun calling
getch();
}
float avg(float a, float b)// fun definition
{
return (a+b)/2;
}
```

11:44

Activate Windows
Go to PC settings to activate Windows.

F1 Help Alt-F8 Next Msg Alt-F7 Prev Msg Alt-F9 Compile

07:14 PM
17-Apr-25

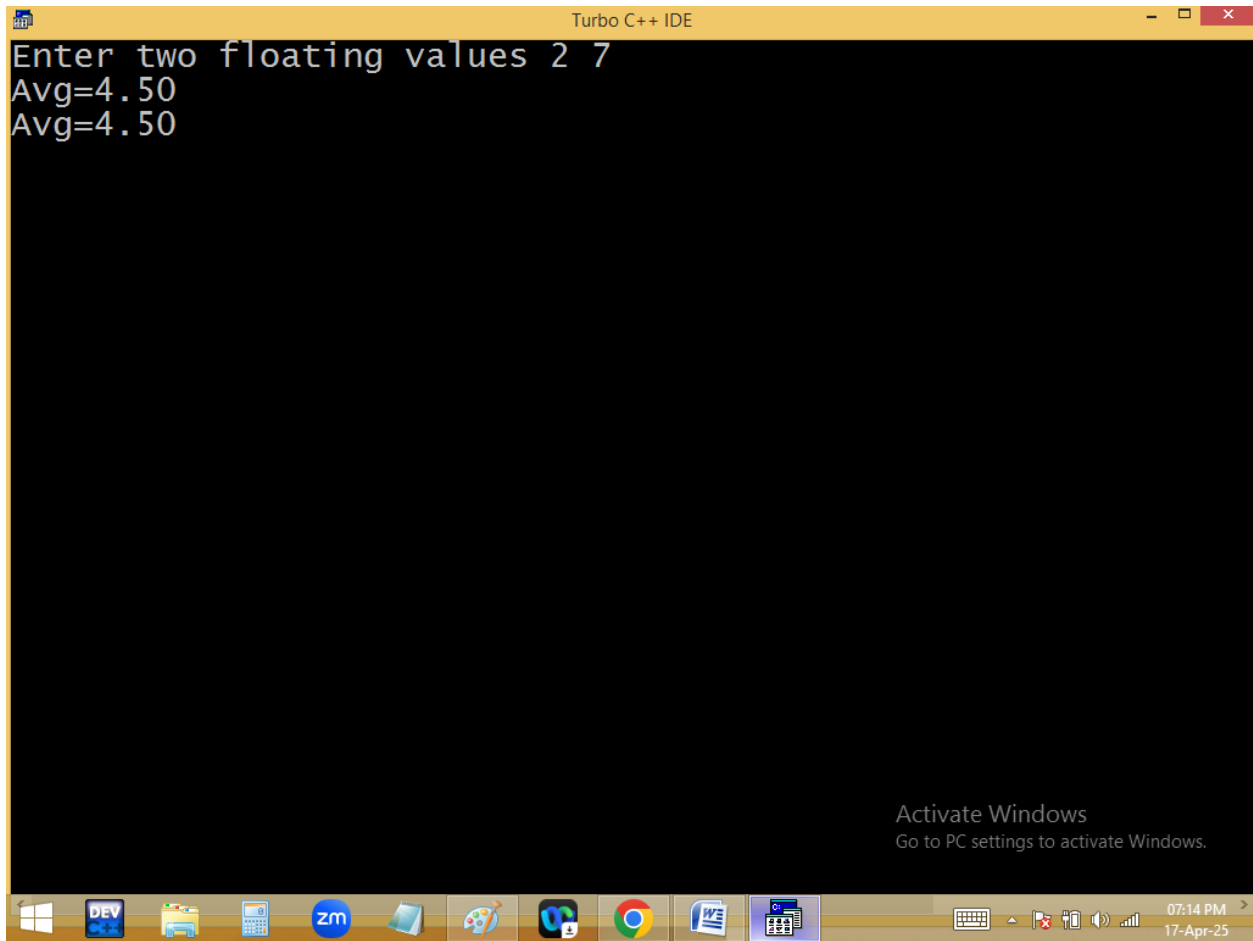

Turbo C++ IDE

File Edit Search Run Compile Debug Project Optio

NONAME02.CPP

```
// fun with argumetns, with return value
#include<stdio.h>
#include<conio.h>
int sum(int, int); // fun dec
int sum(int x, int y) // fun def
{
    return x+y;
}


void main()
{
    int a,b;
    clrscr();
    printf("Enter a, b values "); scanf("%d%d",&a,&b);
    printf("Sum=%d",sum(a,b)); // fun calling
    getch();
}
```

4:4

Activate Windows
Go to PC settings to activate Windows

F1 Help F7 Trace F8 Step F9 Make F10 Menu

07:15 PM
17-Apr-25

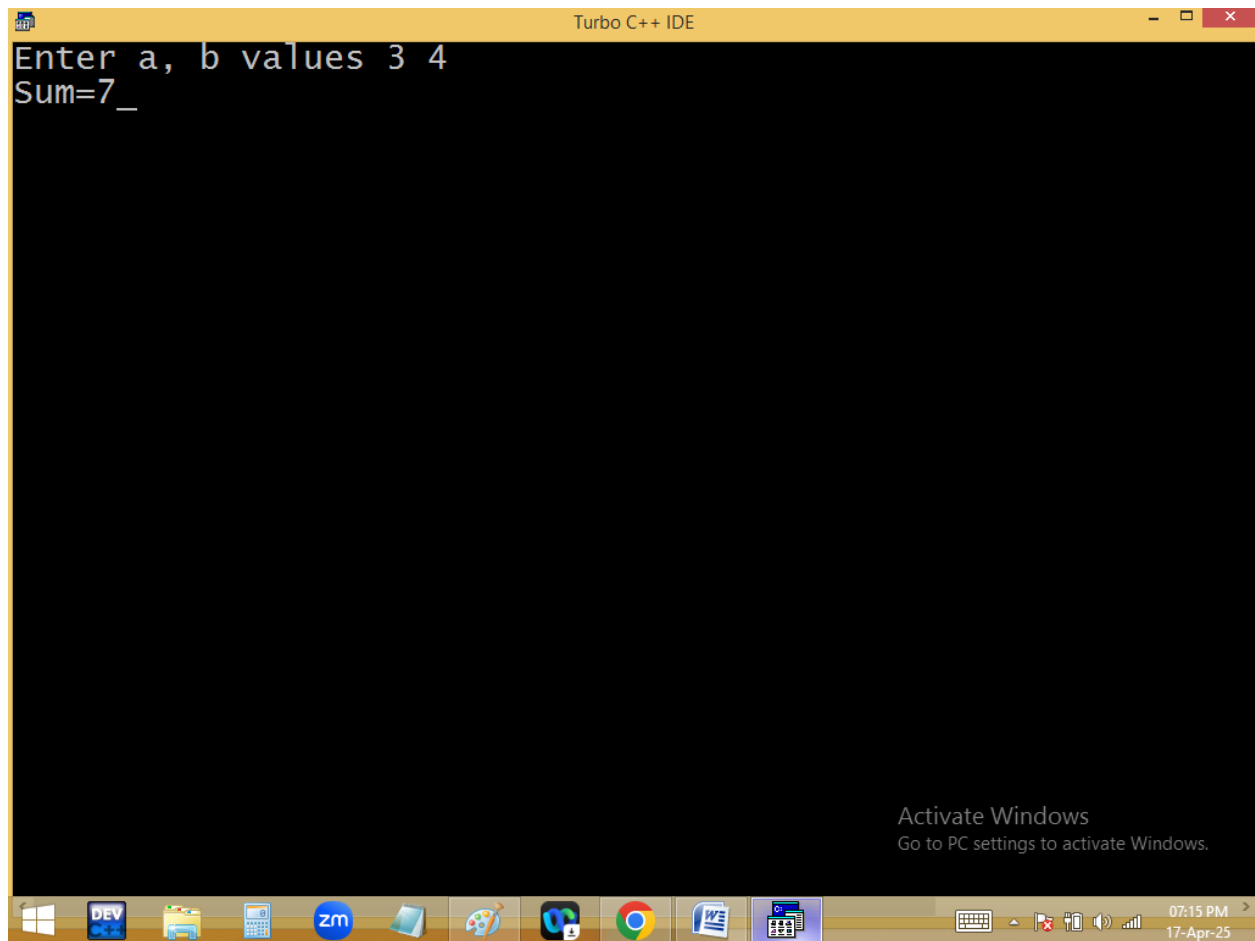

The image shows a screenshot of the Turbo C++ IDE window. The title bar reads "Turbo C++ IDE". The main text area contains the following code:

```
Enter a, b values 3 4  
Sum=7_
```

The code is written in a simple, monospaced font. The IDE has a yellow title bar and a black background for the code area. At the bottom, there is a Windows taskbar with various icons including DEV, File Explorer, Calculator, Zoom, and others. The system clock shows 07:15 PM on 17-Apr-25. An "Activate Windows" watermark is visible in the bottom right corner of the IDE window.

Function with arguments, without return value:

Turbo C++ IDE

File Edit Search Run Compile Debug Project Optio

NONAME01.CPP

```
// function with arguments, without return value
#include<stdio.h>
#include<conio.h>
void sum(int,int); // fun dec
void sum(int x, int y) // fun definition, x&y formal para
{
printf("Sum=%d\n",x+y);
}


void main()
{
int a=1, b=2;
clrscr();
sum(a,b); // fun calling, a&b actual parameters
sum(3,4);
getch();
}
```

9:23

Activate Windows
Go to PC settings to activate Windows

F1 Help Alt-F8 Next Msg Alt-F7 Prev Msg Alt-F9 Compile

07:16 PM
17-Apr-25

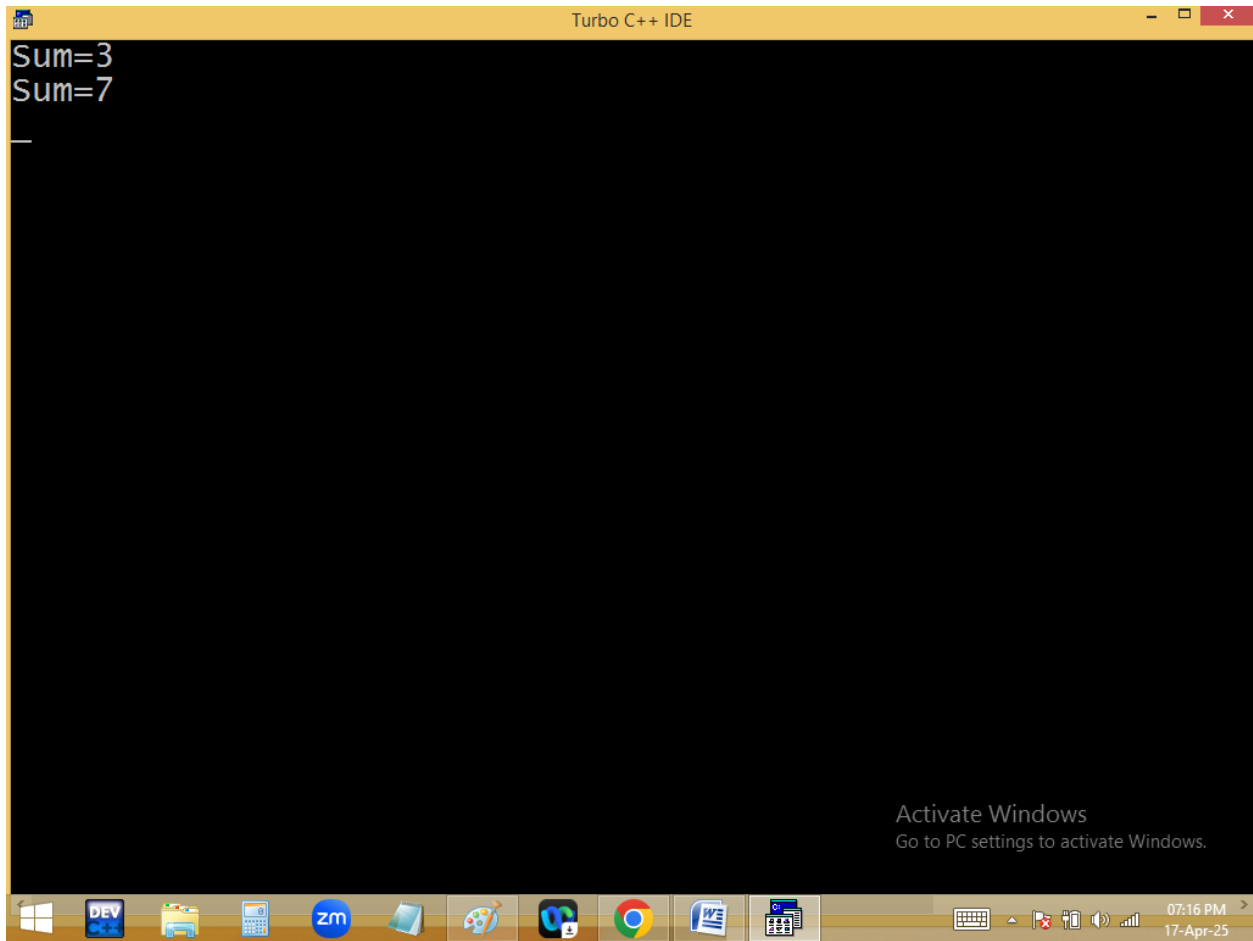

Turbo C++ IDE

File Edit Search Run Compile Debug Project Options

NONAME01.CPP


```
// function with arguments, without return value
#include<stdio.h>
#include<conio.h>
void max(int x, int y) // fun definition_
{
    puts(x>y?"x is big":y>x?"y is big":"Both are equal");
}
void main()
{
    int x, y;
    clrscr();
    printf("Enter x, y values ");scanf("%d%d",&x,&y);
    max(x,y); // fun calling
    getch();
}
```


4:42


Activate Windows
Go to PC settings to activate Windows

F1 Help Alt-F8 Next Msg Alt-F7 Prev Msg Alt-F9 Compile

07:18 PM
17-Apr-25

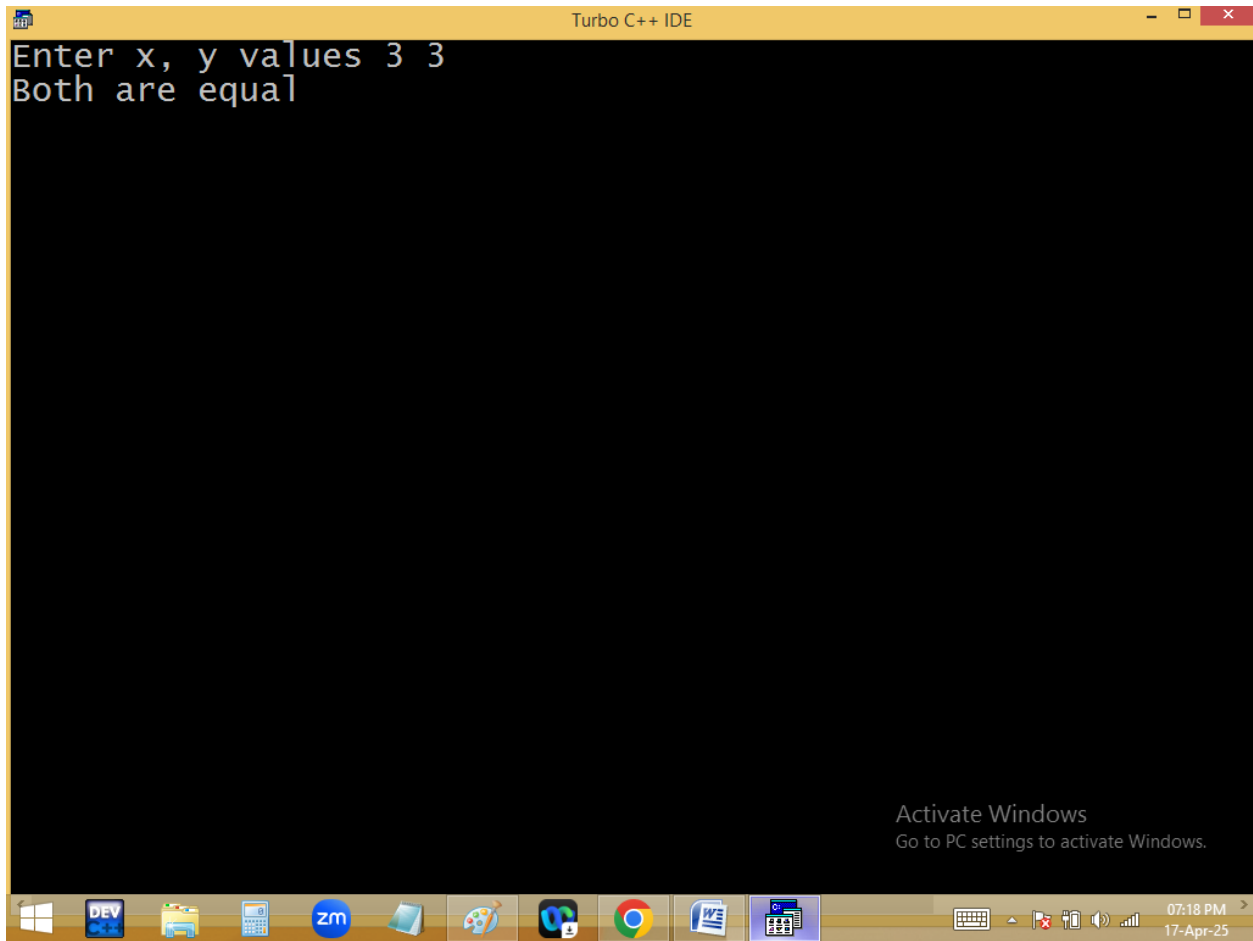

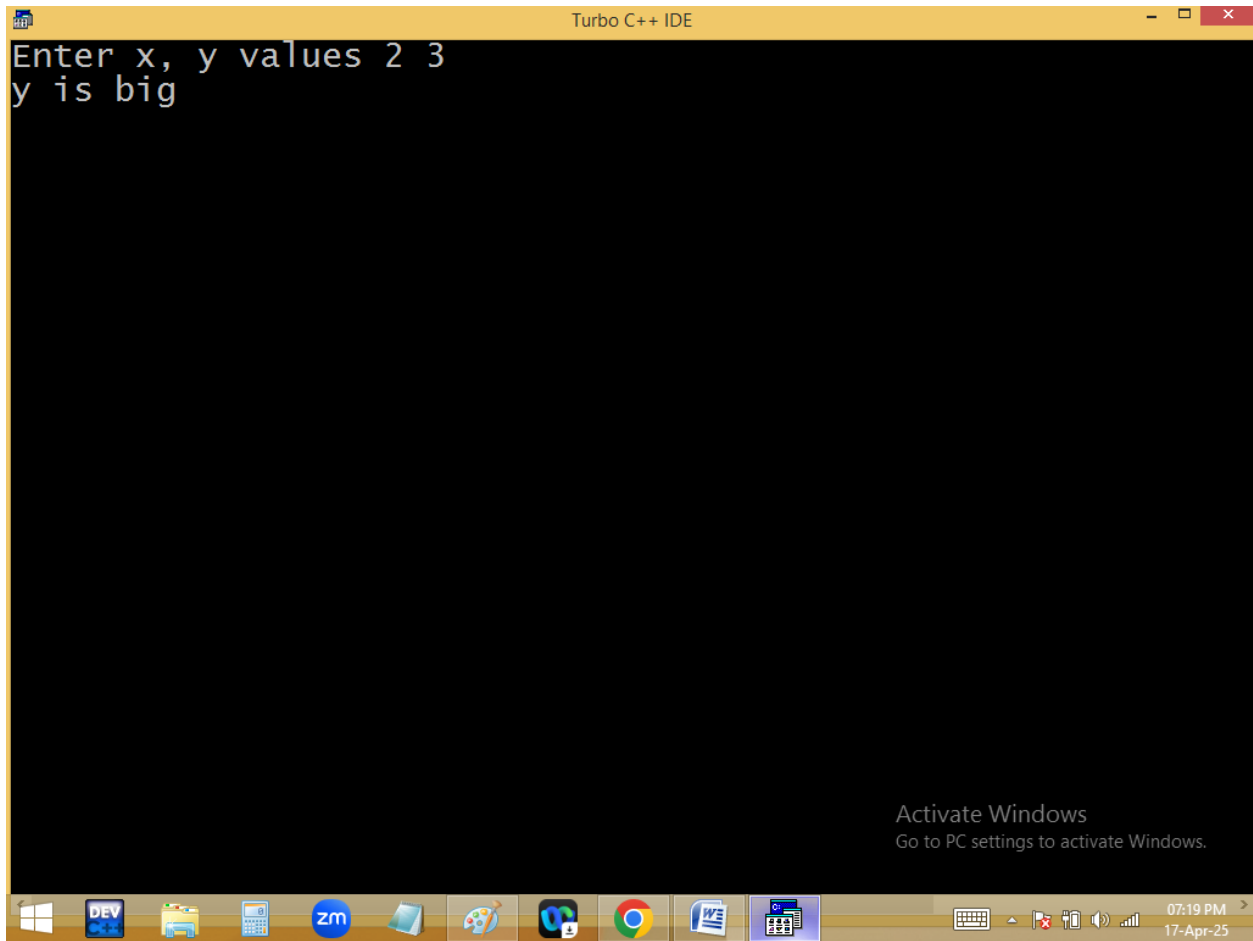

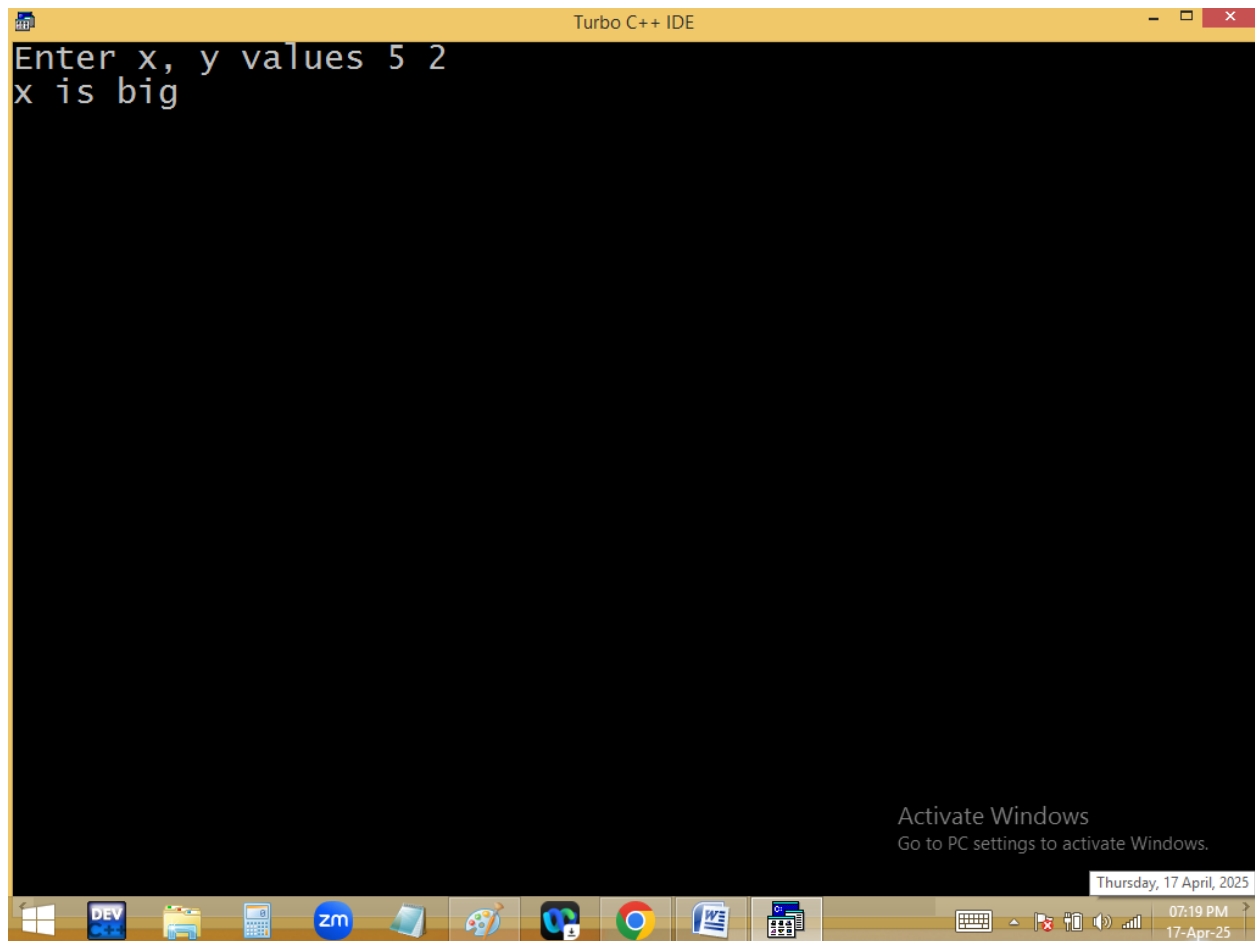

The screenshot shows a Windows desktop with the Turbo C++ IDE open. The IDE window has a yellow title bar that says "Turbo C++ IDE". The main area is black with white text. The text in the IDE is:

```
Enter x, y values 5 2
x is big
```

At the bottom of the IDE window, there is a message that says "Activate Windows Go to PC settings to activate Windows." and a date "Thursday, 17 April, 2025". The Windows taskbar is visible at the bottom, showing various icons including the Start button, DEV, File Explorer, Calculator, Zoom, and several other applications. The system tray on the right shows the time "07:19 PM" and the date "17-Apr-25".

Function without arguments, with return value:

Turbo C++ IDE

File Edit Search Run Compile Debug Project Options

NONAME00.CPP


```
// fun without arguments, with return value
#include<stdio.h>
#include<conio.h>
int evenodd(); // fun dec
int evenodd() // fun def
{
}
int n;
printf("Enter a no "); scanf("%d",&n);
return n%2;
}
void main()
{
clrscr();
if(evenodd())puts("Odd");else puts("Even"); // fun calling
getch();
}
```


3:28

Activate Windows
Go to PC settings to activate Windows

F1 Help F2 Save F3 Open Alt-F9 Compile F9 Make F10 Men

07:19 PM
17-Apr-25

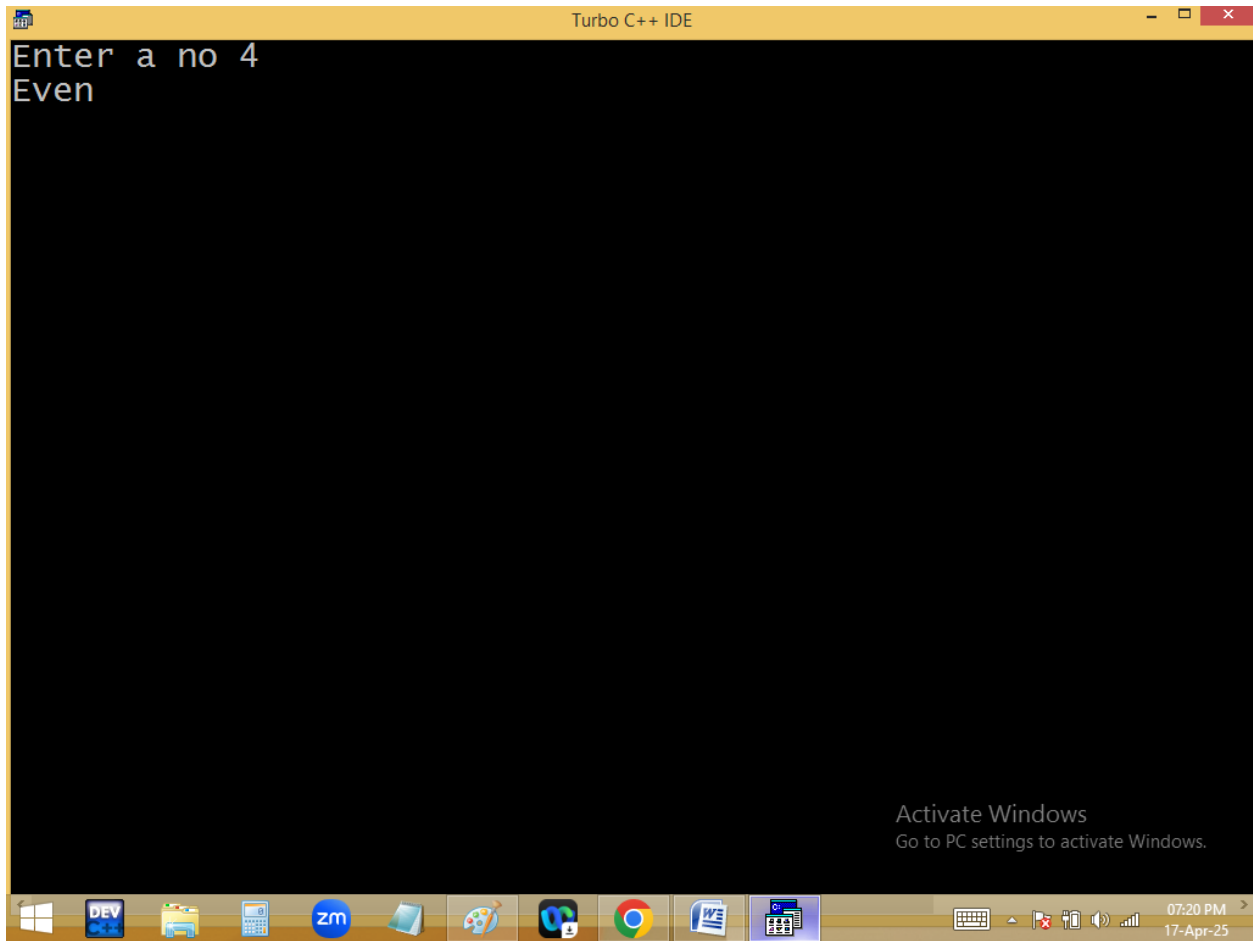

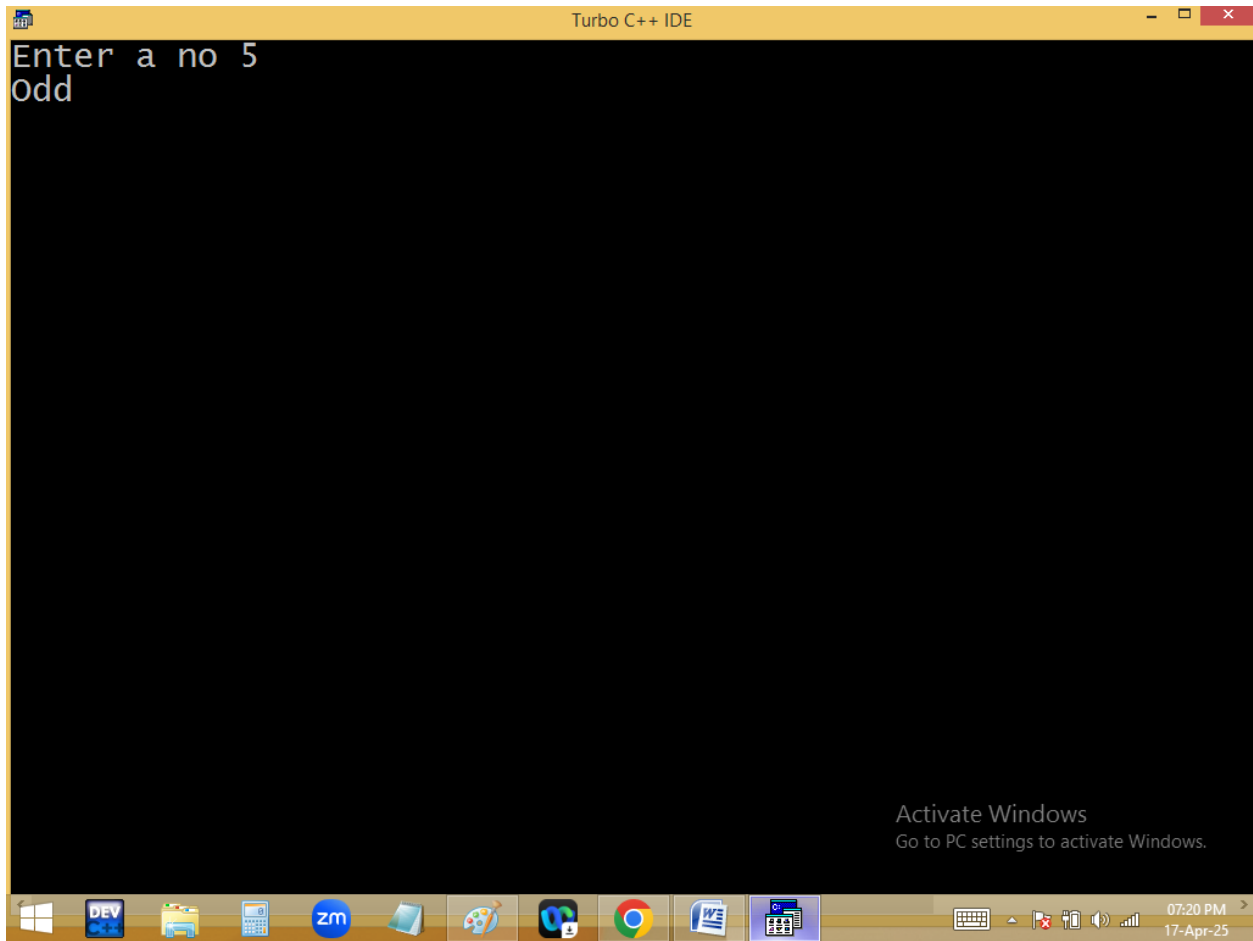

Turbo C++ IDE

File Edit Search Run Compile Debug Project Options

F2.CPP


```
// fun without arguments, with return value
#include<stdio.h>
#include<conio.h>
int sum(); // fun declaration
void main() // caller
{
    clrscr();
    int s = sum(); // fun calling, callie
    printf("Sum=%d\n",s);
    printf("Sum=%d\n",sum()); // fun calling
    getch();
}
int sum() // fun definition
{
    int a=10, b=20;
    return a+b;
}
```

6:4

Activate Windows
Go to PC settings to activate Windows

F1 Help F2 Save F3 Open Alt-F9 Compile F9 Make F10 Men

07:20 PM
17-Apr-25

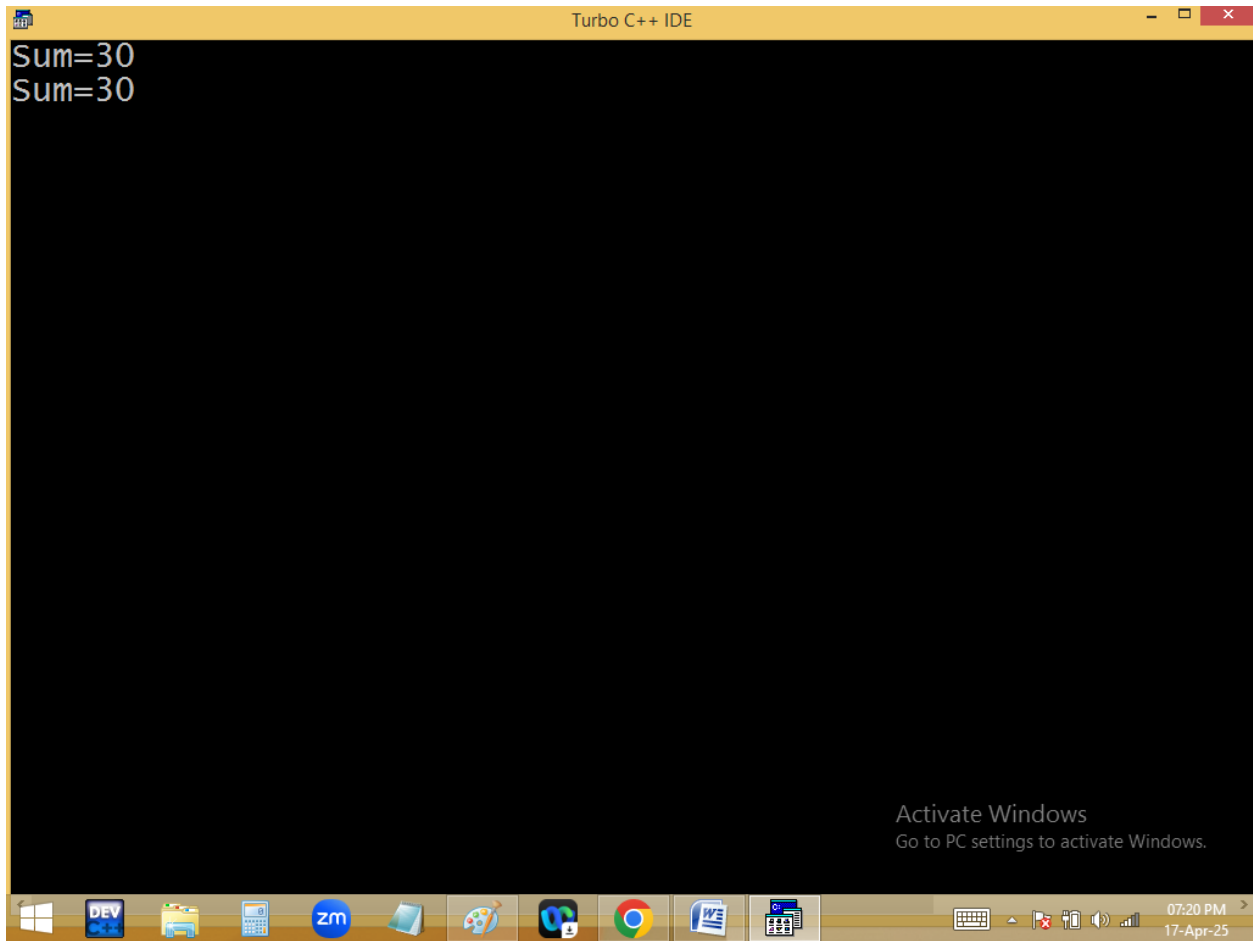

Turbo C++ IDE

File Edit Search Run Compile Debug Project Optio

F2.CPP

```
// fun without arguments, with return value
#include<stdio.h>
#include<conio.h>
long fact(); // fun declaration
long fact() // fun definition
{
    int n; long f=1;
    printf("Enter a no ");scanf("%d",&n);
    while(n>1)f=f*n--;
    return f;
}
void main() // caller
{
    clrscr();
    printf("Factorial=%ld",fact()); //fun calling
    getch();
}
```


17:2

Activate Windows
Go to PC settings to activate Windows

F1 Help F2 Save F3 Open Alt-F9 Compile F9 Make F10 Men

07:23 PM
17-Apr-25



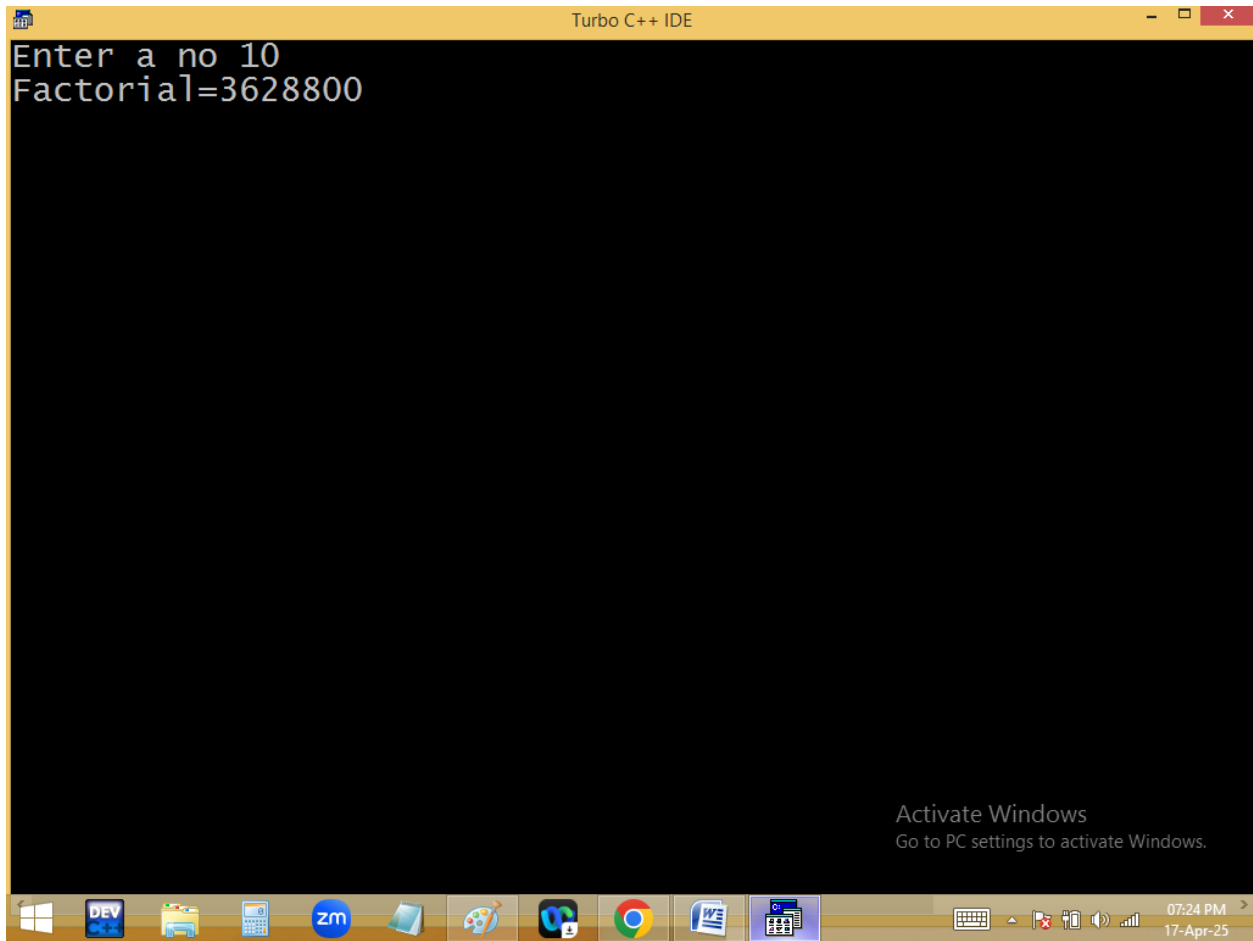

Turbo C++ IDE

File Edit Search Run Compile Debug Project Options

F2.CPP


```
#include<stdio.h>
#include<conio.h>
int show()
{
return 1,2,3;
}
void main()
{
clrscr();
printf("%d",show());
getch();
}
```

10:2

Activate Windows
Go to PC settings to activate Windows

F1 Help Alt-F8 Next Msg Alt-F7 Prev Msg Alt-F9 Compile

07:26 PM
17-Apr-25

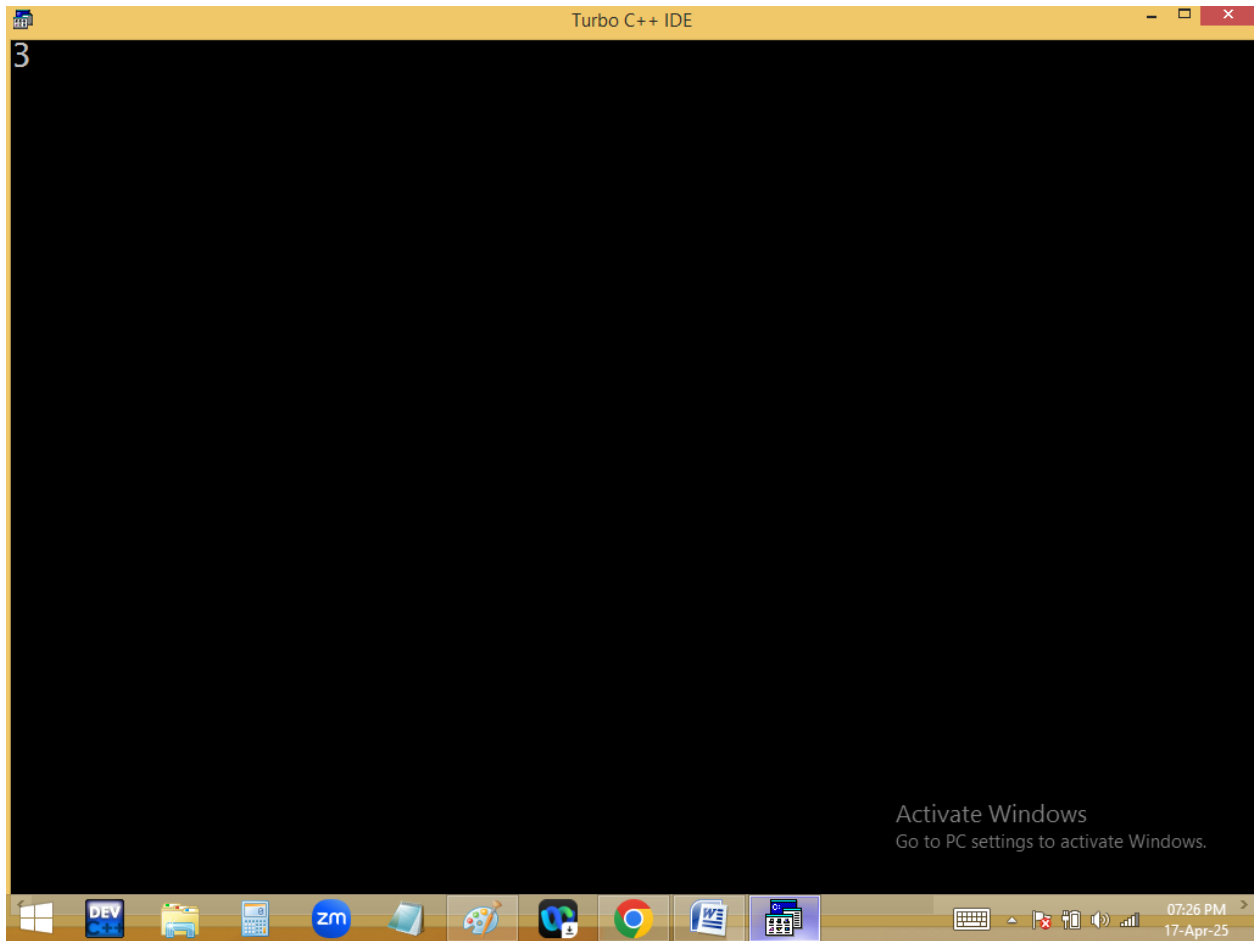


```
Turbo C++ IDE
File Edit Search Run Compile Debug Project Options
F2.CPP
#include<stdio.h>
#include<conio.h>
int show()
{
return 1.2; return 2.3; return 3.4;
}
void main()
{
clrscr();
printf("%d",show());
getch();
}
```

5:35

Activate Windows
Go to PC settings to activate Windows

F1 Help Alt-F8 Next Msg Alt-F7 Prev Msg Alt-F9 Compile

07:28 PM
17-Apr-25

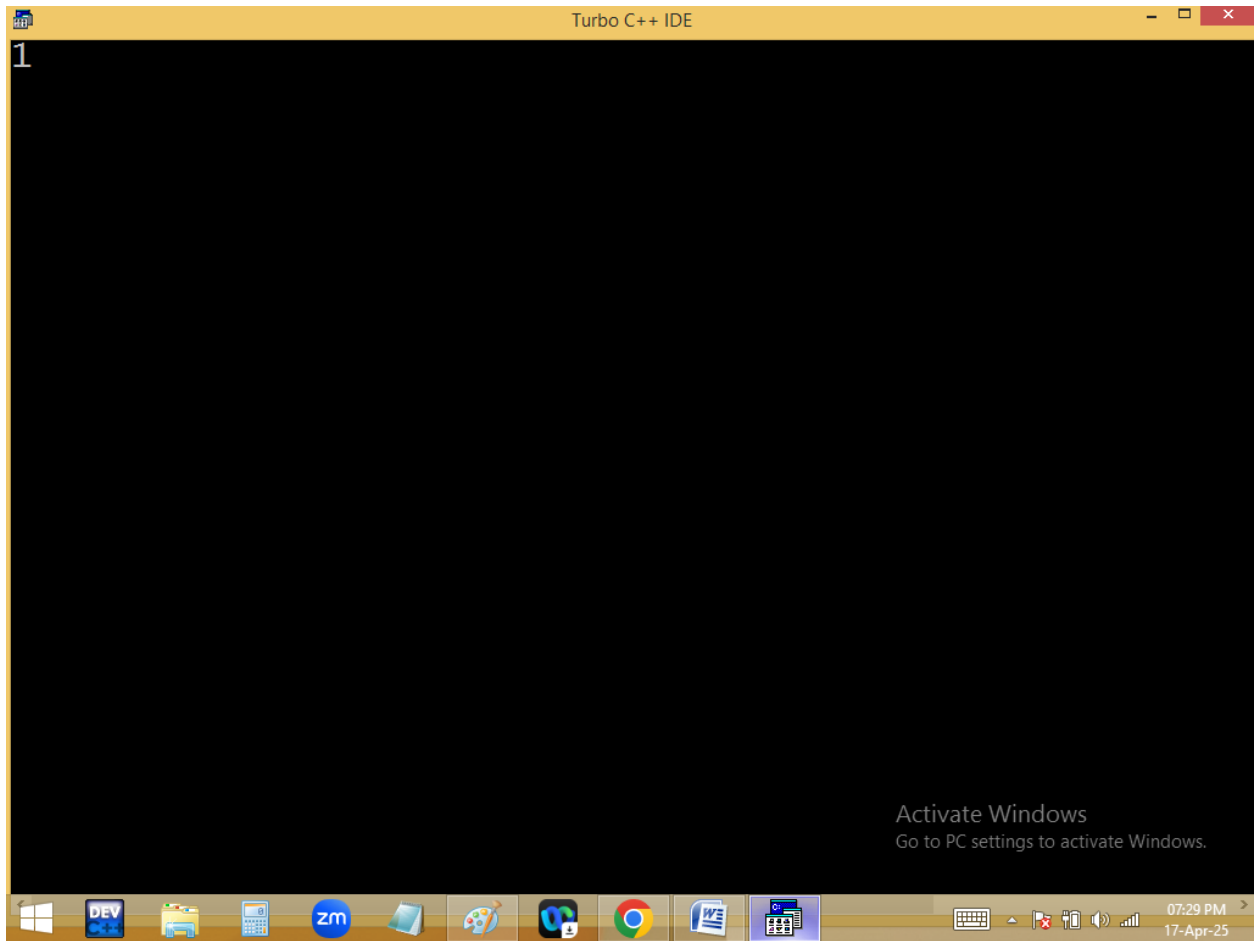

Turbo C++ IDE

File Edit Search Run Compile Debug Project Options

F2.CPP

```
#include<stdio.h>
#include<conio.h>
void show(int x, int y)
{
printf("x=%d, y=%d",x,y);
}
void main()
{
int a=3;
clrscr();
show(a++,a++);
getch();
}
// In function calling parameters are passed from right
// to left
```

9:32

Activate Windows
Go to PC settings to activate Windows.

F1 Help Alt-F8 Next Msg Alt-F7 Prev Msg Alt-F9 Compile

07:33 PM
17-Apr-25

