



AMVARA

PERFORMANCE TEST

TA.TS - 2023, 2024

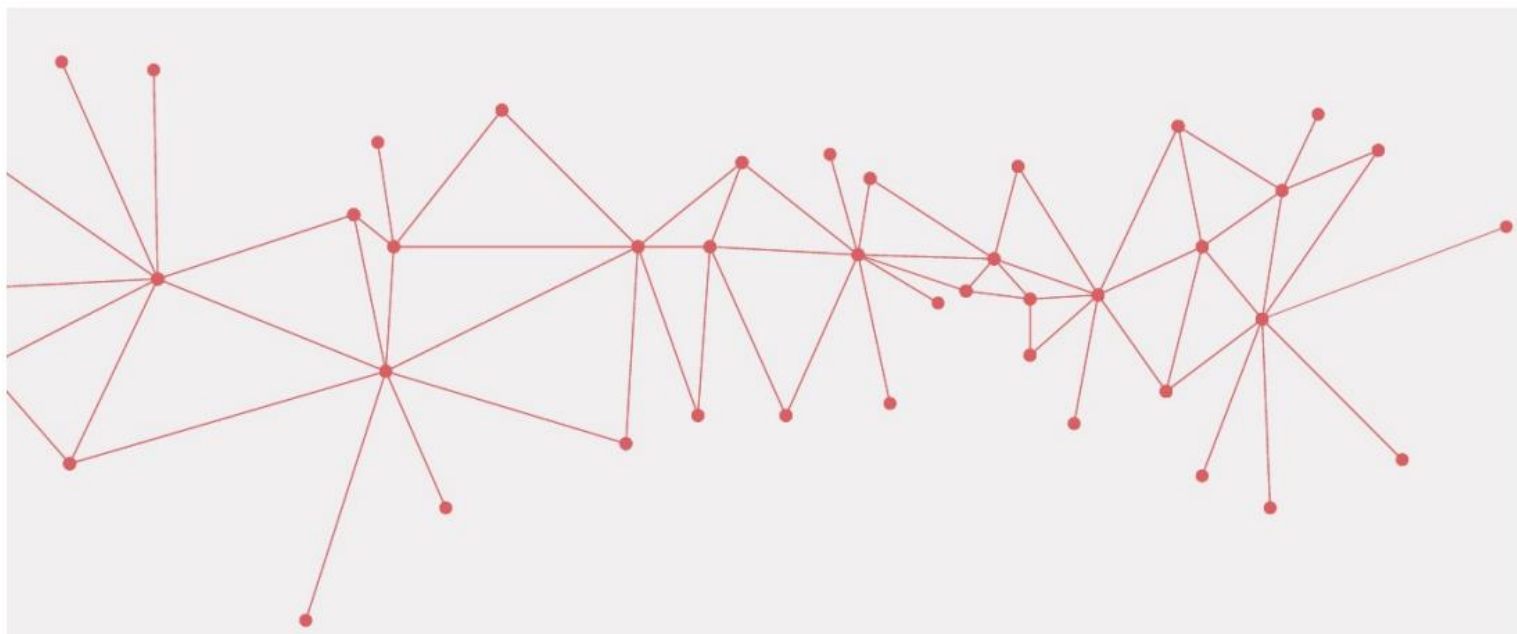


Table of Content

Table of Content	2
Objective	3
Using run.ps1 in windows	3
Place run.ps1 script inside jMeter home directory	3
Configuration options	3
1. Examples to prepare configuration options	4
How to execute	5
How to read results	5
Analyse the execution report	5

Objective

This documentation shows how to use `run.ps1` it's configuration option, examples to run the script with different parameters and see the reports.

Using run.ps1 in windows


Place `run.ps1` script inside jMeter home directory

Assume `JMETER_HOME = /path/to/your/apache-jmeter-x.x` directory.

- Place `run.ps1` file inside `JMETER_HOME` home directory.
- Create folder with name **`test_plans`** in side `JMETER_HOME` directory.

Note: `test_plans` directory/folder contains jMeter test files(.jmx) file. Keep your all test files inside this directory.

Your directory structure should look like this.

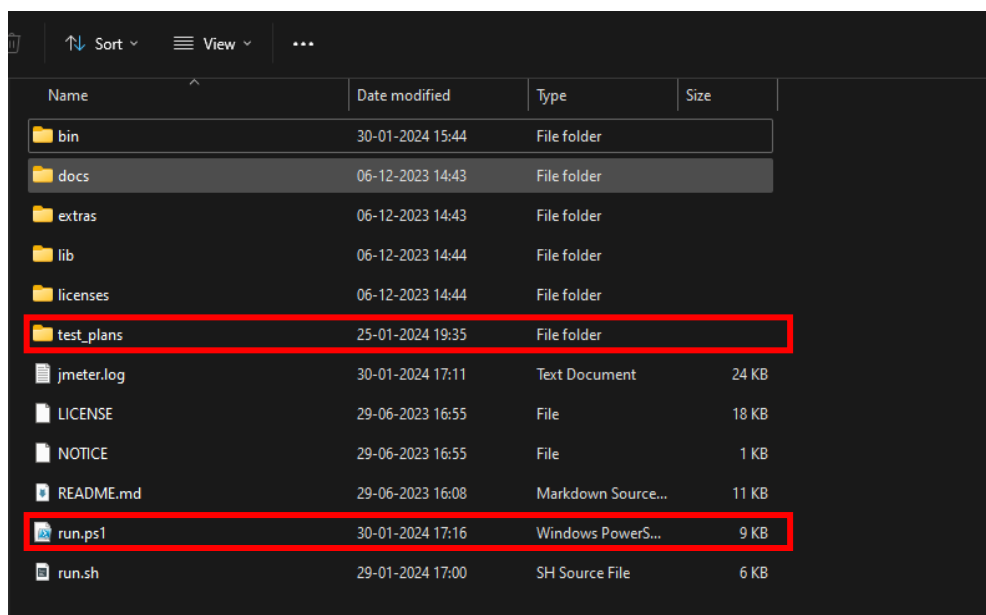

Configuration options

- To perform a load test from the command line interface (CLI), utilize the `run.ps1` file along with specified configuration values. The `run.ps1` file may include multiple configuration parameters, some of which are mandatory.

Note: Mandatory parameters are highlighted.

<code>-p=<password></code> <code>--password=<password></code>	Password for the user configured in the JMX file
---	---

-p --password	If used with password will be prompted during execution
-t <number> --threads <number>	Number of threads to start. Each thread represents a user.
-l <number> --loops <number>	Number of loops to run. Each loop will run once a report configured.
-e <environment>, --environment <environment>	Environment name, must be same as the file name <SERVER>_<ENV>.jmx
-s <server> --server <server>	Server name, must be same as the file name <SERVER>_<ENV>.jmx
-J<option>=<value>	Additional options that will be passed to the jMeter.
-rup <number>, --ramp-up-time <number>	Set the Ramp Up Time in seconds.

1. Examples to prepare configuration options

To initiate a load test, execute the run.ps1 file with the specified configuration values below.

#1 -----

- Number of Users: 3,
- Ramp up Time: 60 Seconds,
- Loops: 2
- Password: Password123
- JMeter Test File Name: MyTestServer_TestEnvironment.jmx

The command structure should be as follows.

```
./run.ps1 -p="Password123" -t 3 -l 2 -rup 60 -s MyTestServer -e
TestEnvironment
```

#2 -----

- Number of Users: 50,
- Ramp up Time: 180 Seconds,
- Loops: 3
- Password: 123Password
- jMeter Test File Name: DemoServer_EnvTest.jmx

The command structure should be as follows.

```
./run.ps1 -p="123Password" -t 3 -l 2 -rup 60 -s DemoServer -e
EnvTest
```

How to execute

Prepare your JMX file and place it inside the **JMETER_HOME/test_plans** directory, open a Bash terminal and navigate to the **JMETER_HOME** directory.

Note: Keep your `run.ps1` file as mentioned in the [Place Script](#) section.

- Prepare your test plan as mentioned in the [Configuration Options > Examples](#) above.
- Run your command.

```
PS I:\Load_Testing\apache-jmeter-5.6.2> .\run.ps1 -p=asdf -t 1 -l 1 -rup 180 -s TEST -e IBIZA_COCKPIT_COMPLETE
INFO: I:\Load_Testing\apache-jmeter-5.6.2\test_plans
INFO: Running jMeter Script
INFO: Checking required parameters
DEBUG: Parameters Configured:
DEBUG:   Root Folder:      I:\Load_Testing\apache-jmeter-5.6.2
DEBUG:   Test Plans Folder: I:\Load_Testing\apache-jmeter-5.6.2\test_plans
DEBUG:   Threads:         1
DEBUG:   Loops:           1
DEBUG:   Environment:      IBIZA_COCKPIT_COMPLETE
DEBUG:   Server:           TEST
DEBUG:   Ramp Up Time:     180
DEBUG:   Additional Parameters:
```

How to read results


- After the test execution is complete, a test result directory containing the HTML report will be generated inside **JMETER_HOME/logs_dashboard_**.
- The test result directory name will follow the format.

```
{Jmeter-test-file-
name}_{Date_YYYYMMDD}_{Time_HHMMSS}_Threads_{number-of-
threads}_Loops_{number_of_loops}_RampUpTime_{ramp-up-time}
```

- Within the directory, open the `index.html` file in a web browser.

Analyse the execution report

- The dashboard includes a **Request Summary Graph**, an **Application Performance Index**, and a **Statistics table**. Please refer to the details for more information about the test.
- Additionally, you can view the execution graphs by following these steps
 1. Charts
 2. Response Times
 3. Select required Graph

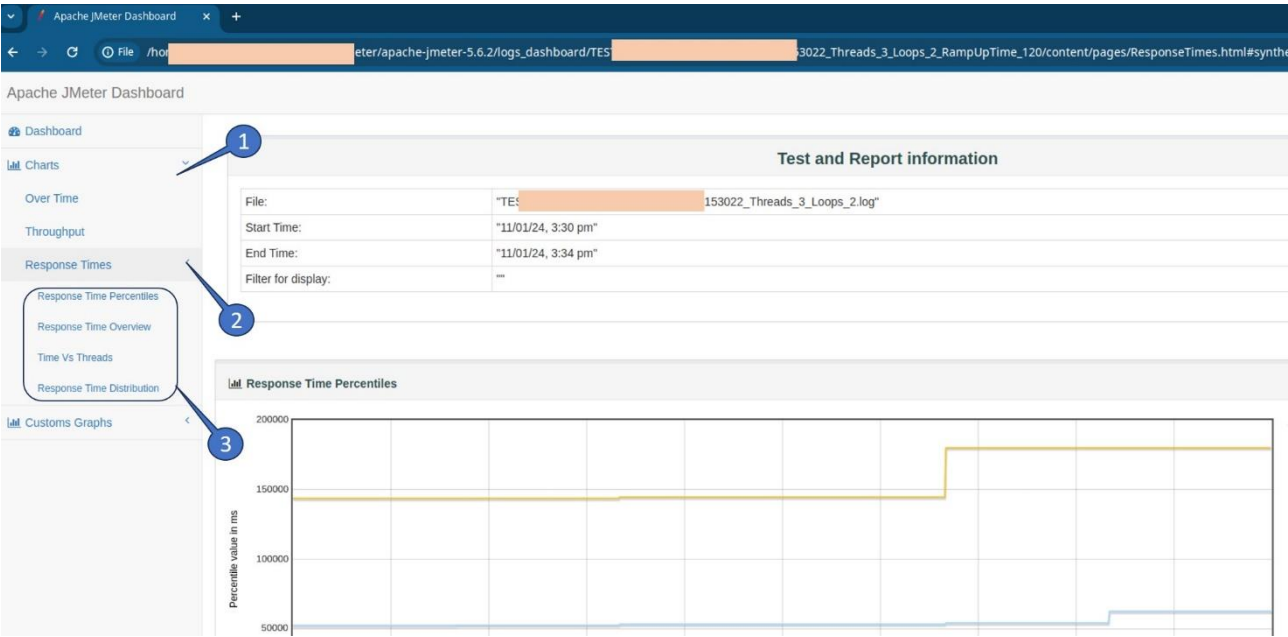



AMVARA

<https://www.amvara.de/>

info@amvara.de

+34 717 102 603