

Universidad del Valle de Guatemala  
Algoritmos y Estructuras de Datos  
Andrea Maybell Peña Echeverría  
Roberto Andres Giron Rubio  
Diego Estuardo López Marroquín

sección: 10  
carné: 15127  
carné: 15174  
carné: 141222

## Hoja de Trabajo 2

### Profiler

The screenshot displays the Java Profiler interface. The top toolbar includes buttons for Profile, Results, View, Collected data, and Process. The main table shows the profile data for the 'main' method.



Name	Total Time	Total Time (CPU)
main	334 ms (100%)	50.6 ms (100%)
Finalizer	0.0 ms (-%)	0.0 ms (-%)
Reference Handler	0.0 ms (-%)	0.0 ms (-%)
DestroyJavaVM	0.0 ms (-%)	0.0 ms (-%)

Below the table, there is a 'Methods' section and an 'Output - HdT2 (profile)' window. The output window shows several warnings from the Profiler Agent regarding JVM TI classLoadHook and a final 'BUILD SUCCESSFUL' message.



```
Profiler Agent Warning: JVM TI classLoadHook: class name is null.
Profiler Agent Warning: JVM TI classLoadHook: class name is null.
Profiler Agent Warning: JVM TI classLoadHook: class name is null.
Profiler Agent Warning: JVM TI classLoadHook: class name is null.
Profiler Agent Warning: JVM TI classLoadHook: class name is null.
BUILD SUCCESSFUL (total time: 18 seconds)
```

## Junit

### CalcuPost

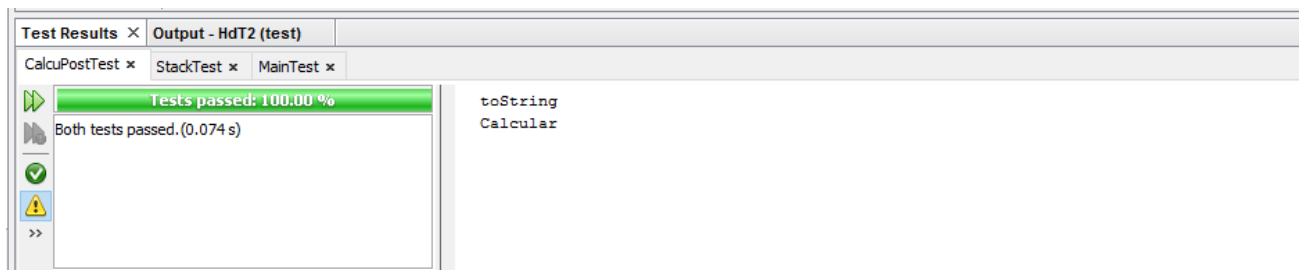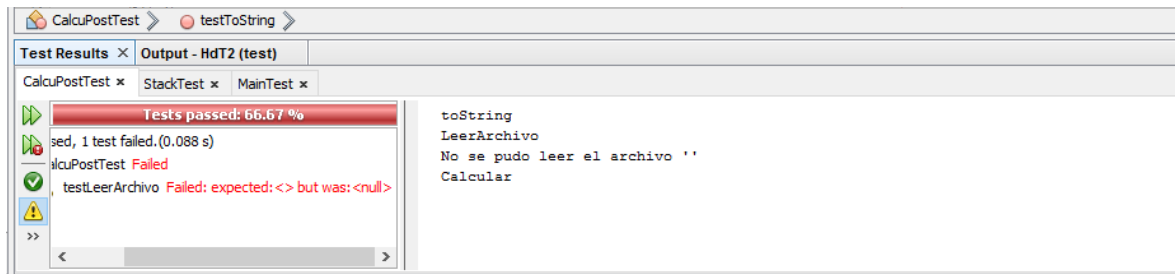

## Main

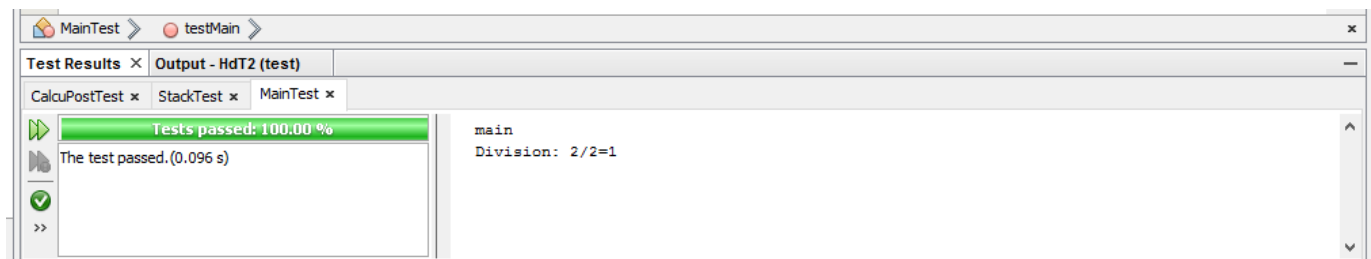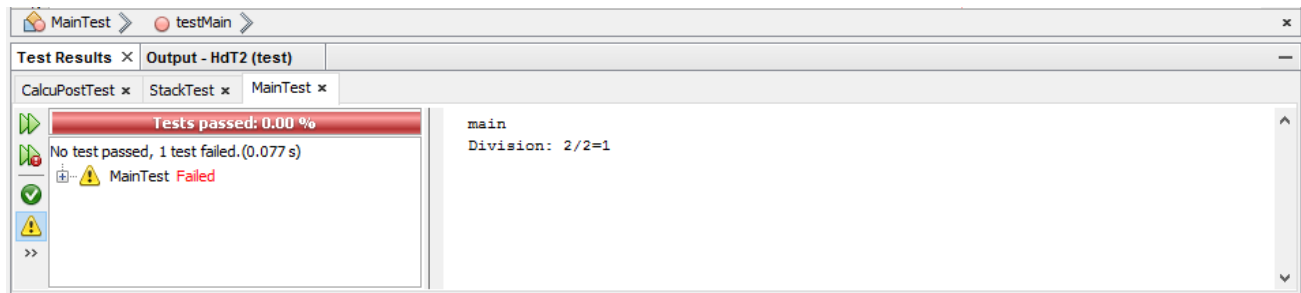

## Stack

