

# Cucumber Report

12 sept de 2024, 9:02:18 p. m.

Start : sept 12, 9:02:10.751 p. m.

End : sept 12, 9:02:17.709 p. m.

Duration : 6.958 s

Features

Scenarios

Steps

PASSED - 0  
FAILED - 1  
SKIPPED - 0

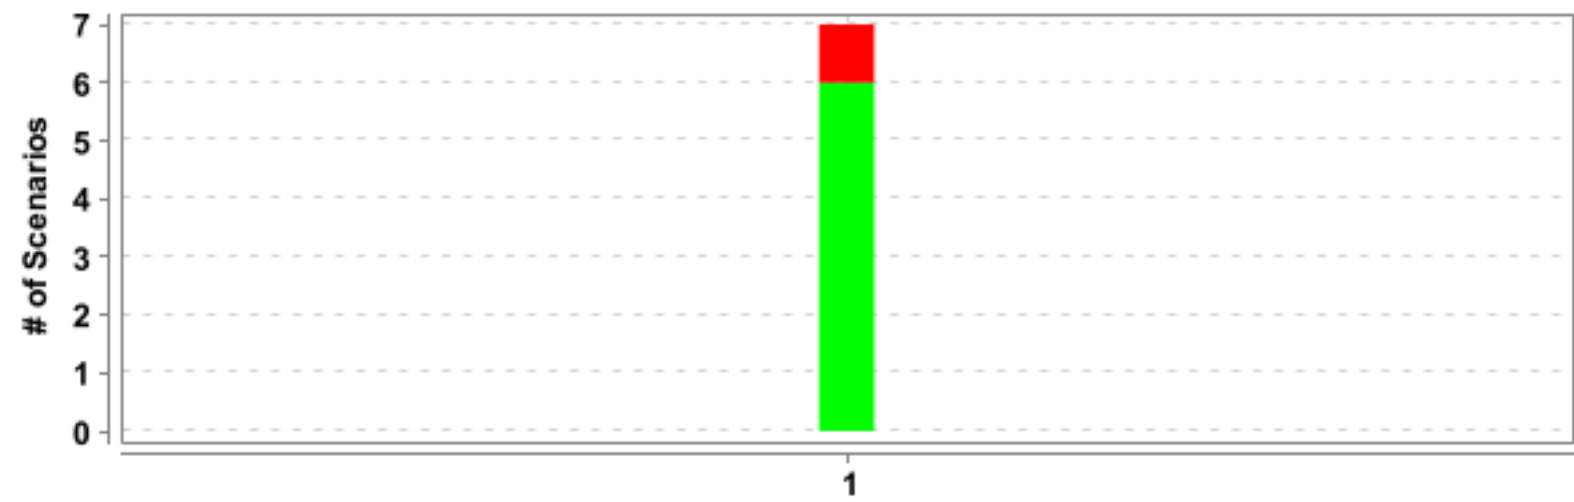
PASSED - 6  
FAILED - 1  
SKIPPED - 0

PASSED - 15  
FAILED - 1  
SKIPPED - 0

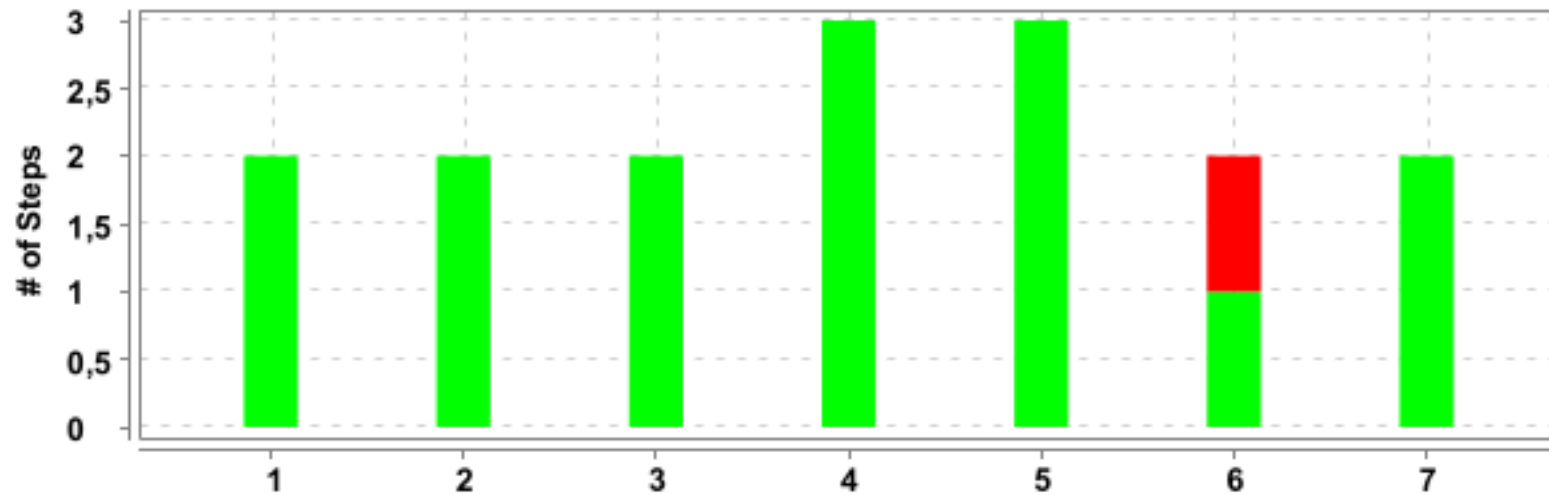


| Feature                 |          | Scenario |   |   |   | Step |    |   |   |
|-------------------------|----------|----------|---|---|---|------|----|---|---|
| Name                    | Duration | T        | P | F | S | T    | P  | F | S |
| <u>Booking endpoint</u> | 6.958 s  | 7        | 6 | 1 | 0 | 16   | 15 | 1 | 0 |

| # | Feature Name            | Scenario Name                                      |
|---|-------------------------|--|
| 1 | <u>Booking endpoint</u> | <u>Create booking with nothing and returns 400</u> |





| # | Feature Name            | T | P | F | S | Duration |
|---|-------------------------|---|---|---|---|----------|
| 1 | <u>Booking endpoint</u> | 7 | 6 | 1 | 0 | 6.958 s  |





| # | Feature Name            | Scenario Name   | T | P | F | S | Duration |
|---|-------------------------|---|---|---|---|---|----------|
| 1 | <u>Booking endpoint</u> | <u>/employee/{id} should return an specific employee</u>            | 2 | 2 | 0 | 0 | 2.439 s  |
| 2 |                         | <u>/employee/{id} returns 404 when an invalid id is sent</u>        | 2 | 2 | 0 | 0 | 0.619 s  |
| 3 |                         | <u>/employee/{id} returns 404 when an invalid format id is sent</u> | 2 | 2 | 0 | 0 | 0.592 s  |
| 4 |                         | <u>Create booking with valid data and returns 200</u>               | 3 | 3 | 0 | 0 | 1.270 s  |
| 5 |                         | <u>Create booking with valid data and returns 200</u>               | 3 | 3 | 0 | 0 | 0.640 s  |
| 6 |                         | <u>Create booking with nothing and returns 400</u>                  | 2 | 1 | 1 | 0 | 0.681 s  |
| 7 |                         | <u>Create booking with a bad sintaxis json</u>                      | 2 | 2 | 0 | 0 | 0.676 s  |

## Booking endpoint

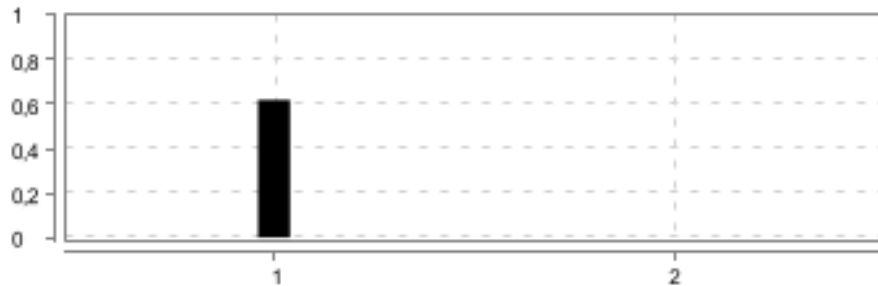

|  |                    |  |   |  |   |
|--|--------------------|--|---|--|---|
| <b>FAILED</b>                              | DURATION - 6.958 s | Scenarios<br>Total - 7<br>Pass - 6<br>Fail - 1<br>Skip - 0 |  | Steps<br>Total - 16<br>Pass - 15<br>Fail - 1<br>Skip - 0 |  |
| / 9:02:10.751 p. m. // 9:02:17.709 p. m. / |                    |  |   |  |   |
|  |                    |  |   |  |   |

### /employee/{id} should return an specific employee

|   |                               |   |   |  |
|---|-------------------------------|---|---|--|
| <div>PASSED</div>                                     | <div>DURATION - 2.439 s</div> | <div></div> | <div>Steps</div> <div>Total - 2</div> <div>Pass - 2</div> <div>Fail - 0</div> <div>Skip - 0</div> | <div></div> |
| <div>/ 9:02:10.757 p. m. // 9:02:13.196 p. m. /</div> |                               |   |   |  |
| <div>Booking endpoint</div>                           |                               |   |   |  |
|   |                               |   |   |  |

| # | Step / Hook Details  | Status | Duration |
|---|--|--------|----------|
| 1 | Given I perform a GET call to the booking endpoint with id "5" | PASSED | 2.415 s  |
| 2 | Then I verify that the status code is 200                      | PASSED | 0.017 s  |

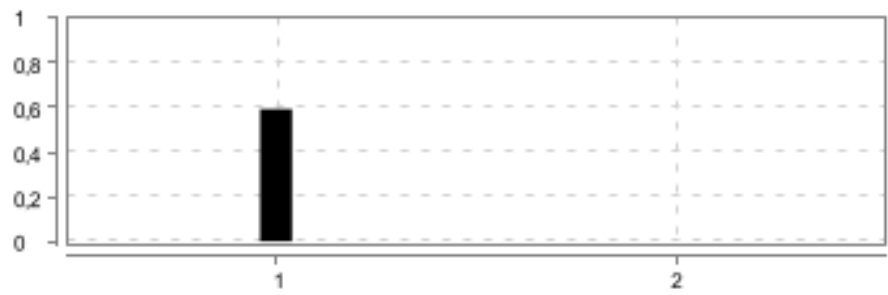

### /employee/{id} returns 404 when an invalid id is sent

|   |                               |   |   |  |
|---|-------------------------------|---|---|--|
| <div>PASSED</div>                                     | <div>DURATION - 0.619 s</div> | <div></div> | <div>Steps</div> <div>Total - 2</div> <div>Pass - 2</div> <div>Fail - 0</div> <div>Skip - 0</div> | <div></div> |
| <div>/ 9:02:13.204 p. m. // 9:02:13.823 p. m. /</div> |                               |   |   |  |
| <div>Booking endpoint</div>                           |                               |   |   |  |
|   |                               |   |   |  |

| # | Step / Hook Details   | Status | Duration |
|---|---|--------|----------|
| 1 | Given I perform a GET call to the booking endpoint with id "letras" | PASSED | 0.619 s  |

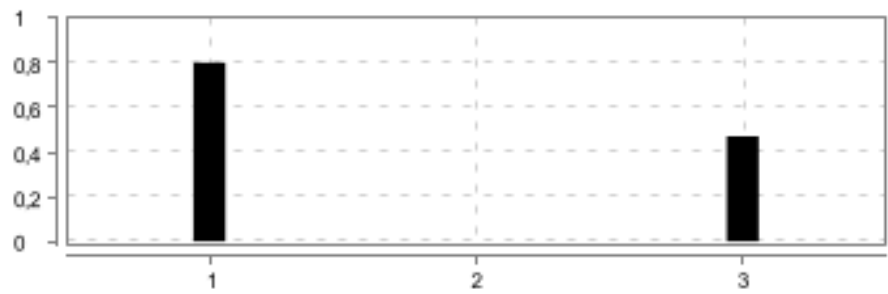

| # | Step / Hook Details                       | Status | Duration |
|---|---|--------|----------|
| 2 | Then I verify that the status code is 404 | PASSED | 0.000 s  |

### /employee/{id} returns 404 when an invalid format id is sent

|  |                    |  |  |   |
|--|--------------------|--|--|---|
| PASSED                                     | DURATION - 0.592 s |  | Steps<br>Total - 2<br>Pass - 2<br>Fail - 0<br>Skip - 0 |  |
| / 9:02:13.826 p. m. // 9:02:14.418 p. m. / |                    |  |  |   |
| Booking endpoint                           |                    |  |  |   |
|  |                    |  |  |   |

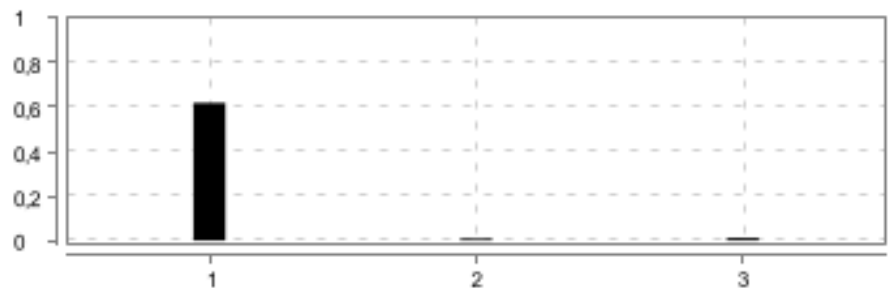

| # | Step / Hook Details  | Status | Duration |
|---|--|--------|----------|
| 1 | Given I perform a GET call to the booking endpoint with id "cinco" | PASSED | 0.592 s  |
| 2 | Then I verify that the status code is 404                          | PASSED | 0.000 s  |

### Create booking with valid data and returns 200

|  |                    |   |  |  |
|--|--------------------|---|--|--|
| PASSED                                     | DURATION - 1.270 s |  | Steps<br>Total - 3<br>Pass - 3<br>Fail - 0<br>Skip - 0 |  |
| / 9:02:14.429 p. m. // 9:02:15.699 p. m. / |                    |   |  |  |
| Booking endpoint                           |                    |   |  |  |
|  |                    |   |  |  |

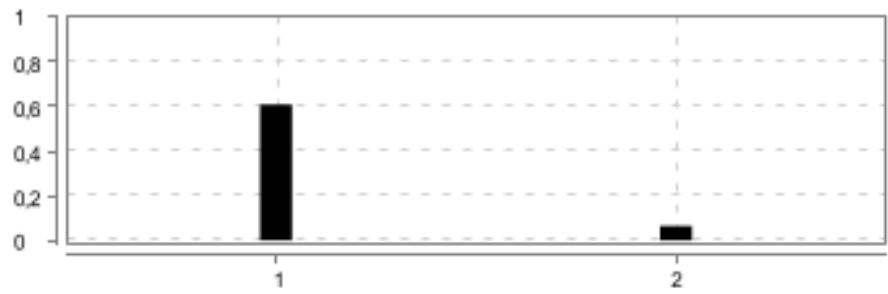

| # | Step / Hook Details   | Status | Duration |
|---|---|--------|----------|
| 1 | Given I perform a POST call to the booking endpoint with the following data | PASSED | 0.800 s  |
|   | Adrian   Montaña   100   false   2016-10-16   2019-07-06   Breakfast        |        |          |
| 2 | Then I verify that the status code is 200                                   | PASSED | 0.000 s  |
| 3 | And I verify that the body does not have size 0                             | PASSED | 0.470 s  |

### Create booking with valid data and returns 200

|  |                               |  |   |   |
|--|-------------------------------|--|---|---|
| <div>PASSED</div>                          | <div>DURATION - 0.640 s</div> |  | <div>Steps</div> <div>Total - 3</div> <div>Pass - 3</div> <div>Fail - 0</div> <div>Skip - 0</div> |  |
| / 9:02:15.699 p. m. // 9:02:16.339 p. m. / |                               |  |   |   |
| Booking endpoint                           |                               |  |   |   |
|  |                               |  |   |   |

| # | Step / Hook Details  | Status | Duration |
|---|--|--------|----------|
| 1 | Given I perform a POST call to the booking endpoint with the following data<br><div>Jorge Perez 200 true 2017-08-01 2020-05-20 Lunch</div> | PASSED | 0.619 s  |
| 2 | Then I verify that the status code is 200  | PASSED | 0.009 s  |
| 3 | And I verify that the body does not have size 0  | PASSED | 0.012 s  |

### Create booking with nothing and returns 400

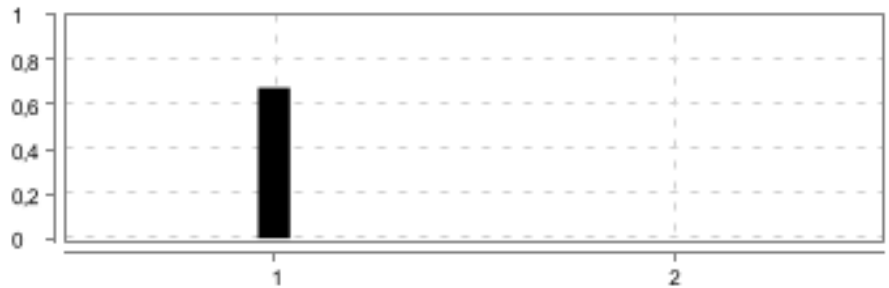

|  |                    |   |   |  |
|--|--------------------|---|---|--|
| FAILED                                     | DURATION - 0.681 s |  | <div>Steps</div> <div>Total - 2</div> <div>Pass - 1</div> <div>Fail - 1</div> <div>Skip - 0</div> |  |
| / 9:02:16.339 p. m. // 9:02:17.020 p. m. / |                    |   |   |  |
| Booking endpoint                           |                    |   |   |  |
|  |                    |   |   |  |

| # | Step / Hook Details   | Status | Duration |
|---|---|--------|----------|
| 1 | Given I perform A POST call with nothing  | PASSED | 0.609 s  |
| 2 | Then I verify that the status code is 400<br><pre>java.lang.AssertionError: 1 expectation failed. Expected status code &lt;400&gt; but was &lt;500&gt;.     at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62)     at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502)     at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486)     at org.codehaus.groovy.reflection.CachedConstructor.invoke(CachedConstructor.java:73)     at org.codehaus.groovy.runtime.callsite.ConstructorSite\$ConstructorSiteNoUnwrapNoCoerce.callConstructor(ConstructorSite.java:108)     at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCallConstructor(CallSiteArray.java:57)     at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callConstructor(AbstractCallSite.java:263)</pre> | FAILED | 0.064 s  |



| # | Step / Hook Details  | Status | Duration |
|---|--|--------|----------|
|   | <pre> at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callConstructor(AbstractCallSite.java:277) at io.restassured.internal.ResponseSpecificationImpl\$HamcrestAssertionClosure.validate(ResponseSpecificationImpl.groovy:512) at io.restassured.internal.ResponseSpecificationImpl\$HamcrestAssertionClosure\$validate\$1.call(Unknown Source) at io.restassured.internal.ResponseSpecificationImpl.validateResponseIfRequired(ResponseSpecificationImpl.groovy:696) at io.restassured.internal.ResponseSpecificationImpl.this\$2\$validateResponseIfRequired(ResponseSpecificationImpl.groovy) at java.base/jdk.internal.reflect.DirectMethodHandleAccessor.invoke(DirectMethodHandleAccessor.java:103) at java.base/java.lang.reflect.Method.invoke(Method.java:580) at org.codehaus.groovy.runtime.callsite.PlainObjectMetaMethodSite.doInvoke(PlainObjectMetaMethodSite.java:43) at org.codehaus.groovy.runtime.callsite.PogoMetaMethodSite\$PogoCachedMethodSiteNoUnwrapNoCoerce.invoke(PogoMetaMethodSite.java:198) at org.codehaus.groovy.runtime.callsite.PogoMetaMethodSite.callCurrent(PogoMetaMethodSite.java:62) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callCurrent(AbstractCallSite.java:185) at io.restassured.internal.ResponseSpecificationImpl.statusCode(ResponseSpecificationImpl.groovy:135) at io.restassured.specification.ResponseSpecification\$statusCode\$0.callCurrent(Unknown Source) at io.restassured.internal.ResponseSpecificationImpl.statusCode(ResponseSpecificationImpl.groovy:143) at io.restassured.internal.ValidatableResponseOptionsImpl.statusCode(ValidatableResponseOptionsImpl.java:89) at stepDefinitions.BookingSteps.verifyStatusCode(BookingSteps.java:35) at ?.I verify that the status code is 400(file:///D:/UPB/6to%20semestre/Certi%202/Otro/src/test/resources/booking.feature:28) </pre> <p>* Not displayable characters are replaced by '?'. </p> |        |          |

### Create booking with a bad sintaxis json

|  |                           |   |   |  |
|--|---------------------------|---|---|--|
| <b>PASSED</b>                              | <b>DURATION - 0.676 s</b> |  | <b>Steps</b><br>Total - 2<br>Pass - 2<br>Fail - 0<br>Skip - 0 |  |
| / 9:02:17.033 p. m. // 9:02:17.709 p. m. / |                           |   |   |  |
| Booking endpoint                           |                           |   |   |  |
|  |                           |   |   |  |

| #      | Step / Hook Details   | Status | Duration |            |            |           |       |
|--------|---|--------|----------|------------|------------|-----------|-------|
| 1      | Given I perform a POST call to the booking endpoint with the following data but a bad json  | PASSED | 0.675 s  |            |            |           |       |
|        | <table><tr><td>Adrian</td><td>Montaño</td><td>100</td><td>false</td><td>2016-10-16</td><td>2019-07-06</td><td>Breakfast</td></tr></table> |        |          | Adrian     | Montaño    | 100       | false |
| Adrian | Montaño   | 100    | false    | 2016-10-16 | 2019-07-06 | Breakfast |       |
| 2      | Then I verify that the status code is 400   | PASSED | 0.000 s  |            |            |           |       |