



UNIVERSITÄT
LEIPZIG

Asymmetric Numeral System

January 2, 2025

Huo Jiang

Fakultät für Mathematik und Informatik
Universität Leipzig

Outline

1. Introduction
2. Asymmetric Numeral System
3. rANS
4. Streaming-rANS
5. Summary
6. Reference

Introduction

Introduction

- Hi there, this is a self inspired latex beamer template for Leipzig university.

Entropy Coding

- The theoretical limit of compression is given by Shannon entropy, which measures the minimum average number of bits needed to encode a symbol from a data source.
- Lossless compression algorithms aim to approach this limit but cannot go below it.
- The entropy depends on the probability distribution of the symbols, with more skewed distributions being more compressible.
- Shannon Entropy ^[1]

$$H(X) = - \sum_{i=1}^n p(x_i) \log_2 p(x_i)$$

- Shannon's Source Coding Theorem ^[1]

- Huffman Coding: ZIP, PNG
- Arithmetic Coding: JPEG, H.264, HEVC.
- Asymmetric Numeral System (ANS): Zstandard, AVIF, JPEG XL

Asymmetric Numeral System

Motivation

ANS combines the compression ratio of arithmetic coding (which uses a nearly accurate probability distribution), with a processing cost similar to that of Huffman coding ^[4].

Basic Idea

- Symbol spread function

Basic Idea

- Symbol spread function
- Representation of information
(represents an entire message as a single number, similar to Arithmetic Coding) → example: representation of {2,0,2,5,1,8}

Basic Idea

- Symbol spread function
- Representation of information
(represents an entire message as a single number, similar to Arithmetic Coding) → example: representation of {2,0,2,5,1,8}
- Symmetric or Asymmetric

Basic Idea

- Symbol spread function
- Representation of information
(represents an entire message as a single number, similar to Arithmetic Coding) → example: representation of {2,0,2,5,1,8}
- Symmetric or Asymmetric
- rANS and tANS

Symbol spread function

- the function that determines the split of the $\mathbb{N}$ subsets corresponding to different symbols [1]

Symbol spread function

- the function that determines the split of the $\mathbb{N}$ subsets corresponding to different symbols [1]
- $\bar{s} : \mathbb{N} \rightarrow \mathcal{A}, \bar{s}(x) = \text{mod}(x, b) = s$

Symbol spread function

- the function that determines the split of the $\mathbb{N}$ subsets corresponding to different symbols [1]
- $\bar{s} : \mathbb{N} \rightarrow \mathcal{A}, \bar{s}(x) = \text{mod}(x, b) = s$
- In the standard binary system example: $\bar{s}(x) = \text{mod}(x, 2)$
e.g. splits natural numbers into subsets of even/odd numbers [2]

Symbol spread function (Exa. 1)

$$S = \{0, 1\}$$

Exa. 1: Standard Binary System

N	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
s=0																			
s=1																			

Fig.1

Symbol spread function (Exa. 2)

$$\mathbf{S} = \{0, 1, 2, 3, 4, 5, 6, 7, 8, 9\}$$

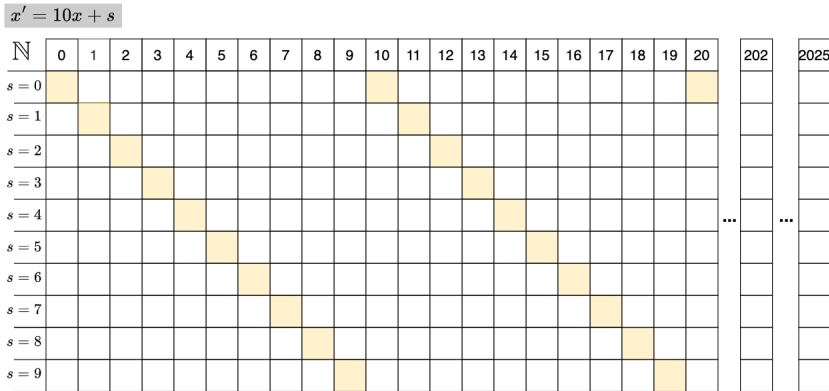


Fig.2

Representation of information (Exa. 2)

- a finite sequence of symbols/digits:

$$\mathcal{A} = \{0, 1, 2, 3, 4, 5, 6, 7, 8, 9\}$$

Representation of information (Exa. 2)

- a finite sequence of symbols/digits:

$$\mathcal{A} = \{0, 1, 2, 3, 4, 5, 6, 7, 8, 9\}$$

- the sequence of symbols/digits to be encoded:

$$S_{in} = (2, 0, 2, 5)$$

Representation of information (Exa. 2)

- a finite sequence of symbols/digits:

$$\mathcal{A} = \{0, 1, 2, 3, 4, 5, 6, 7, 8, 9\}$$

- the sequence of symbols/digits to be encoded:

$$S_{in} = (2, 0, 2, 5)$$

- How can we represent this sequence as a single number?

Representation of information (Exa. 2)

- a finite sequence of symbols/digits:

$$\mathcal{A} = \{0, 1, 2, 3, 4, 5, 6, 7, 8, 9\}$$

- the sequence of symbols/digits to be encoded:

$$S_{in} = (2, 0, 2, 5)$$

- How can we represent this sequence as a single number?
- The easiest way is to concatenate the symbols/digits:

$$x_{out} = 2025$$

Representation of Information (Exa. 2)

- encoding the sequence of digits (2,0,2,5,1,8)

$$x_{\text{init}} = 0$$

$$x_1 = x_{\text{init}} \times 10 + 2 = 2$$

$$x_2 = x_1 \times 10 + 0 = 20$$

$$x_3 = x_2 \times 10 + 2 = 202$$

$$x_{\text{out}} = x_3 \times 10 + 5 = 2025$$

Representation of Information (Exa. 2)

- What is the encoding function?

Representation of Information (Exa. 2)

- What is the encoding function?
- Encoding function

$$x_{i+1} = x_i \times 10 + s_i$$

Representation of Information (Exa. 2)

- What is the encoding function?
- Encoding function

$$x_{i+1} = x_i \times 10 + s_i$$

- x' is the x -th appearance of symbol s

$$x' = C(s, x) = x \cdot 10 + s$$

Representation of Information (Exa. 2)

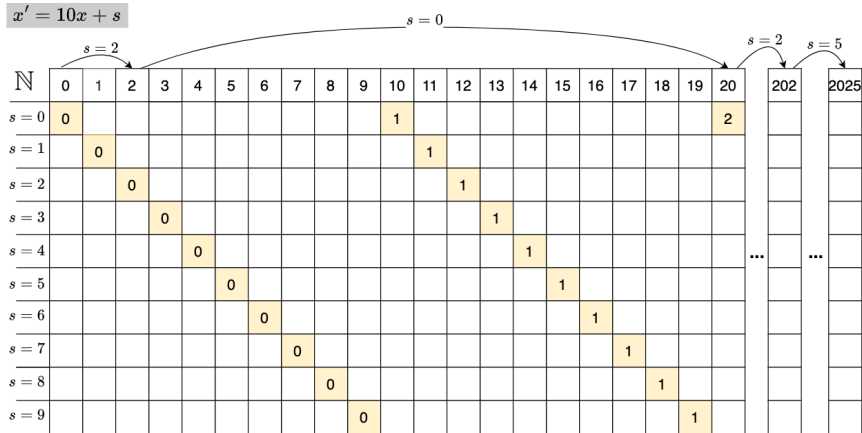


Fig.3

Representation of Information (Exa. 1)

Exa. 1: Standard Binary System

$X' = 2X + s$

X'	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
$s=0$	0		1		2		3		4		5		6		7		8		9
$s=1$		0		1		2		3		4		5		6		7		8	

Fig.4

Exa. 1: Standard Binary System

$X' = 2X + s$

	$s=1$		$s=0$				$s=0$		$s=1$										
X'	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
X $s=0$	0		1		2		3		4		5		6		7		8		9
X $s=1$		0		1		2		3		4		5		6		7		8	

Exa. 2: Standard Decimal System


$X' = 10X + s$

	$s=0$																				$s=2$	$s=5$	
N	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	202	2025
$s=0$	0										1										2		
$s=1$		0										1											
$s=2$			0										1										
$s=3$				0										1									
$s=4$					0										1						...	...	
$s=5$						0										1							
$s=6$							0										1						
$s=7$								0										1					
$s=8$									0										1				
$s=9$										0										1			

Fig.5

Asymmetric Numeral System | Symmetric or Asymmetric

Exa. 1: Standard Binary System

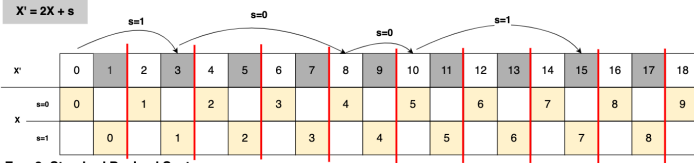

Exa. 2: Standard Decimal System

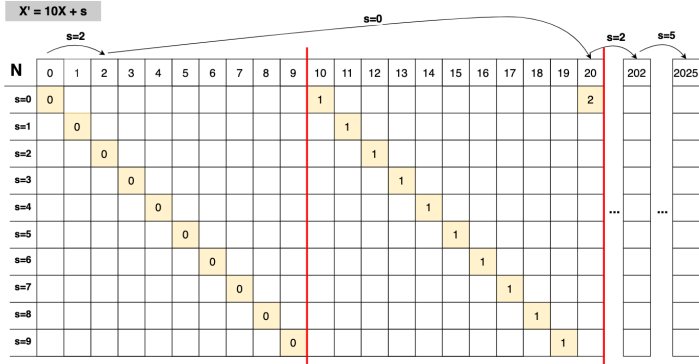


Fig.6

Exa. 3: Asymmetric Binary System

- Let $\mathcal{A} = \{0, 1\}$
- $Pr(0) = 1/4, Pr(1) = 3/4$

Exa. 3: Asymmetric Binary System

- Let $\mathcal{A} = \{0, 1\}$
- $Pr(0) = 1/4, Pr(1) = 3/4$
- a cycle of length 4, which contains 1 zero and 3 ones

Exa. 3: Asymmetric Binary System

- Let $\mathcal{A} = \{0, 1\}$
- $Pr(0) = 1/4, Pr(1) = 3/4$
- a cycle of length 4, which contains 1 zero and 3 ones
- $x' = C(s, x) \approx x/p_s$

Exa. 3: Asymmetric Binary System

Exa. 3: Asymmetric Binary System

$$x' \approx x / Pr(s) \quad Pr(0) = 1/4, Pr(1) = 3/4$$

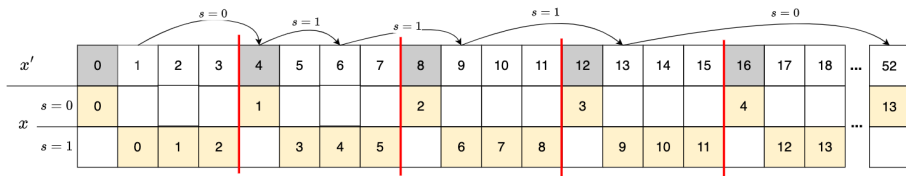


Fig. 7

We refine even/odd number by changing their densities

Symmetric or Asymmetric

- Symmetric: uniform distribution
- Asymmetric: non-uniform distribution

tANS

— d

Performance

— f

rANS

rANS

- "r" = "range": similar to range coding (RC)
- symbol spread function
- representation of information
- asymmetric


Exa.3

How to encode 101110? What is the encoding function $C(s, x)$?

$$x' = C(s, x) \approx x/p_s$$

Some notations

- $\mathcal{A} = \{s_1, s_2, \dots, s_k\}$ is the alphabet set
- s is the symbol, if it is used in subscript: s is the current symbol, $s - 1$ is the previous symbol, $s + 1$ is the next symbol
- F_s is the absolute frequency of symbol s
- $m = \sum_{s \in \mathcal{A}} F_s$ is the total frequency
- $c_s = \sum_{s \in \mathcal{A}} F_{s-1}$ is the cumulative frequency (c_{s+1} is the cumulative frequency of the next symbol)
- $p_s = F_s/m$ is the probability of symbol s
- x_i is the current state (next state: x_{i+1} , previous state: x_{i-1})

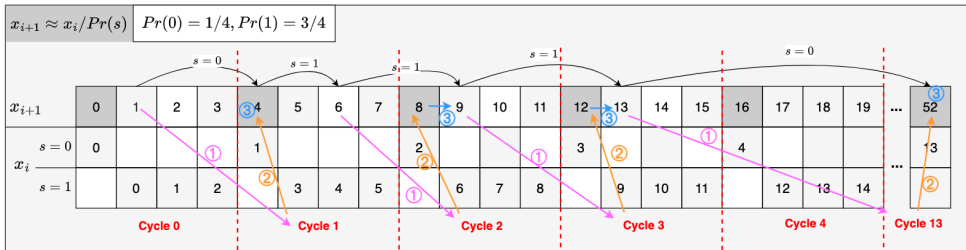

Given current state x_i and next symbol s . How to find next state x_{i+1} , which is the x_i -th appearance of symbol s ?

STEPS / EXAMPLE	$Pr(0) = 1/4, Pr(1) = 3/4$		General
	$s = 0$	$s = 1$	
Step ①: Find cycle number k	$k = \lfloor x_i / 1 \rfloor$	$k = \lfloor x_i / 3 \rfloor$	$k = \lfloor x_i / F_s \rfloor$
Step ②: Navigate to the beginning (first number) of that cycle	$4 \cdot k$	$4 \cdot k$	$m \cdot k$
Step ③: Find the position of the symbol s in that cycle	part 1: first of one + 0	part 1: + mod($x_i, 3$)	part 1: + mod(x_i, F_s)
- part 1: position of the symbol s in the sequence of the same symbol - part 2: how many other symbols before the symbol s	part 2: no other symbols + 0	part 2: only one other symbol (0) and with one of that symbol in one cycle + 1	part 2: only one other symbol (0) and with one of that symbol in one cycle + c_s
	$x_{i+1} = m \cdot k$	$x_{i+1} = 4 \cdot \lfloor x_i / 3 \rfloor + \text{mod}(x_i, 3) + 1$	$x_{i+1} = m \cdot \lfloor x_i / F_s \rfloor + \text{mod}(x_i, F_s) + c_s$

$$x_{i+1} = C(s, x_i) = m \cdot \lfloor x_i / F_s \rfloor + \text{mod}(x_i, F_s) + c_s$$


Fig.8

Encoding Function [2] [5]:

$$x_{i+1} = m \cdot \lfloor x_i / F_s \rfloor + \text{mod}(x_i, F_s) + c_s$$

implementation with python (dash app)

```
1  def rANS_encoder(symbol_counts, s_input):
2      cumul_freq = [] # c_s
3      sum_freq = 0 # m
4      x = 0 # initial state
5      output = [] # list to store encoded (symbols, state)
6
7      for count in symbol_counts:
8          cumul_freq.append(sum_freq)
9          sum_freq += count
10     for s in s_input:
11         F_s = symbol_counts[s]
12         c_s = cumul_freq[s]
13         x = sum_freq * (x // F_s) + (x % F_s) + c_s
14         output.append((s, x))
15
16     L_avg = math.ceil(math.log(x) / math.log(2.0)) / len(s_input)
17     return output, x, L_avg, entropy(symbol_counts)
```

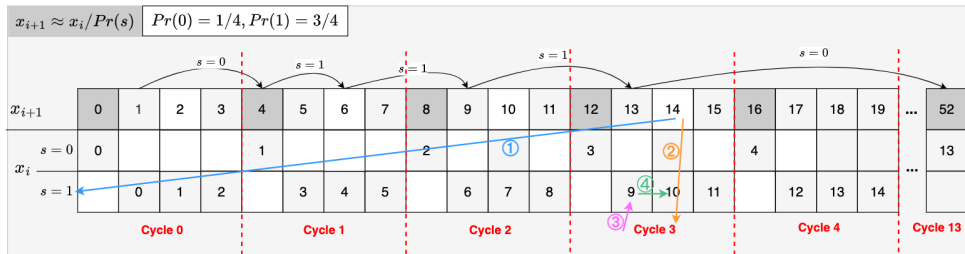

Given current state x_i . How to find previous state x_{i-1} , where x_i is the x_{i-1} -th appearance of symbol s ?

STEPS / EXAMPLE	$Pr(0) = 1/4, Pr(1) = 3/4$		General
	$s = 0$	$s = 1$	
Step ① : Find the symbol s for the state x_i	if $x_i \bmod 4 = 0$	otherwise or if $x_i \bmod 4 = 1, 2, 3$	s such that $c_s \leq \text{mod}(x_i, m) < c_{s+1}$
Step ②: Find the cycle k of the current state x_i	$k = x_i / 4$	$k = \lfloor x_i / 4 \rfloor$	$k = \lfloor x_i / m \rfloor$
Step ③: Find the first number of that symbol s in that cycle k	$x_i / 4 \cdot 1$	$\lfloor x_i / 4 \rfloor \cdot 3$	$\lfloor x_i / m \rfloor \cdot F_s$
Step ④: Allocate to the exact position	$x_{i-1} = x_i / 4 \cdot 1 + 0 - 0$	$x_{i-1} = \lfloor x_i / 4 \rfloor \cdot 3 + 2 - 1$	$x_{i+1} = \lfloor x_i / m \rfloor \cdot F_s + \text{mod}(x_i, F_s) - c_s$

1. s such that $c_s \leq \text{mod}(x_1, m) < c_{s+1}$
2. $x_{i-1} = D(x_i) = \lfloor x_i / m \rfloor \cdot F_s + \text{mod}(x_i, F_s) - c_s$

Fig.9

Decoding Function [2] [5]:

— s

s such that $c_s \leq \text{mod}(x_i, m) < c_{s+1}$

— x_{i-1}

$$x_{i-1} = D(x_i) = \lfloor x_i / m \rfloor \cdot F_s + \text{mod}(x_i, F_s) - c_s$$

implementation with python (dash app)

```
1  def rANS_decoder(symbol_counts, x):
2      cumul_freq = [] # c_s
3      sum_freq = 0 # m
4      output = [] # List to store decoded symbols and states
5      # compute m and c_s
6      for count in symbol_counts:
7          cumul_freq.append(sum_freq)
8          sum_freq += count
9      while x > 0:
10         slot = x % sum_freq # Find the slot in the cumulative frequency range
11         s = bisect_right(cumul_freq, slot) - 1 # Binary search to find the symbol s (slot).
12         F_s = symbol_counts[s] # Frequency of the symbol
13         c_s = cumul_freq[s] # Cumulative count of the symbol
14         output.append((s,x)) # Append decoded symbol to the output
15         x = (x // sum_freq) * F_s + x % sum_freq - c_s # Update the state
16     return output, state
```

Streaming-rANS

Streaming-rANS

To avoid using large number arithmetic, in practice stream variants are used: which enforce by renormalization: sending the least significant bits of x to or from the bitstream (usually L and b are powers of 2). ^[4]

Example of the problem //TODO: add example

- ANS (Asymmetric Numeral Systems) uses a single integer x , known as the “state,” to represent the encoded data.
- Over time, as more symbols are encoded, the state x can grow arbitrarily large. This can lead to:
 - Overflow: If the value exceeds the precision limits of your system (e.g., a 32-bit or 64-bit register).
 - Inefficient Encoding: A larger x means you need more memory or bits to represent it.
- Using the C function from the previous section to encode succeeding symbols, we can encode a sequence into a very large natural number x , which can be stored as a length $\lfloor \lg(x) \rfloor + 1$ bit sequence. [2]

Renormalization in Range Coding

- Range Coding
 - 1
 - 2
- we use the similar idea for rANS
 - range $[L, H]$
 - Encoding: shrink the current state x until it is in the range $[L, H]$
 - Decoding: expand the current state x until it is in the range $[L, H]$
- In AC, renormalization is used to allow finite precision, an analogous approach should be used for ANS. Specifically, we will enforce x to remain in some fixed range I by transferring the least significant bits to the stream. For generality, let us transfer a base b digit, for example $b = 2$ means transferring single bits, while $b = 2^8$ means transferring complete bytes.

Methods from Jarek Duda: Method 1 - Decoding [2]

ANS decoding step from state x

$(s, x) = D(x)$ *# decode the current state x*

useSymbol(s)

while $x < L$ **do** *# if x is too small that not in the range $[L, H]$*

expand the x by reading the outstreamed digits back from the stream (an array)

$\text{expand}(x, b) = b \cdot x + \text{readDigit}() \rightarrow x$

end while

return the new state

What is L, H ?

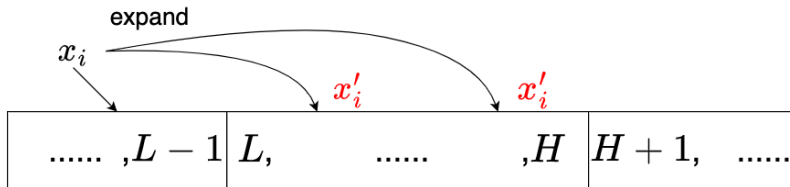


Fig 11

What is L, H ?

- $x_i = b \cdot x_{i-1} + \text{bit}$
- Either x_i in $[L, H]$ or x_{i-1} in $[L, H]$. Assume x_{i-1} in $[L, H]$.
 - $x_{i-1} \geq L$
 - $x_i \geq b \cdot L + \text{bit} \geq b \cdot L$
 - x_i can't be in $[L, H]$
 - derive: $H \leq b \cdot L - 1$
- $[L, H]$, where $H \leq b \cdot L - 1$ (Constraint 1)
- $I = \{L, \dots, b \cdot L - 1\}$, which is defined by Jarek Duda **b -unique interval** and $L \in \mathbb{N}$
- This will ensure that the loop in Method 1 will always return to the original value

Methods from Jarek Duda: Method 2 - Encoding ^[2]

shrink the current state x by stream out the least significant bit (x will be stored in binary and we take out the bit from right side)

ANS encoding step of symbol s from state x

once the current state x is greater than max value that we define later

while $x > \text{maxX}[s]$ **do**

write the least significant digit to the stream (stream could be an array in implementation)

writeDigit(mod(x , b))

shrink(x , b) = $\lfloor x/b \rfloor \rightarrow x$ *# shrink the x*

end while

$x = C(s, x)$ *# encode with the shrunk x*

What is $\max X[s]$?

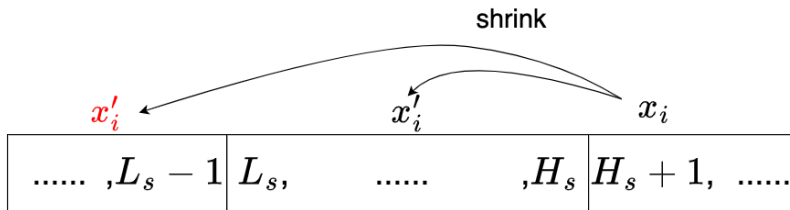


Fig 10

What is $\max X[s]$?

- to make sure not to jump over the range
- Assume that $x_i = H_s + 1$ and it will be shrinked to $x'_i = \lfloor x_i/b \rfloor$
- $x'_i = \lfloor x_i/b \rfloor = \lfloor (H_s + 1)/b \rfloor \geq L_s$
- $L_s \leq (H_s + 1)/b \leq \lfloor (H_s + 1)/b \rfloor < (H_s + 1)/b + 1$
- $H_s \geq b \cdot L_s - 1, \forall s \in \mathcal{A}$ (Constraint 2)

Final Form of $[L, H]$ in practice

- Constraints

$$[L, H] : \text{ where } H \leq b \cdot L - 1$$

$$[L_s, H_s] : H_s \geq b \cdot L_s - 1, \forall s \in \mathcal{A}$$

- In practice ($b = 2^1$): we choose $L = k \cdot m$, $L_s = k \cdot F_s$ ($k \in \mathbb{N}$)

$$\mathcal{I} = [km, 2 \cdot km - 1]$$

$$\mathcal{I}_s = [kF_s, 2 \cdot kF_s - 1] \text{ for } \forall s \in \mathcal{A}$$

implementation with python (dash app)

```
1  def rANS_stream_encoder(symbol_counts, s_input):
2      # Init: c_s, m, x, output, bit_stream (omit the code here)
3      for s in s_input:
4          F_s = symbol_counts[s]
5          c_s = cumul_freq[s]
6          L_s = F_s # k = 1
7          maxX_s = 2 * L_s - 1
8          out_bits = ""
9
10         while x > maxX_s:
11             out_bits += str(x % 2)
12             x = x // 2
13         x = (x // F_s) * sum_freq + (x % F_s) + c_s
14         bit_stream += out_bits
15         output.append((s, x, out_bits, bit_stream))
16
17     return output, x, bit_stream, L_avg, entropy(symbol_counts)
```

implementation with python (dash app)

```
1  def rANS_stream_decoder(symbol_counts, x, bit_stream, num_symbols):
2      # Init: c_s, m, x, output, bit_stream (omit the code here)
3      bit_stream = list(map(int, bit_stream.split(','))) # Convert bit_stream to a list of integers
4      for _ in range(num_symbols):
5          slot = x % sum_freq
6          s = bisect_right(cumul_freq, slot) - 1
7          F_s = symbol_counts[s]
8          c_s = cumul_freq[s]
9          output.append((s, x))
10         x = (x // sum_freq) * F_s + slot - c_s
11
12         while x < sum_freq and len(bit_stream) > 0:
13             x = x * 2 + bit_stream.pop()
14
15     return output, x
```

Summary

Summary

- To summarize, this may help you to make a Leipzig university beamer presentation.

Reference

Reference

1. C. Shannon, "A mathematical theory of communication," The Bell System Technical Journal, vol. 27, pp. 379–423, 623–656, July, October
2. J. Duda, K. Tahboub, N. J. Gadgil and E. J. Delp, "The use of asymmetric numeral systems as an accurate replacement for Huffman coding," 2015 Picture Coding Symposium (PCS), Cairns, QLD, Australia, 2015, pp. 65-69, doi: 10.1109/PCS.2015.7170048.
3. J. Duda, "Asymmetric numeral systems: entropy coding combining speed of huffman coding with compression rate of arithmetic coding," arXiv:1311.2540.
4. Asymmetric numeral systems - Wikipedia
5. What is Asymmetric Numeral Systems? - Kedar Tatwawadi 1948.