

Лабораторная работа №4

Работа с программными пакетами

Комягин Андрей Николаевич

Содержание

1	Цель работы	5
2	Выполнение лабораторной работы	6
2.1	Работа с репозиториями	6
2.2	Использование rpm	11
2.2.1	Предположим, что требуется установить текстовый браузер lynx из rpm-пакета.	11
2.2.2	Предположим, что требуется из rpm-пакетов установить dnsmasq	15
3	Контрольные вопросы	18
4	Вывод	19
	Список литературы	20

Список иллюстраций

2.1	каталог репозиториев	6
2.2	содержимое файла репозитория	7
2.3	список репозиториев	7
2.4	установка nmap	8
2.5	Удаление nmap	8
2.6	Список групп пакетов	9
2.7	установка RPM Development Tools	10
2.8	удаление RPM Development Tools	10
2.9	Просмотр истории и отмена действия	11
2.10	установка lynx из rpm-пакета	12
2.11	доп информация об lynx	12
2.12	список файлов пакета	13
2.13	файлы документации пакета	14
2.14	конфигурация, скрипты	14
2.15	пробный запуск	15
2.16	установка dnsmasq	15
2.17	информация о dnsmasq	15
2.18	список файлов в пакете	16
2.19	документация пакета	16
2.20	документация пакета	17

Список таблиц


1 Цель работы

Получить навыки работы с репозиториями и менеджерами пакетов.

2 Выполнение лабораторной работы

2.1 Работа с репозиториями

Изучим содержимое каталога репозитория и файлов репозитория. В них содержатся данные для установки программ (рис. 2.1), (рис. 2.2).

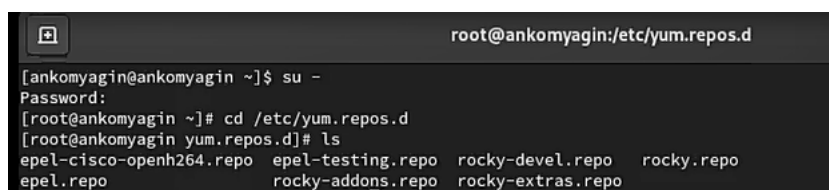

```
root@ankomyagin:/etc/yum.repos.d
[ankomyagin@ankomyagin ~]$ su -
Password:
[root@ankomyagin ~]# cd /etc/yum.repos.d
[root@ankomyagin yum.repos.d]# ls
epel-cisco-openh264.repo  epel-testing.repo  rocky-devel.repo  rocky.repo
epel.repo                 rocky-addons.repo  rocky-extras.repo
```

Рис. 2.1: каталог репозитория

```
[appstream]
name=Rocky Linux $releasever - AppStream
mirrorlist=https://mirrors.rockylinux.org/mirrorlist?arch=$basearch&repo=AppStream-$releasever$rltype
#baseurl=http://dl.rockylinux.org/$contentdir/$releasever/AppStream/$basearch/os/
gpgcheck=1
enabled=1
countme=1
metadata_expire=6h
gpgkey=file:///etc/pki/rpm-gpg/RPM-GPG-KEY-Rocky-9

[appstream-debuginfo]
name=Rocky Linux $releasever - AppStream - Debug
mirrorlist=https://mirrors.rockylinux.org/mirrorlist?arch=$basearch&repo=AppStream-$releasever-debug$rltype
#baseurl=http://dl.rockylinux.org/$contentdir/$releasever/AppStream/$basearch/debug/tree/
gpgcheck=1
enabled=0
metadata_expire=6h
gpgkey=file:///etc/pki/rpm-gpg/RPM-GPG-KEY-Rocky-9

[appstream-source]
name=Rocky Linux $releasever - AppStream - Source
mirrorlist=https://mirrors.rockylinux.org/mirrorlist?arch=source&repo=AppStream-$releasever-source$rltype
#baseurl=http://dl.rockylinux.org/$contentdir/$releasever/AppStream/source/tree/
gpgcheck=1
enabled=0
metadata_expire=6h
gpgkey=file:///etc/pki/rpm-gpg/RPM-GPG-KEY-Rocky-9

[crb]
name=Rocky Linux $releasever - CRB
mirrorlist=https://mirrors.rockylinux.org/mirrorlist?arch=$basearch&repo=CRB-$releasever$rltype
#baseurl=http://dl.rockylinux.org/$contentdir/$releasever/CRB/$basearch/os/
gpgcheck=1
enabled=0
countme=1
metadata_expire=6h
gpgkey=file:///etc/pki/rpm-gpg/RPM-GPG-KEY-Rocky-9

[crb-debuginfo]
name=Rocky Linux $releasever - CRB - Debug
mirrorlist=https://mirrors.rockylinux.org/mirrorlist?arch=$basearch&repo=CRB-$releasever-debug$rltype
#baseurl=http://dl.rockylinux.org/$contentdir/$releasever/CRB/$basearch/debug/tree/
gpgcheck=1
enabled=0
metadata_expire=6h
gpgkey=file:///etc/pki/rpm-gpg/RPM-GPG-KEY-Rocky-9
```

Рис. 2.2: содержимое файла репозитория

Выведем на экран список репозиториев (рис. 2.3).

```
epel.repo rocky-addons.repo rocky-extras.repo
[root@ankomyagin yum.repos.d]# dnf repolist
repo id repo name
appstream Rocky Linux 9 - AppStream
baseos Rocky Linux 9 - BaseOS
epel Extra Packages for Enterprise Linux 9 - x86_64
epel-cisco-openh264 Extra Packages for Enterprise Linux 9 openh264 (From Cisco) - x86_64
extras Rocky Linux 9 - Extras
[root@ankomyagin yum.repos.d]# dnf search nmap
Last metadata expiration check: 19 days, 17:25:25 ago on Sat 07 Sep 2024 07:50:10 PM MSK.
```

Рис. 2.3: список репозиториев

Установим nmap, предварительно изучив информацию по имеющимся пакетам. Разница между `dnf install nmap` и `dnf install nmap*` состоит в том, что вторая команда устанавливает все пакеты, а первая только основной (рис. 2.4).

```
[root@ankomyagin yum.repos.d]# dnf search nmap
Last metadata expiration check: 19 days, 17:25:25 ago on Sat 07 Sep 2024 07:50:10 PM MSK.
===== Name Exactly Matched: nmap =====
nmap.x86_64 : Network exploration tool and security scanner
===== Name & Summary Matched: nmap =====
nmap-ncat.x86_64 : Nmap's Netcat replacement
[root@ankomyagin yum.repos.d]# dnf info nmap
Extra Packages for Enterprise Linux 9 - x86_64                45 kB/s | 31 kB    00:00
Extra Packages for Enterprise Linux 9 - x86_64                5.2 MB/s | 23 MB   00:04
Extra Packages for Enterprise Linux 9 openh264 (From Cisco) - x86_64 2.5 kB/s | 993 B   00:00
Rocky Linux 9 - BaseOS                                         5.2 kB/s | 4.1 kB   00:00
Rocky Linux 9 - BaseOS                                         2.6 MB/s | 2.3 MB   00:00
Rocky Linux 9 - AppStream                                       10 kB/s | 4.5 kB   00:00
Rocky Linux 9 - AppStream                                       3.6 MB/s | 8.0 MB   00:02
Rocky Linux 9 - Extras                                         5.0 kB/s | 2.9 kB   00:00
Available Packages
Name           : nmap
Epoch         : 3
Version        : 7.92
Release        : 1.el9
Architecture   : x86_64
Size           : 5.4 M
Source         : nmap-7.92-1.el9.src.rpm
Repository     : appstream
Summary        : Network exploration tool and security scanner
URL            : http://nmap.org/
License        : Nmap
Description    : Nmap is a utility for network exploration or security auditing. It supports
                : ping scanning (determine which hosts are up), many port scanning techniques
                : (determine what services the hosts are offering), and TCP/IP fingerprinting
                : (remote host operating system identification). Nmap also offers flexible target
                : and port specification, decoy scanning, determination of TCP sequence
                : predictability characteristics, reverse-identd scanning, and more. In addition
                : to the classic command-line nmap executable, the Nmap suite includes a flexible
                : data transfer, redirection, and debugging tool (netcat utility ncat), a utility
                : for comparing scan results (ndiff), and a packet generation and response
                : analysis tool (nping).
[root@ankomyagin yum.repos.d]# dnf install nmap
└─
```

Рис. 2.4: установка nmap

Удалим nmap (рис. 2.5).

```
[root@ankomyagin yum.repos.d]# dnf remove nmap
Dependencies resolved.
=====
Package             Architecture      Version           Repository         Size
=====
Removing:
nmap                 x86_64           3:7.92-1.el9     @appstream         24 M
Transaction Summary
Remove 1 Package

Freed space: 24 M
Is this ok [y/N]: y
Running transaction check
Transaction check succeeded.
Running transaction test
Transaction test succeeded.
Running transaction
  Preparing                : nmap-3:7.92-1.el9.x86_64                1/1
  Erasing                  : nmap-3:7.92-1.el9.x86_64                1/1
  Running scriptlet        : nmap-3:7.92-1.el9.x86_64                1/1
  Verifying                 : nmap-3:7.92-1.el9.x86_64                1/1

Removed:
nmap-3:7.92-1.el9.x86_64

Complete!
[root@ankomyagin yum.repos.d]# dnf remove nmap\*
Dependencies resolved.
=====
Package             Architecture      Version           Repository         Size
=====
Removing:
nmap-ncat            x86_64           3:7.92-1.el9     @AppStream         469 k
Transaction Summary
Remove 1 Package
```

Рис. 2.5: Удаление nmap

Получим список имеющихся групп пакетов(рис. 2.6)


```

Last metadata expiration check: 0:02:16 ago on Fri 27 Sep 2024 01:16:07 PM MSK.
Available Environment Groups:
  Server
  Minimal Install
  Workstation
  KDE Plasma Workspaces
  Custom Operating System
  Virtualization Host
Installed Environment Groups:
  Server with GUI
Installed Groups:
  Container Management
  Development Tools
  Headless Management
Available Groups:
  Fedora Packager
  VideoLAN Client
  Xfce
  Legacy UNIX Compatibility
  Console Internet Tools
  .NET Development
  Graphical Administration Tools
  Network Servers
  RPM Development Tools
  Scientific Support
  Security Tools
  Smart Card Support
  System Tools
[root@ankomyagin yum.repos.d]# LANG=C dnf groups list
Last metadata expiration check: 0:02:37 ago on Fri Sep 27 13:16:07 2024.
Available Environment Groups:
  Server
  Minimal Install
  Workstation
  KDE Plasma Workspaces
  Custom Operating System
  Virtualization Host
Installed Environment Groups:
  Server with GUI
Installed Groups:
  Container Management
  Development Tools
  Headless Management
Available Groups:
  Fedora Packager
  VideoLAN Client
  Xfce
  Legacy UNIX Compatibility
  Console Internet Tools
  .NET Development
  Graphical Administration Tools

```

Рис. 2.6: Список групп пакетов

Установим группу пакетов RPM Development Tools (рис. 2.7)

```
[root@ankomyagin yum.repos.d]# dnf groups info "RPM Development Tools"
Last metadata expiration check: 0:03:12 ago on Fri 27 Sep 2024 01:16:07 PM MSK.
Group: RPM Development Tools
Description: Tools used for building RPMs, such as rpmbuild.
Mandatory Packages:
  redhat-rpm-config
  rpm-build
Default Packages:
  rpmddevtools
Optional Packages:
  rpmlint
[root@ankomyagin yum.repos.d]# dnf groupinstall "RPM Development Tools"
Last metadata expiration check: 0:03:21 ago on Fri 27 Sep 2024 01:16:07 PM MSK.
Dependencies resolved.
=====
Package                        Architecture      Version           Repository        Size
=====
Installing group/module packages:
rpmddevtools                  noarch            9.5-1.el9         appstream         75 k
Installing dependencies:
python3-argcomplete           noarch            1.12.0-5.el9      appstream         61 k
Installing Groups:
RPM Development Tools

Transaction Summary
=====
Install 2 Packages

Total download size: 135 k
Installed size: 414 k
Is this ok [y/N]:
```

Рис. 2.7: установка RPM Development Tools

Удалим группу пакетов RPM Development Tools (рис. 2.8).

```
[root@ankomyagin yum.repos.d]# dnf groupremove "RPM Development Tools"
Dependencies resolved.
=====
Package                        Architecture      Version           Repository        Size
=====
Removing:
rpmddevtools                  noarch            9.5-1.el9         @appstream        195 k
Removing unused dependencies:
python3-argcomplete           noarch            1.12.0-5.el9      @appstream        219 k
Removing Groups:
RPM Development Tools

Transaction Summary
=====
Remove 2 Packages

Freed space: 414 k
Is this ok [y/N]: y
Running transaction check
Transaction check succeeded.
Running transaction test
Transaction test succeeded.
Running transaction
  Preparing      : 1/1
  Erasing        : rpmddevtools-9.5-1.el9.noarch 1/2
  Erasing        : python3-argcomplete-1.12.0-5.el9.noarch 2/2
  Running scriptlet: python3-argcomplete-1.12.0-5.el9.noarch 2/2
  Verifying      : python3-argcomplete-1.12.0-5.el9.noarch 1/2
  Verifying      : rpmddevtools-9.5-1.el9.noarch 2/2
```

Рис. 2.8: удаление RPM Development Tools

Посмотрим историю использования команды dnf, отменим последнее действие(рис. 2.9)

```
[root@ankomyagin yum.repos.d]# dnf history
ID | Command line | Date and time | Action(s) | Altered
-----|-----|-----|-----|-----
10 | groupremove RPM Development Tools | 2024-09-27 13:19 | Removed | 3
9 | groupinstall RPM Development Tools | 2024-09-27 13:19 | Install | 3
8 | remove nmap* | 2024-09-27 13:17 | Removed | 1
7 | remove nmap | 2024-09-27 13:17 | Removed | 1
6 | install nmap | 2024-09-27 13:16 | Install | 1
5 | | 2024-09-14 15:34 | I, U | 16
4 | -y install pandoc | 2024-09-07 19:50 | Install | 2 <
3 | -y install epel-release | 2024-09-07 19:49 | Install | 1 >E
2 | -y update | 2024-09-07 19:25 | I, U | 164 E<
1 | | 2024-09-07 19:04 | Install | 1293 >E

[root@ankomyagin yum.repos.d]# dnf history undo 10
Last metadata expiration check: 0:04:44 ago on Fri 27 Sep 2024 01:16:07 PM MSK.
Dependencies resolved.

Двойной щелчок для перехода в полноэкранный режим, CTRL+щелчок для приведения размера экрана к размеру видео
=====
Installing group/module packages:
  rpmdevtools                                noarch                9.5-1.el9                appstream                75 k
Installing dependencies:
  python3-argcomplete                         noarch                1.12.0-5.el9             appstream                61 k
Installing Groups:
  RPM Development Tools

Transaction Summary
=====
Install 2 Packages

Total download size: 135 k
Installed size: 414 k
Is this ok [y/N]:
```

Рис. 2.9: Просмотр истории и отмена действия

2.2 Использование rpm

2.2.1 Предположим, что требуется установить текстовый браузер lynx из rpm-пакета.

Скачаем rpm-пакет lynx. Найдём каталог, в который был помещён пакет после загрузки, перейдём в этот каталог и установим rpm-пакет, определим расположение исполняемого файла(рис. 2.10)

```
[root@ankomyagin yum.repos.d]# dnf list lynx
Last metadata expiration check: 0:05:09 ago on Fri 27 Sep 2024 01:16:07 PM MSK.
Available Packages
lynx.x86_64                                2.8.9-20.el9                                appstream
[root@ankomyagin yum.repos.d]# dnf install lynx --downloadonly
Last metadata expiration check: 0:05:21 ago on Fri 27 Sep 2024 01:16:07 PM MSK.
Dependencies resolved.
=====
Package                Architecture      Version           Repository        Size
=====
Installing:
lynx                    x86_64            2.8.9-20.el9      appstream          1.5 M
=====
Transaction Summary
=====
Install 1 Package
=====
Total download size: 1.5 M
Installed size: 6.1 M
DNF will only download packages for the transaction.
Is this ok [y/N]: y
Downloading Packages:
lynx-2.8.9-20.el9.x86_64.rpm               1.7 MB/s | 1.5 MB | 00:00
-----
Total                                     1.2 MB/s | 1.5 MB | 00:01
Complete!
The downloaded packages were saved in cache until the next successful transaction.
You can remove cached packages by executing 'dnf clean packages'.
[root@ankomyagin yum.repos.d]# find /var/cache/dnf/ -name lynx
/var/cache/dnf/appstream-25485261a76941d3/packages/lynx-2.8.9-20.el9.x86_64.rpm
[root@ankomyagin yum.repos.d]# cd /var/cache/dnf/appstream-25485261a76941d3/packages/
[root@ankomyagin packages]# rpm -Uhv lynx-2.8.9-20.el9.x86_64.rpm
Verifying...                               [100%]
Preparing...                               [100%]
Updating / installing...
 1:lynx-2.8.9-20.el9                       [100%]
[root@ankomyagin packages]# which lynx
/usr/bin/lynx
```

Рис. 2.10: установка lynx из rpm-пакета

Определим по имени файла, к какому пакету принадлежит dnsmasq, получим дополнительную информацию о содержимом пакета(рис. 2.11)

```
[root@ankomyagin packages]# rpm -qf $(which lynx)
lynx-2.8.9-20.el9.x86_64
[root@ankomyagin packages]# rpm -qi lynx
Name       : lynx
Version    : 2.8.9
Release    : 20.el9
Architecture: x86_64
Install Date: Fri 27 Sep 2024 01:22:49 PM MSK
Group      : Unspecified
Size       : 6356615
License    : GPLv2
Signature  : RSA/SHA256, Tue 16 Apr 2024 02:13:04 AM MSK, Key ID 702d426d350d275d
Source RPM : lynx-2.8.9-20.el9.src.rpm
Build Date : Tue 16 Apr 2024 02:10:31 AM MSK
Build Host : pb-abd37acc-ala8-4064-a86c-09fcc75626b8-b-x86-64
Packager   : Rocky Linux Build System (Peridot) <releng@rockylinux.org>
Vendor     : Rocky Enterprise Software Foundation
URL        : http://lynx.browser.org/
Summary    : A text-based Web browser
Description:
Lynx is a text-based Web browser. Lynx does not display any images,
but it does support frames, tables, and most other HTML tags. One
advantage Lynx has over graphical browsers is speed; Lynx starts and
exits quickly and swiftly displays web pages.
```

Рис. 2.11: доп информация об lynx

Получим список всех файлов в пакете(рис. 2.12)

```
[root@ankomyagin packages]# rpm -ql lynx
/etc/lynx-site.cfg
/etc/lynx.cfg
/etc/lynx.lss
/usr/bin/lynx
/usr/lib/.build-id
/usr/lib/.build-id/5a
/usr/lib/.build-id/5a/06d3c4e1a8f4e4a2a1a5305737084bab728b85
/usr/share/doc/lynx
/usr/share/doc/lynx/INSTALLATION
/usr/share/doc/lynx/README
/usr/share/doc/lynx/docs
/usr/share/doc/lynx/docs/CHANGES2.3
/usr/share/doc/lynx/docs/CHANGES2.4
/usr/share/doc/lynx/docs/CHANGES2.5
/usr/share/doc/lynx/docs/CHANGES2.6
/usr/share/doc/lynx/docs/CHANGES2.7
/usr/share/doc/lynx/docs/CHANGES2.8
/usr/share/doc/lynx/docs/CRAWL.announce
/usr/share/doc/lynx/docs/FM.announce
/usr/share/doc/lynx/docs/IBMPC-charsets.announce
/usr/share/doc/lynx/docs/README.TRST
/usr/share/doc/lynx/docs/README.chartrans
/usr/share/doc/lynx/docs/README.cookies
/usr/share/doc/lynx/docs/README.defines
/usr/share/doc/lynx/docs/README.metrics
```

Рис. 2.12: список файлов пакета

Перечень файлов с документацией пакета (рис. 2.13)

```

/usr/share/man/man1/lynx.1.gz
[root@ankomyagin packages]# rpm -qd lynx
/usr/share/doc/lynx/INSTALLATION
/usr/share/doc/lynx/README
/usr/share/doc/lynx/docs/CHANGES2.3
/usr/share/doc/lynx/docs/CHANGES2.4
/usr/share/doc/lynx/docs/CHANGES2.5
/usr/share/doc/lynx/docs/CHANGES2.6
/usr/share/doc/lynx/docs/CHANGES2.7
/usr/share/doc/lynx/docs/CHANGES2.8
/usr/share/doc/lynx/docs/CRAWL.announce
/usr/share/doc/lynx/docs/FM.announce
/usr/share/doc/lynx/docs/IBMPC-charsets.announce
/usr/share/doc/lynx/docs/README.TRST
/usr/share/doc/lynx/docs/README.chartrans
/usr/share/doc/lynx/docs/README.cookies
/usr/share/doc/lynx/docs/README.defines
/usr/share/doc/lynx/docs/README.metrics
/usr/share/doc/lynx/docs/README.options
/usr/share/doc/lynx/docs/README.release
/usr/share/doc/lynx/docs/README.rootcerts
/usr/share/doc/lynx/docs/README.ssl
/usr/share/doc/lynx/docs/README.sslcerts
/usr/share/doc/lynx/docs/INETSHR.announce
/usr/share/doc/lynx/docs/TCPWARE.announce
/usr/share/doc/lynx/docs/VMSWAIS.announce
/usr/share/doc/lynx/docs/djgpp.key
/usr/share/doc/lynx/docs/pdcurses.key
/usr/share/doc/lynx/docs/slang.key
/usr/share/doc/lynx/docs/win-386.announce
/usr/share/doc/lynx/lynx.hlp
/usr/share/doc/lynx/lynx_help/Lynx_users_guide.html
/usr/share/doc/lynx/lynx_help/about_lynx.html
/usr/share/doc/lynx/lynx_help/help_files.txt
/usr/share/doc/lynx/lynx_help/keystrokes/alt_edit_help.html
/usr/share/doc/lynx/lynx_help/keystrokes/bashlike_edit_help.html
/usr/share/doc/lynx/lynx_help/keystrokes/bookmark_help.html
/usr/share/doc/lynx/lynx_help/keystrokes/cookie_help.html
/usr/share/doc/lynx/lynx_help/keystrokes/dired_help.html
/usr/share/doc/lynx/lynx_help/keystrokes/edit_help.html
/usr/share/doc/lynx/lynx_help/keystrokes/environments.html
/usr/share/doc/lynx/lynx_help/keystrokes/follow_help.html
/usr/share/doc/lynx/lynx_help/keystrokes/gopher_types_help.html
/usr/share/doc/lynx/lynx_help/keystrokes/history_help.html
/usr/share/doc/lynx/lynx_help/keystrokes/keystroke_help.html
/usr/share/doc/lynx/lynx_help/keystrokes/movement_help.html
/usr/share/doc/lynx/lynx_help/keystrokes/option_help.html
/usr/share/doc/lynx/lynx_help/keystrokes/other_help.html

```

Рис. 2.13: файлы документации пакета

Выведем на экран перечень и месторасположение конфигурационных файлов пакета, выведем расположение и содержание скриптов (их нет)(рис. 2.14)

```

[root@ankomyagin packages]# rpm -qc lynx
/etc/lynx-site.cfg
/etc/lynx.cfg
/etc/lynx.lss
[root@ankomyagin packages]# rpm -q --scripts lynx
[root@ankomyagin packages]#

```

Рис. 2.14: конфигурация, скрипты

Запустим текстовый браузер lynx, чтобы проверить корректность установки пакета (рис. 2.15).

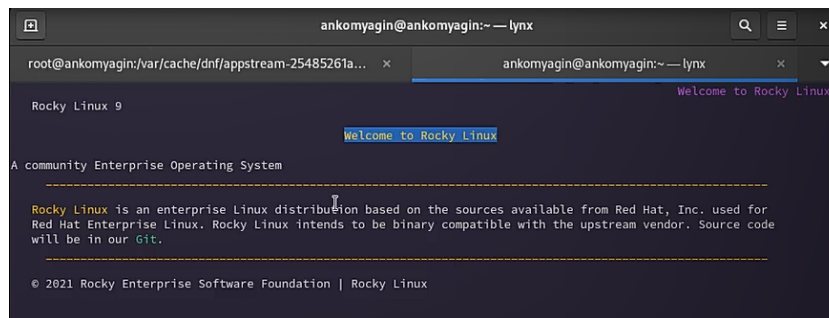


Рис. 2.15: пробный запуск

2.2.2 Предположим, что требуется из rpm-пакетов установить dnsmasq

установим пакет dnsmasq(рис. 2.16)

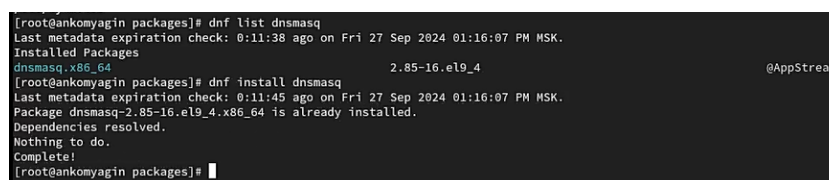


Рис. 2.16: установка dnsmasq

Определим по имени файла, к какому пакету принадлежит dnsmasqi получим дополнительную информацию о содержимом пакета (рис. 2.17)

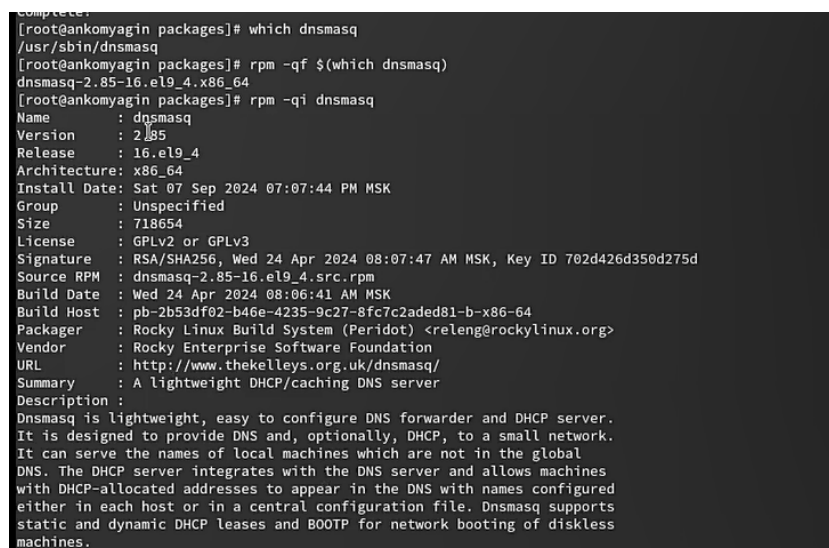



Рис. 2.17: информация о dnsmasqi

Получим список всех файлов в пакете (рис. 2.18)

```
[root@ankomyagin packages]# rpm -ql dnsmasq
/etc/dbus-1/system.d/dnsmasq.conf
/etc/dnsmasq.conf
/etc/dnsmasq.d
/usr/lib/.build-id
/usr/lib/.build-id/f0
/usr/lib/.build-id/f0/9a26532944eaa77f523aeea8b091bbb7c5ae67
/usr/lib/systemd/system/dnsmasq.service
/usr/lib/sysusers.d/dnsmasq.conf
/usr/sbin/dnsmasq
/usr/share/dnsmasq
/usr/share/dnsmasq/trust-anchors.conf
/usr/share/doc/dnsmasq
/usr/share/doc/dnsmasq/CHANGELOG
/usr/share/doc/dnsmasq/DBus-interface
/usr/share/doc/dnsmasq/FAQ
/usr/share/doc/dnsmasq/doc.html
/usr/share/doc/dnsmasq/setup.html
/usr/share/licenses/dnsmasq
/usr/share/licenses/dnsmasq/COPYING
/usr/share/licenses/dnsmasq/COPYING-v3
/usr/share/man/man8/dnsmasq.8.gz
/var/lib/dnsmasq
[root@ankomyagin packages]# rpm -qd dnsmasq
/usr/share/doc/dnsmasq/CHANGELOG
/usr/share/doc/dnsmasq/DBus-interface
/usr/share/doc/dnsmasq/FAQ
/usr/share/doc/dnsmasq/doc.html
/usr/share/doc/dnsmasq/setup.html
/usr/share/man/man8/dnsmasq.8.gz
[root@ankomyagin packages]#
```

Рис. 2.18: список файлов в пакете

выведем перечень файлов с документацией пакета (рис. 2.19)

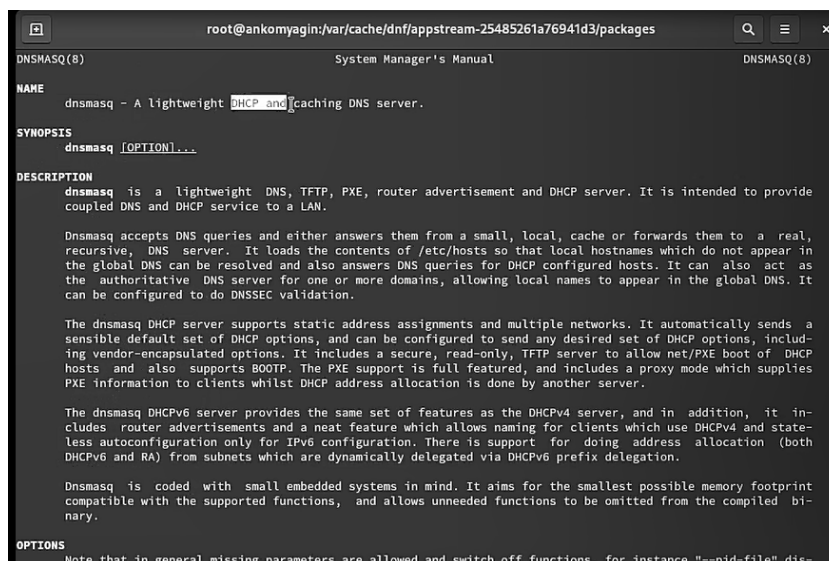

```
root@ankomyagin:/var/cache/dnf/appstream-25485261a76941d3/packages
DNMSAQ(8) System Manager's Manual DNMSAQ(8)

NAME
  dnsmasq - A lightweight DHCP and caching DNS server.

SYNOPSIS
  dnsmasq [OPTION]...

DESCRIPTION
  dnsmasq is a lightweight DNS, TFTP, PXE, router advertisement and DHCP server. It is intended to provide coupled DNS and DHCP service to a LAN.

  Dnsmasq accepts DNS queries and either answers them from a small, local, cache or forwards them to a real, recursive, DNS server. It loads the contents of /etc/hosts so that local hostnames which do not appear in the global DNS can be resolved and also answers DNS queries for DHCP configured hosts. It can also act as the authoritative DNS server for one or more domains, allowing local names to appear in the global DNS. It can be configured to do DNSSEC validation.

  The dnsmasq DHCP server supports static address assignments and multiple networks. It automatically sends a sensible default set of DHCP options, and can be configured to send any desired set of DHCP options, including vendor-encapsulated options. It includes a secure, read-only, TFTP server to allow net/PXE boot of DHCP hosts and also supports BOOTP. The PXE support is full featured, and includes a proxy mode which supplies PXE information to clients whilst DHCP address allocation is done by another server.

  The dnsmasq DHCPv6 server provides the same set of features as the DHCPv4 server, and in addition, it includes router advertisements and a neat feature which allows naming for clients which use DHCPv4 and stateless autoconfiguration only for IPv6 configuration. There is support for doing address allocation (both DHCPv6 and RA) from subnets which are dynamically delegated via DHCPv6 prefix delegation.

  Dnsmasq is coded with small embedded systems in mind. It aims for the smallest possible memory footprint compatible with the supported functions, and allows unneeded functions to be omitted from the compiled binary.

OPTIONS
  Note that in general missing parameters are allowed and switch off functions, for instance "--pid-file" dis-
```

Рис. 2.19: документация пакета

Выведем на экран перечень и месторасположение конфигурационных файлов пакета, выведем на экран расположение и содержание скриптов, выполняемых при установке пакета (рис. 2.20)


```

[root@ankomyagin packages]# rpm -qc dnsmasq
/etc/dbus-1/system.d/dnsmasq.conf
/etc/dnsmasq.conf
[root@ankomyagin packages]# rpm -q --scripts dnsmasq
preinstall scriptlet (using /bin/sh):
#precreate users so that rpm can install files owned by that user
#
# generated from dnsmasq-systemd-sysusers.conf
getent group 'dnsmasq' >/dev/null || groupadd -r 'dnsmasq' || :
getent passwd 'dnsmasq' >/dev/null || \
    useradd -r -g 'dnsmasq' -d '/var/lib/dnsmasq' -s '/usr/sbin/nologin' -c 'Dnsmasq DHCP and DNS server' 'dnsmasq' || :
postinstall scriptlet (using /bin/sh):

if [ $1 -eq 1 ] && [ -x "/usr/lib/systemd/systemd-update-helper" ]; then
    # Initial installation
    /usr/lib/systemd/systemd-update-helper install-system-units dnsmasq.service || :
fi
preuninstall scriptlet (using /bin/sh):

if [ $1 -eq 0 ] && [ -x "/usr/lib/systemd/systemd-update-helper" ]; then
    # Package removal, not upgrade
    /usr/lib/systemd/systemd-update-helper remove-system-units dnsmasq.service || :
fi
postuninstall scriptlet (using /bin/sh):

if [ $1 -ge 1 ] && [ -x "/usr/lib/systemd/systemd-update-helper" ]; then
    # Package upgrade, not uninstall
    /usr/lib/systemd/systemd-update-helper mark-restart-system-units dnsmasq.service || :
fi
[root@ankomyagin packages]#

```

Рис. 2.20: документация пакета

Этот скрипт предназначен для управления установкой, удалением и обновлением пакета dnsmasq.

1. **preinstall scriptlet** выполняется перед установкой пакета. Это необходимо для того, чтобы файлы, устанавливаемые пакетом, могли принадлежать этому пользователю.
2. **postinstall scriptlet** выполняется после установки пакета. Это нужно для того, чтобы служба могла управляться через systemd.
3. **preuninstall scriptlet** выполняется перед удалением пакета. Это необходимо, чтобы корректно удалить все связанные с пакетом настройки.
4. **postuninstall scriptlet** выполняется после удаления пакета. Это нужно для того, чтобы изменения вступили в силу после обновления.

3 Контрольные вопросы

1. Какая команда позволяет вам искать пакет `rpm`, содержащий файл `useradd`?

`rpm -qf $(which useradd)`

2. Какие команды вам нужно использовать, чтобы показать имя группы `dnf`, которая содержит инструменты безопасности и показывает, что находится в этой группе?

`dnf group list dnf group info "Имя группы"`

3. Какая команда позволяет вам установить `rpm`, который вы загрузили из Интернета и который не находится в репозиториях?

`rpm -ivh имя_пакета.rpm`

4. Вы хотите убедиться, что пакет `rpm`, который вы загрузили, не содержит никакого опасного кода сценария. Какая команда позволяет это сделать?

`rpm -K имя_пакета.rpm`

5. Какая команда показывает всю документацию в `rpm`?

`rpm -qd имя_пакета`

6. Какая команда показывает, какому пакету `rpm` принадлежит файл?

`rpm -qf /путь/к/файлу`

4 Вывод

В ходе выполнения лабораторной работы я получил навыки работы с репозиториями и менеджерами пакетов.

Список литературы

Туис, курс Администрирование операционных систем