

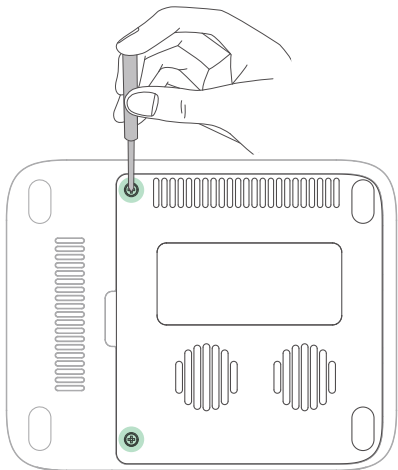


4. Reinstall the panel and tighten the screws.

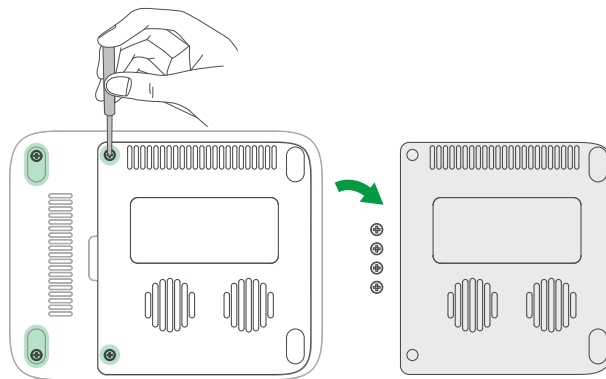


Installing Memory Modules


1. Power off the NAS device, then turn it over. Remove the bottom feet as shown in the image and loosen the screws under the bottom feet and the screws on the bottom panel, then remove the panel.

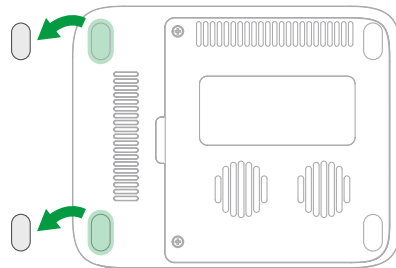


2. Loosen the fixing screws of the case and the fixing screws of M.2 drives, then remove all the drives.

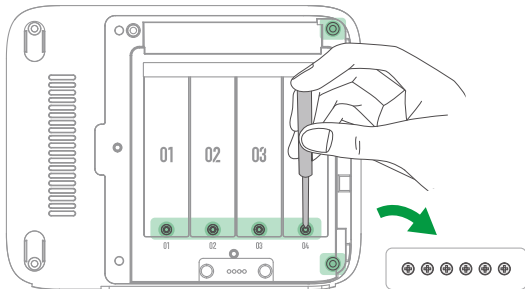


3. Remove the bottom case.



4. Align the notch on the pins of the module with the corresponding ridge in the slot. Insert the memory module into the slot. Gently push down the memory module to ensure it is properly inserted.

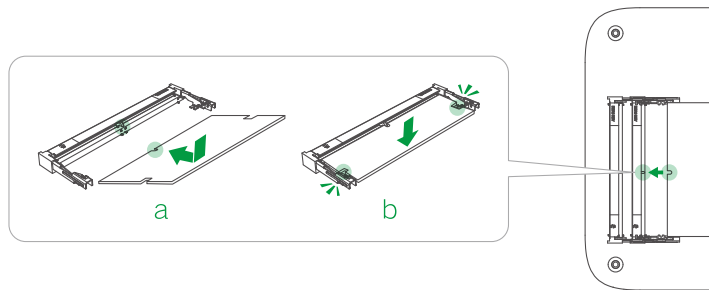


5. Reinstall the bottom case and panel, tighten the screws, and reinstall the feet.

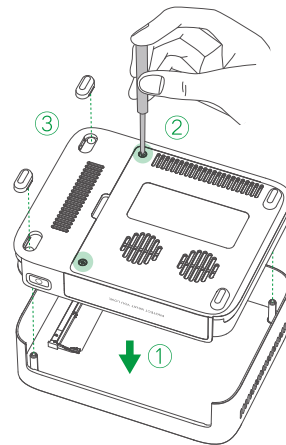

Powering On

Connect the power adapter to the device, then short press the power button to turn it on.
Tips: After powering on, you can download "UGREEN NAS" then go to "Control Panel" > "Hardware & Power" to select automatic startup after powering on.

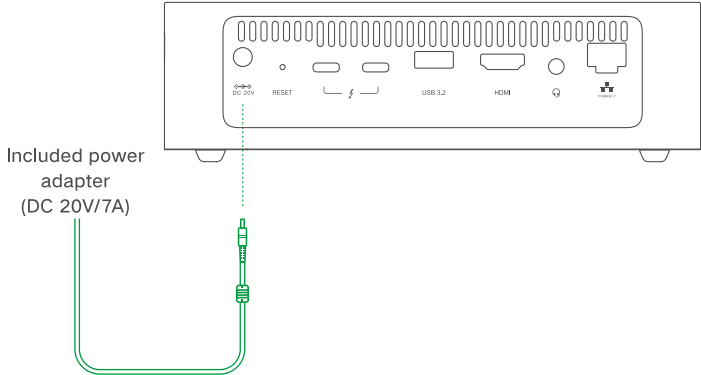

Warning

To avoid potential fires, explosions, or other electrical hazards, please do NOT use non-Ugreen power adapters or uncertified power adapters.

Indicator

LED	Color	Status	Description
Power Indicator	White	Static	Working properly
		Flashing (once per 0.5s)	Powering off
	Orange	Slow flashing (once per 1s)	Device error

Buzzer

Status	Beeper
Power on	Short beep once
System reset	Short beep once
Drive error	Beep once at 3-second intervals
System error	Beep once at 2-second intervals

Web Client—Binding & Settings

Step 1: Add Device

- ① Please ensure that the NAS device and computer are on the same local area network (LAN), then visit the URL: find.ugnas.com.
- ② The system will automatically search the devices in your current LAN.
- ③ Select the device you want to add and click "Connect".

Step 2: Initialize the Device

- ① After adding the device, you will enter the initialization settings interface.
- ② In this interface, please complete the following operations:
 - Name the device: Name your device to ensure it's easy to identify and manage.
 - Create a local administrator account: Register a local administrator account for the device to manage the device.
 - Register and bind UGREEN Cloud account (optional): If you want to use additional functions such as UGREENlink and Quick Login. You can choose to register a UGREEN Cloud account and bind your device. If not, you can choose to skip this step and use only the local account to log in to the device.
- ③ After completing the above operations, please check the update system option (required) and the device analysis improvement plan option (not required), then you can start using the device.

Note: If the device does not undergo the initialization process, its status will be displayed as "Not Initialized".

Step 3: Set up Storage Mode

Enter the "UGREEN NAS" > "Storage Manager", then you can set up storage mode and configure storage space.

Phones/Tablets & Other Devices—Binding & Settings

1. Application Download

- Option 1: Scan the QR code below or the QR code on the device using your phone to install the "UGREEN NAS" app.
- Option 2: Go to UGREEN's official website (<https://nas.ugreen.com/download>), download and install the corresponding application.



Scan to install

2. Binding & Settings

Step 1: Add Device

- ① Please ensure that the NAS device and your phone or computer are on the same LAN.
- ② Open "UGREEN NAS". The system will automatically search for devices. You can also add a device by scanning the QR code on the bottom of the device.
- ③ Select the device you want to add and click "Connect".

Step 2: Initialize the Device

- ① After adding the device, you will enter the initialization settings interface.
- ② In this interface, please complete the following operations:
 - Name the device: Name your device to ensure it's easy to identify and manage.
 - Create a local administrator account: Register a local administrator account for the device to manage the device.
 - Register and bind UGREEN Cloud account (optional): If you want to use additional functions such as UGREENlink and Quick Login. You can choose to register a UGREEN Cloud account and bind your device. If not, you can choose to skip this step and use only the local account to log in to the device.
- ③ After completing the above operations, please check the update system option (required) and the device analysis improvement plan option (not required), then you can start using the device.

Note: If the device does not undergo the initialization process, its status will be displayed as "Not Initialized".

Step 3: Set up Storage Mode

Enter the "UGREEN NAS" > "Storage Manager", then you can set up storage mode and configure storage space.

Network Configuration Options (Choose One)

1. Wired Connection (Recommended)

Use Ethernet cable to connect NAS to a LAN port on a router.

2. Wi-Fi Connection

- ① Ensure the NAS is connected to the wired network and has been bound to your device.
- ② Log in to the "UGREEN NAS" App > "Control Panel" > "Network Setting" > click "Wireless Network Card Name" to enter network connection page.
- ③ Select the desired wireless network and enter the password in "Network Connection". Check "Remember This Network" and "Auto-join" for automatic connection later.
- ④ Click "OK" to complete the settings.

Note: The NAS system will give priority to the wired network when the device connects to wired and wireless networks simultaneously.

Device Sharing

Option 1 (the invited user and NAS are on the same network):

The administrator logs in to "UGREEN NAS" > enters "Control Panel" > "User Management" > "Add" to create a new user account, and provides the account and password to the invited user; the invited user logs in to the "UGREEN NAS", searches for the device via the LAN, then enters the account password to activate the account and bind the device.

Option 2 (the invited user and NAS are not on the same network):

Firstly, the administrator enables the UGREENlink online service, then logs in to the "UGREEN NAS", enters "Control Panel" > "User Management" > "Invite" to enable the invitation settings, and copies the invitation link to the invited users. When invited users open the link, enter the account information, then they can apply to access the device.

Note: UGREENlink online service is an external network access service provided by "UGREEN NAS", allowing you to access the app without needing to adjust complicated network settings.

Reset Network & Password

When the NAS device is turned on, use a pin-like object to insert and hold the "RESET" hole for 5s until you hear the buzzer beeping. The device will not restart during the reset process. After the reset is complete, the solid white network indicators will turn on, indicating that the device is ready for use.

Please note that the reset will not affect the data stored in the hard drive. After successful resetting, you can log in to the system with the "admin" account and blank password (this account is specifically utilized for password resets). Once logged in, follow the step-by-step wizard to configure your administrator password.

Features Description

UGREENlink Service

An extranet access service provided by "UGREEN NAS", allowing users to remotely access the NAS device under an external network environment. After enabling, users can directly access data through the PC, browser, and mobile app without adjusting complicated network settings.

Thunderbolt 4 Port for Faster Transmission

The Thunderbolt 4 ports on DXP480T Plus deliver up to 40Gbps of bidirectional bandwidth, making data migration or storage capacity expansion a breeze.

File Manager

A powerful tool that efficiently manages all files on your device, offering convenient functions for file sharing and uploading. File Manager also includes other practical features like flexible folder permission settings and remote server access, enhancing the convenience of your file management experience.

Sync & Backup

The sync function guarantees consistent data synchronization between the UGREEN NAS application and your entire device ecosystem: PCs, file servers, as well as other Ugreen NAS devices. Additionally, the comprehensive backup feature offers reliable data protection, minimizing the risk of accidental loss. Users have the flexibility to select backup targets according to their specific needs, such as the local UGREEN NAS device, file server, PCs, or phones, ensuring personalized backup requirements are met.

Album

Seamlessly manage and share precious moments through this intuitive album application. Rediscover the joy of browsing through old photos as Album enable effortless navigation through an extensive media and photographic library. Album also allows you to organize photos by categorizing the people in them and creating personalized albums. Keep all your cherished memories preserved for a lifetime and more.

Video Center

Video Center is a comprehensive film and television media service application designed exclusively for home users, offering an unparalleled multimedia experience. Seamlessly manage your personal collection of films and TV shows, create captivating poster walls, and easily project your favorite content onto TVs or projectors. Whether it is a special moment shared with loved ones or videos of a private getaway, the Video Center promises an unforgettable audio-visual adventure for all.

Music

A feature-rich application tailored for music enthusiasts. With the Music, easily organize and navigate through your musical collection, ensuring that all your favorite tracks are at your fingertips. Craft personalized playlists to suit any mood or occasion, for a fully immersive experience in superior sound quality.

Notices

- Please place the NAS device as referred to in the illustrations in this manual. Do not turn the device upside down, or place it upright while operating.
- Please put the NAS in an environment with a stable temperature and low humidity. Avoid direct sunlight or any liquids coming into contact with the device.
- In the event of a thunderstorm or inconsistent voltage, power off the device to avoid potential damage.
- Keep the device away from heat sources or humid environments to reduce the risk of fire or electric shock.
- Do not insert foreign objects into the NAS to avoid damage caused by abnormal use or short circuit.
- Please power off the NAS device before cleaning. When cleaning, use a moist wipe. Do not use chemicals or spray cleaners.
- Do not drop, squeeze, violently impact, or throw the NAS.
- This device contains small parts and pieces, please keep it out of reach of children to prevent choking due to unintended swallowing.
- Do not dismantle or fix the NAS device by yourself. Improper disassembly and assembly may cause electric shock or other safety hazards. If repair or replacement parts and/or accessories are required, please contact UGREEN customer service.

WARNING

- **INGESTION HAZARD:** This product contains a button cell or coin battery.
- **DEATH** or serious injury can occur if ingested.
- A swallowed button cell or coin battery can cause **Internal Chemical Burns** in as little as **2 hours**.
- **KEEP** new and used batteries **OUT OF REACH of CHILDREN**
- **Seek immediate medical attention** if a battery is suspected to be swallowed or inserted inside any part of the body.



1. Remove and immediately recycle or dispose of used battery according to local regulations and keep away from children. Do NOT dispose of battery in household trash or incinerate.
2. Even used battery may cause severe injury or death.
3. If the battery has been accidentally swallowed or placed inside any part of the body, it may cause severe internal burns or other hazards. Call a local poison control center for treatment information.
4. This product contains a non-replaceable battery of the type CR2032 (3.0 Vdc).
5. Non-rechargeable battery is not to be recharged.
6. Do not force discharge, recharge, disassemble, heat above 85°C or incinerate. Doing so may result in injury due to venting, leakage or explosion resulting in chemical burns.
7. Do not dismantle, open or shred secondary cells or batteries.
8. Do not expose battery to heat, fire, or direct sunlight.
9. Do not short-circuit a cell or a battery. Do not store cells or batteries haphazardly in a box or drawer where they may short-circuit each other or be short-circuited by other metal objects.
10. Do not subject cells or batteries to mechanical shock. In the event of a cell leaking, do not allow the liquid to come in contact with the skin or eyes. If contact has been made, wash the affected area with copious amounts of water and seek medical advice.
11. Do not use any charger other than that specifically provided for use with the equipment.
12. Always purchase the battery recommended by the device manufacturer for the equipment.
13. Keep clean and dry.
14. Retain the original product literature for future reference.
15. Use only the cell or battery in the application for which it was intended.
16. Dispose of properly.
17. BATTERY WARNING: KEEP OUT OF REACH OF CHILDREN.
18. Do not ingest batteries as it can result in a Chemical Burn Hazard.

19. This product contains a coin/button cell battery. If the coin or button cell battery is swallowed, it can cause severe internal burns in just 2 hours and can lead to death. If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.

20. Example information on symptoms from battery ingestion:

No obvious symptoms

Unfortunately, it is not obvious when a button or coin battery is stuck in a child's oesophagus (food pipe). There are no specific symptoms associated with this. The child might:

- cough, gag or drool a lot;
- appear to have a stomach upset or a virus;
- be sick;
- point to their throat or stomach;
- have a pain in their abdomen, chest or throat;
- be tired or lethargic;
- be quieter or more clingy than usual or otherwise "not themselves";
- lose their appetite or have a reduced appetite; and
- not want to eat solid food/be unable to eat solid food.

These sorts of symptoms vary or fluctuate, with the pain increasing and then subsiding.

A specific symptom to button and coin battery ingestion is vomiting fresh (bright red) blood. If the child does this seek immediate medical help.

The lack of clear symptoms is why it is important to be vigilant with "flat" or spare button or coin batteries in the home and the products that contain them.

Specifications

Product Name	Network Attached Storage
Model	DXP480T Plus
Operating System	UGOS Pro
Processor	Intel i5-1235U 10-core
Max Turbo Frequency	4.40GHz
Memory Types	SODIMM DDR5
Memory Capacity	8 GB-64 GB (depends on the actual configuration of the device model) / 64 GB (max memory size)
System Storage	128GB SSD
Supported Drive	4×NVMe 2280 SSD
File System	Internal: ext4/Btrfs
	External: Btrfs/ext3/ext4/FAT16/FAT32/exFAT/HFS Plus/NTFS/XFS
	Internal non-"UGREEN NAS" storage pool: Btrfs/ext3/ext4/FAT16/FAT32/exFAT/HFS Plus/NTFS/XFS
Video Port	1×HDMI, 4K (Smooth playback of 8K videos requires an extra memory module installed)
RJ45 Ethernet Port	1×10GbE Support 10Mbps/100Mbps/1000Mbps/2.5Gbps/5Gbps/10Gbps auto-negotiation
Wi-Fi Protocols	Wi-Fi 6, supports 5GHz and 2.4GHz
USB Port	2×Thunderbolt 4, supports theoretical transfer rate of up to 40Gbps 1×USB 3.2 Gen 2, supports theoretical transfer rate of up to 10Gbps
Power Source Specification	20V/7A
Compatible Systems	Phone: Android 7.0/iOS 15 or later Computer: Windows 7 SP2 or later/macOS High Sierra 10.13.6 or later
Working Environment	Temperature: 0°C~40°C/32°F~104°F Humidity: 5% to 95%
Product Dimensions	L179×W142×H52 (mm)/L7.0×W5.6×H2.0 (inch)

包装清单




主机×1




说明书×1



保修卡×1




20V/7A
电源适配器×1



网线 (CAT7) ×1



SSD 导热硅胶片×4




螺丝刀及螺丝钉

产品展示



电源指示灯

电源键

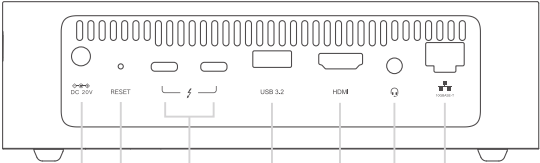

电源接口

复位键

Thunderbolt 4×2


10GbE 网口

3.5mm 耳机接口


HDMI 接口

USB 3.2 Gen 2 接口

2. 将 M.2 硬盘如图所示方向对应插入 M.2 插槽，拧紧尾部固定螺钉。

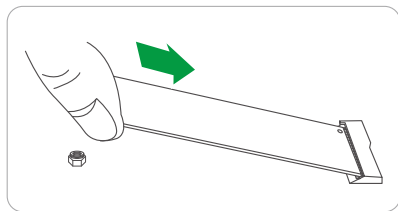


a

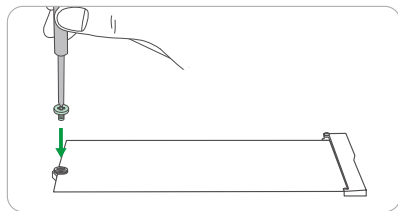


b

3. 导热片撕掉背膜，贴在 M.2 硬盘上，再撕下另一面背膜。

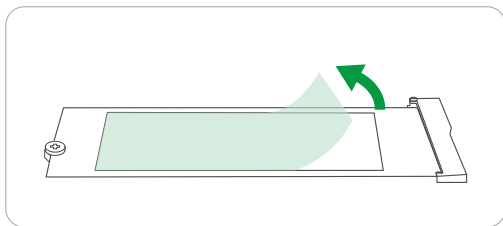


4. 装回面板，拧紧螺钉。

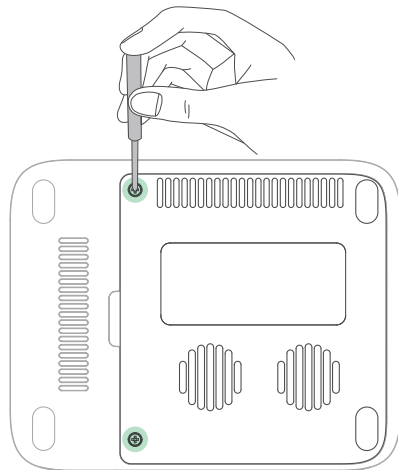


安装内存条


1. 在设备关机断电状态下, 将其翻转至底部, 取下脚垫, 然后拧松螺钉, 取下底盖。

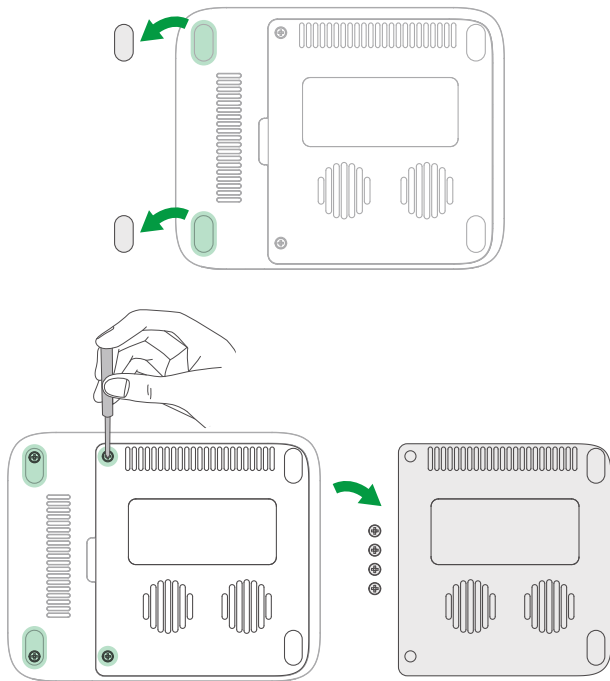


2. 拧松固壳螺钉、固盘螺钉, 拆下 M.2 硬盘。

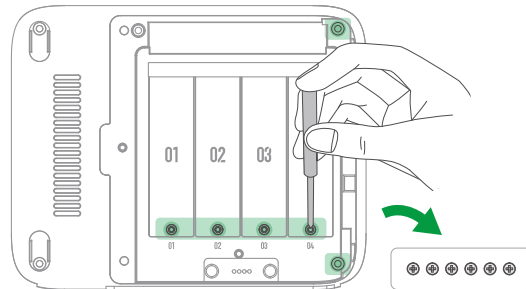


3. 取下底部外壳。



4. 将内存条金手指与插槽中的“凸起横杠”对齐并轻轻插入，轻微按压确保金手指完全插入插槽中。

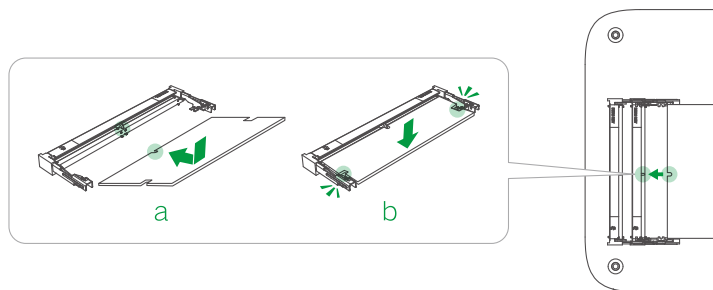


5. 依次装回外壳和底盖，拧紧螺钉，安装脚垫。

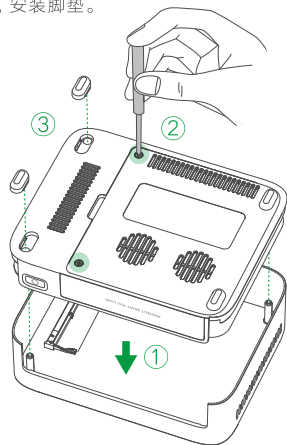

设备开机

接通电源适配器，短按电源键开机。

提示：开机后，安装并登录「绿联云」App > 「控制面板」> 「硬件与电源」，设置通电自动开机。

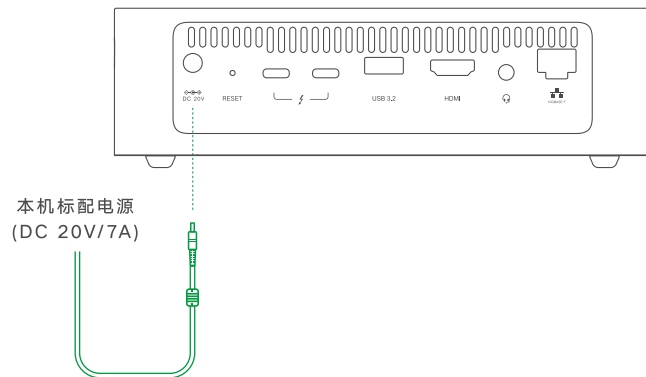

警告

严禁使用非标配或非认证的电源，严重可能导致爆炸危险！

指示灯

LED 指示灯	颜色	状态	说明
电源指示灯	白色	常亮	正常运行
		闪烁 (每 0.5 秒一次)	关机中
	橙色	慢闪 (每秒一次)	设备故障

蜂鸣器

状态	蜂鸣器
开机	响一次
重置系统	响一次
硬盘故障	间隔响 (每 3 秒响一次)
系统故障	间隔响 (每 2 秒响一次)

电脑 Web 端—绑定与设置

第一步 添加设备

- ① 请确保设备和电脑在同一局域网内，访问网址：find.ugnas.com。
- ② 系统将自动搜索并显示您当前局域网内的设备。
- ③ 选择您要添加的设备，然后点击“连接”。

第二步 初始化设备

- ① 添加设备后，您将进入初始化设备界面。
- ② 在该界面中，请完成以下操作：
 - 为设备命名：为设备取一个便于识别和管理的名称。
 - 创建本地管理员账号：为设备注册一个本地管理员账号，用于管理该设备。
 - 注册并绑定绿联云账号（非必填）：如果您希望使用 UGREENlink、快捷登录等额外功能。可以选择注册并绑定绿联云账号。如果不需要，可以选择跳过此步骤，只使用本地账号登录设备。
- ③ 完成上述操作后，请勾选更新系统选项（必选）和设备分析改进计划选项（非必选），然后就可以开始使用设备。

注意：如果设备未进行初始化流程，则其状态将显示为“未初始化”。

第三步 设置存储池

进入「绿联云」功能界面，找到“存储管理器”选项，进入后可设置存储池和创建存储空间。

手机/平板电脑等设备—绑定与设置

1. 客户端下载

方式一：手机扫描下方二维码或设备上的二维码，安装「绿联云」App。

方式二：请前往绿联官网 (<https://www.ugnas.com/download>)，下载和安装客户端。



手机扫一扫，安装「绿联云」App

2. 绑定与设置

第一步 添加设备

- ① 确保您的设备与手机（或电脑）在同一局域网内。
- ② 打开「绿联云」App，系统将自动搜索并显示您当前局域网内的设备。您还可以通过扫描设备底部的二维码的方式来添加设备。
- ③ 选择您要添加的设备，然后点击“连接”。

第二步 初始化设备

- ① 添加设备后，您将进入初始化设备界面。
- ② 在该界面中，请完成以下操作：
 - 为设备命名：为设备取一个便于识别和管理的名称。
 - 创建本地管理员账号：为设备注册一个本地管理员账号，用于管理该设备。
 - 注册并绑定绿联云账号（非必填）：如果您希望使用 UGREENlink、快捷登录等额外功能。可以选择注册并绑定绿联云账号。如果不需要，可以选择跳过此步骤，只使用本地账号登录设备。
- ③ 完成上述操作后，请勾选更新系统选项（必选）和设备分析改进计划选项（非必选），然后就可以开始使用设备。

注意：如果设备未进行初始化流程，则其状态将显示为“未初始化”。

第三步 设置存储池

进入「绿联云」功能界面，找到“存储管理器”选项，进入后可设置存储池和创建存储空间。

网络设置方式 (二选一)

1. 有线连接（推荐）

用网线将设备连接至路由器的 LAN 口即可开始使用。

2. Wi-Fi 连接

- ① 确保设备已连接有线网络并完成绑定。
- ② 登录「绿联云」App 客户端，进入「控制面板」>「网络设置」，点击“无线网卡名称”进入网络连接界面。
- ③ 选择您想要连接的 Wi-Fi 并输入密码，勾选“记住该网络”和“自动加入”。
- ④ 点击“确定”即完成设置。

注意：如果设备同时连接了有线网络和 Wi-Fi，则系统会优先使用有线网络。

分享设备

方式一(受邀用户与设备在同一网络环境):
管理员登录「绿联云」App, 进入「控制面板」>「用户管理」>「新增」创建新用户后, 将新用户账号及密码提供给受邀用户; 受邀用户安装并登录「绿联云」客户端, 通过局域网扫描并发现设备, 输入管理员分享的账号密码激活账号以绑定设备。

方式二(受邀用户与设备不在同一网络环境):
管理员先开启 UGREENlink 在线服务, 然后登录「绿联云」App, 进入「控制面板」>「用户管理」>「邀请」开启邀请设置, 将“链接邀请”复制提供给受邀用户; 受邀用户打开链接邀请, 填写账号信息申请加入设备。

注: UGREENlink 在线服务是「绿联云」提供的外网访问服务, 通过此服务, 无需复杂的网络设置就可以访问「绿联云」设备。

重置网络和密码

在设备开机状态下, 用卡针按住设备上的“RESET”键 5 秒钟, 直至设备发出一声短哔声后再松开按键。重置过程中设备不会重启。重置完成后, 网络指示灯将显示白色常亮, 表示您可以正常使用该设备。

请注意, 重置操作不会影响您硬盘中存储的数据。成功重置后, 可使用“admin”这个账号+空密码登录(此账号仅用于密码重置)。登录系统后跟随向导完成相关管理员密码设置。

特色功能介绍

UGREENlink 服务

本功能为「绿联云」提供的外网访问服务。启用此服务后, 在外网环境下, 您也可通过 PC 客户端、浏览器、手机 App 直接访问「绿联云」设备, 无需复杂的网络设置。

Thunderbolt 4 高速传输

DXP480T Plus 搭载了前沿的 Thunderbolt 4 接口, 它能提供高达 40Gbps 的双通道带宽, 无论您是在进行数据迁移, 还是扩展存储容量, 都可以轻松应对。

文件管理器

文件管理器是一款功能强大的工具, 能够帮助您高效地管理设备中的所有文件。便捷的文件分享功能让您轻松与好友分享文件, 同时支持好友将文件上传至您的设备。此外, 文件管理器还支持灵活的文件夹权限设置和远程服务器访问, 让您的文件管理更加便利。

同步与备份

通过同步功能, 您可以实现绿联云客户端与 PC 电脑、其它绿联云设备、文件服务器之间的数据同步, 从而始终保持数据在不同的设备之间的一致性。同时, 备份功能为数据提供全面保护, 防止意外损失。您可以根据个人需求自由选择备份目标, 包括本地绿联云、文件服务器、PC 电脑及手机, 以满足您的个性化备份需求。

相册

相册应用可以帮助您轻松管理并分享所有照片。您可以快速找到珍贵的时刻, 对照片中的人物进行分类, 并创建个性化的相册。与家人和朋友一起维护这个相册, 让属于您的回忆得以长久留存。

影视中心

影视中心是专为家庭用户设计的影视媒体服务应用, 旨在为您提供卓越的多媒体体验。通过影视中心, 您可以轻松管理自己的影视内容, 创建个性化的海报墙, 还可以在大屏电视、投影仪等家庭设备上观看您喜爱的影视作品。无论是家庭聚会还是个人娱乐, 影视中心都能给您带来沉浸式的视听体验。

绿联云音乐

绿联云音乐是一款专为用户设计的音乐播放器应用, 旨在帮助您高效管理个人的音乐库。它提供了丰富的功能, 让您能够轻松创建个性化的歌单。绿联云音乐让您的音乐体验更加愉悦, 随时随地享受优质的音乐。

注意事项

- 请参照本使用说明图示放置产品，请勿倒置或竖立。
- 请确保产品放置环境的温度和湿度恒定，切勿暴露在直接受阳光曝晒或可能接触任何液体的环境中。
- 在雷雨天气或电压不稳定时，请将产品关机断电，停止使用，以免产品受到损坏。
- 请将产品远离热源或潮湿的环境使用，避免火灾或电击的危险。
- 请勿将异物插入本产品内，以免使用异常或短路导致损坏。
- 清洁产品前，请务必断开电源连接，可用湿纸巾擦拭表面，切勿使用化学或喷雾式清洁剂清洁。
- 请勿跌落、挤压、撞击、投掷本产品，避免损坏本产品。
- 本产品含有细小配件，请放置在儿童接触不到的地方，以免误吞造成窒息危险。
- 请勿自行拆装及维修本产品，拆装不当可能会导致触电或其他安全隐患，若需维修请联系绿联售后。

⚠ 安全警示

- 本产品内置锂-二氧化锰扣式电池，禁止拆解、撞击、挤压或投入火中。
- 请勿将本产品置于高温环境中。
- 请将本产品放置在儿童不能接触的地方，以确保儿童远离电池。
- 若电池被误吞或误置入身体其他部位，请立即就医，否则将对人体内部造成灼伤或其他危险。
- 禁止对电池充电，如电量不足请更换电池。更换电池时，请按正确的极性安装。
- 若电池漏液，请勿使皮肤或眼睛接触到漏出的液体。若已接触到皮肤或眼睛上，请立即用清水冲洗，并尽快就医。
- 若电池需废弃，请将其远离儿童，并根据当地法律法规回收或处理。



产品参数

产品名称	网络存储服务器
产品型号	DXP480T Plus
操作系统	UGOS Pro
处理器	Intel i5-1235U 十核
最大睿频频率	4.40GHz
内存类型	SODIMM DDR5
内存容量	8 GB-64 GB (根据实际选购机器的配置而定); 整机最高支持 64 GB
系统存储	128GB SSD
兼容硬盘类型	2280 NVMe 硬盘×4
文件系统	内部: ext4/Btrfs
	外部: Btrfs/ext3/ext4/FAT16/FAT32/exFAT/HFS Plus/NTFS/XFS
文件系统	内部非「绿联云」存储池: Btrfs/ext3/ext4/FAT16/FAT32/exFAT/HFS Plus/NTFS/XFS
视频接口	HDMI×1, 4K (流畅播放 8K 视频需增加一个内存条)
RJ45 网口	10GbE×1 支持 10Mbps/100Mbps/1000Mbps/2.5Gbps/5Gbps/10Gbps 自适应
无线规格	Wi-Fi 6, 支持 5GHz/2.4GHz
存储扩展接口	Thunderbolt 4×2, 理论最大传输速率 40Gbps USB 3.2 Gen 2×1, 理论最大传输速率 10Gbps
电源适配器	20V/7A
支持客户端	Android 7.0/iOS 15 及以上的手机 Windows 7 SP2 及以上/ macOS High Sierra 10.13.6 及以上的电脑
工作环境	温度: 0℃ 至 40℃ 湿度: 5% 至 95%
产品尺寸	L179×W142×H52 (mm)