

A Theory of Information Architecture for Networked Decisions: Freshness, Locality, and Coordination

Scott Moeller

Independent Researcher, Portsmouth, RI, USA

`scott.h.moeller@gmail.com`

Bhaskar Krishnamachari

University of Southern California

`bkrishna@usc.edu`

September 2026

Abstract

Networked systems face a tradeoff between the scope of the information behind a decision and its freshness: a broader view of the system supports better coordination, but assembling and communicating it takes time, so it arrives older. We study this tradeoff for a team of agents that repeatedly choose actions to minimize a shared quadratic cost driven by an environment that evolves on its own, unaffected by the agents' actions. An information architecture specifies what each agent observes, from where, and with what delay; we measure an architecture by the cost it loses relative to a decision made with complete, current information. We first compare fresh local observations with a complete but delayed global view. For affine full-information decisions in a common-rate Gauss–Markov environment, this comparison reduces to a closed-form threshold on the ratio of delay to coherence time. We then study intermediate architectures in which each agent acts on a time-aligned, and therefore older, snapshot of a wider neighborhood. An interior optimal neighborhood radius satisfies a balance between the marginal value of added scope and the marginal cost of lost freshness. In a canonical spatial model, this radius is set by the spatial-correlation, decision-relevance, and temporal-propagation lengths. Throughout, architecture performance is governed by the predictability of the optimal decision rather than of the raw state.

1 Introduction

Many networked systems must repeatedly make coupled decisions using information that is distributed across space and changes over time. A wireless transmitter may know its current local channel state but not the current interference conditions elsewhere in the network; an edge server may observe its own workload immediately while a system-wide view is available only after telemetry has been collected and disseminated; and a distributed sensing system may have fresh measurements from nearby sensors while observations from distant sensors arrive with greater latency. In each case, broad information can improve coordination, but obtaining it takes time. The resulting design choice is not simply between centralized and distributed control, but between *information architectures* that differ simultaneously in spatial scope and temporal freshness.

This tension appears in several literatures under different performance models. Work on stale information in distributed systems shows that old global state can lose much of its value [1], and Age of Information formalizes freshness as a system resource [2]. Distributed optimization studies computation under communication constraints [3], organizational economics studies adaptation to local information versus coordination [4], and networked-control work examines how communication scope, topology, and propagation delay interact with closed-loop performance.

Distributed-control work establishes controller localization and models finite-speed or distance-dependent communication [5–8]. Most directly, Ballotta, Jovanović, and Schenato show that scope-dependent delay can make sparse feedback outperform all-to-all control [9]; Section 7.2 develops the comparison with this literature.

The distinction pursued here is the decision problem and the resulting analytical object. The environment evolves exogenously, and each epoch is a static team decision. Dynamic feedback control, in which the controller changes future plant state, lies outside this setting. For a fixed information architecture, performance is the Q -weighted loss in reproducing the current full-information decision, where Q is the cost’s Hessian, defined in Section 2.1. We then vary spatial scope and information age jointly. Under a model in which every component of the environment decorrelates at the same exponential rate (the common-rate model), this prediction-theoretic formulation yields an exact composition identity for spatial omission and temporal staleness, a fresh-local versus stale-global crossover in terms of decision-relevant predictability, and a marginal-balance characterization of the synchronized-snapshot radius. In the canonical field model, these quantities produce an explicit radius law involving temporal coherence, spatial correlation, decision-relevance length, and propagation speed.

This paper develops a theory for this tradeoff. We consider a collection of agents operating in an exogenously evolving stochastic environment $\theta_t = (\theta_{1,t}, \dots, \theta_{n,t})$. At each decision epoch the agents select a joint action $x_t = (x_{1,t}, \dots, x_{n,t})$ that incurs a common cost $f(x_t, \theta_t)$. An *information architecture* specifies the information available to each agent when this decision is made. Thus a fresh-local architecture may allow agent i to condition on the current $\theta_{i,t}$, a neighborhood architecture may provide the states of agents within a given spatial radius, and a global architecture may provide the entire state vector only after a delay τ . Each of these architectures uses a synchronized snapshot of current or delayed state. More generally, an architecture specifies *who knows what, from where, and at what age*.

Our analysis uses the classical fixed-information framework of static team decision theory initiated by Radner [10]: a static team has multiple decision makers sharing one objective, each acting on its own information, whose actions do not affect what anyone later observes. In the quadratic model considered here, whose Hessian Q is constant and state-independent, completing the square reduces optimization under any fixed information architecture to a Hilbert-space approximation problem: the team-optimal policy under any fixed architecture is the Q -orthogonal projection of the full-information action, and architecture regret is the squared projection distance (Section 2.4). We study an outer design problem: comparison and selection within a structured family in which information scope and age vary jointly. Classical team and information-structure work has also treated information and organizational networks as design objects [11, 12]. The narrower question pursued here is how scope-dependent age changes the value of a synchronized-snapshot radius family when information is evaluated through prediction error of the full-information decision.

Our first result answers the two extreme points of this tradeoff. We compare a *fresh-local* architecture, in which each agent observes its current local state, against a *stale-global* architecture, in which every agent has access to the complete system state with delay τ . In general, the loss from staleness is governed by the prediction error of the current decision-relevant state from information τ units old. For a Gauss–Markov environment with temporal coherence time T , and for an affine full-information decision, stale-global regret grows as $1 - e^{-2\tau/T}$ toward the open-loop regret. Fresh-local information is preferred once this temporal loss exceeds the share of decision-relevant variation not captured locally. In a canonical shared-resource quadratic model, where τ is the global-information delay, T is the temporal coherence time, q is local stiffness, and γ is coordination strength, the

large-system threshold is

$$\left(\frac{\tau}{T}\right)^* = \frac{1}{2} \log \left(1 + \frac{\gamma}{q}\right), \quad (1)$$

making explicit how stronger decision coupling increases the amount of staleness that is worth tolerating in exchange for global coordination.

The local–global comparison concerns two pure benchmark regimes. Our second result considers agents embedded in a graph or spatial domain and a synchronized-snapshot family in which each agent bases its decision on a time-aligned neighborhood snapshot of radius r . Increasing r replaces a narrower, fresher snapshot by a broader snapshot of greater age $\tau(r)$. The resulting architecture faces two competing sources of error: a *spatial omission error*, caused by excluding decision-relevant state beyond radius r , and a *temporal staleness error*, caused by the delay required to acquire the broader information.

We characterize this tradeoff using the spatial and temporal predictability of the underlying stochastic field. In a canonical model, the optimal radius is determined jointly by spatial correlation, temporal coherence, the scope–delay relation, and the coupling structure of the decision objective. The result yields comparative statics with direct architectural interpretations: faster temporal variation favors smaller and fresher information radii; faster information propagation supports broader coordination; and stronger long-range decision coupling increases the value of larger information scope. Spatial smoothness determines how rapidly additional spatial observations become redundant and hence how much information radius is needed to approximate global decisions. Under tractable spatio-temporal covariance and propagation models, these effects combine into dimensionless scaling laws for r^* .

The framework separates information architecture from the algorithm used to implement it. It consequently complements canonical distributed-optimization formulations, where the communication structure is specified first and the principal question is how to compute efficiently over it [3]. We study a structured outer comparison over a scope–age family. Similarly, unlike freshness metrics that assign value to an update primarily through its age [2], the value of an observation here depends on how much it changes the downstream decision. This perspective also suggests extensions to heterogeneous information radii, sparse long-range information “shortcuts,” low-dimensional global summaries, and budget-constrained information acquisition.

Our model is restricted to *static* information structures: the stochastic environment may be temporally and spatially correlated, but agents’ current actions do not alter the information subsequently observed by other agents. This boundary is consequential. Once actions influence future observations, they act simultaneously as control actions and implicit signals; Witsenhausen’s counterexample [13] shows that this interaction breaks the projection structure our analysis relies on. This theory is most directly applicable to repeated networked optimization against an exogenously evolving environment, for example, stylized quadratic or locally quadratic models of rate, power, compute, or sensing decisions driven by changing demand, channel, or resource conditions. Fully constrained engineering formulations, controlled queueing, and decentralized Markov decision processes lie beyond this baseline.

In summary, this paper makes two technical contributions and one conceptual contribution:

1. We derive an exact *fresh-local versus stale-global crossover law* for two pure information regimes, expressed through decision-relevant temporal predictability and the share of decision variation captured locally.
2. For a synchronized-snapshot radius family under the common-rate model, we derive an exact spatio-temporal prediction-error composition law and use it to characterize the optimal radius

by a marginal balance between spatial-information gain and freshness loss. In a canonical field model, this yields an explicit scaling law in the spatial-correlation, decision-relevance, and temporal-propagation lengths.

3. We show that, within the analyzed framework, architecture performance is governed by *decision-relevant predictability*, not raw state predictability. The desired architecture depends jointly on environmental statistics, decision sensitivity and coupling, information geometry, and freshness; the communication graph and decision geometry therefore need not coincide.

To situate the contribution precisely: scope-dependent communication delay and optimal architectures of intermediate sparsity both appear in prior networked-control work [9, 14–16]. What is new here is the decision problem and the resulting analytical object: an exogenous environment, a stagewise team decision, and an architecture valued by its prediction error for the full-information decision. This formulation yields the composition identity between spatial omission and temporal staleness, the fresh-local versus stale-global crossover, and the coordination-radius laws that follow.

Section 2 formalizes architectures and regret. Section 3 compares the fresh-local and stale-global endpoints, and Sections 4–5 develop the radius family and its optimal coordination scale. Section 6 reports numerical checks, Section 7 situates the work, and Section 8 concludes.

2 Networked Decisions and Information Architectures

We consider a network of decision-making agents operating in a stochastic environment whose state is distributed across the network and evolves over time. Our formulation separates three distinct objects: the *network geometry*, which defines relationships and distances among agents; the *decision problem*, which determines how their actions and states interact in the objective; and the *information architecture*, which determines what information is available to each agent and with what delay. These three structures need not coincide.

The environment evolves exogenously: agents react to the state but their current actions do not alter the law governing its future evolution. The model therefore describes repeated information-constrained decisions against an exogenous environment. Under the fixed-information static-team formulation, the quadratic model used here has a constant, state-independent Hessian and admits the projection characterization developed below.

Table 1 collects the principal notation used throughout the paper; we introduce each object in context below.

2.1 Network, Environment, and Decision Model

There are n decision-making agents indexed by

$$V = \{1, \dots, n\},$$

represented as the vertices of a graph

$$G = (V, E). \tag{2}$$

The graph provides a notion of network or spatial proximity. We write $d_G(i, j)$ for the graph distance between nodes i and j , and define the radius- r neighborhood of node i as

$$\mathcal{N}_r(i) \triangleq \{j \in V : d_G(i, j) \leq r\}. \tag{3}$$

Depending on the application, G may represent a physical communication network, a geographic neighborhood relation, or another structure governing the cost or latency of obtaining nonlocal information.¹

Let

$$\theta = \{\theta_t\}_{t \in \mathbb{T}}$$

be a stochastic process defined on a probability space $(\Omega, \mathcal{F}, \mathbb{P})$, where $\mathbb{T}$ may be discrete or continuous. At time t , the environment state is

$$\theta_t = (\theta_{1,t}, \dots, \theta_{n,t}) \in \mathbb{R}^m, \quad \theta_{i,t} \in \mathbb{R}^{m_i}, \quad \sum_{i=1}^n m_i = m. \quad (4)$$

The component $\theta_{i,t}$ denotes the state locally associated with node i . Depending on the application, it may represent a local channel condition, workload or demand, sensing quality, resource availability, or another externally evolving quantity relevant to the decision.

For the basic results in this section, we assume that θ_t is stationary and square-integrable:

$$\mathbb{E}\|\theta_t\|^2 < \infty. \quad (5)$$

No independence, Gaussianity, Markov property, or specific form of spatial or temporal correlation is required. More structured stochastic models will be introduced later when we derive explicit architecture laws.

Agent i chooses an action

$$x_{i,t} \in \mathbb{R}^{d_i},$$

and the joint action is

$$x_t = (x_{1,t}, \dots, x_{n,t}) \in \mathbb{R}^d, \quad d = \sum_{i=1}^n d_i. \quad (6)$$

The agents share a common per-stage cost

$$f(x, \theta) = \frac{1}{2}x^\top Qx - b(\theta)^\top x + c(\theta), \quad (7)$$

where $Q \in \mathbb{R}^{d \times d}$ is symmetric and positive definite, $b : \mathbb{R}^m \rightarrow \mathbb{R}^d$ is measurable, and $c : \mathbb{R}^m \rightarrow \mathbb{R}$ is an additive state-dependent term. We assume

$$\mathbb{E}\|b(\theta_t)\|^2 < \infty, \quad \mathbb{E}|c(\theta_t)| < \infty. \quad (8)$$

The matrix Q describes coupling among the agents' actions. If Q is partitioned according to $x = (x_1, \dots, x_n)$, an off-diagonal block Q_{ij} captures direct interaction between the decisions of agents i and j . The mapping $b(\theta)$ provides another form of coupling: the preferred action of agent i may depend on states associated with other agents.

We emphasize that this decision coupling is distinct from the graph G . The graph describes network proximity and information propagation, whereas Q and $b(\cdot)$ determine which states and actions are relevant to one another in the objective. Nearby agents need not be strongly coupled, and strong decision coupling may exist between distant nodes.

¹The graph model is adopted for concreteness. The framework can more generally be formulated for agents embedded in a metric space, or for any collection of agents equipped with a meaningful notion of neighborhoods and information-propagation cost.

If the complete current state θ_t is available without information constraints, the unique optimal joint action is

$$x_t^* \triangleq x^*(\theta_t) = Q^{-1}b(\theta_t). \quad (9)$$

We call x_t^* the *clairvoyant* or *full-information* decision.

For the affine specializations used to obtain closed forms, we write

$$b(\theta) = B\theta + b_0, \quad B \in \mathbb{R}^{d \times m}, \quad b_0 \in \mathbb{R}^d, \quad K \triangleq Q^{-1}B \in \mathbb{R}^{d \times m}. \quad (10)$$

The matrix B maps state into the linear term of the objective, while K is the resulting decision-sensitivity operator. The general projection results do not require this affine form.

Completing the square in (7) gives

$$f(x, \theta) - f(x^*(\theta), \theta) = \frac{1}{2} (x - x^*(\theta))^\top Q (x - x^*(\theta)). \quad (11)$$

Hence, for the quadratic model, excess decision cost is exactly a weighted squared error in reproducing the full-information action.

2.2 Information Architectures

An *information architecture* specifies what information is available to each agent when its decision is made. At a fixed decision epoch, let

$$\mathcal{G}_i \subseteq \mathcal{F}$$

denote the σ -algebra representing the information available to agent i . An information architecture is the tuple

$$\mathcal{A} = (\mathcal{G}_1, \dots, \mathcal{G}_n). \quad (12)$$

A decision rule for agent i is admissible only if it is measurable with respect to $\mathcal{G}_i$.

This abstraction accommodates information patterns that differ in spatial scope, temporal freshness, and degree of aggregation.

Fresh-local information. Agent i observes its own current state:

$$\mathcal{G}_{i,t}^{\text{loc}} = \sigma(\theta_{i,t}). \quad (13)$$

This architecture has minimal spatial scope and no imposed information delay.

Stale-global information. Every agent has access to the complete state snapshot at time $t - \tau$:

$$\mathcal{G}_{i,t}^{\text{glob}}(\tau) = \sigma(\theta_{t-\tau}), \quad i = 1, \dots, n. \quad (14)$$

This architecture has maximal spatial scope but potentially substantial staleness.

Radius- r information. More generally, agent i may obtain state information from nodes within graph distance r :

$$\mathcal{G}_{i,t}^{(r)} = \sigma(\theta_{j,t-\tau(r)} : j \in \mathcal{N}_r(i)). \quad (15)$$

The radius family studied below is a synchronized-snapshot architecture. At radius r , the decision is formed from a time-aligned neighborhood snapshot whose age is $\tau(r)$; increasing r replaces, rather than augments, the fresher narrow snapshot. This restriction models applications requiring

temporal consistency or a common decision epoch. If fresh local and delayed remote information can instead be freely combined, the resulting hybrid architecture contains more information and weakly dominates either source alone; such mixed-age architectures are outside the principal family analyzed here.

A closely related common-delay-by-scope abstraction appears in Ballotta, Jovanović, and Schenato [9]; see Section 7.2.

Here $\tau(r)$ denotes the latency required to acquire information over radius r . We focus on systems for which

$$r_2 \geq r_1 \implies \tau(r_2) \geq \tau(r_1), \quad (16)$$

so that broader information is systematically less fresh.

With $\tau(0) = 0$, the synchronized-snapshot radius family interpolates between its fresh-local and stale-global endpoints by definition. At the smallest radius, each decision relies on a narrow, rapidly available snapshot. As r increases, that snapshot is replaced by a broader but older view. When r reaches the diameter of a finite connected graph, (15) is the stale-global snapshot in (14).

Local information plus a global summary. An architecture need not transport raw remote state. Agent i may instead combine fresh-local information with a low-dimensional statistic

$$z_t = h(\theta_t)$$

of the global state:

$$\mathcal{G}_{i,t}^{\text{hyb}} = \sigma(\theta_{i,t}) \vee \sigma(z_{t-\tau_z}). \quad (17)$$

Examples include congestion prices, aggregate load indicators, or other summaries intended to communicate the globally decision-relevant portion of the state. The hybrid always contains the fresh-local information set. It dominates the stale-global benchmark only if the delayed summary preserves all delayed global information; an arbitrary low-dimensional summary need not.

For a given architecture $\mathcal{A}$, define the admissible joint-policy set

$$\mathcal{S}(\mathcal{A}) \triangleq \{u = (u_1, \dots, u_n) : u_i \in L^2, u_i \text{ is } \mathcal{G}_i\text{-measurable, } i = 1, \dots, n\}. \quad (18)$$

In plain terms, " u_i is $\mathcal{G}_i$ -measurable" means that u_i is a function of what agent i observes. For example, under $\mathcal{G}_{i,t}^{\text{loc}} = \sigma(\theta_{i,t})$ the admissible rules are exactly the square-integrable measurable functions $u_i = g(\theta_{i,t})$. (This is the Doob–Dynkin lemma; see Appendix A.1.) Throughout, "information architecture" can be read as "a list saying which variables each agent's decision may depend on."

Thus an information architecture constrains the information on which each decision may depend; it does not prescribe a specific algorithm for computing that decision.

The sets $\mathcal{G}_i$ are exogenously specified: current actions neither change the law of θ_t nor other agents' information, as discussed in Section 1.

2.3 Architecture Regret

We evaluate an architecture by the best expected performance achievable under its information restrictions. Define

$$J(\mathcal{A}) \triangleq \inf_{u \in \mathcal{S}(\mathcal{A})} \mathbb{E}[f(u, \theta_t)], \quad (19)$$

and let

$$J^* \triangleq \mathbb{E}[f(x_t^*, \theta_t)] \quad (20)$$

denote the expected full-information cost.

The *architecture regret* is

$$R(\mathcal{A}) \triangleq J(\mathcal{A}) - J^*. \quad (21)$$

Here “regret” denotes a static expected performance gap after optimizing over all policies admissible under the architecture, distinct from cumulative regret in sequential decision making or online learning.

Because the environment is stationary, this expected per-stage regret is independent of the particular decision epoch, and the expected finite-horizon average equals the same one-stage expectation. Almost-sure convergence of sample-path time averages additionally requires ergodicity.

At this stage, $R(\mathcal{A})$ measures only the decision-quality consequence of an information restriction. We do not separately charge for communication, sensing, or computation. The physical cost of obtaining broader information enters through the feasible architecture and, in particular, through the scope–latency relation $\tau(r)$.

If two architectures $\mathcal{A}$ and $\mathcal{A}'$ satisfy

$$\mathcal{G}_i \subseteq \mathcal{G}'_i, \quad i = 1, \dots, n, \quad (22)$$

then every policy feasible under $\mathcal{A}$ is also feasible under $\mathcal{A}'$, and therefore

$$R(\mathcal{A}') \leq R(\mathcal{A}). \quad (23)$$

Thus additional information cannot hurt when it is available with the same freshness. The interesting architectural tradeoff arises because increasing spatial scope generally also increases information age.

2.4 Fixed-Architecture Quadratic Projection

The classical fixed-information static-team formulation supplies coupled person-by-person optimality conditions [10]. In this quadratic model, completing the square turns those conditions into the projection characterization below. We use this fixed-architecture result as the inner optimization primitive for the outer scope–age comparison. Related affine-gain projection formulations appear in Krainak, Speyer, and Marcus [17].

Let

$$\mathcal{H} = L^2(\Omega, \mathcal{F}, \mathbb{P}; \mathbb{R}^d) \quad (24)$$

and equip $\mathcal{H}$ with the weighted inner product

$$\langle u, v \rangle_Q \triangleq \mathbb{E} \left[u^\top Q v \right], \quad \|u\|_Q^2 \triangleq \langle u, u \rangle_Q. \quad (25)$$

Since $Q \succ 0$, the induced norm is equivalent to the ordinary L^2 norm.

Lemma 1 (Fixed-architecture quadratic projection; Radner-type specialization). *For any static information architecture $\mathcal{A}$, the admissible policy set $\mathcal{S}(\mathcal{A})$ defined in (18) is a closed linear subspace of $\mathcal{H}$. Under the quadratic cost (7), the unique optimal policy implementable under $\mathcal{A}$ is*

$$u_{\mathcal{A}}^* = \Pi_{\mathcal{S}(\mathcal{A})} x_t^*, \quad (26)$$

where $\Pi_{\mathcal{S}(\mathcal{A})}$ denotes orthogonal projection with respect to (25). Consequently,

$$R(\mathcal{A}) = \frac{1}{2} \|x_t^* - \Pi_{\mathcal{S}(\mathcal{A})} x_t^*\|_Q^2. \quad (27)$$

This identity specializes the classical static-team formulation [10] to the quadratic model used here.

Proof. Linearity of $\mathcal{S}(\mathcal{A})$ follows because $\mathcal{G}_i$ -measurability is preserved under linear combinations. Closedness follows because an L^2 limit of $\mathcal{G}_i$ -measurable random variables admits a $\mathcal{G}_i$ -measurable version.

For any admissible policy u , (11) gives

$$\begin{aligned}\mathbb{E}[f(u, \theta_t) - f(x_t^*, \theta_t)] &= \frac{1}{2} \mathbb{E}[(u - x_t^*)^\top Q(u - x_t^*)] \\ &= \frac{1}{2} \|u - x_t^*\|_Q^2.\end{aligned}\tag{28}$$

Minimizing this expression over the closed subspace $\mathcal{S}(\mathcal{A})$ is the standard Hilbert-space projection problem, yielding (26) and (27). $\square$

Two consequences of Lemma 1 are used repeatedly below.

(i) *Pythagorean form of regret.* The optimal error $x_t^* - u_{\mathcal{A}}^*$ is Q -orthogonal to every admissible policy, including $u_{\mathcal{A}}^*$ itself. Hence

$$\|x_t^*\|_Q^2 = \|u_{\mathcal{A}}^*\|_Q^2 + \|x_t^* - u_{\mathcal{A}}^*\|_Q^2.$$

Thus

$$2R(\mathcal{A}) = \|x_t^*\|_Q^2 - \|u_{\mathcal{A}}^*\|_Q^2.$$

Regret is the part of the full-information decision that the architecture fails to reproduce. It is often easiest to compute by evaluating the optimal policy's own norm and subtracting it.

(ii) *Factor of one-half.* Regret carries the factor $\frac{1}{2}$ from (7). Squared Q -norms in proofs therefore appear as $2R$; for example, the open-loop regret defined in Section 3.1 satisfies $\|x_t^* - \mathbb{E}x_t^*\|_Q^2 = 2R_\infty$.

Corollary 1 (Coupled conditional normal equations). *The unique team optimum in Lemma 1 satisfies*

$$\mathbb{E}[(Qu_{\mathcal{A}}^* - b(\theta_t))_i \mid \mathcal{G}_i] = 0, \quad i = 1, \dots, n.\tag{29}$$

With Q partitioned into action blocks, this is equivalently

$$Q_{ii}u_i^* + \sum_{j \neq i} Q_{ij} \mathbb{E}[u_j^* \mid \mathcal{G}_i] = \mathbb{E}[b_i(\theta_t) \mid \mathcal{G}_i].\tag{30}$$

These are the coupled person-by-person stationarity equations associated with the classical static-team formulation [10]. Strict convexity makes them sufficient for the unique team optimum here. With heterogeneous information and off-diagonal Q , one generally does not have $u_i^ = \mathbb{E}[x_i^* \mid \mathcal{G}_i]$. When all components share a common information sigma-algebra, deterministic Q makes the joint solution the ordinary vector conditional expectation.*

Remark 1 (Scope of the projection identity). *The fixed-architecture projection identity requires square integrability, a deterministic positive-definite matrix Q , unconstrained Euclidean actions, and a closed linear space of admissible policies. It does not require Gaussianity, an affine map $b(\theta)$, Markov dynamics, temporal stationarity, or independent observations. Those stronger assumptions enter only in later closed-form prediction and composition results.*

Lemma 1 turns an information architecture into a geometric object. The full-information policy x_t^* specifies what the system would ideally do if the current global state were known. The architecture restricts the system to the policy subspace $\mathcal{S}(\mathcal{A})$, and its regret is precisely the squared distance from the ideal policy to the closest rule implementable using the available information.

This interpretation also identifies the relevant notion of environmental predictability. An architecture need not reconstruct the complete state θ_t . It need only provide enough information to predict the components that affect x_t^* . Section 4.4 develops the corresponding notion of decision-relevant predictability.

The radius-dependent architecture in (15) makes the central tradeoff clear. Increasing r provides each agent with a broader view of the network and, if freshness were fixed, could only improve performance. In a physical network, however, larger r generally also increases $\tau(r)$. The architecture family

$$\{\mathcal{A}_{r,\tau(r)}\}_{r \geq 0} \quad (31)$$

therefore trades spatial information against temporal freshness.

We first study the two endpoints of this tradeoff: fresh-local information and stale-global information. We then ask the more general architecture-design question: what information radius minimizes regret when the value of broader spatial knowledge must be balanced against the additional delay required to obtain it?

The notation admits a direct networked interpretation through illustrative mappings. The component θ_i may represent an externally evolving local condition, for example, channel quality, demand, workload intensity, sensing conditions, or resource availability, while x_i is a corresponding continuous decision such as rate, power, compute allocation, or sensing effort. The matrices Q and B , or equivalently the decision-sensitivity operator $K = Q^{-1}B$, encode how other agents' decisions and remote state affect the desired action; this coupling structure need not coincide with the physical or information graph over which observations travel. The essential boundary is exogeneity. An external arrival or workload process may be modeled as part of θ , whereas a queue length whose evolution depends on earlier service decisions is not exogenous in the sense required here.

Table 1: Core notation. Quantities labeled as shares are normalized by R_∞ .

Symbol	Meaning	Symbol	Meaning
n	number of agents	$G = (V, E)$	network or geometry graph
θ_t	exogenous environment state	x_t	joint action
Q	positive-definite action-coupling matrix	B	affine state-to-objective map
$K = Q^{-1}B$	decision-sensitivity operator	x_t^*	full-information decision
$\mathcal{A}$	information architecture	$R(\mathcal{A})$	architecture regret; includes R_{loc} and $R_{\text{glob}}(\tau)$
R_∞	open-loop regret	$\eta_S(0)$	fresh-local omission share
$\eta_T(\tau)$	temporal unpredictability	$\eta_S(r)$	radius- r zero-delay spatial omission
$\eta_{ST}(r, \tau)$	normalized joint spatio-temporal regret	T	temporal coherence time
$\tau(r)$	information latency at radius r	v	effective propagation speed
ℓ_s	spatial correlation length	ℓ_c	decision-relevance length
$L_T = vT$	temporal propagation length	r^*	optimal synchronized-snapshot radius
$\mathbf{1}$	all-ones vector	$\eta_0 = \eta_S(0)$	radius-zero omission share
$\rho = \tau/T$	dimensionless staleness	$\varepsilon_{t,\tau}$	temporal innovation
$X_t = x_t^* - \bar{x}^*$	centered decision	$[z]_+ = \max\{z, 0\}$	positive part
$m_T(r)$	marginal freshness-loss rate	$m_S(r)$	marginal spatial-gain rate

3 Fresh-Local versus Stale-Global Information

We begin with the two endpoints of the freshness–scope tradeoff introduced in Section 2. A *fresh-local* architecture gives each agent immediate access to its own state but no current information about remote states. A *stale-global* architecture gives every agent complete system-wide information, but only after a delay τ .

This section compares two pure regimes; as noted in Section 2.2, an architecture free to combine both information sources would weakly dominate either one.

If both architectures had the same delay, global information could only help: the corresponding information sets would contain the local ones. The comparison becomes nontrivial precisely because spatial scope and freshness move in opposite directions. This section characterizes that tradeoff first for an arbitrary stationary environment through a temporal prediction-error function, and then obtains an exact crossover law under a Gauss–Markov model.

Roadmap for Sections 3–5. The three sections build one formula in stages.

- Section 3 isolates time. It compares an architecture that loses nothing to delay (fresh-local) with one that loses nothing to spatial restriction (stale-global).
- Section 4 adds space. For a delayed neighborhood snapshot, the share of the decision that survives the delay and the share captured by the neighborhood multiply (Theorem 3).
- Section 5 optimizes that product over the neighborhood radius.

Figure 1 shows the timing convention, and Table 2 summarizes the assumptions used by the results.

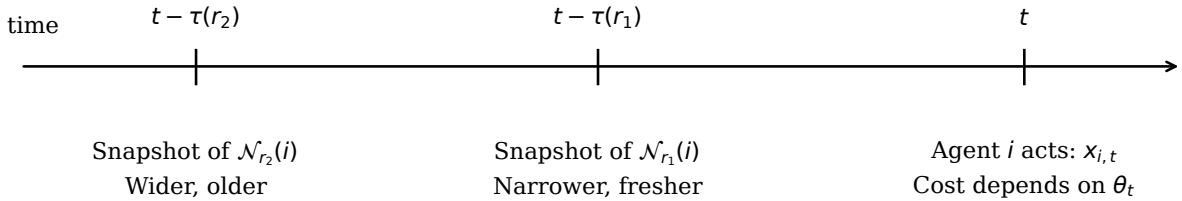


Figure 1: A radius- r synchronized snapshot is taken at time $t - \tau(r)$ and used for the decision at time t . For $r_2 > r_1$ with $\tau(r_2) > \tau(r_1)$, the wider snapshot is older. Cost is evaluated against the current state θ_t .

3.1 Two Benchmark Architectures

At decision time t , the *fresh-local* architecture is

$$\mathcal{A}_{\text{loc}} = \left(\mathcal{G}_{1,t}^{\text{loc}}, \dots, \mathcal{G}_{n,t}^{\text{loc}} \right), \quad \mathcal{G}_{i,t}^{\text{loc}} = \sigma(\theta_{i,t}). \quad (32)$$

Its regret is

$$R_{\text{loc}} \triangleq R(\mathcal{A}_{\text{loc}}). \quad (33)$$

Table 2: Assumptions used in the derivations. All rows use square-integrable targets and a deterministic positive-definite quadratic cost; normalized shares require $R_\infty > 0$. Entries describe the sufficient assumptions used by the proofs, including their stated non-Gaussian extensions. “Fixed epoch” means stationarity is unnecessary for that result.

Result	Stationarity	Common-rate innovation	Affine target	Gaussian	Other
Lemma 1; observation (39)	Fixed epoch	No	No	No	Admissible linear policy space
Lemma 2; Theorems 1–2	Time	Yes	Yes	No	Scalar decay; finite-delay crossover as stated
Proposition 1	Fixed epoch	No	Yes	No	Independent, mean-zero, equal-variance states
Threshold (62)	Time	Yes	Yes	No	Aggregate model plus temporal law
Theorem 3	Time	Yes	Yes	No	Synchronized snapshots
Proposition 2	Time	Yes	Yes	No	Differentiable $\tau, \eta_S; \eta_S < 1$
Lemma 3	Space	No	Yes	Yes	$Q = qI$; exponential spatial covariance and kernel
Theorem 4	Space/time	Yes	Yes	Yes	Canonical model and linear delay

Because this information is current, R_{loc} does not depend on the global information delay τ . Its magnitude instead reflects how much of the full-information decision can be inferred from local information alone.

The *stale-global* architecture at delay τ is

$$\mathcal{A}_{\text{glob}}(\tau) = (\mathcal{G}_t^\tau, \dots, \mathcal{G}_t^\tau), \quad \mathcal{G}_t^\tau \triangleq \sigma(\theta_{t-\tau}). \quad (34)$$

All agents therefore share the same complete but delayed snapshot of the environment. We denote its regret by

$$R_{\text{glob}}(\tau) \triangleq R(\mathcal{A}_{\text{glob}}(\tau)). \quad (35)$$

On a finite connected graph of diameter D , these are the $r = 0$ and $r = D$ members of the synchronized-snapshot family in Section 4, with delays zero and τ , respectively.

For reference, define also the *open-loop* architecture, whose decision is the best constant, state-independent action. Its optimal action is $\mathbb{E}[x_t^\star]$, and its regret is

$$R_\infty \triangleq \frac{1}{2} \|x_t^\star - \mathbb{E}[x_t^\star]\|_Q^2. \quad (36)$$

The term *open-loop* is borrowed from control, where it describes a controller that does not use measurements. Here it simply means a decision that ignores the state. The best such decision is the mean $\mathbb{E}[x_t^\star]$. For any constant c , the cross term vanishes because $x_t^\star - \mathbb{E}x_t^\star$ has mean zero and Q is deterministic, so

$$\|x_t^\star - c\|_Q^2 = \|x_t^\star - \mathbb{E}x_t^\star\|_Q^2 + (\mathbb{E}x_t^\star - c)^\top Q(\mathbb{E}x_t^\star - c).$$

The second term is nonnegative and vanishes only at $c = \mathbb{E}x_t^\star$.

Throughout the normalized comparisons below we assume $R_\infty > 0$, excluding the trivial case in which the clairvoyant decision is deterministic.

Under $\mathcal{A}_{\text{glob}}(\tau)$ every agent has the *same* information $\sigma(\theta_{t-\tau})$. When information is common, the team problem collapses to a single-decision-maker problem (see Corollary 1 and Appendix A.2). The optimal joint policy is then the ordinary conditional expectation $\mathbb{E}[x_t^* \mid \theta_{t-\tau}]$, even when Q has off-diagonal blocks. Stale-global regret is therefore one-half the minimum Q -weighted mean-square error of predicting the *current* full-information decision from the *old* snapshot:

$$2R_{\text{glob}}(\tau) = \min_{g: g(\theta_{t-\tau}) \in L^2} \|x_t^* - g(\theta_{t-\tau})\|_Q^2.$$

Define the two loss shares as regret ratios:

$$\eta_T(\tau) \triangleq \frac{R_{\text{glob}}(\tau)}{R_{\infty}}, \quad 0 \leq \eta_T(\tau) \leq 1, \quad (37)$$

and

$$\eta_S(0) \triangleq \frac{R_{\text{loc}}}{R_{\infty}}, \quad 0 \leq \eta_S(0) \leq 1. \quad (38)$$

Both shares lie in $[0, 1]$. They are nonnegative because regret is nonnegative. They are at most one because constant actions are admissible under *every* architecture: each agent can ignore its information and play its component of $\mathbb{E}[x_t^*]$. So no architecture can do worse than open loop, and $R(\mathcal{A}) \leq R_{\infty}$. We abbreviate $\eta_0 \triangleq \eta_S(0)$. The argument "0" anticipates Section 4, where $\eta_S(r)$ is defined for every radius r and radius zero is the fresh-local architecture.

The quantity $\eta_S(0)$ measures what is lost by restricting information spatially, while $\eta_T(\tau)$ measures what is lost by allowing global information to age. The captured local share is $1 - \eta_S(0)$. At zero delay, $\eta_T(0) = 0$ because the complete current state determines x_t^* . The old snapshot becomes uninformative for this decision if $\mathbb{E}[x_t^* \mid \theta_{t-\tau}] \rightarrow \mathbb{E}[x_t^*]$ in mean square; in that case $\eta_T(\tau) \rightarrow 1$. Strong mixing conditions (Appendix B) guarantee this.

One might expect η_T to increase with τ automatically, but information monotonicity (23) does not apply. For $0 \leq \tau_1 < \tau_2$, the older snapshot $\theta_{t-\tau_2}$ is generally not a function of the newer one $\theta_{t-\tau_1}$, so the σ -algebras are not nested. For a *Markov* environment, monotonicity does hold. Given $\theta_{t-\tau_1}$, the older value $\theta_{t-\tau_2}$ adds nothing about θ_t . Predicting from $\theta_{t-\tau_2}$ alone is therefore no better than predicting from the pair $(\theta_{t-\tau_1}, \theta_{t-\tau_2})$, which is exactly as good as predicting from $\theta_{t-\tau_1}$ alone. This is the *data-processing inequality* for prediction error; the OU formula (50) below exhibits the monotonicity explicitly.

Dividing by $R_{\infty} > 0$ gives the crossover observation

$$R_{\text{loc}} < R_{\text{glob}}(\tau) \iff \eta_T(\tau) > \eta_S(0). \quad (39)$$

Fresh-local information is preferable precisely when the temporal information lost by waiting for a global view exceeds the decision-relevant information unavailable locally.

3.2 Gauss–Markov Temporal Model

We now specialize the temporal unpredictability function to obtain a closed form. Suppose the environment follows the stationary multivariate Ornstein–Uhlenbeck process

$$d\theta_t = -\frac{1}{T} (\theta_t - \bar{\theta}) dt + \sqrt{\frac{2}{T}} \Sigma_{\infty}^{1/2} dW_t, \quad (40)$$

where $T > 0$ is the temporal coherence time, $\bar{\theta}$ is the stationary mean, and Σ_{∞} is the stationary covariance matrix. The process may exhibit arbitrary instantaneous cross-correlation among agents through Σ_{∞} ; the simplifying assumption is that all temporal modes share the same decay time T .

Readers unfamiliar with stochastic differential equations can read (40) as shorthand for three facts (derived in Appendix A.4), which are all the paper uses:

1. θ_t is a stationary Gaussian process with mean $\bar{\theta}$ and covariance Σ_∞ .
2. $\text{Cov}(\theta_t, \theta_s) = e^{-|t-s|/T} \Sigma_\infty$.
3. For every $\tau > 0$ the decomposition (44) below holds, with an explicitly known innovation covariance.

The drift $-(\theta_t - \bar{\theta})/T$ pulls the state back toward its mean at rate $1/T$. The noise scale $\sqrt{2/T}$ is chosen exactly so that the stationary covariance equals Σ_∞ . The key simplification is that the drift is the *scalar* $-1/T$ times the identity. Every component of θ , and every linear combination of components (every "mode"), forgets its past at the same rate $1/T$. A general matrix drift would give different modes different coherence times; Section 8 discusses that case.

Assume further that

$$b(\theta) = B\theta + b_0, \quad (41)$$

so that the full-information decision is affine:

$$x^*(\theta) = Q^{-1}B\theta + Q^{-1}b_0. \quad (42)$$

Let

$$\rho \triangleq \frac{\tau}{T} \quad (43)$$

denote the dimensionless staleness ratio.

The OU transition law [18, eqs. (8)–(10), (14)] gives the decomposition

$$\theta_t - \bar{\theta} = e^{-\rho}(\theta_{t-\tau} - \bar{\theta}) + \varepsilon_{t,\tau}, \quad \mathbb{E}[\varepsilon_{t,\tau} \mid \theta_{t-\tau}] = 0, \quad \text{Cov}(\varepsilon_{t,\tau}) = (1 - e^{-2\rho})\Sigma_\infty. \quad (44)$$

We call $\varepsilon_{t,\tau}$ the *innovation*: the part of the current state that cannot be predicted from the state τ time units earlier. For the OU process it is Gaussian and independent of $\{\theta_s : s \leq t - \tau\}$. Its covariance follows from stationarity. The two terms in (44) are uncorrelated, so $\Sigma_\infty = \text{Cov}(\theta_t) = e^{-2\rho}\Sigma_\infty + \text{Cov}(\varepsilon_{t,\tau})$.

Define the centered full-information decision by

$$\bar{x}^* \triangleq \mathbb{E}[x_t^*], \quad X_t \triangleq x_t^* - \bar{x}^*. \quad (45)$$

Because $x^*(\theta) = K\theta + Q^{-1}b_0$ is affine, $\bar{x}^* = K\bar{\theta} + Q^{-1}b_0$ and $X_t = K(\theta_t - \bar{\theta})$. Applying K to (44) gives

$$X_t = e^{-\rho}X_{t-\tau} + K\varepsilon_{t,\tau}, \quad K = Q^{-1}B. \quad (46)$$

We may work with the centered target X_t without loss of generality. If u is admissible, so is $u - \bar{x}^*$, since each agent can subtract a known constant. Moreover $(x_t^* - \bar{x}^*) - (u - \bar{x}^*) = x_t^* - u$. The shift $u \mapsto u - \bar{x}^*$ is therefore a one-to-one map of the admissible set onto itself that leaves every error unchanged. Note also that $\|X_t\|_Q^2 = 2R_\infty$ by (36).

We use the L^2 norm $\|Y\|_Q^2 = \mathbb{E}[Y^\top QY]$ defined in (25).

Lemma 2 (Innovation split). *Under (40)–(41), every square-integrable $\mathbb{R}^d$ -valued function u of $\theta_{t-\tau}$ satisfies*

$$\|X_t - u\|_Q^2 = \|e^{-\rho}X_{t-\tau} - u\|_Q^2 + (1 - e^{-2\rho})2R_\infty. \quad (47)$$

Proof. Split the error into an "old" part and a "new" part:

$$X_t - u = \underbrace{(e^{-\rho} X_{t-\tau} - u)}_{\triangleq A, \text{ a function of } \theta_{t-\tau}} + K \varepsilon_{t,\tau}.$$

Orthogonality. Because A is a function of $\theta_{t-\tau}$, the tower property (Appendix A.2) gives

$$\mathbb{E}[A^\top Q K \varepsilon_{t,\tau}] = \mathbb{E}[A^\top Q K \mathbb{E}[\varepsilon_{t,\tau} \mid \theta_{t-\tau}]] = 0.$$

By Pythagoras, $\|X_t - u\|_Q^2 = \|A\|_Q^2 + \|K \varepsilon_{t,\tau}\|_Q^2$.

Size of the new part. Setting $u = 0$ in this identity gives $\|X_t\|_Q^2 = e^{-2\rho} \|X_{t-\tau}\|_Q^2 + \|K \varepsilon_{t,\tau}\|_Q^2$. Stationarity gives $\|X_{t-\tau}\|_Q^2 = \|X_t\|_Q^2 = 2R_\infty$. Hence $\|K \varepsilon_{t,\tau}\|_Q^2 = (1 - e^{-2\rho}) 2R_\infty$.

Equivalently, using (44) directly: $\|K \varepsilon\|_Q^2 = \text{tr}(K^\top Q K \text{Cov } \varepsilon) = (1 - e^{-2\rho}) \text{tr}(K^\top Q K \Sigma_\infty) = (1 - e^{-2\rho}) 2R_\infty$. $\square$

The first term is the error in reproducing the predictable old decision; the second is the fresh innovation that the old snapshot cannot predict. For global information, the first error can be eliminated entirely.

Theorem 1 (Exact stale-global regret). *Under (40)–(41),*

$$R_{\text{glob}}(\tau) = \left(1 - e^{-2\tau/T}\right) R_\infty, \quad (48)$$

where

$$R_\infty = \frac{1}{2} \text{tr} \left(B^\top Q^{-1} B \Sigma_\infty \right). \quad (49)$$

Equivalently,

$$\eta_T(\tau) = 1 - e^{-2\tau/T}. \quad (50)$$

Proof. The global snapshot allows any function of $\theta_{t-\tau}$. In particular it allows $u = e^{-\rho} X_{t-\tau}$, which makes the first term in (47) zero. Since that term is nonnegative, this choice is optimal. In uncentered form, the optimal stale-global action is

$$u_{\text{glob}}^* = \bar{x}^* + e^{-\tau/T} (x_{t-\tau}^* - \bar{x}^*) :$$

the old full-information decision, shrunk toward its mean. Only the innovation term remains, so $2R_{\text{glob}}(\tau) = (1 - e^{-2\rho}) 2R_\infty$, which is (48).

For (49), use the identity $\mathbb{E}[Y^\top A Y] = \text{tr}(A \text{Cov } Y)$ for mean-zero Y and the cyclic property of the trace (Appendix A.6):

$$\begin{aligned} 2R_\infty &= \mathbb{E}[X_t^\top Q X_t] = \text{tr}(Q K \Sigma_\infty K^\top) = \text{tr}(K^\top Q K \Sigma_\infty), \\ K^\top Q K &= B^\top Q^{-1} Q Q^{-1} B = B^\top Q^{-1} B. \end{aligned}$$

$\square$

Generality of the innovation argument. The proof uses only three ingredients: stationarity, an affine decision, and a decomposition $\theta_t - \bar{\theta} = a(\theta_{t-\tau} - \bar{\theta}) + \varepsilon$ with a *scalar* a and $\mathbb{E}[\varepsilon \mid \theta_{t-\tau}] = 0$. Neither Gaussianity nor full independence of ε from the past is needed. For example, consider the discrete-time AR(1) process $\theta_k - \bar{\theta} = a(\theta_{k-1} - \bar{\theta}) + \varepsilon_k$ with $0 < a < 1$ and i.i.d. square-integrable

mean-zero innovations independent of the past. It satisfies the decomposition at lag k with a^k in place of $e^{-\rho}$. Writing $a = e^{-1/T}$, with T measured in time steps, gives $\eta_T(k) = 1 - a^{2k} = 1 - e^{-2k/T}$.

The result has a simple interpretation. When $\tau \ll T$, the environment changes little over the information delay and

$$R_{\text{glob}}(\tau) = 2\frac{\tau}{T}R_{\infty} + o\left(\frac{\tau}{T}\right). \quad (51)$$

Here we used $1 - e^{-x} = x + O(x^2)$ with $x = 2\tau/T$. The notation $o(\tau/T)$ denotes a term that becomes negligible relative to τ/T as $\tau/T \rightarrow 0$ (Appendix A.7).

When $\tau \gg T$, the delayed global snapshot becomes essentially uninformative about the current decision and

$$R_{\text{glob}}(\tau) \rightarrow R_{\infty}.$$

Staleness therefore matters relative to the timescale on which decision-relevant state changes. For any fixed $\tau > 0$, the same identity gives $R_{\text{glob}}(\tau) \rightarrow R_{\infty}$ as $T \downarrow 0$ and $R_{\text{glob}}(\tau) \rightarrow 0$ as $T \rightarrow \infty$.

3.3 Fresh-Local versus Stale-Global Crossover

Combining the observation (39) with (50) yields the first main architectural result.

Theorem 2 (Fresh-local versus stale-global crossover). *Under the Gauss–Markov and affine-decision assumptions of Theorem 1, suppose $0 \leq \eta_S(0) < 1$. Fresh-local information strictly outperforms stale-global information if and only if*

$$\boxed{\frac{\tau}{T} > \frac{1}{2} \log \frac{1}{1 - \eta_S(0)}}. \quad (52)$$

Equivalently, defining

$$\rho^* \triangleq \frac{1}{2} \log \frac{1}{1 - \eta_S(0)}, \quad (53)$$

we have

$$R_{\text{loc}} < R_{\text{glob}}(\tau) \iff \rho > \rho^*. \quad (54)$$

If $\eta_S(0) = 1$, we set $\rho^* = +\infty$: no finite delay makes fresh-local information strictly better.

Proof. By (39), fresh-local wins exactly when

$$1 - e^{-2\rho} > \eta_S(0).$$

Equivalently,

$$e^{-2\rho} < 1 - \eta_S(0),$$

which gives (52). □

Why a single threshold? R_{loc} depends only on the distribution of the state at a single time. With the one-time state distribution held fixed, it involves neither the delay τ nor the coherence time T , because local information is current. All dependence on staleness is in $R_{\text{glob}}(\tau)$, which increases in τ . For $0 < \eta_S(0) < 1$, the comparison is a flat line crossed once by an increasing curve. When $\eta_S(0) = 0$, equality occurs at zero delay; when $\eta_S(0) = 1$, there is no finite crossing.

The limiting cases are informative. If

$$\eta_S(0) = 0,$$

fresh-local information is sufficient to reproduce the full-information decision, and the fresh-local architecture dominates for every $\tau > 0$. If

$$\eta_S(0) = 1,$$

local information provides no improvement over open loop, and stale-global information is never strictly worse at any finite delay.

More generally, Theorem 2 identifies two dimensionless determinants of the architecture choice. The staleness ratio τ/T measures the loss of temporal relevance incurred by global information, while $\eta_S(0)$ measures the share of decision-relevant variation omitted locally. Within the comparison of the two pure benchmarks, fresh-local has lower regret precisely when the two loss fractions cross.

3.4 Role of Decision Coupling

The fresh-local omission share $\eta_S(0)$ depends jointly on the spatial statistics of the environment and on the coupling structure of the decision problem. To isolate the role of decision coupling, consider a symmetric shared-resource model with $n \geq 2$ scalar actions,

$$f(x, \theta) = \sum_{i=1}^n \left(\frac{q}{2} x_i^2 - \theta_i x_i \right) + \frac{\gamma}{2} \left(\sum_{i=1}^n x_i \right)^2, \quad q > 0, \gamma \geq 0. \quad (55)$$

Here q determines the local curvature or stiffness of each decision, while γ determines the strength of the shared coordination penalty. In the notation of Section 2,

$$Q = qI + \gamma \mathbf{1}\mathbf{1}^\top, \quad b(\theta) = \theta. \quad (56)$$

Here $\mathbf{1} \in \mathbb{R}^n$ is the all-ones vector, so $\mathbf{1}\mathbf{1}^\top$ is the $n \times n$ all-ones matrix and $\mathbf{1}^\top x = \sum_i x_i$. Expanding confirms that (56) matches (55):

$$\frac{1}{2} x^\top (qI + \gamma \mathbf{1}\mathbf{1}^\top) x = \frac{q}{2} \sum_i x_i^2 + \frac{\gamma}{2} \left(\sum_i x_i \right)^2.$$

Assume that the state components θ_i are independent, mean-zero stationary OU processes with common variance σ^2 and common coherence time T .

The full-information action is $x^* = Q^{-1}\theta$. The inverse of an "identity plus rank-one" matrix has a closed form (Sherman–Morrison, Appendix A.6):

$$(qI + \gamma \mathbf{1}\mathbf{1}^\top)^{-1} = \frac{1}{q} \left(I - \frac{\gamma}{q + \gamma n} \mathbf{1}\mathbf{1}^\top \right),$$

which can be checked by multiplying out. Applying it to θ gives

$$x_i^* = \frac{\theta_i}{q} - \frac{\gamma}{q(q + \gamma n)} \sum_{j=1}^n \theta_j. \quad (57)$$

Thus, even though the linear reward $\theta_i x_i$ is local, coupling through the common resource makes agent i 's optimal action depend on the states of all other agents.

Proposition 1 (Local explainability under aggregate coupling). *For the model (55), the optimal fresh-local policy is*

$$u_i^{\text{loc}} = \frac{\theta_i}{q + \gamma}, \quad (58)$$

and

$$R_\infty = \frac{n\sigma^2 (q + \gamma(n-1))}{2q(q + \gamma n)}, \quad (59)$$

$$R_{\text{loc}} = \frac{n\sigma^2 \gamma^2 (n-1)}{2q(q + \gamma)(q + \gamma n)}. \quad (60)$$

Consequently, the fresh-local omission share is

$$\boxed{\eta_S(0) = \frac{\gamma^2(n-1)}{(q + \gamma)(q + \gamma(n-1))}.} \quad (61)$$

Intuition for (58). Agent i sees only θ_i . Remote states are independent of θ_i and have mean zero, and the optimal rules below have zero means. Agent i therefore expects each other optimal action to be zero on average. Its own action, however, enters the aggregate penalty $\frac{\gamma}{2}(\sum_j x_j)^2$ directly and adds γx_i to its marginal cost. Its effective stiffness is therefore $q + \gamma$ rather than q . The full-information action (57) differs because it also reacts to the realized aggregate $\sum_j \theta_j$, which agent i cannot see.

Proof. Recall the coupled normal equations (30):

$$Q_{ii}u_i + \sum_{j \neq i} Q_{ij}\mathbb{E}[u_j \mid \mathcal{G}_i] = \mathbb{E}[b_i(\theta_t) \mid \mathcal{G}_i].$$

Here $Q_{ii} = q + \gamma$, $Q_{ij} = \gamma$ for $j \neq i$, and $b_i(\theta) = \theta_i$. Let $\mu_j = \mathbb{E}[u_j]$. For $j \neq i$, the policy u_j is a function of $\theta_{j,t}$, which is independent of $\theta_{i,t}$, so

$$\mathbb{E}[u_j \mid \mathcal{G}_{i,t}^{\text{loc}}] = \mathbb{E}[u_j] = \mu_j,$$

while $\theta_{i,t}$ is $\mathcal{G}_{i,t}^{\text{loc}}$ -measurable. The conditional normal equation (30) therefore gives

$$(q + \gamma)u_i + \gamma \sum_{j \neq i} \mu_j - \theta_{i,t} = 0.$$

Taking expectations yields

$$q\mu_i + \gamma \sum_j \mu_j = 0.$$

Summing over i implies $\sum_j \mu_j = 0$, hence every $\mu_i = 0$ and $u_i = \theta_{i,t}/(q + \gamma)$, which proves (58). This argument uses independence, zero means, square integrability, and strict convexity; Gaussianity is not required for the local-policy formula.

Open-loop regret. Here $B = I$ and $\Sigma_\infty = \sigma^2 I$, so by (49), $R_\infty = \frac{\sigma^2}{2} \text{tr}(Q^{-1})$. From the Sherman–Morrison formula above,

$$\text{tr}(Q^{-1}) = \frac{1}{q} \left(n - \frac{\gamma n}{q + \gamma n} \right) = \frac{n(q + \gamma(n-1))}{q(q + \gamma n)},$$

which gives (59).

Local regret. By the Pythagorean form of Lemma 1 (the consequences following Lemma 1, with both x^* and u^{loc} mean zero), $2R_{\text{loc}} = \|x^*\|_Q^2 - \|u^{\text{loc}}\|_Q^2 = 2R_\infty - \|u^{\text{loc}}\|_Q^2$. Since $u^{\text{loc}} = \theta/(q + \gamma)$ and $\text{tr}(Q) = n(q + \gamma)$,

$$\|u^{\text{loc}}\|_Q^2 = \frac{\sigma^2 \text{tr}(Q)}{(q + \gamma)^2} = \frac{n\sigma^2}{q + \gamma}.$$

Therefore

$$R_{\text{loc}} = \frac{n\sigma^2}{2} \left[\frac{q + \gamma(n-1)}{q(q + \gamma n)} - \frac{1}{q + \gamma} \right] = \frac{n\sigma^2}{2} \cdot \frac{(q + \gamma(n-1))(q + \gamma) - q(q + \gamma n)}{q(q + \gamma)(q + \gamma n)}.$$

The numerator reduces to $\gamma^2(n-1)$, which gives (60).

Share. Dividing (60) by (59), the factors $n\sigma^2/2$ and $q(q + \gamma n)$ cancel, leaving (61). □

Combining Proposition 1 with Theorem 2 gives an explicit threshold. From (61),

$$1 - \eta_S(0) = \frac{(q + \gamma)(q + \gamma(n-1)) - \gamma^2(n-1)}{(q + \gamma)(q + \gamma(n-1))} = \frac{q(q + \gamma n)}{(q + \gamma)(q + \gamma(n-1))},$$

because the numerator expands to $q^2 + q\gamma(n-1) + q\gamma = q(q + \gamma n)$. Substituting into (53) gives

$$\boxed{\rho^*(\gamma, n) = \frac{1}{2} \log \left[\frac{(q + \gamma)(q + \gamma(n-1))}{q(q + \gamma n)} \right]}. \quad (62)$$

Therefore

$$R_{\text{loc}} < R_{\text{glob}}(\tau) \iff \frac{\tau}{T} > \rho^*(\gamma, n). \quad (63)$$

As $n \rightarrow \infty$,

$$\boxed{\rho^*(\gamma, n) \longrightarrow \frac{1}{2} \log \left(1 + \frac{\gamma}{q} \right)}. \quad (64)$$

To see the limit, write the ratio in (62) as $\frac{q+\gamma}{q} \cdot \frac{q+\gamma(n-1)}{q+\gamma n}$; the second factor tends to one. Equivalently, (61) gives $\eta_S(0) \rightarrow \gamma/(q + \gamma)$. In a large system, local information explains the share $q/(q + \gamma)$ of decision variance. It misses the share $\gamma/(q + \gamma)$ driven by the aggregate, which requires nonlocal information to capture fully.

The local–global architecture choice therefore collapses, in the large-system limit, to a comparison between two dimensionless quantities:

$$\boxed{\underbrace{\frac{\tau}{T}}_{\text{information staleness}} \quad \text{and} \quad \underbrace{\frac{1}{2} \log \left(1 + \frac{\gamma}{q} \right)}_{\text{value of coordination}}}. \quad (65)$$

The label "value of coordination" is interpretive, not a separate result. $\frac{1}{2} \log(1 + \gamma/q)$ is the staleness at which a global snapshot's temporal loss equals $\gamma/(q + \gamma)$, the large- n share of decision variance unavailable to the fresh-local architecture.

When $\gamma = 0$, the decisions decouple and $\eta_S(0) = 0$: current local information is sufficient, so any positive global delay makes the fresh-local architecture preferable. As γ increases, each agent's optimal action depends more strongly on remote states, $\eta_S(0)$ increases, and the crossover moves to larger τ/T . Thus stronger coordination coupling makes the system willing to tolerate increasingly stale-global information before abandoning global coordination in favor of fresh-local decisions.

The result provides the first endpoint characterization of the broader freshness–scope problem. The next sections move beyond the binary local–global comparison by allowing the information radius itself to vary, and ask how spatial predictability and temporal staleness jointly determine the optimal coordination scale.

4 Spatial and Temporal Predictability

We now introduce intermediate architectures in which each agent observes a synchronized snapshot within radius r . Temporal predictability determines the freshness loss, while decision-relevant spatial predictability determines the omission loss.

4.1 Spatial Structure of the Environment

We first describe the spatial statistics that determine what nearby observations reveal about remote state.

For simplicity of exposition, first suppose that each node has a scalar local state, so that

$$\theta_t = (\theta_{1,t}, \dots, \theta_{n,t})^\top.$$

The vector-valued case follows by replacing scalar covariances with block covariances.

Let

$$\bar{\theta} \triangleq \mathbb{E}[\theta_t], \quad \Sigma_S \triangleq \text{Cov}(\theta_t) \succeq 0 \quad (66)$$

denote the stationary mean and spatial covariance. The entry $(\Sigma_S)_{ij}$ measures the instantaneous statistical dependence between the states associated with nodes i and j .

On a path, line, or Euclidean spatial domain, a canonical covariance model is

$$\text{Cov}(\theta_{i,t}, \theta_{j,t}) = \sigma^2 \exp\left(-\frac{d_G(i,j)}{\ell_s}\right), \quad (67)$$

where $\ell_s > 0$ is a spatial correlation length. Larger ℓ_s means that states remain strongly correlated over greater network distance. In one spatial dimension, (67) is the exponential, or Ornstein–Uhlenbeck, covariance model [19].

The kernel in (67) is the same exponential that describes the OU process in time (68), now applied in space. On a line this is more than an analogy. A Gaussian field with covariance $\sigma^2 e^{-|z-z'|/\ell_s}$ is a stationary OU process indexed by position z , and it therefore has the **spatial Markov property**: given the value at a point z_0 , the field to the left of z_0 and the field to the right are independent. As a consequence, observing a segment tells you about the field outside it only through the segment’s nearest endpoint. Lemma 3 relies on exactly this. On general graphs the analogous objects are Gaussian Markov random fields (Appendix A.5).

4.2 Temporal Structure

We use the common-rate model (40) with $\Sigma_\infty = \Sigma_S$. Its stationary space-time covariance is

$$\text{Cov}(\theta_t, \theta_s) = e^{-|t-s|/T} \Sigma_S. \quad (68)$$

A space–time covariance is *separable* if it factors as (a function of time lag) $\times$ (a spatial covariance), as in (68). Here it means that every spatial covariance mode has the same normalized temporal correlation. Many physical fields are *nonseparable*: for example, large-scale patterns may persist longer than small-scale ones [20]. Section 8 discusses the consequences.

Thus Σ_S specifies instantaneous spatial dependence and T specifies a common temporal coherence time; general nonseparable models need not have this factorization [20].

4.3 Snapshot Architectures

For radius r , define the zero-delay information available to agent i at time t as

$$\mathcal{I}_{i,t}^{(r)} \triangleq \sigma(\theta_{j,t} : j \in \mathcal{N}_r(i)). \quad (69)$$

$\mathcal{I}_{i,t}^{(r)}$ is the σ -algebra $\mathcal{G}_{i,t}^{(r)}$ of (15) with the delay set to zero. We use a separate symbol because, in this section, the delay τ is a free parameter rather than the latency law $\tau(r)$. Section 5 reconnects them by setting $\tau = \tau(r)$.

The corresponding zero-delay radius- r architecture is

$$\mathcal{A}_{r,0} \triangleq (\mathcal{I}_{1,t}^{(r)}, \dots, \mathcal{I}_{n,t}^{(r)}). \quad (70)$$

A delayed synchronized-snapshot radius- r architecture provides the same type of information, shifted backward by τ :

$$\mathcal{A}_{r,\tau} \triangleq (\mathcal{I}_{1,t-\tau}^{(r)}, \dots, \mathcal{I}_{n,t-\tau}^{(r)}). \quad (71)$$

Such common-time snapshots arise, for example, when a coordinated optimizer requires a temporally consistent system estimate at a common decision epoch, or when asynchronous measurements cannot be combined without explicit time alignment into a coherent state vector. Define the normalized zero-delay spatial omission function

$$\eta_S(r) \triangleq \frac{R(\mathcal{A}_{r,0})}{R_\infty}. \quad (72)$$

The quantity $\eta_S(r)$ is the fraction of decision-relevant variation that cannot be captured using current information within radius r .

Since zero-delay radius architectures are nested,

$$r_2 \geq r_1 \implies \mathcal{S}(\mathcal{A}_{r_1,0}) \subseteq \mathcal{S}(\mathcal{A}_{r_2,0}), \quad (73)$$

Nesting holds because $\mathcal{N}_{r_1}(i) \subseteq \mathcal{N}_{r_2}(i)$ whenever $r_1 \leq r_2$, and both snapshots carry the same time stamp. Information monotonicity (23) therefore gives

$$0 \leq \eta_S(r_2) \leq \eta_S(r_1) \leq 1. \quad (74)$$

If radius zero observes precisely the local current component, then

$$\eta_S(0) = \frac{R_{\text{loc}}}{R_\infty}. \quad (75)$$

On a finite connected graph with diameter D , complete current state is available at $r = D$, so

$$\eta_S(D) = 0. \quad (76)$$

4.4 Decision-Relevant Smoothness

Suppose, as in (10), that

$$b(\theta) = B\theta + b_0. \quad (77)$$

Then

$$x_t^* = K\theta_t + k_0, \quad K \triangleq Q^{-1}B, \quad k_0 \triangleq Q^{-1}b_0. \quad (78)$$

The matrix K is the decision-sensitivity operator: its block K_{ij} describes how the state at node j influences the full-information decision at node i .

The covariance of the clairvoyant decision is

$$\Sigma_x \triangleq \text{Cov}(x_t^*) = K \Sigma_S K^\top. \quad (79)$$

The function $\eta_S(r)$ therefore depends on four ingredients at once: (i) the state covariance Σ_S ; (ii) the decision-sensitivity operator K ; (iii) the cost metric Q ; and (iv) the observation geometry $\{\mathcal{N}_r(i)\}$.

A spatial correlation length alone does not determine regret. By a *mode* we mean a direction ξ in state space, representing a spatial pattern of variation, such as an eigenvector of Σ_S . A pattern in the null space of K ($K\xi = 0$) changes the state without changing the desired decision, so residual uncertainty confined to that direction contributes no decision error. Conversely, a pattern with large $\sqrt{(K\xi)^\top Q(K\xi)}$ is amplified into the decision, so even small residual uncertainty about it can dominate regret. Experiment 5 illustrates this dependence with the covariance held fixed.

Theorem 3 (Spatio-temporal predictability composition law). *Suppose the environment follows (40) with $\Sigma_\infty = \Sigma_S$, and the full-information decision is affine as in (78). For the snapshot family (71), every radius r and finite delay $\tau \geq 0$ satisfy*

$$R(\mathcal{A}_{r,\tau}) = \left(1 - e^{-2\tau/T}\right) R_\infty + e^{-2\tau/T} R(\mathcal{A}_{r,0}). \quad (80)$$

Equivalently,

$$\frac{R(\mathcal{A}_{r,\tau})}{R_\infty} = 1 - e^{-2\tau/T} (1 - \eta_S(r)). \quad (81)$$

In terms of the temporal unpredictability $\eta_T(\tau) = 1 - e^{-2\tau/T}$,

$$\eta_{ST}(r, \tau) = \eta_T(\tau) + (1 - \eta_T(\tau)) \eta_S(r), \quad (82)$$

where

$$\eta_{ST}(r, \tau) \triangleq \frac{R(\mathcal{A}_{r,\tau})}{R_\infty}.$$

Explained shares multiply. Subtracting (82) from one gives the cleanest reading of the composition law:

$$1 - \eta_{ST}(r, \tau) = (1 - \eta_T(\tau))(1 - \eta_S(r)) = e^{-2\tau/T}(1 - \eta_S(r)).$$

The share of the decision that a delayed snapshot explains is the share that survives the delay times the share its spatial scope captures. Temporal and spatial losses do not simply add; the retained shares multiply. Section 5 optimizes exactly this product.

Proof. Step 1 (centering). As in Section 3.2, subtract $\bar{x}^*$ from the target and from each admissible policy. This preserves admissibility and leaves every error unchanged.

Step 2 (reduce to Lemma 2). Under $\mathcal{A}_{r,\tau}$, agent i 's policy is a function of $\{\theta_{j,t-\tau} : j \in \mathcal{N}_r(i)\}$, a subset of $\theta_{t-\tau}$. The joint policy u is therefore a function of $\theta_{t-\tau}$, and Lemma 2 applies:

$$\|X_t - u\|_Q^2 = \|e^{-\rho} X_{t-\tau} - u\|_Q^2 + (1 - e^{-2\rho}) 2R_\infty.$$

The second term does not depend on u , so only the first term is minimized.

Step 3 (rescale). Write $u = e^{-\rho}\tilde{u}$. The admissible set is a linear subspace and $e^{-\rho} \neq 0$. Hence u is admissible exactly when $\tilde{u}$ is, and $\tilde{u}_i$ depends on the same variables as u_i . Then

$$\|e^{-\rho}X_{t-\tau} - e^{-\rho}\tilde{u}\|_Q^2 = e^{-2\rho}\|X_{t-\tau} - \tilde{u}\|_Q^2.$$

Step 4 (stationarity). Minimizing $\|X_{t-\tau} - \tilde{u}\|_Q^2$ over $\tilde{u}$ is precisely the zero-delay radius- r problem posed at time $t - \tau$: predict the decision at $t - \tau$ from neighborhood data at $t - \tau$. By stationarity its minimum equals the same problem's minimum at time t , namely $2R(\mathcal{A}_{r,0})$.

Step 5 (combine). $2R(\mathcal{A}_{r,\tau}) = e^{-2\rho} 2R(\mathcal{A}_{r,0}) + (1 - e^{-2\rho}) 2R_\infty$. Dividing by two gives (80); dividing further by R_∞ gives (81)–(82). $\square$

Theorem 1 is the case $r = D$ on a finite connected graph, where $\eta_S(D) = 0$. The temporal term $(1 - e^{-2\tau/T})R_\infty$ is the innovation that the delayed snapshot cannot predict. The remaining spatial omission is discounted by $e^{-2\tau/T}$, so broader information helps only with the part of the current decision that remains temporally predictable.

Generality of the composition law. The proof of (80) uses only the conditionally mean-zero, common-rate innovation of Lemma 2; Gaussianity is not needed. In the calculations below, Gaussianity lets us compute spatial prediction errors from covariances. For jointly Gaussian variables, the conditional mean is affine (linear after centering) and the conditional covariance is a Schur complement (Appendix A.3). In the canonical model and Experiments 5–6, the cost matrix is $Q = qI$ or I , so there is no action coupling and each agent's optimal policy is simply its own conditional mean $\mathbb{E}[x_i^* \mid \mathcal{G}_i]$. When Q has off-diagonal blocks, (80) still holds, but $\eta_S(r)$ must be computed from the *joint* team solution of the coupled normal equations (30) rather than agent by agent.

5 Optimal Coordination Scale

We now make information radius an architectural design variable. For each r , an agent may base its action on observations available within radius r , but those observations arrive after latency $\tau(r)$. The objective is to select the spatial scope that minimizes architecture regret.

On a graph, admissible radii are generally integers. We first analyze the continuous relaxation $r \in [0, D]$, where D is the maximum allowed information radius. On a finite graph, the exact optimizer is obtained by minimizing over the admissible integer radii. Rounding the continuous optimum to a neighboring integer is justified only when the interpolated regret curve is unimodal.

Unimodal means that the curve decreases up to a single minimum and increases after it. In that case the best integer radius is one of the two integers bracketing the continuous optimum r^* , so it suffices to compare $R(\lfloor r^* \rfloor)$ and $R(\lceil r^* \rceil)$. If the curve has several local minima, the best integer can lie in a different valley altogether.

5.1 Radius Family and Marginal Balance

We now formalize the radius family and the latency law that couples scope to age.

Let

$$\tau : [0, D] \rightarrow [0, \infty) \tag{83}$$

Where a delay is a free parameter we write τ ; where it is determined by radius we write $\tau(r)$. be a nondecreasing information-propagation law satisfying

$$\tau(0) = 0. \tag{84}$$

Architecture $\mathcal{A}_{r,\tau(r)}$ provides each agent with information from a synchronized radius- r snapshot delayed by $\tau(r)$.

Why is an interior optimum possible at all? If the radius family were *nested*, meaning that a larger radius always provided everything a smaller one did at the same age, then by (23) regret could only decrease with radius, and the largest radius would always be an optimum. A strict interior optimum would then require charging explicitly for information. The synchronized-snapshot family avoids this because it is generally non-nested. At radius $r_2 > r_1$, agent i gives up the fresher values $\theta_{j,t-\tau(r_1)}$, $j \in \mathcal{N}_{r_1}(i)$, in exchange for older values over a wider neighborhood.

Define

$$R(r) \triangleq R(\mathcal{A}_{r,\tau(r)}). \quad (85)$$

We write $R(r)$ as shorthand for $R(\mathcal{A}_{r,\tau(r)})$ when the latency law is fixed.

By Theorem 3,

$$R(r) = R_\infty \left[1 - e^{-2\tau(r)/T} (1 - \eta_S(r)) \right]. \quad (86)$$

On a finite graph, moving from radius r to $r + 1$ strictly improves performance exactly when

$$e^{-2\tau(r+1)/T} (1 - \eta_S(r+1)) > e^{-2\tau(r)/T} (1 - \eta_S(r)), \quad (87)$$

or, provided $1 - \eta_S(r) > 0$, equivalently

$$\log \left(\frac{1 - \eta_S(r+1)}{1 - \eta_S(r)} \right) > \frac{2(\tau(r+1) - \tau(r))}{T}. \quad (88)$$

Inequality (88) is (87) with logarithms taken of both sides and the terms rearranged. If $1 - \eta_S(r) = 0$ (radius r explains nothing), the logarithm is undefined. Condition (87) then simply says that moving to $r + 1$ helps if and only if $1 - \eta_S(r+1) > 0$.

The multiplicative comparison (87) remains the primary statement when $1 - \eta_S(r) = 0$. Increasing the radius by one hop is beneficial precisely when the discrete proportional gain in decision-relevant spatial information exceeds the freshness loss incurred over that hop.

At radius zero,

$$R(0) = R_\infty \eta_S(0) = R_{\text{loc}}. \quad (89)$$

On a finite graph, if $D = \text{diam}(G)$ and radius D provides the entire state, then

$$R(D) = R_\infty \left(1 - e^{-2\tau(D)/T} \right) = R_{\text{glob}}(\tau(D)). \quad (90)$$

Equation (86) can be written as

$$R(r) = R_T(r) + R_S(r), \quad (91)$$

where

$$R_T(r) \triangleq \left(1 - e^{-2\tau(r)/T} \right) R_\infty, \quad (92)$$

$$R_S(r) \triangleq e^{-2\tau(r)/T} \eta_S(r) R_\infty. \quad (93)$$

The temporal term increases with information radius whenever $\tau(r)$ does. The zero-delay spatial omission fraction $\eta_S(r)$ decreases with radius, although its contribution is discounted by the temporal relevance factor $e^{-2\tau(r)/T}$.

The marginal rates below come from the multiplicative structure of Section 4 (the explained-share identity). Minimizing $R(r)$ is equivalent to maximizing the explained share $E(r) \triangleq e^{-2\tau(r)/T} (1 - \eta_S(r))$, and, wherever $1 - \eta_S(r) > 0$, its logarithm:

$$\log E(r) = \log(1 - \eta_S(r)) - \frac{2\tau(r)}{T}.$$

The two terms are a spatial gain and a temporal penalty. Their radius-derivatives are the two rates defined next. Both have units of 1/length and can be read as fractional change per unit radius (multiply by 100 for a percentage).

To characterize the optimum, define the marginal temporal decay rate

$$m_T(r) \triangleq \frac{2\tau'(r)}{T} \quad (94)$$

and the proportional marginal spatial information gain

$$m_S(r) \triangleq -\frac{\eta'_S(r)}{1 - \eta_S(r)}. \quad (95)$$

The latter quantity is the rate at which the spatially explained share $1 - \eta_S(r)$ grows:

$$m_S(r) = \frac{d}{dr} \log(1 - \eta_S(r)). \quad (96)$$

Proposition 2 (Continuous marginal-balance characterization). *Under the assumptions of Theorem 3, additionally assume that $\tau(r)$ and $\eta_S(r)$ are continuously differentiable on $[0, D]$, with*

$$\tau'(r) \geq 0, \quad \eta'_S(r) \leq 0, \quad 0 \leq \eta_S(r) < 1.$$

Then

$$R'(r) = R_\infty e^{-2\tau(r)/T} (1 - \eta_S(r)) [m_T(r) - m_S(r)]. \quad (97)$$

Consequently, every interior optimal radius $r^ \in (0, D)$ satisfies*

$$\boxed{-\frac{\eta'_S(r^*)}{1 - \eta_S(r^*)} = \frac{2\tau'(r^*)}{T}}. \quad (98)$$

Proof. Differentiating (86) gives

$$\frac{R'(r)}{R_\infty} = e^{-2\tau(r)/T} \left[\frac{2\tau'(r)}{T} (1 - \eta_S(r)) + \eta'_S(r) \right].$$

Factoring $1 - \eta_S(r) > 0$ yields (97). At an interior minimum the derivative vanishes, giving (98). $\square$

Condition (98) is a first-order necessary condition. It identifies candidate radii; whether a candidate is the minimum depends on the shape of $m_S - m_T$, discussed next.

When is the balance point the unique optimum? Let $\Delta(r) \triangleq m_S(r) - m_T(r)$. By (97), $R'(r)$ has the sign of $-\Delta(r)$: regret falls where the spatial gain rate exceeds the freshness-loss rate, and rises where it does not.

Suppose m_S is strictly decreasing (each extra unit of radius adds proportionally less) and m_T is nondecreasing (each extra unit of radius costs at least as much freshness). Then Δ is strictly decreasing and crosses zero at most once, so R is unimodal. There are three cases:

- the optimum is $r^* = 0$ if $\Delta(0) \leq 0$;
- it is $r^* = D$ if $\Delta(D) \geq 0$;

- otherwise it is the unique crossing.

Comparative statics follow from shifting the curves.

- Increasing T lowers $m_T = 2\tau'/T$ pointwise, which raises Δ pointwise. A decreasing function that is raised crosses zero later, so r^* moves outward (weakly).
- Scaling latency up, $\tau \mapsto c\tau$ with $c > 1$, raises m_T and moves r^* inward.
- Raising m_S pointwise moves r^* outward; lowering it moves r^* inward.

The conditions on m_S concern decision-relevant predictability. They are not automatic consequences of changing raw covariance parameters. If the latency law is concave (for example, latency that grows quickly for the first few hops and then levels off), m_T decreases in r , Δ need not be monotone, and multiple local optima can occur.

Figure 2 illustrates these curve shifts for the canonical model introduced next.

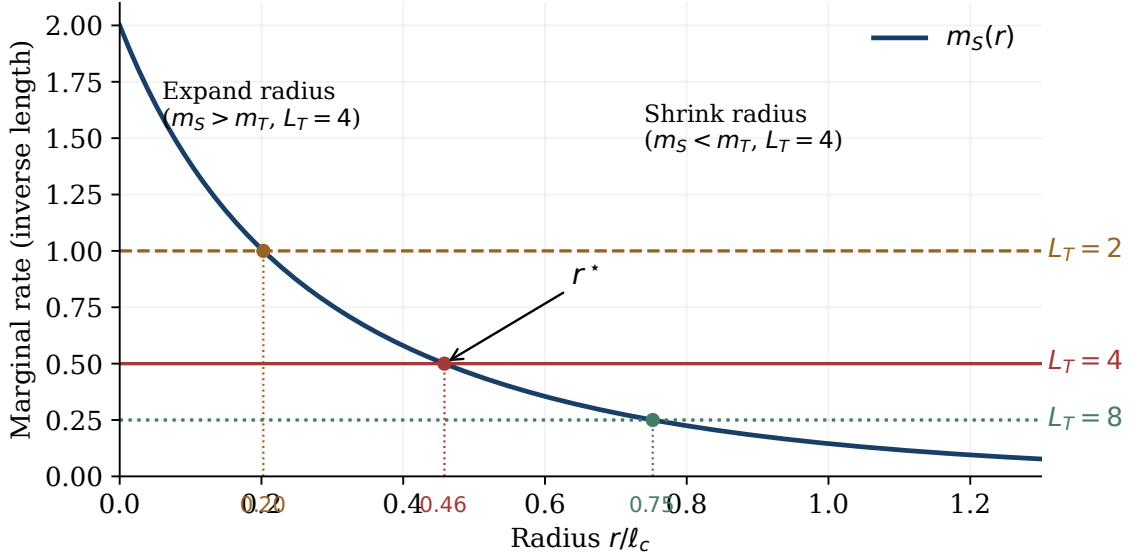


Figure 2: Marginal balance in the canonical model with $\ell_c = 1$ and $\ell_s = 0.5$. Increasing $L_T = vT$ lowers $m_T = 2/L_T$ and moves the crossing with m_S outward. For the middle curve ($L_T = 4$), regret falls to the left of the crossing and rises to its right. This is an illustration of the analytical rates, not an additional numerical experiment.

The resulting design principle is to expand information radius while the marginal spatial value exceeds the marginal freshness loss, stopping at their balance when the optimum is interior.

5.2 Canonical Line Model and Closed-Form Radius

We now derive the spatial omission function and the optimal radius from a concrete stochastic field and decision model. Consider a dense one-dimensional network, represented by locations $z \in \mathbb{R}$. This is also the continuum approximation of a sufficiently long path graph away from its boundaries.

Let $\theta(z, t)$ be a zero-mean Gaussian field with covariance

$$\mathbb{E} [\theta(z, t)\theta(z', s)] = \sigma^2 \exp\left(-\frac{|z - z'|}{\ell_s}\right) \exp\left(-\frac{|t - s|}{T}\right). \quad (99)$$

The parameter ℓ_s is the spatial correlation length, and T is the temporal coherence time.

Suppose the full-information decision at location z is the exponentially weighted spatial aggregate

$$x^*(z, t) = \int_{-\infty}^{\infty} w_{\ell_c}(u) \theta(z + u, t) du, \quad (100)$$

where

$$w_{\ell_c}(u) \triangleq \frac{1}{2\ell_c} \exp\left(-\frac{|u|}{\ell_c}\right). \quad (101)$$

w_{ℓ_c} is the Laplace (two-sided exponential) density: it integrates to one, so $x^*(z, t)$ is a weighted average of the field around z . The weight falls by a factor e for each ℓ_c of distance, and the average distance $\mathbb{E}|u|$ under this weight equals ℓ_c .

The decision-relevance length ℓ_c controls how broadly remote states influence the desired local action.

For example, (100) is generated pointwise by the quadratic tracking-loss density

$$f_z(x, \theta) = \frac{q}{2} [x(z) - x^*(z, \theta)]^2, \quad q > 0. \quad (102)$$

In this canonical model, all nonlocal dependence enters through the *target*, not through interaction between actions. The pointwise cost (102) has no cross terms between $x(z)$ and $x(z')$; this is the continuum analogue of a diagonal $Q = qI$. The linear term is $b(\theta)(z) = q x^*(z, \theta)$, which depends on the field over a range of order ℓ_c . Each location's optimal policy is therefore just its own conditional mean, $\mathbb{E}[x^*(z, t) \mid \text{information at } z]$.

On the infinite line, a positive homogeneous regret density gives infinite total expected regret. We therefore measure regret *per unit length*, which by stationarity equals the expected pointwise loss at any single location z . With this convention, $R_\infty = (q/2) \text{Var}(x^*(z, t))$. Direct action coupling would change the form of $\eta_S(r)$, but not the composition law (80) or Proposition 2.

At zero delay, the radius- r observation at location z is

$$\mathcal{O}_r(z, t) \triangleq \sigma(\theta(z + u, t) : |u| \leq r). \quad (103)$$

Formally, the observation σ -algebra (103) is generated by uncountably many values. The exponential-covariance field admits a continuous version, which we use. Consequently, this σ -algebra is generated equally well by the values on a countable dense subset of the observed interval (including the center for a radius-zero snapshot), up to completion by probability-zero events. Conditional expectations are well defined in either formulation.

Lemma 3 (Exponential omission by self-similarity). *For the field (99), decision (100), and observation (103), the normalized zero-delay spatial omission error is*

$$\eta_S(r) = \frac{\ell_c}{\ell_c + 2\ell_s} \exp\left(-\frac{2r}{\ell_c}\right). \quad (104)$$

In particular,

$$\eta_0 = \eta_S(0) = \frac{\ell_c}{\ell_c + 2\ell_s}. \quad (105)$$

Proof. By spatial stationarity, take $z = 0$ and suppress the time argument. Write $\beta_c \triangleq 1/\ell_c$ and $\beta_s \triangleq 1/\ell_s$ for the inverse lengths, so $w(u) = \frac{\beta_c}{2} e^{-\beta_c|u|}$ and $\text{Cov}(\theta(u), \theta(u')) = \sigma^2 e^{-\beta_s|u-u'|}$.

Step 0 (omission is a variance ratio). With $Q = qI$ the optimal policy given $\mathcal{O}_r$ is $\mathbb{E}[x^*(0) \mid \mathcal{O}_r]$. Its expected loss is $\frac{q}{2} \mathbb{E}[\text{Var}(x^*(0) \mid \mathcal{O}_r)]$. For a Gaussian field the conditional

variance is a deterministic number: it does not depend on the observed values (Appendix A.3). Since $R_\infty = \frac{q}{2} \text{Var}(x^*(0))$,

$$\eta_S(r) = \frac{\text{Var}(x^*(0) \mid \mathcal{O}_r)}{\text{Var}(x^*(0))}.$$

Step 1 (split into observed middle and two tails). Write $x^*(0) = M_r + T_r^+ + T_r^-$, where

$$M_r = \int_{-r}^r w(u)\theta(u) du, \quad T_r^+ = \int_r^\infty w(u)\theta(u) du, \quad T_r^- = \int_{-\infty}^{-r} w(u)\theta(u) du.$$

The middle M_r is computed from observed values, so it contributes no conditional variance.

Step 2 (rewrite the right tail). Substituting $u = r + s$,

$$T_r^+ = \frac{\beta_c}{2} e^{-\beta_c r} Y_r, \quad Y_r \triangleq \int_0^\infty e^{-\beta_c s} \theta(r+s) ds.$$

Step 3 (spatial Markov property). By Section 4, the field is Markov in z . Given the observed segment $[-r, r]$, the right tail $\{\theta(u) : u > r\}$ and the left tail $\{\theta(u) : u < -r\}$ are conditionally independent, and each depends on the segment only through its adjacent endpoint $\theta(r)$ or $\theta(-r)$. Therefore

$$\text{Var}(T_r^+ \mid \mathcal{O}_r) = \text{Var}(T_r^+ \mid \theta(r)), \quad \text{Var}(T_r^- \mid \mathcal{O}_r) = \text{Var}(T_r^- \mid \theta(-r)), \quad \text{Cov}(T_r^+, T_r^- \mid \mathcal{O}_r) = 0.$$

Step 4 (the tail variance does not depend on r). Define $C \triangleq \text{Var}(Y_0 \mid \theta(0))$. Shifting the field by r does not change its law, so $\text{Var}(Y_r \mid \theta(r)) = C$ for every r . By reflection symmetry (the covariance depends only on $|u - u'|$), the left tail gives the same value. Hence

$$\text{Var}(x^*(0) \mid \mathcal{O}_r) = 2 \left(\frac{\beta_c}{2} \right)^2 e^{-2\beta_c r} C = \frac{\beta_c^2}{2} e^{-2\beta_c r} C.$$

At $r = 0$ the same argument applies with $\mathcal{O}_0 = \sigma(\theta(0))$ and $M_0 = 0$, giving $\text{Var}(x^*(0) \mid \theta(0)) = \frac{\beta_c^2}{2} C$. Dividing, $\eta_S(r) = \eta_S(0) e^{-2\beta_c r} = \eta_S(0) e^{-2r/\ell_c}$. The unknown constant C cancels, so it never has to be computed.

Step 5 (the constant $\eta_S(0)$). Conditioning on the single Gaussian variable $\theta(0)$ gives $\text{Var}(x^*(0) \mid \theta(0)) = \text{Var}(x^*(0))(1 - \text{Corr}(x^*(0), \theta(0))^2)$ (Appendix A.3), so $\eta_S(0) = 1 - \text{Corr}^2$. Two moments are needed.

Covariance with the local value:

$$\text{Cov}(x^*(0), \theta(0)) = \int_{\mathbb{R}} w(u) \sigma^2 e^{-\beta_s |u|} du = \frac{\sigma^2 \beta_c}{2} \int_{\mathbb{R}} e^{-(\beta_c + \beta_s)|u|} du = \frac{\sigma^2 \beta_c}{\beta_c + \beta_s}.$$

Variance of the target: $\text{Var}(x^*(0)) = \frac{\sigma^2 \beta_c^2}{4} I$, where $I \triangleq \iint e^{-\beta_c(|u|+|v|) - \beta_s|u-v|} du dv$.

To evaluate I , define the inner integral $h(u) \triangleq \int_{\mathbb{R}} e^{-\beta_c|v|} e^{-\beta_s|u-v|} dv$. Then h is even, so $I = 2 \int_0^\infty e^{-\beta_c u} h(u) du$. For $u \geq 0$, split the v -integral at 0 and u :

$$h(u) = \underbrace{\frac{e^{-\beta_s u}}{\beta_c + \beta_s}}_{v < 0} + \underbrace{\frac{e^{-\beta_c u} - e^{-\beta_s u}}{\beta_s - \beta_c}}_{0 \leq v \leq u} + \underbrace{\frac{e^{-\beta_c u}}{\beta_c + \beta_s}}_{v > u}.$$

(The middle term is read as $u e^{-\beta_c u}$ when $\beta_s = \beta_c$.) Multiply by $e^{-\beta_c u}$ and integrate over $u \geq 0$ term by term:

$$\frac{1}{(\beta_c + \beta_s)^2}, \quad \frac{1}{\beta_s - \beta_c} \left(\frac{1}{2\beta_c} - \frac{1}{\beta_c + \beta_s} \right) = \frac{1}{2\beta_c(\beta_c + \beta_s)}, \quad \frac{1}{2\beta_c(\beta_c + \beta_s)}.$$

Summing and doubling,

$$I = 2 \left[\frac{1}{(\beta_c + \beta_s)^2} + \frac{1}{\beta_c(\beta_c + \beta_s)} \right] = \frac{2(2\beta_c + \beta_s)}{\beta_c(\beta_c + \beta_s)^2}, \quad \text{Var}(x^*(0)) = \frac{\sigma^2 \beta_c (2\beta_c + \beta_s)}{2(\beta_c + \beta_s)^2}. \quad (106)$$

Combine. With $\text{Var}(\theta(0)) = \sigma^2$,

$$\text{Corr}^2 = \frac{(\sigma^2 \beta_c / (\beta_c + \beta_s))^2}{\sigma^2 \cdot \sigma^2 \beta_c (2\beta_c + \beta_s) / (2(\beta_c + \beta_s)^2)} = \frac{2\beta_c}{2\beta_c + \beta_s}, \quad \eta_S(0) = \frac{\beta_s}{2\beta_c + \beta_s} = \frac{\ell_c}{\ell_c + 2\ell_s}.$$

□

Assume information propagates at effective speed $v > 0$, so

$$\tau(r) = r/v, \quad (107)$$

and define the temporal propagation length

$$L_T \triangleq vT. \quad (108)$$

This is the distance information can travel during one coherence time. We write $[z]_+ \triangleq \max\{z, 0\}$.

Theorem 4 (Optimal synchronized-snapshot radius in the canonical model). *Suppose the state field obeys (99), the full-information decision is given by (100), the loss is (102), and the latency is (107). Then the unique optimal radius on the infinite line satisfies the dimensionless law*

$$\boxed{\frac{r^*}{\ell_c} = \frac{1}{2} \left[\log \left(\frac{1 + L_T/\ell_c}{1 + 2\ell_s/\ell_c} \right) \right]_+}. \quad (109)$$

Equivalently,

$$\boxed{r^* = \frac{\ell_c}{2} \left[\log \left(\frac{\ell_c + L_T}{\ell_c + 2\ell_s} \right) \right]_+}. \quad (110)$$

The optimal radius is strictly positive if and only if

$$\boxed{L_T > 2\ell_s}. \quad (111)$$

Within the interior regime, r^* :

1. increases with the temporal coherence time T ;
2. increases with the information-propagation speed v ;
3. decreases with the spatial correlation length ℓ_s ; and
4. increases with the decision-relevance length ℓ_c .

Proof. With $\tau(r) = r/v$ we have $2\tau(r)/T = 2r/L_T$. Substituting this and $\eta_S(r) = \eta_0 e^{-2r/\ell_c}$ into (86) gives

$$\frac{R(r)}{R_\infty} = 1 - e^{-2r/L_T} (1 - \eta_0 e^{-2r/\ell_c}) = 1 - g(r),$$

so minimizing R is the same as maximizing g .

For any omission law $\eta_S(r) = \eta_0 e^{-2r/\ell_c}$ with $0 < \eta_0 < 1$, minimizing (86) under linear delay is equivalent to maximizing

$$g(r) = e^{-2r/L_T} - \eta_0 e^{-2r(1/L_T + 1/\ell_c)}.$$

Differentiation gives

$$g'(r) = 2e^{-2r/L_T} \left[\eta_0 \left(\frac{1}{L_T} + \frac{1}{\ell_c} \right) e^{-2r/\ell_c} - \frac{1}{L_T} \right].$$

The bracket is strictly decreasing and has a negative limit, so g' changes sign at most once, from positive to negative. If its value at zero is nonpositive, radius zero is the unique optimum; otherwise the unique stationary point is the optimum. Setting the bracket in $g'(r)$ to zero gives

$$e^{2r/\ell_c} = \eta_0 L_T \left(\frac{1}{L_T} + \frac{1}{\ell_c} \right) = \eta_0 \left(1 + \frac{L_T}{\ell_c} \right).$$

Taking logarithms gives the stationary point below. It is positive exactly when $\eta_0(1 + L_T/\ell_c) > 1$. Substituting $\eta_0 = \ell_c/(\ell_c + 2\ell_s)$ makes this product $(\ell_c + L_T)/(\ell_c + 2\ell_s)$, which exceeds one exactly when $L_T > 2\ell_s$, as in (111). Thus the general exponential law gives

$$r^* = \frac{\ell_c}{2} \left[\log \left(\eta_0 \left(1 + \frac{L_T}{\ell_c} \right) \right) \right]_+, \quad (112)$$

and a maximum allowed radius D gives

$$r_D^* = \min\{D, r^*\}. \quad (113)$$

Substituting $\eta_0 = \ell_c/(\ell_c + 2\ell_s)$ gives (109)–(111). The cap D limits how far each agent may look, but the environment remains an infinite line. In particular $\eta_S(D) = \eta_0 e^{-2D/\ell_c} > 0$. Unlike the finite-graph endpoint $r = \text{diam}(G)$, the capped radius still omits decision-relevant state (compare Fig. 5, right panel).

In the positive-radius regime, $\partial r^*/\partial L_T = \ell_c/[2(\ell_c + L_T)] > 0$ and $\partial r^*/\partial \ell_s = -\ell_c/(\ell_c + 2\ell_s) < 0$. Since $L_T = vT$, these establish the first three comparative statics. Finally, monotonicity in ℓ_c is not immediate from (110), because ℓ_c appears both as the prefactor and inside the logarithm. Write the difference of logarithms as

$$\log(\ell_c + L_T) - \log(\ell_c + 2\ell_s) = \int_{2\ell_s}^{L_T} \frac{ds}{\ell_c + s}.$$

When $L_T > 2\ell_s$ this gives

$$r^* = \frac{1}{2} \int_{2\ell_s}^{L_T} \frac{\ell_c}{\ell_c + s} ds. \quad (114)$$

The integrand $\ell_c/(\ell_c + s) = 1 - s/(\ell_c + s)$ is strictly increasing in ℓ_c for every $s > 0$, proving that r^* increases with the range over which remote state affects the desired decision. $\square$

Theorem 4 identifies three physical length scales:

$$\boxed{\underbrace{\ell_s}_{\text{spatial correlation}} \quad \underbrace{\ell_c}_{\text{decision relevance}} \quad \underbrace{L_T = vT}_{\text{temporal propagation}}}. \quad (115)$$

Three consequences clarify how these lengths determine the optimum.

(1) The threshold does not depend on ℓ_c . At radius zero, using $\eta'_S(r) = -(2/\ell_c)\eta_S(r)$ and $\eta_0/(1 - \eta_0) = \ell_c/(2\ell_s)$,

$$m_S(0) = \frac{2}{\ell_c} \cdot \frac{\eta_0}{1 - \eta_0} = \frac{1}{\ell_s}, \quad m_T = \frac{2}{L_T}.$$

The first increment of radius pays off exactly when $1/\ell_s > 2/L_T$, that is, $L_T > 2\ell_s$. The decision range ℓ_c cancels because it has two offsetting effects at $r = 0$. A longer decision range makes the local observation less complete (larger η_0), which raises the value of looking farther. But it also makes omission decay more slowly with radius (rate $2/\ell_c$), which lowers the value of each extra unit of radius.

(2) Long decision range, $\ell_c \gg L_T, \ell_s$. In the positive-radius regime $L_T > 2\ell_s$, using $\log \frac{1+a}{1+b} = \log(1+a) - \log(1+b) \approx a - b$ for small a, b ,

$$r^* \approx \frac{\ell_c}{2} \left(\frac{L_T}{\ell_c} - \frac{2\ell_s}{\ell_c} \right) = \frac{L_T - 2\ell_s}{2},$$

half the excess propagation length.

(3) Short decision range, $\ell_c \ll \ell_s, L_T$. Then $\ell_c + L_T \approx L_T$ and $\ell_c + 2\ell_s \approx 2\ell_s$, so $r^* \approx (\ell_c/2) \log(L_T/(2\ell_s))$ when $L_T > 2\ell_s$, and $r^* = 0$ otherwise.

Why does stronger spatial correlation shrink the optimal radius? This can seem backwards: more correlation sounds like it should make neighbors more useful. But $\eta_0 = \ell_c/(\ell_c + 2\ell_s)$ falls as ℓ_s grows. When the field is smooth, the local value $\theta(z)$ already predicts the field well over the whole decision range, so little is left for a wider snapshot to add. Extra radius mostly reports values the agent could already have predicted. Its marginal value $m_S(r) = \frac{2}{\ell_c} \frac{\eta_S(r)}{1 - \eta_S(r)}$ is therefore smaller at every radius, while its freshness cost m_T is unchanged, and the balance point moves inward. Correlation makes neighbors informative, but it also makes them redundant with what the agent already knows.

On a finite graph, Theorem 3 and minimization over integer radii remain exact, with the one-hop comparison (87)–(88) as the discrete form of marginal balance; Eq. (110) is the closed-form counterpart on the homogeneous line.

6 Numerical Consistency Checks and Finite-Graph Illustrations

This section checks the implementations against the closed-form predictions and then shows how the same quantities behave on finite graphs. Experiments 1 and 2 check temporal prediction and the fresh-local-stale-global endpoints; Experiments 3 and 4 isolate and sweep the continuous radius tradeoff; Experiment 5 separates state statistics from decision-relevant omission; and Experiment 6 evaluates exact integer radii on several noncanonical graph instances.

6.1 Numerical Methodology and Synthetic Environments

The numerical objects are architecture regrets, so each calculation uses the same information structure as its analytical counterpart. We work with an exogenous common-rate Gaussian-affine envi-

ronment: actions do not alter later states. For $x^* = K\theta + k_0$, with $K = Q^{-1}B$, we evaluate

$$R(\mathcal{A}) = \frac{1}{2} \|x^* - u_{\mathcal{A}}^*\|_Q^2$$

from conditional covariance and, where appropriate, from independently sampled quadratic losses. The solvers respect the information structure: the common delayed snapshot in Experiment 1 permits a joint conditional mean even for non-diagonal Q ; Experiment 2 uses the exact fresh-local rule; Experiments 3 and 4 evaluate the scalar composition; and Experiments 5 and 6 use $Q = I$ so agentwise Gaussian conditional variances are exact. Experiment 5 holds the graph and covariance fixed while changing decision sensitivity. The graph covariances are scaled to average marginal variance one.

For an arbitrary graph, a convenient alternative is to define the covariance spectrally through the graph Laplacian L_G . For example,

$$\Sigma_S = \sigma^2 (\kappa_s^2 I + L_G)^{-\nu}, \quad \kappa_s > 0, \quad \nu > 0, \quad (116)$$

is positive semidefinite and places more state energy in low graph-frequency modes. Such constructions are closely related to graph signal smoothness and Gaussian Markov random-field models [21, 22].

Pointwise Monte Carlo means use 95% normal confidence intervals. The Experiment 2 boundary intervals apply the delta method to the paired fresh-local/open-loop regret means, so their uncertainty reflects that the two regrets use the same draws.

Table 3 summarizes the reference settings. The repository stores fixed configurations, processed tables, selected raw arrays, and graph covariance/distance inputs where applicable, together with run metadata and diagnostics; it is not a complete archive of every random draw. The exact system construction, graph seeds, conditioning safeguards, boundary conventions, radius grids, crossover estimator, and interval calculation are specified in the reproduction documentation. Robustness beyond the common-rate Gaussian-affine model is discussed in Section 8.

Table 3: Reference numerical settings. The shared-resource sweep fixes $q = 1$; graph covariances in Experiments 5–6 are scaled to average marginal variance one. Quantities not being swept retain the experiment-specific values in the configuration files.

Experiment	principal sweep	fixed setting/size	evaluation
1. Temporal pairs	$\tau/T \in [0, 3]$ (25 points)	A–D; $n = 8, 20, 50, 32$	20,000/point
2. Local–global	9 γ/q values in $[0, 10]$	$n = 5, 10, 25, 100$; $q = 1$	30,000/setting
3. Scalar radius	$r/\ell_c \in [0, 2]$ (1,001 points)	3 regimes; $D/\ell_c = 2$	50,000/point
4. Canonical map	$(vT/\ell_c, \ell_s/\ell_c)$; 72×68	$r/\ell_c \in [0, 4]$; $\Delta r = 0.0016$	direct scalar
5. Decision relevance	$\ell_c = 0.7, 2, 6$	64-node ring; $T = 6$	12,000/check
6. General graphs	path, ring, grid, geometric	64 nodes; $T = 5$	exact covariance

6.2 Temporal Scaling and the Local–Global Crossover

The first two experiments test two different consequences of common-rate temporal predictability: the exact stale-global law (48), and the endpoint crossover threshold (62).

Experiment 1 asks whether the normalized regret of a delayed global snapshot depends only on $\rho = \tau/T$, even when spatial covariance, objective coupling, and the decision operator change. We used the four systems in Table 3 and drew 20,000 exact stationary OU pairs $(\theta_{t-\tau}, \theta_t)$ at each of 25 values of ρ . The first member has covariance Σ_S and the second is generated as $e^{-\rho}\theta_{t-\tau} +$

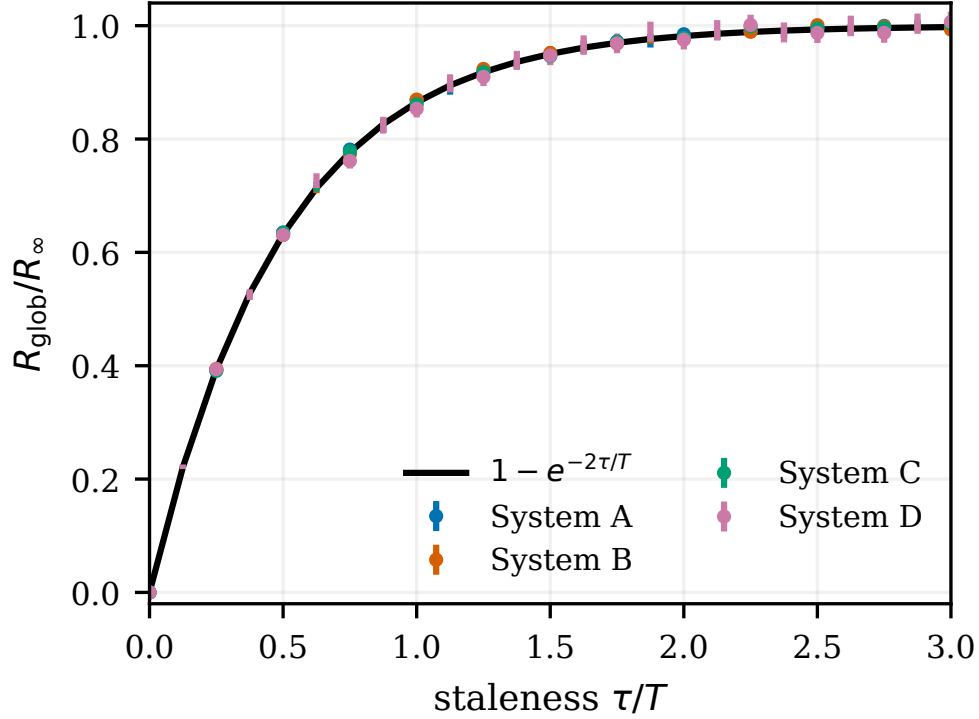


Figure 3: Temporal scaling collapse from exact stationary OU pairs. Markers are Monte Carlo estimates for four systems with different dimensions, spatial covariances, objective matrices, and decision operators; bars are 95% confidence intervals. The solid curve is the exact law $1 - e^{-2\tau/T}$. Normalization by R_∞ removes system-specific scale.

$(1 - e^{-2\rho})^{1/2}\varepsilon$, with an independent innovation ε of covariance Σ_S . For each pair, the optimal delayed-snapshot action was evaluated with the known common-rate coefficient and the quadratic loss was computed in the system’s Q metric.

Across the 100 system–parameter combinations, the Monte Carlo curves collapse onto $1 - e^{-2\tau/T}$ (Fig. 3). The largest absolute normalized deviation was 0.0155 and the root-mean-square deviation was 0.00471. This supports the exact temporal scaling for these stationary common-rate pairs.

Experiment 2 asks whether the finite- n threshold in Eq. (62) describes the point at which fresh local information becomes preferable to a stale global snapshot. We used the shared-resource model $Q = qI + \gamma\mathbf{1}\mathbf{1}^\top$, $q = 1$, with independent OU components. For each of 36 $(n, \gamma/q)$ settings, the fresh-local and open-loop regrets were evaluated on the same 30,000 current-state draws. The empirical boundary was then inferred by inserting these two estimates into the OU temporal law,

$$\hat{\rho}^\star = \frac{1}{2} \log \left(\frac{\hat{R}_\infty}{\hat{R}_\infty - \hat{R}_{\text{loc}}} \right).$$

Accordingly, Fig. 4 reports the temporal-law boundary inferred from paired local/open-loop losses.

The mean absolute boundary error was 0.00111 and the maximum was 0.00557. Finite size matters most under strong coupling: at $n = 5$ and $\gamma/q = 10$, the exact threshold is 0.109 below the large-system limit. As n grows, the inferred boundary approaches $\frac{1}{2} \log(1 + \gamma/q)$. Stronger decision coupling therefore makes older global information worth tolerating in this independent-component model.

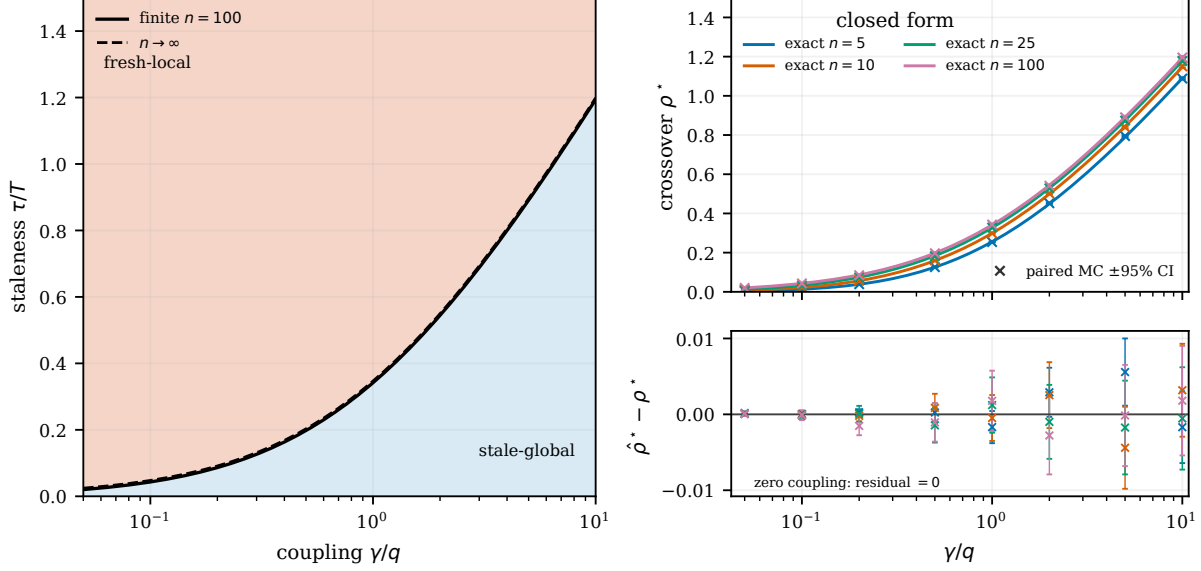


Figure 4: Fresh-local versus stale-global crossover. Left: the phase map uses the exact finite- $n = 100$ boundary (solid) and the large- n limit (dashed), Eqs. (62) and (64). Upper right: exact theory curves and inferred Monte Carlo boundaries (crosses) for four system sizes, with paired delta-method 95% intervals. Lower right: empirical minus theoretical boundary, on a scale that reveals the sampling differences and their uncertainty. The zero-coupling setting is evaluated at $\rho^* = 0$ but omitted from the logarithmic positive-coupling axes.

6.3 Emergence of an Optimal Coordination Radius

Experiment 3 illustrates why expanding the information radius can help at first and hurt later: reduced spatial omission competes with increasing staleness. We used $\eta_S(r) = \eta_0 e^{-2r/\ell_c}$ and $\tau(r) = r/v$ on $0 \leq r \leq D = 2$, with local $(\eta_0, vT) = (0.25, 0.2)$, interior $(0.7, 4)$, and maximum allowed radius $(0.9, 100)$ regimes (all with $\ell_c = 1$). At each radius, independent standard-normal draws were scaled by the two prescribed component variances and added before squaring. This is a scalar loss check: no spatial field, graph, or neighborhood conditional distribution is sampled.

The grid minima were 0, 0.626, and 2; the corresponding analytical minima after imposing the cap were 0, 0.62638, and 2. At the interior grid minimum, the marginal-slope gap was $|m_S(\hat{r}^*) - m_T(\hat{r}^*)| = 4.77 \times 10^{-4}$, and the largest Monte Carlo deviation from the prescribed scalar curve was about 0.020. The maximum allowed radius case is not a global endpoint: its unconstrained minimizer lies beyond D , while $\eta_S(D) = \eta_0 e^{-2D/\ell_c} > 0$. Thus the cap still omits decision-relevant state. The three curves distinguish immediate dominance of staleness, an interior balance, and a benefit from expansion throughout the allowed range.

6.4 Scaling Laws and Regime Map

Experiment 4 asks whether the canonical closed form predicts both the zero-radius region and the interior radius over a two-parameter sweep, rather than only at selected examples. We swept 4,896 points over $vT/\ell_c \in [0.1, 20]$ and $\ell_s/\ell_c \in [0.05, 5]$, using $\ell_c = 1$ as the unit of length. Independently of the closed form, every point was minimized by direct scalar evaluation of Eq. (81) on the same fixed grid $r_j = 0.0016j$, $j = 0, \dots, 2500$, so $r \in [0, 4]$ for every parameter pair. No covariance

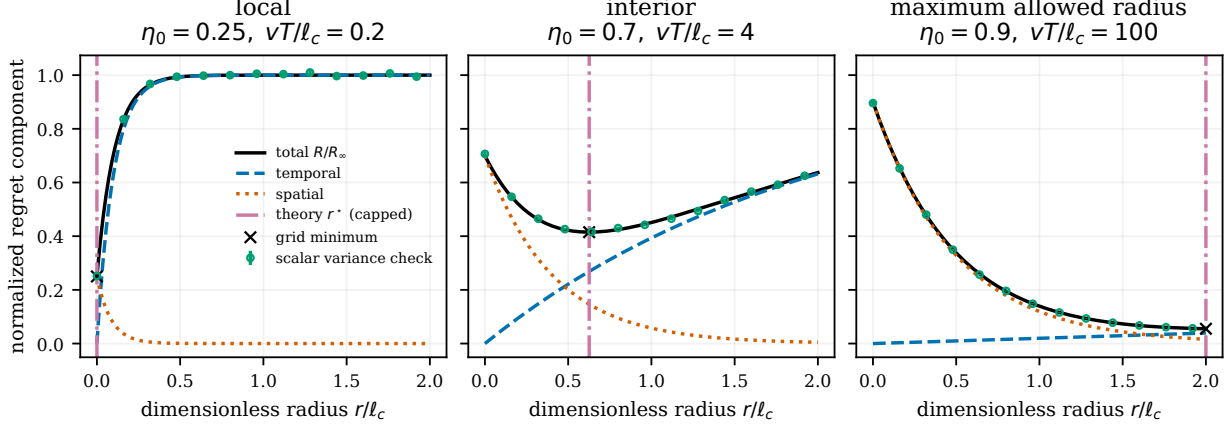


Figure 5: Emergence of local, interior, and maximum allowed radius optima under $\eta_S(r) = \eta_0 e^{-2r/\ell_c}$ and $\tau(r) = r/v$. Curves show total regret and its temporal and residual-spatial terms from Eq. (91); open markers with 95% intervals are independent scalar-innovation estimates. Dash-dotted lines and crosses mark the analytical constrained and grid minimizers. At the maximum allowed radius, positive omission remains: $\eta_S(D) > 0$.

simulation or adaptive radius range was used. Separate one-dimensional sweeps tested the four comparative statics.

The gray region in Fig. 6 selects fresh local information; above the threshold $vT = 2\ell_s$, positive scope becomes worthwhile. Moving upward increases the distance information can travel within a coherence time and raises the preferred radius. Moving right increases spatial correlation, making remote observations more redundant and lowering the preferred radius. The slices show these changes as ordinary radius curves. The mean absolute grid-versus-closed-form error was 2.25×10^{-4} and the maximum was 8.00×10^{-4} , below the 0.0016 grid step. Ordinary grid error occurs throughout the positive-radius interior because the minimizer is discretized; it is not confined to the threshold. There were five zero/positive classification disagreements, all adjacent to the threshold where the continuous optimum fell below the first positive grid point. The one-dimensional sweeps were monotone in all four predicted directions: r^* increased with T , v , and ℓ_c , and decreased with ℓ_s . This validates the scalar search and canonical scaling within the stated range.

6.5 State Predictability versus Decision-Relevant Predictability

Experiment 5 asks whether the architecture depends on which state modes affect the decision, rather than only on raw state correlation. We held a 64-node ring, its Laplacian covariance, $T = 6$, and the latency law (0.12 time units per hop) fixed, and changed only the decision-sensitivity operator $K_{ij} = e^{-d_G(i,j)/\ell_c} / \|e^{-d_G(i,\cdot)/\ell_c}\|_2$, using $\ell_c \in \{0.7, 2, 6\}$ and $Q = I$. Exact Gaussian conditioning gives the decision-weighted omission $\eta_S(r)$ at every graph radius. The raw state-correlation statistic was computed separately from the fixed covariance; it is not the same quantity as $\eta_S(r)$. Each curve is normalized by its own $R_\infty = \frac{1}{2} \text{tr}(K\Sigma_S K^\top)$, so normalized regrets compare unexplained fractions rather than equal absolute cost scales.

Increasing ℓ_c from 0.7 to 2 to 6 increased $\eta_S(0)$ from 0.0460 to 0.258 to 0.572 and moved the discrete optimum from 1 to 2 to 5 hops, even though the raw state correlation was identical. Independent 12,000-sample conditioning checks differed from the exact omission by at most 2.39×10^{-3} (the largest pointwise standard error was 3.20×10^{-3}). Thus changing only decision sensitivity

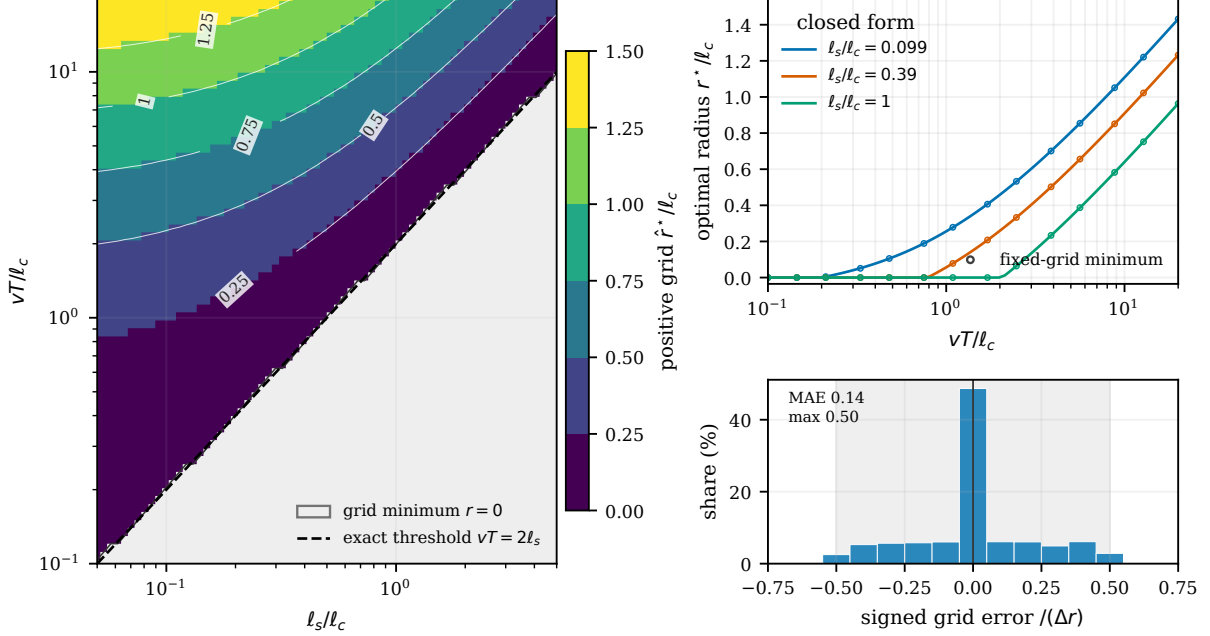


Figure 6: Dimensionless optimal-radius law from direct scalar minimization. Left: the numerical map, with the numerical zero-radius region shown in gray and the dashed curve marking the theoretical transition $vT = 2\ell_s$. Upper right: selected ℓ_s/ℓ_c slices comparing grid minimizers with the closed form in Eq. (109). Lower right: the histogram of $(\hat{r}^* - r^*)/\Delta r$ over all 4,896 points; its zero spike includes local-regime points and the remaining grid errors are of order a half-step.

in a fixed environment produced substantially different preferred architectures.

6.6 Finite Graphs beyond the Canonical Geometry

Experiment 6 asks whether the conditional-variance construction and discrete radius comparison remain usable when the geometry is not the homogeneous line assumed by the canonical formula. We considered one 64-node graph of each of a path, ring, two-dimensional grid, and random geometric type; the geometric graph uses the fixed configured seed. For each instance we formed the covariance (116), scaled it to average marginal variance one, and computed every $\eta_S(r)$ directly from the Gaussian conditional covariance of the desired action given the radius- r neighborhood. The reference setting uses $Q = I$, $T = 5$, $\ell_c = 2$, and latency 0.12 per hop. No exponential omission fit or canonical line formula was used, and no graph ensemble average was taken.

Under the reference setting, Fig. 8 gives exact integer optima of 2, 2, 3, and 2 hops for the path, ring, grid, and geometric instance, respectively. In these four sampled instances, increasing T over the configured values 1.5, 2.5, 4, 6, 9, 14 changed the optimum from 1 to 3 hops on the path and ring, from 1 to 4 on the grid, and from 1 to 3 on the geometric graph. The sampled ℓ_c sweep from 0.7 to 6 moved the optima from (0, 0, 1, 1) to (5, 5, 5, 3) in the same graph order. Increasing per-hop latency weakly decreased the optimum, as did decreasing κ_s , which increases spatial smoothness after variance normalization. These comparative statics describe the four specified graph instances. Since radii are integer-valued, the appropriate comparison is the one-hop regret difference in Eq. (87). For example, the geometric graph’s three-hop regret exceeds its two-hop minimum by only $0.00362R_\infty$; the archived neighbor differences quantify such shallow minima.

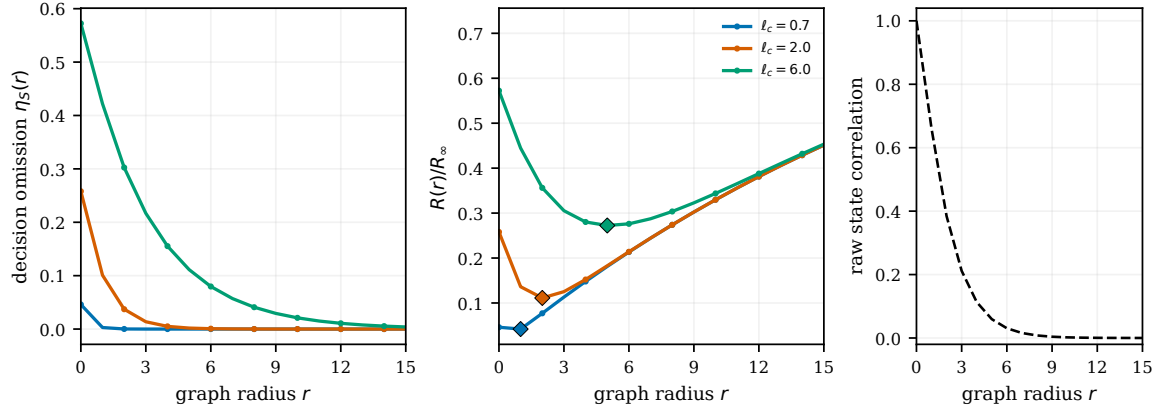


Figure 7: Decision relevance with the graph and state covariance held fixed. The decision-weighted omission and normalized composed regret are shown for three row- ℓ_2 -normalized operators with $Q = I$. Raw state correlation is shown in a separate context panel and is identical across operators; it is not an omission estimate. Each regret is normalized by its operator-specific R_∞ , and the minimizing integer radius is marked. Changing only the decision-relevance range moves the optimum from 1 to 5 hops.

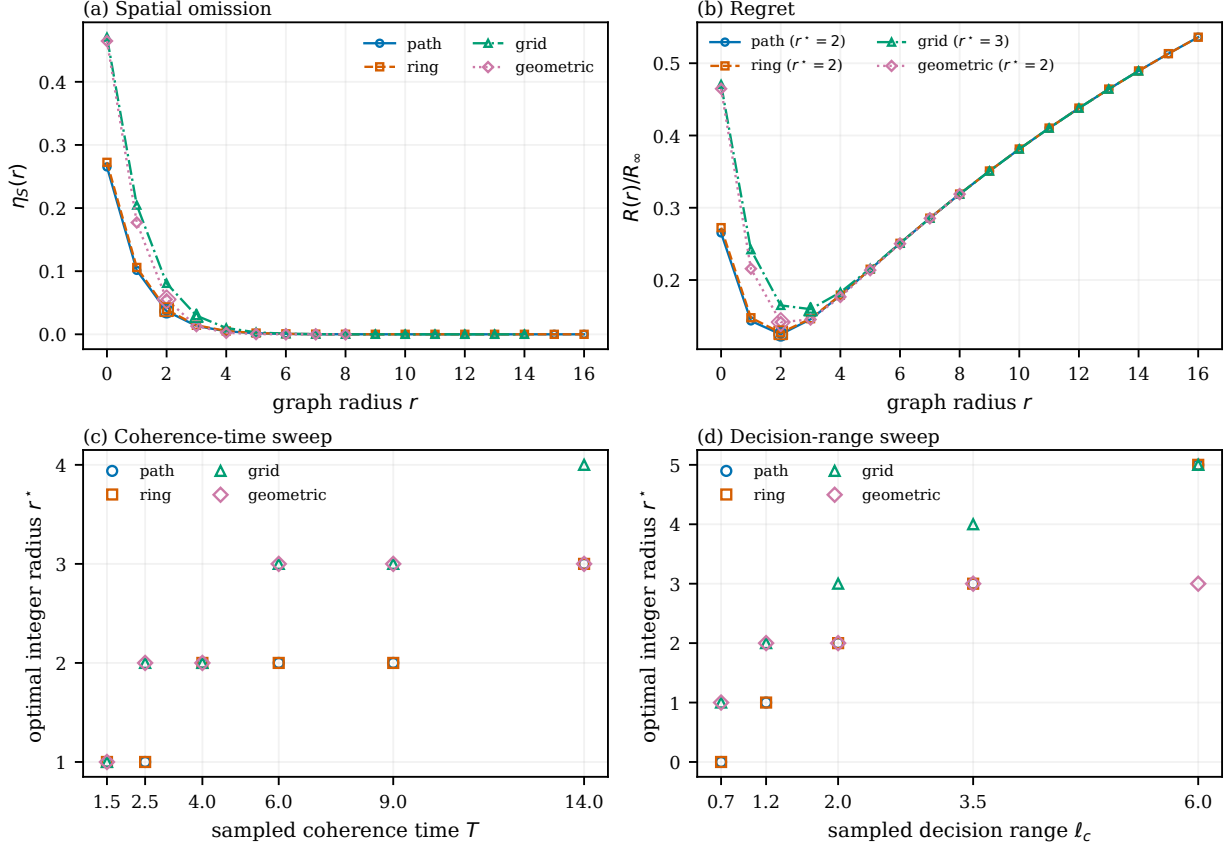


Figure 8: Finite noncanonical graphs. Top: $\eta_S(r)$ computed from exact Gaussian conditional covariances and the resulting regret under one common normalized setting; lines join integer-radius evaluations. Bottom: exact integer optima at the sampled coherence times and decision ranges; no transition locations between those settings are inferred. Distinct marker shapes identify coincident graph results. The canonical line closed form is not used.

7 Related Work

We organize the closest literatures around three distinctions: iterative computation versus information architecture, controlled dynamics versus an exogenous environment, and age-based freshness versus decision-relevant value. These distinctions frame the more specific connections developed below.

7.1 Static Team Decision Theory

Radner established foundational optimality conditions for static teams, in which decision makers share a common objective but act on different information [10]. Under appropriate convexity and regularity conditions, the resulting stationarity conditions are sufficient for global team optimality; in the quadratic Gaussian specialization, the optimal decision rules are affine [10, 11]. In the deterministic-Hessian quadratic model used here, these fixed-information optimality conditions admit the equivalent Hilbert-space formulation developed in Section 2.4: for a fixed information architecture $\mathcal{A}$, the team-optimal policy is the Q -orthogonal projection of the full-information action onto the closed subspace $\mathcal{S}(\mathcal{A})$ of implementable policies. This projection identity specializes the classical static-team framework to our quadratic model; Radner’s theorem is not stated in this literal form. Krainak, Speyer, and Marcus subsequently relaxed the sufficient conditions associated with Radner’s stationarity result and extended the theory to an exponential-quadratic criterion with jointly Gaussian state and observations [23]. In a companion paper, they formulated affine linear-quadratic-Gaussian and linear-exponential-Gaussian team problems as constrained parameter optimizations and represented optimal team gains as projections of the corresponding centralized gains [17].

Classical team theory also treated information itself as an organizational design object. Marschak and Radner analyzed the value of information, delayed information and the tradeoff between timeliness and completeness, and formulated team organization in terms of optimal networks [11]. More recently, Summers, Li, and Kamgarpour formulated information-structure design as the selection of additional measurements or communication links jointly with the corresponding team decision strategies [12]. Afshari and Mahajan characterized quadratic Gaussian static teams whose observations decompose into information common to all agents and agent-specific local information [24]. They subsequently applied this decomposition to team-optimal decentralized filtering over communication graphs with delayed information sharing, where sufficiently old measurements constitute common information while more recent measurements remain local [25]. Rusmevichientong and Van Roy studied large teams in which each agent observes the local cost structure only within a graph radius, using centralized performance as a benchmark [26]. Gamarnik, Goldberg, and Weber studied decentralized decisions based on local information in random decision networks and related their near-optimality to a correlation-decay, or long-range-independence, property [27].

Relative to these works, the distinctive object studied here is a structured family of information architectures in which spatial scope and temporal freshness are coupled through the scope–latency relation $\tau(r)$. Each spatial scope induces an acquisition delay, and the resulting architecture is valued through its prediction error for the full-information decision. This coupling yields the freshness–locality crossover and coordination-scale laws developed in Sections 3 and 5.

7.2 Distributed Optimization, Communication Constraints, and Scope

Distributed optimization studies how agents compute a common solution using local computation and message exchange. Classical asynchronous gradient methods allow delayed interprocessor

communication while retaining convergence guarantees under suitable boundedness conditions [28], while distributed subgradient methods establish convergence when agents exchange information locally over time-varying network topologies [3]. In these canonical formulations, the communication process constrains an iterative computation of an optimizer. Our setting separates that computational question from information architecture: the full-information decision at each epoch is the benchmark, and the object of design is the information available when that decision must be made.

Networked and decentralized control place communication restrictions directly in the feedback loop, including sampling, packet loss, communication topology, and delay [29]. For spatially invariant plants, early work showed that optimal controllers can exhibit inherent spatial localization [5], while subsequent work imposed explicit finite-speed communication structure. Arbelaiz, Bamieh, Hosoi, and Jadbabaie characterize the spatial decay of optimal estimator gains, using the decay rate as a proxy for the distance over which measurements are useful in a spatially distributed dynamic estimation problem [30]. Voulgaris, Bianchini, and Bamieh studied H_2 control under delayed communication requirements [6]; Bamieh and Voulgaris formulated distance-dependent information propagation through funnel causality [7]; and Fardad and Jovanović developed state-space models for distributed controllers with finite communication speed [8]. These works are important antecedents to our use of spatial scope and propagation time, but they optimize dynamic feedback for controlled plants rather than information-constrained stage decisions in an exogenous environment.

Communication structure has also been treated as a design variable. Langbort and Gupta study interconnection topology when communication is assigned a topology-dependent cost [31], and Matni co-designs communication-delay structure and H_2 control using regularization [32]. In wireless consensus, Vanka, Gupta, and Haenggi explicitly trade communication radius against interference-induced delay and show that the preferred connectivity depends on network geometry [15]. Most directly, Ballotta, Jovanović, and Schenato parameterize control architectures by communication scope: each agent receives measurements from nodes within a chosen number of communication hops, with an architecture-dependent delay that increases with that scope. After optimizing the feedback gains for each scope, they show that sparse architectures can outperform all-to-all feedback [9]. Ballotta and Gupta obtain an analogous conclusion when maximizing consensus convergence speed under hop-dependent communication delay [14]. These results establish that scope-dependent delay can itself induce a sparse or intermediate optimal control architecture.

Our setting differs in the decision problem: an exogenous-state static team, with the current full-information action as the benchmark and an architecture valued by the prediction error it induces for that action. This yields the decision-relevant spatial omission function $\eta_S(r)$, temporal unpredictability $\eta_T(\tau)$, their exact common-rate composition law, and the fresh-local versus stale-global and coordination-radius laws derived above. Ballotta, Arbelaiz, Gupta, Schenato, and Jovanović study a different but complementary question for spatially invariant dynamic plants: how delayed measurements from different spatial locations alter the spatial locality of the optimal feedback kernel [16]. Their results operate through closed-loop plant dynamics and controller localization, whereas ours operate through prediction of an exogenously varying full-information decision.

7.3 Freshness and Age of Information

Age of Information (AoI) formalizes the timeliness of status information through the age of the freshest received update, $\Delta(t) = t - u(t)$. Seminal work showed that minimizing AoI is distinct from maximizing throughput or minimizing packet delay and initiated a large literature on update generation, queueing, and scheduling [2, 33]. Subsequent work generalized linear age to application-specific nonlinear age penalties [34]. Connections to remote estimation make the distinction between

age and task loss explicit: for a Gauss–Markov Ornstein–Uhlenbeck process, estimation error under signal-agnostic sampling is a nonlinear function of age, whereas signal-aware sampling can exploit the realized estimation error and outperform age-optimal policies [18].

More recent work has pushed freshness metrics toward task-aware objectives. Shisher et al. showed that remote-inference loss can be nonmonotonic in age and designed communication policies around inference performance [35]; subsequent work considers correlated sources for which inference penalties depend jointly on multiple sources’ ages [36]. Li et al. go further toward decision-aware freshness by jointly optimizing sampling and remote decision making under stale observations [37]. Those works optimize when or which updates reach a fixed remote receiver; we instead choose the information architecture available to a decentralized team: what is observed, from what spatial scope, and at what age. Because broader scope itself incurs greater acquisition delay, spatial omission and temporal staleness are coupled by the architecture. This leads to the fresh-local versus stale-global crossover and optimal coordination-scale results developed here.

7.4 Centralization, Delegation, and Organizational Economics

A closely related organizational-economics literature asks how dispersed information, communication constraints, and decision rights determine organizational form. Aoki compares hierarchical and horizontal information structures when local conditions are uncertain and central monitoring or response is limited [38]. In the information-processing tradition, Radner studies organizations of limited-capacity processors trading off processing resources against decision delay [39]; Bolton and Dewatripont derive communication networks from processing and communication costs [40]; and Van Zandt studies real-time decentralized processing in which computational delay constrains the use of recent information [41]. Dessein and Santos likewise study adaptation to local information versus coordination under imperfect communication [42].

A complementary delegation literature makes decision rights endogenous when information and objectives are dispersed. Aghion and Tirole distinguish formal from real authority [43], while Dessein studies delegation as an alternative to strategic communication [44]. Most closely related to our centralization framing, Alonso, Dessein, and Matouschek compare centralized and decentralized coordination when managers privately observe local conditions [4]. Our model abstracts from incentive conflicts and endogenous information acquisition: agents share a common objective and the environment evolves exogenously. The tradeoff studied here is spatio-temporal: broader synchronized snapshots can improve coordination but arrive older. This yields a pure-benchmark crossover and, in the canonical spatial model, an interior optimum within the synchronized-snapshot family.

7.5 Spatial Statistics and Graph Signal Processing

Spatial statistics provides the closest statistical antecedent to our spatial-predictability model. Kriging casts spatial prediction as an optimal linear prediction problem under spatial dependence [45]. For lattice data, Besag’s conditional formulation represents spatial dependence through local Markov neighborhoods [46]; Lindgren, Rue, and Lindström later connect Matérn Gaussian fields to sparse Gaussian Markov random fields through stochastic partial differential equation representations [22]. Space–time statistics treats separability as an optional modeling restriction: Gneiting constructs broad classes of stationary nonseparable covariance functions [20]. These works provide the statistical context for our covariance-based spatial model and its separable and non-separable distinction.

Graph signal processing extends analogous ideas to irregular domains. Shuman et al. use graph-Laplacian eigenvectors to define a graph Fourier domain and associate low graph frequencies with

signals that vary slowly over the graph [21]. Graph-sampling theory asks when bandlimited graph signals can be exactly recovered from partial observations [47], while stationary graph signal processing gives spectral descriptions and Wiener-type estimators for random graph signals [48]. Our objective is different: we do not value accurate reconstruction of θ_t per se. A radius- r architecture is evaluated by its loss in reproducing the full-information decision x_t^* , and increasing r also increases information age through $\tau(r)$. Thus spatial omission and temporal staleness are priced jointly, and graph-smooth modes matter only insofar as they are decision-relevant.

8 Discussion and Conclusions

What the theory establishes. The central constraint in networked decision making is that information breadth and freshness generally cannot be chosen independently. Nearby observations can be used quickly but may omit remote state needed for coordination; a broader view can improve coordination but loses predictive value while it is collected and disseminated. Architecture regret measures this loss relative to the full-information decision after optimizing over every policy implementable under the architecture.

Theorem 2 characterizes the fresh-local versus stale-global endpoints. Proposition 2 gives the interior marginal-balance condition for the synchronized-snapshot radius, and Theorem 4 gives its closed-form scaling law in the canonical model. Normalization by open-loop regret separates the overall scale of the decision problem from the fraction of decision-relevant variation preserved by an architecture, enabling comparisons across modeled systems.

Why decision-relevant predictability matters. Raw state predictability is not the correct design criterion. Architecture regret depends on predicting the full-information decision x^* , not on reconstructing every component of θ . A remote state component can be hard to predict but architecturally unimportant when it has little influence on the desired action. Conversely, a small residual uncertainty can matter when the decision-sensitivity operator K strongly amplifies that mode. The relevant predictability therefore combines environmental statistics, decision sensitivity and coupling, information geometry, and freshness (Section 6.5).

This distinction also separates physical communication geometry from decision geometry. Graph distance determines which observations can be acquired and their age on arrival; Q , B , and K determine whether those observations change the desired joint action. Two nearby nodes may be weakly coupled, while distant nodes may interact strongly through a shared constraint or common decision mode. An architecture based only on physical distance can therefore communicate extensively about irrelevant variation while omitting a remote mode with high decision value.

Scope and limitations. The paper establishes an exogenous-state, static-team baseline. Environmental state may be correlated across space and time, but current actions neither alter its future law nor change what another agent later observes. Within this boundary, the fixed-architecture quadratic projection gives an exact benchmark for each fixed information pattern, and the paper’s new results compare a structured scope-age family using that benchmark. The principal radius family uses synchronized snapshots; history-based and mixed-age variants lie outside this principal family. The fixed-epoch projection does not require stationarity, although stationarity makes expected performance time-invariant and ergodicity is needed for sample-path long-run averages.

The projection identity assumes quadratic costs, a deterministic positive-definite Hessian, and unconstrained Euclidean actions. The explicit stale-global and composition laws additionally require affine full-information decisions and a stationary common-rate innovation structure with

conditionally mean-zero innovations. Gaussianity is used to evaluate spatial prediction errors from covariances in the canonical model and Experiments 5–6; the canonical radius formula further uses a separable homogeneous field and linear propagation delay. Nonquadratic or discrete decisions, state-dependent Hessians, and feasibility constraints such as nonnegativity, capacity, or simplex restrictions require different analytical tools. Outside the stated assumptions, one should work directly with decision-relevant prediction-error functions or suitable bounds rather than assume the same factorization.

The experiments do not probe temporal-rate heterogeneity, nonseparable covariance, non-Gaussian evolution, nonlinear decisions, or mixed-age architectures; each remains an extension.

Finally, the common-rate assumption suppresses possible alignment between temporal coherence, spatial scale, and decision relevance. If long-range decision-relevant modes evolve more slowly than local modes, a scalar common-rate approximation may understate the value of broad delayed information; the reverse alignment may overstate it. There is no universal direction of bias without specifying the mode weights and the procedure used to select an effective coherence time. With heterogeneous temporal modes, the scalar composition law generally gives way to a joint spatio-temporal decision-prediction error.

Most important extensions. A first extension is to price information acquisition explicitly. The present model represents communication and sensing constraints mainly through the feasible scope–delay relationship. Adding an acquisition cost or budget could produce sparse, nonuniform topologies and compressed summaries that preserve decision-relevant modes with less latency.

A second extension is adaptation to unknown or nonstationary statistics. Temporal coherence, spatial predictability, and decision sensitivity may need to be estimated online while the architecture changes on a slower timescale than operational decisions. The challenge is to account for estimation uncertainty while retaining a stable architecture-selection rule.

The most important extension is action-dependent state evolution and dynamic teams, where actions alter future state and may signal information to other agents. Extending information-architecture design beyond the exogenous-state baseline is therefore not a routine modification. Witsenhausen’s counterexample [13] explains why: once control and signaling interact, the fixed-subspace projection characterization generally no longer solves the team problem.

Design implication. Taken together, the theory yields a practical design heuristic: expand information scope as long as the marginal decision value of broader information exceeds the predictive value lost in obtaining it.

AI Use Statement. The development of this paper made substantial use of AI tools, including Claude Code, ChatGPT/Codex, Gemini, and Grok, for drafting and revising text, developing code and figures, mathematical formulation and proofs. The human authors formulated the original problem, made substantial contributions throughout the paper’s development, reviewed the manuscript, and accept full responsibility for its contents.

Code and Data Availability. The manuscript source, numerical code, experiment configurations, processed reference results, and figure-generation pipeline are available in the public TINA repository at <https://github.com/ANRGUSC/TINA> [49].

References

- [1] M. Mitzenmacher, “How useful is old information?” *IEEE Transactions on Parallel and Distributed Systems*, vol. 11, no. 1, pp. 6–20, Jan. 2000.
- [2] S. Kaul, R. Yates, and M. Gruteser, “Real-time status: How often should one update?” in *2012 Proceedings IEEE INFOCOM*. IEEE, 2012, pp. 2731–2735.
- [3] A. Nedic and A. Ozdaglar, “Distributed subgradient methods for multi-agent optimization,” *IEEE Transactions on Automatic Control*, vol. 54, no. 1, pp. 48–61, 2009.
- [4] R. Alonso, W. Dessein, and N. Matouschek, “When does coordination require centralization?” *American Economic Review*, vol. 98, no. 1, pp. 145–179, 2008.
- [5] B. Bamieh, F. Paganini, and M. A. Dahleh, “Distributed control of spatially invariant systems,” *IEEE Transactions on Automatic Control*, vol. 47, no. 7, pp. 1091–1107, Jul. 2002.
- [6] P. G. Voulgaris, G. Bianchini, and B. Bamieh, “Optimal H2 controllers for spatially invariant systems with delayed communication requirements,” *Systems & Control Letters*, vol. 50, no. 5, pp. 347–361, Dec. 2003.
- [7] B. Bamieh and P. G. Voulgaris, “A convex characterization of distributed control problems in spatially invariant systems with communication constraints,” *Systems & Control Letters*, vol. 54, no. 6, pp. 575–583, Jun. 2005.
- [8] M. Fardad and M. R. Jovanović, “Design of optimal controllers for spatially invariant systems with finite communication speed,” *Automatica*, vol. 47, no. 5, pp. 880–889, May 2011.
- [9] L. Ballotta, M. R. Jovanović, and L. Schenato, “Can decentralized control outperform centralized? the role of communication latency,” *IEEE Transactions on Control of Network Systems*, vol. 10, no. 3, pp. 1629–1640, Sep. 2023.
- [10] R. Radner, “Team decision problems,” *The Annals of Mathematical Statistics*, vol. 33, no. 3, pp. 857–881, 1962.
- [11] J. Marschak and R. Radner, *Economic Theory of Teams*, ser. Cowles Foundation Monographs. New Haven, CT: Yale University Press, 1972, no. 22.
- [12] T. Summers, C. Li, and M. Kamgarpour, “Information structure design in team decision problems,” *IFAC-PapersOnLine*, vol. 50, no. 1, pp. 2530–2535, 2017.
- [13] H. S. Witsenhausen, “A counterexample in stochastic optimum control,” *SIAM Journal on Control*, vol. 6, no. 1, pp. 131–147, 1968.
- [14] L. Ballotta and V. Gupta, “Faster consensus via a sparser controller,” *IEEE Control Systems Letters*, vol. 7, pp. 1459–1464, 2023.
- [15] S. Vanka, V. Gupta, and M. Haenggi, “Power-delay analysis of consensus algorithms on wireless networks with interference,” *International Journal of Systems, Control and Communications*, vol. 2, no. 1/2/3, pp. 256–274, 2010.
- [16] L. Ballotta, J. Arbeláiz, V. Gupta, L. Schenato, and M. R. Jovanović, “The role of communication delays in the optimal control of spatially invariant systems,” *IEEE Transactions on Automatic Control*, vol. 71, no. 2, pp. 978–993, Feb. 2026.

- [17] J. C. Krainak, J. Speyer, and S. I. Marcus, "Static team problems—part II: Affine control laws, projections, algorithms, and the LEGT problem," *IEEE Transactions on Automatic Control*, vol. 27, no. 4, pp. 848–859, 1982.
- [18] T. Z. Ornee and Y. Sun, "Sampling and remote estimation for the Ornstein–Uhlenbeck process through queues: Age of information and beyond," *IEEE/ACM Transactions on Networking*, vol. 29, no. 5, pp. 1962–1975, 2021.
- [19] C. E. Rasmussen and C. K. Williams, *Gaussian Processes for Machine Learning*. MIT press Cambridge, MA, 2006.
- [20] T. Gneiting, "Nonseparable, stationary covariance functions for space–time data," *Journal of the American Statistical Association*, vol. 97, no. 458, pp. 590–600, 2002.
- [21] D. I. Shuman, S. K. Narang, P. Frossard, A. Ortega, and P. Vandergheynst, "The emerging field of signal processing on graphs: Extending high-dimensional data analysis to networks and other irregular domains," *IEEE Signal Processing Magazine*, vol. 30, no. 3, pp. 83–98, 2013.
- [22] F. Lindgren, H. Rue, and J. Lindström, "An explicit link between Gaussian fields and Gaussian Markov random fields: the stochastic partial differential equation approach," *Journal of the Royal Statistical Society: Series B (Statistical Methodology)*, vol. 73, no. 4, pp. 423–498, 2011.
- [23] J. C. Krainak, J. Speyer, and S. I. Marcus, "Static team problems—part i: Sufficient conditions and the exponential cost criterion," *IEEE Transactions on Automatic Control*, vol. 27, no. 4, pp. 839–848, 1982.
- [24] M. Afshari and A. Mahajan, "Static teams with common information," *IFAC-PapersOnLine*, vol. 50, no. 1, pp. 11 926–11 931, 2017.
- [25] —, "Team optimal decentralized state estimation," in *2018 IEEE Conference on Decision and Control (CDC)*. IEEE, 2018, pp. 5044–5050.
- [26] P. Rusmevichientong and B. Van Roy, "Decentralized decision-making in a large team with local information," *Games and Economic Behavior*, vol. 43, no. 2, pp. 266–295, 2003.
- [27] D. Gamarnik, D. A. Goldberg, and T. Weber, "Correlation decay in random decision networks," *Mathematics of Operations Research*, vol. 39, no. 2, pp. 229–261, 2014.
- [28] J. N. Tsitsiklis, D. P. Bertsekas, and M. Athans, "Distributed asynchronous deterministic and stochastic gradient optimization algorithms," *IEEE Transactions on Automatic Control*, vol. 31, no. 9, pp. 803–812, Sep. 1986.
- [29] J. P. Hespanha, P. Naghshtabrizi, and Y. Xu, "A survey of recent results in networked control systems," *Proceedings of the IEEE*, vol. 95, no. 1, pp. 138–162, Jan. 2007.
- [30] J. Arbelaz, B. Bamieh, A. E. Hosoi, and A. Jadbabaie, "Optimal estimation in spatially distributed systems: How far to share measurements from?" *IEEE Transactions on Automatic Control*, vol. 70, no. 5, pp. 3226–3239, 2025. [Online]. Available: <https://doi.org/10.1109/TAC.2024.3504257>
- [31] C. Langbort and V. Gupta, "Minimal interconnection topology in distributed control design," *SIAM Journal on Control and Optimization*, vol. 48, no. 1, pp. 397–413, 2009.

- [32] N. Matni, “Communication delay co-design in $\mathcal{H}_2$ -distributed control using atomic norm minimization,” *IEEE Transactions on Control of Network Systems*, vol. 4, no. 2, pp. 267–278, Jun. 2017.
- [33] R. D. Yates, Y. Sun, D. R. Brown, S. K. Kaul, E. Modiano, and S. Ulukus, “Age of information: An introduction and survey,” *IEEE Journal on Selected Areas in Communications*, vol. 39, no. 5, pp. 1183–1210, 2021.
- [34] Y. Sun, E. Uysal-Biyikoglu, R. D. Yates, C. E. Koksal, and N. B. Shroff, “Update or wait: How to keep your data fresh,” *IEEE Transactions on Information Theory*, vol. 63, no. 11, pp. 7492–7508, 2017.
- [35] M. K. C. Shisher, Y. Sun, and I.-H. Hou, “Timely communications for remote inference,” *IEEE/ACM Transactions on Networking*, vol. 32, no. 5, pp. 3824–3839, 2024.
- [36] M. K. C. Shisher, V. Tripathi, M. Chiang, and C. G. Brinton, “AoI-based scheduling of correlated sources for timely inference,” *IEEE Transactions on Networking*, vol. 34, pp. 2181–2195, 2026.
- [37] A. Li, S. Wu, G. C. F. Lee, and S. Sun, “From freshness to effectiveness: Goal-oriented sampling for remote decision making,” *IEEE Transactions on Information Theory*, vol. 72, no. 4, pp. 2237–2276, Apr. 2026. [Online]. Available: <https://doi.org/10.1109/TIT.2026.3663678>
- [38] M. Aoki, “Horizontal vs. vertical information structure of the firm,” *The American Economic Review*, vol. 76, no. 5, pp. 971–983, 1986.
- [39] R. Radner, “The organization of decentralized information processing,” *Econometrica: Journal of the Econometric Society*, vol. 61, no. 5, pp. 1109–1146, 1993.
- [40] P. Bolton and M. Dewatripont, “The firm as a communication network,” *The Quarterly Journal of Economics*, vol. 109, no. 4, pp. 809–839, 1994.
- [41] T. Van Zandt, “Real-time decentralized information processing as a model of organizations with boundedly rational agents,” *The Review of Economic Studies*, vol. 66, no. 3, pp. 633–658, 1999.
- [42] W. Dessein and T. Santos, “Adaptive organizations,” *Journal of Political Economy*, vol. 114, no. 5, pp. 956–995, 2006.
- [43] P. Aghion and J. Tirole, “Formal and real authority in organizations,” *Journal of Political Economy*, vol. 105, no. 1, pp. 1–29, 1997.
- [44] W. Dessein, “Authority and communication in organizations,” *The Review of Economic Studies*, vol. 69, no. 4, pp. 811–838, 2002.
- [45] N. Cressie, “The origins of kriging,” *Mathematical Geology*, vol. 22, no. 3, pp. 239–252, 1990.
- [46] J. Besag, “Spatial interaction and the statistical analysis of lattice systems,” *Journal of the Royal Statistical Society: Series B (Methodological)*, vol. 36, no. 2, pp. 192–225, 1974.
- [47] S. Chen, R. Varma, A. Sandryhaila, and J. Kovačević, “Discrete signal processing on graphs: Sampling theory,” *IEEE Transactions on Signal Processing*, vol. 63, no. 24, pp. 6510–6523, 2015.

- [48] N. Perraudin and P. Vandergheynst, “Stationary signal processing on graphs,” *IEEE Transactions on Signal Processing*, vol. 65, no. 13, pp. 3462–3477, Jul. 2017.
- [49] S. Moeller and B. Krishnamachari, “TINA: Reproduction package for “a theory of information architecture for networked decisions”,” GitHub repository, 2026, source code, data, figures, and manuscript materials. [Online]. Available: <https://github.com/ANRGUSC/TINA>

A Mathematical Toolkit

This appendix collects the background facts used in the main-text proofs. All random vectors in the projection statements are square-integrable, and all weighting matrices Q are deterministic and positive definite.

A.1 Information as σ -algebras

σ -algebra generated by a variable. For a random vector Y , $\sigma(Y)$ is the collection of all events whose occurrence can be decided by looking at Y . It formalizes "what is known if one observes Y ."

Measurability means "a function of". By the Doob–Dynkin lemma, a random variable u is $\sigma(Y)$ -measurable if and only if $u = g(Y)$ for some (measurable) function g . So " u_i is $\mathcal{G}_i$ -measurable" means " u_i is computed from agent i 's observations."

Combining information. $\sigma(Y) \vee \sigma(Z) = \sigma(Y, Z)$ is the information from observing both.

Nesting. $\mathcal{G} \subseteq \mathcal{G}'$ means that whoever knows $\mathcal{G}'$ knows at least everything in $\mathcal{G}$. Every $\mathcal{G}$ -measurable rule is then also $\mathcal{G}'$ -measurable.

A.2 Geometry of square-integrable random vectors

The space L^2 . Random vectors u with $\mathbb{E}\|u\|^2 < \infty$, with inner product $\langle u, v \rangle_Q = \mathbb{E}[u^\top Q v]$ for a fixed positive-definite Q . This is a Hilbert space: an inner-product space in which limits of Cauchy sequences stay in the space.

Projection theorem. For a closed linear subspace S and any x , there is a unique $\Pi x \in S$ closest to x . It is characterized by orthogonality: $\langle x - \Pi x, s \rangle_Q = 0$ for all $s \in S$.

Pythagoras. $\|x\|^2 = \|\Pi x\|^2 + \|x - \Pi x\|^2$. More generally, for any $s \in S$, $\|x - s\|^2 = \|x - \Pi x\|^2 + \|\Pi x - s\|^2$.

Conditional expectation is a projection. $\mathbb{E}[x \mid \mathcal{G}]$ is the orthogonal projection of x onto $\{\mathcal{G}$ -measurable L^2 variables $\}$. It is therefore the best mean-square predictor of x among *all* functions of the information, not only linear ones.

Tower property. For square-integrable $g(Y)$ and Z , $\mathbb{E}[g(Y)^\top Z] = \mathbb{E}[g(Y)^\top \mathbb{E}[Z \mid Y]]$. *Consequence:* if $\mathbb{E}[\varepsilon \mid Y] = 0$, then ε is orthogonal to every function of Y . This is the step used in Lemma 2.

Common information makes the optimizer independent of Q . If every component of the policy may depend on the same σ -algebra $\mathcal{G}$, the Q -projection of x is simply $\mathbb{E}[x \mid \mathcal{G}]$, for any positive-definite Q . The error $e = x - \mathbb{E}[x \mid \mathcal{G}]$ satisfies $\mathbb{E}[s^\top Q e] = \mathbb{E}[s^\top Q \mathbb{E}[e \mid \mathcal{G}]] = 0$ for every $\mathcal{G}$ -measurable s . With *different* information per agent, this fails and the coupled equations (30) are needed.

Mean-square convergence. $Y_n \rightarrow Y$ in L^2 means $\mathbb{E}\|Y_n - Y\|^2 \rightarrow 0$.

A.3 Gaussian facts

Conditioning. If (X, Y) is jointly Gaussian and Σ_{YY} is invertible,

$$\mathbb{E}[X \mid Y] = \mu_X + \Sigma_{XY} \Sigma_{YY}^{-1} (Y - \mu_Y), \quad \text{Cov}(X \mid Y) = \Sigma_{XX} - \Sigma_{XY} \Sigma_{YY}^{-1} \Sigma_{YX}.$$

The conditional mean is affine in Y (linear after centering). For singular Σ_{YY} , the same formulas use its Moore–Penrose inverse on the covariance support. The conditional covariance (a *Schur complement*) does **not** depend on the observed value of Y .

Scalar case. For nonzero marginal variances, $\text{Var}(X \mid Y) = \text{Var}(X)(1 - \text{Corr}(X, Y)^2)$.

Uncorrelated implies independent for jointly Gaussian variables. For the OU process, Brownian increments after the snapshot time are independent of the past, which gives innovation independence in Appendix A.4.

Linear functionals stay Gaussian. Integrals such as $\int w(u)\theta(u) du$ defined as mean-square limits of linear combinations of a Gaussian field are Gaussian, so the facts above apply to x^* in Section 5.2.

A.4 The Ornstein–Uhlenbeck process in time

Scalar SDE. $d\theta_t = -\frac{1}{T}(\theta_t - \bar{\theta}) dt + \sigma\sqrt{2/T} dW_t$, where W is Brownian motion (continuous paths, independent Gaussian increments with variance equal to elapsed time). A useful mental model is the small-step recursion

$$\theta_{t+\Delta} \approx \theta_t - \frac{\Delta}{T}(\theta_t - \bar{\theta}) + \sigma\sqrt{2\Delta/T} Z, \quad Z \sim N(0, 1) \text{ fresh at each step.}$$

Solution over a lag τ .

$$\theta_t - \bar{\theta} = e^{-\tau/T}(\theta_{t-\tau} - \bar{\theta}) + \underbrace{\sigma\sqrt{2/T} \int_{t-\tau}^t e^{-(t-s)/T} dW_s}_{\varepsilon_{t,\tau}}.$$

The innovation is Gaussian with mean zero, independent of the past, and has variance $\sigma^2 \frac{2}{T} \int_0^\tau e^{-2s/T} ds = \sigma^2(1 - e^{-2\tau/T})$. This shows why the factor $\sqrt{2/T}$ makes the stationary variance equal σ^2 .

Correlation. In stationarity, $\text{Corr}(\theta_t, \theta_s) = e^{-|t-s|/T}$. The coherence time T is the lag at which correlation falls to $1/e \approx 0.37$.

Multivariate, common rate (40). Replace σ by $\Sigma_\infty^{1/2}$, the symmetric positive-semidefinite matrix whose square is Σ_∞ . Every formula above holds with σ^2 replaced by Σ_∞ , because the drift $-\frac{1}{T}I$ treats all directions alike.

Markov property. The future after time s depends on the past only through θ_s .

Discrete-time analogue. AR(1): $\theta_k - \bar{\theta} = a(\theta_{k-1} - \bar{\theta}) + \varepsilon_k$. In its stationary solution with $|a| < 1$ and i.i.d. square-integrable innovations independent of the past, each nondegenerate scalar component has correlation $a^{|h|}$ at lag h .

A.5 Exponential covariance in space; fields on graphs

1-D spatial OU. A Gaussian field on the line with covariance $\sigma^2 e^{-|z-z'|/\ell_s}$ is an OU process in the spatial coordinate. It is Markov in z : given $\theta(z_0)$, the field on either side of z_0 is conditionally independent of the other side. Given a whole segment, the outside depends only on the nearer endpoint.

Gaussian Markov random fields (GMRFs). On an undirected graph, a Gaussian vector with nonsingular covariance is Markov with respect to the graph when each node, given its neighbors, is independent of all other nodes. Equivalently, the precision matrix Σ^{-1} has zeros for non-adjacent pairs.

Graph Laplacian. $L_G = D_G - A_G$, where D_G is the diagonal degree matrix and A_G the adjacency matrix of a simple undirected unweighted graph. For a signal x , $x^\top L_G x = \sum_{(i,j) \in E} (x_i - x_j)^2$ measures roughness. Eigenvectors of L_G with small eigenvalues ("low graph frequencies") vary slowly across edges.

Covariance (116). $\Sigma_S = \sigma^2(\kappa_s^2 I + L_G)^{-\nu}$ puts large variance on low-frequency (smooth) patterns. After normalizing total variance, smaller κ_s or larger ν shifts relative energy toward smoother modes. This spectral model need not have a sparse precision matrix for arbitrary ν , so it need not be Markov on the original graph.

A.6 Matrix facts

Quadratic-form expectation. For a random vector Y with mean μ , $\mathbb{E}[Y^\top AY] = \text{tr}(A \text{Cov } Y) + \mu^\top A \mu$.

Cyclic trace. $\text{tr}(ABC) = \text{tr}(BCA) = \text{tr}(CAB)$ whenever the products are defined.

Sherman–Morrison. For invertible A and vectors a, c with $1 + c^\top A^{-1}a \neq 0$,

$$(A + ac^\top)^{-1} = A^{-1} - \frac{A^{-1}ac^\top A^{-1}}{1 + c^\top A^{-1}a}.$$

With $A = qI$ and $a = \gamma \mathbf{1}$, $c = \mathbf{1}$ this gives $(qI + \gamma \mathbf{1}\mathbf{1}^\top)^{-1} = \frac{1}{q}(I - \frac{\gamma}{q + \gamma n} \mathbf{1}\mathbf{1}^\top)$. Also $\text{tr}(qI + \gamma \mathbf{1}\mathbf{1}^\top) = n(q + \gamma)$.

Positive-definite weighting. $Q \succ 0$ means $x^\top Qx > 0$ for all $x \neq 0$. Then $\lambda_{\min}(Q)\|x\|^2 \leq x^\top Qx \leq \lambda_{\max}(Q)\|x\|^2$, so the Q -norm and the ordinary norm are equivalent.

Null space and modes. The null space of K is $\{\xi : K\xi = 0\}$. A "mode" of the state is a direction ξ , often an eigenvector of Σ_S . Its decision-error weight per unit state variance is $(K\xi)^\top Q(K\xi)$.

A.7 Calculus, asymptotics, and optimization

Log-derivative. $\frac{d}{dr} \log f(r) = f'(r)/f(r)$ is the *relative* growth rate of f , the fractional change per unit r . The spatial rate m_S is the log-derivative of the explained spatial share; m_T is the negative log-derivative of the temporal factor $e^{-2\tau(r)/T}$.

First-order conditions. At an interior minimum of a differentiable function the derivative vanishes. The converse fails: a zero derivative identifies candidates only.

Single crossing. If $\Delta(r)$ is continuous and strictly decreasing, it has at most one zero. The function whose derivative has the sign of $-\Delta$ is then unimodal, with its minimum at that zero, or at an endpoint if there is no zero.

Continuous relaxation. Solving an integer problem (radius in hops) by first allowing real values. When the continuous objective is unimodal, the integer optimum is the better of the two integers bracketing the continuous optimum.

Taylor approximations used. $1 - e^{-x} \approx x$ and $\log(1 + x) \approx x$ for small x .

Asymptotic notation. $f = O(g)$ means $|f| \leq C|g|$ near the limit; $f = o(g)$ means $f/g \rightarrow 0$.

Positive part and extended reals. $[z]_+ = \max\{z, 0\}$. Writing $\rho^* = +\infty$ means that no finite value satisfies the condition.

B Glossary

The entries below use the meanings and assumptions of this paper.

Term	Meaning in this paper	First use/background
Information architecture	Specification of which variables, at which ages, each agent’s decision may depend on; formally a tuple of σ -algebras $(\mathcal{G}_1, \dots, \mathcal{G}_n)$	Section 2.2
σ -algebra $\sigma(Y)$	”What is known from observing Y ”	Section 2.2, Appendix A.1
Measurable (measurable)	$(\mathcal{G}_i$ - Computable from agent i ’s information	(18), Appendix A.1
Admissible policy	A joint rule in which each agent uses only its own information	(18)
Static team	Several decision makers with one shared objective, each acting on its own information, whose actions do not affect anyone’s later information	Section 1, Section 7.1
Person-by-person (stationarity) conditions	Each agent’s rule is optimal given the others’ rules; here, equations (29)–(30)	Corollary 1
Full-information (clairvoyant) decision	$x_t^* = Q^{-1}b(\theta_t)$, optimal with complete current state	(9)
Architecture regret	Extra expected cost versus the full-information decision, after optimizing over admissible policies	(21)
Q -weighted norm	$\ u\ _Q^2 = \mathbb{E}[u^\top Q u]$; the metric in which regret is a squared distance	(25)
Projection	Closest point in a subspace; here, the best admissible policy	Lemma 1, Appendix A.2
Open-loop	Using no state information; the best constant action	(36)
Open-loop regret R_∞	Regret of the best constant; the normalizer for all shares	(36)
Omission share η_S	Fraction of decision variance not captured by current information in a given scope	(38), (72)
Temporal unpredictability η_T	Fraction of decision variance not predictable from a complete snapshot of age τ	(37)
Staleness ratio ρ	τ/T , delay measured in coherence times	(43)
Stationary	Joint distributions are invariant under time (or spatial) translations	(5)
Ergodic	Time averages along one realization converge to expectations	Section 2.3
Square-integrable	Finite second moment, $\mathbb{E}\ Y\ ^2 < \infty$	(5)
Gauss–Markov	Gaussian and Markov; here, the OU process	Section 3.2
Ornstein–Uhlenbeck (OU) process	Stationary Gaussian Markov process that reverts to its mean with exponential correlation	(40), Appendix A.4
Coherence time T	Time lag at which correlation falls to $1/e$	(40)
Common-rate model	All components and modes decorrelate with the same time constant T	Section 1, (40)
Innovation	Part of the current state not predictable from an earlier snapshot	(44)
Mixing	Decay of statistical dependence with separation; the temporal limit here uses strong mixing	Section 3.1

Term	Meaning in this paper	First use/background
Data-processing inequality	Processing or aging information along a Markov chain cannot improve prediction	Section 3.1
Nested (architectures)	One architecture’s information contains the other’s, at every agent	(22), (73)
Synchronized snapshot	All observations used in a decision share one time stamp	Section 2.2
Mode	A direction or spatial pattern in state space, often an eigenvector of Σ_S	Section 4.4
Null space of K	State directions that do not change the desired decision	Section 4.4, Appendix A.6
Decision-sensitivity operator K	$Q^{-1}B$; maps state to desired action	(10)
Separable covariance	Space–time covariance that factors into a time part times a space part	(68)
Spatial correlation length ℓ_s	Distance over which the state stays correlated	(67)
Decision-relevance length ℓ_c	Distance over which remote state affects the desired local action	(100)
Temporal propagation length L_T	vT : how far information travels in one coherence time	(108)
Spatial Markov property	Given the field at a point, the two sides are conditionally independent	Section 4.1, Appendix A.5
Gaussian Markov random field	Gaussian vector with graph-based conditional independence	Appendix A.5
Graph Laplacian L_G	$D_G - A_G$; measures roughness of signals on a graph	(116), Appendix A.5
Graph frequency	Eigenvalue of L_G ; low values correspond to smooth patterns	Section 7.5, Appendix A.5
Continuous relaxation	Treating the integer radius as a real number	Section 5
Unimodal	Decreasing, then increasing; a single minimum	Section 5
Marginal balance	Equality of spatial-gain and freshness-loss rates, necessary at a differentiable interior optimum	(98)
Comparative statics	How the optimum moves when a parameter changes	Theorem 4
Extended reals	Real numbers together with $\pm\infty$	Theorem 2
Age of Information (AoI)	Time since the freshest received update was generated	Section 7.3
Witsenhausen’s counterexample	Classic example where control actions also signal information, and linear policies can be suboptimal	Section 1, Section 8