

A Theory of Information Architecture for Networked Decisions: Freshness, Locality, and Coordination

Scott Moeller

Independent Researcher, Portsmouth, RI, USA

`scott.h.moeller@gmail.com`

Bhaskar Krishnamachari

University of Southern California

`bkrishna@usc.edu`

September 2026

Abstract

Networked systems face a tradeoff between the scope of the information behind a decision and its freshness: a broader view of the system supports better coordination, but assembling and communicating it takes time, so it arrives older. We study this tradeoff for a team of agents that repeatedly choose actions to minimize a shared quadratic cost driven by an environment that evolves on its own, unaffected by the agents' actions. An information architecture specifies what each agent observes, from where, and with what delay; we measure an architecture by the cost it loses relative to a decision made with complete, current information. We first compare fresh local observations with a complete but delayed global view. For affine full-information decisions in a common-rate Gauss–Markov environment, this comparison reduces to a closed-form threshold on the ratio of delay to coherence time. We then study intermediate architectures in which each agent acts on a time-aligned, and therefore older, snapshot of a wider neighborhood. An interior optimal neighborhood radius satisfies a balance between the marginal value of added scope and the marginal cost of lost freshness. In a canonical spatial model, this radius is set by the spatial-correlation, decision-relevance, and temporal-propagation lengths. Throughout, architecture performance is governed by the predictability of the optimal decision rather than of the raw state.

1 Introduction

Many networked systems must repeatedly make coupled decisions using information that is distributed across space and changes over time. A wireless transmitter may know its current local channel state but not the current interference conditions elsewhere in the network; an edge server may observe its own workload immediately while a system-wide view is available only after telemetry has been collected and disseminated; and a distributed sensing system may have fresh measurements from nearby sensors while observations from distant sensors arrive with greater latency. In each case, broad information can improve coordination, but obtaining it takes time. The resulting design choice is not simply between centralized and distributed control, but between *information architectures* that differ simultaneously in spatial scope and temporal freshness.

This tension appears in several literatures under different performance models. Work on stale information in distributed systems shows that old global state can lose much of its value [1], and Age of Information formalizes freshness as a system resource [2]. Distributed optimization studies computation under communication constraints [3], organizational economics studies adaptation to local information versus coordination [4], and networked-control work examines how communication scope, topology, and propagation delay interact with closed-loop performance.

Distributed-control work establishes controller localization and models finite-speed or distance-dependent communication [5–8]. Most directly, Ballotta, Jovanović, and Schenato show that scope-dependent delay can make sparse feedback outperform all-to-all control [9]; Section 7.2 develops the comparison with this literature.

The environment considered here evolves exogenously, and each epoch is a static team decision. We value an information architecture by its prediction error for the current full-information decision, and vary spatial scope and information age jointly. Under a common-rate temporal model, this yields a local–global crossover and an exact composition of spatial omission and temporal staleness.

This paper develops a theory for this tradeoff. We consider a collection of agents operating in an exogenously evolving stochastic environment $\theta_t = (\theta_{1,t}, \dots, \theta_{n,t})$. At each decision epoch the agents select a joint action $x_t = (x_{1,t}, \dots, x_{n,t})$ that incurs a common cost $f(x_t, \theta_t)$. An *information architecture* specifies the information available to each agent when this decision is made. Thus a fresh-local architecture may allow agent i to condition on the current $\theta_{i,t}$, a neighborhood architecture may provide the states of agents within a given spatial radius, and a global architecture may provide the entire state vector only after a delay τ . Each of these architectures uses a synchronized snapshot of current or delayed state. More generally, an architecture specifies *who knows what, from where, and at what age*.

Our analysis uses the classical fixed-information framework of static team decision theory initiated by Radner [10]. With a constant, state-independent quadratic Hessian, the team-optimal policy is the weighted projection of the full-information action onto the admissible policy space (Section 2.4). We use this benchmark to compare architectures whose scope and age vary jointly. Information and organizational networks have also been treated as design objects in classical team theory [11, 12].

Our first result answers the two extreme points of this tradeoff. We compare a *fresh-local* architecture, in which each agent observes its current local state, against a *stale-global* architecture, in which every agent has access to the complete system state with delay τ . In general, the loss from staleness is governed by the prediction error of the current decision-relevant state from information τ units old. For a Gauss–Markov environment with temporal coherence time T , and for an affine full-information decision, stale-global regret grows as $1 - e^{-2\tau/T}$ toward the open-loop regret. Fresh-local information is preferred once this temporal loss exceeds the share of decision-relevant variation not captured locally. In a canonical shared-resource quadratic model, where τ is the global-information delay, T is the temporal coherence time, q is local stiffness, and γ is coordination strength, the large-system threshold is

$$\left(\frac{\tau}{T}\right)^* = \frac{1}{2} \log \left(1 + \frac{\gamma}{q}\right), \quad (1)$$

making explicit how stronger decision coupling increases the amount of staleness that is worth tolerating in exchange for global coordination.

The local–global comparison concerns two pure benchmark regimes. Our second result considers agents embedded in a graph or spatial domain and a synchronized-snapshot family in which each agent bases its decision on a time-aligned neighborhood snapshot of radius r . Increasing r replaces a narrower, fresher snapshot by a broader snapshot of greater age $\tau(r)$. The resulting architecture faces two competing sources of error: a *spatial omission error*, caused by excluding decision-relevant state beyond radius r , and a *temporal staleness error*, caused by the delay required to acquire the broader information.

In the canonical spatial model, the optimal radius depends on temporal coherence, spatial correlation, decision-relevance length, and propagation speed. Faster variation favors fresher, narrower views; faster propagation supports broader coordination. Section 5 derives these effects as

comparative statics of an explicit radius law.

The framework separates information architecture from its implementing algorithm. It applies to repeated networked optimization against an exogenous environment, including stylized quadratic models of rate, power, compute, or sensing decisions driven by changing demand, channel, or resource conditions. The static-team assumption means that current actions do not change future state or anyone’s later information. Action-dependent dynamics and signaling require a different analysis, as discussed in Section 8.

In summary, this paper makes two technical contributions and one conceptual contribution:

1. We derive an exact *fresh-local versus stale-global crossover law* for two pure information regimes, expressed through decision-relevant temporal predictability and the share of decision variation captured locally.
2. For a synchronized-snapshot radius family under the common-rate model, we derive an exact spatio-temporal prediction-error composition law and use it to characterize the optimal radius by a marginal balance between spatial-information gain and freshness loss. In a canonical field model, this yields an explicit scaling law in the spatial-correlation, decision-relevance, and temporal-propagation lengths.
3. We show that, within the analyzed framework, architecture performance is governed by *decision-relevant predictability*, not raw state predictability. The desired architecture depends jointly on environmental statistics, decision sensitivity and coupling, information geometry, and freshness; the communication graph and decision geometry therefore need not coincide.

Section 2 formalizes architectures and regret. Section 3 compares the fresh-local and stale-global endpoints, and Sections 4–5 develop the radius family and its optimal coordination scale. Section 6 reports numerical checks, Section 7 situates the work, and Section 8 concludes.

2 Networked Decisions and Information Architectures

We consider a network of decision-making agents operating in a stochastic environment whose state is distributed across the network and evolves over time. Our formulation separates three distinct objects: the *network geometry*, which defines relationships and distances among agents; the *decision problem*, which determines how their actions and states interact in the objective; and the *information architecture*, which determines what information is available to each agent and with what delay. These three structures need not coincide.

The environment evolves exogenously, so current actions do not alter its future law or the agents’ information. Table 1 collects the notation.

2.1 Network, Environment, and Decision Model

There are n agents on a graph $G = (V, E)$, with $V = \{1, \dots, n\}$. Graph distance $d_G(i, j)$ defines the radius- r neighborhood

$$\mathcal{N}_r(i) = \{j \in V : d_G(i, j) \leq r\}. \quad (2)$$

The graph represents proximity and the cost or latency of obtaining nonlocal information; agents may more generally lie in a metric space.

On a probability space $(\Omega, \mathcal{F}, \mathbb{P})$, let $\theta = \{\theta_t\}_{t \in \mathbb{T}}$ be a stationary environment process, with discrete or continuous time. Write

$$\theta_t = (\theta_{1,t}, \dots, \theta_{n,t}) \in \mathbb{R}^m, \quad \theta_{i,t} \in \mathbb{R}^{m_i}, \quad \sum_i m_i = m, \quad \mathbb{E}\|\theta_t\|^2 < \infty. \quad (3)$$

The local state $\theta_{i,t}$ may describe channel conditions, demand, workload, or sensing quality. Independence, Gaussianity, and Markov dynamics are only imposed in later specializations. Agent i chooses $x_{i,t} \in \mathbb{R}^{d_i}$; the joint action is $x_t = (x_{1,t}, \dots, x_{n,t}) \in \mathbb{R}^d$, with $d = \sum_i d_i$.

The agents share a common per-stage cost

$$f(x, \theta) = \frac{1}{2} x^\top Q x - b(\theta)^\top x + c(\theta), \quad (4)$$

where $Q \in \mathbb{R}^{d \times d}$ is symmetric and positive definite, $b : \mathbb{R}^m \rightarrow \mathbb{R}^d$ is measurable, and $c : \mathbb{R}^m \rightarrow \mathbb{R}$ is an additive state-dependent term. We assume $\mathbb{E}\|b(\theta_t)\|^2 < \infty$ and $\mathbb{E}|c(\theta_t)| < \infty$. The off-diagonal blocks of Q couple agents' actions, while $b(\theta)$ determines which states affect the preferred action. This decision coupling need not coincide with proximity in G .

If the complete current state θ_t is available without information constraints, the unique optimal joint action is

$$x_t^* \triangleq x^*(\theta_t) = Q^{-1} b(\theta_t). \quad (5)$$

We call x_t^* the *clairvoyant* or *full-information* decision.

For the affine specializations used to obtain closed forms, we write

$$b(\theta) = B\theta + b_0, \quad B \in \mathbb{R}^{d \times m}, \quad b_0 \in \mathbb{R}^d, \quad K \triangleq Q^{-1} B \in \mathbb{R}^{d \times m}. \quad (6)$$

The matrix B maps state into the linear term of the objective, while K is the resulting decision-sensitivity operator. The general projection results do not require this affine form.

Completing the square in (4) gives

$$f(x, \theta) - f(x^*(\theta), \theta) = \frac{1}{2} (x - x^*(\theta))^\top Q (x - x^*(\theta)). \quad (7)$$

Hence, for the quadratic model, excess decision cost is exactly a weighted squared error in reproducing the full-information action.

2.2 Information Architectures

An *information architecture* specifies what information is available to each agent when its decision is made. At a fixed decision epoch, let

$$\mathcal{G}_i \subseteq \mathcal{F}$$

denote the σ -algebra representing the information available to agent i . An information architecture is the tuple

$$\mathcal{A} = (\mathcal{G}_1, \dots, \mathcal{G}_n). \quad (8)$$

A decision rule for agent i is admissible only if it is measurable with respect to $\mathcal{G}_i$.

Fresh-local information. Agent i observes its own current state:

$$\mathcal{G}_{i,t}^{\text{loc}} = \sigma(\theta_{i,t}). \quad (9)$$

Stale-global information. Every agent has access to the complete state snapshot at time $t - \tau$:

$$\mathcal{G}_{i,t}^{\text{glob}}(\tau) = \sigma(\theta_{t-\tau}), \quad i = 1, \dots, n. \quad (10)$$

Radius- r information. More generally, agent i may obtain state information from nodes within graph distance r :

$$\mathcal{G}_{i,t}^{(r)} = \sigma(\theta_{j,t-\tau(r)} : j \in \mathcal{N}_r(i)). \quad (11)$$

The radius family studied below is a synchronized-snapshot architecture. At radius r , the decision is formed from a time-aligned neighborhood snapshot whose age is $\tau(r)$; increasing r replaces, rather than augments, the fresher narrow snapshot. This restriction models applications requiring temporal consistency or a common decision epoch. If fresh local and delayed remote information can instead be freely combined, the resulting hybrid architecture contains more information and weakly dominates either source alone; such mixed-age architectures are outside the principal family analyzed here.

We assume the latency $\tau(r)$ is nondecreasing with $\tau(0) = 0$. Thus radius zero is fresh-local; on a finite connected graph, radius equal to the diameter is stale-global. A related common-delay-by-scope abstraction appears in [9].

Local information plus a global summary. An agent may also combine its current state with a delayed global statistic $z_t = h(\theta_t)$, such as a congestion price or aggregate load:

$$\mathcal{G}_{i,t}^{\text{hyb}} = \sigma(\theta_{i,t}) \vee \sigma(z_{t-\tau_z}). \quad (12)$$

This contains fresh-local information. It also contains stale-global information if the summary preserves the complete delayed state; an arbitrary summary need not.

For a given architecture $\mathcal{A}$, define the admissible joint-policy set

$$\mathcal{S}(\mathcal{A}) \triangleq \{u = (u_1, \dots, u_n) : u_i \in L^2, u_i \text{ is } \mathcal{G}_i\text{-measurable, } i = 1, \dots, n\}. \quad (13)$$

Thus u_i is a function of agent i 's observations. An architecture specifies which rules are admissible, rather than an algorithm for computing them.

2.3 Architecture Regret

We evaluate an architecture by its best achievable expected cost, relative to the full-information decision:

$$J(\mathcal{A}) \triangleq \inf_{u \in \mathcal{S}(\mathcal{A})} \mathbb{E}[f(u, \theta_t)], \quad J^* \triangleq \mathbb{E}[f(x_t^*, \theta_t)], \quad (14)$$

$$R(\mathcal{A}) \triangleq J(\mathcal{A}) - J^*. \quad (15)$$

Regret is a per-stage expected performance gap. Stationarity makes it time-invariant for the snapshot architectures studied here; sample-path time averages additionally require ergodicity. Communication cost enters through the feasible information and its latency, without a separate charge.

If two architectures $\mathcal{A}$ and $\mathcal{A}'$ satisfy

$$\mathcal{G}_i \subseteq \mathcal{G}'_i, \quad i = 1, \dots, n, \quad (16)$$

then every policy feasible under $\mathcal{A}$ is also feasible under $\mathcal{A}'$, and therefore

$$R(\mathcal{A}') \leq R(\mathcal{A}). \quad (17)$$

Thus additional information cannot hurt when it is available with the same freshness. The interesting architectural tradeoff arises because increasing spatial scope generally also increases information age.

2.4 Fixed-Architecture Quadratic Projection

The classical fixed-information static-team formulation supplies coupled person-by-person optimality conditions [10]. In this quadratic model, completing the square turns those conditions into the projection characterization below. We use this fixed-architecture result as the inner optimization primitive for the outer scope-age comparison. Related affine-gain projection formulations appear in Krainak, Speyer, and Marcus [13].

Let

$$\mathcal{H} = L^2(\Omega, \mathcal{F}, \mathbb{P}; \mathbb{R}^d) \quad (18)$$

and equip $\mathcal{H}$ with the weighted inner product

$$\langle u, v \rangle_Q \triangleq \mathbb{E} \left[u^\top Q v \right], \quad \|u\|_Q^2 \triangleq \langle u, u \rangle_Q. \quad (19)$$

Since $Q \succ 0$, the induced norm is equivalent to the ordinary L^2 norm.

Lemma 1 (Fixed-architecture quadratic projection; Radner-type specialization). *For any static information architecture $\mathcal{A}$, the admissible policy set $\mathcal{S}(\mathcal{A})$ defined in (13) is a closed linear subspace of $\mathcal{H}$. Under the quadratic cost (4), the unique optimal policy implementable under $\mathcal{A}$ is*

$$u_{\mathcal{A}}^* = \Pi_{\mathcal{S}(\mathcal{A})} x_t^*, \quad (20)$$

where $\Pi_{\mathcal{S}(\mathcal{A})}$ denotes orthogonal projection with respect to (19). Consequently,

$$R(\mathcal{A}) = \frac{1}{2} \|x_t^* - \Pi_{\mathcal{S}(\mathcal{A})} x_t^*\|_Q^2. \quad (21)$$

This identity specializes the classical static-team formulation [10] to the quadratic model used here.

Proof. Linearity of $\mathcal{S}(\mathcal{A})$ follows because $\mathcal{G}_i$ -measurability is preserved under linear combinations. Closedness follows because an L^2 limit of $\mathcal{G}_i$ -measurable random variables admits a $\mathcal{G}_i$ -measurable version.

For any admissible policy u , (7) gives

$$\begin{aligned} \mathbb{E} [f(u, \theta_t) - f(x_t^*, \theta_t)] &= \frac{1}{2} \mathbb{E} \left[(u - x_t^*)^\top Q (u - x_t^*) \right] \\ &= \frac{1}{2} \|u - x_t^*\|_Q^2. \end{aligned} \quad (22)$$

Minimizing this expression over the closed subspace $\mathcal{S}(\mathcal{A})$ is the standard Hilbert-space projection problem, yielding (20) and (21). $\square$

Architecture regret measures the part of the full-information decision that cannot be reproduced using the admissible information. The relevant error is therefore prediction error for the full-information action, measured in the Q -metric.

The projection error is Q -orthogonal to every admissible policy. In particular, $2R(\mathcal{A}) = \|x_t^*\|_Q^2 - \|u_{\mathcal{A}}^*\|_Q^2$, which is often useful for computing regret.

Corollary 1 (Coupled conditional normal equations). *The unique team optimum in Lemma 1 satisfies*

$$\mathbb{E} \left[(Q u_{\mathcal{A}}^* - b(\theta_t))_i \mid \mathcal{G}_i \right] = 0, \quad i = 1, \dots, n. \quad (23)$$

With Q partitioned into action blocks, this is equivalently

$$Q_{ii}u_i^* + \sum_{j \neq i} Q_{ij} \mathbb{E}[u_j^* \mid \mathcal{G}_i] = \mathbb{E}[b_i(\theta_i) \mid \mathcal{G}_i]. \quad (24)$$

These are the coupled person-by-person stationarity equations associated with the classical static-team formulation [10]. Strict convexity makes them sufficient for the unique team optimum here. With heterogeneous information and off-diagonal Q , one generally does not have $u_i^* = \mathbb{E}[x_i^* \mid \mathcal{G}_i]$. When all components share a common information sigma-algebra, deterministic Q makes the joint solution the ordinary vector conditional expectation.

Remark 1 (Scope of the projection identity). *The fixed-architecture projection identity requires square integrability, a deterministic positive-definite matrix Q , unconstrained Euclidean actions, and a closed linear space of admissible policies. It does not require Gaussianity, an affine map $b(\theta)$, Markov dynamics, temporal stationarity, or independent observations. Those stronger assumptions enter only in later closed-form prediction and composition results.*

The architecture’s regret is one-half the squared Q -distance from the full-information decision to the closest implementable rule. We first compare fresh-local and stale-global information, then optimize the radius of a delayed neighborhood snapshot. Background on projections and conditional expectation is collected in the separate mathematical companion.

Table 1: Core notation. Quantities labeled as shares are normalized by R_∞ .

Symbol	Meaning	Symbol	Meaning
n	number of agents	$G = (V, E)$	network or geometry graph
θ_t	exogenous environment state	x_t	joint action
Q	positive-definite action-coupling matrix	B	affine state-to-objective map
$K = Q^{-1}B$	decision-sensitivity operator	x_t^*	full-information decision
$\mathcal{A}$	information architecture	$R(\mathcal{A})$	architecture regret; includes R_{loc} and $R_{\text{glob}}(\tau)$
R_∞	open-loop regret	$\eta_S(0)$	fresh-local omission share
$\eta_T(\tau)$	temporal unpredictability	$\eta_S(r)$	radius- r zero-delay spatial omission
$\eta_{ST}(r, \tau)$	normalized joint spatio-temporal regret	T	temporal coherence time
$\tau(r)$	information latency at radius r	v	effective propagation speed
ℓ_s	spatial correlation length	ℓ_c	decision-relevance length
$L_T = vT$	temporal propagation length	r^*	optimal synchronized-snapshot radius
$\mathbf{1}$	all-ones vector	$\eta_0 = \eta_S(0)$	radius-zero omission share
$\rho = \tau/T$	dimensionless staleness	$\varepsilon_{t,\tau}$	temporal innovation
$X_t = x_t^* - \bar{x}^*$	centered decision	$[z]_+ = \max\{z, 0\}$	positive part
$m_T(r)$	marginal freshness-loss rate	$m_S(r)$	marginal spatial-gain rate

3 Fresh-Local versus Stale-Global Information

We compare current local state with a complete but delayed global snapshot. The comparison is first expressed through prediction error, then evaluated under a common-rate Gauss–Markov model.

Table 2: Assumptions used in the derivations. All rows use square-integrable targets and a deterministic positive-definite quadratic cost; normalized shares require $R_\infty > 0$. Entries describe the sufficient assumptions used by the proofs, including their stated non-Gaussian extensions. “Fixed epoch” means stationarity is unnecessary for that result.

Result	Stationarity	Common-rate innovation	Affine target	Gaussian	Other
Lemma 1	Fixed epoch	No	No	No	Closed linear policy space
Lemma 2; Theorems 1–2	Time	Yes	Yes	No	Scalar decay; conditionally mean-zero innovation
Proposition 1	Fixed epoch	No	Yes	No	Independent, mean-zero, equal-variance states
Theorem 3	Time	Yes	Yes	No	Synchronized snapshots
Proposition 2	Time	Yes	Yes	No	Differentiable $\tau, \eta_S; \eta_S < 1$
Lemma 3	Space	No	Yes	Yes	$Q = qI$; exponential spatial covariance and kernel
Theorem 4	Space/time	Yes	Yes	Yes	Canonical model and linear delay

3.1 Two Benchmark Architectures

Let $\mathcal{A}_{\text{loc}}$ and $\mathcal{A}_{\text{glob}}(\tau)$ denote the architectures in (9) and (10), and write

$$R_{\text{loc}} \triangleq R(\mathcal{A}_{\text{loc}}), \quad R_{\text{glob}}(\tau) \triangleq R(\mathcal{A}_{\text{glob}}(\tau)). \quad (25)$$

For reference, define also the *open-loop* architecture, whose decision is the best constant, state-independent action. Its optimal action is $\mathbb{E}[x_t^*]$, and its regret is

$$R_\infty \triangleq \frac{1}{2} \|x_t^* - \mathbb{E}[x_t^*]\|_Q^2. \quad (26)$$

We assume $R_\infty > 0$ in normalized comparisons. Since all agents share the same delayed snapshot under $\mathcal{A}_{\text{glob}}(\tau)$, its optimal policy is $\mathbb{E}[x_t^* \mid \theta_{t-\tau}]$, even for non-diagonal Q .

Define the two loss shares as regret ratios:

$$\eta_T(\tau) \triangleq \frac{R_{\text{glob}}(\tau)}{R_\infty}, \quad 0 \leq \eta_T(\tau) \leq 1, \quad (27)$$

and

$$\eta_S(0) \triangleq \frac{R_{\text{loc}}}{R_\infty}, \quad 0 \leq \eta_S(0) \leq 1. \quad (28)$$

Both shares lie in $[0, 1]$ because every architecture admits the best constant action. We write $\eta_0 = \eta_S(0)$; Section 4 extends the spatial omission share to radius r . At zero delay $\eta_T(0) = 0$. If the old-snapshot conditional mean converges in mean square to $\mathbb{E}[x_t^*]$, then $\eta_T(\tau) \rightarrow 1$. For a Markov environment, data processing makes η_T nondecreasing; arbitrary snapshot information sets need not be nested.

Dividing by $R_\infty > 0$ gives the crossover observation

$$R_{\text{loc}} < R_{\text{glob}}(\tau) \iff \eta_T(\tau) > \eta_S(0). \quad (29)$$

Fresh-local information is preferable precisely when the temporal information lost by waiting for a global view exceeds the decision-relevant information unavailable locally.

3.2 Gauss–Markov Temporal Model

We now specialize the temporal unpredictability function to obtain a closed form. Suppose the environment follows the stationary multivariate Ornstein–Uhlenbeck process

$$d\theta_t = -\frac{1}{T} (\theta_t - \bar{\theta}) dt + \sqrt{\frac{2}{T}} \Sigma_\infty^{1/2} dW_t, \quad (30)$$

where $T > 0$ is the temporal coherence time, $\bar{\theta}$ is the stationary mean, and Σ_∞ is the stationary covariance matrix. The process may exhibit arbitrary instantaneous cross-correlation among agents through Σ_∞ ; the simplifying assumption is that all temporal modes share the same decay time T .

Here W_t is standard multivariate Brownian motion.

Assume further that

$$b(\theta) = B\theta + b_0, \quad (31)$$

so that the full-information decision is affine:

$$x^*(\theta) = Q^{-1}B\theta + Q^{-1}b_0. \quad (32)$$

Let

$$\rho \triangleq \frac{\tau}{T} \quad (33)$$

denote the dimensionless staleness ratio.

The OU transition law [14, eqs. (8)–(10), (14)] gives the decomposition

$$\theta_t - \bar{\theta} = e^{-\rho}(\theta_{t-\tau} - \bar{\theta}) + \varepsilon_{t,\tau}, \quad \mathbb{E}[\varepsilon_{t,\tau} \mid \theta_{t-\tau}] = 0, \quad \text{Cov}(\varepsilon_{t,\tau}) = (1 - e^{-2\rho})\Sigma_\infty. \quad (34)$$

The innovation $\varepsilon_{t,\tau}$ is independent of the old snapshot and has mean zero.

Define the centered full-information decision by

$$\bar{x}^* \triangleq \mathbb{E}[x_t^*], \quad X_t \triangleq x_t^* - \bar{x}^*. \quad (35)$$

Because $x^*(\theta) = K\theta + Q^{-1}b_0$ is affine, $\bar{x}^* = K\bar{\theta} + Q^{-1}b_0$ and $X_t = K(\theta_t - \bar{\theta})$. Applying K to (34) gives

$$X_t = e^{-\rho}X_{t-\tau} + K\varepsilon_{t,\tau}, \quad K = Q^{-1}B. \quad (36)$$

Subtracting the known constant $\bar{x}^*$ preserves admissibility and every prediction error. Also $\|X_t\|_Q^2 = 2R_\infty$.

Lemma 2 (Innovation split). *Under (30)–(31), every square-integrable $\mathbb{R}^d$ -valued function u of $\theta_{t-\tau}$ satisfies*

$$\|X_t - u\|_Q^2 = \|e^{-\rho}X_{t-\tau} - u\|_Q^2 + (1 - e^{-2\rho})2R_\infty. \quad (37)$$

Proof. In (36), $K\varepsilon_{t,\tau}$ is Q -orthogonal to every square-integrable function of $\theta_{t-\tau}$, because its conditional mean is zero. Expanding the squared norm leaves $\|e^{-\rho}X_{t-\tau} - u\|_Q^2 + \|K\varepsilon_{t,\tau}\|_Q^2$. Stationarity and the same orthogonality with $u = 0$ give $\|K\varepsilon_{t,\tau}\|_Q^2 = (1 - e^{-2\rho})\|X_t\|_Q^2$. $\square$

The first term is the error in reproducing the predictable old decision; the second is the fresh innovation that the old snapshot cannot predict. For global information, the first error can be eliminated entirely.

Theorem 1 (Exact stale-global regret). *Under (30)–(31),*

$$\boxed{R_{\text{glob}}(\tau) = \left(1 - e^{-2\tau/T}\right) R_{\infty}}, \quad (38)$$

where

$$R_{\infty} = \frac{1}{2} \text{tr} \left(B^{\top} Q^{-1} B \Sigma_{\infty} \right). \quad (39)$$

Equivalently,

$$\boxed{\eta_T(\tau) = 1 - e^{-2\tau/T}}. \quad (40)$$

Proof. The global snapshot permits $u = e^{-\rho} X_{t-\tau}$, eliminating the first term in (37). Thus the uncentered optimal action is $\bar{x}^* + e^{-\rho}(x_{t-\tau}^* - \bar{x}^*)$ and the remaining regret is the innovation term. Finally, $2R_{\infty} = \text{tr}(K^{\top} Q K \Sigma_{\infty})$ and $K^{\top} Q K = B^{\top} Q^{-1} B$ give (39). $\square$

The argument requires stationarity, an affine decision, and a scalar-decay innovation with conditional mean zero; Gaussianity is unnecessary. For example, a stationary AR(1) process with coefficient $0 < a < 1$ and independent, square-integrable, mean-zero innovations gives $\eta_T(k) = 1 - a^{2k}$. For small τ/T , $R_{\text{glob}}(\tau) = 2(\tau/T)R_{\infty} + o(\tau/T)$; for large τ/T , regret tends to R_{∞} .

3.3 Fresh-Local versus Stale-Global Crossover

Combining the observation (29) with (40) yields the first main architectural result.

Theorem 2 (Fresh-local versus stale-global crossover). *Under the Gauss–Markov and affine-decision assumptions of Theorem 1, suppose $0 \leq \eta_S(0) < 1$. Fresh-local information strictly outperforms stale-global information if and only if*

$$\boxed{\frac{\tau}{T} > \frac{1}{2} \log \frac{1}{1 - \eta_S(0)}}. \quad (41)$$

Write the right-hand side as ρ^* and $\rho = \tau/T$. If $\eta_S(0) = 1$, set $\rho^* = +\infty$: no finite delay makes fresh-local information strictly better.

Proof. By (29) and (40), fresh-local wins exactly when $1 - e^{-2\rho} > \eta_S(0)$. Rearranging gives (41). $\square$

Holding the one-time state distribution fixed, local regret is constant while global regret increases with delay. For $0 < \eta_S(0) < 1$ they cross once. When $\eta_S(0) = 0$, local information reproduces the full-information decision and wins at every positive delay. The threshold compares temporal staleness with the share of decision variation omitted locally.

3.4 Role of Decision Coupling

The fresh-local omission share $\eta_S(0)$ depends jointly on the spatial statistics of the environment and on the coupling structure of the decision problem. To isolate the role of decision coupling, consider a symmetric shared-resource model with $n \geq 2$ scalar actions,

$$f(x, \theta) = \sum_{i=1}^n \left(\frac{q}{2} x_i^2 - \theta_i x_i \right) + \frac{\gamma}{2} \left(\sum_{i=1}^n x_i \right)^2, \quad q > 0, \gamma \geq 0. \quad (42)$$

Here q determines the local curvature or stiffness of each decision, while γ determines the strength of the shared coordination penalty. In the notation of Section 2,

$$Q = qI + \gamma \mathbf{1}\mathbf{1}^\top, \quad b(\theta) = \theta. \quad (43)$$

Here $\mathbf{1}$ is the all-ones vector.

Assume that the state components θ_i are independent, mean-zero stationary OU processes with common variance σ^2 and common coherence time T .

The full-information action $x^* = Q^{-1}\theta$ has components

$$x_i^* = \frac{\theta_i}{q} - \frac{\gamma}{q(q + \gamma n)} \sum_{j=1}^n \theta_j. \quad (44)$$

Thus, even though the linear reward $\theta_i x_i$ is local, coupling through the common resource makes agent i 's optimal action depend on the states of all other agents.

Proposition 1 (Local explainability under aggregate coupling). *For the model (42), the optimal fresh-local policy is*

$$u_i^{\text{loc}} = \frac{\theta_i}{q + \gamma}, \quad (45)$$

and

$$R_\infty = \frac{n\sigma^2 (q + \gamma(n - 1))}{2q(q + \gamma n)}, \quad (46)$$

$$R_{\text{loc}} = \frac{n\sigma^2 \gamma^2 (n - 1)}{2q(q + \gamma)(q + \gamma n)}. \quad (47)$$

Consequently, the fresh-local omission share is

$$\boxed{\eta_S(0) = \frac{\gamma^2 (n - 1)}{(q + \gamma)(q + \gamma(n - 1))}.} \quad (48)$$

Proof. Independence makes $\mathbb{E}[u_j \mid \theta_i] = \mu_j \triangleq \mathbb{E}[u_j]$ for $j \neq i$. The coupled normal equations become $(q + \gamma)u_i + \gamma \sum_{j \neq i} \mu_j = \theta_i$. Taking expectations gives $Q\mu = 0$, hence $\mu = 0$ and $u_i = \theta_i/(q + \gamma)$. The projection identity then gives

$$2R_\infty = \sigma^2 \text{tr}(Q^{-1}), \quad 2R_{\text{loc}} = 2R_\infty - \frac{n\sigma^2}{q + \gamma}.$$

Evaluating the trace with the rank-one inverse of Q yields the stated regrets and their ratio. Appendix A records the matrix arithmetic. $\square$

Combining Proposition 1 with Theorem 2 gives an explicit threshold.

$$\boxed{\rho^*(\gamma, n) = \frac{1}{2} \log \left[\frac{(q + \gamma)(q + \gamma(n - 1))}{q(q + \gamma n)} \right].} \quad (49)$$

Therefore

$$R_{\text{loc}} < R_{\text{glob}}(\tau) \iff \frac{\tau}{T} > \rho^*(\gamma, n). \quad (50)$$

As $n \rightarrow \infty$,

$$\boxed{\rho^*(\gamma, n) \rightarrow \frac{1}{2} \log \left(1 + \frac{\gamma}{q} \right)}. \quad (51)$$

In the large-system limit, local information captures the share $q/(q + \gamma)$ of decision variation; the remainder requires nonlocal state.

When $\gamma = 0$, the decisions decouple and $\eta_S(0) = 0$: current local information is sufficient, so any positive global delay makes the fresh-local architecture preferable. As γ increases, each agent's optimal action depends more strongly on remote states, $\eta_S(0)$ increases, and the crossover moves to larger τ/T . Thus stronger coordination coupling makes the system willing to tolerate increasingly stale-global information before abandoning global coordination in favor of fresh-local decisions.

The result provides the first endpoint characterization of the broader freshness–scope problem. The next sections move beyond the binary local–global comparison by allowing the information radius itself to vary, and ask how spatial predictability and temporal staleness jointly determine the optimal coordination scale.

4 Spatial and Temporal Predictability

We now introduce intermediate architectures in which each agent observes a synchronized snapshot within radius r . Temporal predictability determines the freshness loss, while decision-relevant spatial predictability determines the omission loss.

4.1 Spatial Structure of the Environment

We first describe the spatial statistics that determine what nearby observations reveal about remote state.

For simplicity of exposition, first suppose that each node has a scalar local state, so that

$$\theta_t = (\theta_{1,t}, \dots, \theta_{n,t})^\top.$$

The vector-valued case follows by replacing scalar covariances with block covariances.

Let

$$\bar{\theta} \triangleq \mathbb{E}[\theta_t], \quad \Sigma_S \triangleq \text{Cov}(\theta_t) \succeq 0 \quad (52)$$

denote the stationary mean and spatial covariance. The entry $(\Sigma_S)_{ij}$ measures the instantaneous statistical dependence between the states associated with nodes i and j .

On a path, line, or Euclidean spatial domain, a canonical covariance model is

$$\text{Cov}(\theta_{i,t}, \theta_{j,t}) = \sigma^2 \exp \left(-\frac{d_G(i, j)}{\ell_s} \right), \quad (53)$$

where $\ell_s > 0$ is a spatial correlation length. Larger ℓ_s means that states remain strongly correlated over greater network distance. In one spatial dimension, (53) is the exponential, or Ornstein–Uhlenbeck, covariance model [15].

On the line, the Gaussian field with exponential covariance is an OU process indexed by position. Its spatial Markov property makes the two sides of a point conditionally independent given the value there. This is the key to Lemma 3.

4.2 Temporal Structure

We use the common-rate model (30) with $\Sigma_\infty = \Sigma_S$. Its stationary space-time covariance is

$$\text{Cov}(\theta_t, \theta_s) = e^{-|t-s|/T} \Sigma_S. \quad (54)$$

This separable covariance gives every spatial mode the same normalized temporal correlation. More general fields may have scale-dependent persistence [16].

4.3 Snapshot Architectures

For radius r , define the zero-delay information available to agent i at time t as

$$\mathcal{I}_{i,t}^{(r)} \triangleq \sigma(\theta_{j,t} : j \in \mathcal{N}_r(i)). \quad (55)$$

The corresponding zero-delay radius- r architecture is

$$\mathcal{A}_{r,0} \triangleq (\mathcal{I}_{1,t}^{(r)}, \dots, \mathcal{I}_{n,t}^{(r)}). \quad (56)$$

A delayed synchronized-snapshot radius- r architecture provides the same type of information, shifted backward by τ :

$$\mathcal{A}_{r,\tau} \triangleq (\mathcal{I}_{1,t-\tau}^{(r)}, \dots, \mathcal{I}_{n,t-\tau}^{(r)}). \quad (57)$$

Define the normalized zero-delay spatial omission function

$$\eta_S(r) \triangleq \frac{R(\mathcal{A}_{r,0})}{R_\infty}. \quad (58)$$

The quantity $\eta_S(r)$ is the fraction of decision-relevant variation that cannot be captured using current information within radius r .

The zero-delay observation sets are nested in r , so

$$r_2 \geq r_1 \implies 0 \leq \eta_S(r_2) \leq \eta_S(r_1) \leq 1. \quad (59)$$

If radius zero observes precisely the local current component, then

$$\eta_S(0) = \frac{R_{\text{loc}}}{R_\infty}. \quad (60)$$

On a finite connected graph with diameter D , complete current state is available at $r = D$, so

$$\eta_S(D) = 0. \quad (61)$$

4.4 Decision-Relevant Smoothness

For the affine decision model (6), write

$$x_t^\star = K\theta_t + k_0, \quad K = Q^{-1}B, \quad k_0 = Q^{-1}b_0. \quad (62)$$

The matrix K is the decision-sensitivity operator: its block K_{ij} describes how the state at node j influences the full-information decision at node i .

The covariance of the clairvoyant decision is

$$\Sigma_x \triangleq \text{Cov}(x_t^\star) = K\Sigma_S K^\top. \quad (63)$$

The function $\eta_S(r)$ therefore depends on four ingredients at once: (i) the state covariance Σ_S ; (ii) the decision-sensitivity operator K ; (iii) the cost metric Q ; and (iv) the observation geometry $\{\mathcal{N}_r(i)\}$.

A spatial correlation length alone does not determine regret. By a *mode* we mean a direction ξ in state space, representing a spatial pattern of variation, such as an eigenvector of Σ_S . A pattern in the null space of K ($K\xi = 0$) changes the state without changing the desired decision, so residual uncertainty confined to that direction contributes no decision error. Conversely, a pattern with large $\sqrt{(K\xi)^\top Q(K\xi)}$ is amplified into the decision, so even small residual uncertainty about it can dominate regret. Experiment 5 illustrates this dependence with the covariance held fixed.

Theorem 3 (Spatio-temporal predictability composition law). *Suppose the environment follows (30) with $\Sigma_\infty = \Sigma_S$, and the full-information decision is affine as in (62). For the snapshot family (57), every radius r and finite delay $\tau \geq 0$ satisfy*

$$\boxed{R(\mathcal{A}_{r,\tau}) = \left(1 - e^{-2\tau/T}\right) R_\infty + e^{-2\tau/T} R(\mathcal{A}_{r,0}).} \quad (64)$$

Equivalently, with $\eta_{ST}(r, \tau) \triangleq R(\mathcal{A}_{r,\tau})/R_\infty$,

$$1 - \eta_{ST}(r, \tau) = e^{-2\tau/T} (1 - \eta_S(r)). \quad (65)$$

The explained share is the product of the share surviving the delay and the share captured by the spatial scope.

Proof. Center the target and policies as in Section 3.2. Every admissible policy under $\mathcal{A}_{r,\tau}$ is a function of $\theta_{t-\tau}$, so Lemma 2 applies. Writing $u = e^{-\rho} \tilde{u}$ preserves each agent's measurability and gives

$$\inf_u \|e^{-\rho} X_{t-\tau} - u\|_Q^2 = e^{-2\rho} \inf_{\tilde{u}} \|X_{t-\tau} - \tilde{u}\|_Q^2 = e^{-2\rho} 2R(\mathcal{A}_{r,0}),$$

where stationarity identifies the old-time prediction problem with the zero-delay problem at time t . Adding the innovation term and dividing by two proves (64). $\square$

Theorem 1 is the case $r = D$ on a finite connected graph, where $\eta_S(D) = 0$. The temporal term $(1 - e^{-2\tau/T})R_\infty$ is the innovation that the delayed snapshot cannot predict. The remaining spatial omission is discounted by $e^{-2\tau/T}$, so broader information helps only with the part of the current decision that remains temporally predictable.

As in Lemma 2, a stationary scalar-decay innovation with conditional mean zero suffices. Gaussianity is used below to compute spatial prediction errors from covariance. With $Q = qI$, each agent uses its own conditional mean; with off-diagonal Q , $\eta_S(r)$ requires the joint team solution of (24).

5 Optimal Coordination Scale

We now make information radius an architectural design variable. For each r , an agent may base its action on observations available within radius r , but those observations arrive after latency $\tau(r)$. The objective is to select the spatial scope that minimizes architecture regret.

On a graph, admissible radii are generally integers. We first analyze the continuous relaxation $r \in [0, D]$, where D is the maximum allowed information radius. On a finite graph, the exact optimizer is obtained by minimizing over the admissible integer radii. Rounding the continuous optimum to a neighboring integer is justified only when the interpolated regret curve is unimodal.

5.1 Radius Family and Marginal Balance

Let $\tau : [0, D] \rightarrow [0, \infty)$ be nondecreasing with $\tau(0) = 0$, and write

$$R(r) \triangleq R(\mathcal{A}_{r, \tau(r)}). \quad (66)$$

The synchronized-snapshot convention is as in Section 2.2: an interior optimum is possible because increasing r replaces a fresher snapshot with an older, broader one. The radius family is generally not nested.

By Theorem 3,

$$R(r) = R_\infty \left[1 - e^{-2\tau(r)/T} (1 - \eta_S(r)) \right]. \quad (67)$$

On a finite graph, moving from radius r to $r + 1$ strictly improves performance exactly when

$$e^{-2\tau(r+1)/T} (1 - \eta_S(r+1)) > e^{-2\tau(r)/T} (1 - \eta_S(r)), \quad (68)$$

or, provided $1 - \eta_S(r) > 0$, equivalently

$$\log \left(\frac{1 - \eta_S(r+1)}{1 - \eta_S(r)} \right) > \frac{2(\tau(r+1) - \tau(r))}{T}. \quad (69)$$

Thus a hop is worthwhile when its proportional spatial gain exceeds its freshness loss. If $1 - \eta_S(r) = 0$, use (68): improvement requires $1 - \eta_S(r+1) > 0$.

At radius zero,

$$R(0) = R_\infty \eta_S(0) = R_{\text{loc}}. \quad (70)$$

On a finite graph, if $D = \text{diam}(G)$ and radius D provides the entire state, then

$$R(D) = R_\infty \left(1 - e^{-2\tau(D)/T} \right) = R_{\text{glob}}(\tau(D)). \quad (71)$$

Equation (67) can be written as

$$R(r) = R_T(r) + R_S(r), \quad (72)$$

where

$$R_T(r) \triangleq \left(1 - e^{-2\tau(r)/T} \right) R_\infty, \quad (73)$$

$$R_S(r) \triangleq e^{-2\tau(r)/T} \eta_S(r) R_\infty. \quad (74)$$

The temporal term increases with information radius whenever $\tau(r)$ does. The zero-delay spatial omission fraction $\eta_S(r)$ decreases with radius, although its contribution is discounted by the temporal relevance factor $e^{-2\tau(r)/T}$.

Minimizing regret is equivalent to maximizing the explained share $e^{-2\tau(r)/T} (1 - \eta_S(r))$. Define its marginal temporal loss and spatial gain rates by

$$m_T(r) \triangleq \frac{2\tau'(r)}{T}, \quad m_S(r) \triangleq -\frac{\eta'_S(r)}{1 - \eta_S(r)} = \frac{d}{dr} \log(1 - \eta_S(r)). \quad (75)$$

Both measure fractional change per unit radius.

Proposition 2 (Continuous marginal-balance characterization). *Under the assumptions of Theorem 3, additionally assume that $\tau(r)$ and $\eta_S(r)$ are continuously differentiable on $[0, D]$, with*

$$\tau'(r) \geq 0, \quad \eta'_S(r) \leq 0, \quad 0 \leq \eta_S(r) < 1.$$

Then

$$R'(r) = R_\infty e^{-2\tau(r)/T} (1 - \eta_S(r)) [m_T(r) - m_S(r)]. \quad (76)$$

Consequently, every interior optimal radius $r^* \in (0, D)$ satisfies

$$\boxed{-\frac{\eta'_S(r^*)}{1 - \eta_S(r^*)} = \frac{2\tau'(r^*)}{T}}. \quad (77)$$

Proof. Differentiating (67) gives

$$\frac{R'(r)}{R_\infty} = e^{-2\tau(r)/T} \left[\frac{2\tau'(r)}{T} (1 - \eta_S(r)) + \eta'_S(r) \right].$$

Factoring $1 - \eta_S(r) > 0$ yields (76). At an interior minimum the derivative vanishes, giving (77). $\square$

The balance condition is necessary at an interior optimum. It gives a unique optimum if $\Delta(r) = m_S(r) - m_T(r)$ is strictly decreasing: the optimum is zero when $\Delta(0) \leq 0$, is D when $\Delta(D) \geq 0$, and otherwise is the unique crossing. A sufficient condition is strictly decreasing m_S and nondecreasing m_T . Under these conditions, increasing T or raising m_S moves the optimum outward; increasing the latency scale moves it inward. These are conditions on decision-relevant predictability, not automatic consequences of changing raw covariance parameters. The companion illustrates the rate comparison.

5.2 Canonical Line Model and Closed-Form Radius

We now derive the spatial omission function and the optimal radius from a concrete stochastic field and decision model. Consider a dense one-dimensional network, represented by locations $z \in \mathbb{R}$. This is also the continuum approximation of a sufficiently long path graph away from its boundaries.

Let $\theta(z, t)$ be a zero-mean Gaussian field with covariance

$$\mathbb{E} [\theta(z, t) \theta(z', s)] = \sigma^2 \exp\left(-\frac{|z - z'|}{\ell_s}\right) \exp\left(-\frac{|t - s|}{T}\right). \quad (78)$$

The parameter ℓ_s is the spatial correlation length, and T is the temporal coherence time.

Suppose the full-information decision at location z is the exponentially weighted spatial aggregate

$$x^*(z, t) = \int_{-\infty}^{\infty} w_{\ell_c}(u) \theta(z + u, t) du, \quad (79)$$

where

$$w_{\ell_c}(u) \triangleq \frac{1}{2\ell_c} \exp\left(-\frac{|u|}{\ell_c}\right). \quad (80)$$

The kernel integrates to one, and the decision-relevance length ℓ_c controls how broadly remote states influence the desired local action.

For example, (79) is generated pointwise by the quadratic tracking-loss density

$$f_z(x, \theta) = \frac{q}{2} [x(z) - x^*(z, \theta)]^2, \quad q > 0. \quad (81)$$

The pointwise loss has no action coupling, so each location's optimal policy is its conditional mean. We measure regret per unit length, equal by stationarity to expected pointwise loss; then $R_\infty = (q/2) \text{Var}(x^*(z, t))$.

At zero delay, the radius- r observation at location z is

$$\mathcal{O}_r(z, t) \triangleq \sigma(\theta(z + u, t) : |u| \leq r). \quad (82)$$

We use a continuous version of the field; the observations can equivalently be generated by a countable dense subset of the interval (including z at $r = 0$).

Lemma 3 (Exponential omission by self-similarity). *For the field (78), decision (79), and observation (82), the normalized zero-delay spatial omission error is*

$$\boxed{\eta_S(r) = \frac{\ell_c}{\ell_c + 2\ell_s} \exp\left(-\frac{2r}{\ell_c}\right)}. \quad (83)$$

In particular,

$$\eta_0 = \eta_S(0) = \frac{\ell_c}{\ell_c + 2\ell_s}. \quad (84)$$

Proof. By stationarity set $z = 0$ and suppress time. Gaussian conditioning gives $\eta_S(r) = \text{Var}(x^*(0) | \mathcal{O}_r) / \text{Var}(x^*(0))$. Split the target integral into the observed middle and the two exterior tails. The middle contributes no conditional variance. The spatial Markov property makes the two tails conditionally independent given the segment, with each depending only on its adjacent endpoint. Translating the right tail by r gives

$$\int_r^\infty w_{\ell_c}(u)\theta(u) du = \frac{e^{-r/\ell_c}}{2\ell_c} \int_0^\infty e^{-s/\ell_c}\theta(r+s) ds.$$

The conditional variance of the last integral given $\theta(r)$ is independent of r . Reflection gives the same conclusion for the left tail. Hence $\eta_S(r) = e^{-2r/\ell_c}\eta_S(0)$.

To obtain the constant, covariance integration gives

$$\text{Cov}(x^*(0), \theta(0)) = \frac{\sigma^2 \ell_s}{\ell_c + \ell_s}, \quad \text{Var}(x^*(0)) = \frac{\sigma^2 \ell_s (\ell_c + 2\ell_s)}{2(\ell_c + \ell_s)^2}. \quad (85)$$

Thus $\eta_S(0) = 1 - \text{Corr}(x^*(0), \theta(0))^2 = \ell_c/(\ell_c + 2\ell_s)$. Appendix B evaluates the integrals explicitly. $\square$

Assume information propagates at effective speed $v > 0$, so

$$\tau(r) = r/v, \quad (86)$$

and define the temporal propagation length

$$L_T \triangleq vT. \quad (87)$$

This is the distance information can travel during one coherence time. We write $[z]_+ \triangleq \max\{z, 0\}$.

Theorem 4 (Optimal synchronized-snapshot radius in the canonical model). *Suppose the state field obeys (78), the full-information decision is given by (79), the loss is (81), and the latency is (86). Then the unique optimal radius on the infinite line satisfies the dimensionless law*

$$\boxed{\frac{r^*}{\ell_c} = \frac{1}{2} \left[\log \left(\frac{1 + L_T/\ell_c}{1 + 2\ell_s/\ell_c} \right) \right]_+}. \quad (88)$$

Equivalently,

$$\boxed{r^* = \frac{\ell_c}{2} \left[\log \left(\frac{\ell_c + L_T}{\ell_c + 2\ell_s} \right) \right]_+}. \quad (89)$$

The optimal radius is strictly positive if and only if

$$\boxed{L_T > 2\ell_s}. \quad (90)$$

Within the interior regime, r^* :

1. increases with the temporal coherence time T ;
2. increases with the information-propagation speed v ;
3. decreases with the spatial correlation length ℓ_s ; and
4. increases with the decision-relevance length ℓ_c .

Proof. For any omission law $\eta_S(r) = \eta_0 e^{-2r/\ell_c}$ with $0 < \eta_0 < 1$, minimizing (67) under linear delay is equivalent to maximizing

$$g(r) = e^{-2r/L_T} - \eta_0 e^{-2r(1/L_T + 1/\ell_c)}.$$

Differentiation gives

$$g'(r) = 2e^{-2r/L_T} \left[\eta_0 \left(\frac{1}{L_T} + \frac{1}{\ell_c} \right) e^{-2r/\ell_c} - \frac{1}{L_T} \right].$$

The bracket is strictly decreasing and has a negative limit, so g' changes sign at most once, from positive to negative. If its value at zero is nonpositive, radius zero is the unique optimum; otherwise the unique stationary point is the optimum.

Thus the general exponential law gives

$$r^* = \frac{\ell_c}{2} \left[\log \left(\eta_0 \left(1 + \frac{L_T}{\ell_c} \right) \right) \right]_+, \quad (91)$$

and a maximum allowed radius D gives

$$r_D^* = \min\{D, r^*\}. \quad (92)$$

Substituting $\eta_0 = \ell_c/(\ell_c + 2\ell_s)$ gives (88)–(90). The cap D limits how far each agent may look, but the environment remains an infinite line. In particular $\eta_S(D) = \eta_0 e^{-2D/\ell_c} > 0$. Unlike the finite-graph endpoint $r = \text{diam}(G)$, the capped radius still omits decision-relevant state (compare Fig. 3, right panel).

In the positive-radius regime, $\partial r^*/\partial L_T = \ell_c/[2(\ell_c + L_T)] > 0$ and $\partial r^*/\partial \ell_s = -\ell_c/(\ell_c + 2\ell_s) < 0$. Since $L_T = vT$, these establish the first three comparative statics. For the fourth, write the difference of logarithms as an integral.

When $L_T > 2\ell_s$ this gives

$$r^* = \frac{1}{2} \int_{2\ell_s}^{L_T} \frac{\ell_c}{\ell_c + s} ds. \quad (93)$$

The integrand $\ell_c/(\ell_c + s) = 1 - s/(\ell_c + s)$ is strictly increasing in ℓ_c for every $s > 0$, proving that r^* increases with the range over which remote state affects the desired decision. $\square$

Theorem 4 identifies three physical length scales:

$$\boxed{\underbrace{\ell_s}_{\text{spatial correlation}} \quad \underbrace{\ell_c}_{\text{decision relevance}} \quad \underbrace{L_T = vT}_{\text{temporal propagation}}}. \quad (94)$$

At radius zero, $m_S(0) = 1/\ell_s$ and $m_T = 2/L_T$, explaining why the threshold $L_T > 2\ell_s$ is independent of ℓ_c . Stronger spatial correlation lowers omission at each radius: the local value already predicts more of the decision-relevant field, reducing the gain from a wider snapshot.

Two limits clarify the radius law. In the positive-radius regime, $\ell_c \gg L_T, \ell_s$ gives $r^* \approx (L_T - 2\ell_s)/2$, whereas $\ell_c \ll L_T, \ell_s$ gives $r^* \approx (\ell_c/2) \log(L_T/(2\ell_s))$.

On a finite graph, Theorem 3 and minimization over integer radii remain exact, with the one-hop comparison (68)–(69) as the discrete form of marginal balance; Eq. (89) is the closed-form counterpart on the homogeneous line.

6 Numerical Consistency Checks and Finite-Graph Illustrations

Experiments 1–4 check the temporal law, local–global crossover, and scalar radius predictions. Experiments 5–6 illustrate decision relevance and integer-radius optimization on finite graphs beyond the canonical line.

6.1 Numerical Methodology and Synthetic Environments

We evaluate the same architecture regret as in the theory, using conditional covariances and independently sampled quadratic losses. Experiment 1 uses the common-snapshot conditional mean even for non-diagonal Q ; Experiment 2 uses the coupled fresh-local solution. Experiments 3–4 evaluate the scalar composition law. Experiments 5–6 use $Q = I$, so agentwise Gaussian conditional variances give the team regret exactly.

For the graph experiments, the spatial covariance is

$$\Sigma_S = \sigma^2(\kappa_s^2 I + L_G)^{-\nu}, \quad \kappa_s, \nu > 0, \quad (95)$$

where L_G is the graph Laplacian; we scale the covariance to average marginal variance one. This emphasizes low graph-frequency modes [17, 18]. All experiments use common-rate Gaussian-affine environments. Appendix C gives the reference settings, sampling procedures, confidence intervals, and grid-error diagnostics; the repository contains the reproduction package.

6.2 Temporal Scaling and the Local–Global Crossover

Experiment 1 tests (38) using four systems with different dimensions, spatial covariances, objectives, and decision operators. At each of 25 staleness values in $[0, 3]$, we drew 20,000 exact stationary OU pairs per system and evaluated the optimal stale-global action. The normalized curves collapse onto $1 - e^{-2\tau/T}$ (Fig. 1); the maximum absolute deviation is 0.0155 and the root-mean-square deviation is 0.00471.

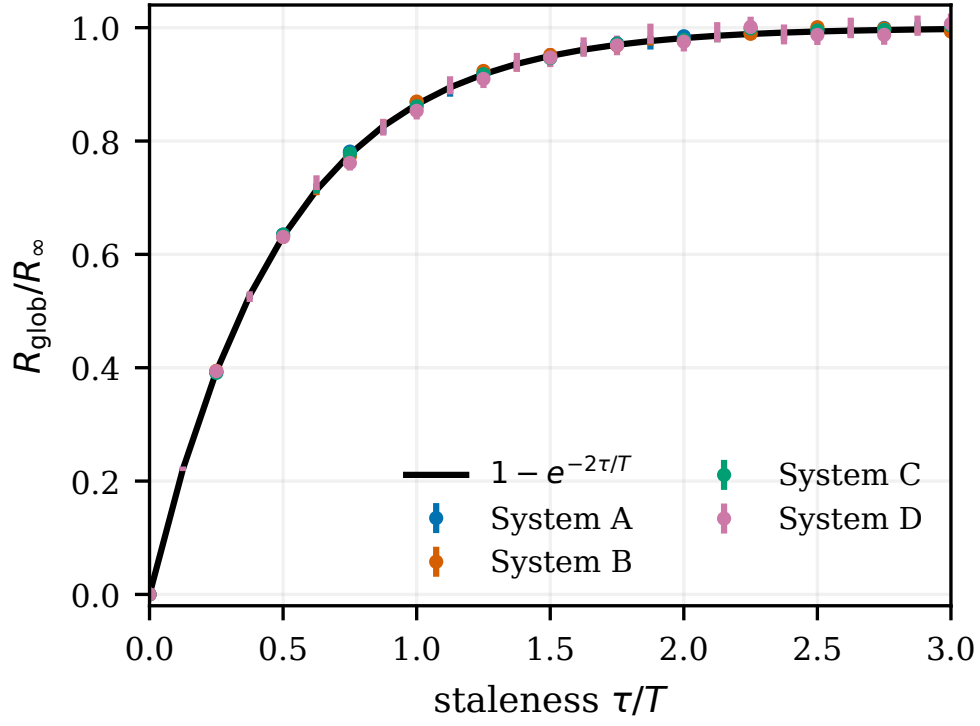


Figure 1: Temporal scaling collapse from exact stationary OU pairs. Markers are Monte Carlo estimates for four systems with different dimensions, spatial covariances, objective matrices, and decision operators; bars are 95% confidence intervals. The solid curve is the exact law $1 - e^{-2\tau/T}$. Normalization by R_{∞} removes system-specific scale.

Experiment 2 uses the shared-resource model with $q = 1$, independent OU components, four sizes $n \in \{5, 10, 25, 100\}$, and nine coupling values in $[0, 10]$. Paired local and open-loop losses from 30,000 current-state draws per setting give the inferred temporal-law boundary $\hat{\rho}^* = \frac{1}{2} \log[\hat{R}_\infty / (\hat{R}_\infty - \hat{R}_{\text{loc}})]$. Its mean absolute error is 0.00111 and its maximum error is 0.00557 (Fig. 2). At $n = 5$, $\gamma/q = 10$, the finite-size threshold lies 0.109 below the large-system limit. Increasing coupling makes older global information worth tolerating, while increasing n moves the boundary toward $\frac{1}{2} \log(1 + \gamma/q)$.

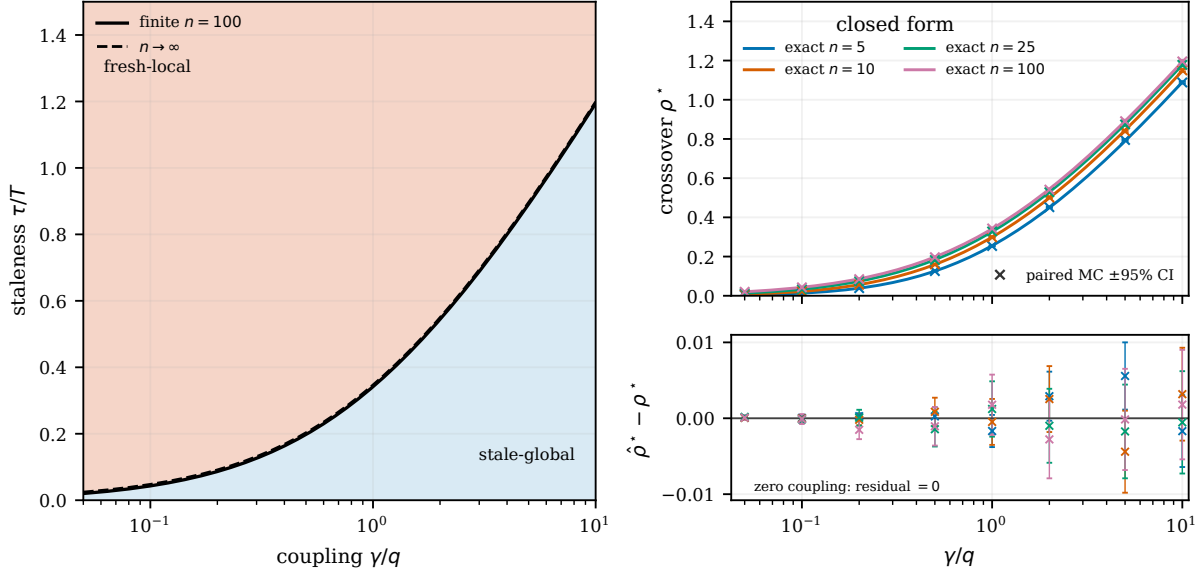


Figure 2: Fresh-local versus stale-global crossover. Left: the phase map uses the exact finite- $n = 100$ boundary (solid) and the large- n limit (dashed), Eqs. (49) and (51). Upper right: exact theory curves and inferred Monte Carlo boundaries (crosses) for four system sizes, with paired delta-method 95% intervals. Lower right: empirical minus theoretical boundary, on a scale that reveals the sampling differences and their uncertainty. The zero-coupling setting is evaluated at $\rho^* = 0$ but omitted from the logarithmic positive-coupling axes.

6.3 Coordination Radius and Canonical Regime Map

Experiment 3 checks the radius curve and its temporal and spatial components under $\eta_S(r) = \eta_0 e^{-2r/\ell_c}$ and linear delay. With $\ell_c = 1$ and cap $D = 2$, the settings $(\eta_0, vT) = (0.25, 0.2)$, $(0.7, 4)$, and $(0.9, 100)$ give local, interior, and capped optima. Independent Gaussian draws with the prescribed component variances provide a scalar-loss check, without sampling a spatial field or graph. The grid minima are 0, 0.626, and 2, compared with analytical values 0, 0.62638, and 2 (Fig. 3). The capped case retains positive spatial omission and is distinct from the complete-information endpoint of a finite graph.

Experiment 4 sweeps 4,896 canonical settings over $vT/\ell_c \in [0.1, 20]$ and $\ell_s/\ell_c \in [0.05, 5]$. Direct scalar minimization on a fixed radius grid with step $0.0016\ell_c$ agrees with the closed form to within one grid step. Figure 4 shows the zero-radius region and the transition $vT = 2\ell_s$. Increasing temporal propagation length raises the preferred radius; increasing spatial correlation lowers it by making additional observations more redundant. Separate sweeps confirm all four canonical comparative statics. Detailed discretization errors, including the near-threshold zero/positive disagreements,

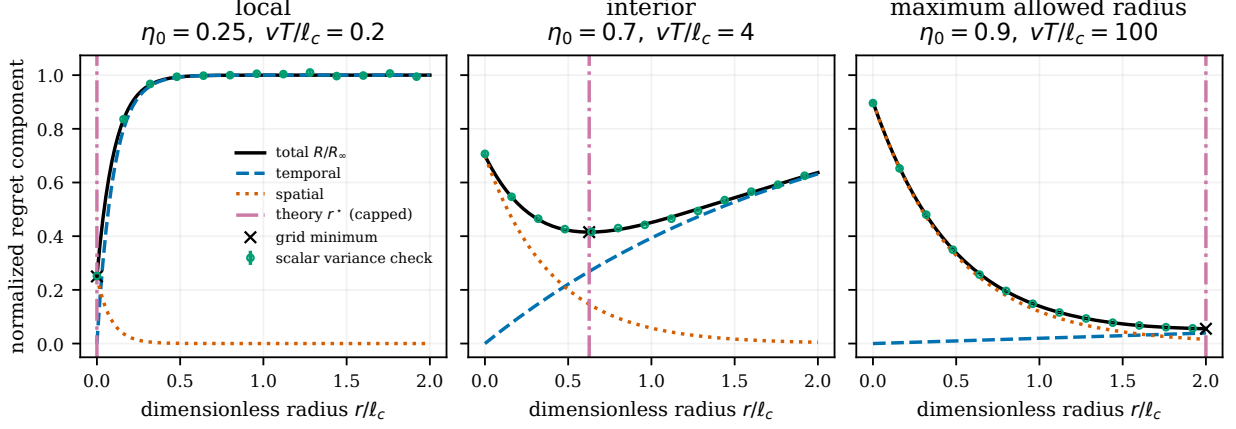


Figure 3: Emergence of local, interior, and maximum allowed radius optima under $\eta_S(r) = \eta_0 e^{-2r/\ell_c}$ and $\tau(r) = r/v$. Curves show total regret and its temporal and residual-spatial terms from Eq. (72); open markers with 95% intervals are independent scalar-innovation estimates. Dash-dotted lines and crosses mark the analytical constrained and grid minimizers. At the maximum allowed radius, positive omission remains: $\eta_S(D) > 0$.

appear in Appendix C.

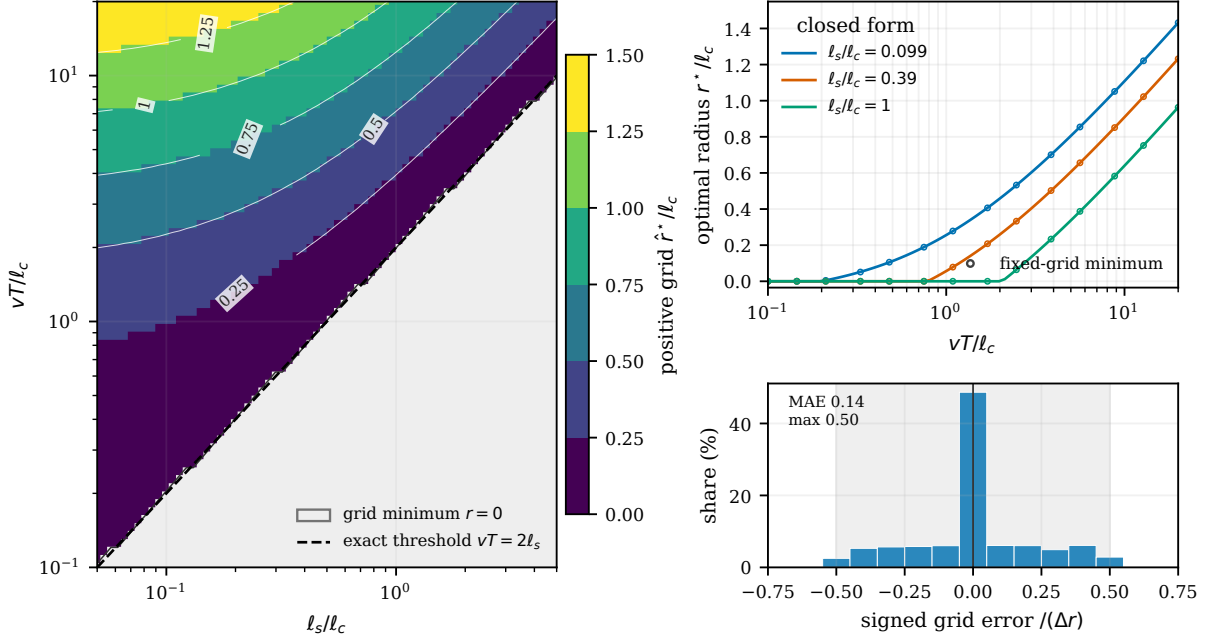


Figure 4: Dimensionless optimal-radius law from direct scalar minimization. Left: the numerical map, with the numerical zero-radius region shown in gray and the dashed curve marking the theoretical transition $vT = 2\ell_s$. Upper right: selected ℓ_s/ℓ_c slices comparing grid minimizers with the closed form in Eq. (88). Lower right: the histogram of $(\hat{r}^* - r^*)/\Delta r$ over all 4,896 points; its zero spike includes local-regime points and the remaining grid errors are of order a half-step.

6.4 State Predictability versus Decision-Relevant Predictability

Experiment 5 holds a 64-node ring, its Laplacian covariance, $T = 6$, and latency 0.12 per hop fixed, changing only the decision operator $K_{ij} = e^{-d_G(i,j)/\ell_c} / \|e^{-d_G(i,\cdot)/\ell_c}\|_2$ with $Q = I$. For $\ell_c = 0.7, 2, 6$, exact Gaussian conditioning gives local omission shares 0.0460, 0.258, 0.572 and optimal radii 1, 2, 5 hops, respectively (Fig. 5). Each regret is normalized by its own $R_\infty = \frac{1}{2} \text{tr}(K\Sigma_S K^\top)$, so the comparison is between unexplained fractions. The raw state correlation is identical across the three cases: changing decision sensitivity alone changes the preferred architecture. Independent 12,000-sample conditioning checks agree within 2.39×10^{-3} (maximum pointwise standard error 3.20×10^{-3}).

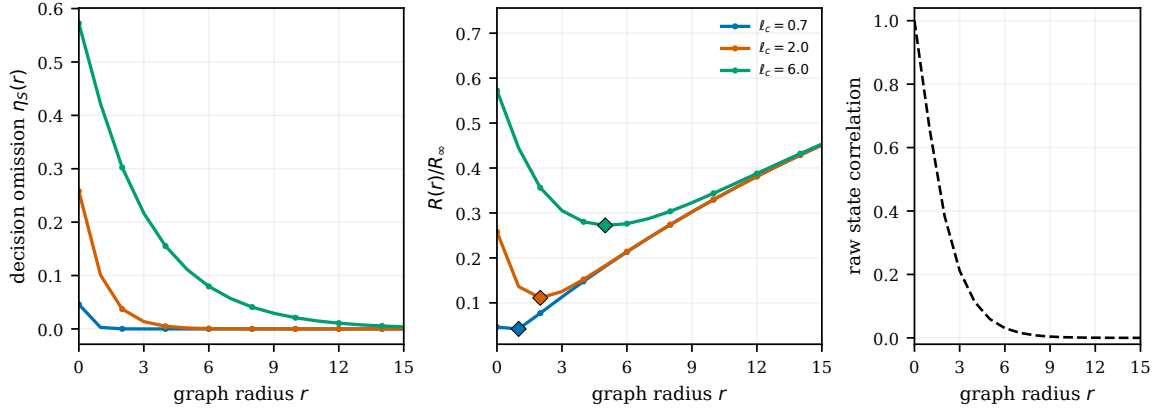


Figure 5: Decision relevance with the graph and state covariance held fixed. The decision-weighted omission and normalized composed regret are shown for three row- ℓ_2 -normalized operators with $Q = I$. Raw state correlation is shown in a separate context panel and is identical across operators; it is not an omission estimate. Each regret is normalized by its operator-specific R_∞ , and the minimizing integer radius is marked. Changing only the decision-relevance range moves the optimum from 1 to 5 hops.

6.5 Finite Graphs beyond the Canonical Geometry

Experiment 6 evaluates one 64-node path, ring, grid, and fixed-seed geometric graph. For each instance, we compute $\eta_S(r)$ directly by Gaussian conditioning on every integer-radius neighborhood, and then use the composition law. With $Q = I$, $T = 5$, $\ell_c = 2$, and latency 0.12 per hop, the optimal radii are 2, 2, 3, 2 hops (Fig. 6). No canonical omission fit or graph-ensemble average is used.

Over the sampled coherence times 1.5, 2.5, 4, 6, 9, 14, the optima move from 1 to 3 hops on the path, ring, and geometric graph and from 1 to 4 on the grid. Increasing decision range also increases the sampled optima; increasing per-hop latency or spatial smoothness weakly decreases them. These are observations for the four specified instances. The one-hop criterion (68) remains the exact comparison on each graph, including when adjacent radii have nearly equal regret.

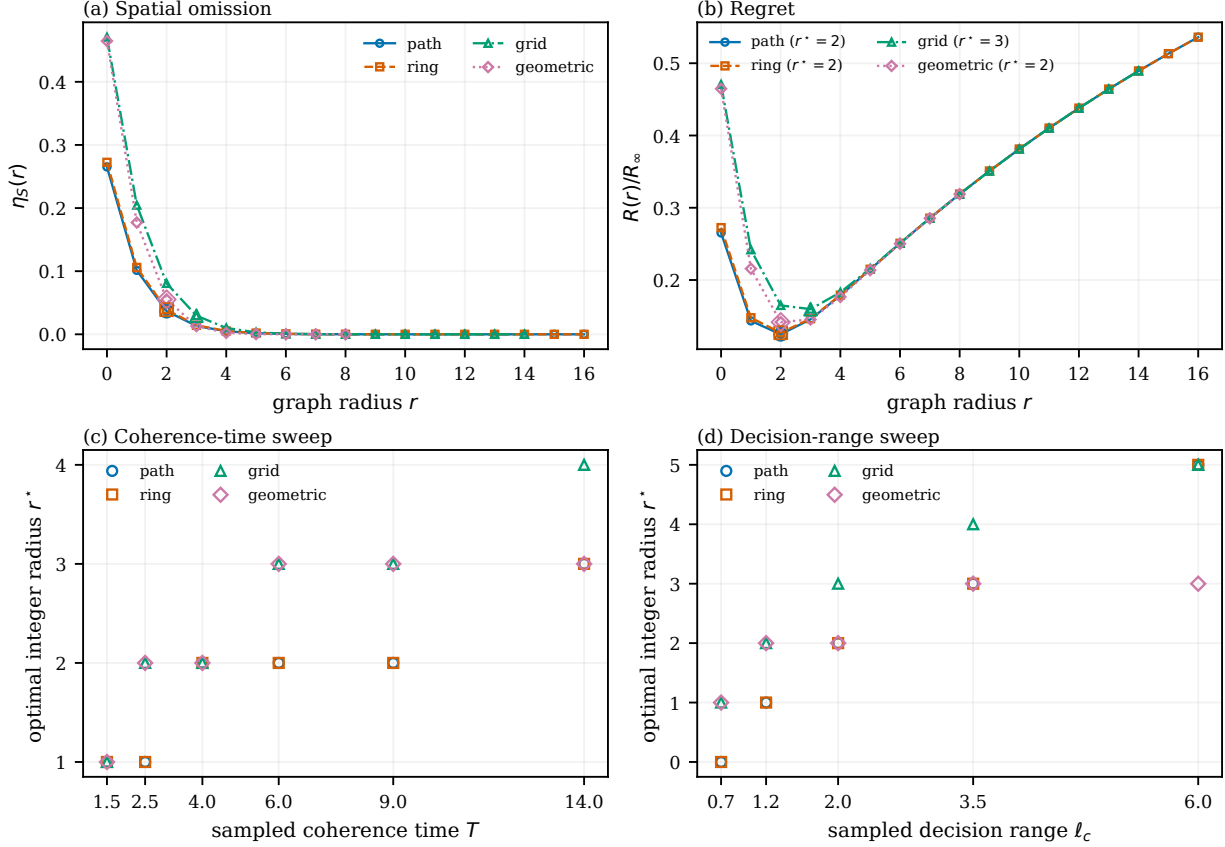


Figure 6: Finite noncanonical graphs. Top: $\eta_S(r)$ computed from exact Gaussian conditional covariances and the resulting regret under one common normalized setting; lines join integer-radius evaluations. Bottom: exact integer optima at the sampled coherence times and decision ranges; no transition locations between those settings are inferred. Distinct marker shapes identify coincident graph results. The canonical line closed form is not used.

7 Related Work

We organize the closest literatures around three distinctions: iterative computation versus information architecture, controlled dynamics versus an exogenous environment, and age-based freshness versus decision-relevant value. These distinctions frame the more specific connections developed below.

7.1 Static Team Decision Theory

Radner established foundational optimality conditions for static teams, in which decision makers share a common objective but act on different information [10]. Under appropriate convexity and regularity conditions, the resulting stationarity conditions are sufficient for global team optimality; in the quadratic Gaussian specialization, the optimal decision rules are affine [10, 11]. In the deterministic-Hessian quadratic model used here, these fixed-information optimality conditions admit the equivalent Hilbert-space formulation developed in Section 2.4: for a fixed information architecture $\mathcal{A}$, the team-optimal policy is the Q -orthogonal projection of the full-information action onto the closed subspace $\mathcal{S}(\mathcal{A})$ of implementable policies. This projection identity specializes the classical static-team framework to our quadratic model; Radner’s theorem is not stated in this literal form. Krainak, Speyer, and Marcus subsequently relaxed the sufficient conditions associated with Radner’s stationarity result and extended the theory to an exponential-quadratic criterion with jointly Gaussian state and observations [19]. In a companion paper, they formulated affine linear-quadratic-Gaussian and linear-exponential-Gaussian team problems as constrained parameter optimizations and represented optimal team gains as projections of the corresponding centralized gains [13].

Classical team theory also treated information itself as an organizational design object. Marschak and Radner analyzed the value of information, delayed information and the tradeoff between timeliness and completeness, and formulated team organization in terms of optimal networks [11]. More recently, Summers, Li, and Kamgarpour formulated information-structure design as the selection of additional measurements or communication links jointly with the corresponding team decision strategies [12]. Afshari and Mahajan characterized quadratic Gaussian static teams whose observations decompose into information common to all agents and agent-specific local information [20]. They subsequently applied this decomposition to team-optimal decentralized filtering over communication graphs with delayed information sharing, where sufficiently old measurements constitute common information while more recent measurements remain local [21]. Rusmevichientong and Van Roy studied large teams in which each agent observes the local cost structure only within a graph radius, using centralized performance as a benchmark [22]. Gamarnik, Goldberg, and Weber studied decentralized decisions based on local information in random decision networks and related their near-optimality to a correlation-decay, or long-range-independence, property [23].

Relative to these works, the distinctive object studied here is a structured family of information architectures in which spatial scope and temporal freshness are coupled through the scope–latency relation $\tau(r)$. Each spatial scope induces an acquisition delay, and the resulting architecture is valued through its prediction error for the full-information decision. This coupling yields the freshness–locality crossover and coordination-scale laws developed in Sections 3 and 5.

7.2 Distributed Optimization, Communication Constraints, and Scope

Distributed optimization studies how agents compute a common solution using local computation and message exchange. Classical asynchronous gradient methods allow delayed interprocessor

communication while retaining convergence guarantees under suitable boundedness conditions [24], while distributed subgradient methods establish convergence when agents exchange information locally over time-varying network topologies [3]. In these canonical formulations, the communication process constrains an iterative computation of an optimizer. Our setting separates that computational question from information architecture: the full-information decision at each epoch is the benchmark, and the object of design is the information available when that decision must be made.

Networked and decentralized control place communication restrictions directly in the feedback loop, including sampling, packet loss, communication topology, and delay [25]. For spatially invariant plants, early work showed that optimal controllers can exhibit inherent spatial localization [5], while subsequent work imposed explicit finite-speed communication structure. Arbelaiz, Bamieh, Hosoi, and Jadbabaie characterize the spatial decay of optimal estimator gains, using the decay rate as a proxy for the distance over which measurements are useful in a spatially distributed dynamic estimation problem [26]. Voulgaris, Bianchini, and Bamieh studied H_2 control under delayed communication requirements [6]; Bamieh and Voulgaris formulated distance-dependent information propagation through funnel causality [7]; and Fardad and Jovanović developed state-space models for distributed controllers with finite communication speed [8]. These works are important antecedents to our use of spatial scope and propagation time, but they optimize dynamic feedback for controlled plants rather than information-constrained stage decisions in an exogenous environment.

Communication structure has also been treated as a design variable. Langbort and Gupta study interconnection topology when communication is assigned a topology-dependent cost [27], and Matni co-designs communication-delay structure and H_2 control using regularization [28]. In wireless consensus, Vanka, Gupta, and Haenggi explicitly trade communication radius against interference-induced delay and show that the preferred connectivity depends on network geometry [29]. Most directly, Ballotta, Jovanović, and Schenato parameterize control architectures by communication scope: each agent receives measurements from nodes within a chosen number of communication hops, with an architecture-dependent delay that increases with that scope. After optimizing the feedback gains for each scope, they show that sparse architectures can outperform all-to-all feedback [9]. Ballotta and Gupta obtain an analogous conclusion when maximizing consensus convergence speed under hop-dependent communication delay [30]. These results establish that scope-dependent delay can itself induce a sparse or intermediate optimal control architecture.

Our setting differs in the decision problem: an exogenous-state static team, with the current full-information action as the benchmark and an architecture valued by the prediction error it induces for that action. This yields the decision-relevant spatial omission function $\eta_S(r)$, temporal unpredictability $\eta_T(\tau)$, their exact common-rate composition law, and the fresh-local versus stale-global and coordination-radius laws derived above. Ballotta, Arbelaiz, Gupta, Schenato, and Jovanović study a different but complementary question for spatially invariant dynamic plants: how delayed measurements from different spatial locations alter the spatial locality of the optimal feedback kernel [31]. Their results operate through closed-loop plant dynamics and controller localization, whereas ours operate through prediction of an exogenously varying full-information decision.

7.3 Freshness and Age of Information

Age of Information (AoI) formalizes the timeliness of status information through the age of the freshest received update, $\Delta(t) = t - u(t)$. Seminal work showed that minimizing AoI is distinct from maximizing throughput or minimizing packet delay and initiated a large literature on update generation, queueing, and scheduling [2,32]. Subsequent work generalized linear age to application-specific nonlinear age penalties [33]. Connections to remote estimation make the distinction between

age and task loss explicit: for a Gauss–Markov Ornstein–Uhlenbeck process, estimation error under signal-agnostic sampling is a nonlinear function of age, whereas signal-aware sampling can exploit the realized estimation error and outperform age-optimal policies [14].

More recent work has pushed freshness metrics toward task-aware objectives. Shisher et al. showed that remote-inference loss can be nonmonotonic in age and designed communication policies around inference performance [34]; subsequent work considers correlated sources for which inference penalties depend jointly on multiple sources’ ages [35]. Li et al. go further toward decision-aware freshness by jointly optimizing sampling and remote decision making under stale observations [36]. Those works optimize when or which updates reach a fixed remote receiver; we instead choose the information architecture available to a decentralized team: what is observed, from what spatial scope, and at what age. Because broader scope itself incurs greater acquisition delay, spatial omission and temporal staleness are coupled by the architecture. This leads to the fresh-local versus stale-global crossover and optimal coordination-scale results developed here.

7.4 Centralization, Delegation, and Organizational Economics

A closely related organizational-economics literature asks how dispersed information, communication constraints, and decision rights determine organizational form. Aoki compares hierarchical and horizontal information structures when local conditions are uncertain and central monitoring or response is limited [37]. In the information-processing tradition, Radner studies organizations of limited-capacity processors trading off processing resources against decision delay [38]; Bolton and Dewatripont derive communication networks from processing and communication costs [39]; and Van Zandt studies real-time decentralized processing in which computational delay constrains the use of recent information [40]. Dessein and Santos likewise study adaptation to local information versus coordination under imperfect communication [41].

A complementary delegation literature makes decision rights endogenous when information and objectives are dispersed. Aghion and Tirole distinguish formal from real authority [42], while Dessein studies delegation as an alternative to strategic communication [43]. Most closely related to our centralization framing, Alonso, Dessein, and Matouschek compare centralized and decentralized coordination when managers privately observe local conditions [4]. Our model abstracts from incentive conflicts and endogenous information acquisition: agents share a common objective and the environment evolves exogenously. The tradeoff studied here is spatio-temporal: broader synchronized snapshots can improve coordination but arrive older. This yields a pure-benchmark crossover and, in the canonical spatial model, an interior optimum within the synchronized-snapshot family.

7.5 Spatial Statistics and Graph Signal Processing

Spatial statistics provides the closest statistical antecedent to our spatial-predictability model. Kriging casts spatial prediction as an optimal linear prediction problem under spatial dependence [44]. For lattice data, Besag’s conditional formulation represents spatial dependence through local Markov neighborhoods [45]; Lindgren, Rue, and Lindström later connect Matérn Gaussian fields to sparse Gaussian Markov random fields through stochastic partial differential equation representations [18]. Space–time statistics treats separability as an optional modeling restriction: Gneiting constructs broad classes of stationary nonseparable covariance functions [16]. These works provide the statistical context for our covariance-based spatial model and its separable and non-separable distinction.

Graph signal processing extends analogous ideas to irregular domains. Shuman et al. use graph-Laplacian eigenvectors to define a graph Fourier domain and associate low graph frequencies with

signals that vary slowly over the graph [17]. Graph-sampling theory asks when bandlimited graph signals can be exactly recovered from partial observations [46], while stationary graph signal processing gives spectral descriptions and Wiener-type estimators for random graph signals [47]. Our objective is different: we do not value accurate reconstruction of θ_t per se. A radius- r architecture is evaluated by its loss in reproducing the full-information decision x_t^* , and increasing r also increases information age through $\tau(r)$. Thus spatial omission and temporal staleness are priced jointly, and graph-smooth modes matter only insofar as they are decision-relevant.

8 Discussion and Conclusions

What the theory establishes. The central constraint in networked decision making is that information breadth and freshness generally cannot be chosen independently. Nearby observations can be used quickly but may omit remote state needed for coordination; a broader view can improve coordination but loses predictive value while it is collected and disseminated. Architecture regret measures this loss relative to the full-information decision after optimizing over every policy implementable under the architecture.

Theorem 2 characterizes the fresh-local versus stale-global endpoints. Proposition 2 gives the interior marginal-balance condition for the synchronized-snapshot radius, and Theorem 4 gives its closed-form scaling law in the canonical model. Normalization by open-loop regret separates the overall scale of the decision problem from the fraction of decision-relevant variation preserved by an architecture, enabling comparisons across modeled systems.

The fixed-covariance comparison in Section 6.4 shows the design consequence of decision relevance: changing only the target operator moves the preferred scope. Graph distance governs acquisition, while the objective determines the value of the acquired information. This suggests architectures that target remote decision-relevant modes rather than simply expanding physical neighborhoods.

Scope and limitations. The static-team boundary allows the fixed-architecture projection benchmark. When actions affect later observations, they may also signal information; the dynamic-team extension is discussed below. The principal family uses synchronized snapshots, while mixed-age and history-based architectures can retain information that these snapshots discard. Stationarity makes the expected snapshot regret time-invariant; the projection at a fixed epoch does not require it, and long-run sample-path averages additionally require ergodicity.

The projection identity assumes quadratic costs, a deterministic positive-definite Hessian, and unconstrained Euclidean actions. The explicit stale-global and composition laws additionally require affine full-information decisions and a stationary common-rate innovation structure with conditionally mean-zero innovations. Gaussianity is used to evaluate spatial prediction errors from covariances in the canonical model and Experiments 5–6; the canonical radius formula further uses a separable homogeneous field and linear propagation delay. Nonquadratic or discrete decisions, state-dependent Hessians, and feasibility constraints such as nonnegativity, capacity, or simplex restrictions require different analytical tools. Outside the stated assumptions, one should work directly with decision-relevant prediction-error functions or suitable bounds rather than assume the same factorization.

The experiments do not probe temporal-rate heterogeneity, nonseparable covariance, non-Gaussian evolution, nonlinear decisions, or mixed-age architectures; each remains an extension.

Finally, the common-rate assumption suppresses possible alignment between temporal coherence, spatial scale, and decision relevance. If long-range decision-relevant modes evolve more slowly

than local modes, a scalar common-rate approximation may understate the value of broad delayed information; the reverse alignment may overstate it. There is no universal direction of bias without specifying the mode weights and the procedure used to select an effective coherence time. With heterogeneous temporal modes, the scalar composition law generally gives way to a joint spatio-temporal decision-prediction error.

Most important extensions. A first extension is to price information acquisition explicitly. The present model represents communication and sensing constraints mainly through the feasible scope–delay relationship. Adding an acquisition cost or budget could produce sparse, nonuniform topologies and compressed summaries that preserve decision-relevant modes with less latency.

A second extension is adaptation to unknown or nonstationary statistics. Temporal coherence, spatial predictability, and decision sensitivity may need to be estimated online while the architecture changes on a slower timescale than operational decisions. The challenge is to account for estimation uncertainty while retaining a stable architecture-selection rule.

The most important extension is action-dependent state evolution and dynamic teams, where actions alter future state and may signal information to other agents. Extending information-architecture design beyond the exogenous-state baseline is therefore not a routine modification. Witsenhausen’s counterexample [48] explains why: once control and signaling interact, the fixed-subspace projection characterization generally no longer solves the team problem.

Design implication. Taken together, the theory yields a practical design heuristic: expand information scope as long as the marginal decision value of broader information exceeds the predictive value lost in obtaining it.

AI Use Statement. The development of this paper made substantial use of AI tools, including Claude Code, ChatGPT/Codex, Gemini, and Grok, for drafting and revising text, developing code and figures, mathematical formulation and proofs. The human authors formulated the original problem, made substantial contributions throughout the paper’s development, reviewed the manuscript, and accept full responsibility for its contents.

Code and Data Availability. Appendices A–C provide detailed algebraic derivations and numerical reproducibility information. A separate mathematical companion in the repository provides background on the projection and stochastic-process tools used here. The manuscript source, numerical code, experiment configurations, processed reference results, and figure-generation pipeline are available in the public TINA repository at <https://github.com/ANRGUSC/TINA> [49].

References

- [1] M. Mitzenmacher, “How useful is old information?” *IEEE Transactions on Parallel and Distributed Systems*, vol. 11, no. 1, pp. 6–20, Jan. 2000.
- [2] S. Kaul, R. Yates, and M. Gruteser, “Real-time status: How often should one update?” in *2012 Proceedings IEEE INFOCOM*. IEEE, 2012, pp. 2731–2735.
- [3] A. Nedic and A. Ozdaglar, “Distributed subgradient methods for multi-agent optimization,” *IEEE Transactions on Automatic Control*, vol. 54, no. 1, pp. 48–61, 2009.

- [4] R. Alonso, W. Dessein, and N. Matouschek, “When does coordination require centralization?” *American Economic Review*, vol. 98, no. 1, pp. 145–179, 2008.
- [5] B. Bamieh, F. Paganini, and M. A. Dahleh, “Distributed control of spatially invariant systems,” *IEEE Transactions on Automatic Control*, vol. 47, no. 7, pp. 1091–1107, Jul. 2002.
- [6] P. G. Voulgaris, G. Bianchini, and B. Bamieh, “Optimal H2 controllers for spatially invariant systems with delayed communication requirements,” *Systems & Control Letters*, vol. 50, no. 5, pp. 347–361, Dec. 2003.
- [7] B. Bamieh and P. G. Voulgaris, “A convex characterization of distributed control problems in spatially invariant systems with communication constraints,” *Systems & Control Letters*, vol. 54, no. 6, pp. 575–583, Jun. 2005.
- [8] M. Fardad and M. R. Jovanović, “Design of optimal controllers for spatially invariant systems with finite communication speed,” *Automatica*, vol. 47, no. 5, pp. 880–889, May 2011.
- [9] L. Ballotta, M. R. Jovanović, and L. Schenato, “Can decentralized control outperform centralized? the role of communication latency,” *IEEE Transactions on Control of Network Systems*, vol. 10, no. 3, pp. 1629–1640, Sep. 2023.
- [10] R. Radner, “Team decision problems,” *The Annals of Mathematical Statistics*, vol. 33, no. 3, pp. 857–881, 1962.
- [11] J. Marschak and R. Radner, *Economic Theory of Teams*, ser. Cowles Foundation Monographs. New Haven, CT: Yale University Press, 1972, no. 22.
- [12] T. Summers, C. Li, and M. Kamgarpour, “Information structure design in team decision problems,” *IFAC-PapersOnLine*, vol. 50, no. 1, pp. 2530–2535, 2017.
- [13] J. C. Krainak, J. Speyer, and S. I. Marcus, “Static team problems—part II: Affine control laws, projections, algorithms, and the LEGT problem,” *IEEE Transactions on Automatic Control*, vol. 27, no. 4, pp. 848–859, 1982.
- [14] T. Z. Ornee and Y. Sun, “Sampling and remote estimation for the Ornstein–Uhlenbeck process through queues: Age of information and beyond,” *IEEE/ACM Transactions on Networking*, vol. 29, no. 5, pp. 1962–1975, 2021.
- [15] C. E. Rasmussen and C. K. Williams, *Gaussian Processes for Machine Learning*. MIT press Cambridge, MA, 2006.
- [16] T. Gneiting, “Nonseparable, stationary covariance functions for space–time data,” *Journal of the American Statistical Association*, vol. 97, no. 458, pp. 590–600, 2002.
- [17] D. I. Shuman, S. K. Narang, P. Frossard, A. Ortega, and P. Vandergheynst, “The emerging field of signal processing on graphs: Extending high-dimensional data analysis to networks and other irregular domains,” *IEEE Signal Processing Magazine*, vol. 30, no. 3, pp. 83–98, 2013.
- [18] F. Lindgren, H. Rue, and J. Lindström, “An explicit link between Gaussian fields and Gaussian Markov random fields: the stochastic partial differential equation approach,” *Journal of the Royal Statistical Society: Series B (Statistical Methodology)*, vol. 73, no. 4, pp. 423–498, 2011.

- [19] J. C. Krainak, J. Speyer, and S. I. Marcus, “Static team problems—part i: Sufficient conditions and the exponential cost criterion,” *IEEE Transactions on Automatic Control*, vol. 27, no. 4, pp. 839–848, 1982.
- [20] M. Afshari and A. Mahajan, “Static teams with common information,” *IFAC-PapersOnLine*, vol. 50, no. 1, pp. 11 926–11 931, 2017.
- [21] —, “Team optimal decentralized state estimation,” in *2018 IEEE Conference on Decision and Control (CDC)*. IEEE, 2018, pp. 5044–5050.
- [22] P. Rusmevichientong and B. Van Roy, “Decentralized decision-making in a large team with local information,” *Games and Economic Behavior*, vol. 43, no. 2, pp. 266–295, 2003.
- [23] D. Gamarnik, D. A. Goldberg, and T. Weber, “Correlation decay in random decision networks,” *Mathematics of Operations Research*, vol. 39, no. 2, pp. 229–261, 2014.
- [24] J. N. Tsitsiklis, D. P. Bertsekas, and M. Athans, “Distributed asynchronous deterministic and stochastic gradient optimization algorithms,” *IEEE Transactions on Automatic Control*, vol. 31, no. 9, pp. 803–812, Sep. 1986.
- [25] J. P. Hespanha, P. Naghshtabrizi, and Y. Xu, “A survey of recent results in networked control systems,” *Proceedings of the IEEE*, vol. 95, no. 1, pp. 138–162, Jan. 2007.
- [26] J. Arbelaiz, B. Bamieh, A. E. Hosoi, and A. Jadbabaie, “Optimal estimation in spatially distributed systems: How far to share measurements from?” *IEEE Transactions on Automatic Control*, vol. 70, no. 5, pp. 3226–3239, 2025. [Online]. Available: <https://doi.org/10.1109/TAC.2024.3504257>
- [27] C. Langbort and V. Gupta, “Minimal interconnection topology in distributed control design,” *SIAM Journal on Control and Optimization*, vol. 48, no. 1, pp. 397–413, 2009.
- [28] N. Matni, “Communication delay co-design in $\mathcal{H}_2$ -distributed control using atomic norm minimization,” *IEEE Transactions on Control of Network Systems*, vol. 4, no. 2, pp. 267–278, Jun. 2017.
- [29] S. Vanka, V. Gupta, and M. Haenggi, “Power-delay analysis of consensus algorithms on wireless networks with interference,” *International Journal of Systems, Control and Communications*, vol. 2, no. 1/2/3, pp. 256–274, 2010.
- [30] L. Ballotta and V. Gupta, “Faster consensus via a sparser controller,” *IEEE Control Systems Letters*, vol. 7, pp. 1459–1464, 2023.
- [31] L. Ballotta, J. Arbelaiz, V. Gupta, L. Schenato, and M. R. Jovanović, “The role of communication delays in the optimal control of spatially invariant systems,” *IEEE Transactions on Automatic Control*, vol. 71, no. 2, pp. 978–993, Feb. 2026.
- [32] R. D. Yates, Y. Sun, D. R. Brown, S. K. Kaul, E. Modiano, and S. Ulukus, “Age of information: An introduction and survey,” *IEEE Journal on Selected Areas in Communications*, vol. 39, no. 5, pp. 1183–1210, 2021.
- [33] Y. Sun, E. Uysal-Biyikoglu, R. D. Yates, C. E. Koksall, and N. B. Shroff, “Update or wait: How to keep your data fresh,” *IEEE Transactions on Information Theory*, vol. 63, no. 11, pp. 7492–7508, 2017.

- [34] M. K. C. Shisher, Y. Sun, and I.-H. Hou, “Timely communications for remote inference,” *IEEE/ACM Transactions on Networking*, vol. 32, no. 5, pp. 3824–3839, 2024.
- [35] M. K. C. Shisher, V. Tripathi, M. Chiang, and C. G. Brinton, “AoI-based scheduling of correlated sources for timely inference,” *IEEE Transactions on Networking*, vol. 34, pp. 2181–2195, 2026.
- [36] A. Li, S. Wu, G. C. F. Lee, and S. Sun, “From freshness to effectiveness: Goal-oriented sampling for remote decision making,” *IEEE Transactions on Information Theory*, vol. 72, no. 4, pp. 2237–2276, Apr. 2026. [Online]. Available: <https://doi.org/10.1109/TIT.2026.3663678>
- [37] M. Aoki, “Horizontal vs. vertical information structure of the firm,” *The American Economic Review*, vol. 76, no. 5, pp. 971–983, 1986.
- [38] R. Radner, “The organization of decentralized information processing,” *Econometrica: Journal of the Econometric Society*, vol. 61, no. 5, pp. 1109–1146, 1993.
- [39] P. Bolton and M. Dewatripont, “The firm as a communication network,” *The Quarterly Journal of Economics*, vol. 109, no. 4, pp. 809–839, 1994.
- [40] T. Van Zandt, “Real-time decentralized information processing as a model of organizations with boundedly rational agents,” *The Review of Economic Studies*, vol. 66, no. 3, pp. 633–658, 1999.
- [41] W. Dessein and T. Santos, “Adaptive organizations,” *Journal of Political Economy*, vol. 114, no. 5, pp. 956–995, 2006.
- [42] P. Aghion and J. Tirole, “Formal and real authority in organizations,” *Journal of Political Economy*, vol. 105, no. 1, pp. 1–29, 1997.
- [43] W. Dessein, “Authority and communication in organizations,” *The Review of Economic Studies*, vol. 69, no. 4, pp. 811–838, 2002.
- [44] N. Cressie, “The origins of kriging,” *Mathematical Geology*, vol. 22, no. 3, pp. 239–252, 1990.
- [45] J. Besag, “Spatial interaction and the statistical analysis of lattice systems,” *Journal of the Royal Statistical Society: Series B (Methodological)*, vol. 36, no. 2, pp. 192–225, 1974.
- [46] S. Chen, R. Varma, A. Sandryhaila, and J. Kovačević, “Discrete signal processing on graphs: Sampling theory,” *IEEE Transactions on Signal Processing*, vol. 63, no. 24, pp. 6510–6523, 2015.
- [47] N. Perraudin and P. Vandergheynst, “Stationary signal processing on graphs,” *IEEE Transactions on Signal Processing*, vol. 65, no. 13, pp. 3462–3477, Jul. 2017.
- [48] H. S. Witsenhausen, “A counterexample in stochastic optimum control,” *SIAM Journal on Control*, vol. 6, no. 1, pp. 131–147, 1968.
- [49] S. Moeller and B. Krishnamachari, “TINA: Reproduction package for “a theory of information architecture for networked decisions”,” GitHub repository, 2026, source code, data, figures, and manuscript materials. [Online]. Available: <https://github.com/ANRGUSC/TINA>

A Aggregate-coupling calculations

This section supplies the matrix arithmetic for Proposition 1 above. For $Q = qI + \gamma \mathbf{1}\mathbf{1}^\top$,

$$Q^{-1} = \frac{1}{q} \left(I - \frac{\gamma}{q + \gamma n} \mathbf{1}\mathbf{1}^\top \right).$$

Proof. Recall the coupled normal equations (24):

$$Q_{ii}u_i + \sum_{j \neq i} Q_{ij}\mathbb{E}[u_j \mid \mathcal{G}_i] = \mathbb{E}[b_i(\theta_t) \mid \mathcal{G}_i].$$

Here $Q_{ii} = q + \gamma$, $Q_{ij} = \gamma$ for $j \neq i$, and $b_i(\theta) = \theta_i$. Let $\mu_j = \mathbb{E}[u_j]$. For $j \neq i$, the policy u_j is a function of $\theta_{j,t}$, which is independent of $\theta_{i,t}$, so

$$\mathbb{E}[u_j \mid \mathcal{G}_{i,t}^{\text{loc}}] = \mathbb{E}[u_j] = \mu_j,$$

while $\theta_{i,t}$ is $\mathcal{G}_{i,t}^{\text{loc}}$ -measurable. The conditional normal equation (24) therefore gives

$$(q + \gamma)u_i + \gamma \sum_{j \neq i} \mu_j - \theta_{i,t} = 0.$$

Taking expectations yields

$$q\mu_i + \gamma \sum_j \mu_j = 0.$$

Summing over i implies $\sum_j \mu_j = 0$, hence every $\mu_i = 0$ and $u_i = \theta_{i,t}/(q + \gamma)$, which proves (45). This argument uses independence, zero means, square integrability, and strict convexity; Gaussianity is not required for the local-policy formula.

Open-loop regret. Here $B = I$ and $\Sigma_\infty = \sigma^2 I$, so by (39), $R_\infty = \frac{\sigma^2}{2} \text{tr}(Q^{-1})$. From the Sherman–Morrison formula above,

$$\text{tr}(Q^{-1}) = \frac{1}{q} \left(n - \frac{\gamma n}{q + \gamma n} \right) = \frac{n(q + \gamma(n - 1))}{q(q + \gamma n)},$$

which gives (46).

Local regret. By the Pythagorean form of Lemma 1 (the orthogonality identity after Lemma 1, with both $x^\star$ and u^{loc} mean zero), $2R_{\text{loc}} = \|x^\star\|_Q^2 - \|u^{\text{loc}}\|_Q^2 = 2R_\infty - \|u^{\text{loc}}\|_Q^2$. Since $u^{\text{loc}} = \theta/(q + \gamma)$ and $\text{tr}(Q) = n(q + \gamma)$,

$$\|u^{\text{loc}}\|_Q^2 = \frac{\sigma^2 \text{tr}(Q)}{(q + \gamma)^2} = \frac{n\sigma^2}{q + \gamma}.$$

Therefore

$$R_{\text{loc}} = \frac{n\sigma^2}{2} \left[\frac{q + \gamma(n - 1)}{q(q + \gamma n)} - \frac{1}{q + \gamma} \right] = \frac{n\sigma^2}{2} \cdot \frac{(q + \gamma(n - 1))(q + \gamma) - q(q + \gamma n)}{q(q + \gamma)(q + \gamma n)}.$$

The numerator reduces to $\gamma^2(n - 1)$, which gives (47).

Share. Dividing (47) by (46), the factors $n\sigma^2/2$ and $q(q + \gamma n)$ cancel, leaving (48). □

B Canonical spatial omission calculation

We expand the proof of Lemma 3 above, including the equal-inverse-length case in the variance integral.

Proof. By spatial stationarity, take $z = 0$ and suppress the time argument. Write $\beta_c \triangleq 1/\ell_c$ and $\beta_s \triangleq 1/\ell_s$ for the inverse lengths, so $w(u) = \frac{\beta_c}{2} e^{-\beta_c|u|}$ and $\text{Cov}(\theta(u), \theta(u')) = \sigma^2 e^{-\beta_s|u-u'|}$.

Step 0 (omission is a variance ratio). With $Q = qI$ the optimal policy given $\mathcal{O}_r$ is $\mathbb{E}[x^*(0) | \mathcal{O}_r]$. Its expected loss is $\frac{q}{2} \mathbb{E}[\text{Var}(x^*(0) | \mathcal{O}_r)]$. For a Gaussian field the conditional variance is a deterministic number: it does not depend on the observed values (companion Section 1.3). Since $R_\infty = \frac{q}{2} \text{Var}(x^*(0))$,

$$\eta_S(r) = \frac{\text{Var}(x^*(0) | \mathcal{O}_r)}{\text{Var}(x^*(0))}.$$

Step 1 (split into observed middle and two tails). Write $x^*(0) = M_r + T_r^+ + T_r^-$, where

$$M_r = \int_{-r}^r w(u) \theta(u) du, \quad T_r^+ = \int_r^\infty w(u) \theta(u) du, \quad T_r^- = \int_{-\infty}^{-r} w(u) \theta(u) du.$$

The middle M_r is computed from observed values, so it contributes no conditional variance.

Step 2 (rewrite the right tail). Substituting $u = r + s$,

$$T_r^+ = \frac{\beta_c}{2} e^{-\beta_c r} Y_r, \quad Y_r \triangleq \int_0^\infty e^{-\beta_c s} \theta(r + s) ds.$$

Step 3 (spatial Markov property). By Section 4, the field is Markov in z . Given the observed segment $[-r, r]$, the right tail $\{\theta(u) : u > r\}$ and the left tail $\{\theta(u) : u < -r\}$ are conditionally independent, and each depends on the segment only through its adjacent endpoint $\theta(r)$ or $\theta(-r)$. Therefore

$$\text{Var}(T_r^+ | \mathcal{O}_r) = \text{Var}(T_r^+ | \theta(r)), \quad \text{Var}(T_r^- | \mathcal{O}_r) = \text{Var}(T_r^- | \theta(-r)), \quad \text{Cov}(T_r^+, T_r^- | \mathcal{O}_r) = 0.$$

Step 4 (the tail variance does not depend on r). Define $C \triangleq \text{Var}(Y_0 | \theta(0))$. Shifting the field by r does not change its law, so $\text{Var}(Y_r | \theta(r)) = C$ for every r . By reflection symmetry (the covariance depends only on $|u - u'|$), the left tail gives the same value. Hence

$$\text{Var}(x^*(0) | \mathcal{O}_r) = 2 \left(\frac{\beta_c}{2} \right)^2 e^{-2\beta_c r} C = \frac{\beta_c^2}{2} e^{-2\beta_c r} C.$$

At $r = 0$ the same argument applies with $\mathcal{O}_0 = \sigma(\theta(0))$ and $M_0 = 0$, giving $\text{Var}(x^*(0) | \theta(0)) = \frac{\beta_c^2}{2} C$. Dividing, $\eta_S(r) = \eta_S(0) e^{-2\beta_c r} = \eta_S(0) e^{-2r/\ell_c}$. The unknown constant C cancels, so it never has to be computed.

Step 5 (the constant $\eta_S(0)$). Conditioning on the single Gaussian variable $\theta(0)$ gives $\text{Var}(x^*(0) | \theta(0)) = \text{Var}(x^*(0)) (1 - \text{Corr}(x^*(0), \theta(0))^2)$ (companion Section 1.3), so $\eta_S(0) = 1 - \text{Corr}^2$. Two moments are needed.

Covariance with the local value:

$$\text{Cov}(x^*(0), \theta(0)) = \int_{\mathbb{R}} w(u) \sigma^2 e^{-\beta_s|u|} du = \frac{\sigma^2 \beta_c}{2} \int_{\mathbb{R}} e^{-(\beta_c + \beta_s)|u|} du = \frac{\sigma^2 \beta_c}{\beta_c + \beta_s}.$$

Variance of the target: $\text{Var}(x^*(0)) = \frac{\sigma^2 \beta_c^2}{4} I$, where $I \triangleq \iint e^{-\beta_c(|u|+|v|) - \beta_s|u-v|} du dv$.

To evaluate I , define the inner integral $h(u) \triangleq \int_{\mathbb{R}} e^{-\beta_c|v|} e^{-\beta_s|u-v|} dv$. Then h is even, so $I = 2 \int_0^\infty e^{-\beta_c u} h(u) du$. For $u \geq 0$, split the v -integral at 0 and u :

$$h(u) = \underbrace{\frac{e^{-\beta_s u}}{\beta_c + \beta_s}}_{v < 0} + \underbrace{\frac{e^{-\beta_c u} - e^{-\beta_s u}}{\beta_s - \beta_c}}_{0 \leq v \leq u} + \underbrace{\frac{e^{-\beta_c u}}{\beta_c + \beta_s}}_{v > u}.$$

(The middle term is read as $u e^{-\beta_c u}$ when $\beta_s = \beta_c$.) Multiply by $e^{-\beta_c u}$ and integrate over $u \geq 0$ term by term:

$$\frac{1}{(\beta_c + \beta_s)^2}, \quad \frac{1}{\beta_s - \beta_c} \left(\frac{1}{2\beta_c} - \frac{1}{\beta_c + \beta_s} \right) = \frac{1}{2\beta_c(\beta_c + \beta_s)}, \quad \frac{1}{2\beta_c(\beta_c + \beta_s)}.$$

Summing and doubling,

$$I = 2 \left[\frac{1}{(\beta_c + \beta_s)^2} + \frac{1}{\beta_c(\beta_c + \beta_s)} \right] = \frac{2(2\beta_c + \beta_s)}{\beta_c(\beta_c + \beta_s)^2}, \quad \text{Var}(x^*(0)) = \frac{\sigma^2 \beta_c (2\beta_c + \beta_s)}{2(\beta_c + \beta_s)^2}. \quad (\text{B.1})$$

Combine. With $\text{Var}(\theta(0)) = \sigma^2$,

$$\text{Corr}^2 = \frac{(\sigma^2 \beta_c / (\beta_c + \beta_s))^2}{\sigma^2 \cdot \sigma^2 \beta_c (2\beta_c + \beta_s) / (2(\beta_c + \beta_s)^2)} = \frac{2\beta_c}{2\beta_c + \beta_s}, \quad \eta_S(0) = \frac{\beta_s}{2\beta_c + \beta_s} = \frac{\ell_c}{\ell_c + 2\ell_s}.$$

□

C Numerical reproducibility details

This section records settings, estimators, grids, normalization conventions, and diagnostics for the six experiments in Section 6 which reports the findings and their interpretation. Each calculation evaluates architecture regret under the corresponding information structure: a common delayed snapshot in Experiment 1, the exact fresh-local rule in Experiment 2, scalar composition in Experiments 3–4, and agentwise Gaussian conditioning with $Q = I$ in Experiments 5–6. Normalized losses use the analytical open-loop regret R_∞ ; Experiment 2 instead estimates its boundary from paired sample means. Pointwise Monte Carlo means have 95% normal intervals $\bar{L} \pm 1.96 s_L / \sqrt{N}$, with sample standard deviation s_L . Conditioning uses linear solves rather than explicit matrix inverses.

Table 3: Reference numerical settings. The shared-resource sweep fixes $q = 1$; graph covariances in Experiments 5–6 are scaled to average marginal variance one. Quantities not being swept retain the experiment-specific values in the configuration files.

Experiment	principal sweep	fixed setting/size	evaluation
1. Temporal pairs	$\tau/T \in [0, 3]$ (25 points)	A–D; $n = 8, 20, 50, 32$	20,000/point
2. Local–global	9 γ/q values in $[0, 10]$	$n = 5, 10, 25, 100$; $q = 1$	30,000/setting
3. Scalar radius	$r/\ell_c \in [0, 2]$ (1,001 points)	3 regimes; $D/\ell_c = 2$	50,000/point
4. Canonical map	$(vT/\ell_c, \ell_s/\ell_c)$; 72×68	$r/\ell_c \in [0, 4]$; $\Delta r = 0.0016$	direct scalar
5. Decision relevance	$\ell_c = 0.7, 2, 6$	64-node ring; $T = 6$	12,000/check
6. General graphs	path, ring, grid, geometric	64 nodes; $T = 5$	exact covariance

1. Temporal scaling. At each of 25 equally spaced $\rho = \tau/T \in [0, 3]$, each system uses 20,000 independent stationary OU pairs: $\theta_t = e^{-\rho}\theta_{t-\tau} + \sqrt{1 - e^{-2\rho}}\varepsilon$, where $\theta_{t-\tau}$ and ε are independent $\mathcal{N}(0, \Sigma_S)$ draws. Systems A–D have dimensions 8, 20, 50, and 32 and respectively identity, Toeplitz, ring-Laplacian, and geometric-graph covariances; their matrices are archived in `numerics/results/raw/exp01_system_matrices.npz`. The known optimal delayed-snapshot action is evaluated in each system’s Q -metric; no time stepping or burn-in is needed.

2. Fresh-local/stale-global crossover. We fix $q = 1$ and use $n \in \{5, 10, 25, 100\}$. The nine coupling ratios are $\gamma/q \in \{0, 0.05, 0.1, 0.2, 0.5, 1, 2, 5, 10\}$. At each setting, 30,000 independent current-state draws give paired open-loop and fresh-local losses, using $u_i = \theta_i/(q + \gamma)$. Writing their means as $o = \hat{R}_\infty$ and $l = \hat{R}_{\text{loc}}$, the estimator is $\hat{\rho}^* = \frac{1}{2} \log[o/(o - l)]$. Its 95% delta-method interval is $\hat{\rho}^* \pm 1.96\sqrt{g^\top C g/N}$, where C is the sample covariance of the paired losses and

$$g = \left(-\frac{l}{2o(o - l)}, \frac{1}{2(o - l)} \right)^\top.$$

The paired covariance is retained; $o - l \leq 0$ is rejected rather than clipped. The zero-coupling boundary is zero and is omitted from the logarithmic plot.

3. Three radius regimes. The scalar calculation uses $\eta_S(r) = \eta_0 e^{-2r/\ell_c}$, $\tau(r) = r/v$, $\ell_c = 1$, and $D = 2$, with $(\eta_0, vT) = (0.25, 0.2), (0.7, 4), (0.9, 100)$. The radius grid has spacing 0.002. At each point, 50,000 pairs of independent standard normals are scaled by the square roots of the normalized components R_T/R_∞ and R_S/R_∞ in (73)–(74), then added and squared. This checks scalar variance composition; it does not simulate a spatial field.

4. Canonical regime map. The logarithmic parameter grid has 72×68 points over $vT/\ell_c \in [0.1, 20]$ and $\ell_s/\ell_c \in [0.05, 5]$. At every point, direct scalar evaluation of (65) uses the same radius grid $r/\ell_c = 0.0016j$, $j = 0, \dots, 2500$, without an adaptive radius range or covariance simulation. The maximum grid-versus-closed-form error is 8.00×10^{-4} ; five zero/positive classifications disagree adjacent to the threshold, where the continuous optimum is below the first positive grid point.

5. Decision relevance. The graph and covariance are fixed on a 64-node ring, with $T = 6$ and latency 0.12 per hop. For $\ell_c \in \{0.7, 2, 6\}$ the operator is $K_{ij} = e^{-d_G(i,j)/\ell_c} / \|e^{-d_G(i,\cdot)/\ell_c}\|_2$. With $Q = I$, exact Gaussian conditioning gives spatial omission; 12,000-sample checks evaluate selected radii. Each operator has its own analytical $R_\infty = \frac{1}{2} \text{tr}(K \Sigma_S K^\top)$. Raw state correlation is computed separately from the fixed covariance.

6. Finite graphs. One 64-node path, ring, grid, and geometric graph is used, with geometric-graph seed 20260839. For both graph experiments, $\Sigma_S \propto (\kappa_s^2 I + L_G)^{-\nu}$ is scaled to average marginal variance one; $(\kappa_s, \nu) = (0.75, 1.5)$ in Experiment 5 and $(0.8, 1.5)$ here. The reference setting uses $Q = I$, $T = 5$, $\ell_c = 2$, and latency 0.12 per hop. Exact Gaussian conditioning evaluates every integer radius through the graph diameter, with no canonical-line fit or graph-ensemble averaging. Neighbor regret differences and parameter sweeps are archived in `numerics/results/processed/exp06_general_graphs.csv` and `numerics/results/processed/exp06_comparative_statics.csv`.

Reproduction and audit. The public TINA repository contains `numerics/config/experiment_01.yaml` through `experiment_06.yaml`, with seeds 20260823 through 20260828, and run metadata in `numerics/results/metadata/`. The archive includes selected raw arrays, not every random draw. `docs/numerical_method.md` and `docs/experiment_parameters.md` specify system construction, conditioning safeguards, sweeps, and environment versions; `numerics/README.md` gives reproduction commands.