

Universal manuscript template for Optica Publishing Group journals

YASUTAKA IMAI,^{1,*}

¹Reserch Institute for Interdisciplinary Science, Okayama University, Okayama, Japan

*imai1117@okayama-u.ac.jp

Abstract: We reported a single stage 976 nm Yb-doped fiber amplifier(YDFA) and a double stage 1112 nm YDFA with commercially available Yb-doped fibers. Both YDFAs achieved stable several Watts continuous-wave(CW) outputs. Although the design was for doped fiber amplifiers at different wavelengths, simulation-based estimates were valid for both amplifiers.

© 2022 Optica Publishing Group under the terms of the [Optica Publishing Group Publishing Agreement](#)

1. Introduction

not yet

2. Experimental setup

2.1. 976 nm amplifier system

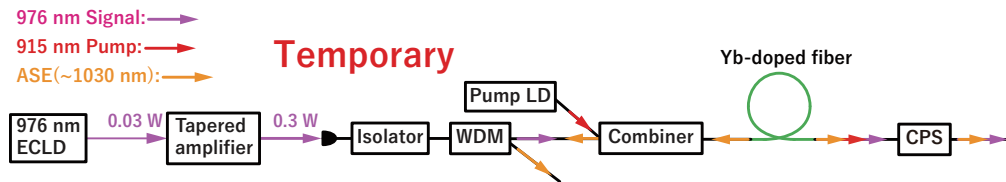


Fig. 1. 976 nm YDFA system.

A schematic of the 976 nm YDFA system is shown in Fig. 1. An external-cavity laser diode(ECLD) at 976 nm is used for the seed laser. The seed laser is pre-amplified by tapered amplifier from 30 mW to 900 mW, and coupled to the YDFA input fiber which is a polarization maintining(PM) fiber with a FPC/AC connector. The seed input of the YDFA is connected to an isolator and a wavelength division multiplexing(WDM) filter, which are used to block return light to the seed laser such as backward ASE. The seed and pump are combined into a double cladding PM fiber, which has a core diameter of 20 μm and a cladding diameter of 125 μm by a pump and signal combiner. The 915 nm radiation for pumping the Yb-doped fiber is generated from fiber-coupled laser diode with an output power of up to 70 W. The combiner output is spliced to the Yb-doped fiber. The Yb-doped fiber nLIGHT Yb1200-25/125DC-PM is used as the gain fiber. The fiber is fixed on top of the water-cooled heatsink with a thermal conductive sheet. The cladding power stripper(CPS) is connected after Yb-doped fiber to remove a residual pump power in the output of Yb-doped fiber. The output of YDFA system collimated by pigtailed collimator is separated into the ASE around 1030 nm and other wavelengths by a filter.

2.2. 1112 nm amplifier system

The configuration of the 1112 nm YDFA system is shown in Fig. 2. The 1112 nm YDFA system consists of a two-stage amplifier. The fiber laser at 1112 nm(Menlo systems Orange one-2) is used as the seed laser. In the first stage, the seed laser and the pump laser, which is generated by fiber-coupled laser diode at 976 nm with a maximum output of 7 W, are mixed with the first

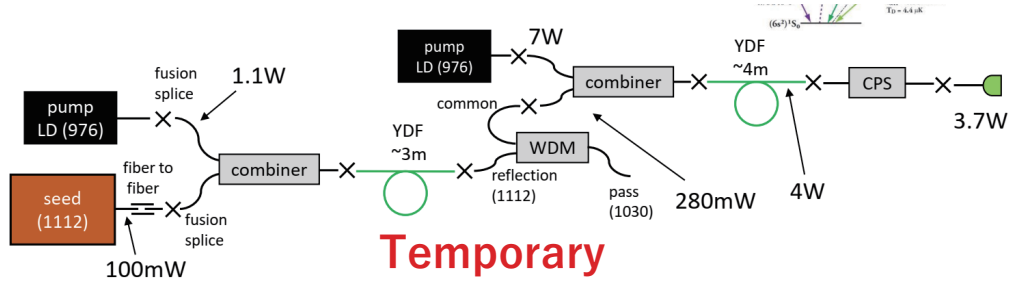


Fig. 2. 1112 nm YDFA system.

combiner. The first combiner has a signal port, two pump ports, and a common port, which are a single-mode fiber of 5.8/125 μm , multi-mode fibers of 105/125 μm , and a double-cladding fiber 10/125 μm . The seed power at the common port of the first combiner is 80 mW. The Yb-doped fiber (nLIGHT Yb1200-10/125DC) is used as a gain fiber. The length of the Yb-doped fiber is about 1 m. The output from Yb-doped fiber is separated into 1112 nm signal component and ASE component around 1030 nm by WDM, and only the 1112 nm signal component is coupled to the second amplifier stage. The second Yb-doped fiber is the same one of the first Yb-doped fiber. The about 3 m long doped fiber is coiled to a diameter of 10 cm and fixed inside an aluminum enclosure with thermal conductive sheet. Temperature of the aluminum enclosure is controlled by peltier devices. Output of the second Yb-doped fiber is removed by CPS and collimated by pigtailed collimator.

3. Results and discussion

3.1. 976 nm YDFA

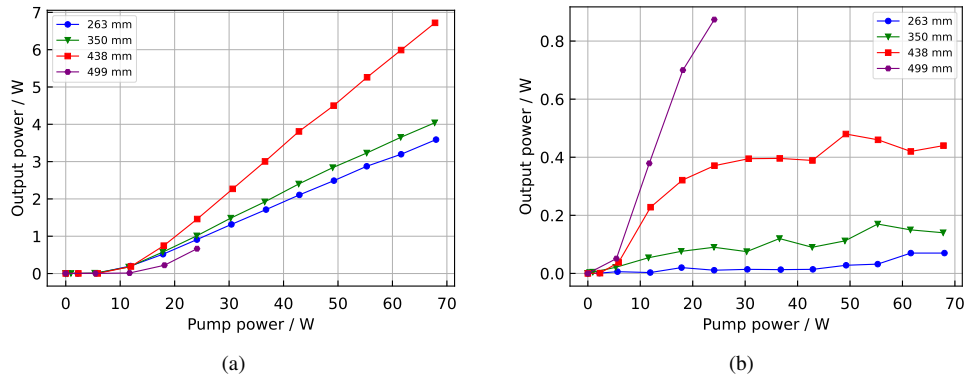


Fig. 3. Measured 976 nm and ASE around 1030 nm power as a function of the launched 915 nm pump power.

We measured the output of YDFAs with the 263 mm, 350 mm, 438 mm, and 499 mm length of Yb-doped fibers at pump powers up to about 70 W. The output powers are shown in Fig. 3. As increasing the length of Yb-doped fiber, the 976 nm output power increases, reaching maximum at length of 438 mm. For the 438 mm fiber, the gain of 976 nm began to exceed 1 at the pump power of 12 W, and 6.7 W output of 976 nm was achieved with a slope efficiency of 0.12. The maximum 976 nm gain corresponds to 14.5 dB. In the test of 976 nm fiber, we applied the pump power less than 25 W because the ASE power significantly increased.

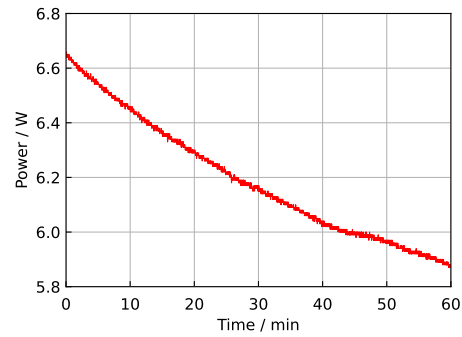


Fig. 4. Measured output power of the 976 nm fiber amplifier as a function of the launched 915 nm pump power and results of the simulation.

Figure 4 shows 976 nm output stability of the 438 mm Yb-doped fiber. The output decays in time to decrease by about 12% of its original power after 60 min. This is mainly due to photodarkening caused by the high-inversion distribution of Yb ion [1]. To avoid power decay by photodarkening, we tested Yb-doped phosphosilicate fiber(Coractive, DCF-YB-20/128P-FAC). We measured the output of the Yb-doped fiber by changing the fiber length, and obtained the results shown in the Fig. 5. The 976 nm output power reached a maximum of 5.3 W at the 172 mm length fiber.

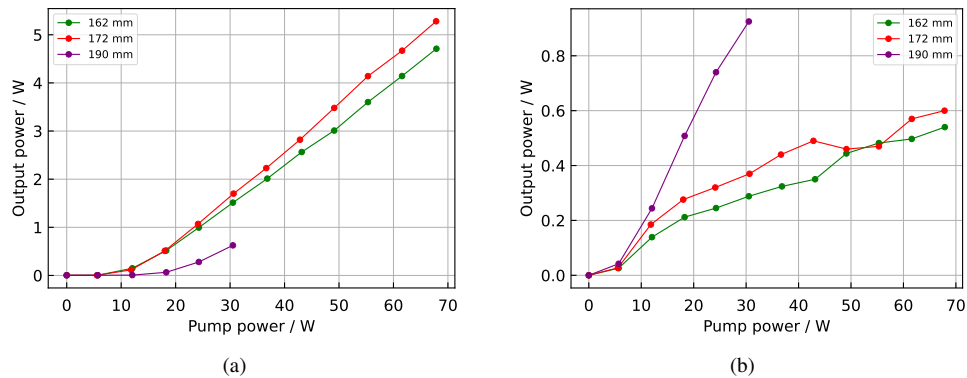


Fig. 5. Measured 976 nm and ASE around 1030 nm power as a function of the launched 915 nm pump power.

3.2. 1112 nm YDFA

4. Discussion

5. Conclusion

Funding. Content in the funding section will be generated entirely from details submitted to Prism Authors may add placeholder text in the manuscript to assess length, but any text added to this section in the manuscript will be replaced during production and will display official funder names along with any grant numbers provided If additional details about a funder are required, they may be added to the Acknowledgments, even if this duplicates information in the funding section See the example below in Acknowledgements.

Acknowledgments. Acknowledgments should be included at the end of the document The section

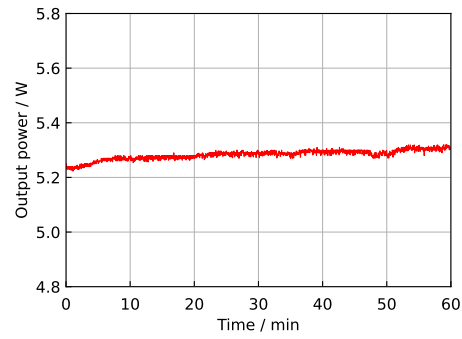


Fig. 6. Measured output power of the 976 nm fiber amplifier as a function of the launched 915 nm pump power and results of the simulation.

71 title should not follow the numbering scheme of the body of the paper Additional information crediting
 72 individuals who contributed to the work being reported, clarifying who received funding from a particular
 73 source, or other information that does not fit the criteria for the funding block may also be included; for
 74 example, “K. Flockhart thanks the National Science Foundation for help identifying collaborators for this
 75 work.”

76 References

- 77 1. R. Paschotta, J. Nilsson, P. R. Barber, J. E. Caplen, A. C. Tropper, and D. C. Hanna, “Lifetime quenching in Yb-doped
 78 fibres,” *Opt. Commun.* **136**, 375–378 (1997).