

IT Support of XF

2025 Oct

1. Production-Line Application

Refer to this section for installing Production applications of every Production Line.

1.1. Installation Guidelines

- Identify your production area in the Application Reference Table below.
- Click the appropriate Installation Link.
- Download and run the setup.exe installer.
- Follow on-screen prompts to complete installation.
- Verify printer connection using the static IP listed for your area.

1.2. Important Configuration Notes

- Do not manually add printers.
- All label printers use static IP addresses.
- Only update IP if printer hardware has been replaced.

1.3 Application Reference Table

Section	Area	Label Printer IP (Large)	Label Printer IP (Small)	Installation Link
Coextrusion	COEX	172.17.30.91		appprod.inteplast.com - /appProduction/XF/CoExtrusion/
Spiral-Cut	Spiral-Cut	172.17.30.92		appprod.inteplast.com - /appProduction/XF/SpiralCut/
Stretch-Lamination	Stretch-Lamination	172.17.30.93		appprod.inteplast.com - /appProduction/XF/StretchLamination/
G-Lamination	G-Lamination	172.17.30.94		appprod.inteplast.com - /appProduction/XF/GLaminator/
Slitting	HA 12&13	172.17.30.167	172.17.31.65	appprod.inteplast.com - /appProduction/XF/Slitting/
Slitting	HA 14	172.17.30.97	172.17.30.96	appprod.inteplast.com - /appProduction/XF/Slitting/
Slitting	HA 15	172.17.30.98	172.17.30.98	appprod.inteplast.com - /appProduction/XF/Slitting/
Shipping	Shipping	172.17.30.55		appprod.inteplast.com - /appProduction/XF/Schedule/
Edge-Lamination	Edge-Lamination	172.17.30.103	172.17.30.102	appprod.inteplast.com - /appProduction/XF/EdgeLamination/
Printing & VF	Printing & VF	172.17.30.101	172.17.30.100	appprod.inteplast.com - /appProduction/XF/Printing/

1.4 Installation Visual Guide

Directory Path:

<https://appprod.inteplast.com/appProduction/XF/>

Steps:

- Select the correct application folder
- Follow below image for visual step-by-step instructions on downloading the application **setup.exe** file

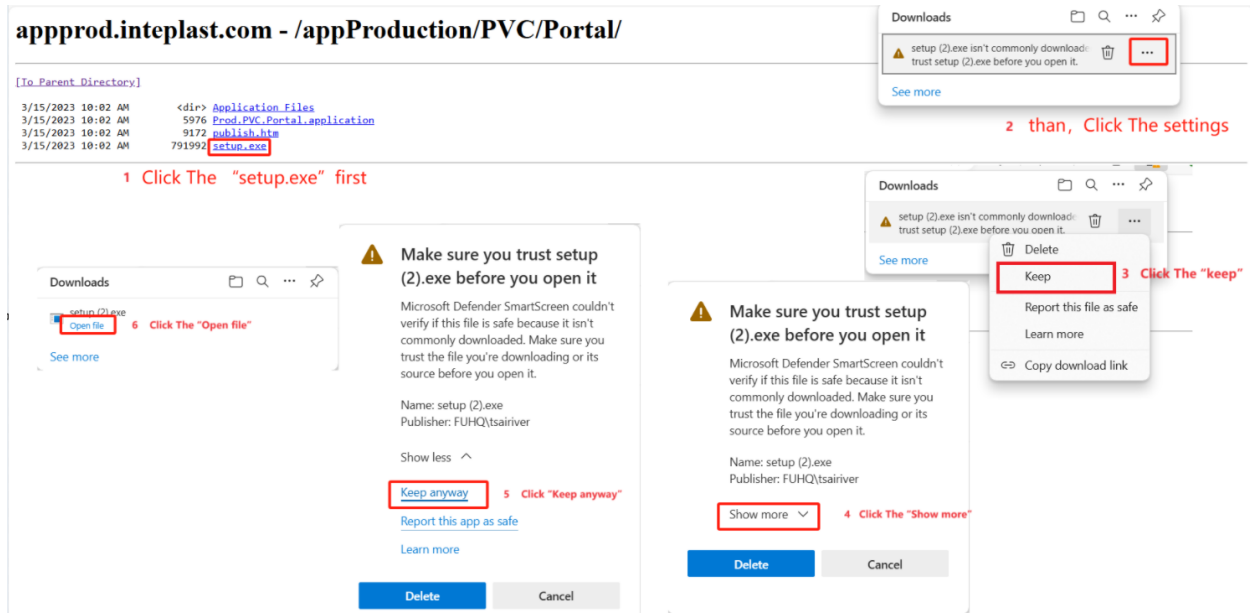


Figure 1-1: Downloading and Keep the Application. Setup File - Demonstrates how to click the link to download and keep the setup.exe file.

- Follow below image for visual step-by-step instructions on running the application **setup.exe** file

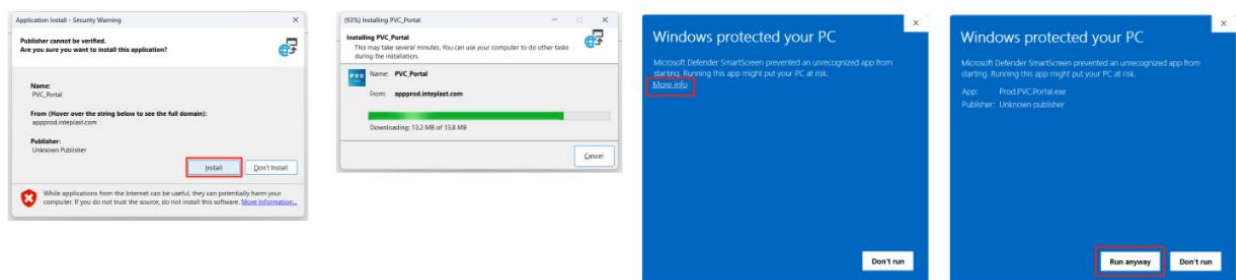


Figure 1-2: Running the Application Setup File - Demonstrates how to run the downloaded setup.exe file.

2. IT Support for Office

2.1. Access Permission of XF's NAS

IT only has access to the "Software" folder on the XF Network Attached Storage (NAS).

Directory Path of XF's NAS:

NAS Path: \\172.17.25.100\

Username: cyber

Password: softwareteam

2.2. New Computer Setup

When setting up a new computer in the XF Office, complete the following installations:
(including Anti-Virus, AS400,)

1.1.1. Install the Anti-Virus

Directory Path:

<\\172.17.25.100\Software\Cyber\WPJK Anti-Virus\>

Steps:

- I. Navigate to the path above.
- II. Locate the file cmd.bat.
- III. Run the **cmd.bat** batch file to install the antivirus software.

Name	Date modified	Type	Size
 cmd.bat	10/30/2024 3:55 PM	Windows Batch File	1 KB
 WindowsSensor.MaverickGyr.exe	10/30/2024 3:55 PM	Application	156,730 KB

Figure 2-1: Running the Batch File – Double click the cmd.bat batch file to install the Anti-Virus.

1.1.2. Steps to install the new AS400

Directory Path:

\\172.17.25.100\Software\Cyber\AS400 (New Version) \

Installation Steps:

- a) Run **jre1.8.0_26164** (Java Runtime) located in the directory above.
- b) Navigate to the folder:
IBM ACS Client → Files → Windows_Application.
- c) Choose the correct installer based on your system architecture:

- For 32-bit systems: **install_acs_32_allusers**
- For 64-bit systems: **install_acs_64_allusers**

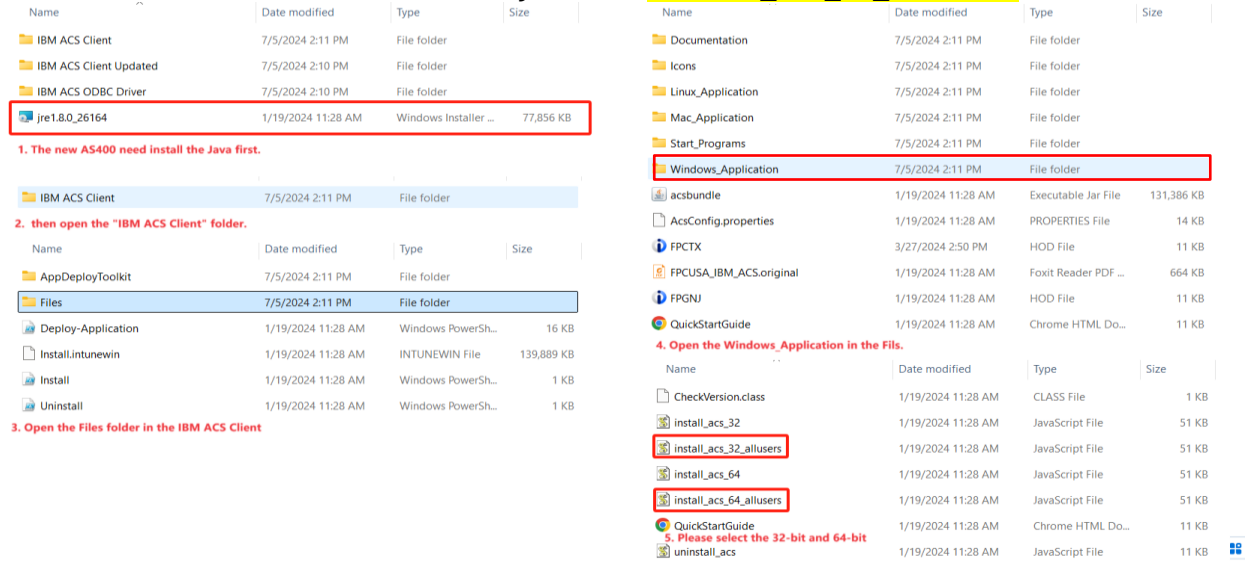


Figure 2-2: Running the AS400 install File - Demonstrates how to find and select the install_acs_32_allusers or install_acs_64_allusers file.

- d) After installing the AS400, please copy the "FPCTX.hod" icon and paste to the user's desktop.

Directory Path:

\\172.17.25.100\Software\Cyber\AS400 (New Version) \IBM ACS Client\Files\FPCTX.hod

Steps:

please copy and paste the "FPCTX.hod" file to the user's desktop.

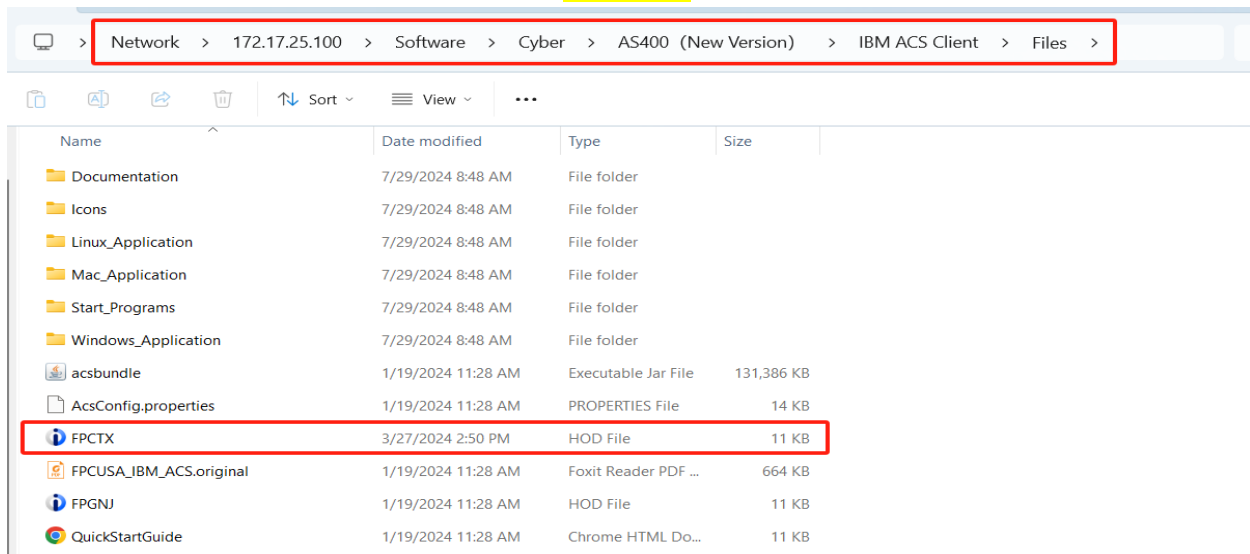


Figure 2-3: Copy and paste the FPCTX.hod File - Demonstrates locate the FPCTX file, select it, and copy and paste it to the user's desktop.

1.1.3.Plant Management for Supervisor

Directory Path:

<https://appprod.inteplast.com - /appProduction/XF/PlantMgt/>

Installation Instructions:

Follow the same installation steps as outlined for the **Production Line Applications**.

1.1.4.Product line Scheduling(For Feifei Chou only)

Directory Path:

<https://appprod.inteplast.com/appProduction/XF/Scheduling/>

Installation Instructions:

Use the same procedure as described in the Production Line Applications installation section.

1.2. IT Support For TEO phone.

The TEO 4101 phone some time need update the server address: **97.75.243.226**

If you need change the personnel information from the TEO phone, please send the email to Brandon Crow / Inteplast Lolita Administration <bcrow@inteplast.com>

If you have the hardware issue. Please send the email to Joe Hamm

ghamm@inteplast.com

The following map shows the exact location of Joe Hamm's office.



Figure 2-4: Map of Joe Hamm's Office Location - A map with a red arrow indicating the entrance to Joe Hamm's office, used to guide the delivery of old phone hardware.

3. Install and connect the Kyocera printer for office user

3.1. Download and install the printer's driver and connect the printer from the Kyocera web site.

https://youtu.be/F_pz6BIsRXY

3.1.1. If this is your first time connecting to a Kyocera printer, you should be downloaded the driver from Kyocera web site.

https://www.kyoceradocumentsolutions.com/download/index_en.html?r=0

Select your country from the Kyocera download center.

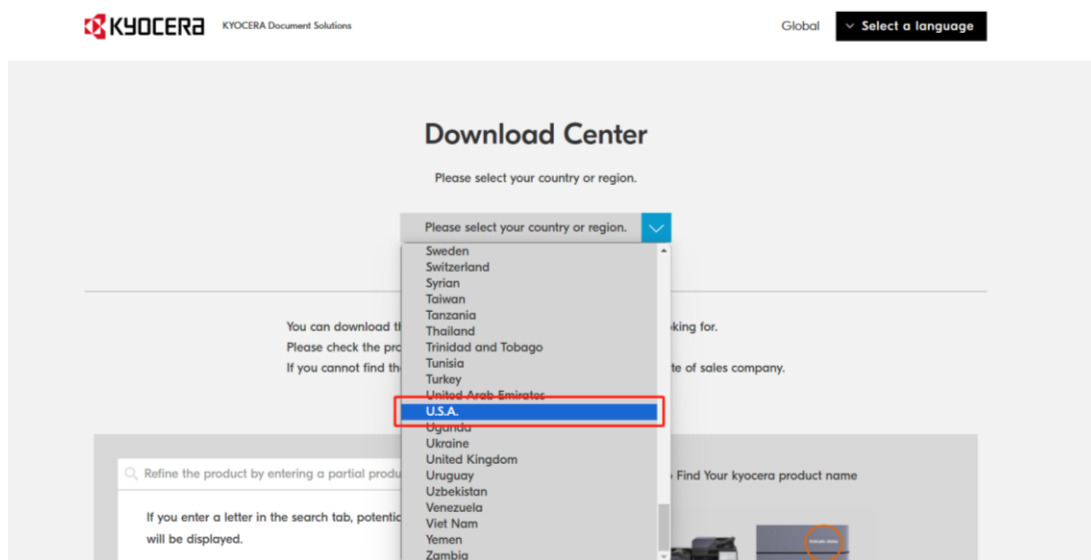


Figure 3-1: Kyocera Driver Download Page - Select Country - Screenshot of the Kyocera Document Solutions website's driver download page, prompting the user to select the country first.

3.1.2. Check the Brand/Model/IP address and Hostname



Figure 3-2: Check Printer Brand, model and IP address - Physical image of the printer, with a red box highlighting the information on the printer.



Figure 3-3: Check Printer Brand - Physical image of the printer, with a red box highlighting the Brand on the printer.



Figure 3-4: Check Printer Model - Physical image of the printer, with a red box highlighting the model information on the printer label.

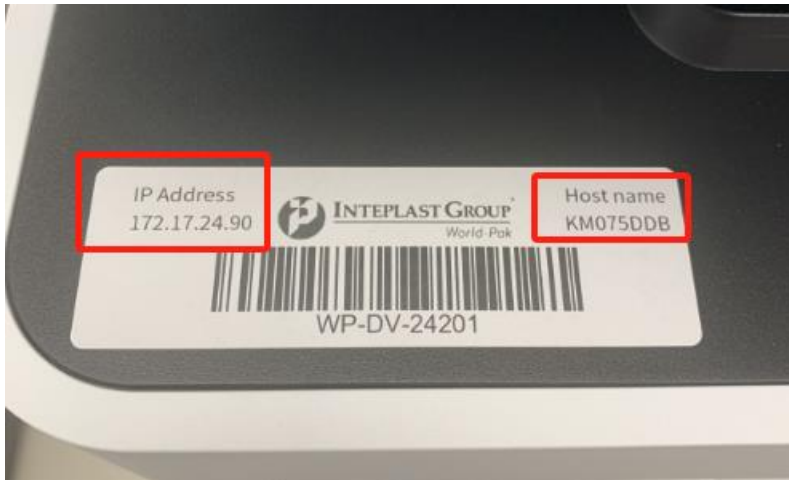


Figure 3-4: Check Printer IP Address and Hostname - Physical image of the printer, with a red box highlighting the IP address and hostname on the printer label.

3.1.3. Select the model from Kyocera download web site.

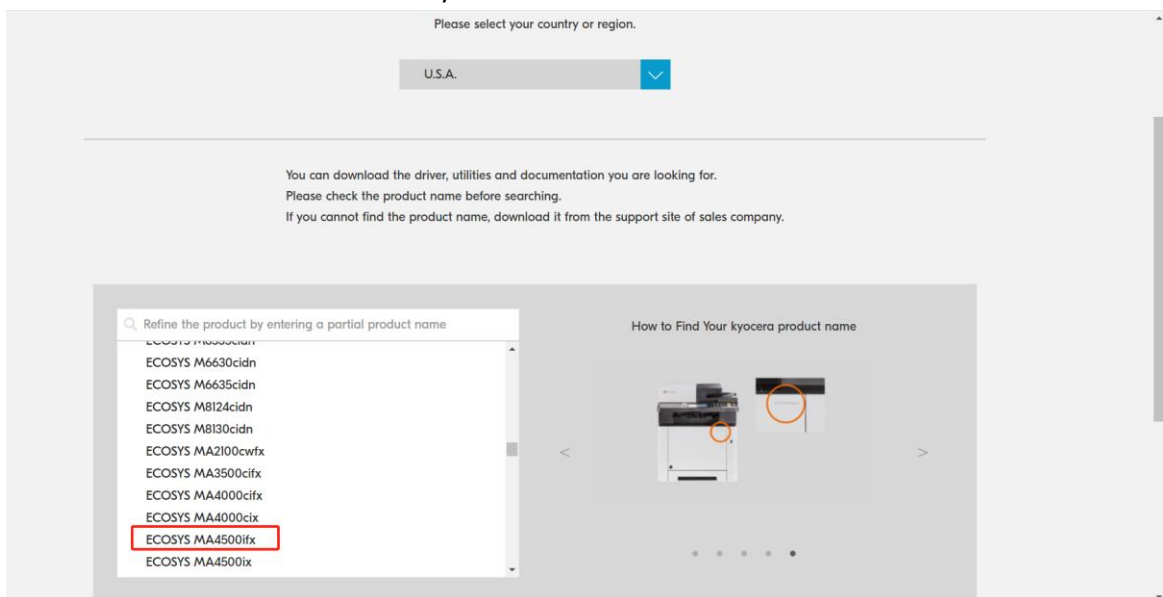


Figure 3-5: Kyocera Driver Download Page - Select Model - Screenshot showing the dropdown menu for selecting the printer model on the Kyocera website.

3.1.4. Download the driver from Kyocera download web site.

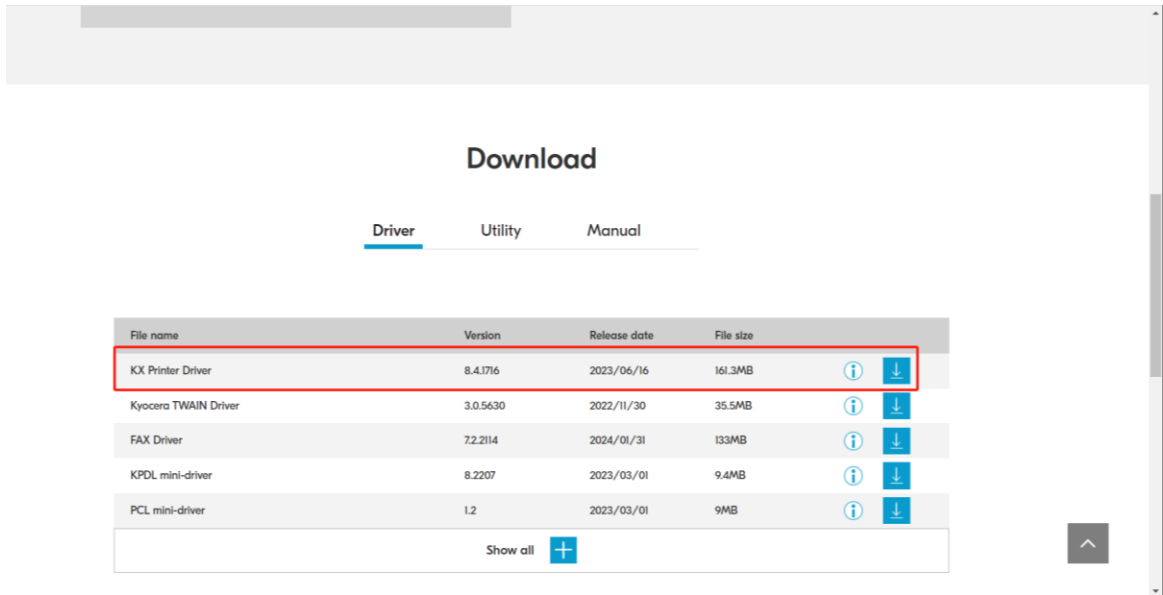


Figure 3-6: Kyocera Driver Download Page - Download Driver - Screenshot showing the download button to start downloading the driver program.

3.1.5. Check the download file

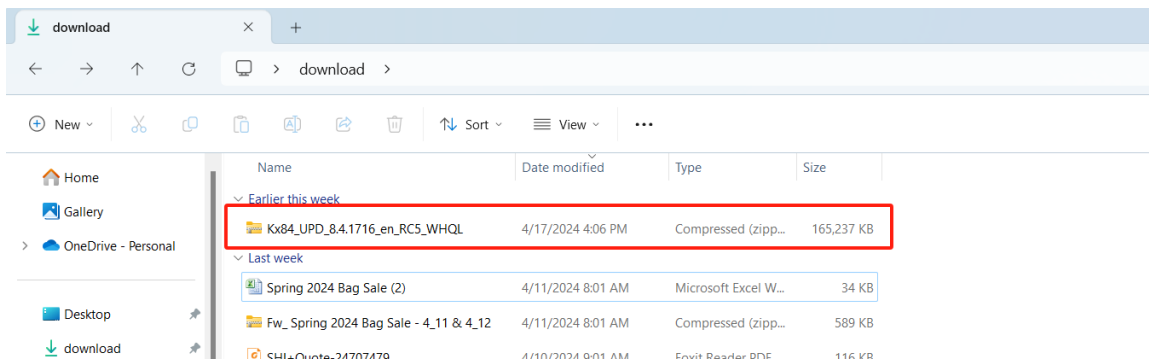


Figure 3-7: Check the Downloaded Driver File - Screenshot showing the downloaded driver file in ZIP format in the downloads folder.

3.1.6. Right click to Extract all the zip file

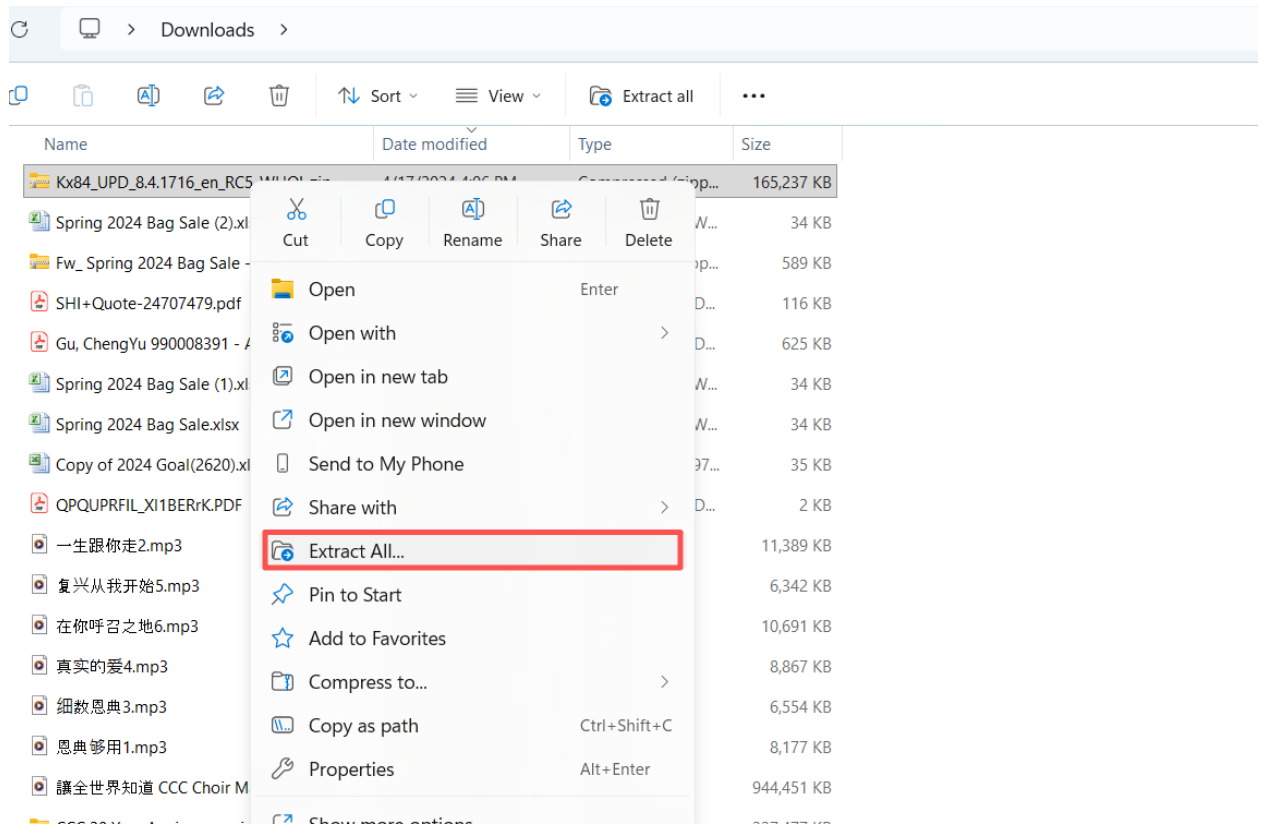


Figure 3-8: Right-click to Extract ZIP File - Screenshot showing the "Extract All" menu option after right-clicking the ZIP file.

3.1.7. Select the folder to extract

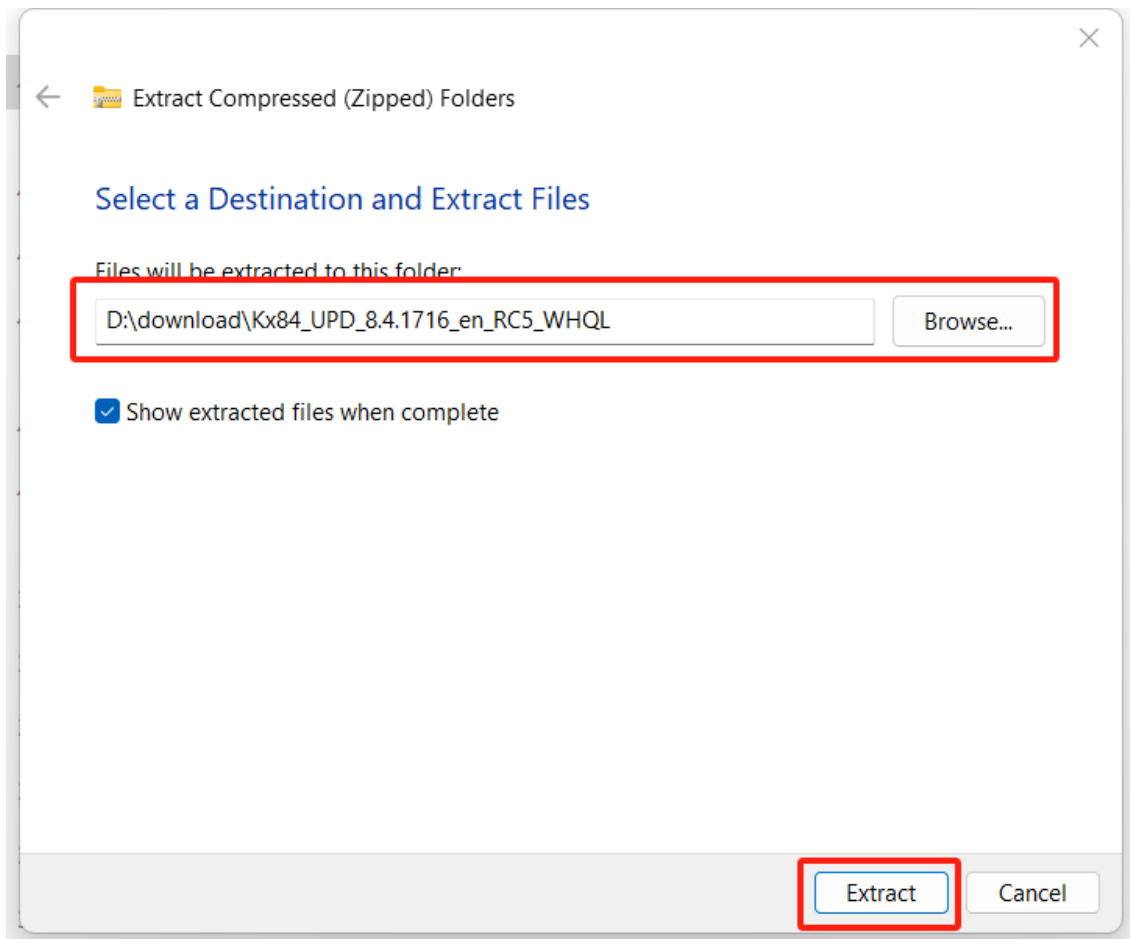


Figure 3-9: Select Destination Folder for Extraction - Screenshot showing the interface for selecting the destination folder in the extraction wizard.

3.1.8. Check the extract file and open the folder

Name	Date modified	Type	Size
Today			
Kx84_UPD_8.4.1716_en_RC5_WHQL	4/19/2024 7:58 AM	File folder	

Figure 3-10: Check Extracted Files and Open Folder - Screenshot showing the contents of the extracted folder.

3.1.9. Double click the "Setup" file

Name	Date modified	Type	Size
KmUninstall	4/19/2024 7:57 AM	Application	1,206 KB
KmUsb.dll	4/19/2024 7:57 AM	Application extens...	84 KB
KX.pnf	4/19/2024 7:57 AM	Precompiled Setu...	75 KB
KxPackagerDll.dll	4/19/2024 7:57 AM	Application extens...	175 KB
KyoRm	4/19/2024 7:57 AM	Configuration settl...	7 KB
lang.dat	4/19/2024 7:57 AM	DAT File	157 KB
lang4.dat	4/19/2024 7:57 AM	DAT File	139 KB
Setup	4/19/2024 7:57 AM	Application	112 KB
setup	4/19/2024 7:57 AM	Configuration settl...	1 KB
upd.pnf	4/19/2024 7:57 AM	Precompiled Setu...	10 KB
Utility	4/19/2024 7:58 AM	File folder	
arm64	4/19/2024 7:58 AM	File folder	
64bit	4/19/2024 7:57 AM	File folder	
32bit	4/19/2024 7:57 AM	File folder	

Figure 3-11: Double-click to Run Setup File - Screenshot showing double-clicking to run the installer Setup.exe .

3.1.10. Select the “Custom Install”

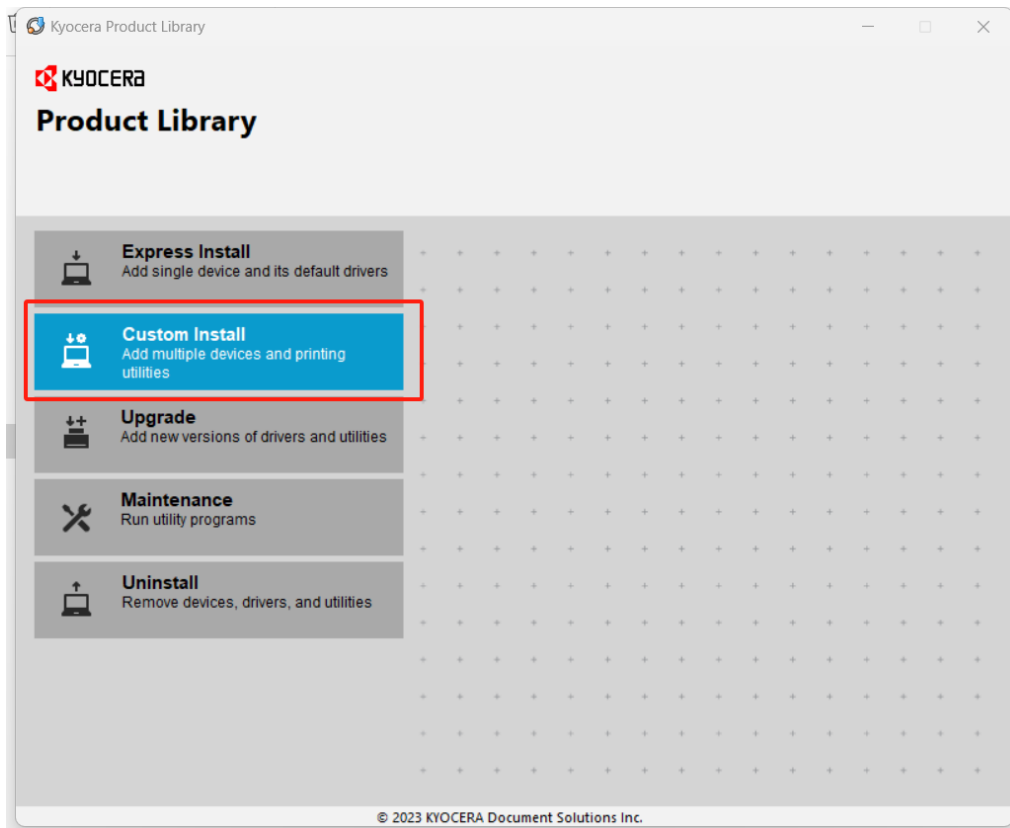


Figure 3-12: Kyocera Installer - Select Custom Install - Screenshot of the Kyocera Product Library installation interface, selecting "Custom Install".

3.1.11. Find the printer and select it, then click the blue “arrow”

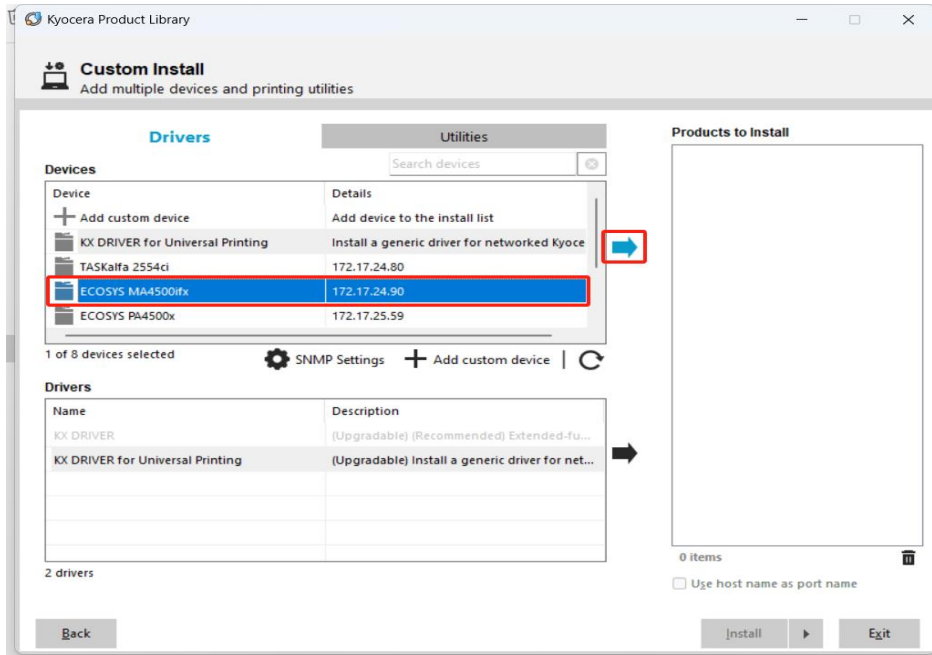


Figure 3-13: Kyocera Installer - Select Printer to Install - Screenshot showing finding the printer in the device list and clicking the blue arrow to add it to the installation list.

3.1.12. Check if the printer is correctly displayed on the “product to install”, select the “KX DRIVER” and click the black arrow

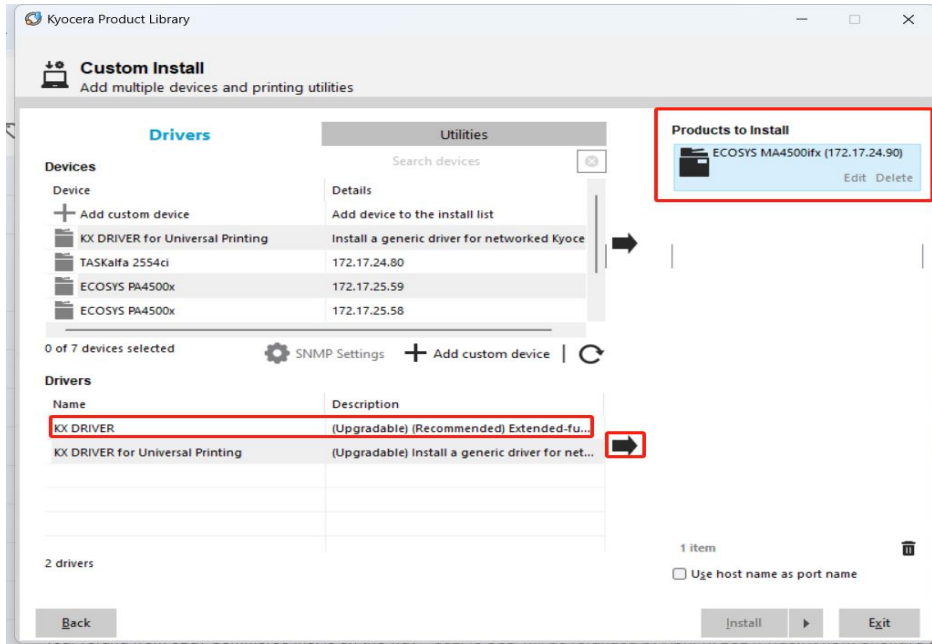


Figure 3-14: Kyocera Installer - Confirm Product and Select KX DRIVER - Screenshot showing confirmation that the product has been added to the installation list, and clicking the black arrow after selecting KX DRIVER.

3.1.13. Double check the products to install, then click the install button

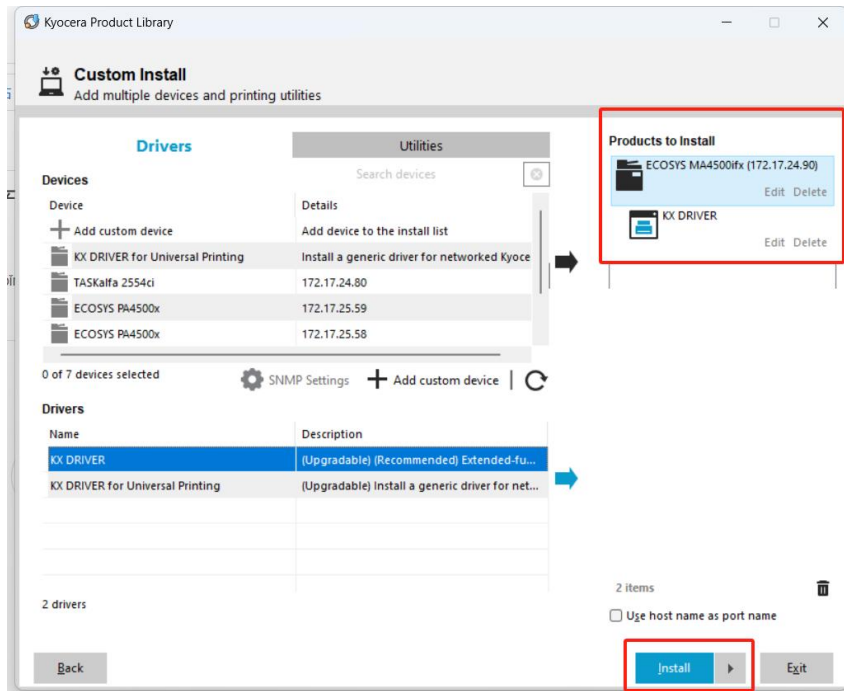


Figure 3-15: Kyocera Installer - Final Confirmation of Products to Install – Screenshot showing the final confirmation of the list of products to be installed, and clicking the "Install" button.

3.1.14. The printer driver will be installed

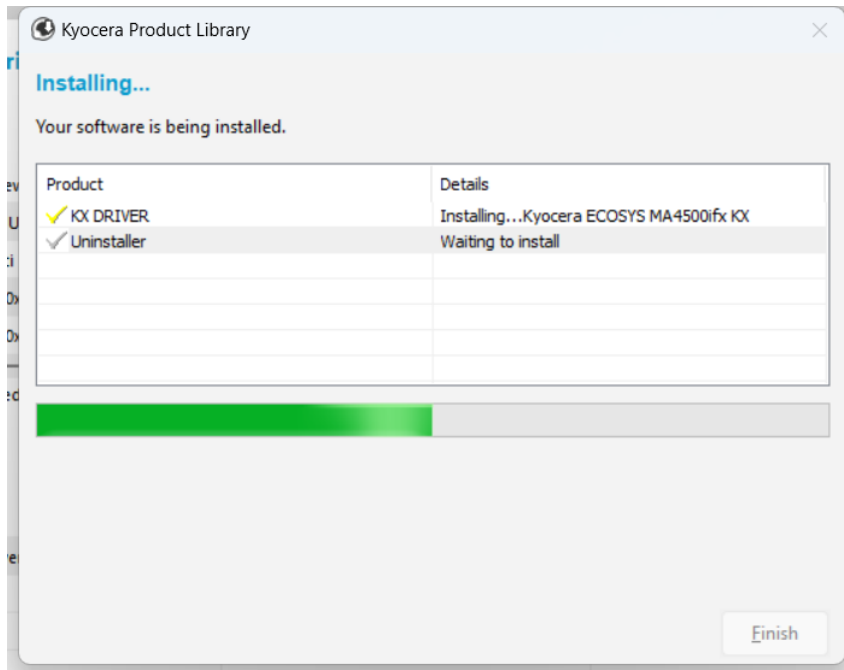


Figure 3-16: Kyocera Installer - Driver Installation in Progress - Screenshot showing the progress bar interface for the printer driver installation.

3.1.15. Print the test page and click the “Finish” button

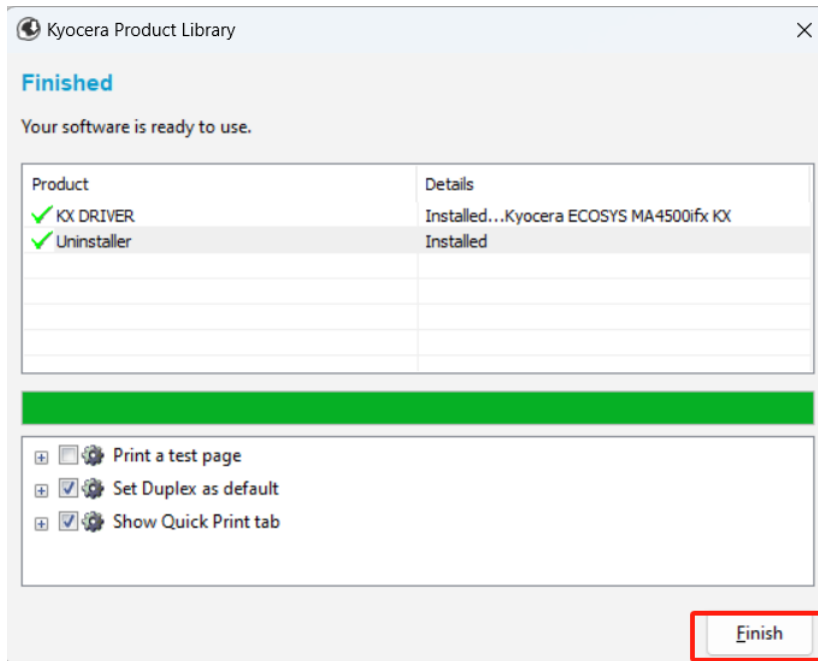


Figure 3-17: Kyocera Installer - Installation Complete and Print Test Page – Screenshot showing the installation complete interface, prompting to print a test page and click the "Finish" button.

3.1.16. Close the setup application

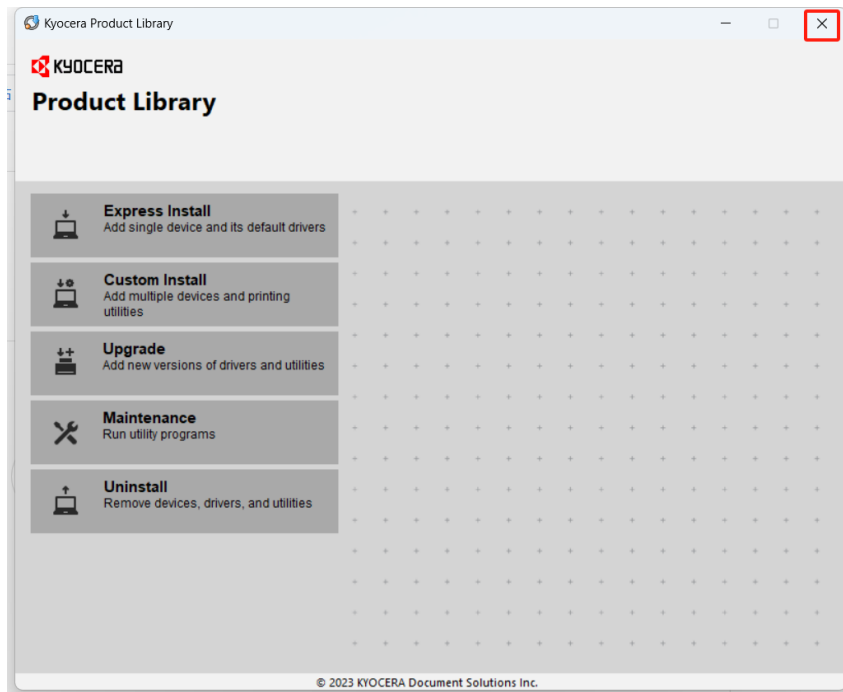


Figure 3-18: Kyocera Installer - Close Setup Application - Screenshot showing the main installer interface, clicking the "Close" button on the right-up corner.

3.1.17. The printer should be installed. Please check the “Printers& scanners”

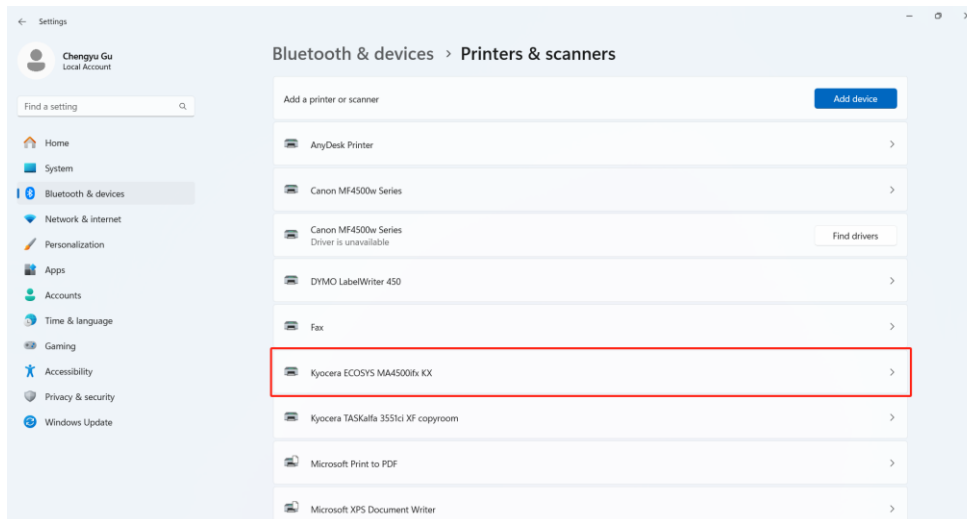


Figure 3-19: Windows Settings - Check Printers & Scanners - Screenshot showing the "Printers & scanners" interface in Windows Settings, confirming the newly installed printer.

3.1.18. Print the test page and click the “Finish” button.

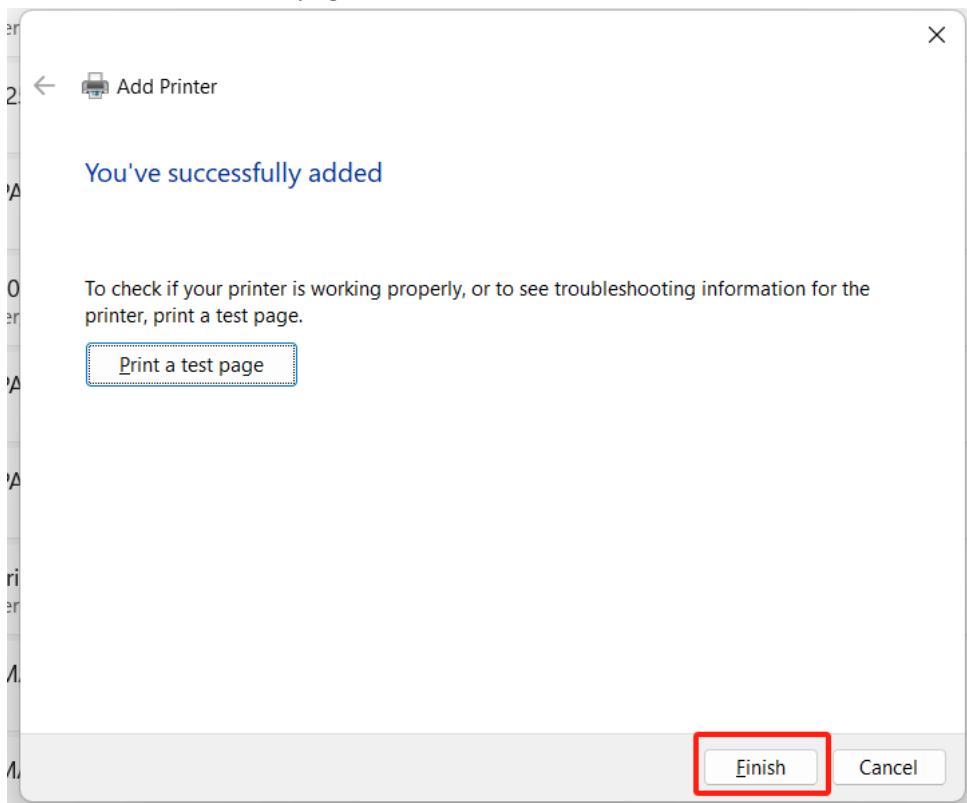


Figure 3-20: Windows Settings - Print Test Page and Finish - Screenshot showing printing a test page and clicking the "Finish" button in Windows Settings

3.2. Connect or reconnect the printer from the network

<https://youtu.be/hCYFL-8s914>

3.2.1. Find the printer you want to connect to



Figure 3-21: Find the printer - Physical image of the printer, Find the printer you need to connect to..

3.2.2. Check the Brand/Model/IP address and Hostname



Figure 3-22: Check Printer Brand (Physical) - Physical image of the printer, with a red box highlighting the brand, model and IP address on the printer.

Brand:



Figure 3-23: Check Printer Brand (Physical) - Physical image of the printer, with a red box highlighting the brand information on the printer.

Model:



Figure 3-24: Check Printer Model (Physical) - Physical image of the printer, with a red box highlighting the model information on the printer.

IP address and Hostname:

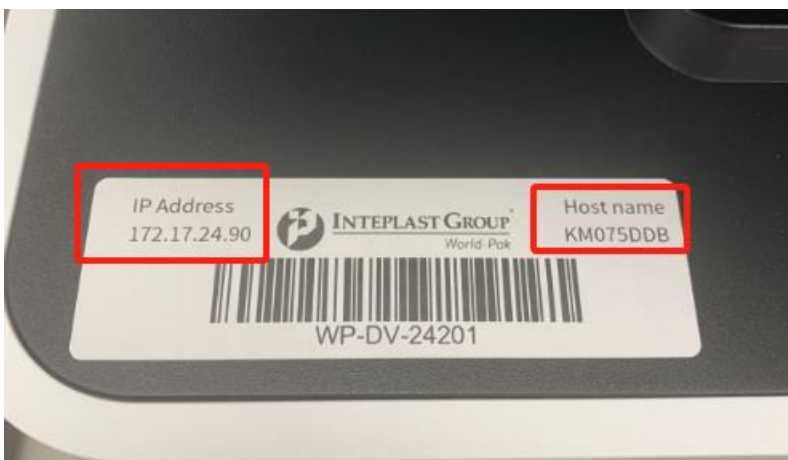


Figure 3-25: Check Printer IP Address and Hostname (Label) - Close-up of the printer label, with red boxes highlighting the IP Address and Host Name.

3.2.3. Go to start menu, open the settings from your computer

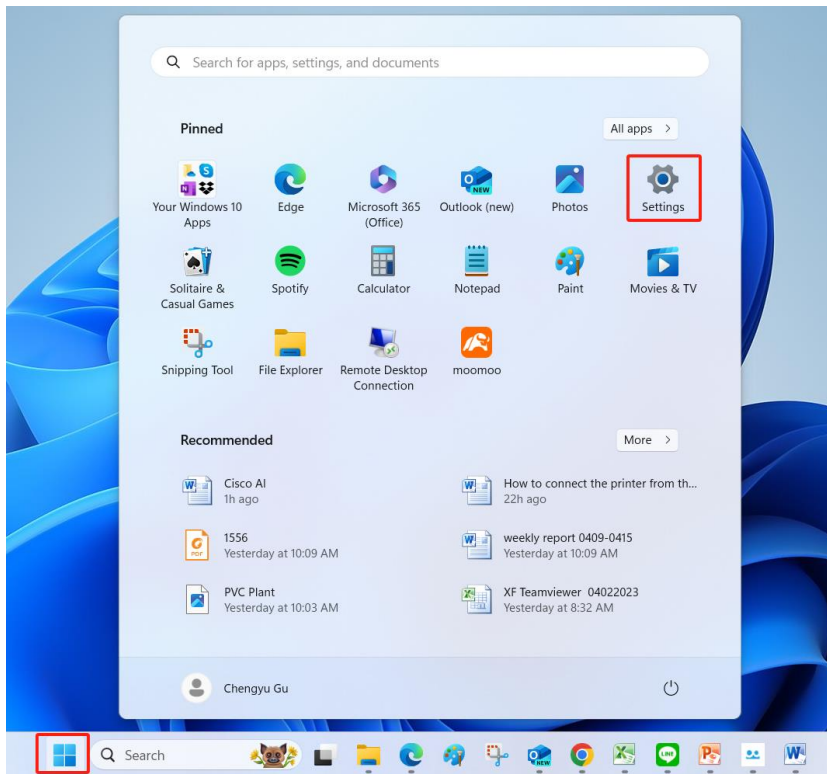


Figure 3-26: Windows Desktop - Open Settings - Screenshot of the Windows 11 desktop, with red boxes highlighting the Start menu and Settings icon.

3.2.4. Open the "Bluetooth & devices"

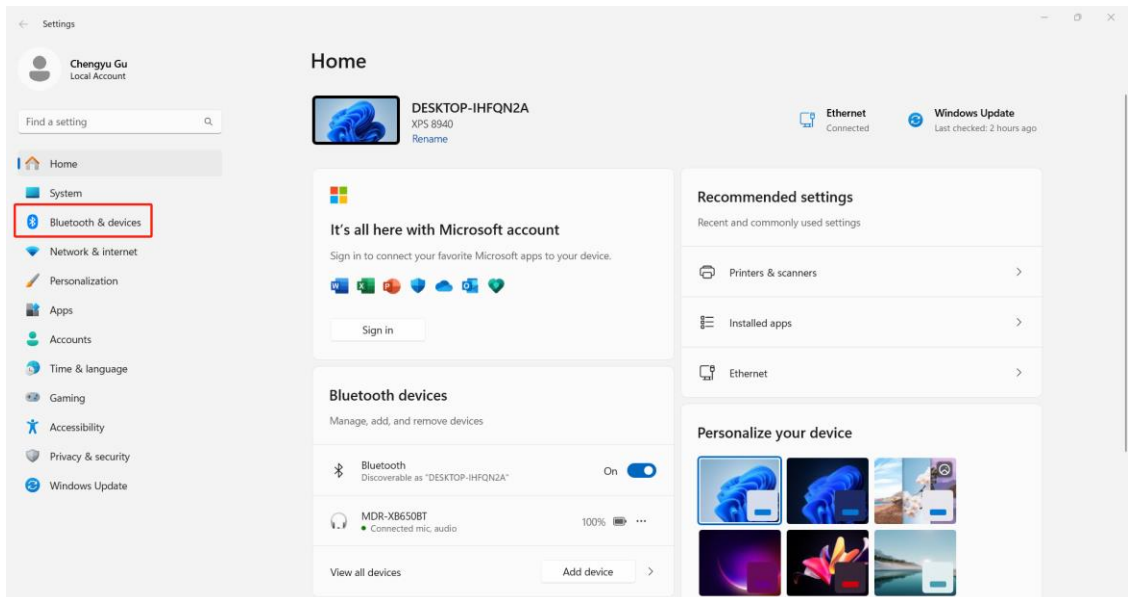


Figure 3-27: Windows Settings - Open Bluetooth & Devices - Screenshot of the Windows Settings home page, with a red box highlighting the "Bluetooth & devices" option.

3.2.5. Then click the “Printers & scanners” to open the printer settings.

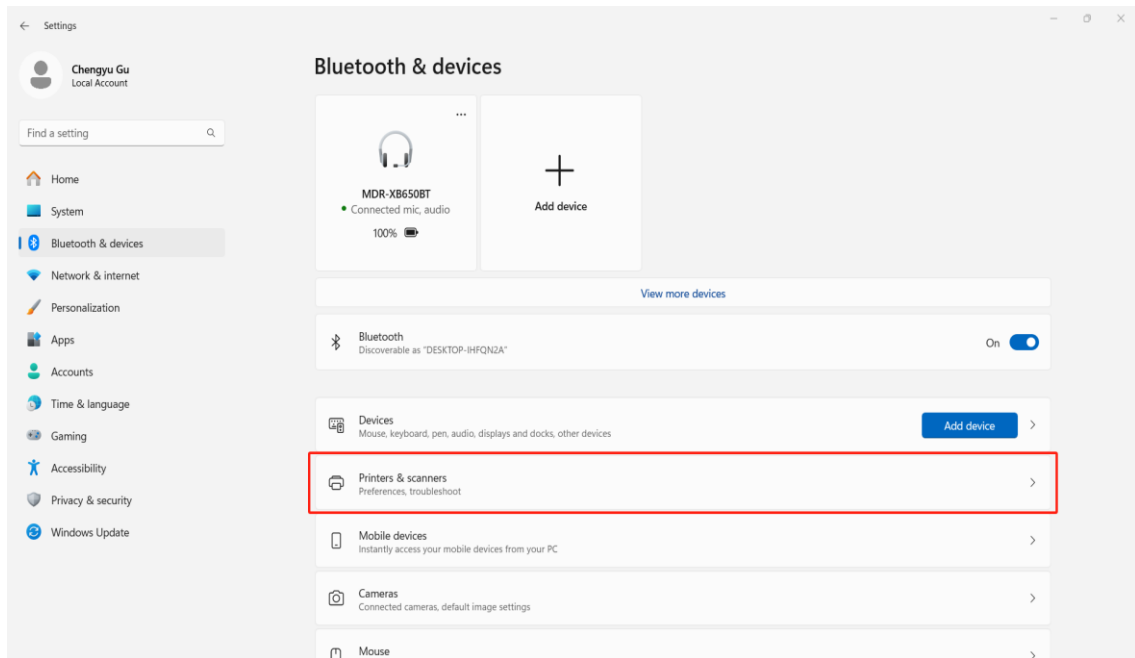


Figure 3-28: Windows Settings - Open Printers & Scanners - Screenshot of the "Bluetooth & devices" settings page, with a red box highlighting the "Printers & scanners" option.

3.2.6. Please click the “Add device” button

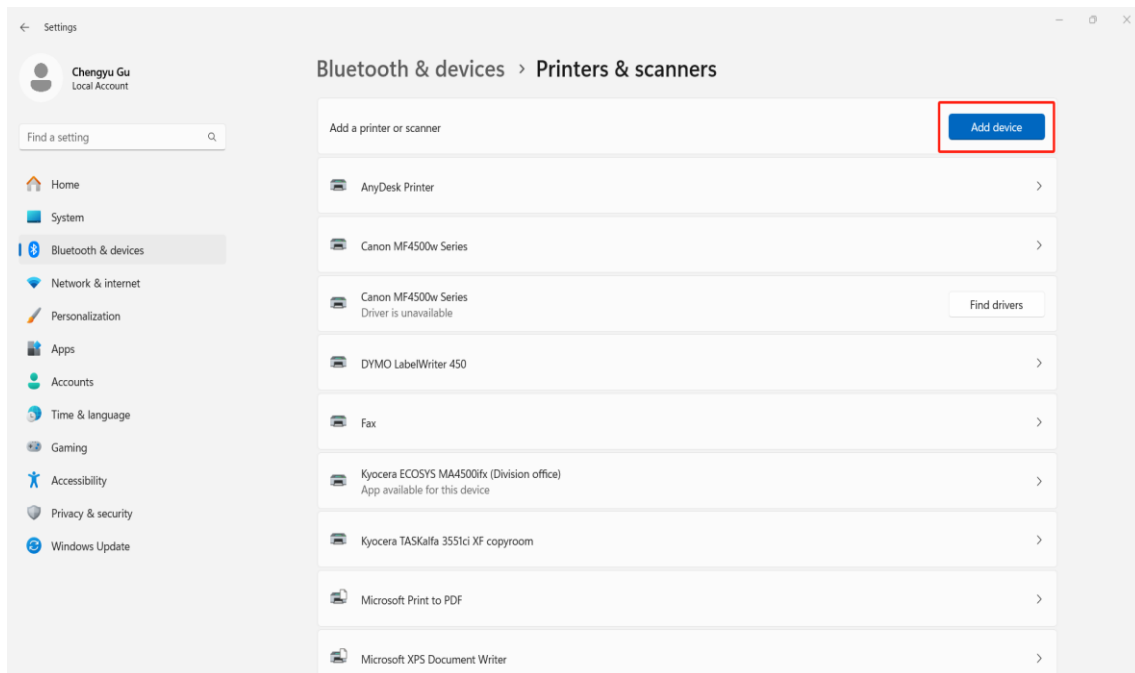


Figure 3-29: Windows Settings - Click Add Device Button - Screenshot of the "Printers & scanners" settings page, with a red box highlighting the "Add device" button.

3.2.7. The computer will automatically detect all printers in your network segment

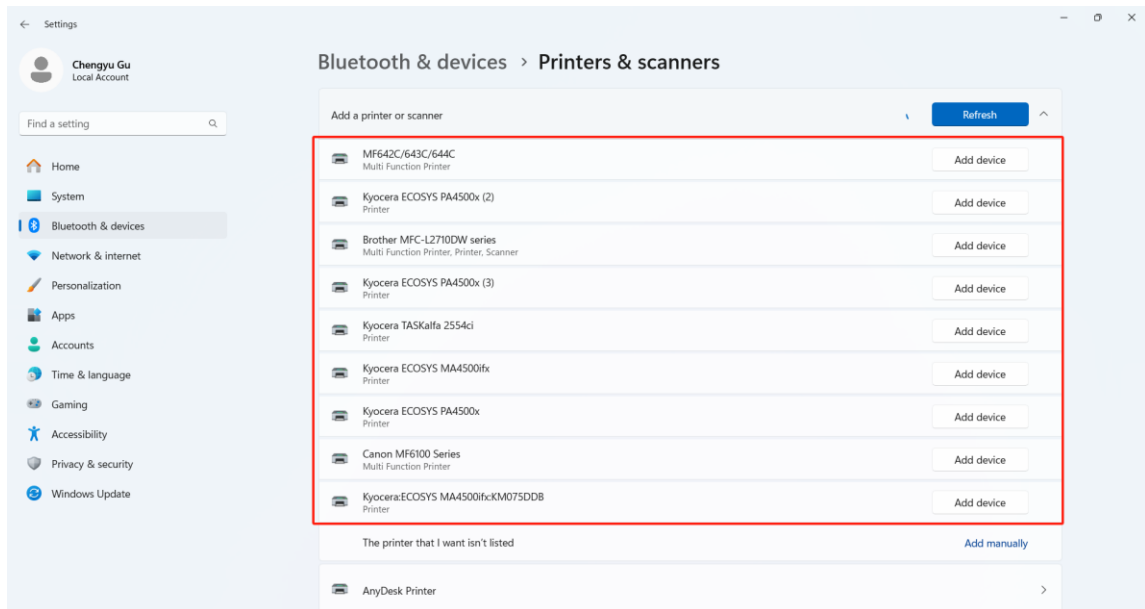


Figure 3-30: Windows Settings - Automatically Detect Network Printers - Screenshot showing the system automatically detecting the list of printers on the network.

3.2.8. Please find the printer from printer list

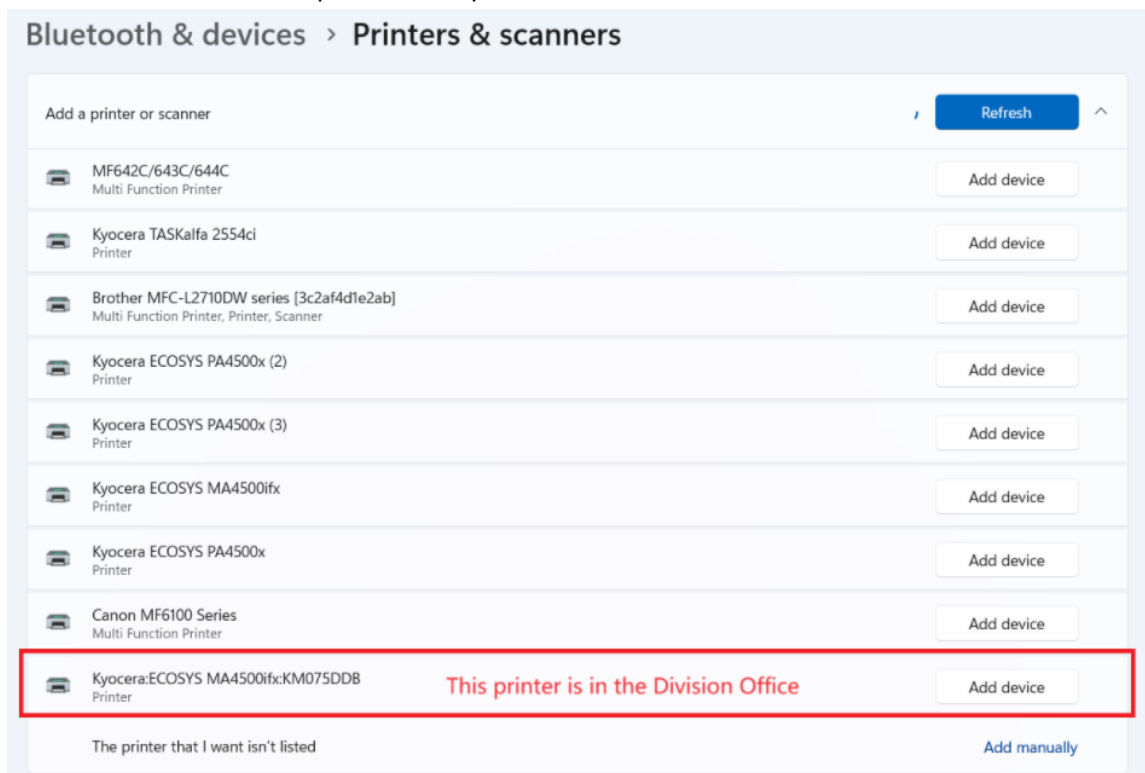


Figure 3-31: Windows Settings - Printer List - Screenshot showing the list of automatically detected printers.

3.2.9. Find the Brand/Model and Hostname in the printer list

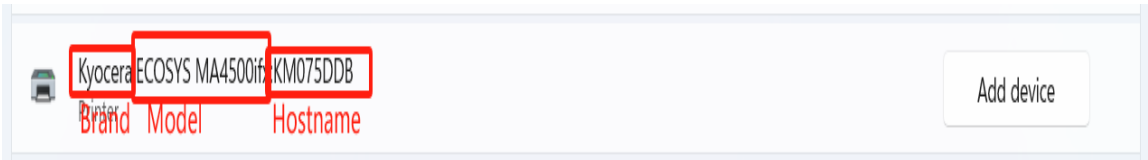


Figure 3-32: Windows Settings - Identify Printer Information - Screenshot of the printer list, with red boxes highlighting the printer's brand, model, and hostname.

3.2.10. If you find the correct printer in the printer list, click the “Add device” button

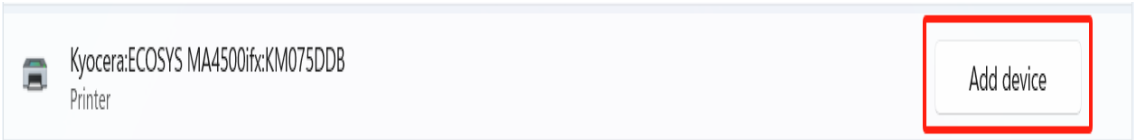


Figure 3-33: Windows Settings - Click Add Device Button - Screenshot showing clicking the "Add device" button on the right side after finding the correct printer in the list.

3.2.11. If not, please click the “Add manually” to use the IP address to add printer

Bluetooth & devices > Printers & scanners

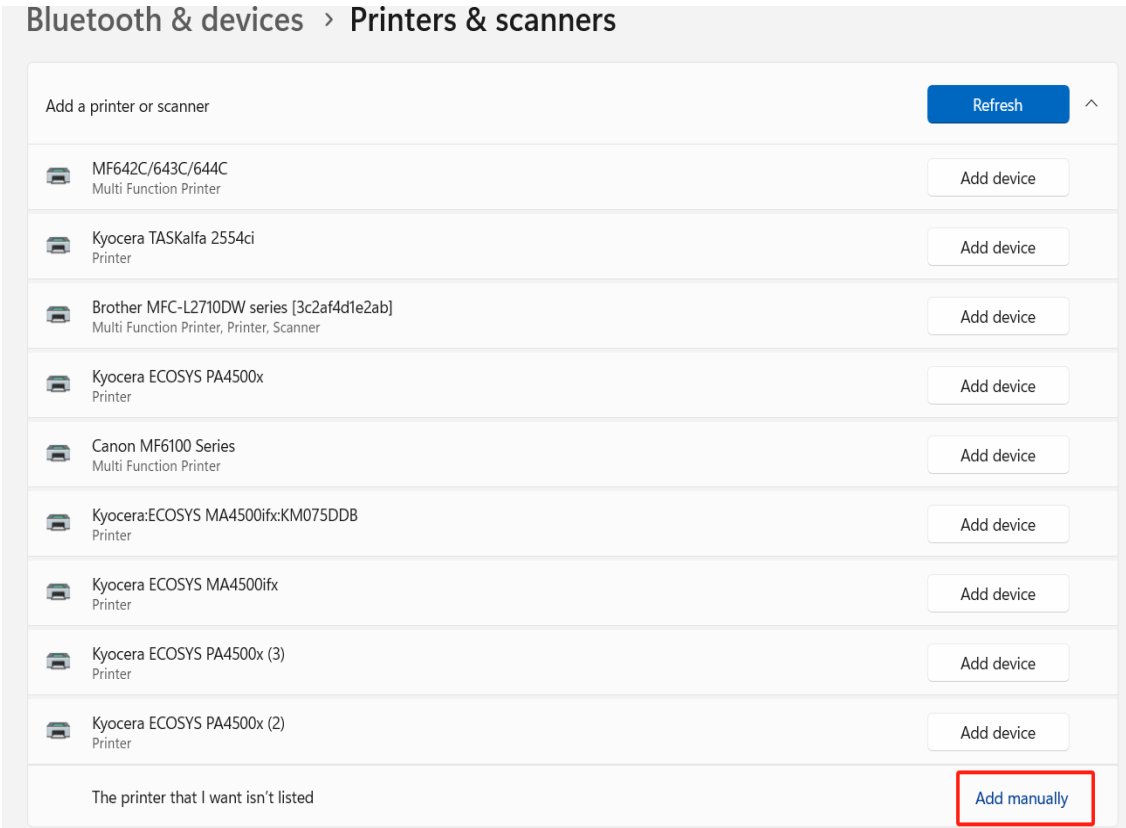


Figure 3-34: Windows Settings - Add Printer Manually - Screenshot showing the "Add manually" link highlighted in a red box below the printer list.

3.2.12. Please select the “Add a printer using an IP address or hostname”, then click the “next” button.

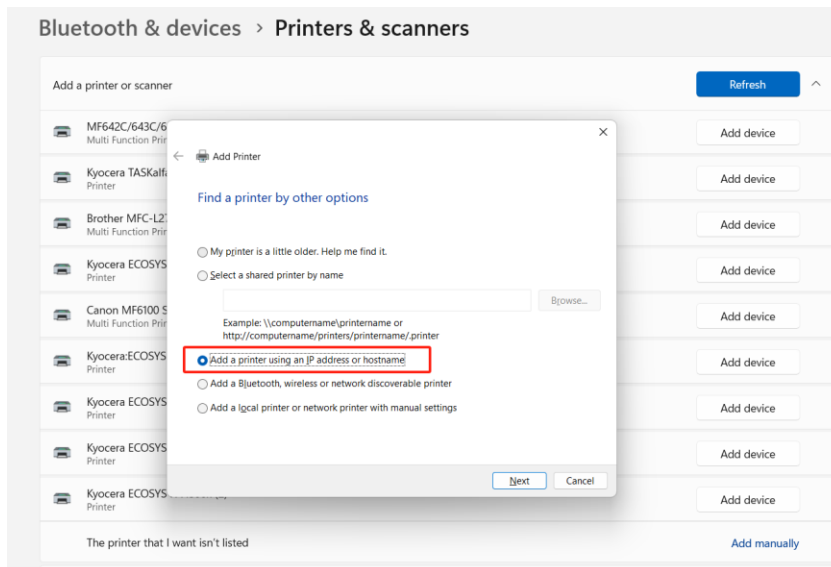


Figure 3-35: Manual Add Printer Wizard - Select Add by IP Address or Hostname - Screenshot of the manual add printer wizard, with a red box highlighting the "Add a printer using an IP address or hostname" option.

3.2.13. Please select the TCP/IP Device from the Device type

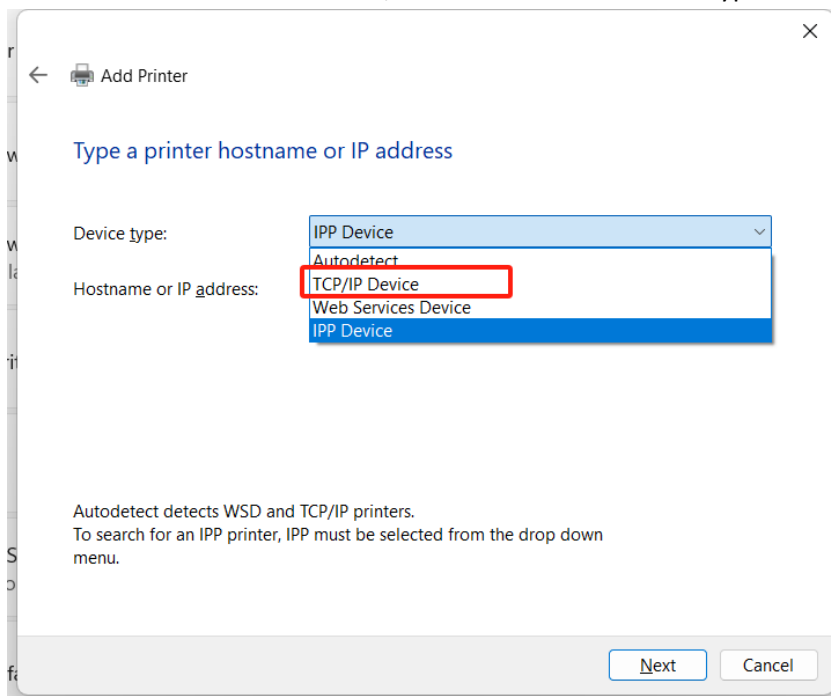


Figure 3-36: Manual Add Printer Wizard - Select Device Type as TCP/IP Device - Screenshot of the manual add printer wizard, with a red box highlighting the selection of "TCP/IP Device" from the Device type dropdown menu.

3.2.14. Please typing the IP address, then click the “next” button

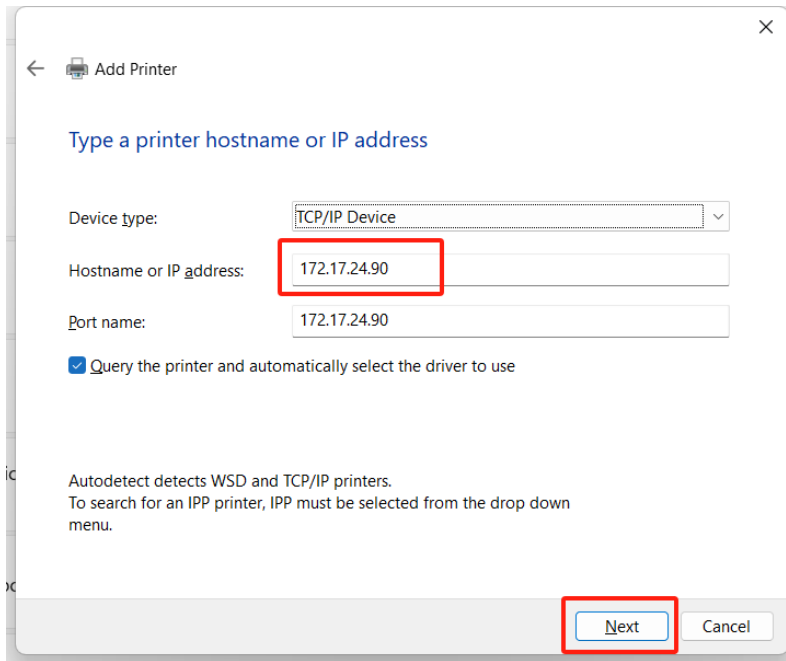


Figure 3-37: Manual Add Printer Wizard - Enter IP Address - Screenshot of the manual add printer wizard, with a red box highlighting the field for entering the IP address.

3.2.15. select the driver
Brand:

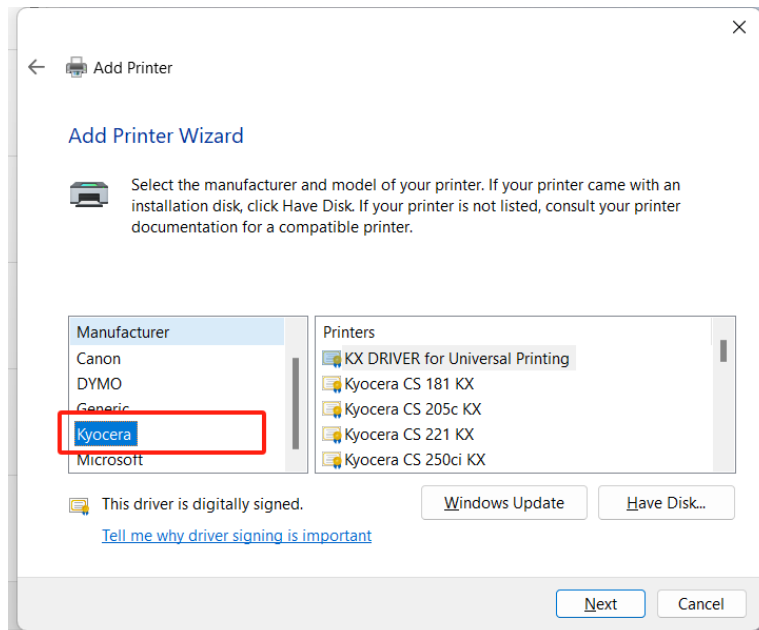


Figure 3-38: Manual Add Printer Wizard - Select Driver Brand - Screenshot of the manual add printer wizard, with a red box highlighting the selection of "Kyocera" in the manufacturer list.

Model:

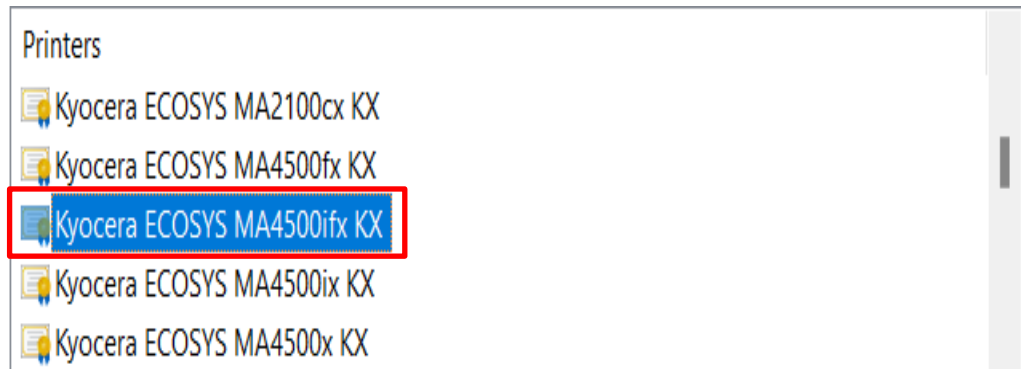


Figure 3-39: Manual Add Printer Wizard - Select Driver Model - Screenshot of the manual add printer wizard, with a red box highlighting the selection of the correct model from the printer model list.

3.2.16. Finished, please check or rename the printer name for your printer.

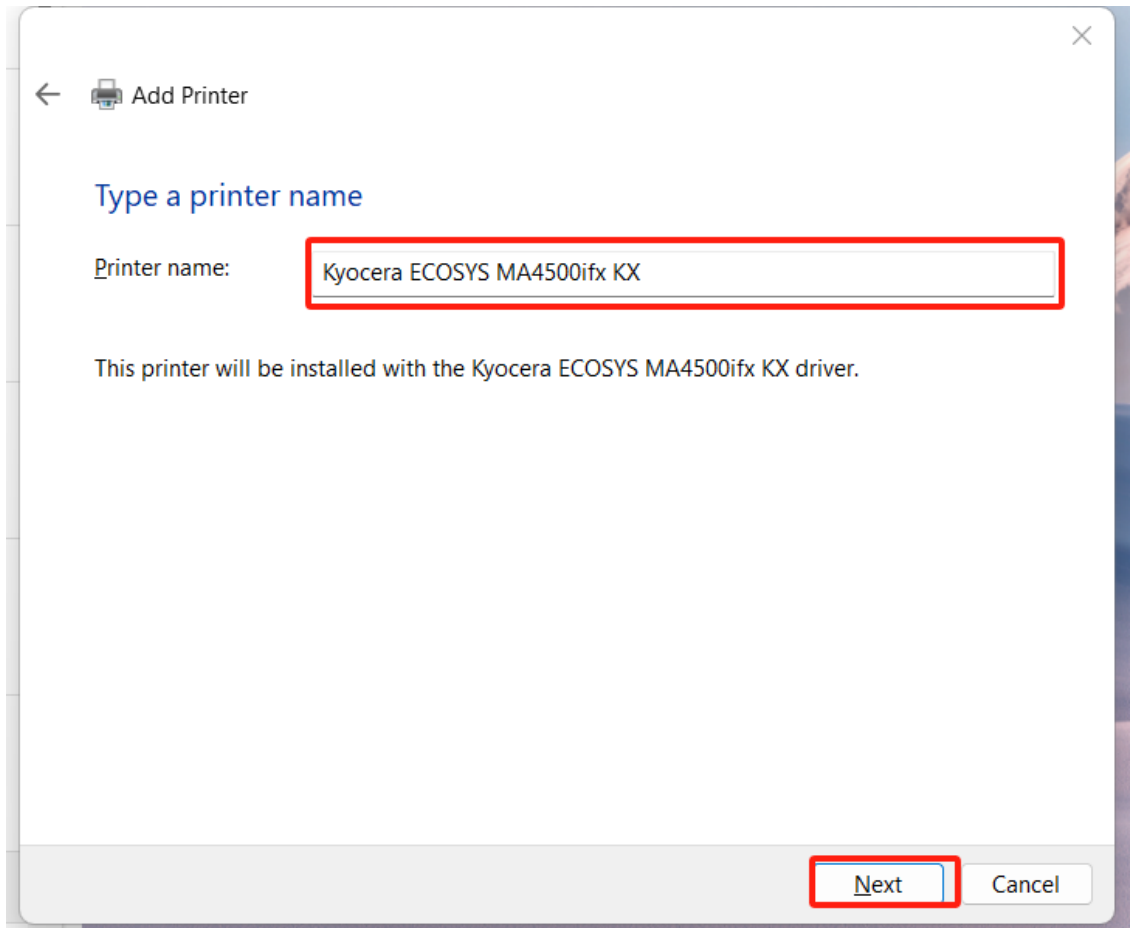


Figure 3-40: Manual Add Printer Wizard - Name the Printer - Screenshot of the manual add printer wizard, with a red box highlighting the field for entering the printer name.

3.2.17. If you need, you can click the "Print a test page", then click the "Finish" button

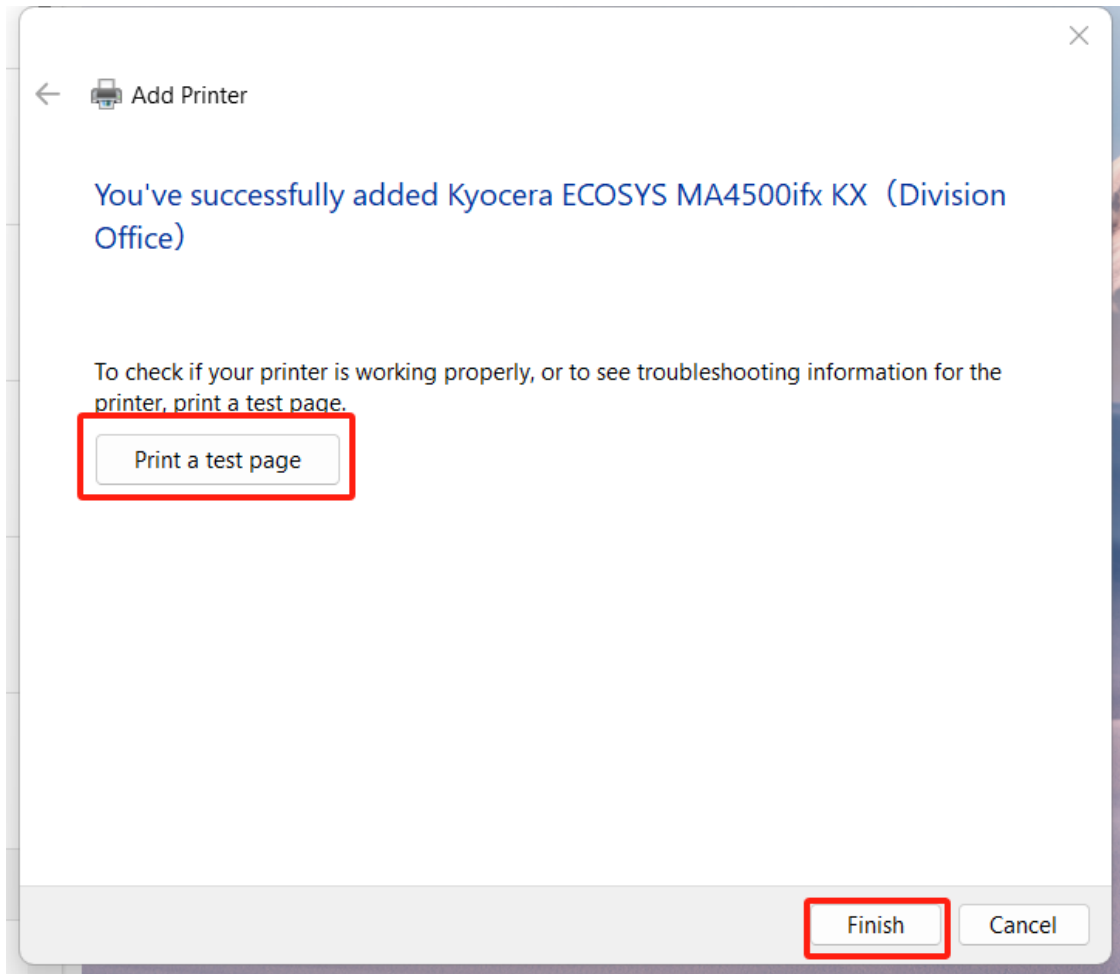


Figure 3-41: Manual Add Printer Wizard - Complete Installation - Screenshot of the manual add printer wizard, with red boxes highlighting the "Print a test page" and "Finish" buttons.

4. Setup the email account of copy machine.

The copy machine's IP is 172.17.24.80 (please setup below account to setup the email function of the copy machine)

Username: **Service@wpjk.inteplast.com**

password: **Bom07544**

Port: **587**

Smtp: **smtp.office365.com**

5. WIFI information

5.1.XF Office Wi-Fi Overview

The following information applies to the **Wi-Fi network for the XF Office**.

Parameter	Value
Router Mode	AP mode
IP Address	172.17.26.128 (DHCP enabled)
Router Management URL	http://www.routerlogin.net/
SSID (Network Name)	NETGEAR94
Wi-Fi Access Password	fuzzyviolin497

5.2.XF Plant Wi-Fi Router Info

The following information applies to the Wi-Fi network for the XF Plant area.

IP	Model	Admin	Password	channel	SSID	Key	Device Name	Location
172.17.29.139	ENH500	admin	admin	5GHZ	XF-engenius1	wpjk77979	ENH500a	Shipping
172.17.29.140	ENH202	admin	admin	2.4GHZ	WPJK-engenius2	wpjk77979	ENH202	warehouse
172.17.29.141	NETGEAR	admin	password	2.4GHZ	XF-NETGEAR	WPJK77979		
				5GHZ				
172.17.29.144	ENH500	admin	admin	5GHZ	XF-engenius1	wpjk77979	ENH500b	shipping
172.17.29.142	ENH500	admin	admin	5GHZ	XF-engenius1	wpjk77979	ENH500c	Shipping
172.17.29.145	ENS1200	admin	admin	5GHZ	XF slitting	wpjk77979	ENS1200a	slitting
				2.4GHZ	XF slitting 5G	wpjk77979	ENS1200a	slitting
172.17.29.147	ENS1750	admin	admin	5GHZ	EnGenius750015_1	xfnowire	ENS1750	XF Main
				2.4GHZ	EnGenius750015_1	xfnowire	ENS1750	XF Main

Figure 5-1: XF Plant Wi-Fi Router Information Table - Screenshot showing the detailed table of XF Plant Wi-Fi router information, including IP, Model, SSID, and Password.

6. The network of the XF plant

The network diagram connects key areas of the XF facility. Yellow lines represent fiber-optic links, and blue lines represent Ethernet connections. Please refer to the image below for the complete topology diagram.

Step:

6.1. Identify the fault symptoms

- 6.1.1. Collect a description of the problem (inability to access the internet, high latency, failure to access specific websites, etc.)
- 6.1.2. Identify the scope of impact (single unit/department/network-wide)
- 6.1.3. Record the time, device, IP address, and error information (e.g., DNS_PROBE_FINISHED_BAD_CONFIG)

6.2.Physical layer and data link layer checks

Checkpoint	Action	Expected Result
Power	Verify switch/router power status	Restart or replace if unpowered
Cabling	Check port LED, ensure cables are secure	Replace damaged cables

Checkpoint	Action	Expected Result
Wi-Fi	Verify SSID and signal strength	Reconnect or move closer to AP

6.3. Network Layer Connectivity

6.3.1. Check Local IP and Gateway: (open The command prompt)

Type the command “**ipconfig /all**”, and **enter**.

Correct results:

```
c:\>ipconfig /all

Windows IP Configuration

    Host Name . . . . . : DESKTOP-IHFQN2A
    Primary Dns Suffix . . . . . :
    Node Type . . . . . : Hybrid
    IP Routing Enabled. . . . . : No
    WINS Proxy Enabled. . . . . : No

Ethernet adapter Ethernet:

    Connection-specific DNS Suffix . :
    Description . . . . . : Killer E2600 Gigabit Ethernet Controller
    Physical Address. . . . . : A4-BB-6D-D7-79-91
    DHCP Enabled. . . . . : Yes
    Autoconfiguration Enabled . . . . : Yes
    IPv4 Address. . . . . : 172.17.26.217(Preferred)
    Subnet Mask . . . . . : 255.255.248.0
    Lease Obtained. . . . . : 2025年9月22日 6:53:54
    Lease Expires . . . . . : 2025年11月14日 10:09:12
    Default Gateway . . . . . : 172.17.24.1
    DHCP Server . . . . . : 172.17.24.1
    DNS Servers . . . . . : 172.17.8.25
                             172.19.254.52
    NetBIOS over Tcpip. . . . . : Enabled
```

Figure 6-1: Network Layer Connectivity Check - ipconfig /all Result - Example
screenshot of the correct output result for the ipconfig /all command.

6.3.2. ping 172.17.24.1

Correct results:

```
c:\>ping 172.17.24.1

Pinging 172.17.24.1 with 32 bytes of data:
Reply from 172.17.24.1: bytes=32 time<1ms TTL=64
Reply from 172.17.24.1: bytes=32 time<1ms TTL=64
Reply from 172.17.24.1: bytes=32 time<1ms TTL=64
Reply from 172.17.24.1: bytes=32 time<1ms TTL=64

Ping statistics for 172.17.24.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

Figure 6-2: Network Layer Connectivity Check - ping 172.17.24.1 Result – Example screenshot of the correct output result for the ping 172.17.24.1 command.

6.3.3. Test External Connectivity:

ping 8.8.8.8

correct results:

```
c:\>ping 8.8.8.8

Pinging 8.8.8.8 with 32 bytes of data:
Reply from 8.8.8.8: bytes=32 time=21ms TTL=118
Reply from 8.8.8.8: bytes=32 time=16ms TTL=118
Reply from 8.8.8.8: bytes=32 time=18ms TTL=118
Reply from 8.8.8.8: bytes=32 time=20ms TTL=118

Ping statistics for 8.8.8.8:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 16ms, Maximum = 21ms, Average = 18ms
```

Figure 6-3: External Connectivity Check - ping 8.8.8.8 Result - Example screenshot of the correct output result for the ping 8.8.8.8 command

6.3.4. DNS Layer Verification

Command: nslookup AS400.inteplast.com

correct results:

```
c:\>nslookup AS400.inteplast.com
Server:      UnKnown
Address:     172.17.8.25      DNS Server

Name:       AS400.inteplast.com
Address:    172.18.16.21     AS400 Server
```

Figure 6-4: DNS Layer Verification - nslookup Result - Example screenshot of the correct output result for the nslookup AS400.inteplast.com command.

Observation	Interpretation
Correct IP returned (172.18.16.21)	DNS normal
Timeout / no response	DNS server issue or misconfiguration
Incorrect IP	Possible DNS hijack; check hosts file or security policy

6.3.5. Application Layer Testing

Service Health Check: (command)

```
curl -I https://wpjk.inteplast.com
→If correct, you will see below information
HTTP/1.1 200 OK
Server: nginx/1.28.0
Date: Thu, 13 Nov 2025 21:06:43 GMT
```

Content-Type: text/html
Content-Length: 525
Last-Modified: Thu, 28 Aug 2025 00:55:29 GMT
Connection: keep-alive
ETag: "68afa901-20d"
Accept-Ranges: bytes→ If 5xx errors, likely an application or backend issue.

Figure 6-5: Application Layer Test - curl -I Result - Example screenshot of the correct output result for the curl -I https://wpjk.inteplast.com command, returning HTTP/1.1 200 OK.

6.3.6. Finish Check of the connection, please reopen the application again.

6.4. XF network topology:

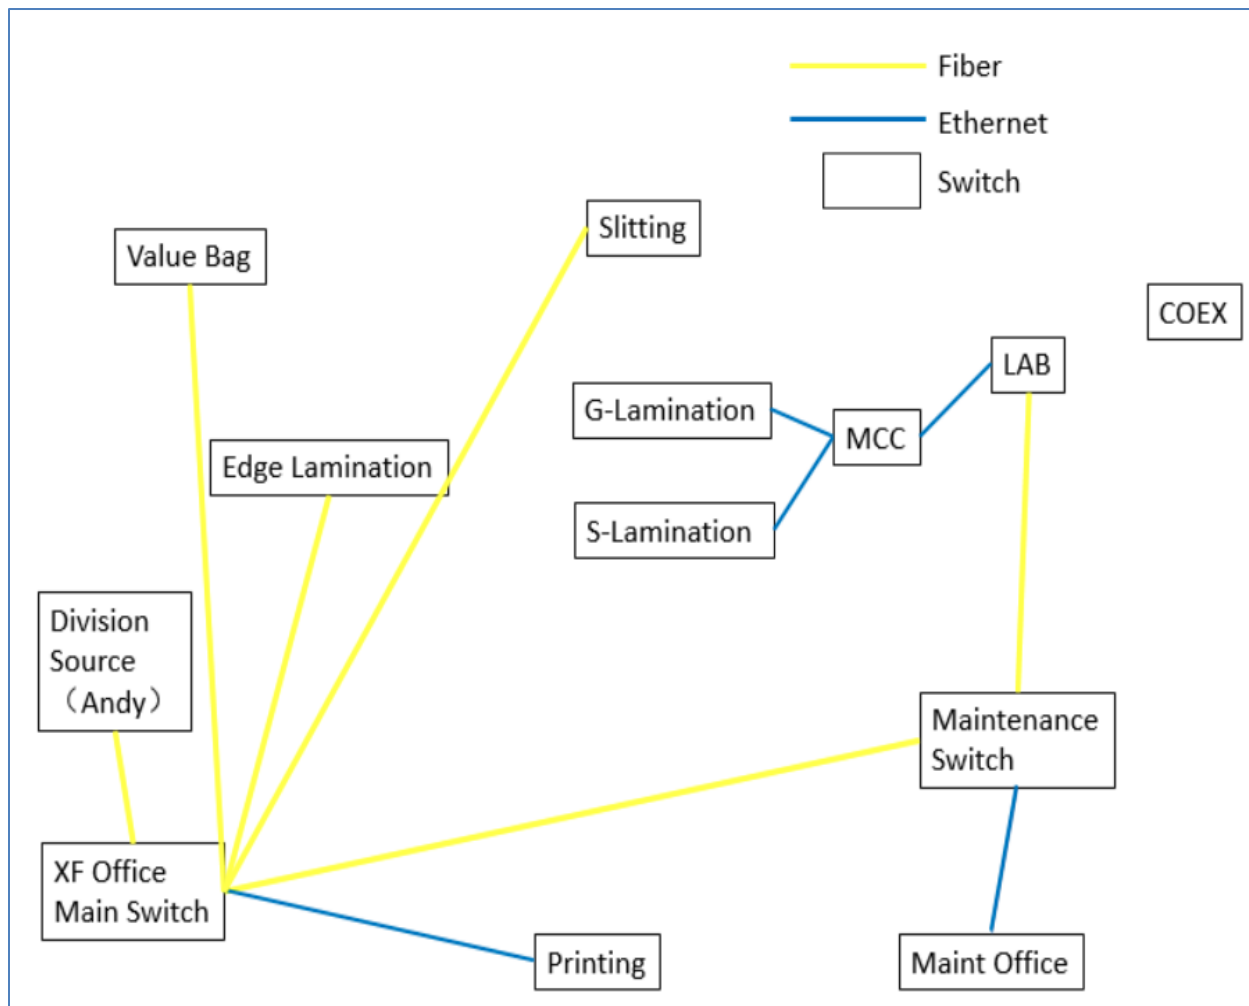


Figure 6-6: XF Network Topology Diagram - XF facility network topology diagram containing yellow fiber-optic links and blue Ethernet connections.

7. Special static IP address of XF

8. Q&A

8.1.1. Q: If couldn't ping to the AS400 server, but you have internet access.

8.1.2. Q: If the message appears on the AS400 button, “incorrect password or user does not exist”.

A: Let user to wait 15 mins, then try it again.(The account will be locked for 15 minutes after three incorrect password attempts.)

8.2. Q: What is the current DNS server?

A: 172.17.8.25

172.18.16.53

172.19.254.52

8.3. Q: What is the correct Gateway of XF?

A: 172.17.24.1

8.4. Q: What is the netmask of XF?

A: 255.255.248.0