CE / CS / SE 3354 · SOFTWARE ENGINEERING · FALL 2026

Project Deliverable P1

Proposal and Requirements

Weight 4% · Due Sunday 18 October 2026, 11:59 PM Central · Submit one PDF per team on Canvas

Field	Your entry
Project title	“Whoosh” Events
Team number and section	Team 05 Section .003
Team members (name · net ID)	Austin Ou Yang · axo240008 | Habib Mashhood · hxm240043| Jaiom Rola · jmr230006 | Ahmed Fouad . amm230041 | Atharva Thombare · axt230126 |Sinan Can Demir . dal715992
Repository URL	https://github.com/AO2-Git/CS3354-Team05-Project
Document version	0.1
Date	10/14/2026

▸ HOW TO USE THIS TEMPLATE

This template is the structure we expect, not a form to pad out. It follows the section ordering of ISO/IEC/IEEE 29148, the current international standard for requirements engineering, so that the document you start now grows into a full requirements specification by P2 rather than being thrown away and rewritten.

Delete every blue box like this one before you submit. They are instructions, not content, and a document that still contains them has not been read by its own authors.

Length: aim for 10 to 14 pages of your own content. A longer document is not a better one. Every section below carries a budget; a section that runs to twice its budget is usually padded, and padding is visible.

▸ WHAT P1 DOES NOT ASK FOR

P1 is a baseline, not a finished specification. At this milestone we are NOT asking for:

— **a software architecture or any design decision** (that is P2, after Chapter 8)

— **class diagrams, sequence diagrams or state models** (that is P2, after Chapters 7 and 9)

— **a test plan** (that is P3, after Chapter 11)

— **any code, screens or a working prototype** (P1 is marked on reasoning, not on implementation)

A team that submits an architecture diagram at P1 has spent its effort in the wrong place and will not be credited for it.

0 Revision History and Contribution Record

Both tables below are graded. The contribution record carries the individual 20% of this milestone and must be consistent with your repository history.

Version	Date	Author	Summary of change
0.1	10/18/26	Team 5	Initial baseline for P1

0.1 Individual contribution record

Team member	What this person produced for P1	Evidence in the repository
Austin Ou Yang	-Explained our last exclusion of scope in Section 1.2 - Declared requirements FR-01 to FR-08 - Added Assumption/Dependency A1 - Described User Characteristics - Context Diagram Complete for Section 2.1 - System Boundary Explanation Paragraph Completed for Section 2.1 - Added two stakeholders for Section 2.2. - Drafted owners for Section 4.2	Section 1.1, Section 1.2, Section 2.1, Section 2.2, Section 2.3, Section 3.1, Section 4.2, Section 4.4
Ahmed Fouad	- Changes to 3.1 and added more requirements - Worked on section 3.2, 3.3 - Reviewed the document for inconsistencies or changes needed	Section 1.1, 3.1, 3.2, 3.3
Habib Mashhood	-Added more stakeholders to Section 2.2 -Listed Project Constraints in Section 2.4 -Added an assumption in Section 2.5 -Wrote the feasibility summary in Section 2.6	Section 1.1, 2.2, 2.4, 2.5, 2.6
Jaiom Rola	- Declared project risks in Section 2.4 - Listed Open-Ended Questions in Section 5 - field out risks in section 4.3	Section 1.1, 2.4, 5, section 4.3
Atharva Thombare	- Contributed 2 QR -Designed initial use-case diagram -Filled out extended use-case table -Explained the traceability from FR to the use-cases -Explained how the table exposed other use-cases that weren't initially thought of	Sections: 1.1, 3.2, 3.4, 3.5
Sinan Demir	- Drafted section 4.2	Section 4.2

▸ **WHAT GOES HERE**

Evidence means something a reader can open: a commit range, an issue number, a pull-request review, a document section you wrote. “Helped with requirements” is not evidence.

Every member must appear with a distinguishable contribution. A row that duplicates another row word for word earns neither member credit.

If a member did not contribute, say so here rather than at the end of term. Section 'Teamwork, Accountability, and Academic Honesty' in the syllabus explains why late complaints cannot be evaluated fairly.

1 Introduction

1.1 Purpose of this document and of the system

▸ **WHAT GOES HERE**

Two short paragraphs. The first says what this document is and who it is for. The second says what the system is for — the problem, and whose problem it is.

Budget: half a page.

Worked example: *“CometLocker addresses the loss of parcels left at the campus post office counter, which currently requires a staffed desk during business hours and leaves students without a way to collect a delivery outside those hours.”*

Woosh Events is a website that tracks UTD’s events (clubs, social, community) and allows students to create their own events. Currently, information about UTD Events is scattered across multiple websites, so our goal is to consolidate that information into one website.

1.2 Scope

▸ **WHAT GOES HERE**

A scope statement is only useful if it says what is excluded. Fill both columns. An empty right-hand column means you have not scoped anything.

Budget: the table, plus two sentences on why the exclusions were excluded.

In scope — we will build this	Out of scope — we will not, and why
Scraper that finds all events from multiple sources	No comments over event details
Loaded list[block style] of events with filter	Direct event creation
RSVP Option/ add to personal calendar	Calendar view of events
A page that teaches you how to create a UTD event (club, community, social)	Log in page
Event card- card template that fits the information relevant to the specific event	Event Recommendation

Why the exclusions were excluded:

Direct event creation - To avoid events that were planned without permission, we decided to avoid having direct event registration

No comments over event details - This should fall on the Event Organizer to make their contact info very clear for any questions attendees may have.

Calendar view of events - Calendar view can make browsing difficult; list view will make it easier for users to find events they are interested in.

No log in page - not required to see public events and no security is needed to look at the number of events as a whole.

No event recommendation - Users should be able to know what they like or dislike. The goal of our website is to consolidate information for easier access, not to make recommendations.

1.3 Definitions, acronyms and abbreviations

▸ **WHAT GOES HERE**

Every term your stakeholders use in a way a newcomer would misread, and every abbreviation, expanded at first use. If a word in your domain has two meanings, that is a finding — record both meanings here and resolve it in section 5.

Term or abbreviation	Meaning as used in this project
Event	A scheduled UTD activity (club, social , or community) listed on a source site in 1.4
Event Card	A fixed layout block that shows one event details in the event list
Event List	The scrollable list of event cards on the main page
Tag	A category or label on an event (for example “social” or “career”) that users can filter by. Our Label list is Social, Academic, Career, Arts & Culture, Sports & Recreation, Service & Volunteering, Cultural.
Scraper	The component that automatically reads event pages from the source sites and extracts event data.
Event organizer	the club, department, or person who posts an event on a source site.
Source site	An external site the scraper reads: the UTD calendar, or the Nebula labs club Calendar.
RSVP	A user’s signal that they plan to attend an event

1.4 References

▸ **WHAT GOES HERE**

Anything you relied on: a standard, a campus policy, an existing system's documentation, an interview transcript in your repository. Give each a number so requirements in section 3 can cite it as a source.

[R1] UTD Calendar - https://calendar.utdallas.edu/calendar

[R2] Nebula Labs Club Calendar - https://clubs.utdnebula.com/events?page=1

2 Overall Description

2.1 Product perspective and context


▸ **WHAT GOES HERE**

Draw the context diagram: one box for your system, every external actor and external system around it, and a labelled line for each interface. Paste the image here.

This is the diagram that decides what you are responsible for. Anything inside the box is your work. Anything you call on and do not build is an external system — and it still goes on the diagram.

Budget: one diagram and one paragraph explaining the boundary choice.

Paste the context diagram here, then explain in one paragraph why the boundary sits where it does.

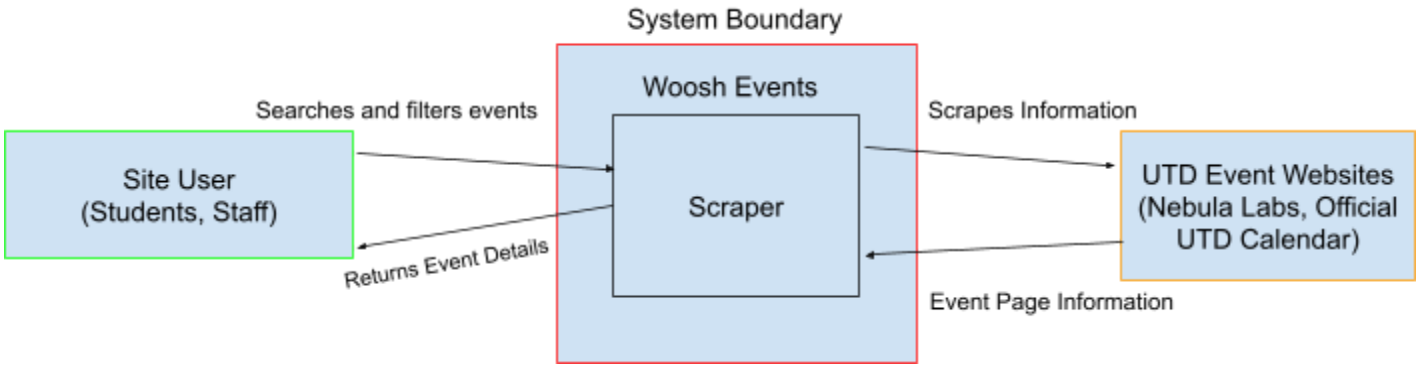

The boundary surrounds only the event scraper, because the event scraper is the only thing we build and maintain. The event websites and site users always act outside of our system, so they exist outside the system boundary. Specifically, site users are human actors, and the event websites are services we read from, but did not build.

2.2 Stakeholders and how you reached them

▸ **WHAT GOES HERE**

Everyone whose needs shape the system, including the ones who will never use it — whoever pays, whoever operates it, whoever has to comply with something because of it.

The last column is the one that earns marks. “We assumed” is an honest and acceptable answer at P1; “interviewed on 9 Oct, notes in /docs/elicitation” is a better one. An entry with no basis at all is not.

Stakeholder	Role in relation to the system	What they need from it	How you learned this
Site Users	Start a use case	Information on events and an easy way to discover events through their selected filters	We, students of UTD, noticed information on events was difficult to obtain since it was scattered across several websites. Thus, we decided to

Stakeholder	Role in relation to the system	What they need from it	How you learned this
			gather the information onto one site.
Developer Team	Builds and Maintains the Site	A scraper to grab information from UTD pages, and a website to display the information obtained in a formal layout.	This was decided on during the 10/14/26 Team 05 meeting. These are fundamental parts of our idea.
Event Organizers(clubs, departments)	Indirect user, content provider	Their events shown accurately, and a clear way to learn how to host one	Assume from FR-04 the exclusion of comments (1.2)
Nebula Labs and UTD Calendar Maintenance teams	Operate the source sites, never use our system	Scraping that doesn't overload or break their sites	Assumed
Course instructor & Teaching Assistants	Evaluate the project	Requirements that are testable and within scope	stated in the p1 template

2.3 User characteristics

▸ **WHAT GOES HERE**

Who the users are, what they already know, what they cannot be assumed to know, and anything about them that constrains the system — accessibility needs, the device they will be holding, the hurry they are in.

Budget: a short paragraph per user class.

Users are assumed to have basic knowledge to navigate the internet. They should already know that the site is for navigating a list of UTD events. They cannot be assumed to know what events are available. It may also be assumed that they are accessing the site from a laptop, desktop, or mobile device. Layouts must work on a phone screen, and the site should be readable for users with accessibility needs, for example keyboard navigation and sufficient text contrast.

2.4 Constraints

▸ **WHAT GOES HERE**

A constraint removes a design choice. "We must use the existing campus single sign-on service" is a constraint. "The system should be fast" is not — that is a quality requirement, and it belongs in 3.2.

Record the source of each constraint. An unsourced constraint is usually a preference somebody has mistaken for a rule.

Event data comes only from the sources, which are the source sites (Nebula labs UTD clubs & UTD Events calendar). Users cannot create events directly on the site. P2 must be submitted by November 8, 2026. Work is managed in the team Github repo, with testing in preproduction before merging to production.

2.5 Assumptions and dependencies

▸ **WHAT GOES HERE**

An assumption is something you are treating as true without having confirmed it. A dependency is something outside your control that your plan needs.

State what breaks if each one turns out to be wrong. That sentence is the whole value of this section.

#	Assumption or dependency	What breaks if it does not hold
A1	The websites referenced in section 1.4 do not have any corrupt or illegible events.	Some events may not display or may only partially display information properly.
A2	Both source sites stay publicly accessible without login and don't block automated access.	The scraper returns no events, and the event list is empty or stale.
A3	The same event is not posted on both sources, or can be matched when it is.	The site can't be deployed for the demo.

2.6 Feasibility summary

▸ **WHAT GOES HERE**

Four short verdicts, each with the evidence behind it. This is the Chapter 4 material, applied to your own project.

A verdict with no evidence is an opinion. "Technically feasible — two team members have used this framework before, see repository /spike-01" is evidence. "We think we can do it" is not.

Feasibility gate	Verdict	Evidence behind the verdict
Technical	Feasible, provisional	Both source sites are public event pages (Nebula labs UTD clubs & UTD Events Calendar). A small test scrape of each page would confirm this.
Operational	Feasible	The site is read-only and has no accounts, so there is little to operate once deployed.
Schedule	Feasible with risk	6 members, and the milestone plan in 4.2 runs from the 18th of October to November 8th.
Economic / resource	Feasible	No budget is needed. It depends on the website being hosted for free and student time.

3 Specific Requirements

▸ **WHAT GOES HERE**

This section carries the most marks in P1. Everything else sets it up.

Expected volume: 8 to 15 functional requirements, 4 to 6 quality requirements, 2 to 4 constraint requirements, 4 to 6 use cases with 2 written out in full. More is not better; vague is worse than few.

Every requirement must pass the testability test from Chapter 5: a reader must be able to decide pass or fail without arguing. That needs a measurable condition and a stated way of checking it.

Write every requirement as a single "shall" sentence. If you need the word "and" twice, you have two requirements.

3.1 Functional requirements

▸ **WHAT GOES HERE**

What the system does. Use the identifier FR-nn and keep the identifiers stable from now on — P2 and P3 will refer back to them.

Priority uses MoSCoW: MUST (the release fails without it), SHOULD (important, there is a workaround), COULD (desirable), WON'T (agreed out of this release).

Source is the stakeholder or reference the requirement came from — a row from 2.2, or a reference from 1.4.

ID	Requirement — one "shall" sentence	Priority	Source	Acceptance criterion
FR-01	The system shall have at least 20 events listed on one page.	MUST	1.2	A tester can confirm this by loading our website and counting the number of events listed on the page.
FR-02	The system shall have filters to display events by a specific "tag" from the list defined at 1.3	MUST	1.2 & 1.3	A tester can confirm this by accessing our website and using the filter feature to sort by a specific tag. After a filter(s) has been selected, then confirm that only the events with those specified tags are appearing in the list. Repeat this 5 times for confirmation.
FR-03	An event that appears on more than one source site from our 1.4 list shall appear only once in the event list.	SHOULD	1.4, 2.2	A tester finds 3 events listed on at least two of sources listed on at 1.4. Pass if each appears exactly once in the event list.
FR-04	The system shall have a 'How can I host an event at UTD?' page that links to the official page for submitting an event on each source site in 1.4.	COULD	1.2	A tester needs to confirm that this page exists, and has content associated with the title for each source of 1.4.
FR-05	The system shall show every event from source 1.4 in our event list.	MUST	1.2	A tester picks 10 upcoming events from each source of two sources from our sources list. Pass if all selected events appear in our event list.
FR-06	The system shall have an "Add to Calendar" feature that allows users to download .ics files.	COULD	1.2	A tester can confirm this by accessing any event on our website and clicking on the "Add to Calendar" icon. Then, confirm that the .ics file is downloaded.
FR-07	Each event card shall show the event's title, date, start time, location, organizer, tags and a link to the source page.	SHOULD	1.2	A tester checks 10 event cards, at least 3 from each source site. Pass if every card shows all seven fields, or 'Not listed' when the source site leaves a field blank.
FR-08	The system shall let a Site User filter the event list by event organizer.	SHOULD	2.2	A tester filters by 3 different organizers. Pass if every event shown each time belongs to that organizer.

ID	Requirement — one "shall" sentence	Priority	Source	Acceptance criterion
FR-09	The system shall show an event's full description when a Site User selects its event card.	SHOULD	2.2	A tester selects 5 event cards. Pass if each shows the same description as on its source site.
FR-10	Each event card shall have a "Copy link" button that copies a URL opening that event on our site.	COULD	2.2	A tester copies the link from 5 events and opens each in a new browser window. Pass if each opens the same event.
FR-11	The system shall load the next 20 events when a Site User reaches the end of the event list.	SHOULD	2.2	With more than 40 upcoming events, a tester scrolls to the end of the list. Pass if 20 more events appear.
FR-12	Each event card shall show the name of the source site the event came from.	COULD	2.2	A tester checks 10 event cards, at least 3 from each source site. Pass if each shows the correct source site name.

3.2 Quality requirements

▸ **WHAT GOES HERE**

A quality requirement says how well, not what. Performance, availability, usability, accessibility, security, maintainability.

Three ingredients, every time: a number, the condition it holds under, and how it will be measured. "The system shall be responsive" has none of the three and earns nothing.

Worked example: *"QR-01 Ninety-five percent of searches shall return results within 2 seconds, measured over one working week under normal load of up to 50 concurrent users."*

ID	Requirement — with threshold, condition and method	Priority	Source	How it will be verified
QR-01	The event list page shall finish loading within 3 seconds on at least 19 of 20 page loads over a connection of 10 Mbps download with 50 ms latency.	SHOULD	2.2	A tester creates a custom Chrome DevTools network profile (10 Mbps download, 50 ms latency), loads the event list page 20 times and records each load time. Pass if at least 19 loads finish in 3 seconds or less.
QR-02	The filter should be able to sort the events and load them within 2 seconds at least 80% of the time	SHOULD	1.2	A tester can measure the time it takes for events to load using different filter tags and run this multiple times to compute the percentage.
QR-03	An event posted on a source site shall appear in the event list within 2 hours for at least 9 of 10 newly posted events.	MUST	2.2, 5	A tester records when 10 new events are posted on the source sites in 1.4 during one week, then checks when each first appears in our event list. Pass if at least 9 appear within 2 hours.
QR-04	At least 19 of 20 randomly sampled events shall show the same title, date, time and location as on their source site.	MUST	2.2	A tester picks 20 events at random from our event list and compares the four

ID	Requirement — with threshold, condition and method	Priority	Source	How it will be verified
				fields with the source site. Pass if at least 19 matches on all four.
QR-05	Every page shall display without horizontal scrolling on a screen 375 pixels wide.	SHOULD	2.3	A tester opens every page in Chrome DevTools device mode at 375 pixels wide. Pass if no page needs horizontal scrolling.
QR-06	When a source site cannot be reached during a refresh, the event list shall keep all of that site's events from the last successful refresh.	SHOULD	2.5	A tester blocks one source site's address and runs a refresh. Pass if every event from that site that was listed before the refresh is still listed after it.

3.3 Constraint requirements

▸ **WHAT GOES HERE**

Constraints carried forward from 2.4, written in requirement form with an identifier so they can be traced like any other requirement.

ID	Constraint — one sentence	Source	Why it cannot be negotiated
CON-01	The system shall not allow Site Users to create their own events.	2.4, 1.2	UTD events must be approved through UTD's own process before they are posted. Our site has no way to check that approval, so allowing event creation would let unapproved events appear as if they were official.
CON-02	The system shall get event data only from the source sites listed in 1.4.	2.4	The UTD Calendar and the Nebula Labs Club Calendar are UTD's official places for posting events. Taking events from any other site could show unapproved or fake events.
CON-03	The scraper shall read only the pages that each source site's robots.txt file allows.	2.2, 2.5	The owners of the source sites set these rules, not us. Ignoring them could get our scraper blocked, which would break assumption A2 and leave the event list empty.
CON-04	The system shall run on a free hosting service with no paid costs.	2.6	The team has no budget for this project, as stated in the economic feasibility verdict in 2.6.

3.4 Initial use cases


▸ **WHAT GOES HERE**

First the diagram: actors, use cases, the system boundary, and any «include» or «extend» relationships. Paste the image.

Then write out two use cases in full — choose the two that are hardest to scope, not the two that are easiest to write. Use the template below for each.

Reminder from Chapter 6: a use case is started by an actor, ends when that actor has finished something they came to do, and has value on its own. “Validate Password” is a step, not a use case.

Paste the use case diagram here.

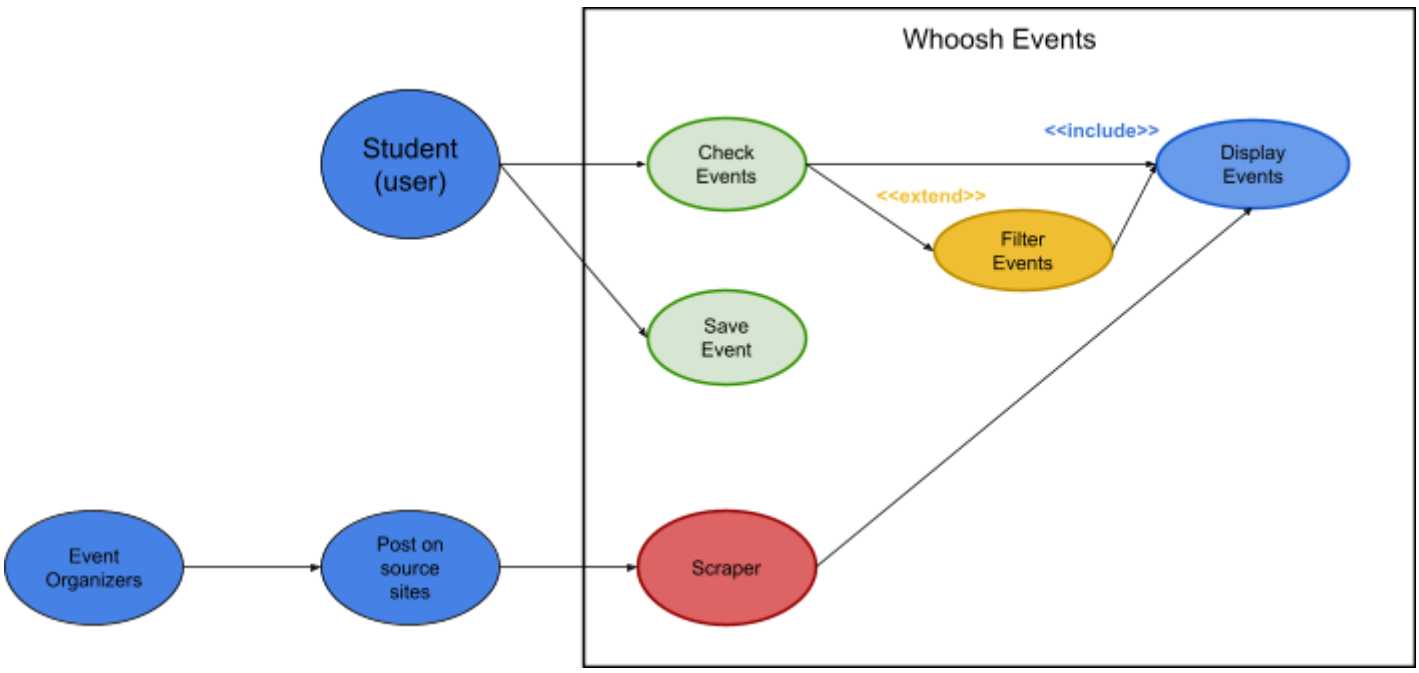

Expanded use case — copy this block for each of your two

Field	Content
Identifier and name	UC-01
Primary actor	Student
Supporting actors	Organizations, Clubs, Source Sites
Preconditions — what must be true before it starts	Events must exist on source sites in order for the system to work as intended.
Trigger — what starts it	The student starts the use-case
Main success scenario — numbered steps	student opens website -> website loads 20 most recent events -> students scrolls and finds an event.
Alternative and exception flows	Instead of the student scrolling, the student uses the filter to sort events and finds an event. Additionally they can also save the event. A potential exception might be that the student wants to post an event directly in the system.
Postconditions — what is true when it succeeds	When this succeeds, the use-case is resolved/completed, the student has found their wanted event and they close the website/system.
Requirements realised	FR- 01 - FR-12

3.5 Requirements to use case traceability

▸ **WHAT GOES HERE**

One row per requirement. The matrix is doing its job when it shows you something you did not already know.

Two shapes of trouble, and you must say what you did about each: a requirement that reaches no use case (either a use case is missing, or the requirement is not functional and belongs in 3.2), and a use case nothing traces to (either it is out of scope, or a requirement was never written down).

Requirement ID	Use case(s) that realise it	If blank — why, and what you will do
FR-01	The student scrolls to find an event	
FR-02	The student wants to filter specific events	
FR-03	The student scrolls to find an event	
FR-04	The student wants to add an event (They can't add events directly, but the website will have info on where they can submit an event on a source site)	
FR-05	The student scrolls to find an event	
FR-06	The Student wants to save an event to their calendar	
FR-07	The student scrolls to find an event	
FR-08	The student wants to filter specific events	
FR-09	The student scrolls to find an event	
FR-10	The student wants a bookmark link to share/view later	
FR-11	The student scrolls to find an event	
FR-12	The student scrolls to find an event	

What the matrix revealed, and what you changed because of it:

This table helped understand how to break down multiple use-cases instead of a generic understanding of "The student wants to check events". While checking event details is the main point of the website, students may want more than simply checking and closing the system/website. Students may also want to save the event or even share it to a friend, in which case they would use the "copy-link" button.

4 Project Plan

4.1 Team roles and working agreement

Team member	Role for P1 to P2	How the team makes a decision when it disagrees
Austin Ou Yang	Assist All Sections	Put it to a majority vote in Discord. (Trackable History)
Jaiom Rola	4,5 and help with 1	Put it to a majority vote in Discord. (Trackable History)
Habib Mashhood	Doing section 2 and parts of section 1	Put it to a majority vote in Discord. (Trackable History)
Sinan Demir	4	Put it to a majority vote in Discord. (Trackable History)
Ahmed Fouad	3	Put it to a majority vote in Discord. (Trackable History)
Atharva Thombare	2	Put it to a majority vote in Discord. (Trackable History)

4.2 Plan to P2

▸ **WHAT GOES HERE**

Milestones between now and 8 November, each with a date and a named owner. Five to eight rows is right.

Date	What will be finished	Owner
Sun 18 Oct	P1 baseline reviewed by all six members,exported to PDF and submitted	Austin Ou Yang (Submits the PDF)
Wed 21 Oct	P1 feedback and open questions (section 5) triaged. Any requirement changes go through change control and are logged in section 0	Team 5 Members
Sun 25 Oct	Candidate architecture options drafted and one chosen, with the rationale written down	Team 5 Members
Sun 1 Nov	Class diagrams for event scraper, event store, event list/filter and calendar export	Team 5 Members
Wed 4 Nov	Sequence diagrams for the two expanded use cases, plus state model if needed	Team 5 Members
Sat 7 Nov	Full P2 draft merged, traceability matrix updated, contribution record and AI-use log updated, team read-through	Team 5 Members
Sun 8 Nov	P2 PDF submitted	Austin Ou Yang (Submits the PDF)

4.3 Risks

▸ **WHAT GOES HERE**

Your five biggest. A risk is something that has not happened yet — if it has already happened it is a problem, and it belongs in section 5. **Mitigation must be an action with an owner,** not an intention. “Start early” is not a mitigation.

#	Risk	Likelihood	Impact	Mitigation — action and owner
R1	Event sites change and switch layouts, meaning the parser may not be able to extract info from events anymore.	low	high	Jaiom team - find a backup plan if parser cannot get events
R2	There are issues with some events on different sites being misleading or only partially filled out.	low	high	jaiom - have a moderator or create a filter
R3	Several team members working in the same files can cause conflicts to merge edits or cause one person's edits to overwrite another.	medium	medium	jaiom - create pull requests on github and have at least one reviewer
R4	Miscommunication between team members about workflow, schedule and availability may lead to missed deadlines	low	medium	Sinan - Each member shares their availability on Discord by October 21. Assign and record ownership of tasks through GitHub Issues, and track progress with milestones or simple checklists before submission.
R5				

4.4 Repository and tooling

▸ **WHAT GOES HERE**

The repository URL, the branch and commit conventions you have agreed, how issues are used, and who has access. The instructor must be able to open it.

https://github.com/AO2-Git/CS3354-Team05-Project

Team Members have access to collaborate on the repository. There will be a production branch and a preproduction branch. Changes must be tested and validated in preproduction before merging into production.

4.5 Declaration of AI tool use

▸ **WHAT GOES HERE**

List every artificial intelligence tool the team used for P1, what it was used for, and what you did to check its output.

Using these tools is permitted. Not declaring them is not. Start the log now — the full AI-use log is required evidence at P3, and reconstructing it in December is much harder than keeping it from October.

Tool	What it was used for	Who used it	How the output was checked

5 Open Questions

▸ **WHAT GOES HERE**

A question you cannot answer from what you have is a finding, not a failure. It belongs here, in writing, with the name of the person who can answer it and the date you need the answer by.

This section is graded, and an empty one is a warning sign. Every real project at this stage has open questions. A team reporting none has either not looked hard enough or has quietly invented answers — and an invented answer is a business decision the team had no authority to make.

Carry each open question forward into P2 with its resolution, or with a note that it is still open.

#	The question	Who can answer it	Needed by	What you assumed in the meantime
Q1	Will the UTD Calendar and Nebula Labs websites let us collect the event info?	Jaiom	Oct 25	event information is accessible and can be collected from both websites.
Q2	How should we handle duplicate events that are on multiple websites?	Jaiom	Oct 25	events with the same title, date, and location refer to the same event and should only appear once.
Q3	How often should the website update its event listings to keep information up to date?	Jaiom	Oct 25	Once every 1 hour

6 Baseline Declaration

▸ **WHAT GOES HERE**

Once you submit, the content of this document is your P1 baseline. From this point, changes to requirements are made through change control, not by quiet editing — this is the Chapter 5 practice, applied to your own project.

At P2 you will submit this same document, grown and revised, with the revision history in section 0 showing what changed and why. Do not start a new file.

We confirm that the requirements in section 3 represent our agreed baseline as of the submission date, and that every team member has read this document in full.

Team member	Signature or typed name	Date
Jaiom Rola	Jaiom Rola	10/18/2026
Habib Mashhood	Habib Mashhood	10/18/2026
Ahmed Fouad	Ahmed Fouad	10/18/2026
Atharva Thombare	Atharva Thombare	10/18/2026

Team member	Signature or typed name	Date
Austin Ou Yang	Austin Ou Yang	10/18/2026
Sinan Can Demir	Sinan Can Demir	10/18/2026

How P1 Is Marked

P1 is worth 4% of the course grade. Following the syllabus, 80 points are for the shared team artifact and 20 for individual contribution evidence.

Criterion	Points	What full marks look like
Problem, scope and context (1.1, 1.2, 2.1)	10	The problem is a problem somebody actually has. The out-of-scope column is filled and the exclusions are justified. The context diagram's boundary matches what sections 2 and 3 claim.
Stakeholders and elicitation (2.2, 2.3)	10	Stakeholders include at least one who will never use the system. Every need has a stated basis, and assumptions are labelled as assumptions rather than disguised as findings.
Requirements quality (3.1, 3.2, 3.3)	25	Every requirement is one testable “shall” sentence with an identifier, a priority, a source and an acceptance criterion. Quality requirements carry a threshold, a condition and a method. Constraints are distinguished from quality requirements.
Use cases and traceability (3.4, 3.5)	20	Use cases are at actor-goal level, not steps. Two are written out in full, including alternative flows. The matrix is complete and the team says what the gaps mean and what they did about them.
Feasibility and plan (2.6, 4)	10	Each feasibility verdict is backed by evidence a reader can check. The plan has dates and owners. Risks are future events with actionable mitigations.
Open questions and baseline (5, 6)	5	Real open questions, with an owner and a date, and an honest statement of what was assumed in the meantime.
Document quality	—	Guidance boxes removed, sections in order, within the length budget, readable. Marks are deducted here, not awarded.
Individual contribution evidence (0.1)	20	Every member's contribution is distinguishable and traceable to something in the repository a reader can open.

▸ **WHERE MARKS ARE LOST**

Three things that cost teams the most marks every year:

1. Requirements that cannot be tested. “The system shall be user-friendly” earns nothing, however good the rest of the document is. Section 3 is 25 of the 80 team points and this is where they are lost.

2. Use cases written at step level. “Log In”, “Validate Card” and “Open Gate” are three steps of one use case. A diagram of fifteen tiny ovals scores lower than one with five real ones.

3. An empty section 5. It reads as a team that resolved its ambiguities by guessing.